




Shenzhen UnionTrust Quality and Technology Co., Ltd.

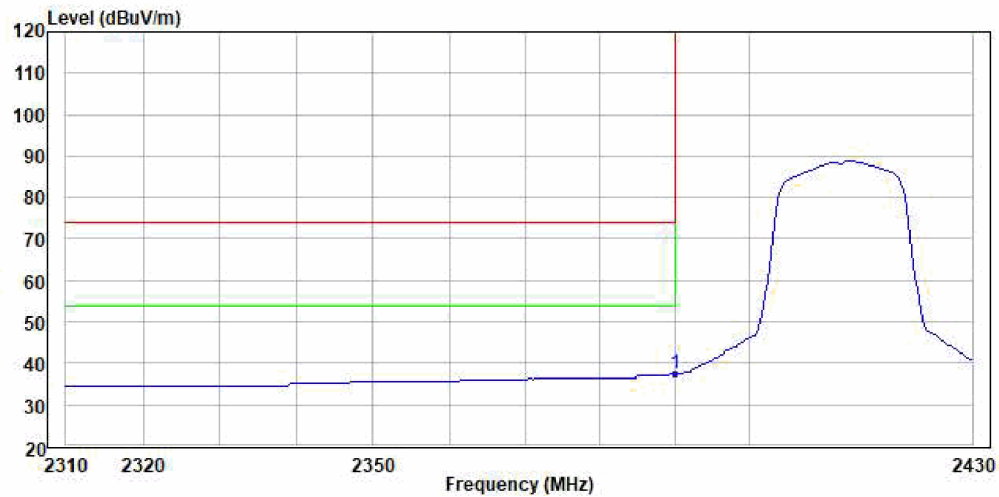


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_G\_ANT2\_2412  
Remark :

| Freq          | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|---------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| MHz           | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP 2390.000 | 37.54  | 36.04      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -16.46     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

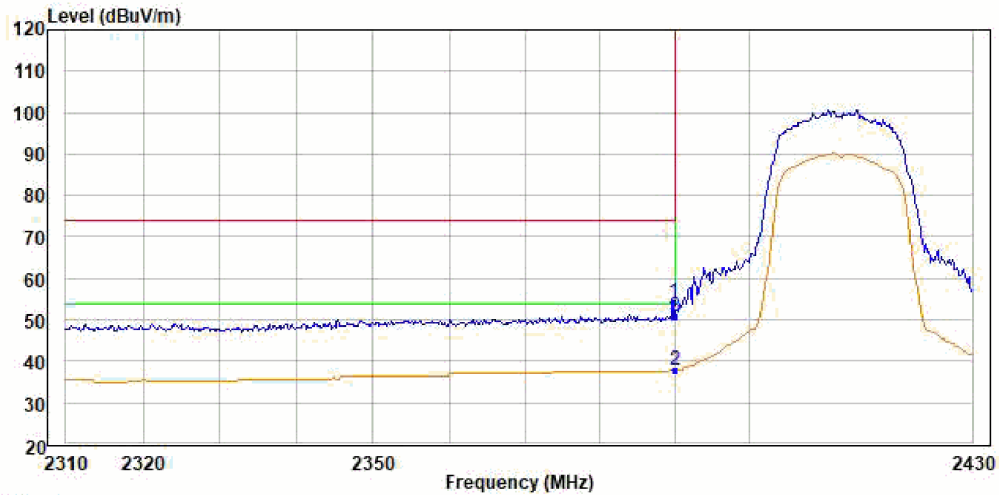

Trace: 1  
Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_G\_ANT2\_2412  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PK | 2389.719 | 54.32  | 52.82      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -19.68     | Peak    |
| 2 PP | 2390.000 | 38.04  | 36.54      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -15.96     | Average |
| 3    | 2390.000 | 50.68  | 49.18      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -23.32     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PK | 2389.719 | 54.32  | 52.82      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -19.68     | Peak    |
| 2 PP | 2390.000 | 38.04  | 36.54      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -15.96     | Average |
| 3    | 2390.000 | 50.68  | 49.18      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -23.32     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

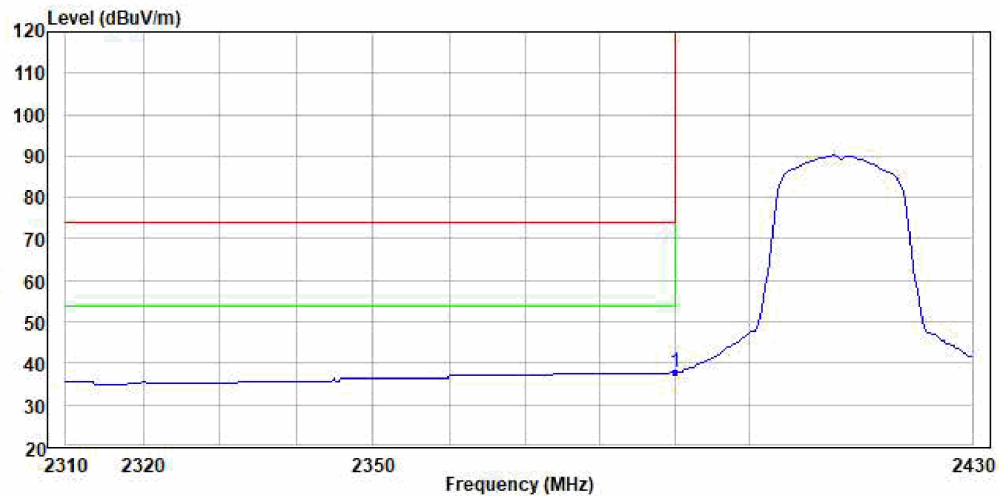


Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_G\_ANT2\_2412  
Remark :

| Freq          | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|---------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| MHz           | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP 2390.000 | 38.04  | 36.54      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -15.96     | Average |





Shenzhen UnionTrust Quality and Technology Co., Ltd.

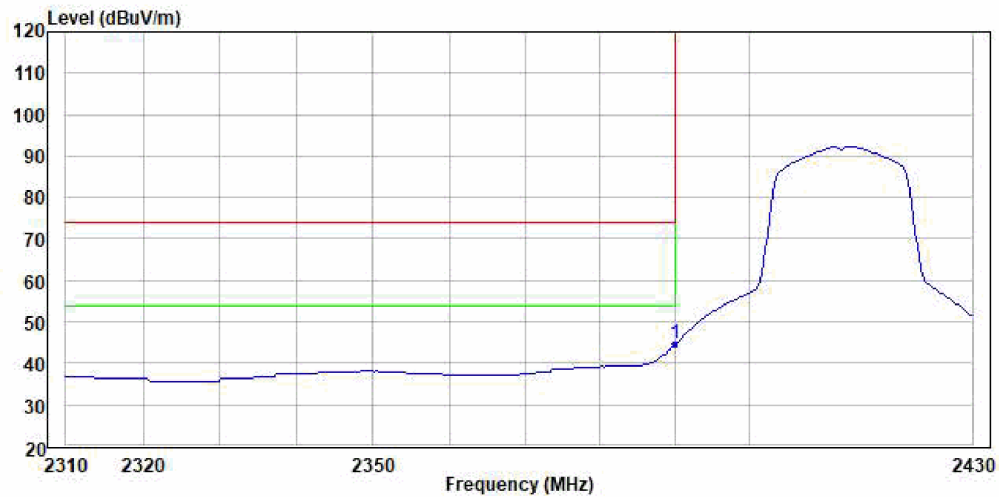


Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N20\_ANT1+2\_2412  
Remark :

| Freq          | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|---------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| MHz           | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP 2390.000 | 44.76  | 43.26      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -9.24      | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

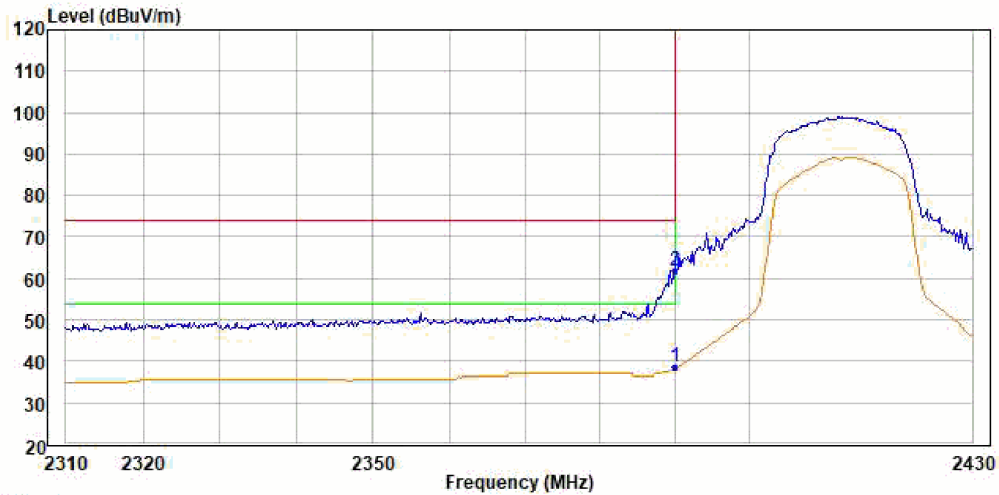

Trace: 1  
Condition : 3m Vertical  
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N20\_ANT1+2\_2412  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 AV | 2390.000 | 38.51  | 37.01      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -15.49     | Average |
| 2 PP | 2390.000 | 61.71  | 60.21      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -12.29     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 AV | 2390.000 | 38.51  | 37.01      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -15.49     | Average |
| 2 PP | 2390.000 | 61.71  | 60.21      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -12.29     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

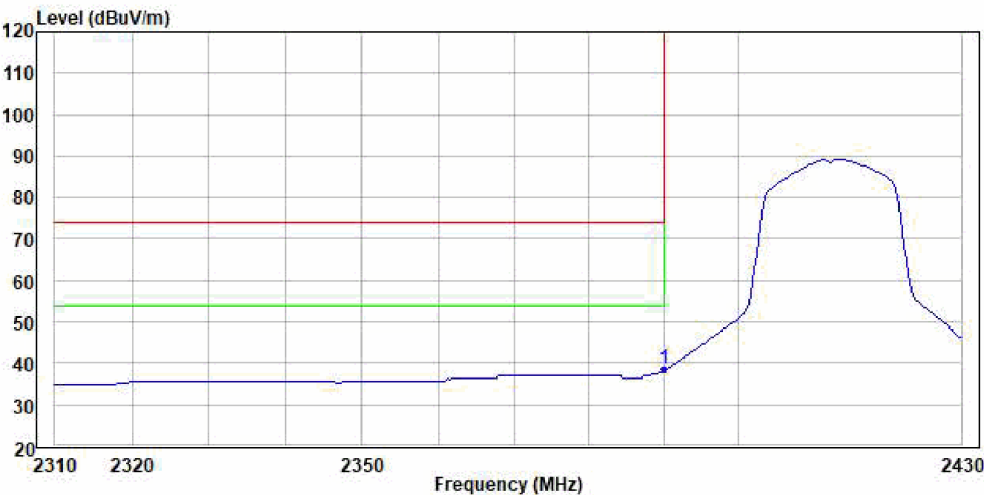


Condition : 3m Vertical  
 Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)  
 Press : 99.7kpa  
 Product : WisGate Soho Pro  
 Model No. : RAK7267  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Jackson  
 Test Mode : 2.4G\_N20\_ANT1+2\_2412  
 Remark :

| Freq          | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|---------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| MHz           | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP 2390.000 | 38.51  | 37.01      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -15.49     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

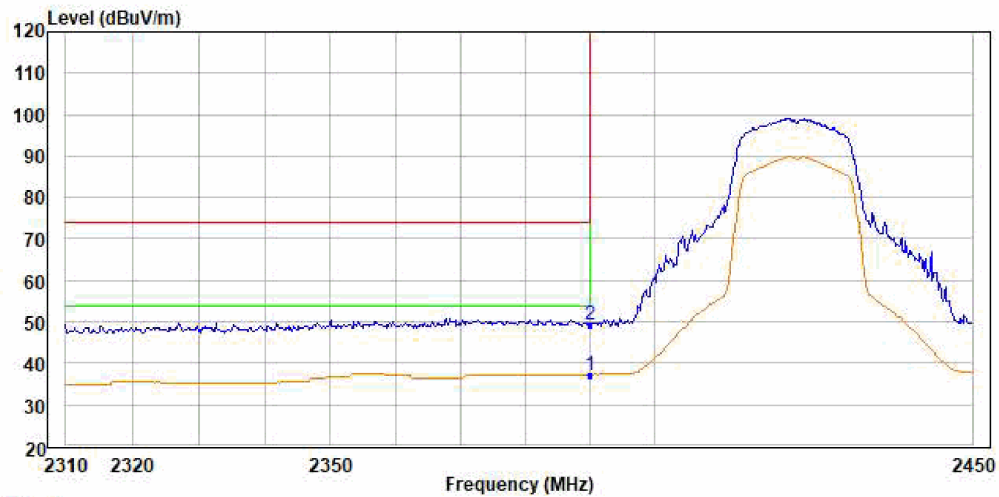

Trace: 1  
Condition : 3m Vertical  
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N40\_ANT1+2\_2422  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2390.000 | 37.02  | 35.52      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -16.98     | Average |
| 2 PK | 2390.000 | 49.38  | 47.88      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -24.62     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PP | 2390.000 | 37.02  | 35.52      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -16.98     | Average |
| 2 PK | 2390.000 | 49.38  | 47.88      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -24.62     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

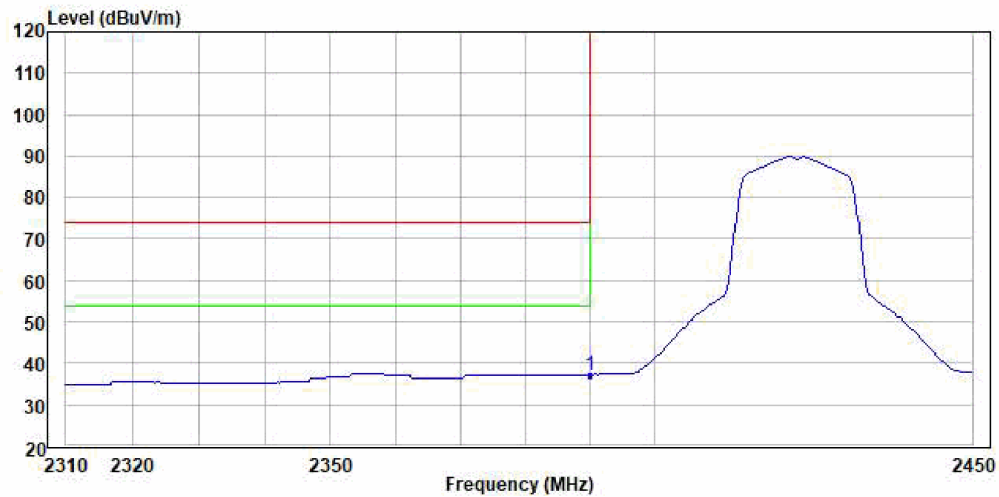


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N40\_ANT1+2\_2422  
Remark :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2390.000 | 37.02  | 35.52      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -16.98     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

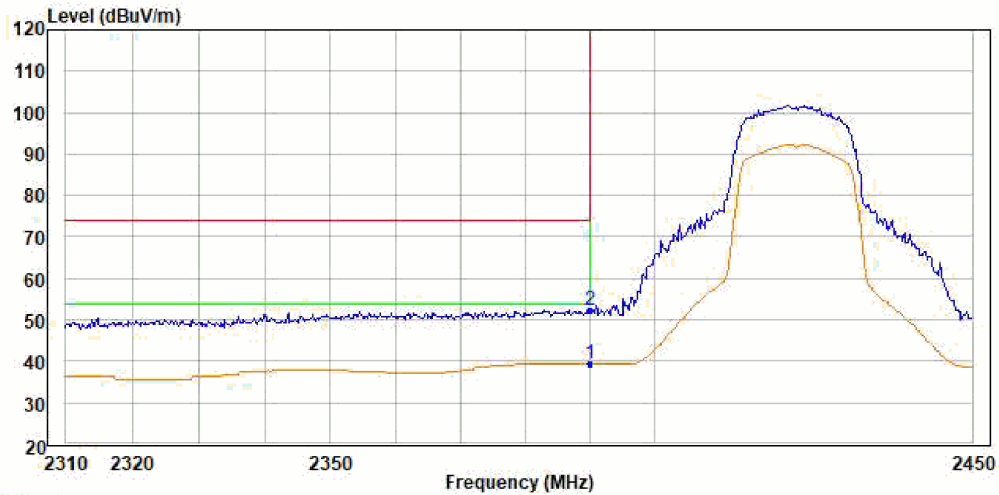

Trace: 1  
Condition : 3m Horizontal  
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N40\_ANT1+2\_2422  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2390.000 | 39.38  | 37.88      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -14.62     | Average |
| 2 PK | 2390.000 | 52.49  | 50.99      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -21.51     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PP | 2390.000 | 39.38  | 37.88      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -14.62     | Average |
| 2 PK | 2390.000 | 52.49  | 50.99      | 31.55      | 10.00      | 7.35       | 47.40         | 74.00      | -21.51     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

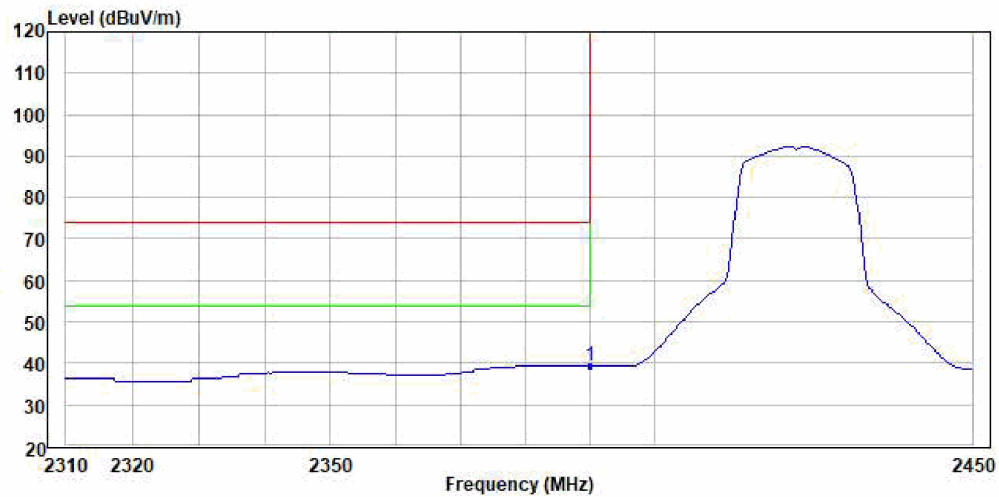


Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N40\_ANT1+2\_2422  
Remark :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2390.000 | 39.38  | 37.88      | 31.55      | 10.00      | 7.35       | 47.40         | 54.00      | -14.62     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

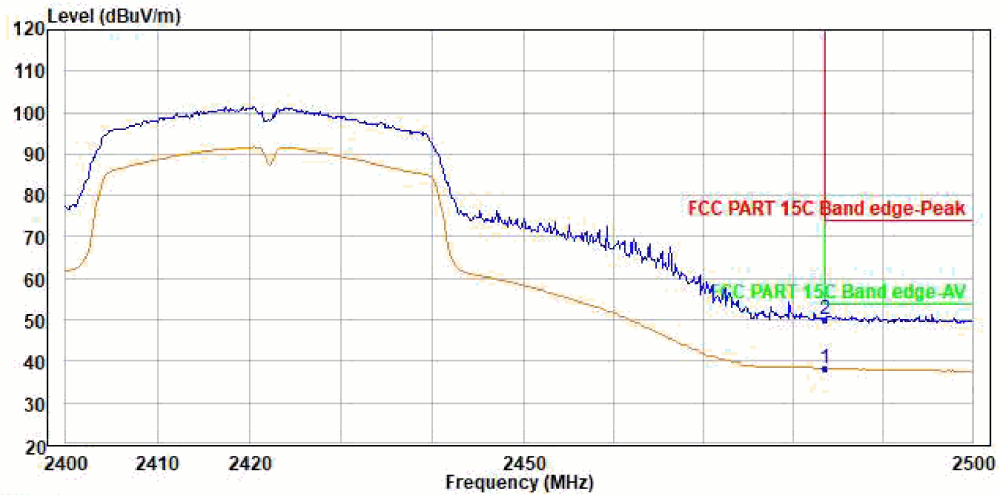

Trace: 1  
Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N40\_ANT1+2\_2452  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 38.29  | 36.54      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -15.71     | Average |
| 2 PK | 2483.500 | 50.19  | 48.44      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -23.81     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PP | 2483.500 | 38.29  | 36.54      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -15.71     | Average |
| 2 PK | 2483.500 | 50.19  | 48.44      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -23.81     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

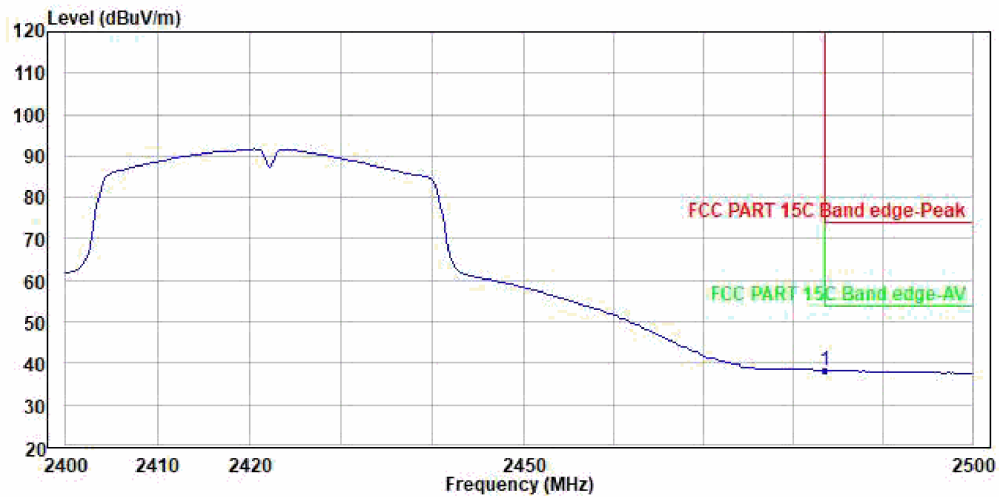


Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N40\_ANT1+2\_2452  
Remark :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 38.29  | 36.54      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -15.71     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

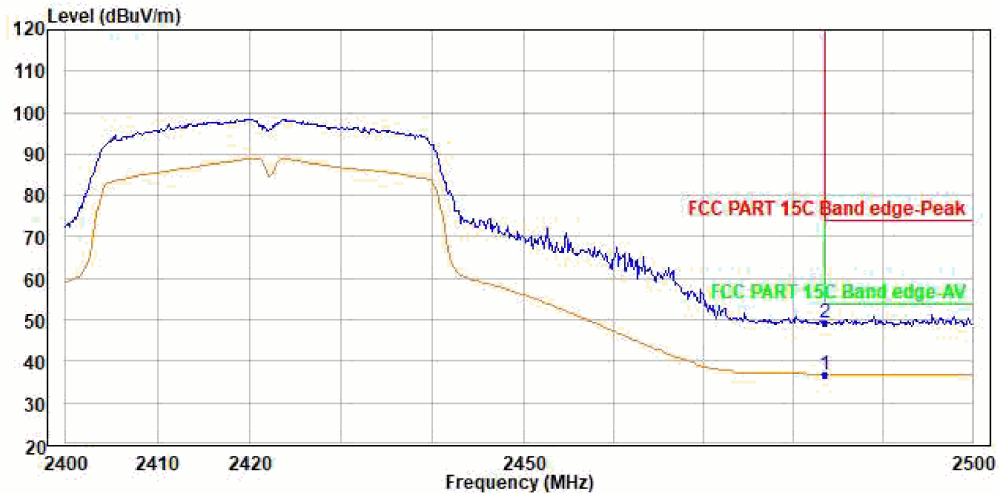

Trace: 1  
Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N40\_ANT1+2\_2452  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 36.71  | 34.96      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -17.29     | Average |
| 2 PK | 2483.500 | 49.42  | 47.67      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -24.58     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PP | 2483.500 | 36.71  | 34.96      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -17.29     | Average |
| 2 PK | 2483.500 | 49.42  | 47.67      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -24.58     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

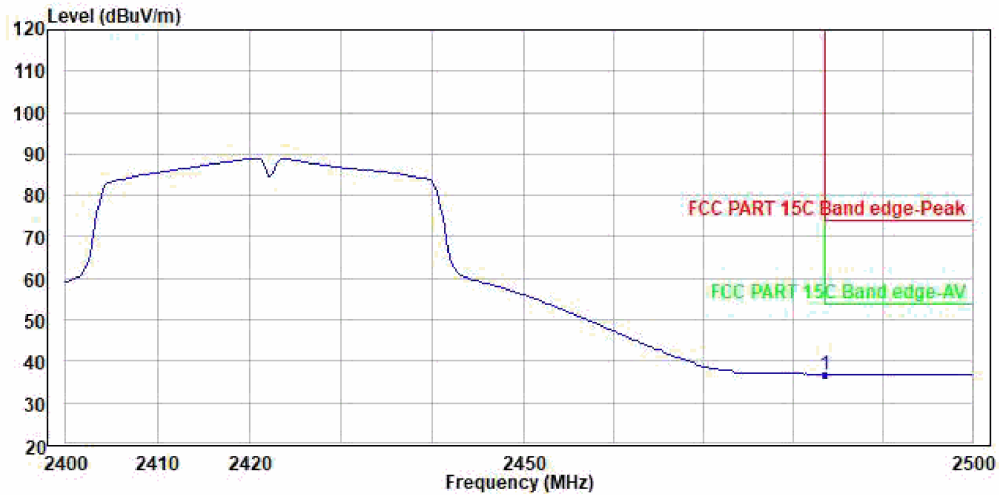


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N40\_ANT1+2\_2452  
Remark :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 36.71  | 34.96      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -17.29     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

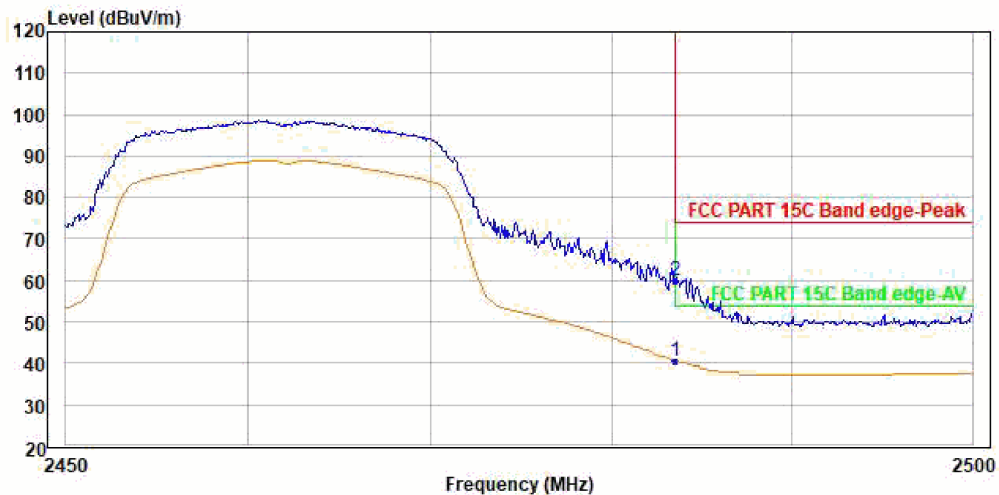

Trace: 1  
Condition : 3m Vertical  
Temp.(C)/Hum.(%) : 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N20\_ANT1+2\_2462  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 40.42  | 38.67      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -13.58     | Average |
| 2 PK | 2483.500 | 60.01  | 58.26      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -13.99     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PP | 2483.500 | 40.42  | 38.67      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -13.58     | Average |
| 2 PK | 2483.500 | 60.01  | 58.26      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -13.99     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

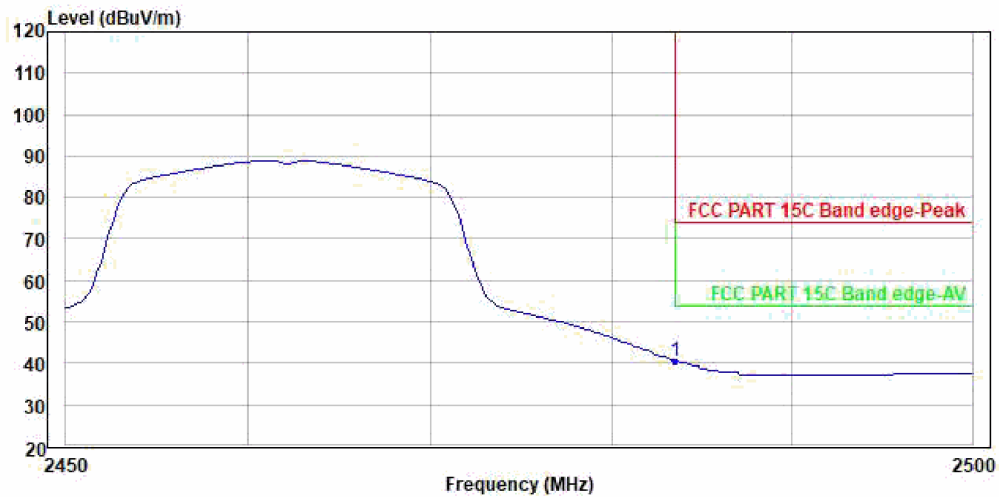


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N20\_ANT1+2\_2462  
Remark :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 40.42  | 38.67      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -13.58     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

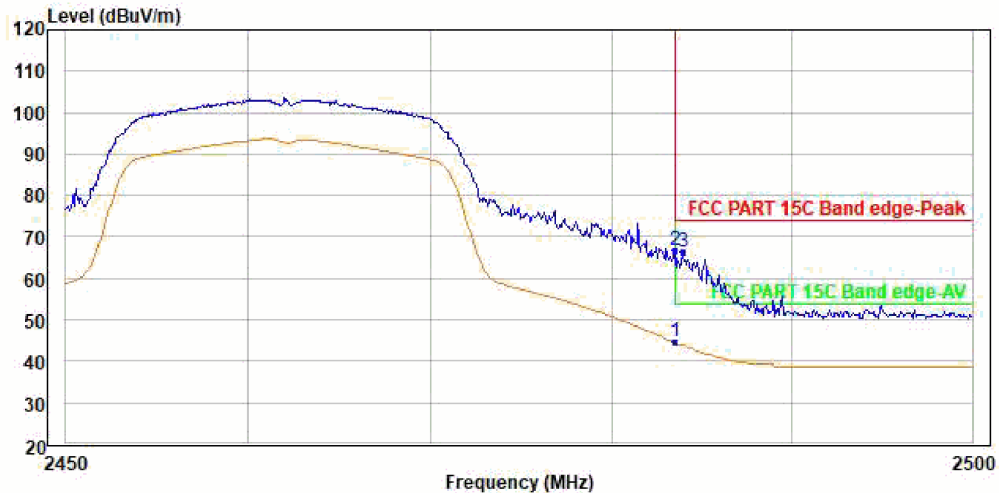

Trace: 1  
Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N20\_ANT1+2\_2462  
Remark :


|   | Freq        | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|---|-------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|   | MHz         | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 | AV 2483.500 | 44.55  | 42.80      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -9.45      | Average |
| 2 | PP 2483.500 | 66.62  | 64.87      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -7.38      | Peak    |
| 3 | 2483.918    | 66.31  | 64.56      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -7.69      | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|   | Freq        | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|---|-------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|   | MHz         | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 | AV 2483.500 | 44.55  | 42.80      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -9.45      | Average |
| 2 | PP 2483.500 | 66.62  | 64.87      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -7.38      | Peak    |
| 3 | 2483.918    | 66.31  | 64.56      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -7.69      | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

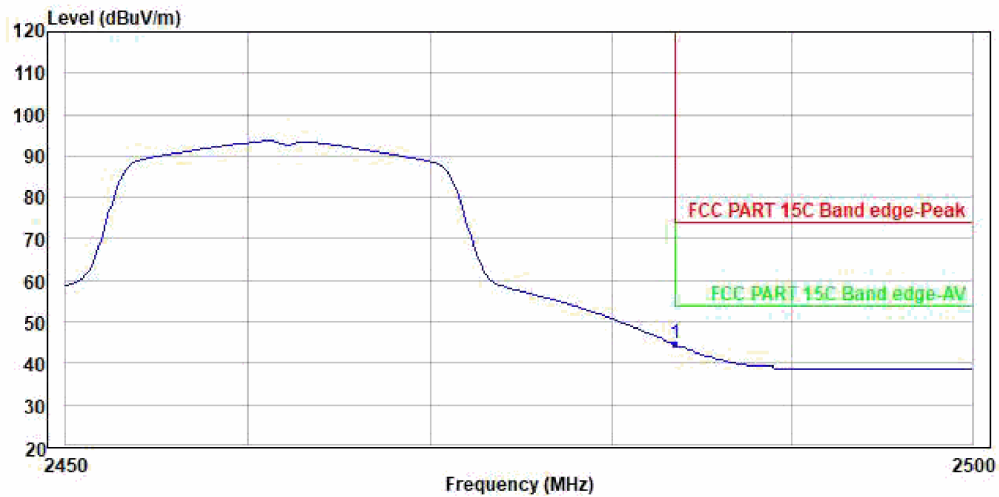


Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_N20\_ANT1+2\_2462  
Remark :

| Freq          | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|---------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| MHz           | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP 2483.500 | 44.55  | 42.80      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -9.45      | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

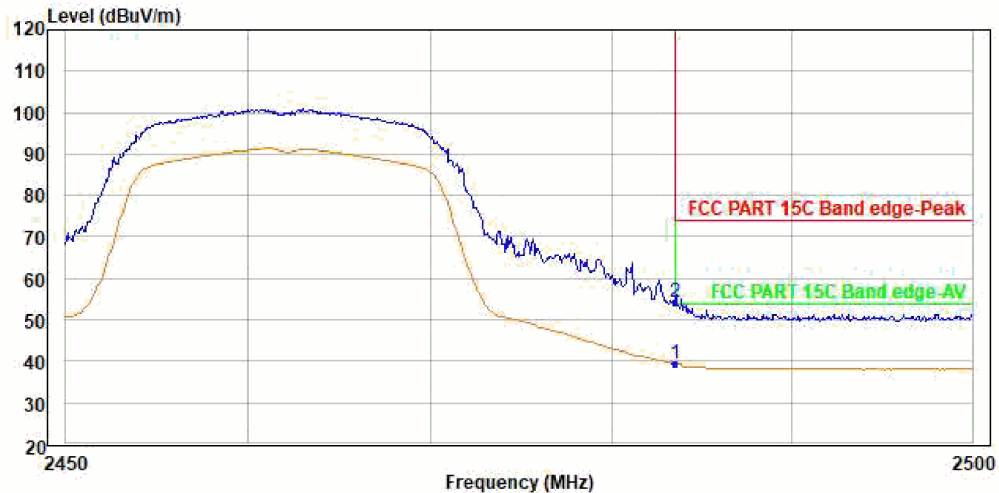

Trace: 1  
Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_G\_ANT2\_2462  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 39.21  | 37.46      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -14.79     | Average |
| 2 PK | 2483.500 | 54.10  | 52.35      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -19.90     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PP | 2483.500 | 39.21  | 37.46      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -14.79     | Average |
| 2 PK | 2483.500 | 54.10  | 52.35      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -19.90     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

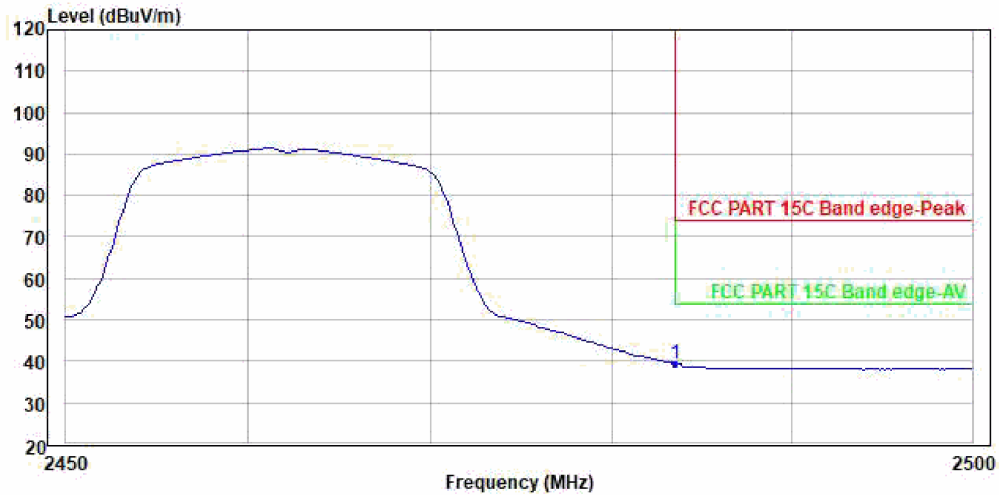


Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_G\_ANT2\_2462  
Remark :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 39.21  | 37.46      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -14.79     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

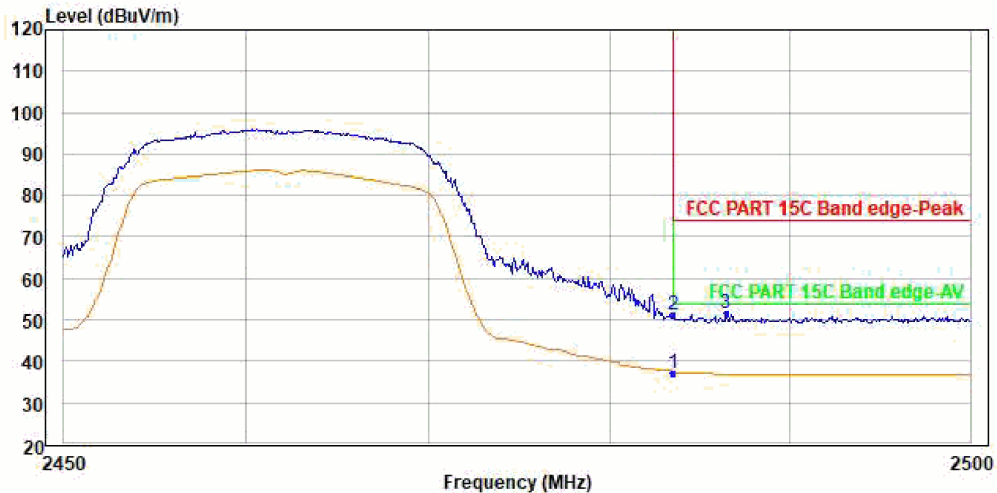

Trace: 1  
Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_G\_ANT2\_2462  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 37.27  | 35.52      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -16.73     | Average |
| 2    | 2483.500 | 51.18  | 49.43      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -22.82     | Peak    |
| 3 PK | 2486.423 | 51.66  | 49.90      | 31.68      | 10.00      | 7.48       | 47.40         | 74.00      | -22.34     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PP | 2483.500 | 37.27  | 35.52      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -16.73     | Average |
| 2    | 2483.500 | 51.18  | 49.43      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -22.82     | Peak    |
| 3 PK | 2486.423 | 51.66  | 49.90      | 31.68      | 10.00      | 7.48       | 47.40         | 74.00      | -22.34     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

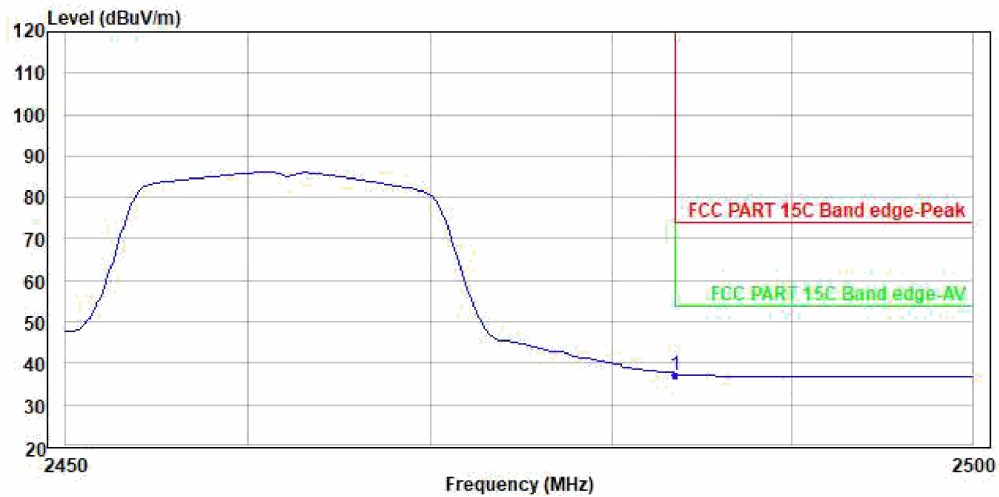


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_G\_ANT2\_2462  
Remark :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 37.27  | 35.52      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -16.73     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

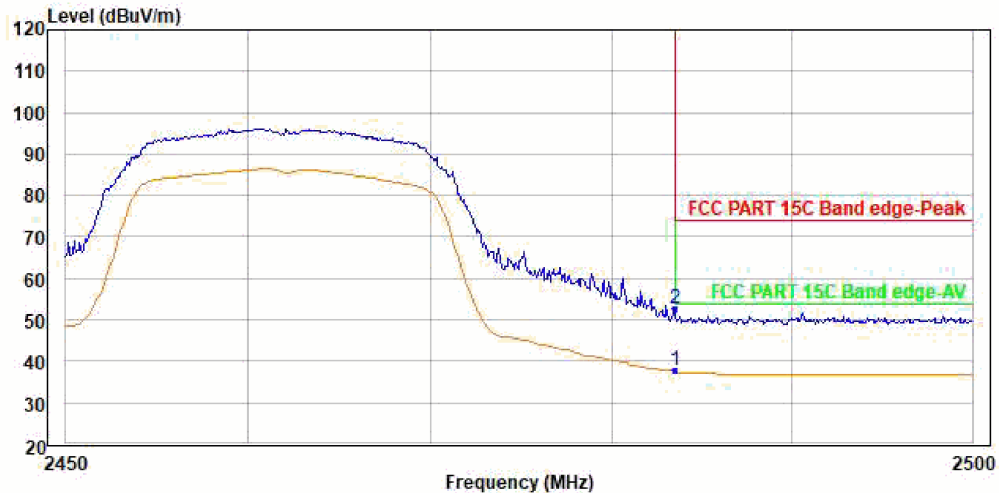

Trace: 1  
Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_B\_ANT1\_2462  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 37.79  | 36.04      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -16.21     | Average |
| 2 PK | 2483.500 | 52.67  | 50.92      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -21.33     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PP | 2483.500 | 37.79  | 36.04      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -16.21     | Average |
| 2 PK | 2483.500 | 52.67  | 50.92      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -21.33     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

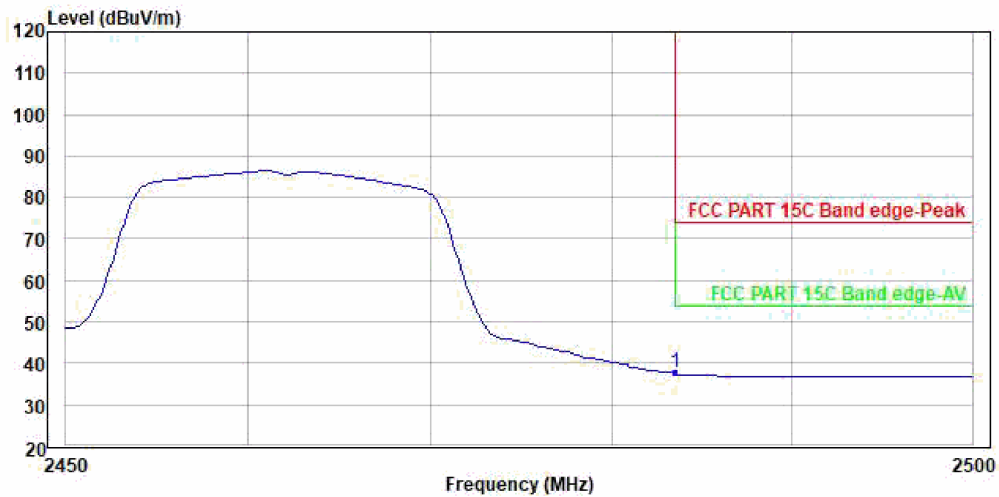


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_B\_ANT1\_2462  
Remark :

| Freq          | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|---------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| MHz           | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP 2483.500 | 37.79  | 36.04      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -16.21     | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

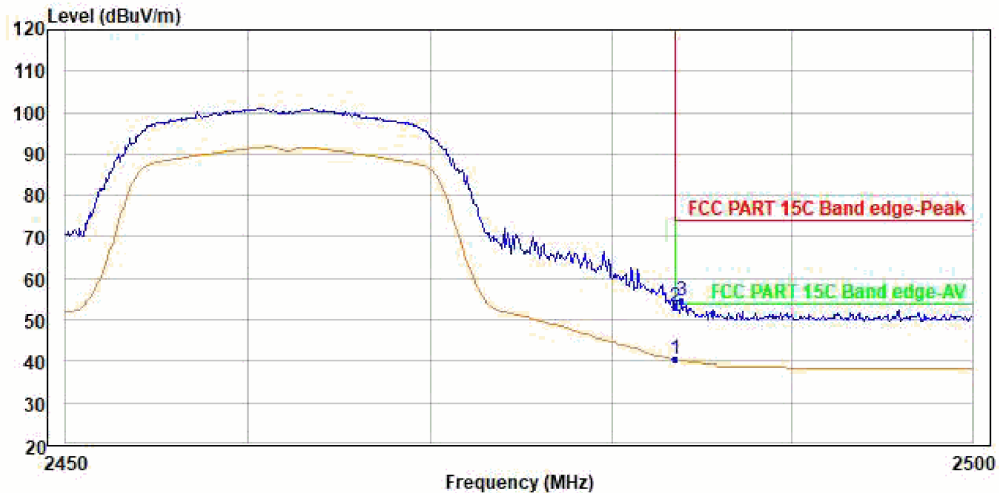

Trace: 1  
Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_B\_ANT1\_2462  
Remark :


|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP | 2483.500 | 40.42  | 38.67      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -13.58     | Average |
| 2    | 2483.500 | 53.06  | 51.31      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -20.94     | Peak    |
| 3 PK | 2483.868 | 54.78  | 53.03      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -19.22     | Peak    |

Condition: 3m  
EUT :  
Mode :  
Note :

|      | Freq     | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dbuv/m | dbuv       | dB/m       | dB         | dB         | dB            | dbuv/m     | dB         |         |
| 1 PP | 2483.500 | 40.42  | 38.67      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -13.58     | Average |
| 2    | 2483.500 | 53.06  | 51.31      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -20.94     | Peak    |
| 3 PK | 2483.868 | 54.78  | 53.03      | 31.68      | 10.00      | 7.47       | 47.40         | 74.00      | -19.22     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

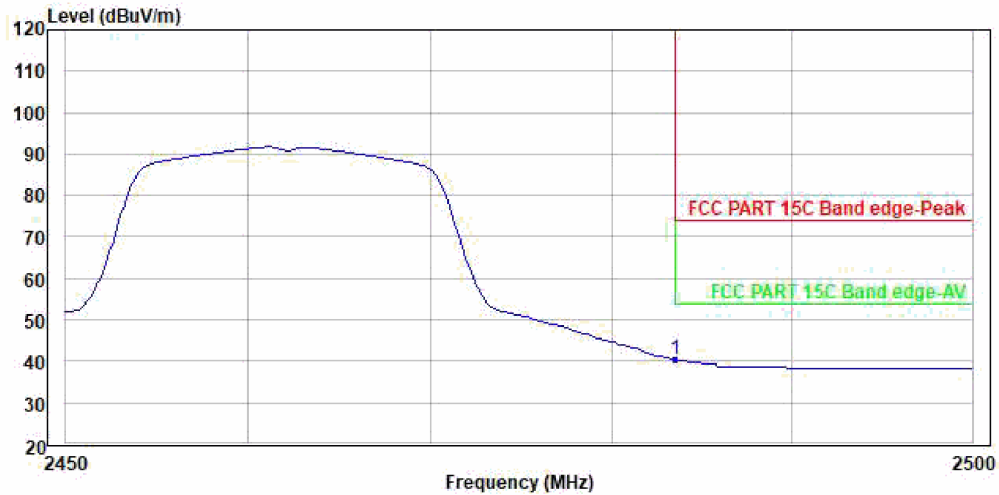


Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/60.4(%)  
Press : 99.7kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC 120V/60Hz  
Test Engineer : Jackson  
Test Mode : 2.4G\_B\_ANT1\_2462  
Remark :

| Freq          | Level  | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark  |
|---------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| MHz           | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 PP 2483.500 | 40.42  | 38.67      | 31.68      | 10.00      | 7.47       | 47.40         | 54.00      | -13.58     | Average |

Appendix A.2: Test Results of Radiated Spurious Emissions for Lora + 2.4G WIFI + LTE



Shenzhen UnionTrust Quality and Technology Co., Ltd.

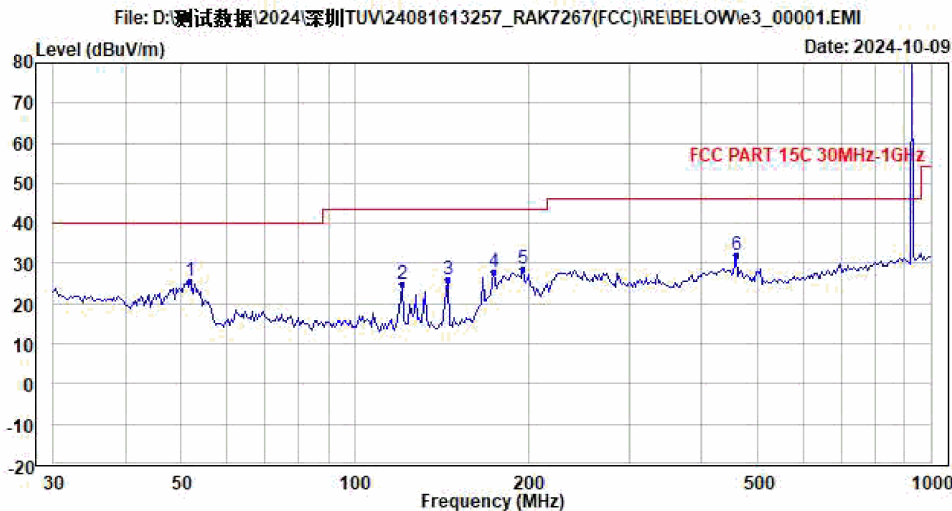


Condition : 3m Horizontal  
Temp.(C)/Hum.(%) : 24.4(C)/59.6(%)  
Press : 100.0kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : DC\_12V  
Test Engineer : Bowie  
Test Mode : Test Mode1: Lora\_925.1MHz+WiFi+Band2\_1880MHz  
Remark :

|      | Freq    | Level  | Read Level | Ant Factor | Cable Loss | Aux Factor | Preamp Factor | Limit Line | Over Limit | Remark |
|------|---------|--------|------------|------------|------------|------------|---------------|------------|------------|--------|
|      | MHz     | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |        |
| 1    | 51.900  | 25.74  | 40.18      | 13.66      | 0.80       | 0.00       | 28.90         | 40.00      | -14.26     | Peak   |
| 2    | 120.612 | 24.93  | 40.34      | 12.38      | 1.13       | 0.00       | 28.92         | 43.50      | -18.57     | Peak   |
| 3    | 144.790 | 26.13  | 41.05      | 12.80      | 1.22       | 0.00       | 28.94         | 43.50      | -17.37     | Peak   |
| 4    | 173.815 | 27.89  | 39.25      | 16.28      | 1.33       | 0.00       | 28.97         | 43.50      | -15.61     | Peak   |
| 5    | 195.870 | 28.58  | 39.76      | 16.41      | 1.41       | 0.00       | 29.00         | 43.50      | -14.92     | Peak   |
| 6 PP | 458.399 | 31.93  | 35.83      | 23.40      | 1.99       | 0.00       | 29.29         | 46.00      | -14.07     | Peak   |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

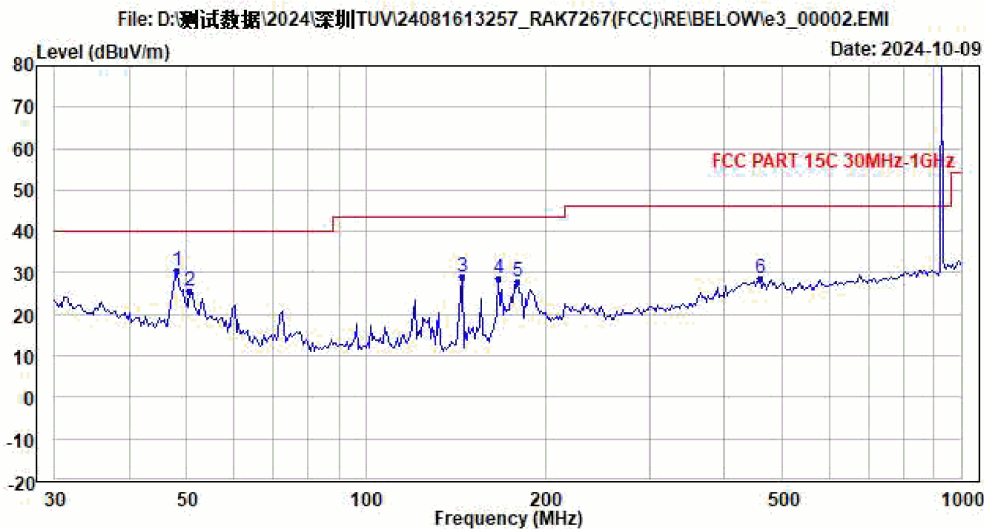


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/59.6(%)  
Press : 100.0kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : DC\_12V  
Test Engineer : Bowie  
Test Mode : Test Mode1: Lora\_925.1MHz+WiFi+Band2\_1880MHz  
Remark :

|      | Freq    | Level  | Read Level | Ant Factor | Cable Loss | Aux Factor | Preamp Factor | Limit Line | Over Limit | Remark |
|------|---------|--------|------------|------------|------------|------------|---------------|------------|------------|--------|
|      | MHz     | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |        |
| 1 PP | 48.039  | 30.58  | 43.77      | 14.90      | 0.81       | 0.00       | 28.90         | 40.00      | -9.42      | Peak   |
| 2    | 50.461  | 25.71  | 39.46      | 14.36      | 0.79       | 0.00       | 28.90         | 40.00      | -14.29     | Peak   |
| 3    | 144.790 | 29.17  | 44.09      | 12.80      | 1.22       | 0.00       | 28.94         | 43.50      | -14.33     | Peak   |
| 4    | 166.639 | 28.81  | 41.39      | 15.09      | 1.30       | 0.00       | 28.97         | 43.50      | -14.69     | Peak   |
| 5    | 180.030 | 27.74  | 39.57      | 15.80      | 1.35       | 0.00       | 28.98         | 43.50      | -15.76     | Peak   |
| 6    | 458.399 | 28.76  | 32.66      | 23.40      | 1.99       | 0.00       | 29.29         | 46.00      | -17.24     | Peak   |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

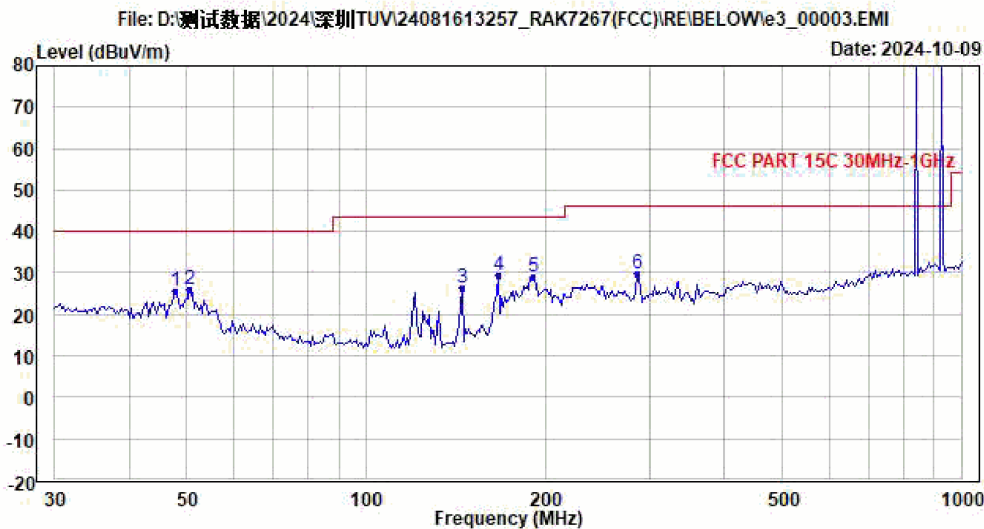


Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.4(C)/59.6(%)  
Press : 100.0kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : DC\_12V  
Test Engineer : Bowie  
Test Mode : Test Mode2: Lora\_925.1MHz+WiFi+Band5\_836.5MHz  
Remark :

|      | Freq    | Level  | Read Level | Ant Factor | Cable Loss | Aux Factor | Preamp Factor | Limit Line | Over Limit | Remark |
|------|---------|--------|------------|------------|------------|------------|---------------|------------|------------|--------|
|      | MHz     | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |        |
| 1    | 47.703  | 25.48  | 38.58      | 14.99      | 0.81       | 0.00       | 28.90         | 40.00      | -14.52     | Peak   |
| 2 PP | 50.461  | 25.97  | 39.72      | 14.36      | 0.79       | 0.00       | 28.90         | 40.00      | -14.03     | Peak   |
| 3    | 144.790 | 26.38  | 41.30      | 12.80      | 1.22       | 0.00       | 28.94         | 43.50      | -17.12     | Peak   |
| 4    | 166.639 | 29.33  | 41.91      | 15.09      | 1.30       | 0.00       | 28.97         | 43.50      | -14.17     | Peak   |
| 5    | 190.441 | 29.18  | 40.94      | 15.84      | 1.39       | 0.00       | 28.99         | 43.50      | -14.32     | Peak   |
| 6    | 286.265 | 29.77  | 39.19      | 18.05      | 1.62       | 0.00       | 29.09         | 46.00      | -16.23     | Peak   |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

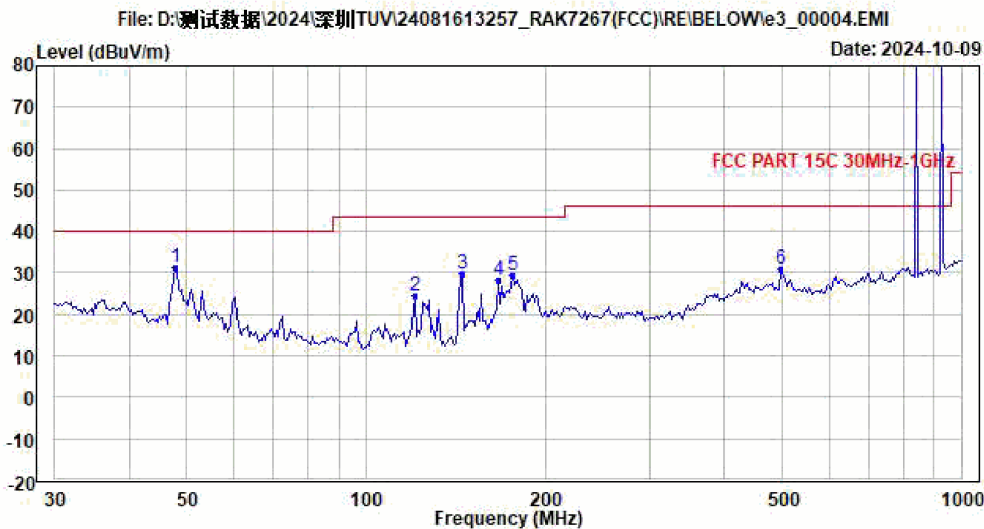


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.4(C)/59.6(%)  
Press : 100.0kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : DC\_12V  
Test Engineer : Bowie  
Test Mode : Test Mode2: Lora\_925.1MHz+WiFi+Band5\_836.5MHz  
Remark :

|      | Freq    | Level  | Read Level | Ant Factor | Cable Loss | Aux Factor | Preamp Factor | Limit Line | Over Limit | Remark |
|------|---------|--------|------------|------------|------------|------------|---------------|------------|------------|--------|
|      | MHz     | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |        |
| 1 PP | 47.703  | 31.20  | 44.30      | 14.99      | 0.81       | 0.00       | 28.90         | 40.00      | -8.80      | Peak   |
| 2    | 120.612 | 24.64  | 40.05      | 12.38      | 1.13       | 0.00       | 28.92         | 43.50      | -18.86     | Peak   |
| 3    | 144.790 | 29.69  | 44.61      | 12.80      | 1.22       | 0.00       | 28.94         | 43.50      | -13.81     | Peak   |
| 4    | 166.639 | 28.41  | 40.99      | 15.09      | 1.30       | 0.00       | 28.97         | 43.50      | -15.09     | Peak   |
| 5    | 176.275 | 29.52  | 41.06      | 16.10      | 1.34       | 0.00       | 28.98         | 43.50      | -13.98     | Peak   |
| 6    | 498.730 | 30.76  | 33.30      | 24.75      | 2.06       | 0.00       | 29.35         | 46.00      | -15.24     | Peak   |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

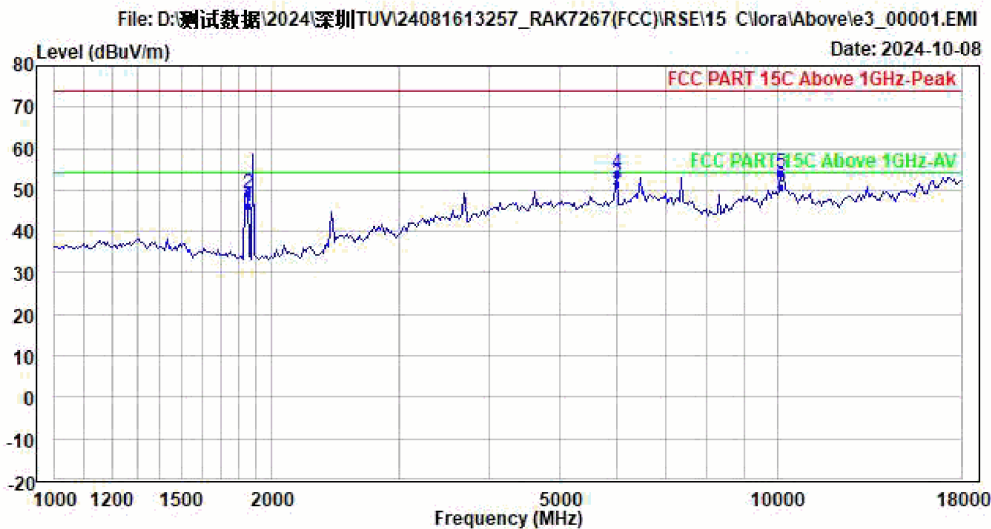


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)  
Press : 100.2kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC\_120V/60Hz  
Test Engineer : Bowie  
Test Mode : TM1: Lora\_925.1Mhz+WiFi+LTE\_B2  
Remark :

|   | Freq        | Level  | Read Level | Ant Factor | Cable Loss | Aux Factor | Preamp Factor | Limit Line | Over Limit | Remark  |
|---|-------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|   | MHz         | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 | 1847.783    | 46.10  | 56.38      | 30.53      | 6.44       | 0.00       | 47.25         | 54.00      | -7.90      | Average |
| 2 | 1847.783    | 49.24  | 59.52      | 30.53      | 6.44       | 0.00       | 47.25         | 74.00      | -24.76     | Peak    |
| 3 | PP 5988.431 | 51.31  | 50.52      | 35.99      | 9.81       | 0.00       | 45.01         | 54.00      | -2.69      | Average |
| 4 | PK 5988.431 | 54.20  | 53.41      | 35.99      | 9.81       | 0.00       | 45.01         | 74.00      | -19.80     | Peak    |
| 5 | 10144.500   | 53.97  | 49.65      | 39.03      | 11.99      | 0.00       | 46.70         | 74.00      | -20.03     | Peak    |
| 6 | 10144.500   | 50.79  | 46.47      | 39.03      | 11.99      | 0.00       | 46.70         | 54.00      | -3.21      | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

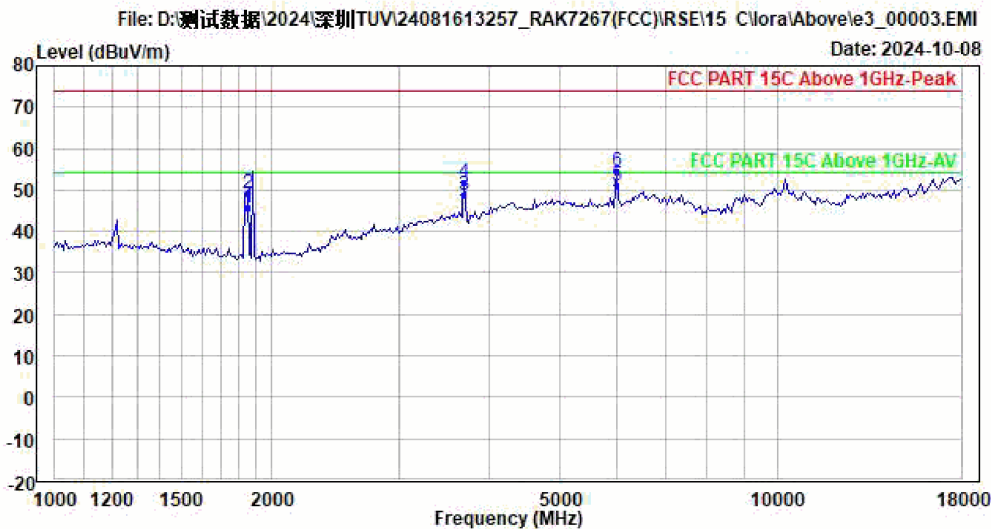


Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)  
Press : 100.2kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC\_120V/60Hz  
Test Engineer : Bowie  
Test Mode : TM1: Lora\_925.1Mhz+WiFi+LTE\_B2  
Remark :

|      | Freq     | Level  | Read Level | Ant Factor | Cable Loss | Aux Factor | Preamp Factor | Limit Line | Over Limit | Remark  |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|      | MHz      | dBUV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBUV/m     | dB         |         |
| 1    | 1847.783 | 45.88  | 56.16      | 30.53      | 6.44       | 0.00       | 47.25         | 54.00      | -8.12      | Average |
| 2    | 1847.783 | 49.17  | 59.45      | 30.53      | 6.44       | 0.00       | 47.25         | 74.00      | -24.83     | Peak    |
| 3    | 3681.329 | 48.68  | 51.38      | 34.78      | 8.73       | 0.00       | 46.21         | 54.00      | -5.32      | Average |
| 4    | 3681.329 | 51.95  | 54.65      | 34.78      | 8.73       | 0.00       | 46.21         | 74.00      | -22.05     | Peak    |
| 5 PP | 5988.431 | 51.24  | 50.45      | 35.99      | 9.81       | 0.00       | 45.01         | 54.00      | -2.76      | Average |
| 6 PK | 5988.431 | 54.41  | 53.62      | 35.99      | 9.81       | 0.00       | 45.01         | 74.00      | -19.59     | Peak    |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

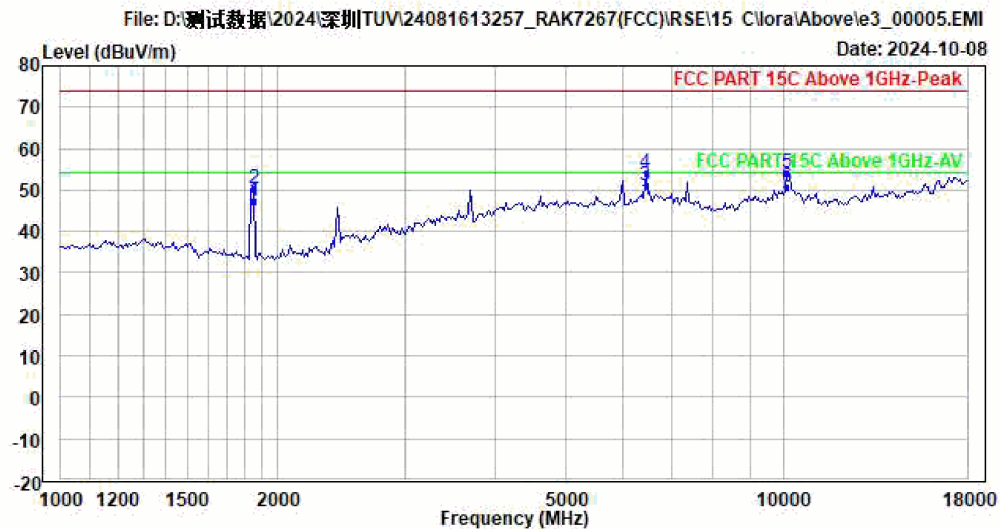


Condition : 3m Vertical  
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)  
Press : 100.2kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC\_120V/60Hz  
Test Engineer : Bowie  
Test Mode : TM2: Lora\_925.1Mhz+WiFi+LTE\_B5  
Remark :

|   | Freq        | Level  | Read Level | Ant Factor | Cable Loss | Aux Factor | Preamp Factor | Limit Line | Over Limit | Remark  |
|---|-------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
|   | MHz         | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |         |
| 1 | 1847.783    | 47.34  | 57.62      | 30.53      | 6.44       | 0.00       | 47.25         | 54.00      | -6.66      | Average |
| 2 | 1847.783    | 50.24  | 60.52      | 30.53      | 6.44       | 0.00       | 47.25         | 74.00      | -23.76     | Peak    |
| 3 | PP 6456.773 | 51.16  | 49.68      | 36.64      | 10.02      | 0.00       | 45.18         | 54.00      | -2.84      | Average |
| 4 | PK 6456.773 | 54.19  | 52.71      | 36.64      | 10.02      | 0.00       | 45.18         | 74.00      | -19.81     | Peak    |
| 5 | 10144.500   | 53.97  | 49.65      | 39.03      | 11.99      | 0.00       | 46.70         | 74.00      | -20.03     | Peak    |
| 6 | 10144.500   | 50.77  | 46.45      | 39.03      | 11.99      | 0.00       | 46.70         | 54.00      | -3.23      | Average |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

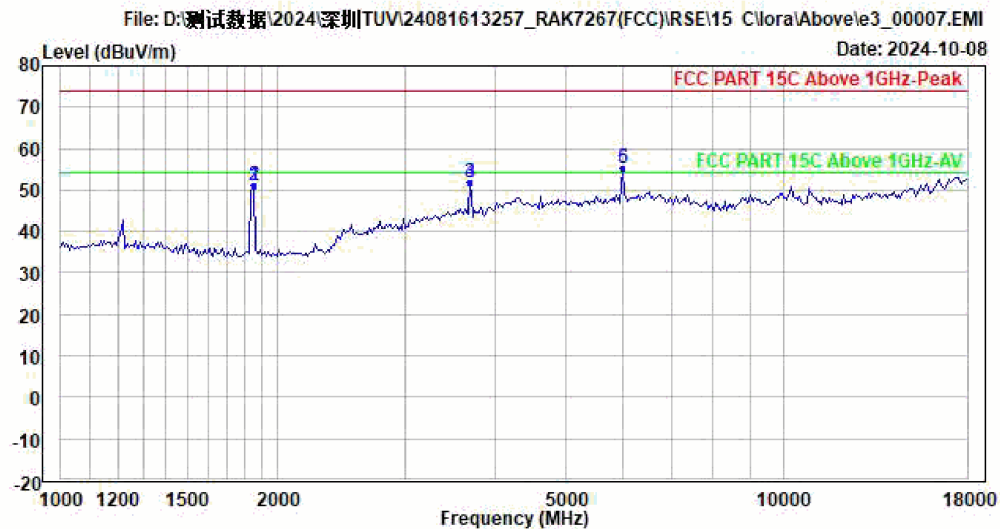

Condition : 3m Horizontal  
Temp.(C)/Hum.(%): 24.3 (C)/54.6(%)  
Press : 100.2kpa  
Product : WisGate Soho Pro  
Model No. : RAK7267  
Power Rating : AC\_120V/60Hz  
Test Engineer : Bowie  
Test Mode : TM2: Lora\_925.1Mhz+WiFi+LTE\_B5  
Remark :

|      | Freq     | Level  | Read Level | Ant Factor | Cable Loss | Aux Factor | Preamp Factor | Limit Line | Over Limit | Remark |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|--------|
|      | MHz      | dBuV/m | dBuV       | dB/m       | dB         | dB         | dB            | dBuV/m     | dB         |        |
| 1    | 1847.783 | 51.18  | 61.46      | 30.53      | 6.44       | 0.00       | 47.25         | 74.00      | -22.82     | Peak   |
| 2    | 1847.783 | 51.18  | 61.46      | 30.53      | 6.44       | 0.00       | 47.25         | 74.00      | -22.82     | Peak   |
| 3    | 3681.329 | 51.95  | 54.65      | 34.78      | 8.73       | 0.00       | 46.21         | 74.00      | -22.05     | Peak   |
| 4    | 3681.329 | 51.95  | 54.65      | 34.78      | 8.73       | 0.00       | 46.21         | 74.00      | -22.05     | Peak   |
| 5 PP | 5988.431 | 55.41  | 54.62      | 35.99      | 9.81       | 0.00       | 45.01         | 74.00      | -18.59     | Peak   |
| 6    | 5988.431 | 55.41  | 54.62      | 35.99      | 9.81       | 0.00       | 45.01         | 74.00      | -18.59     | Peak   |