



FCC RF Test Report

APPLICANT : Immedia Semiconductor LLC.
EQUIPMENT : Indoor/Outdoor powered camera
BRAND NAME : blink
MODEL NAME : BCM00800U
FCC ID : 2AF77-H2511910
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Aug. 08, 2025 ~ Aug. 21, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sportun International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Test Software.....	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	22
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 AC Conducted Emission Measurement.....	31
3.7 Antenna Requirements	33
4 LIST OF MEASURING EQUIPMENT.....	34
5 MEASUREMENT UNCERTAINTY.....	35
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Conducted Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 30dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.50 dB at 479.96 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 20.84 dB at 0.381 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Immedia Semiconductor LLC.

100 Riverpark Drive Suite 125, North Reading, MA, United States 01864

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Indoor/Outdoor powered camera
Brand Name	blink
Model Name	BCM00800U
FCC ID	2AF77-H2511910
SN Code	Conducted: GVP4LK015295CP6P Conduction: GVP4LK015295X1TK Radiation: GVP4LK015295CP6P
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 5.11 dBm (0.0032 W)
99% Occupied Bandwidth	BLE 1Mbps:1.05MHz
Antenna Type / Gain	PIFA Antenna type with gain 2.0 dBi
Type of Modulation	Bluetooth LE : GFSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sportun International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sportun International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	R&S	EMC32	10.50.00

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
AC Conducted Emission	Mode 1: Bluetooth Link + Adapter1

Remark: For Radiated Test Cases, The tests were performance with Notebook.

2.3 Connection Diagram of Test System


For AC Conducted Emission:

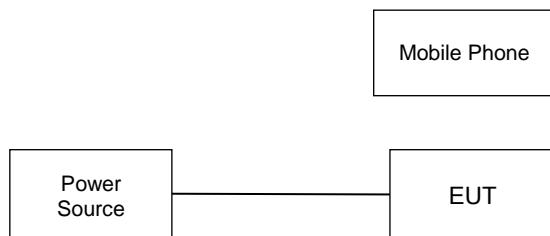

This example is connection diagram of EUT test configurations.

. For detail, please refer to test mode configuration and setup photographs for each test item.

For Radiated Emission:



This example is connection diagram of EUT test configurations.

. For detail, please refer to test mode configuration and setup photographs for each test item.



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	Mobile Phone	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the mobile phone.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 0.8 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 0.8 + 10 = 10.8 \text{ (dB)}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.8.1 for 6dB BW and 6.9.3 for 99% occupied bandwidth measurements
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth (VBW) \geq 3*RBW. Detector = Peak. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

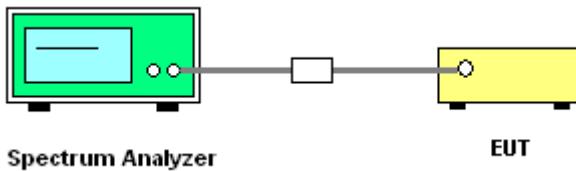




3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

BLE 1Mbps

6 dB Bandwidth Plot on Channel 00

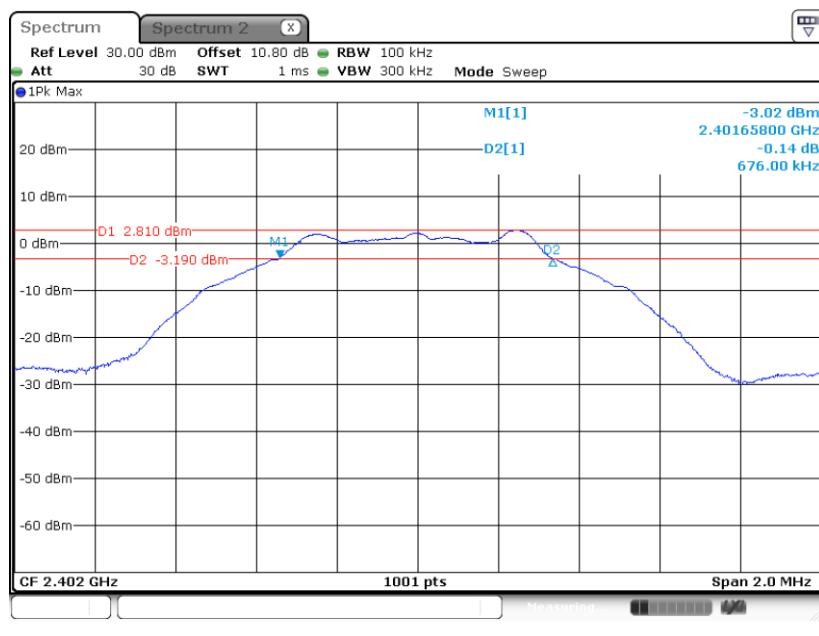

6 dB Bandwidth Plot on Channel 19

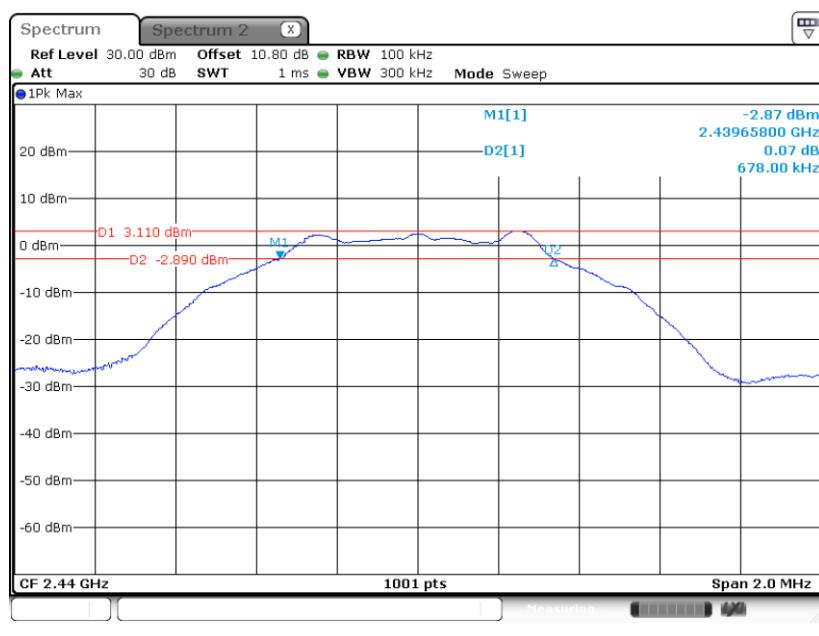



6 dB Bandwidth Plot on Channel 39



Date: 8.AUG.2025 19:33:08




3.1.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

BLE 1Mbps


99% Occupied Bandwidth Plot on Channel 00

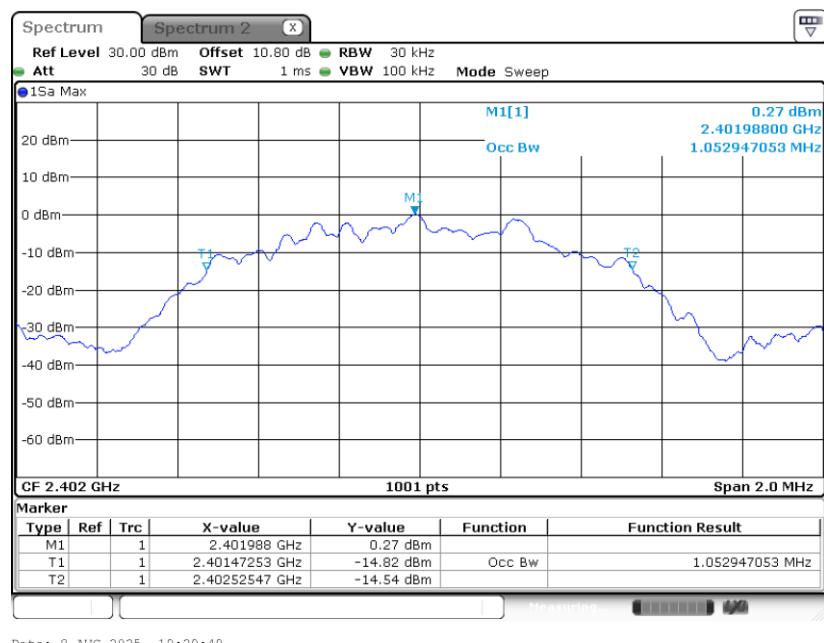

99% Occupied Bandwidth Plot on Channel 19

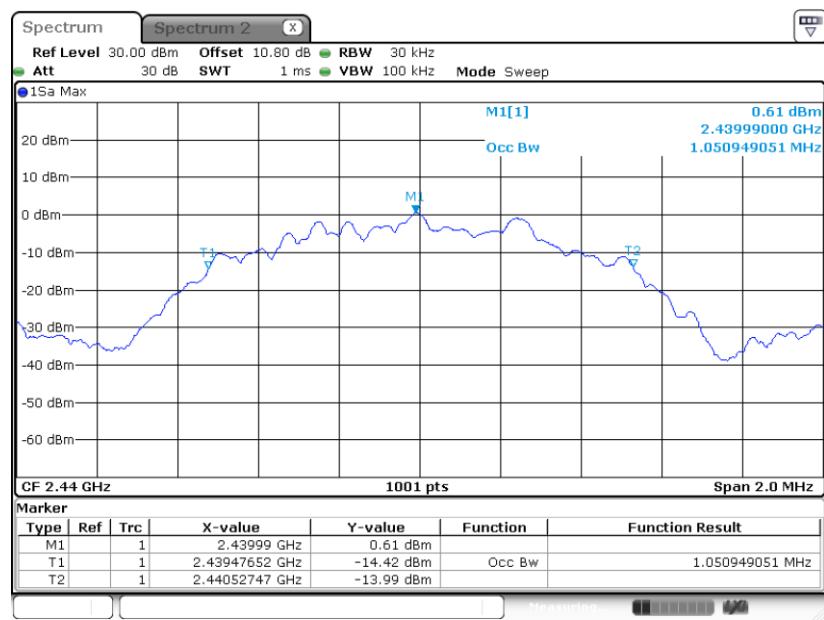

99% Occupied Bandwidth Plot on Channel 39

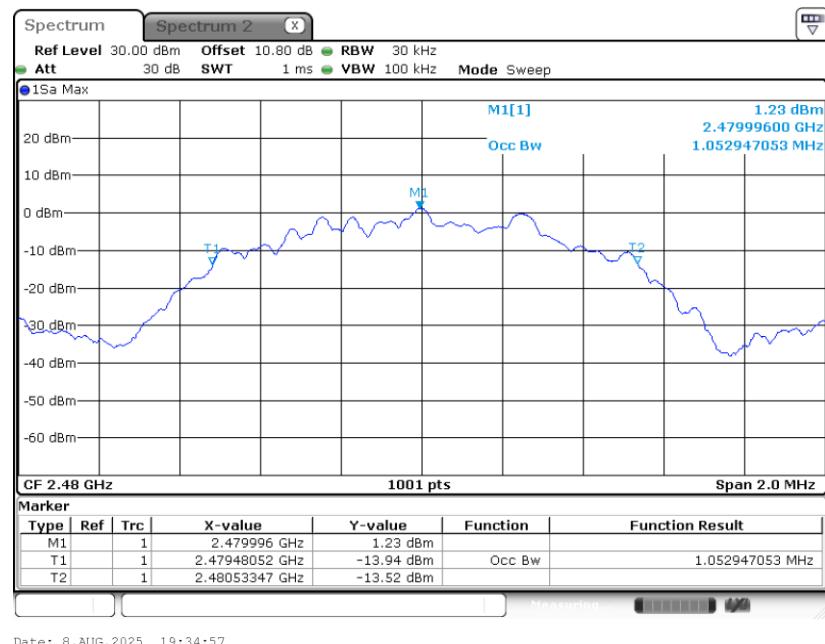

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2020 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

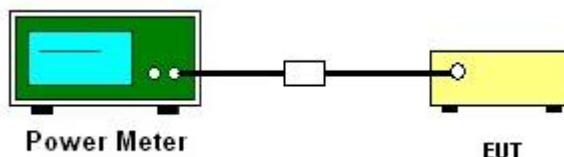

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2020 clause 11.10.5 Method AVGPSD-2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = power averaging (rms), Sweep time = auto couple. Use the peak marker function to determine the maximum power level.
6. Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
7. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured PSD to compute the average PSD during the actual transmission time.
8. Measure and record the results in the test report.
9. The Measured power density (dBm)/ 100kHz is a reference level and used as 30dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

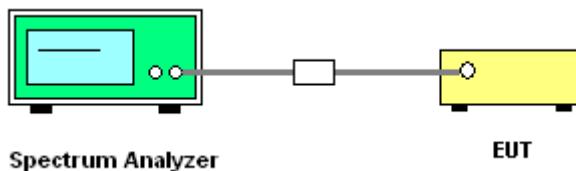


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


3.3.6 Test Result of Power Spectral Density Plots (100kHz)

BLE 1Mbps

PSD 100kHz Plot on Channel 00

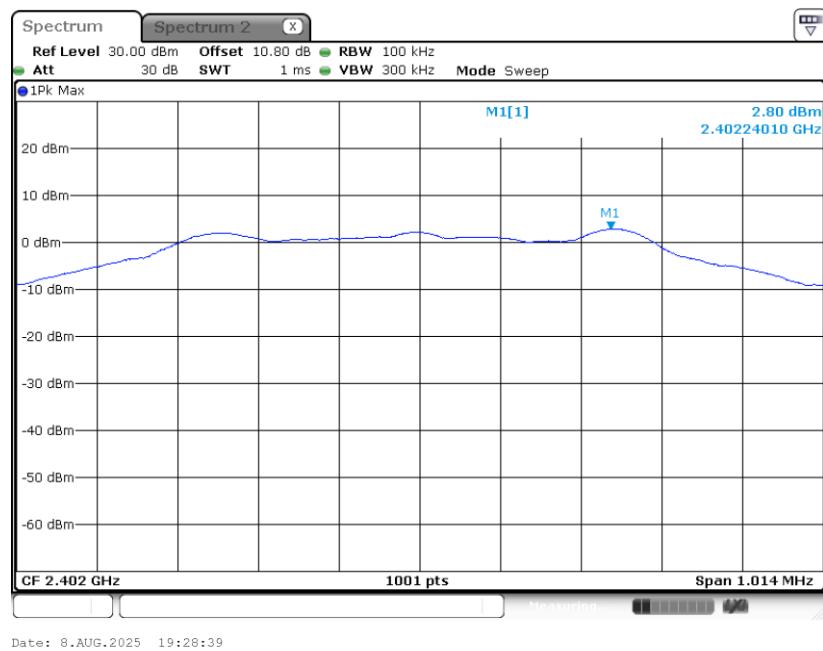


PSD 100kHz Plot on Channel 19

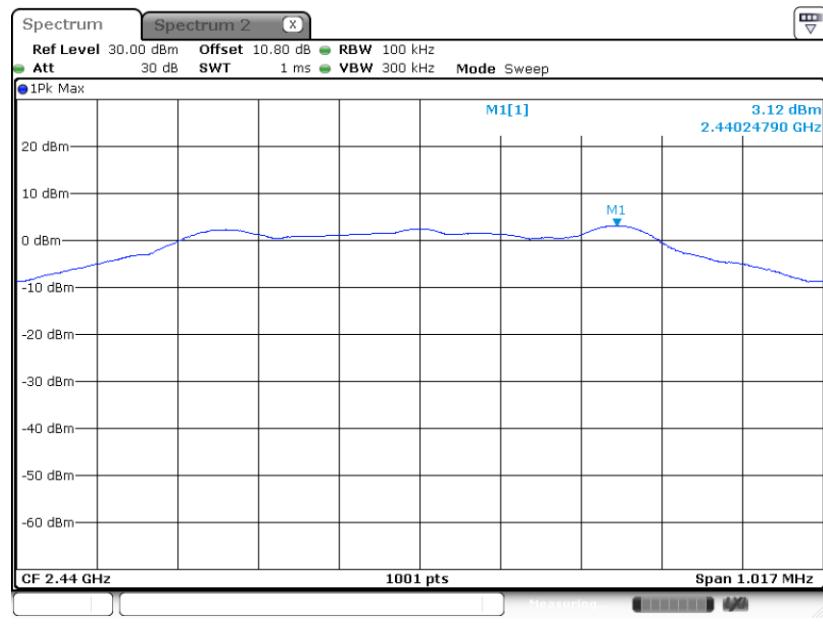




PSD 100kHz Plot on Channel 39

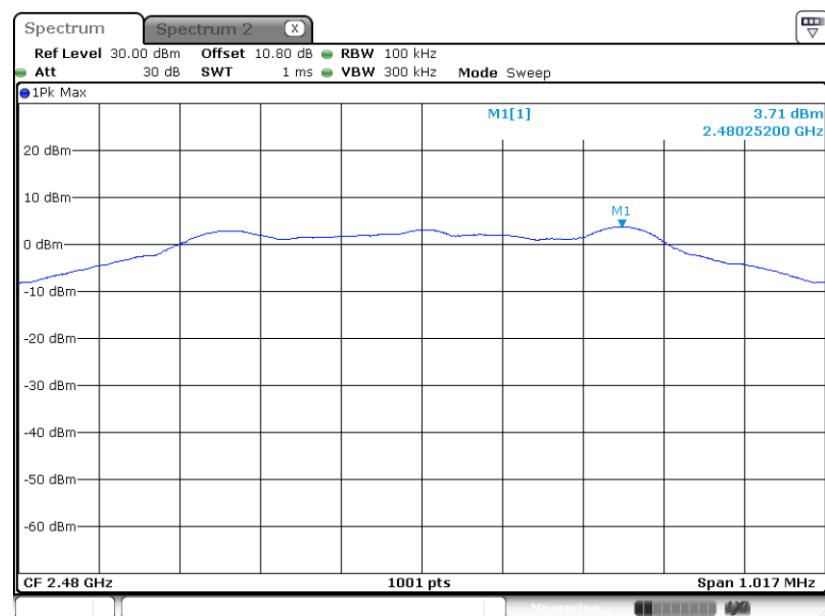


3.3.7 Test Result of Power Spectral Density Plots (3kHz)

BLE 1Mbps

PSD 3kHz Plot on Channel 00

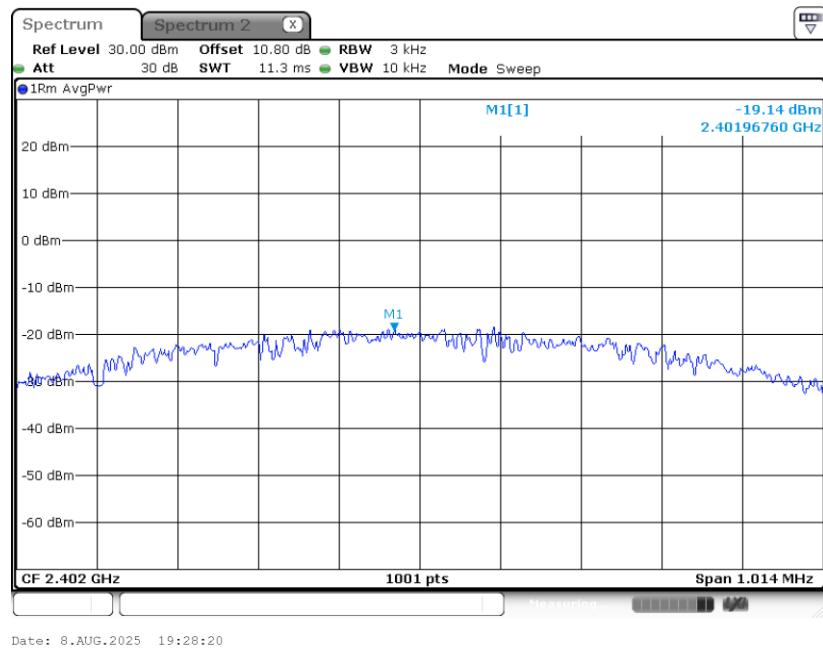


PSD 3kHz Plot on Channel 19

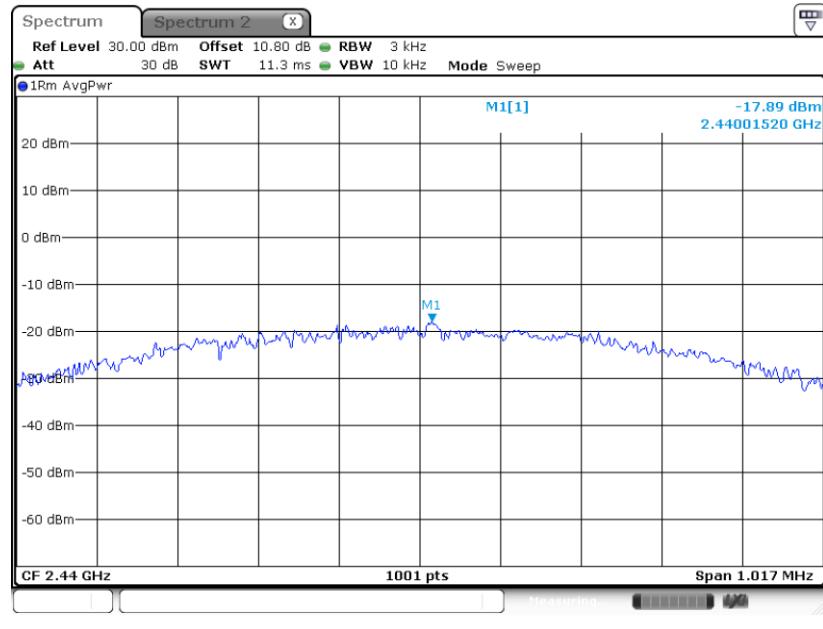



PSD 3kHz Plot on Channel 39

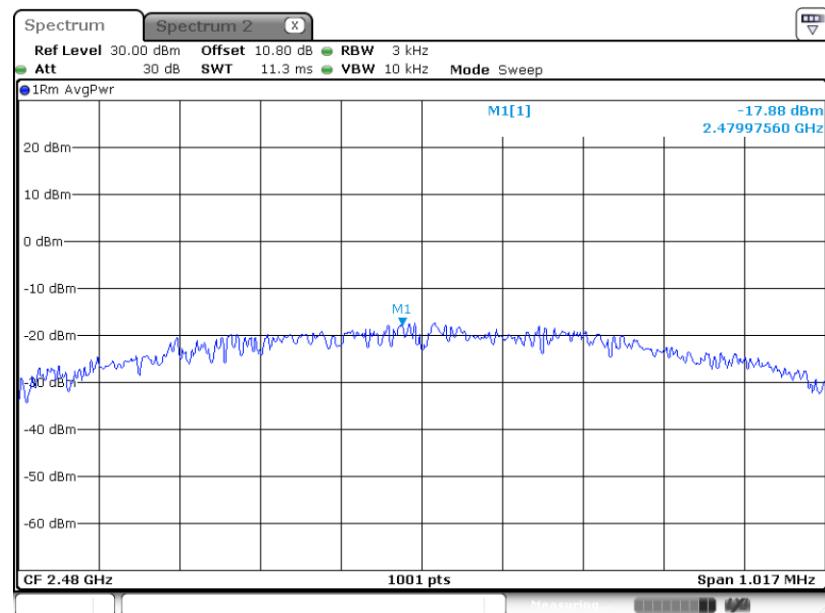

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2020 clause 11.11.3
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

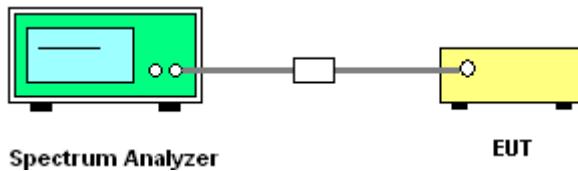


3.4.5 Test Result of Conducted Band Edges Plots

BLE 1Mbps

Low Band Edge Plot on Channel 00

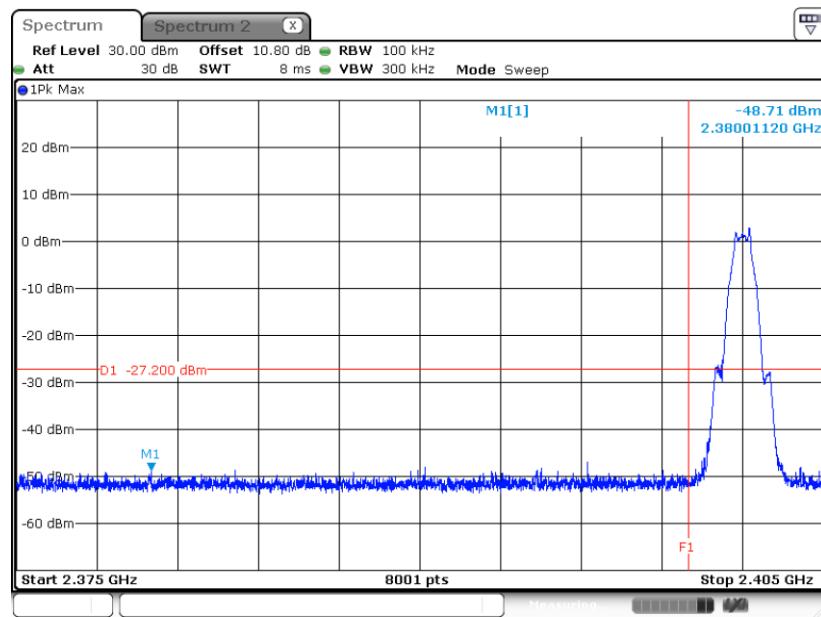


High Band Edge Plot on Channel 39

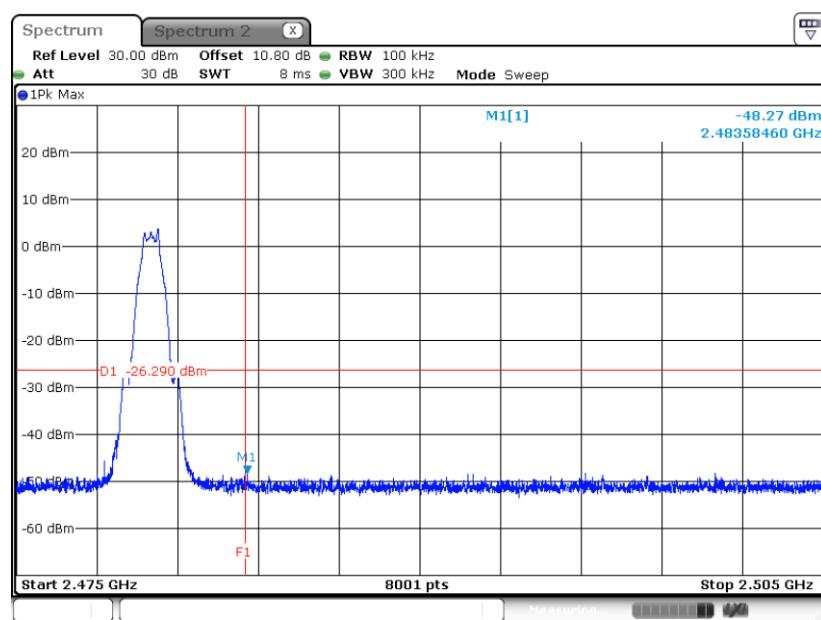

3.4.6 Test Result of Conducted Spurious Emission Plots


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

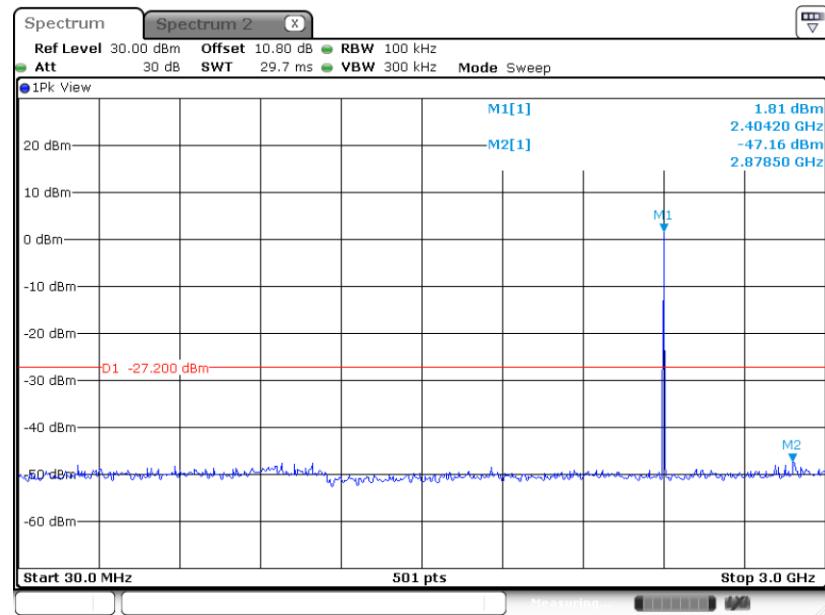

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

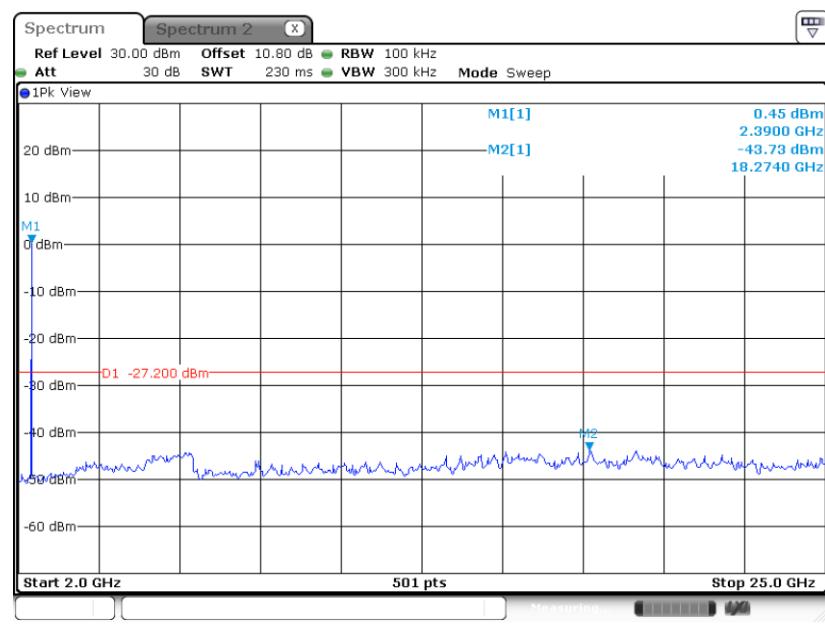




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

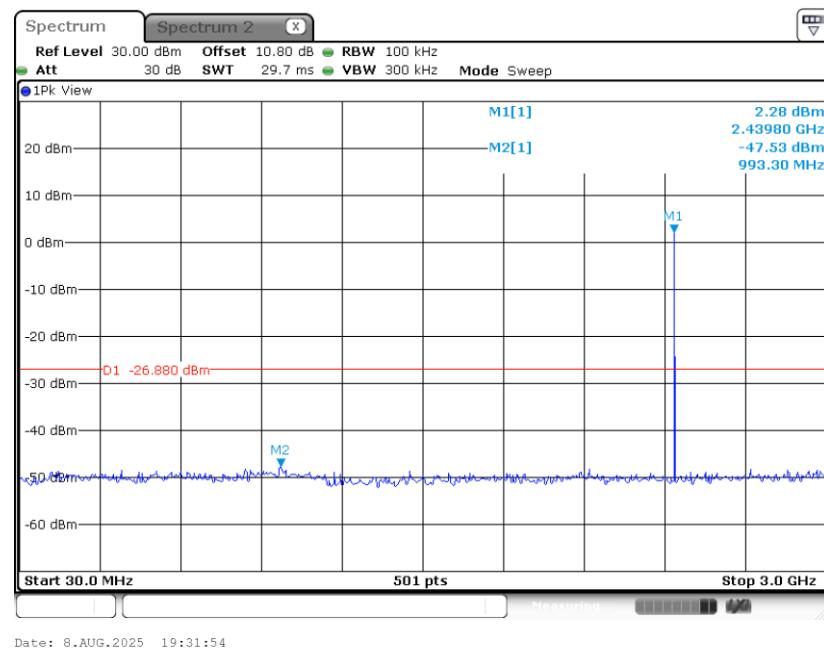

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 19

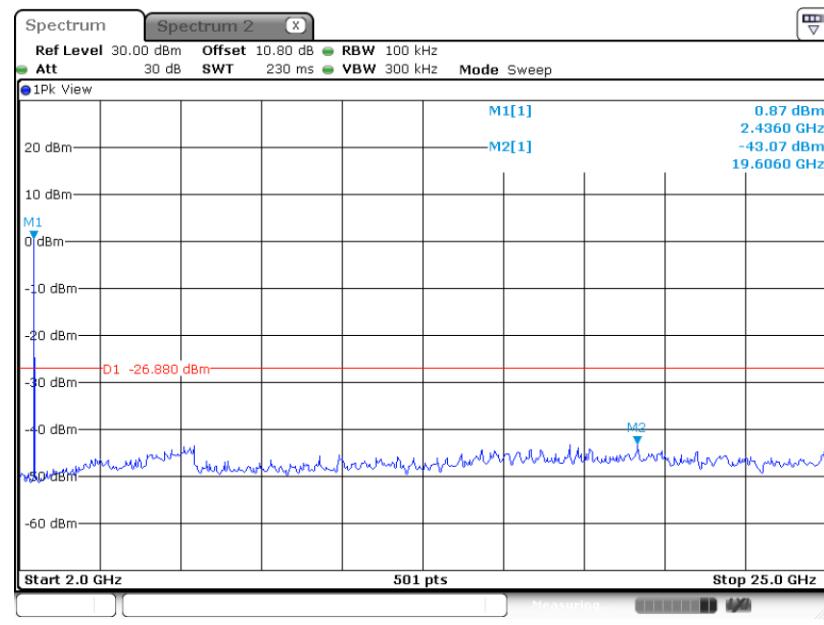




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

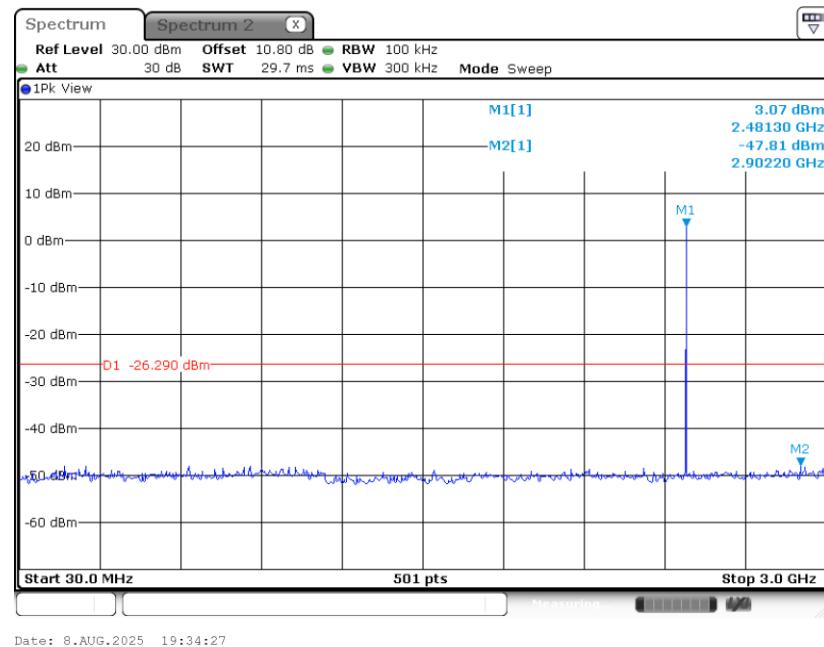

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

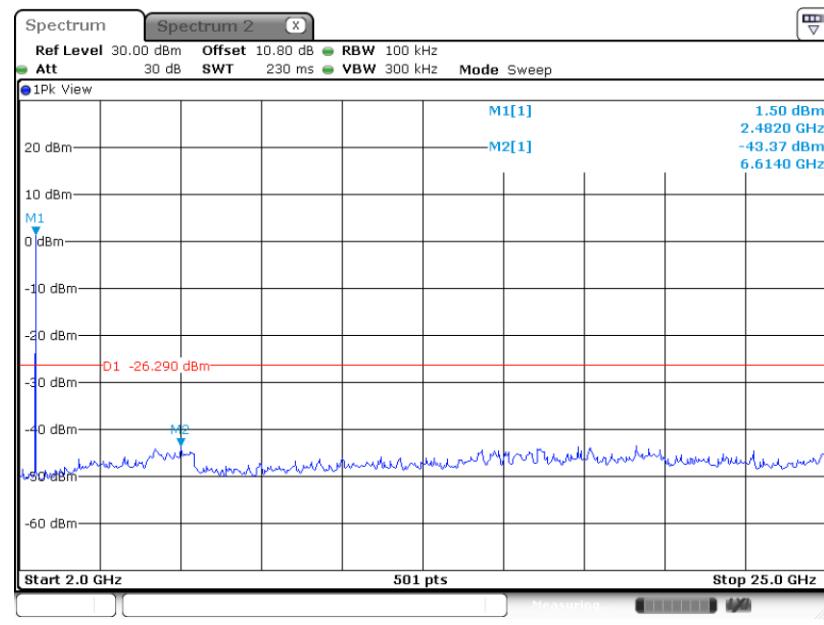



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

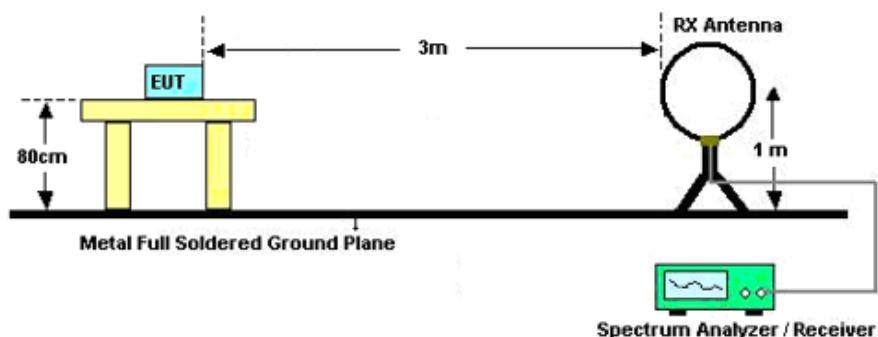

For radiated emissions from 30MHz to 1GHz

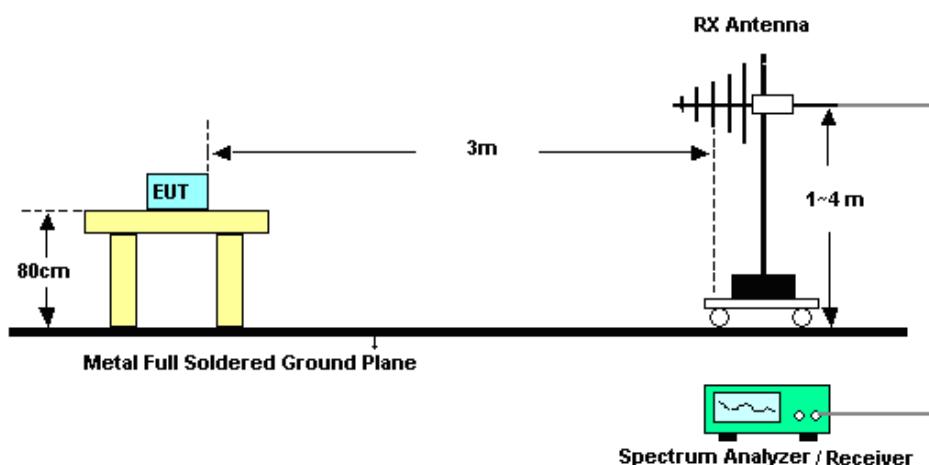

For radiated emissions above 1GHz

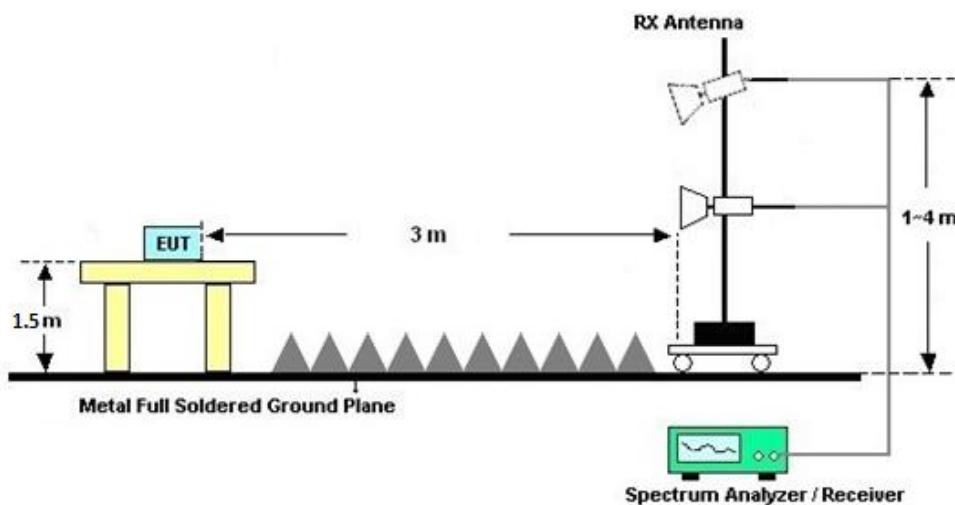



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

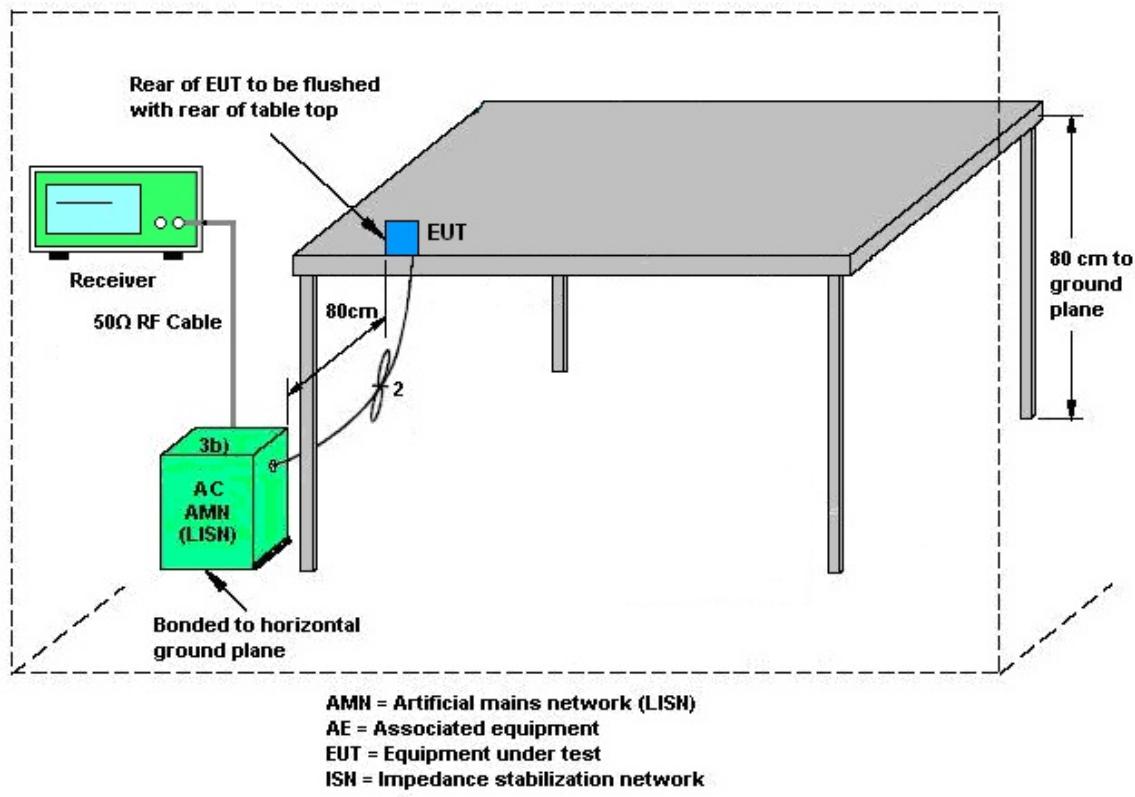

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Aug. 08, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Aug. 08, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Aug. 08, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Aug. 21, 2025	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 19, 2025	Aug. 21, 2025	Aug. 18, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Aug. 21, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Aug. 21, 2025	Oct. 08, 2025	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY572901 57	3Hz~8.5GHz; Max 30dBm	Feb. 22, 2025	Aug. 17, 2025	Feb. 21, 2026	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY574710 84	10Hz-44GHz	Jul. 03, 2025	Aug. 17, 2025	Jul. 02, 2026	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Aug. 17, 2025	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Sep. 03, 2024	Aug. 17, 2025	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251694	1GHz~18GHz	Jul. 05, 2025	Aug. 17, 2025	Jul. 04, 2026	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Aug. 17, 2025	Oct. 21, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHz	Jul. 03, 2025	Aug. 17, 2025	Jul. 02, 2026	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 03, 2025	Aug. 17, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 03, 2025	Aug. 17, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY572801 19	500MHz~26.5GHz	Oct. 09, 2024	Aug. 17, 2025	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Aug. 17, 2025	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 17, 2025	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 17, 2025	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.38ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
--	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.18 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.36 dB
--	---------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2025/8/8	Relative Humidity:	40~51	%

BLE1M-Ant1**TEST RESULTS DATA****6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.05	0.68	0.50	Pass
BLE	1Mbps	1	19	2440	1.05	0.68	0.50	Pass
BLE	1Mbps	1	39	2480	1.05	0.68	0.50	Pass

TEST RESULTS DATA**Average Power Table**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	ERP Power Limit (dBm)	Pass /Fail	Power Setting
BLE	1Mbps	1	0	2402	0.68	4.13	30.00	2.00	6.13	36.00	Pass	Default
BLE	1Mbps	1	19	2440	0.68	4.66	30.00	2.00	6.66	36.00	Pass	Default
BLE	1Mbps	1	39	2480	0.68	5.11	30.00	2.00	7.11	36.00	Pass	Default


TEST RESULTS DATA**Peak Power Density**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Avg PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	2.80	-18.46	2.00	8.00	Pass
BLE	1Mbps	1	19	2440	3.12	-17.21	2.00	8.00	Pass
BLE	1Mbps	1	39	2480	3.71	-17.20	2.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

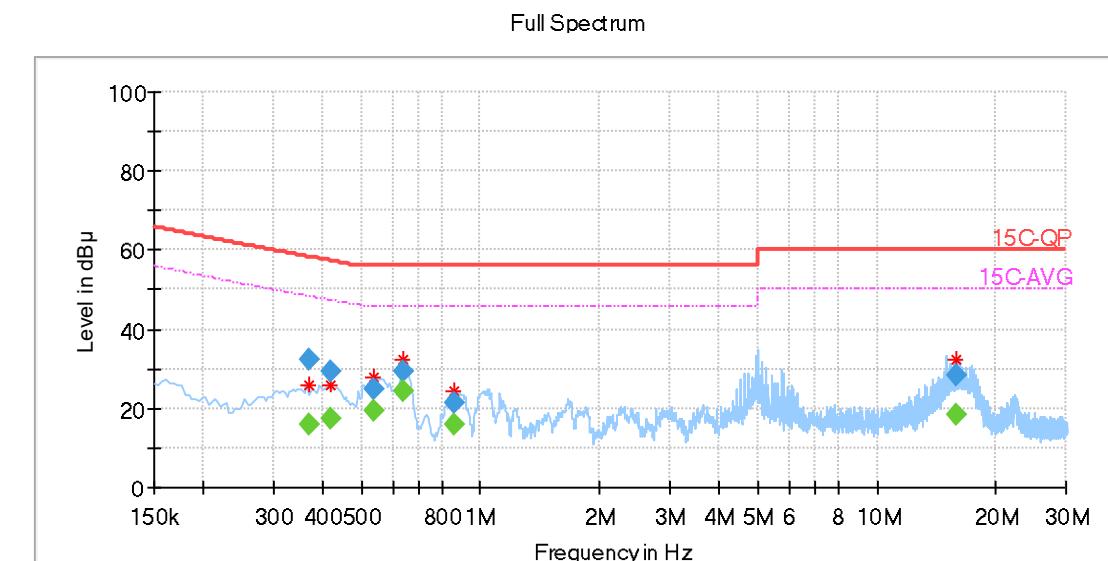


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.369431	---	16.11	48.33	32.22	L1	OFF	10.3
0.369431	32.20	---	58.36	26.17	L1	OFF	10.3
0.417938	---	17.58	47.37	29.79	L1	OFF	10.3
0.417938	29.39	---	57.39	27.99	L1	OFF	10.3
0.537281	---	19.62	46.00	26.38	L1	OFF	10.3
0.537281	25.01	---	56.00	30.99	L1	OFF	10.3
0.640988	---	24.27	46.00	21.73	L1	OFF	10.3
0.640988	29.50	---	56.00	26.50	L1	OFF	10.3
0.861131	---	15.68	46.00	30.32	L1	OFF	10.3
0.861131	21.52	---	56.00	34.48	L1	OFF	10.3
15.795900	---	18.47	50.00	31.53	L1	OFF	10.8
15.795900	28.19	---	60.00	31.81	L1	OFF	10.8



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
Test Voltage :	120Vac / 60Hz	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

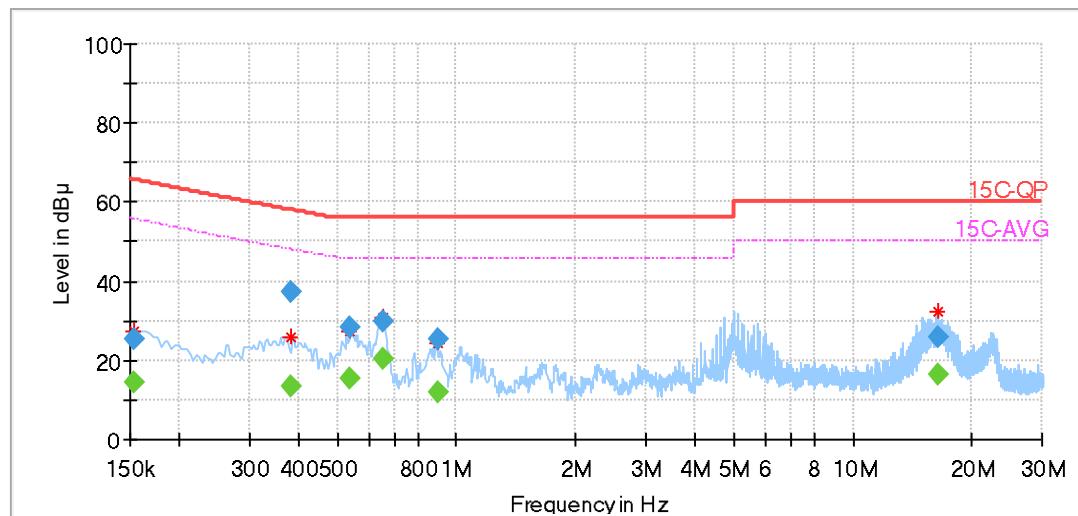

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152962	---	14.53	55.82	41.30	N	OFF	10.6
0.152962	25.19	---	65.82	40.63	N	OFF	10.6
0.380569	---	13.66	48.10	34.44	N	OFF	10.4
0.380569	37.29	---	58.13	20.84	N	OFF	10.4
0.539531	---	15.34	46.00	30.66	N	OFF	10.3
0.539531	28.50	---	56.00	27.50	N	OFF	10.3
0.654487	---	20.28	46.00	25.72	N	OFF	10.3
0.654487	29.93	---	56.00	26.07	N	OFF	10.3
0.893290	---	12.11	46.00	33.89	N	OFF	10.3
0.893290	25.31	---	56.00	30.69	N	OFF	10.3
16.386671	---	16.60	50.00	33.40	N	OFF	10.9
16.386671	26.12	---	60.00	33.88	N	OFF	10.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	41~42%
		Temperature :	22~23°C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	Bluetooth-LE_GSFK	0	2402	1Mbps	-	-
Mode 2	2400-2483.5	SISO	Bluetooth-LE_GSFK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	SISO	Bluetooth-LE_GSFK	39	2480	1Mbps	-	-





Summary of each worse mode


Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSFK	0	2389.17	43.16	54.00	-10.84	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	0	4804.00	39.66	74.00	-34.34	V	PEAK	Pass	Harmonic
2	Bluetooth-LE_GSFK	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE_GSFK	19	7320.00	41.31	74.00	-32.69	V	PEAK	Pass	Harmonic
3	Bluetooth-LE_GSFK	39	2483.50	66.91	74.00	-7.09	V	PEAK	Pass	Band Edge
	Bluetooth-LE_GSFK	39	7440.00	41.54	74.00	-32.46	V	PEAK	Pass	Harmonic

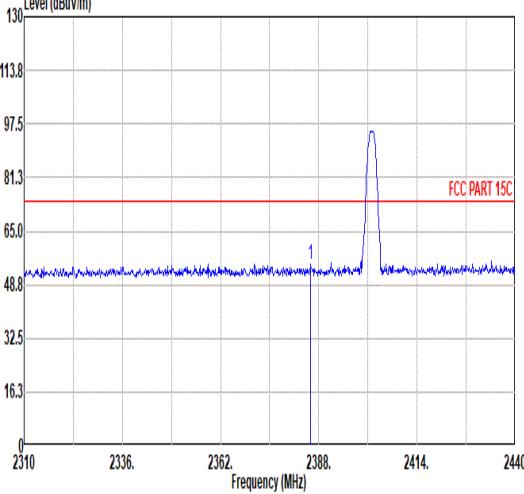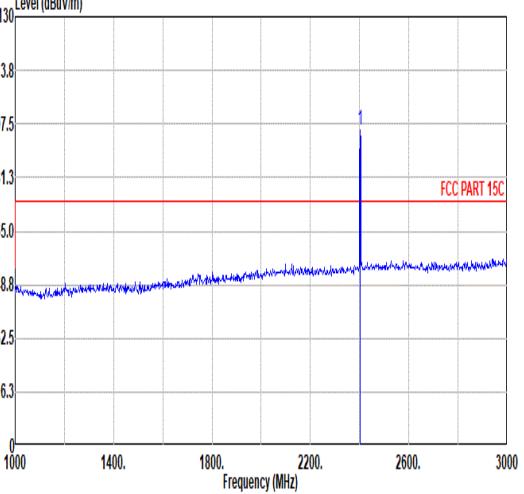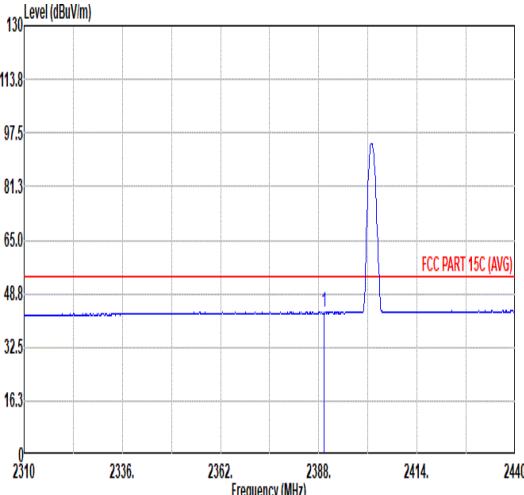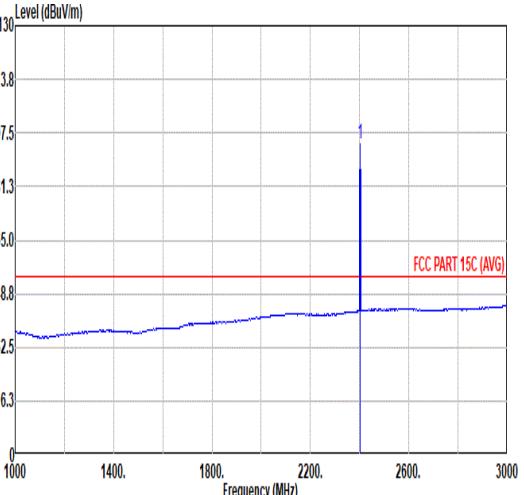


Mode	1																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth-LE_GSFK_CH0_2402MHz																																																																			
ANT	SISO																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>2385.79</td> <td>54.92</td> <td>74.00</td> <td>-19.08</td> <td>42.41</td> <td>32.24</td> <td>6.78</td> <td>32.43</td> <td>6.00</td> <td>300</td> <td>231 PEAK</td> </tr> </tbody> </table>	Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		2385.79	54.92	74.00	-19.08	42.41	32.24	6.78	32.43	6.00	300	231 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>2402.00</td> <td>95.43</td> <td>-----</td> <td>-----</td> <td>82.82</td> <td>32.31</td> <td>6.72</td> <td>32.42</td> <td>6.00</td> <td>300</td> <td>231 PEAK</td> </tr> </tbody> </table>	Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		2402.00	95.43	-----	-----	82.82	32.31	6.72	32.42	6.00	300	231 PEAK
Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
2385.79	54.92	74.00	-19.08	42.41	32.24	6.78	32.43	6.00	300	231 PEAK																																																										
Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
2402.00	95.43	-----	-----	82.82	32.31	6.72	32.42	6.00	300	231 PEAK																																																										
 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>2389.30</td> <td>43.09</td> <td>54.00</td> <td>-10.91</td> <td>30.55</td> <td>32.26</td> <td>6.70</td> <td>32.42</td> <td>6.00</td> <td>300</td> <td>231 AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		2389.30	43.09	54.00	-10.91	30.55	32.26	6.70	32.42	6.00	300	231 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>2402.00</td> <td>94.04</td> <td>-----</td> <td>-----</td> <td>81.43</td> <td>32.31</td> <td>6.72</td> <td>32.42</td> <td>6.00</td> <td>300</td> <td>231 AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		2402.00	94.04	-----	-----	81.43	32.31	6.72	32.42	6.00	300	231 AVERAGE	
Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
2389.30	43.09	54.00	-10.91	30.55	32.26	6.70	32.42	6.00	300	231 AVERAGE																																																										
Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
2402.00	94.04	-----	-----	81.43	32.31	6.72	32.42	6.00	300	231 AVERAGE																																																										

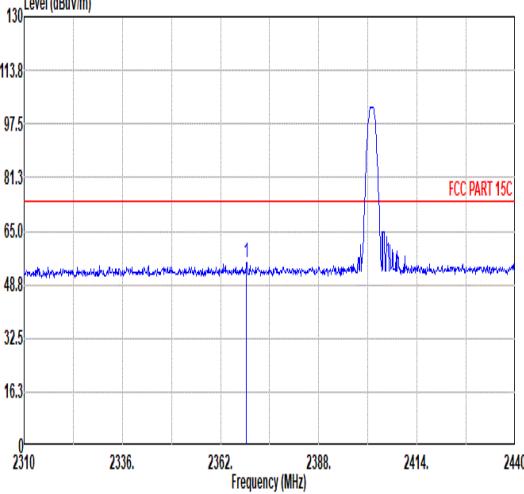
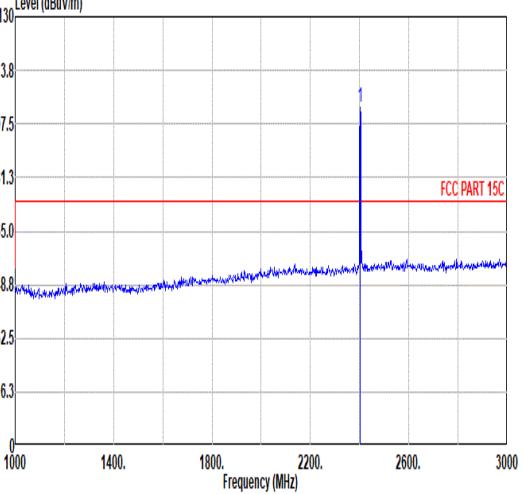
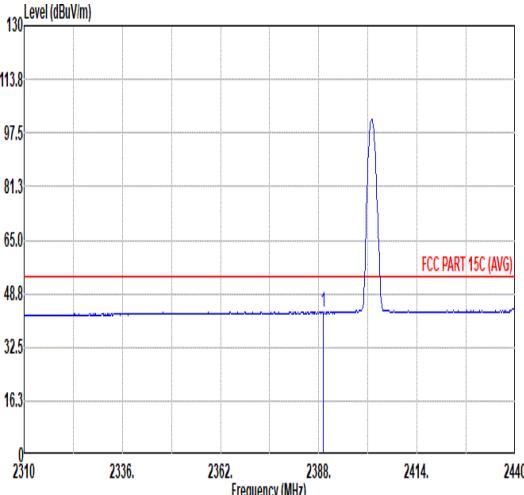
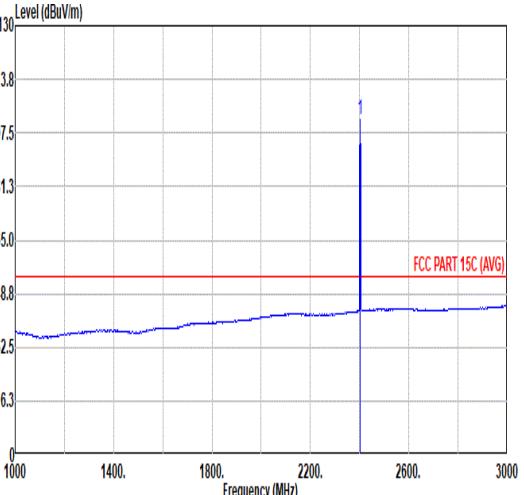


Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSFK_CH0_2402MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p> <table border="1"><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2368.89</td><td>55.29</td><td>74.00</td><td>-18.71</td><td>42.87</td><td>32.18</td><td>6.67</td><td>32.43</td><td>6.00</td><td>229 156 PEAK</td></tr></tbody></table>	Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg	1	2368.89	55.29	74.00	-18.71	42.87	32.18	6.67	32.43	6.00	229 156 PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C</p> <table border="1"><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>102.72</td><td>-----</td><td>-----</td><td>90.11</td><td>32.31</td><td>6.72</td><td>32.42</td><td>6.00</td><td>229 156 PEAK</td></tr></tbody></table>	Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg	1	2402.00	102.72	-----	-----	90.11	32.31	6.72	32.42	6.00	229 156 PEAK
Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg																																																																																
1	2368.89	55.29	74.00	-18.71	42.87	32.18	6.67	32.43	6.00	229 156 PEAK																																																																																
Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	102.72	-----	-----	90.11	32.31	6.72	32.42	6.00	229 156 PEAK																																																																																
 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p> <table border="1"><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.17</td><td>43.16</td><td>54.00</td><td>-10.84</td><td>30.62</td><td>32.26</td><td>6.70</td><td>32.42</td><td>6.00</td><td>229 156 AVERAGE</td></tr></tbody></table>	Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg	1	2389.17	43.16	54.00	-10.84	30.62	32.26	6.70	32.42	6.00	229 156 AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>FCC PART 15C (AVG)</p> <table border="1"><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.65</td><td>-----</td><td>-----</td><td>89.04</td><td>32.31</td><td>6.72</td><td>32.42</td><td>6.00</td><td>229 156 AVERAGE</td></tr></tbody></table>	Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg	1	2402.00	101.65	-----	-----	89.04	32.31	6.72	32.42	6.00	229 156 AVERAGE	
Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg																																																																																
1	2389.17	43.16	54.00	-10.84	30.62	32.26	6.70	32.42	6.00	229 156 AVERAGE																																																																																
Freq	Level	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	101.65	-----	-----	89.04	32.31	6.72	32.42	6.00	229 156 AVERAGE																																																																																

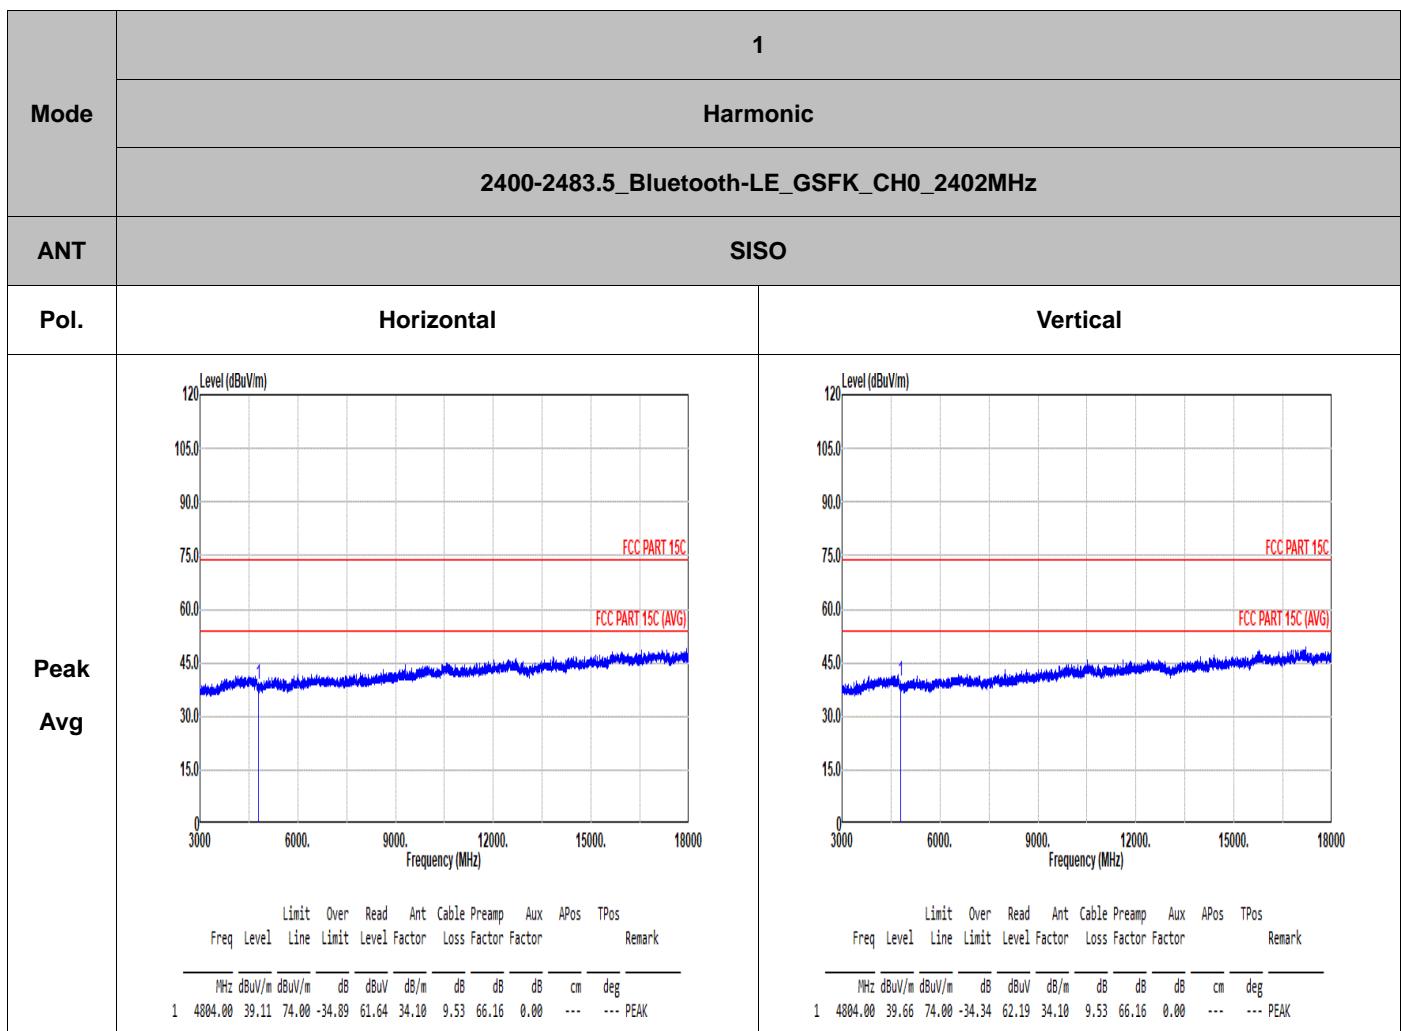

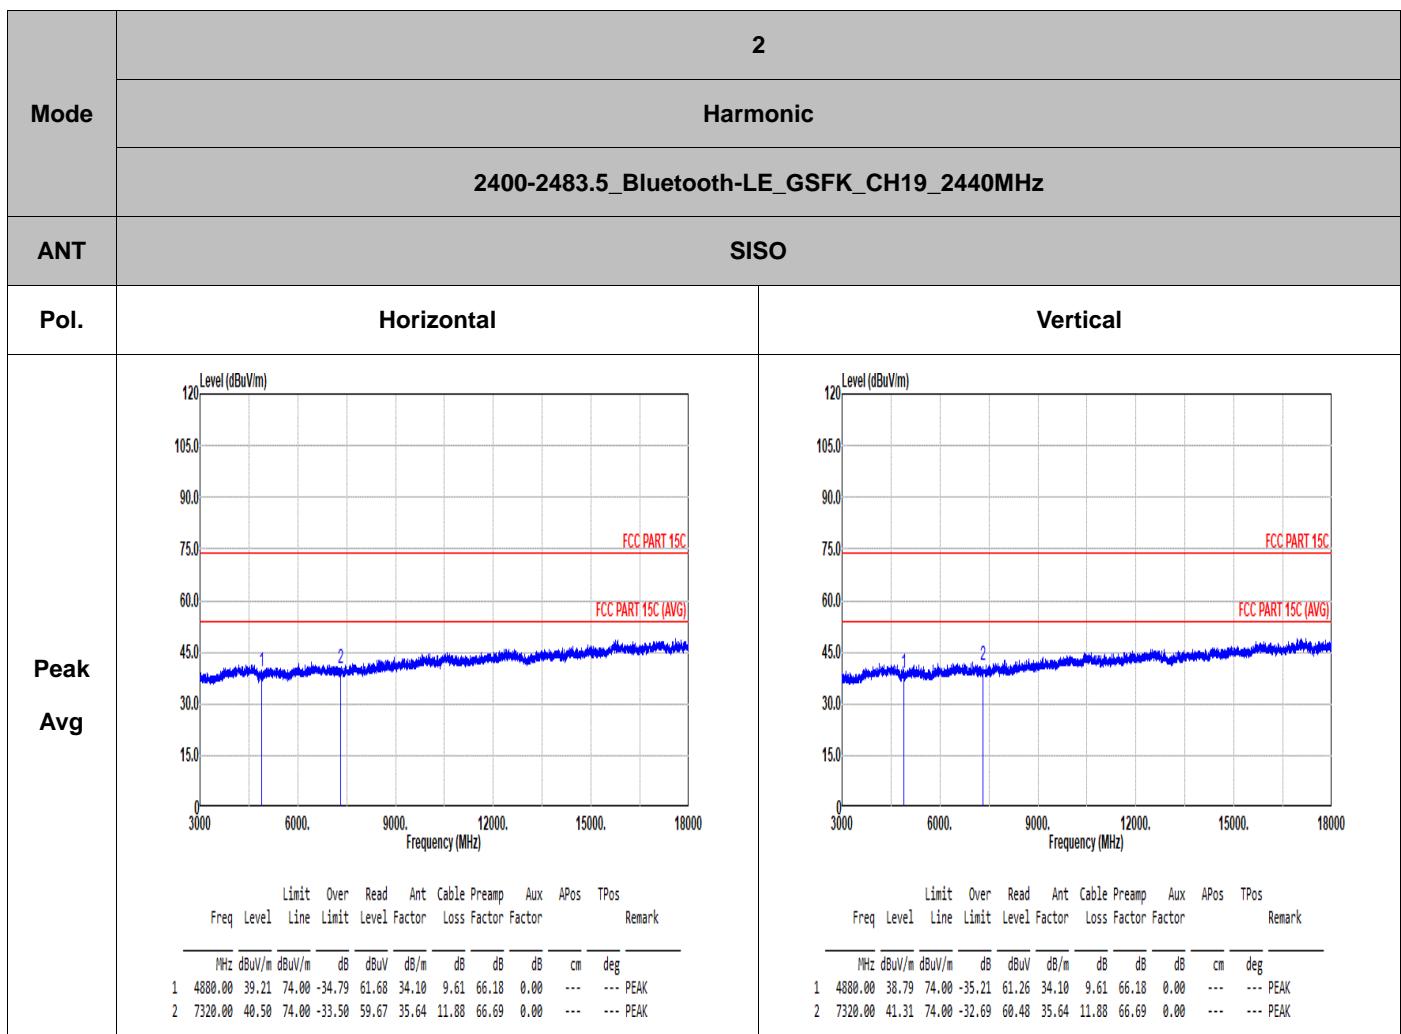

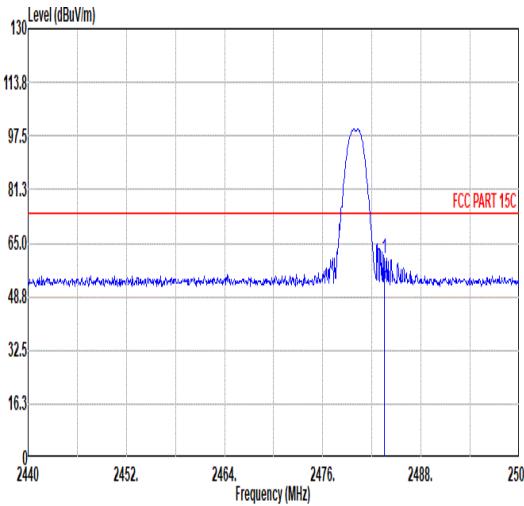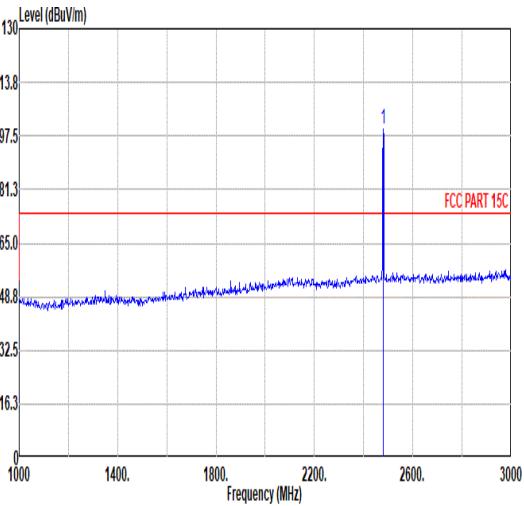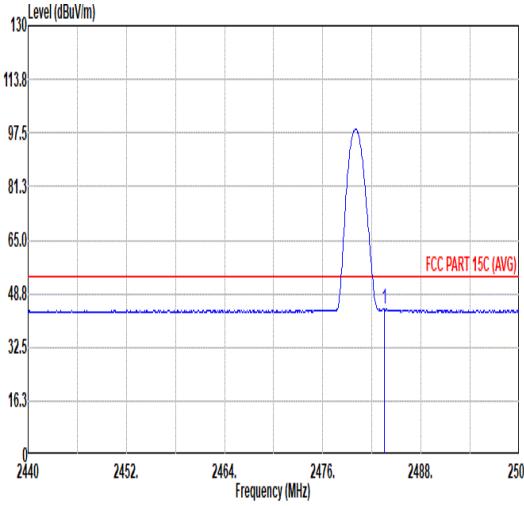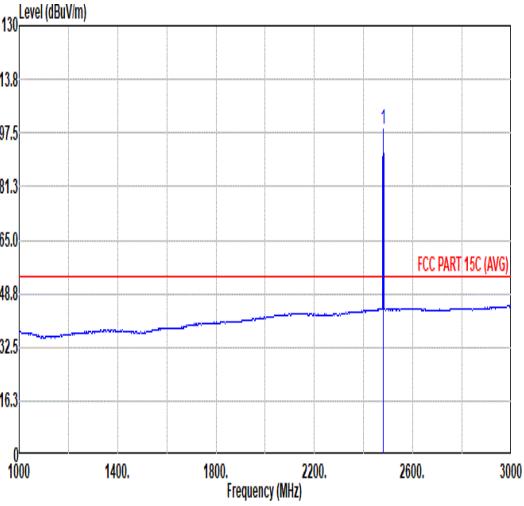



Mode	3																																																													
	Band Edge																																																													
	2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz																																																													
ANT	SISO																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	 <p>Level (dBm) vs Frequency (MHz) from 2440 to 2500. The plot shows a sharp peak at 2476.5 MHz reaching approximately 97.5 dBm, which is above the FCC Part 15C limit of 81.3 dBm.</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2483.50</td><td>60.55</td><td>74.00</td><td>-13.45</td><td>47.63</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00 294 30 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		1	2483.50	60.55	74.00	-13.45	47.63	32.50	6.83	32.41	6.00 294 30 PEAK	 <p>Level (dBm) vs Frequency (MHz) from 1000 to 3000. The plot shows a sharp peak at 2480.0 MHz reaching approximately 97.5 dBm, which is above the FCC Part 15C limit of 81.3 dBm.</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>99.63</td><td>-----</td><td>-----</td><td>86.71</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00 294 30 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		1	2480.00	99.63	-----	-----	86.71	32.50	6.83	32.41	6.00 294 30 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																						
1	2483.50	60.55	74.00	-13.45	47.63	32.50	6.83	32.41	6.00 294 30 PEAK																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																						
1	2480.00	99.63	-----	-----	86.71	32.50	6.83	32.41	6.00 294 30 PEAK																																																					
 <p>Level (dBm) vs Frequency (MHz) from 2440 to 2500. The plot shows a sharp peak at 2476.5 MHz reaching approximately 97.5 dBm, which is above the FCC Part 15C (AVG) limit of 48.8 dBm.</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2483.50</td><td>44.04</td><td>54.00</td><td>-9.96</td><td>31.12</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00 294 30 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		1	2483.50	44.04	54.00	-9.96	31.12	32.50	6.83	32.41	6.00 294 30 AVERAGE	 <p>Level (dBm) vs Frequency (MHz) from 1000 to 3000. The plot shows a sharp peak at 2480.0 MHz reaching approximately 97.5 dBm, which is above the FCC Part 15C (AVG) limit of 48.8 dBm.</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>98.54</td><td>-----</td><td>-----</td><td>85.62</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00 294 30 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		1	2480.00	98.54	-----	-----	85.62	32.50	6.83	32.41	6.00 294 30 AVERAGE	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																						
1	2483.50	44.04	54.00	-9.96	31.12	32.50	6.83	32.41	6.00 294 30 AVERAGE																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																						
1	2480.00	98.54	-----	-----	85.62	32.50	6.83	32.41	6.00 294 30 AVERAGE																																																					




Mode	3																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz																																																																																																	
ANT	SISO																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>						<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>																																																																																											
	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>2483.50</td> <td>66.91</td> <td>74.00</td> <td>-7.09</td> <td>53.99</td> <td>32.50</td> <td>6.83</td> <td>32.41</td> <td>6.00</td> <td>209 153 PEAK</td> </tr> </tbody> </table>						Limit		Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.50	66.91	74.00	-7.09	53.99	32.50	6.83	32.41	6.00	209 153 PEAK	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>2480.00</td> <td>105.46</td> <td>-----</td> <td>-----</td> <td>92.54</td> <td>32.50</td> <td>6.83</td> <td>32.41</td> <td>6.00</td> <td>209 153 PEAK</td> </tr> </tbody> </table>					Limit		Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	105.46	-----	-----	92.54	32.50	6.83	32.41	6.00
Limit		Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	66.91	74.00	-7.09	53.99	32.50	6.83	32.41	6.00	209 153 PEAK																																																																																								
Limit		Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	105.46	-----	-----	92.54	32.50	6.83	32.41	6.00	209 153 PEAK																																																																																								
Avg	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>						<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p>																																																																																											
	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>2483.62</td> <td>44.94</td> <td>54.00</td> <td>-9.06</td> <td>32.02</td> <td>32.50</td> <td>6.83</td> <td>32.41</td> <td>6.00</td> <td>209 153 AVERAGE</td> </tr> </tbody> </table>						Limit		Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.62	44.94	54.00	-9.06	32.02	32.50	6.83	32.41	6.00	209 153 AVERAGE	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>2480.00</td> <td>104.27</td> <td>-----</td> <td>-----</td> <td>91.35</td> <td>32.50</td> <td>6.83</td> <td>32.41</td> <td>6.00</td> <td>209 153 AVERAGE</td> </tr> </tbody> </table>					Limit		Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2480.00	104.27	-----	-----	91.35	32.50	6.83	32.41	6.00
Limit		Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.62	44.94	54.00	-9.06	32.02	32.50	6.83	32.41	6.00	209 153 AVERAGE																																																																																								
Limit		Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	104.27	-----	-----	91.35	32.50	6.83	32.41	6.00	209 153 AVERAGE																																																																																								



3

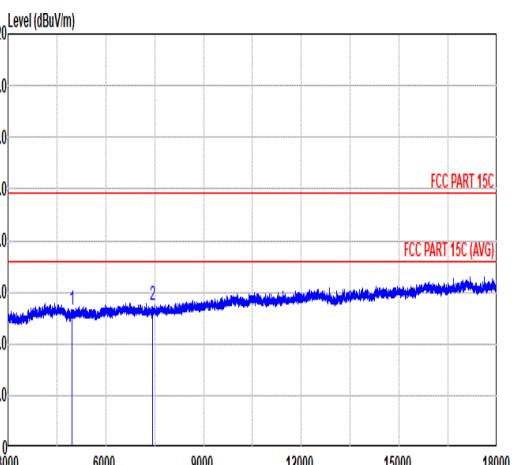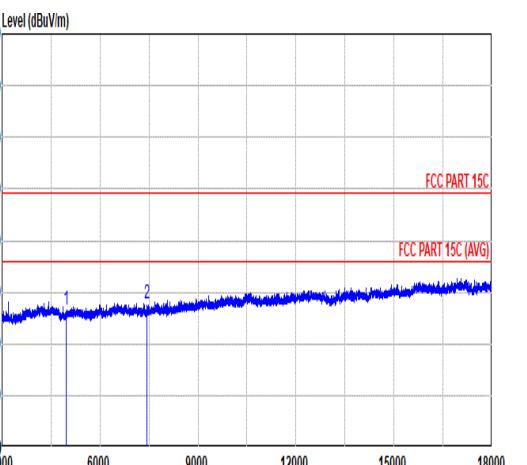Mode	Harmonic																																																																																																									
	2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz																																																																																																									
ANT	SISO																																																																																																									
	Pol.	Horizontal					Vertical																																																																																																			
Peak																																																																																																										
	Avg	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>TPos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.03</td> <td>74.00</td> <td>-33.97</td> <td>62.48</td> <td>34.04</td> <td>9.70</td> <td>66.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>41.05</td> <td>74.00</td> <td>-32.95</td> <td>60.01</td> <td>35.78</td> <td>11.96</td> <td>66.70</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>					Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	TPos	Remark	1	4960.00	40.03	74.00	-33.97	62.48	34.04	9.70	66.19	0.00	---	---	PEAK	2	7440.00	41.05	74.00	-32.95	60.01	35.78	11.96	66.70	0.00	---	---	PEAK	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>TPos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>40.05</td> <td>74.00</td> <td>-33.95</td> <td>62.50</td> <td>34.04</td> <td>9.70</td> <td>66.19</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>41.54</td> <td>74.00</td> <td>-32.46</td> <td>60.50</td> <td>35.76</td> <td>11.96</td> <td>66.70</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>					Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	TPos	Remark	1	4960.00	40.05	74.00	-33.95	62.50	34.04	9.70	66.19	0.00	---	---	PEAK	2	7440.00	41.54	74.00	-32.46	60.50	35.76	11.96	66.70	0.00	---	---
Freq		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	TPos	Remark																																																																																																
1	4960.00	40.03	74.00	-33.97	62.48	34.04	9.70	66.19	0.00	---	---	PEAK																																																																																														
2	7440.00	41.05	74.00	-32.95	60.01	35.78	11.96	66.70	0.00	---	---	PEAK																																																																																														
Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	TPos	Remark																																																																																																
1	4960.00	40.05	74.00	-33.95	62.50	34.04	9.70	66.19	0.00	---	---	PEAK																																																																																														
2	7440.00	41.54	74.00	-32.46	60.50	35.76	11.96	66.70	0.00	---	---	PEAK																																																																																														

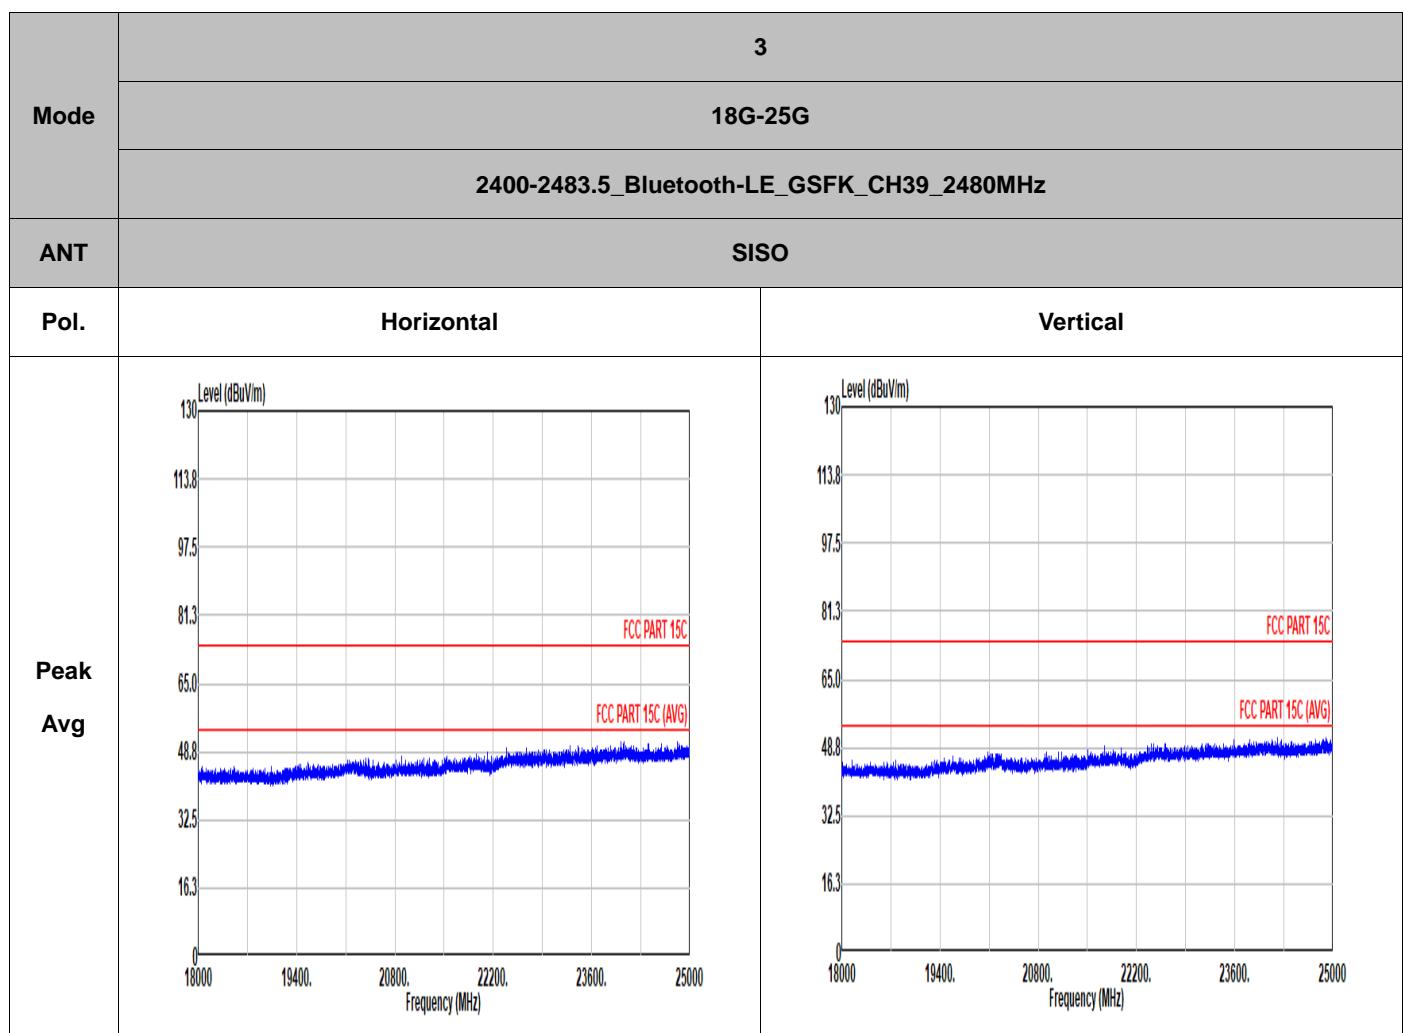



Mode	3																																																																																																																																																																																									
	30-1G																																																																																																																																																																																									
	2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz																																																																																																																																																																																									
ANT	SISO																																																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																																																			
Peak																																																																																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr></thead><tbody><tr><td>1</td><td>199.99</td><td>32.45</td><td>43.50</td><td>-11.05</td><td>47.66</td><td>14.73</td><td>2.15</td><td>32.09</td><td>0.00</td><td>---</td></tr><tr><td>2</td><td>249.95</td><td>36.89</td><td>46.00</td><td>-9.11</td><td>47.88</td><td>18.42</td><td>2.42</td><td>31.83</td><td>0.00</td><td>---</td></tr><tr><td>3</td><td>349.98</td><td>37.65</td><td>46.00</td><td>-8.35</td><td>45.56</td><td>20.22</td><td>2.85</td><td>31.98</td><td>0.00</td><td>---</td></tr><tr><td>4</td><td>400.06</td><td>36.51</td><td>46.00</td><td>-9.49</td><td>43.77</td><td>21.83</td><td>3.05</td><td>32.14</td><td>0.00</td><td>---</td></tr><tr><td>5</td><td>450.01</td><td>37.93</td><td>46.00</td><td>-8.07</td><td>44.17</td><td>22.84</td><td>3.24</td><td>32.32</td><td>0.00</td><td>---</td></tr><tr><td>6</td><td>479.96</td><td>39.50</td><td>46.00</td><td>-6.50</td><td>44.75</td><td>23.59</td><td>3.34</td><td>32.18</td><td>0.00</td><td>---</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		1	199.99	32.45	43.50	-11.05	47.66	14.73	2.15	32.09	0.00	---	2	249.95	36.89	46.00	-9.11	47.88	18.42	2.42	31.83	0.00	---	3	349.98	37.65	46.00	-8.35	45.56	20.22	2.85	31.98	0.00	---	4	400.06	36.51	46.00	-9.49	43.77	21.83	3.05	32.14	0.00	---	5	450.01	37.93	46.00	-8.07	44.17	22.84	3.24	32.32	0.00	---	6	479.96	39.50	46.00	-6.50	44.75	23.59	3.34	32.18	0.00	---	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr></thead><tbody><tr><td>1</td><td>99.96</td><td>30.83</td><td>43.50</td><td>-12.67</td><td>45.41</td><td>15.95</td><td>1.53</td><td>32.06</td><td>0.00</td><td>---</td></tr><tr><td>2</td><td>300.02</td><td>28.15</td><td>46.00</td><td>-17.05</td><td>38.65</td><td>19.14</td><td>2.66</td><td>32.30</td><td>0.00</td><td>---</td></tr><tr><td>3</td><td>349.98</td><td>31.70</td><td>46.00</td><td>-14.30</td><td>40.61</td><td>20.22</td><td>2.85</td><td>31.98</td><td>0.00</td><td>---</td></tr><tr><td>4</td><td>450.01</td><td>34.17</td><td>46.00</td><td>-11.83</td><td>40.41</td><td>22.84</td><td>3.24</td><td>32.32</td><td>0.00</td><td>---</td></tr><tr><td>5</td><td>480.08</td><td>37.15</td><td>46.00</td><td>-8.85</td><td>42.40</td><td>23.59</td><td>3.34</td><td>32.18</td><td>0.00</td><td>---</td></tr><tr><td>6</td><td>675.05</td><td>35.23</td><td>46.00</td><td>-10.77</td><td>37.47</td><td>26.11</td><td>3.97</td><td>32.32</td><td>0.00</td><td>---</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		1	99.96	30.83	43.50	-12.67	45.41	15.95	1.53	32.06	0.00	---	2	300.02	28.15	46.00	-17.05	38.65	19.14	2.66	32.30	0.00	---	3	349.98	31.70	46.00	-14.30	40.61	20.22	2.85	31.98	0.00	---	4	450.01	34.17	46.00	-11.83	40.41	22.84	3.24	32.32	0.00	---	5	480.08	37.15	46.00	-8.85	42.40	23.59	3.34	32.18	0.00	---	6	675.05	35.23	46.00	-10.77	37.47	26.11	3.97	32.32	0.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																	
1	199.99	32.45	43.50	-11.05	47.66	14.73	2.15	32.09	0.00	---																																																																																																																																																																																
2	249.95	36.89	46.00	-9.11	47.88	18.42	2.42	31.83	0.00	---																																																																																																																																																																																
3	349.98	37.65	46.00	-8.35	45.56	20.22	2.85	31.98	0.00	---																																																																																																																																																																																
4	400.06	36.51	46.00	-9.49	43.77	21.83	3.05	32.14	0.00	---																																																																																																																																																																																
5	450.01	37.93	46.00	-8.07	44.17	22.84	3.24	32.32	0.00	---																																																																																																																																																																																
6	479.96	39.50	46.00	-6.50	44.75	23.59	3.34	32.18	0.00	---																																																																																																																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																	
1	99.96	30.83	43.50	-12.67	45.41	15.95	1.53	32.06	0.00	---																																																																																																																																																																																
2	300.02	28.15	46.00	-17.05	38.65	19.14	2.66	32.30	0.00	---																																																																																																																																																																																
3	349.98	31.70	46.00	-14.30	40.61	20.22	2.85	31.98	0.00	---																																																																																																																																																																																
4	450.01	34.17	46.00	-11.83	40.41	22.84	3.24	32.32	0.00	---																																																																																																																																																																																
5	480.08	37.15	46.00	-8.85	42.40	23.59	3.34	32.18	0.00	---																																																																																																																																																																																
6	675.05	35.23	46.00	-10.77	37.47	26.11	3.97	32.32	0.00	---																																																																																																																																																																																

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	85.30	2.136	0.468	0.47kHz

Bluetooth – LE 1Mbps

