



802.11ac-VHT80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

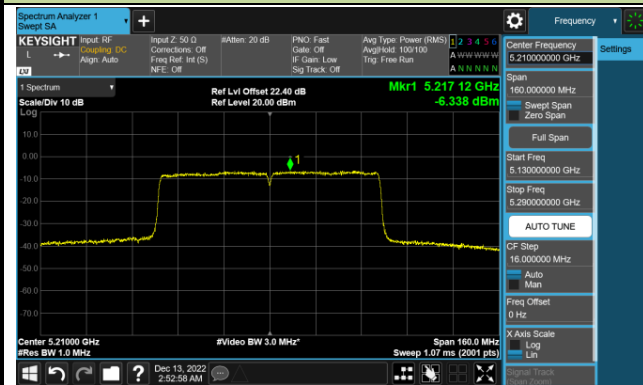


Channel 58 (5290MHz)

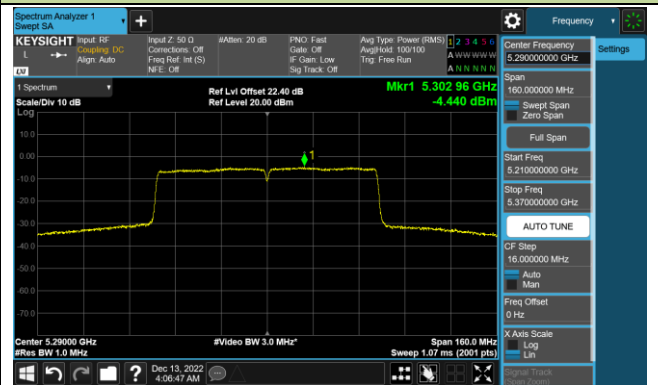


Channel 106 (5530MHz)

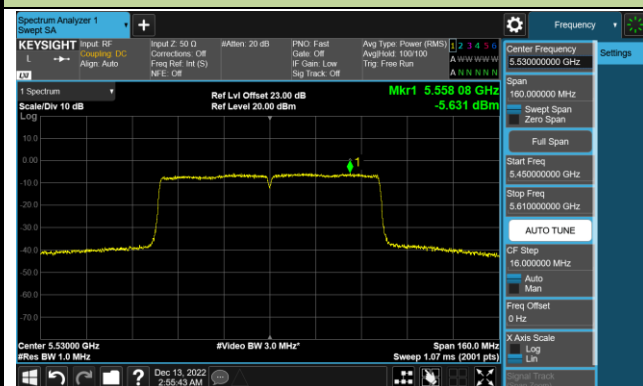


Channel 122 (5610MHz)

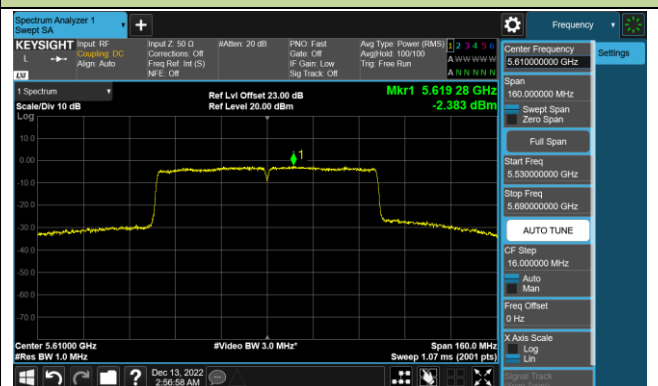

Channel 138 (5690MHz)

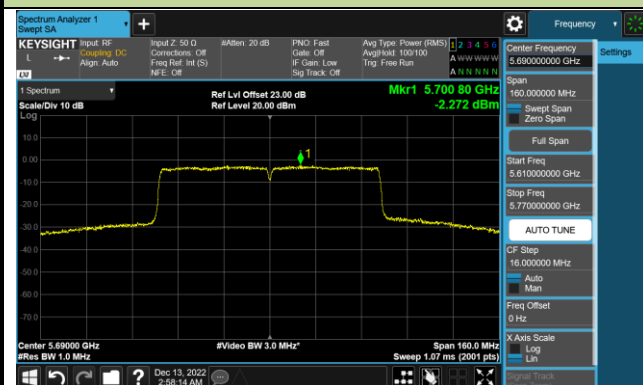

Channel 155 (5775MHz)

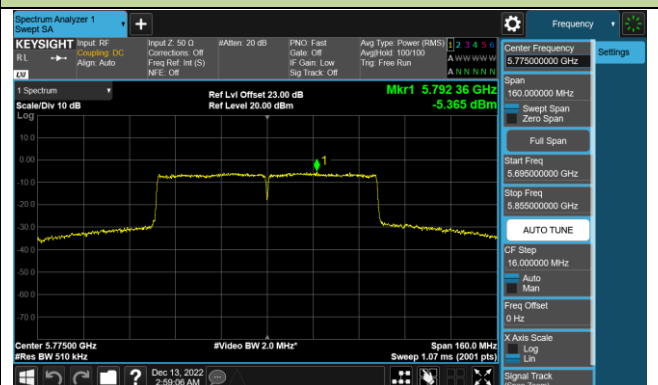


802.11ax-HE20 Power Spectral Density - Ant 1


Channel 36 (5180MHz)




Channel 44 (5220MHz)

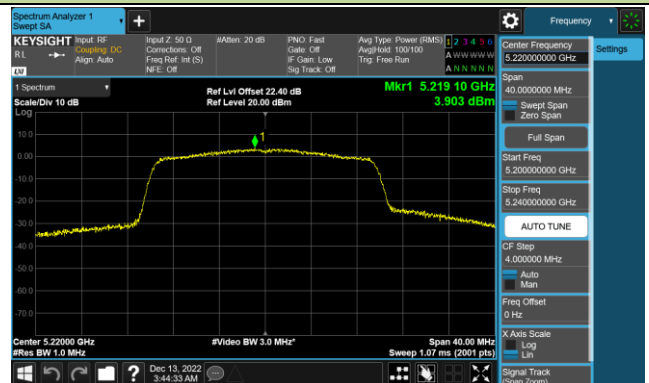


Channel 48 (5240MHz)

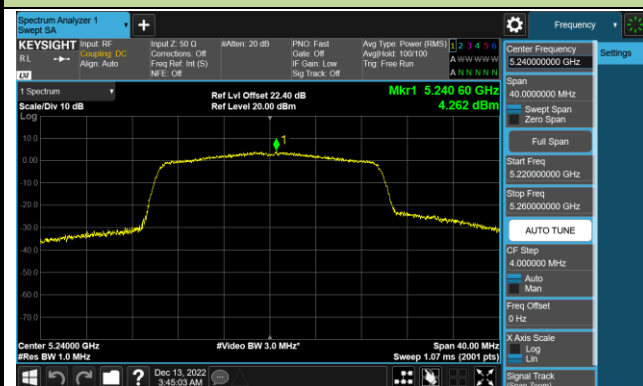


Channel 52 (5260MHz)

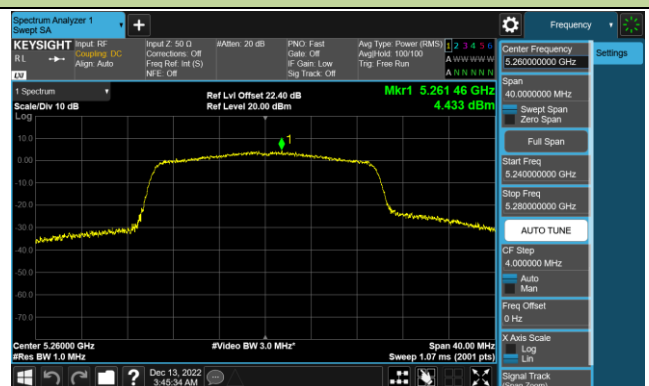

Channel 60 (5300MHz)

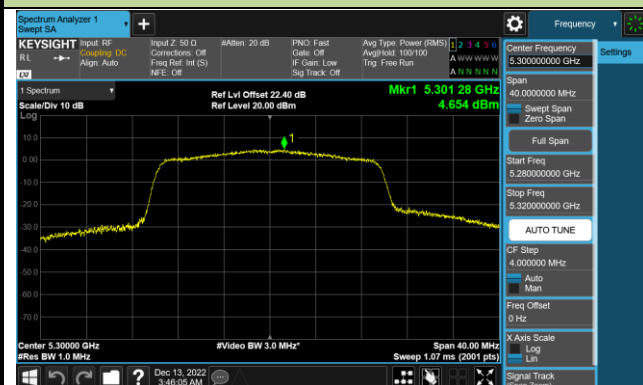

Channel 64 (5320MHz)

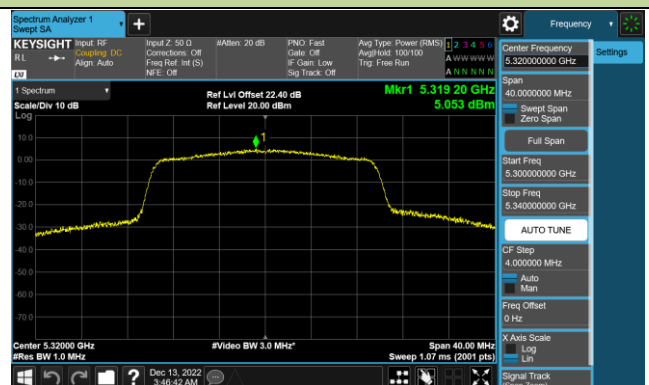


Channel 100 (5500MHz)




Channel 116 (5580MHz)



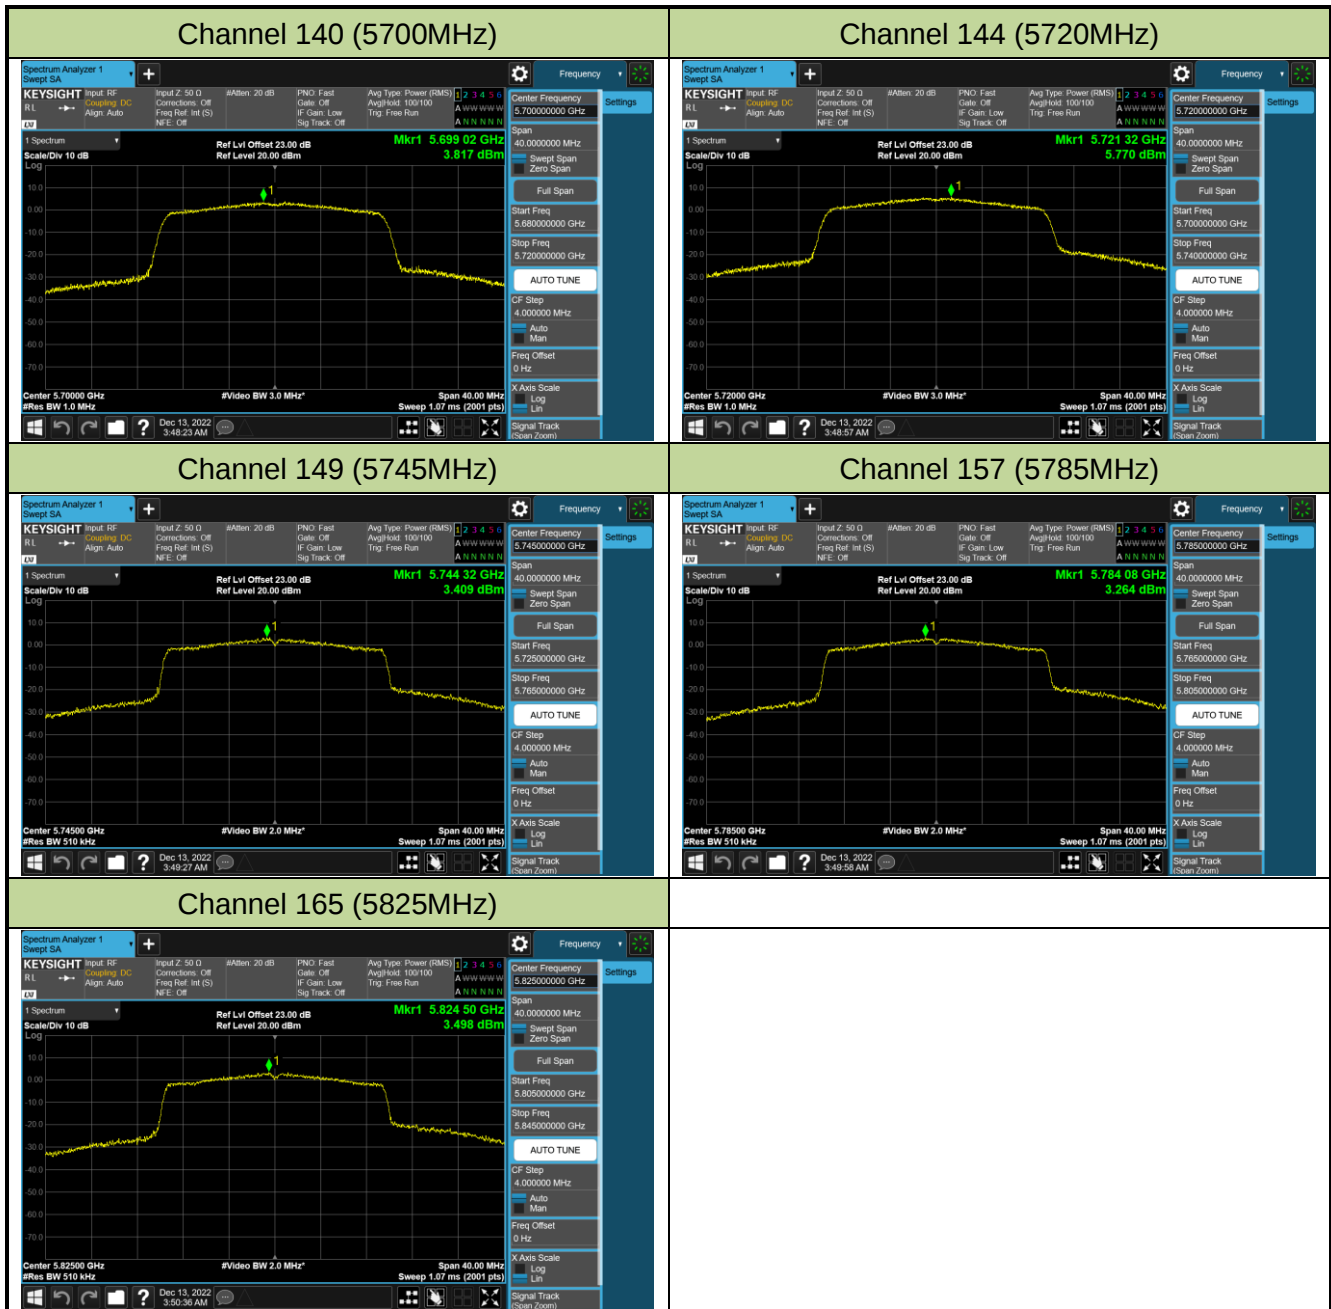


802.11ax-HE40 Power Spectral Density - Ant 1

Channel 38 (5190MHz)

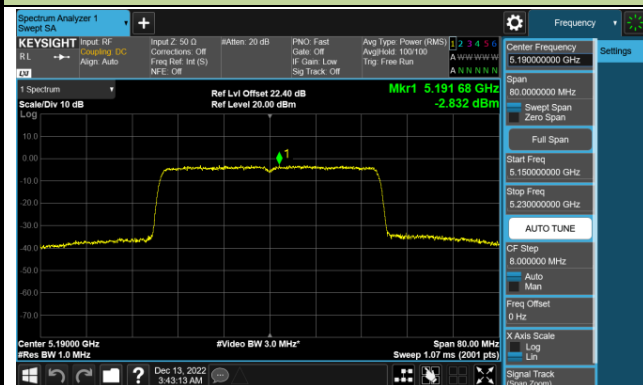

Channel 46 (5230MHz)

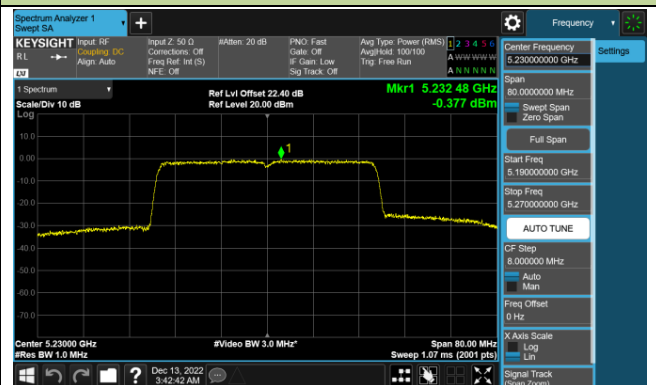


Channel 54 (5270MHz)



Channel 62 (5310MHz)




Channel 102 (5510MHz)

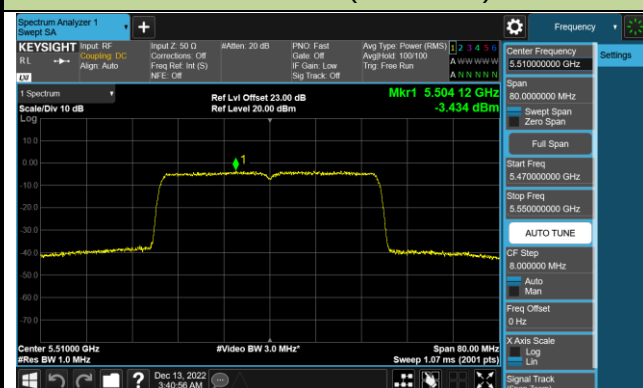


Channel 110 (5550MHz)



Channel 134 (5670MHz)

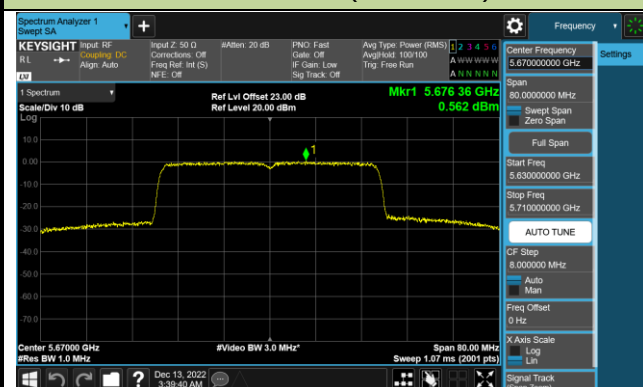


Channel 142 (5710MHz)

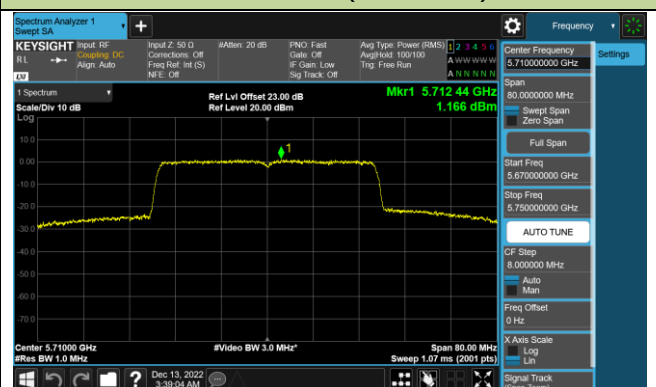




802.11ax-HE80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

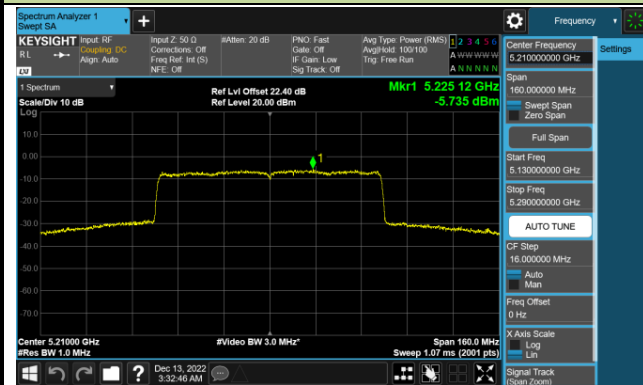


Channel 58 (5290MHz)

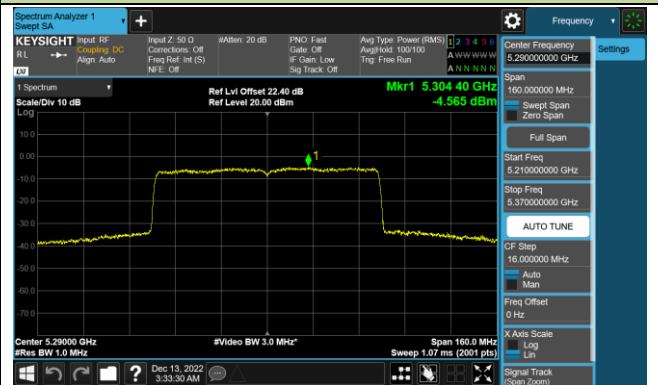


Channel 106 (5530MHz)

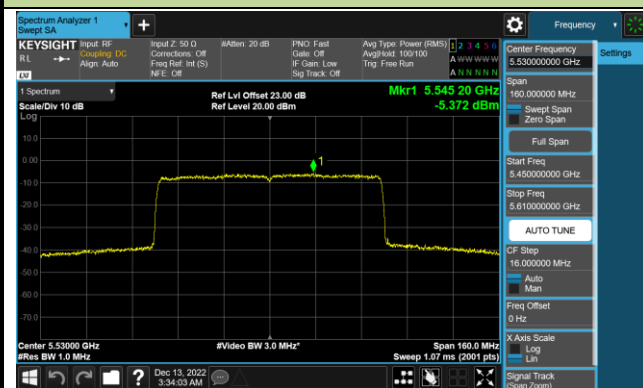


Channel 122 (5610MHz)

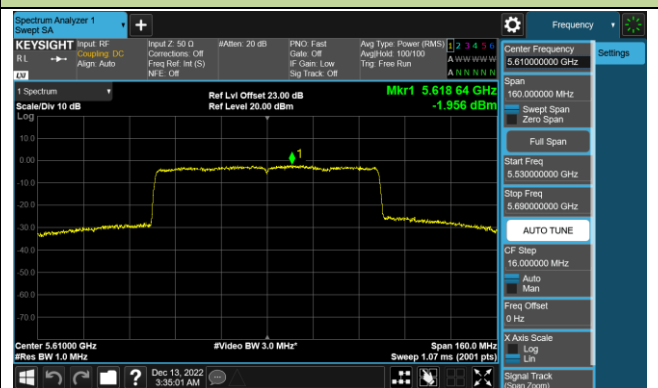

Channel 138 (5690MHz)

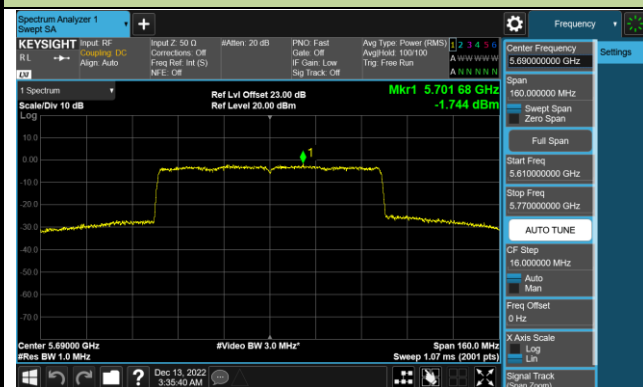


Channel 155 (5775MHz)

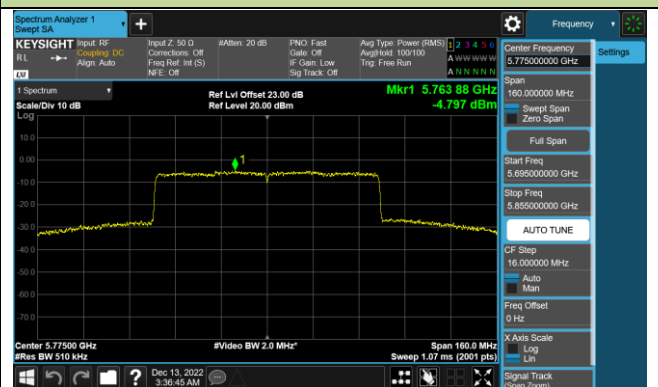


IC U-NII-1_802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

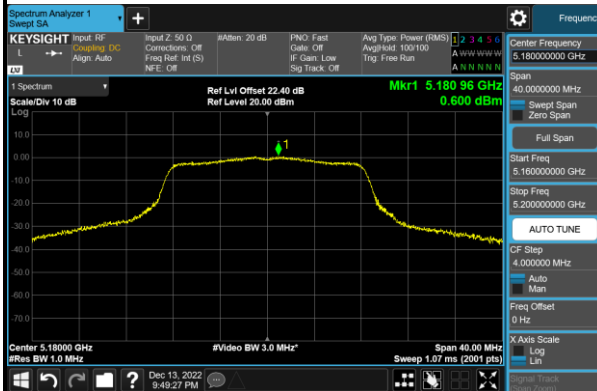

Channel 44 (5220MHz)

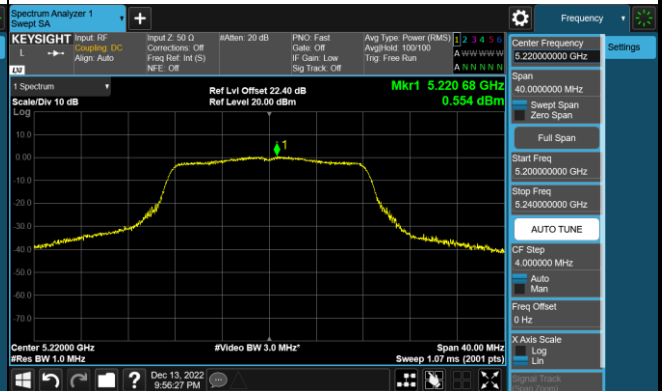


Channel 48 (5240MHz)

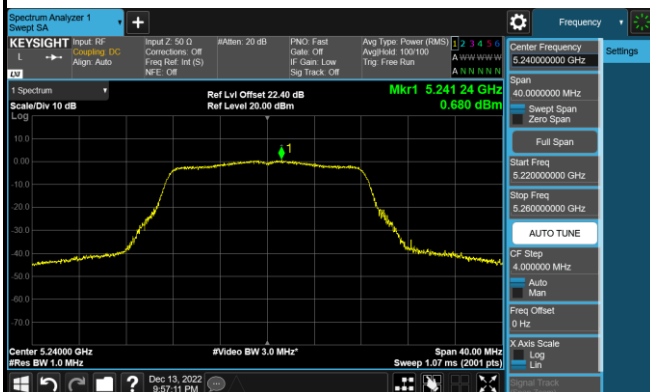


IC U-NII-1_802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

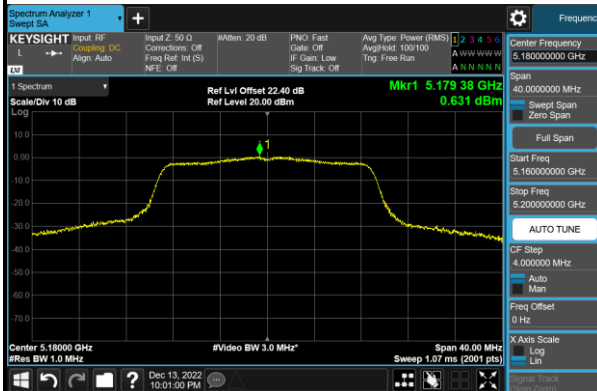

Channel 44 (5220MHz)

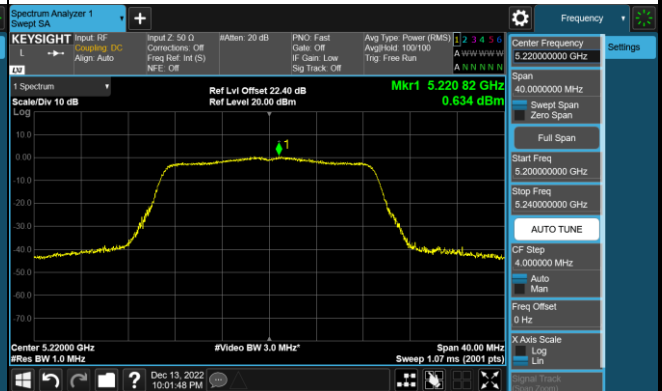


Channel 48 (5240MHz)

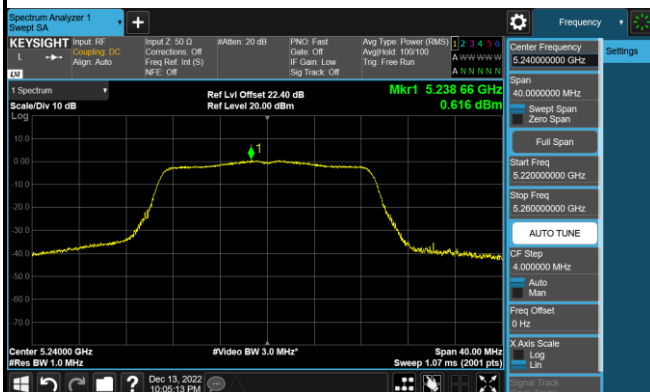


IC U-NII-1_802.11ac-VHT40 Power Spectral Density - Ant 0

Channel 38 (5190MHz)

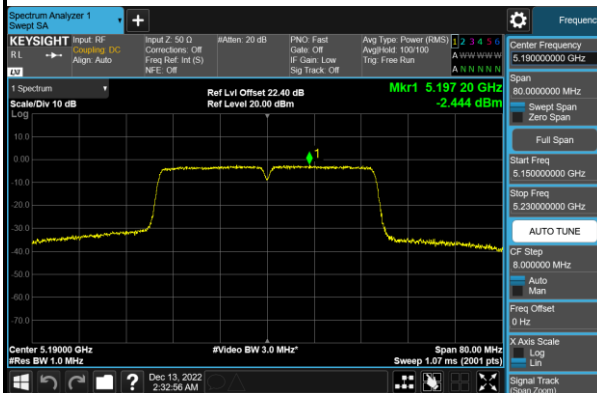


Channel 46 (5230MHz)

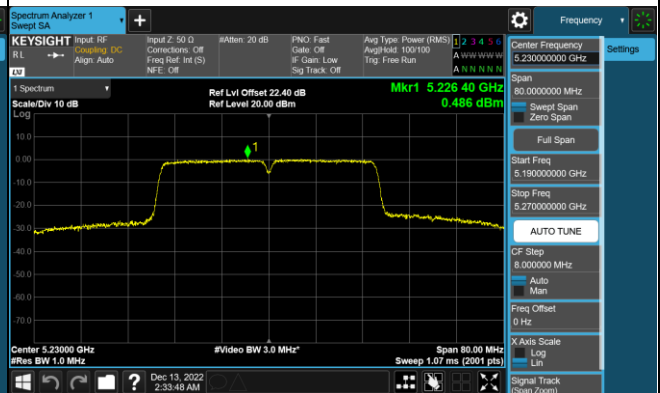


IC U-NII-1_802.11ac-VHT80 Power Spectral Density - Ant 0

Channel 42 (5210MHz)

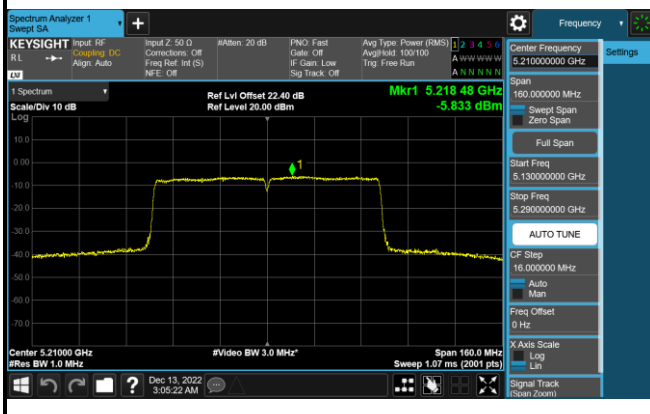


IC U-NII-1_802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

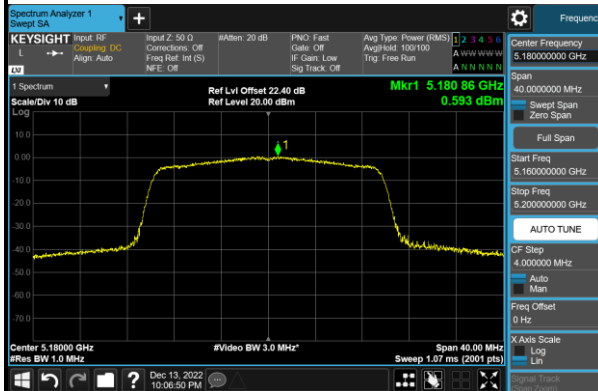

Channel 44 (5220MHz)

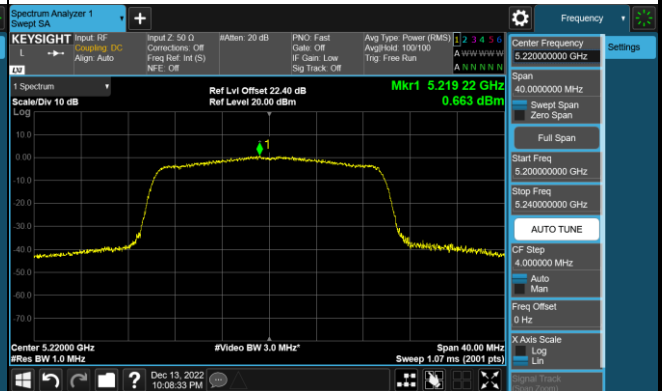


Channel 48 (5240MHz)

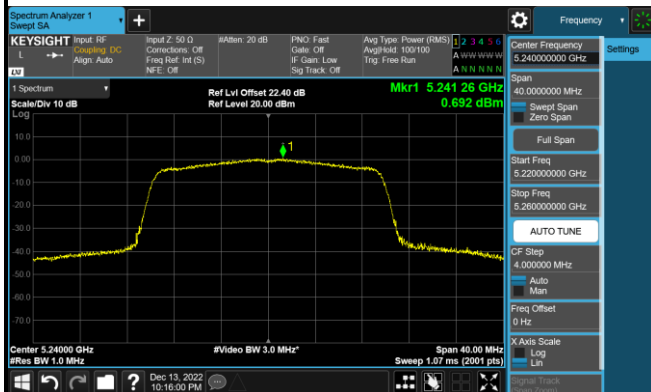


IC U-NII-1_802.11ax-HE40 Power Spectral Density - Ant 0

Channel 38 (5190MHz)

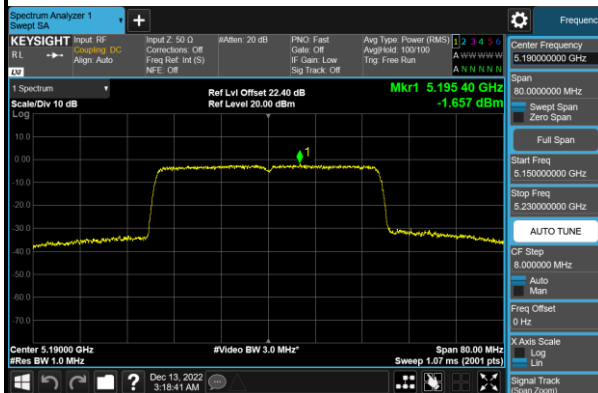


Channel 46 (5230MHz)

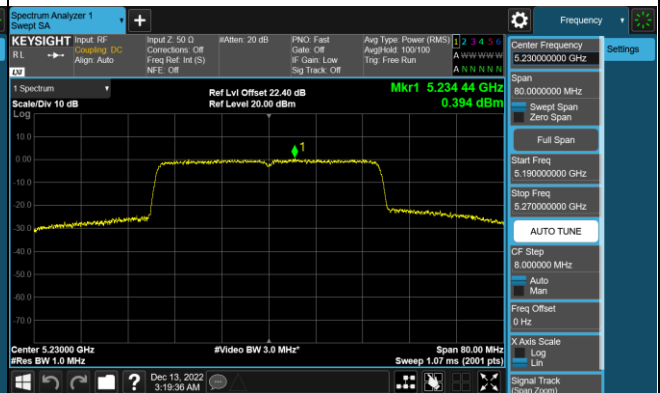


IC U-NII-1_802.11ax-HE80 Power Spectral Density - Ant 0

Channel 42 (5210MHz)

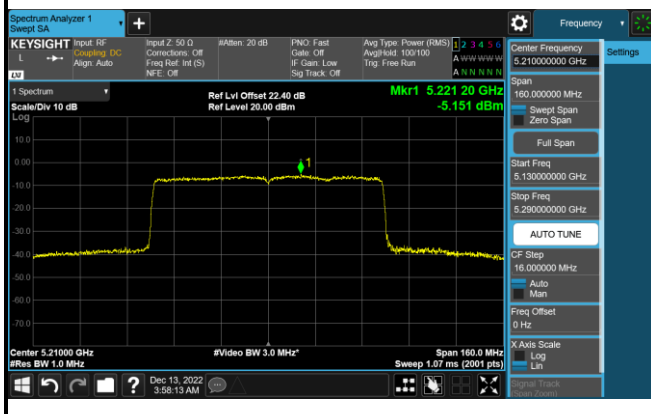


IC U-NII-1_802.11a Power Spectral Density - Ant 1


Channel 36 (5180MHz)

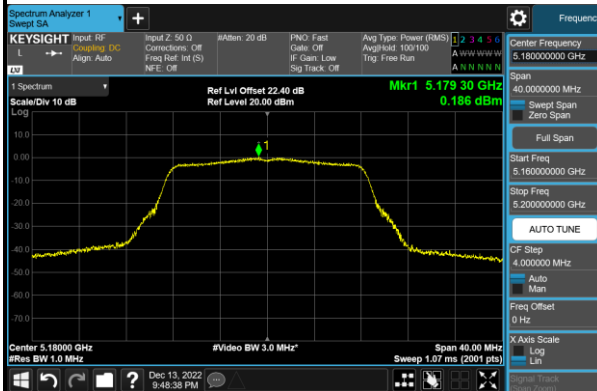

Channel 44 (5220MHz)

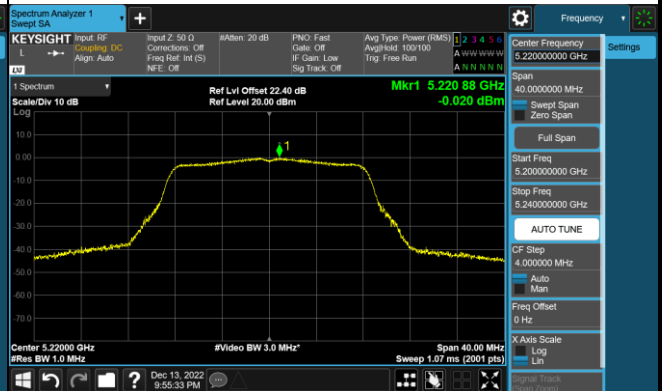


Channel 48 (5240MHz)

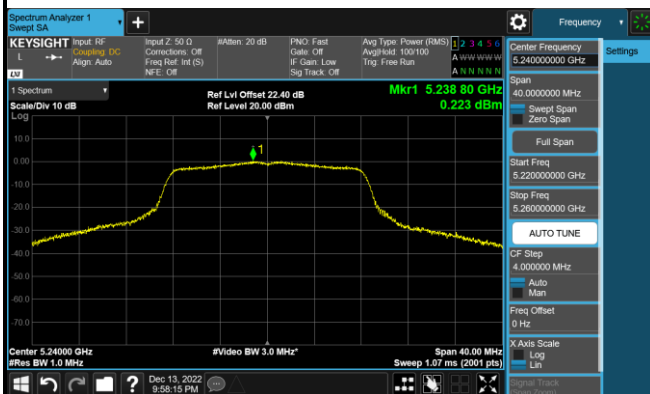


IC U-NII-1_802.11ac-VHT20 Power Spectral Density - Ant 1


Channel 36 (5180MHz)

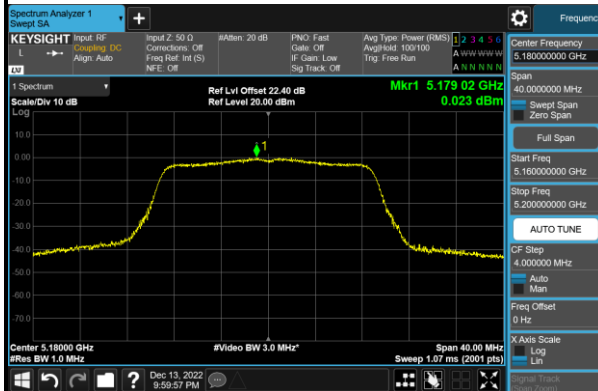

Channel 44 (5220MHz)

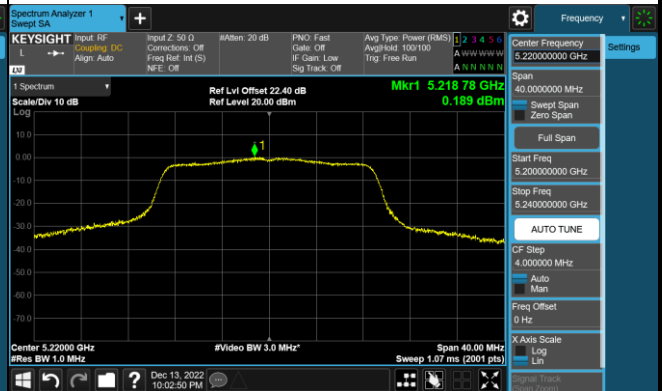


Channel 48 (5240MHz)

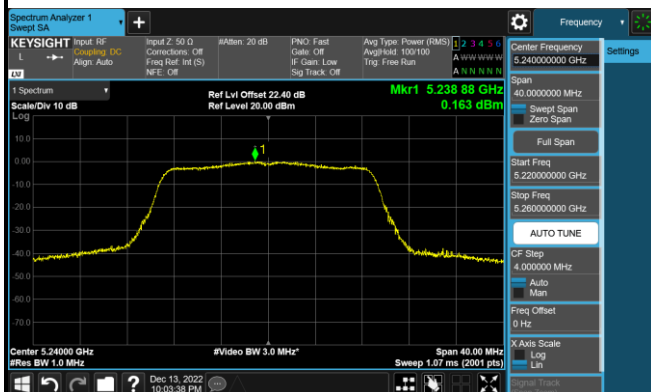


IC U-NII-1_802.11ac-VHT40 Power Spectral Density - Ant 1

Channel 38 (5190MHz)

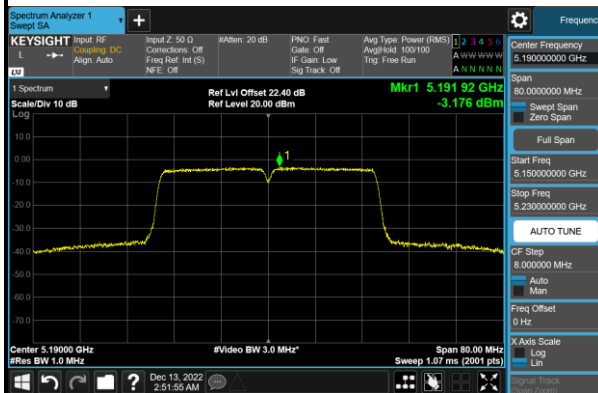


Channel 46 (5230MHz)

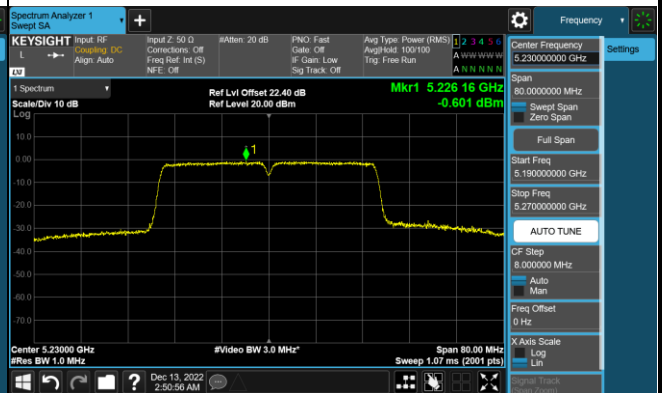


IC U-NII-1_802.11ac-VHT80 Power Spectral Density - Ant 1

Channel 42 (5210MHz)

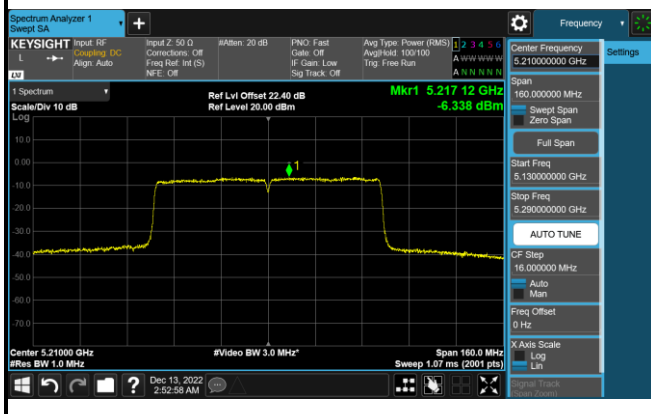


IC U-NII-1_802.11ax-HE20 Power Spectral Density - Ant 1


Channel 36 (5180MHz)

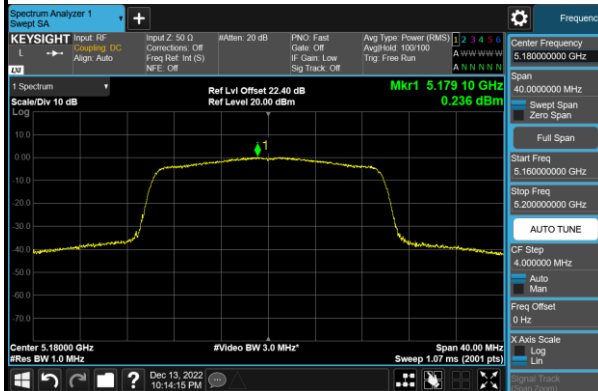

Channel 44 (5220MHz)

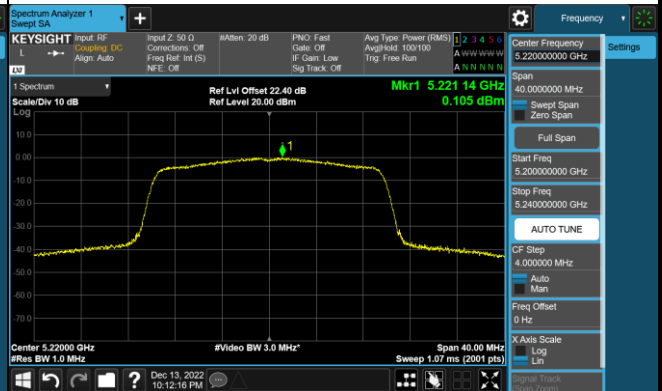


Channel 48 (5240MHz)

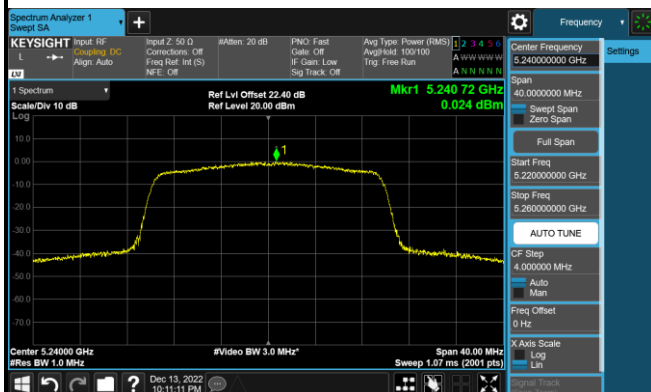


IC U-NII-1_802.11ax-HE40 Power Spectral Density - Ant 1

Channel 38 (5190MHz)

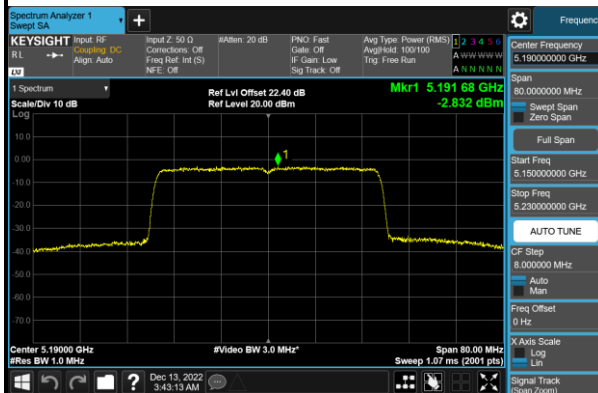


Channel 46 (5230MHz)

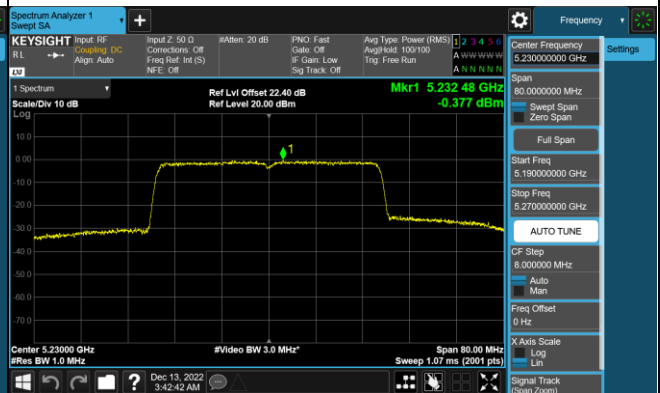

IC U-NII-1_802.11ax-HE80 Power Spectral Density - Ant 1

Channel 42 (5210MHz)

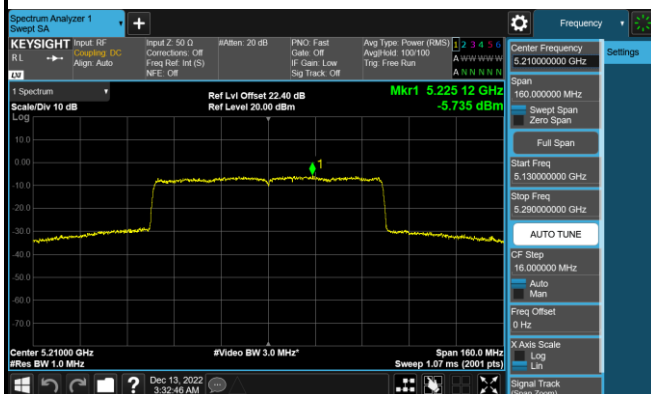

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

KDB 789033 D02v02r01 – Section G

7.7.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120 kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Average Measurements above 1GHz (Method AD)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (Average)
5. Number of measurement points = 1001 (Number of points must be $> 2 \times \text{span}/\text{RBW}$)
6. Sweep time = auto
7. Trace was averaged over at 100 sweeps

Quasi-Peak & Average Measurements below 30MHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 200Hz for 9kHz to 150kHz frequency; RBW = 9kHz for 0.15MHz to 30MHz frequency
4. Detector = CISPR quasi-peak or power average (Average)
5. Sweep time = auto couple
6. Trace was allowed to stabilize

7.7.4. Test Setup


9kHz ~ 30MHz Test Setup:

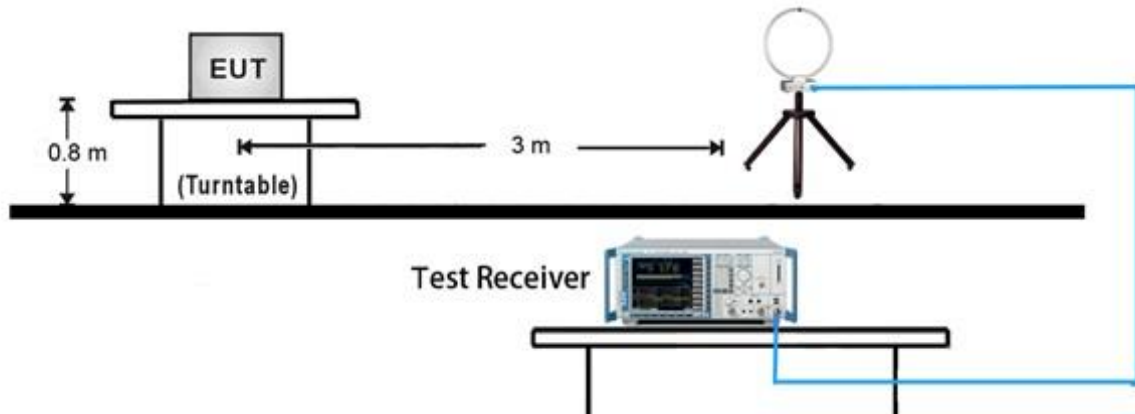


30MHz ~ 1GHz Test Setup:

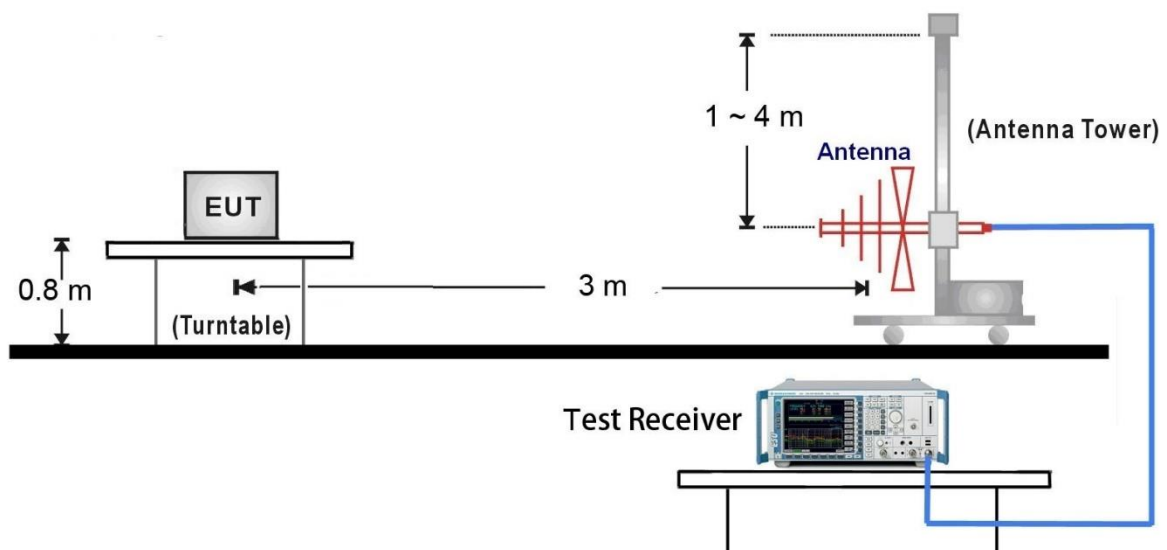

1GHz ~18GHz Test Setup:

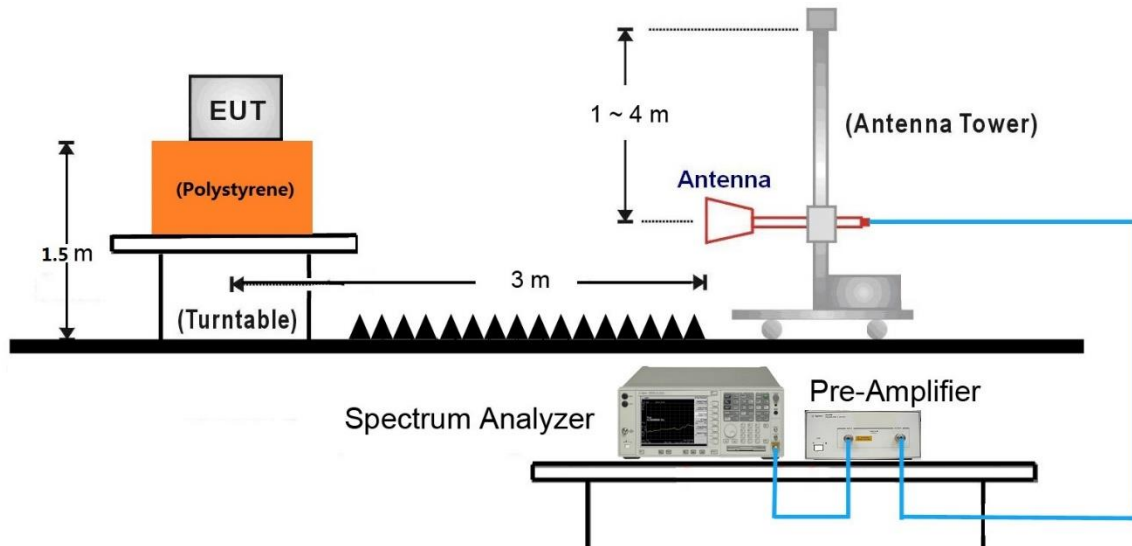


18GHz ~40GHz Test Setup:

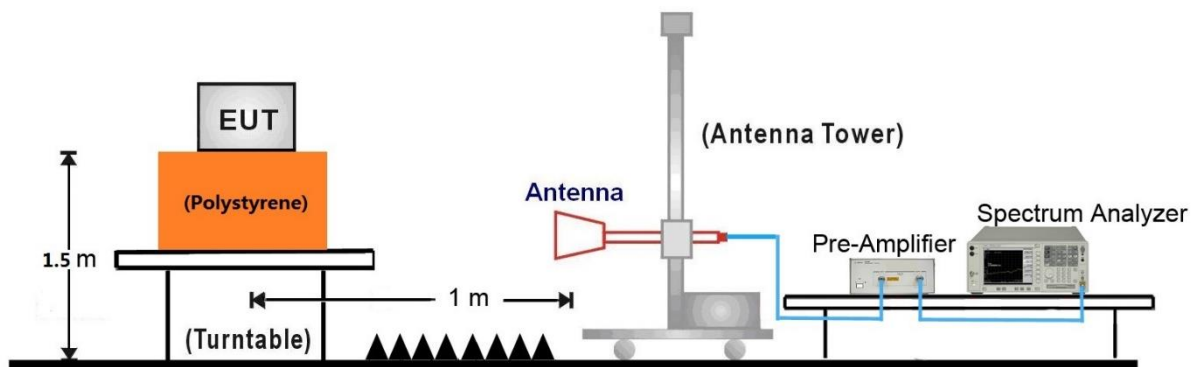

7.7.5. Test Result

EUT	Module	Date of Test	2022-12-10
Factor	VULB 9162	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

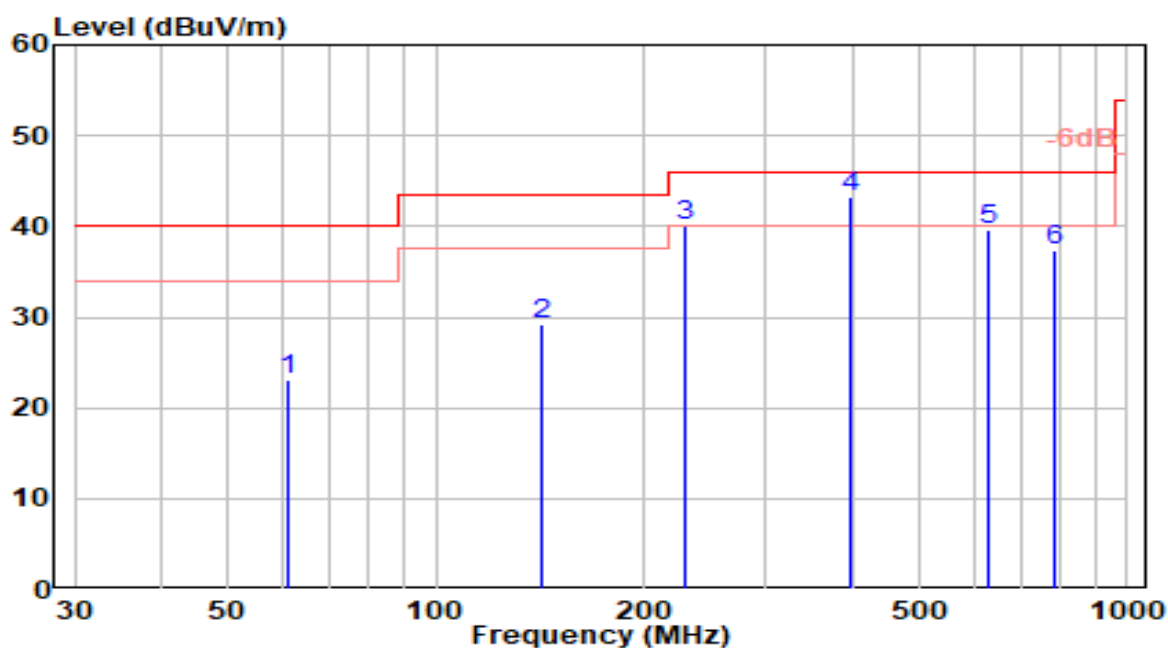


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	61.040	3.35	19.66	23.01	-16.99	40.00	162	359	QP
2	142.520	13.62	15.60	29.22	-14.28	43.50	100	89	QP
3	228.850	20.39	19.70	40.08	-5.92	46.00	100	8	QP
4	* 397.630	19.20	23.99	43.19	-2.81	46.00	167	315	QP
5	631.400	11.70	27.99	39.68	-6.32	46.00	100	320	QP
6	787.570	7.49	29.82	37.31	-8.69	46.00	100	322	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	VULB 9162	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

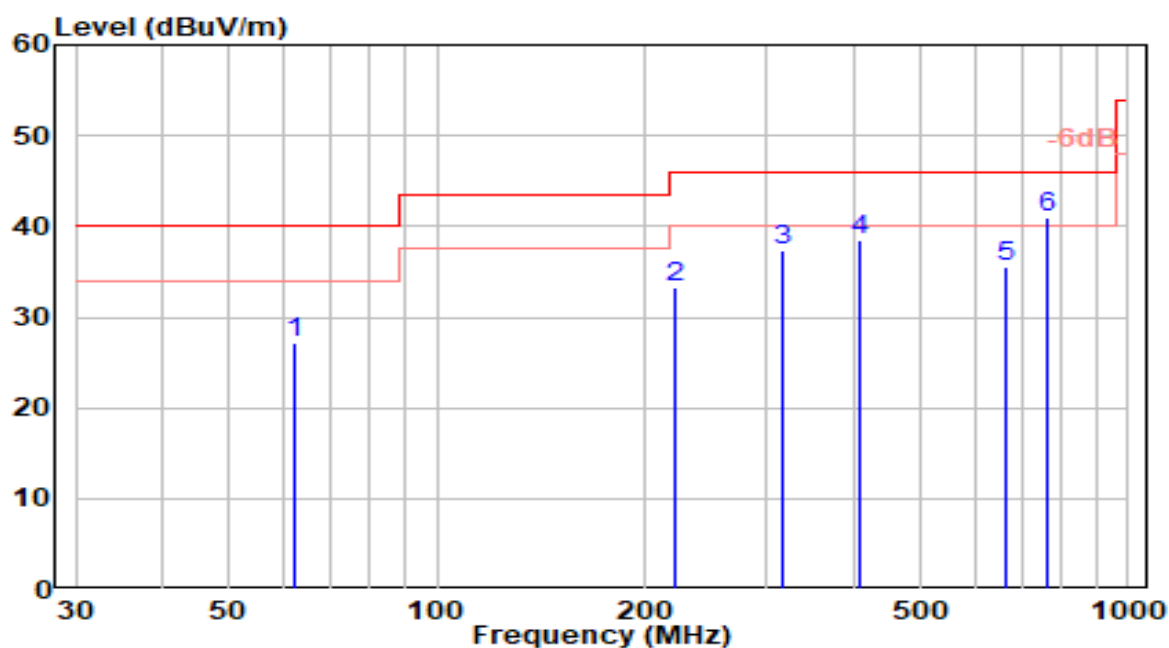


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	62.010	7.77	19.29	27.06	-12.94	40.00	100	308	QP
2	221.090	14.09	19.14	33.23	-12.77	46.00	150	310	QP
3	315.180	15.60	21.84	37.44	-8.56	46.00	101	0	QP
4	409.270	14.47	24.11	38.58	-7.42	46.00	150	359	QP
5	663.410	7.17	28.36	35.53	-10.47	46.00	100	360	QP
6	* 761.380	11.21	29.67	40.88	-5.12	46.00	100	360	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
w in test report.

EUT	Module	Date of Test	2022-12-10
Factor	VULB 9162	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_RX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

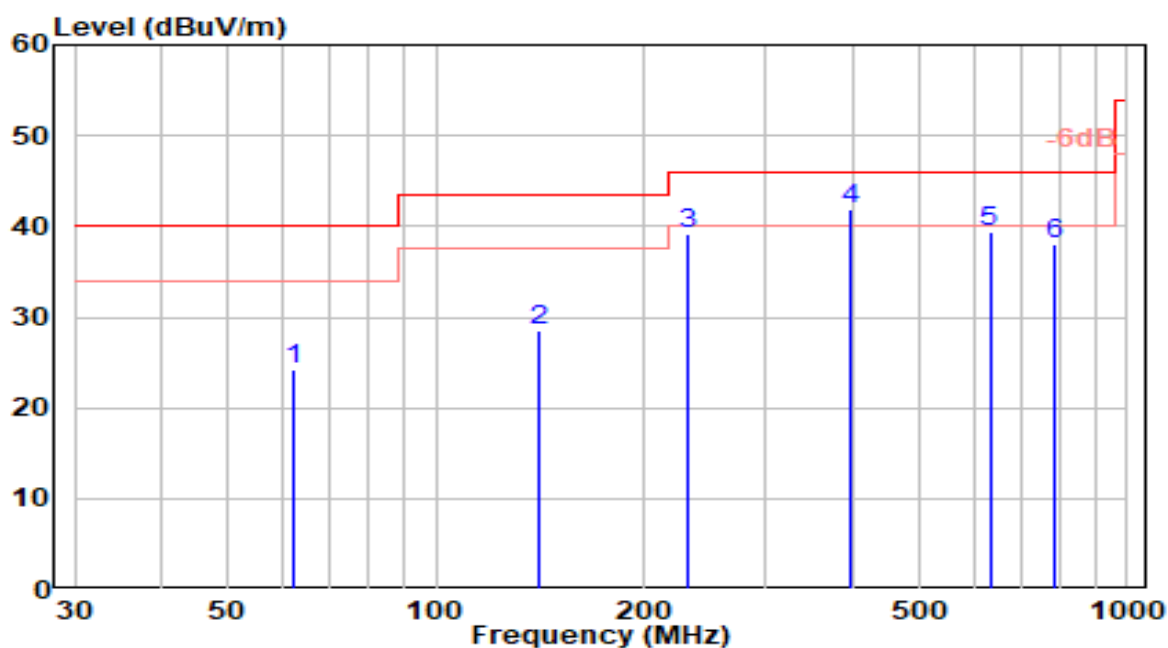


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	62.370	5.01	19.16	24.17	-15.83	40.00	150	14	QP
2	141.510	12.90	15.57	28.48	-15.02	43.50	100	104	QP
3	230.370	19.35	19.80	39.15	-6.85	46.00	100	23	QP
4	* 396.650	17.95	23.97	41.92	-4.08	46.00	121	330	QP
5	632.550	11.42	28.00	39.41	-6.59	46.00	100	335	QP
6	786.900	8.22	29.82	38.04	-7.96	46.00	100	337	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	VULB 9162	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_RX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

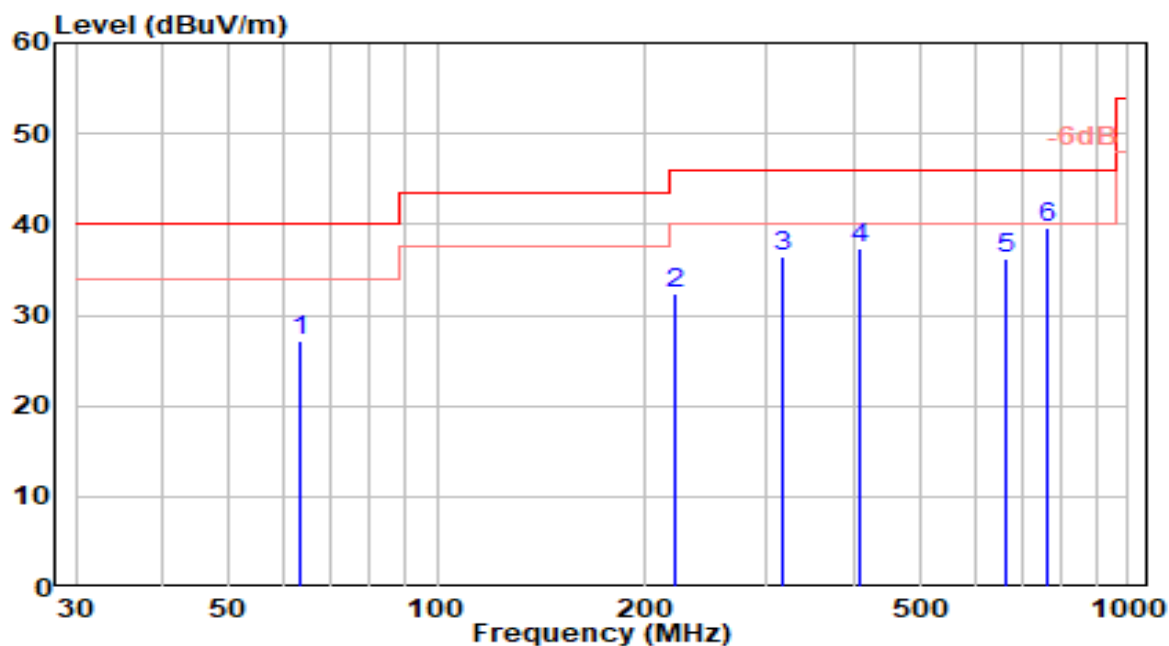


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	63.340	8.43	18.79	27.22	-12.78	40.00	100	323	QP
2	220.080	13.42	19.06	32.49	-13.51	46.00	150	325	QP
3	316.700	14.62	21.89	36.51	-9.49	46.00	100	15	QP
4	408.290	13.21	24.10	37.31	-8.69	46.00	200	14	QP
5	664.560	7.88	28.38	36.26	-9.74	46.00	100	15	QP
6	* 760.710	9.95	29.67	39.61	-6.39	46.00	100	15	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

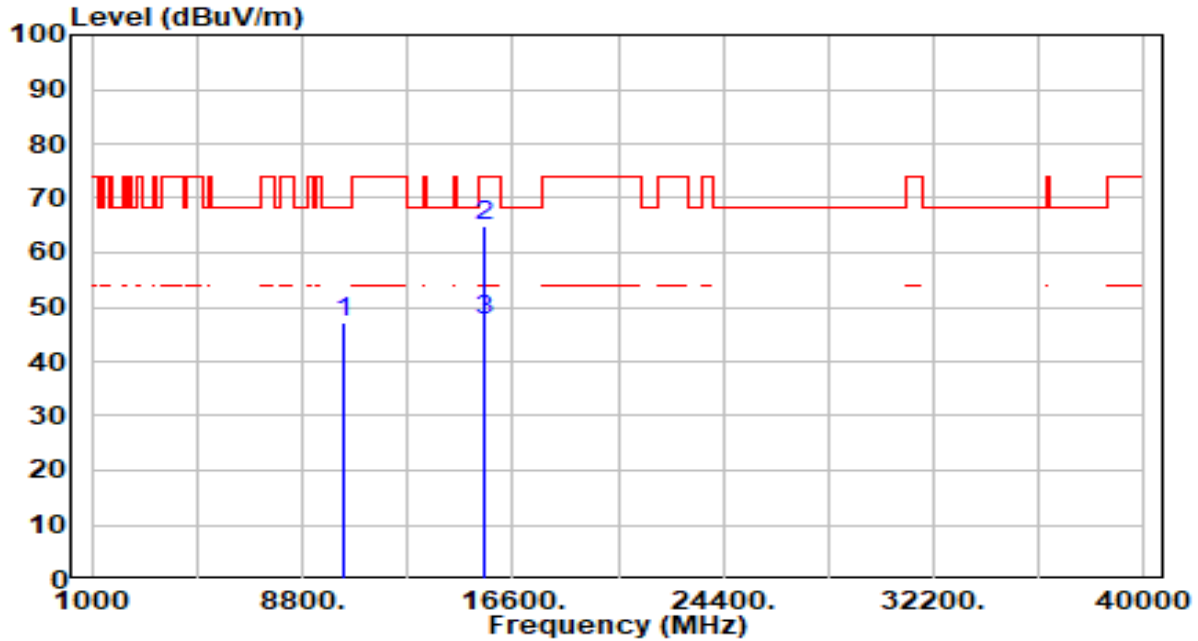


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10360.000	42.00	5.29	47.29	-20.91	68.20	300	272	Peak
2	* 15540.000	58.43	6.41	64.84	-9.16	74.00	213	325	Peak
3	* 15540.000	41.22	6.41	47.63	-6.37	54.00	213	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

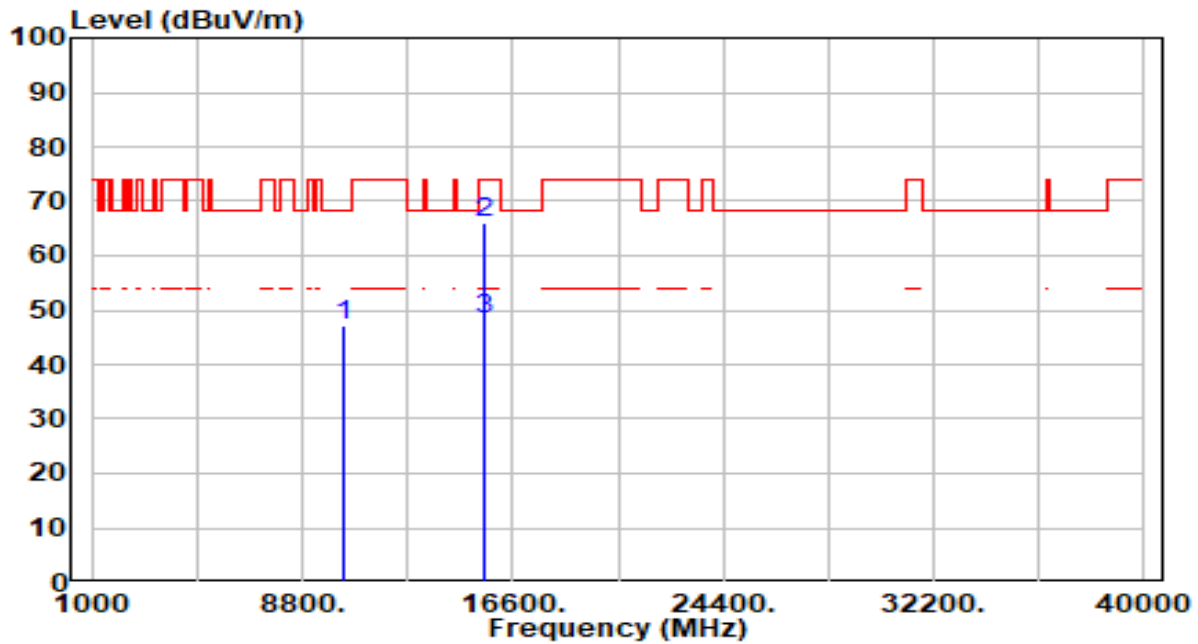


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10360.000	42.04	5.29	47.34	-20.86	68.20	300	214	Peak
2	* 15540.000	59.71	6.41	66.11	-7.89	74.00	100	358	Peak
3	* 15540.000	41.97	6.41	48.38	-5.62	54.00	100	358	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

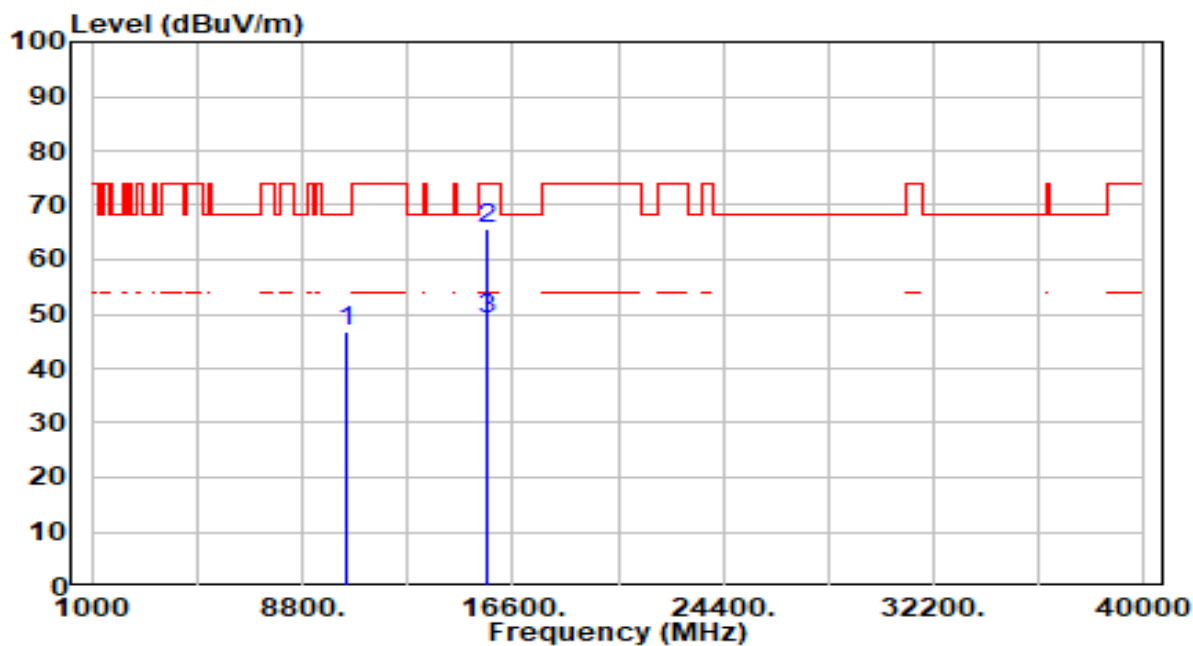


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10440.000	41.61	5.28	46.89	-21.31	68.20	200	214	Peak
2	* 15660.000	59.20	6.56	65.76	-8.24	74.00	223	321	Peak
3	* 15660.000	42.55	6.56	49.11	-4.89	54.00	223	321	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

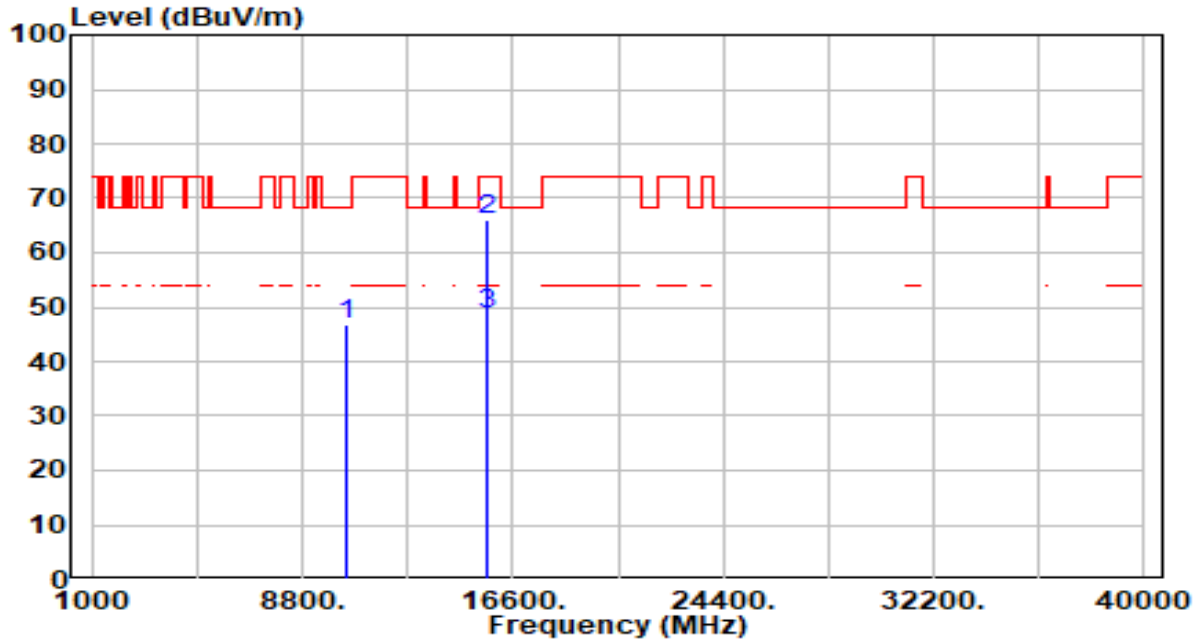


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10440.000	41.38	5.28	46.66	-21.54	68.20	164	360	Peak
2	* 15660.000	59.66	6.56	66.21	-7.79	74.00	102	345	Peak
3	* 15660.000	41.98	6.56	48.54	-5.46	54.00	102	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

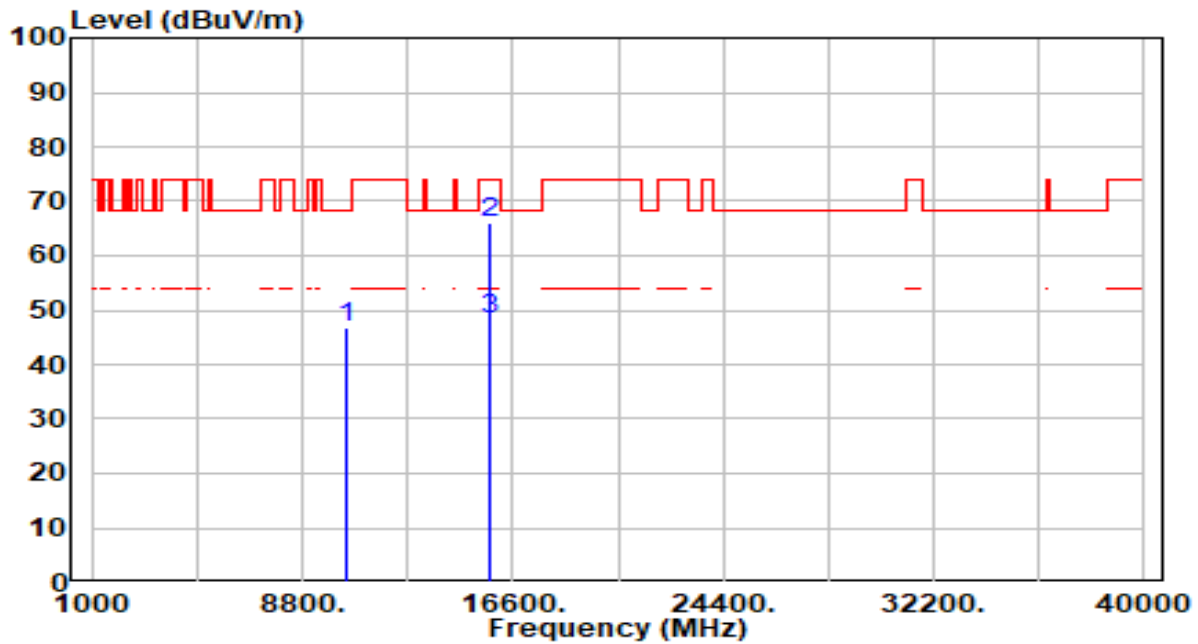


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10480.000	41.61	5.26	46.87	-21.33	68.20	200	302	Peak
2	* 15720.000	59.21	6.69	65.90	-8.10	74.00	223	321	Peak
3	* 15720.000	41.65	6.69	48.34	-5.66	54.00	223	321	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

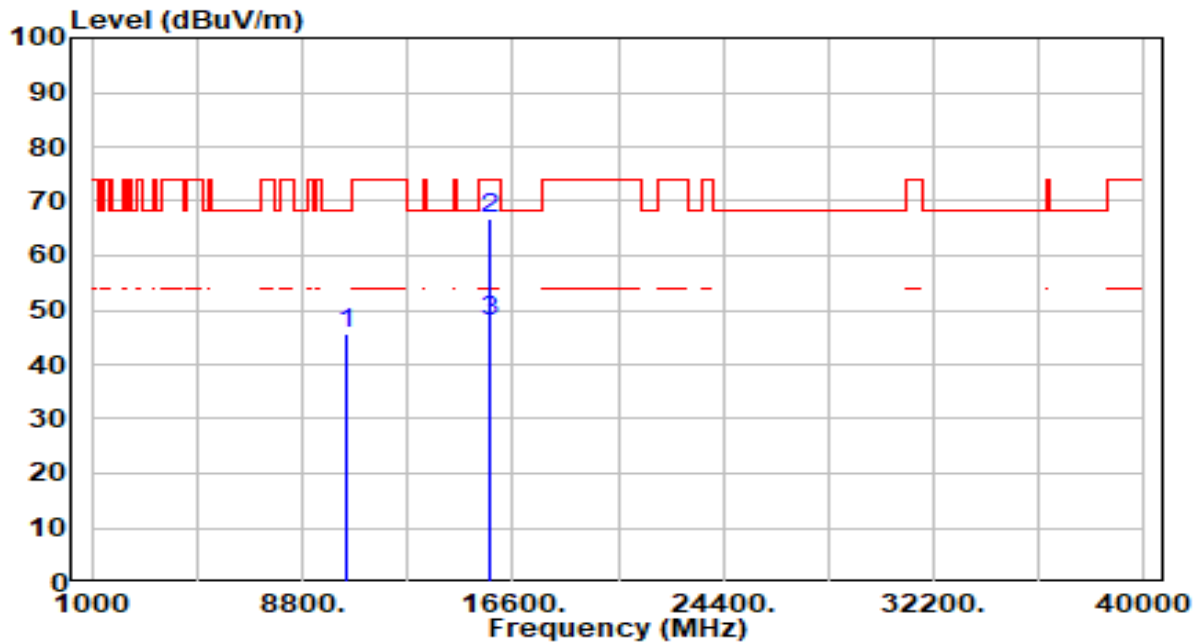


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10480.000	40.31	5.26	45.57	-22.63	68.20	100	248	Peak
2	* 15720.000	60.26	6.69	66.95	-7.05	74.00	100	348	Peak
3	* 15720.000	41.22	6.69	47.91	-6.09	54.00	100	348	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

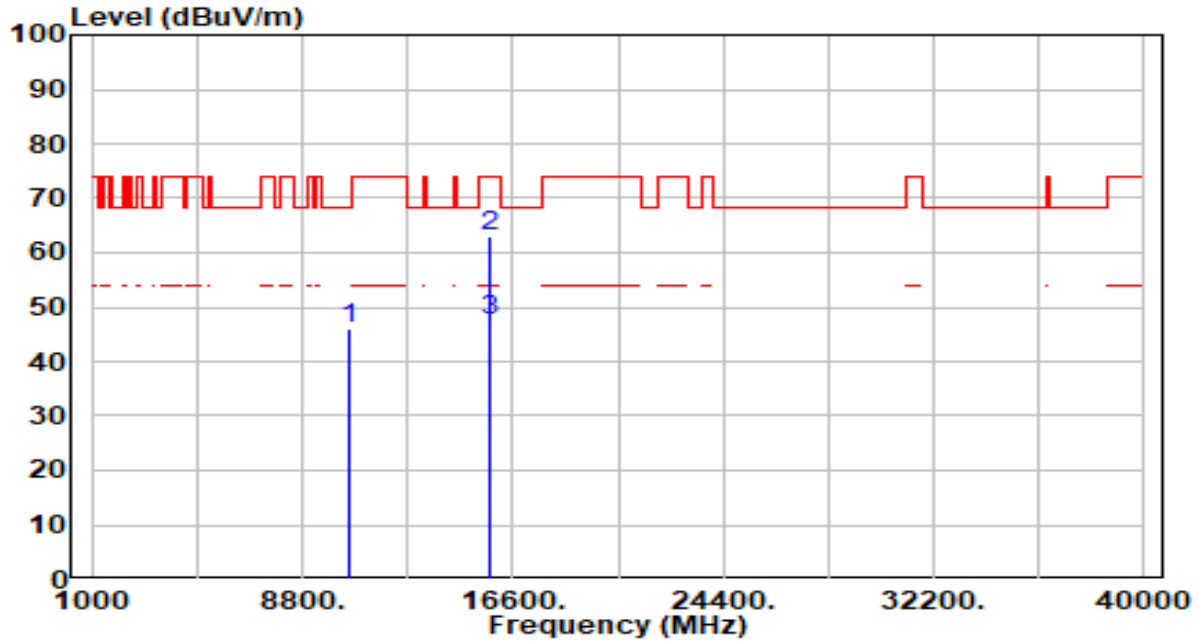


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10520.000	40.94	5.25	46.19	-22.01	68.20	200	318	Peak
2	* 15780.000	56.18	6.83	63.01	-10.99	74.00	223	321	Peak
3	* 15780.000	40.54	6.83	47.37	-6.63	54.00	223	321	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

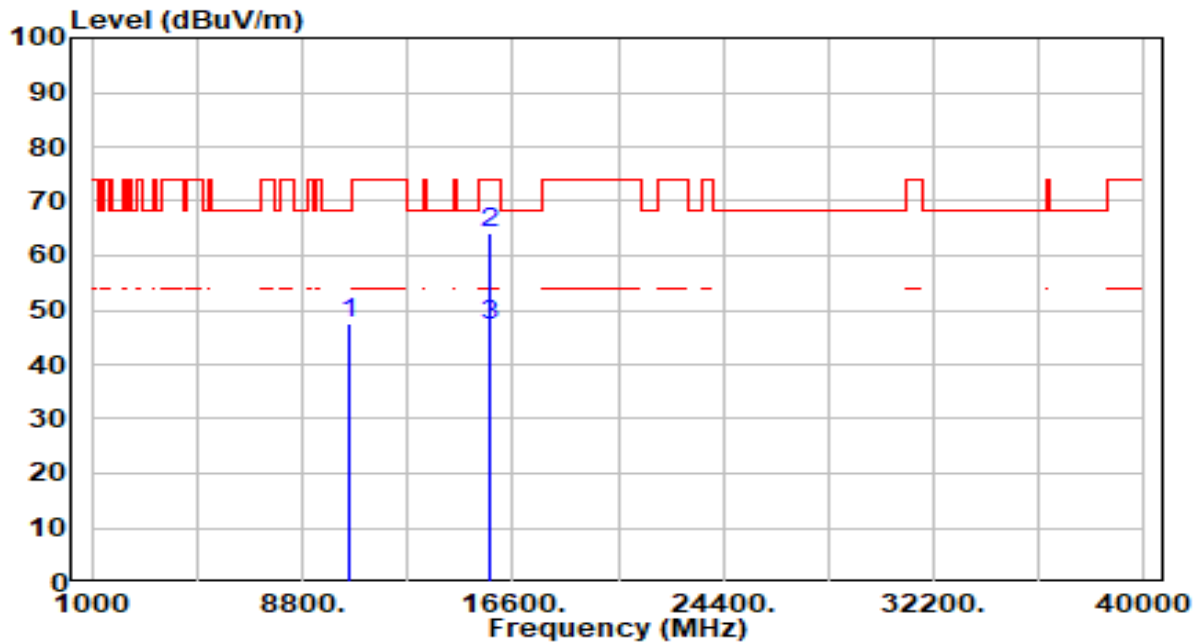


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10520.000	42.13	5.25	47.38	-20.82	68.20	223	321	Peak
2	* 15780.000	57.42	6.83	64.25	-9.75	74.00	100	348	Peak
3	* 15780.000	40.27	6.83	47.10	-6.90	54.00	100	348	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

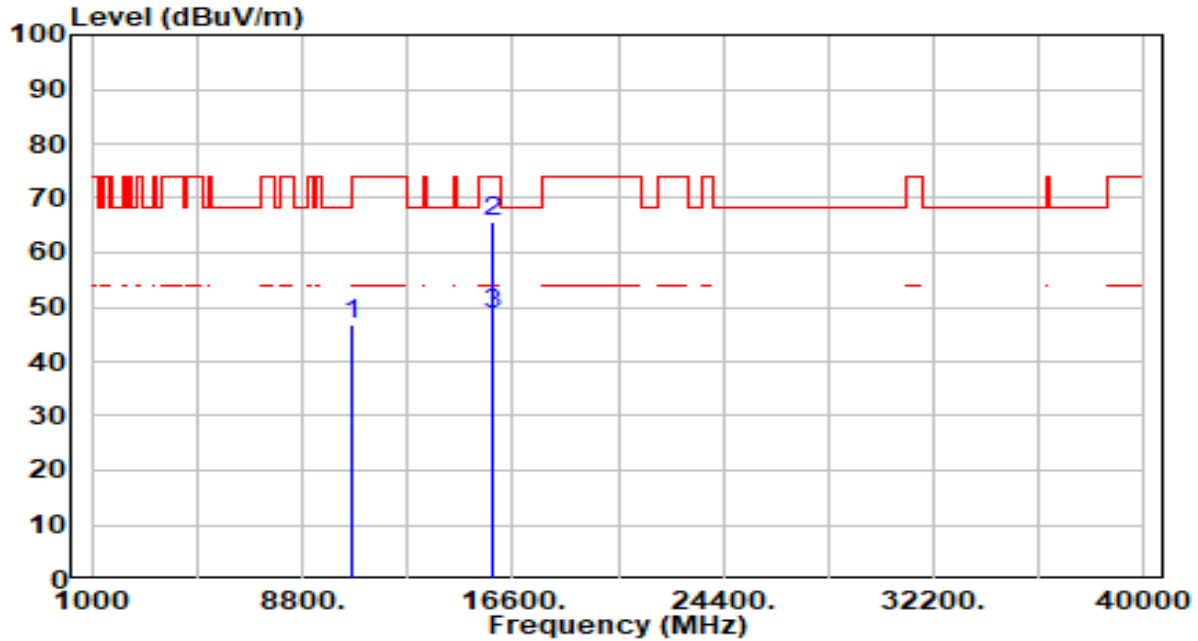


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10600.000	41.36	5.25	46.62	-21.58	68.20	200	227	Peak
2	* 15900.000	58.57	6.95	65.52	-8.48	74.00	223	328	Peak
3	* 15900.000	41.61	6.95	48.56	-5.44	54.00	223	328	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

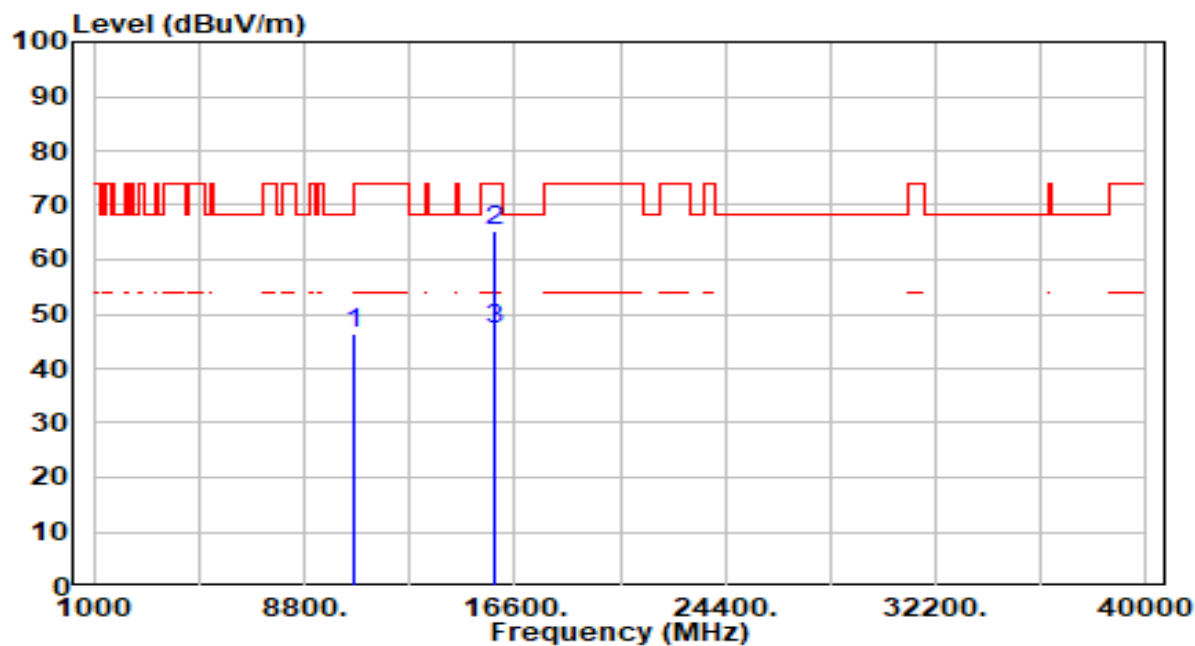


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10600.000	41.15	5.25	46.40	-21.80	68.20	100	360	Peak
2	* 15900.000	58.43	6.95	65.38	-8.62	74.00	100	348	Peak
3	* 15900.000	40.12	6.95	47.07	-6.93	54.00	100	348	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

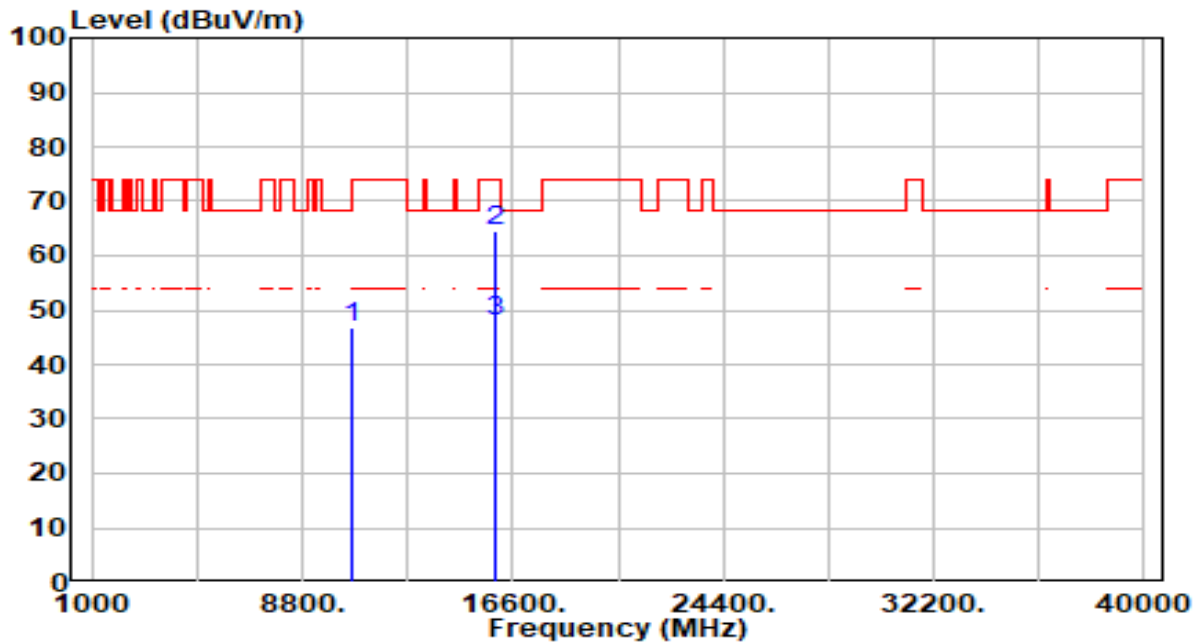


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.44	5.27	46.71	-27.29	74.00	200	282	Peak
2	* 15960.000	57.41	7.00	64.41	-9.59	74.00	223	321	Peak
3	* 15960.000	41.04	7.00	48.04	-5.96	54.00	223	321	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

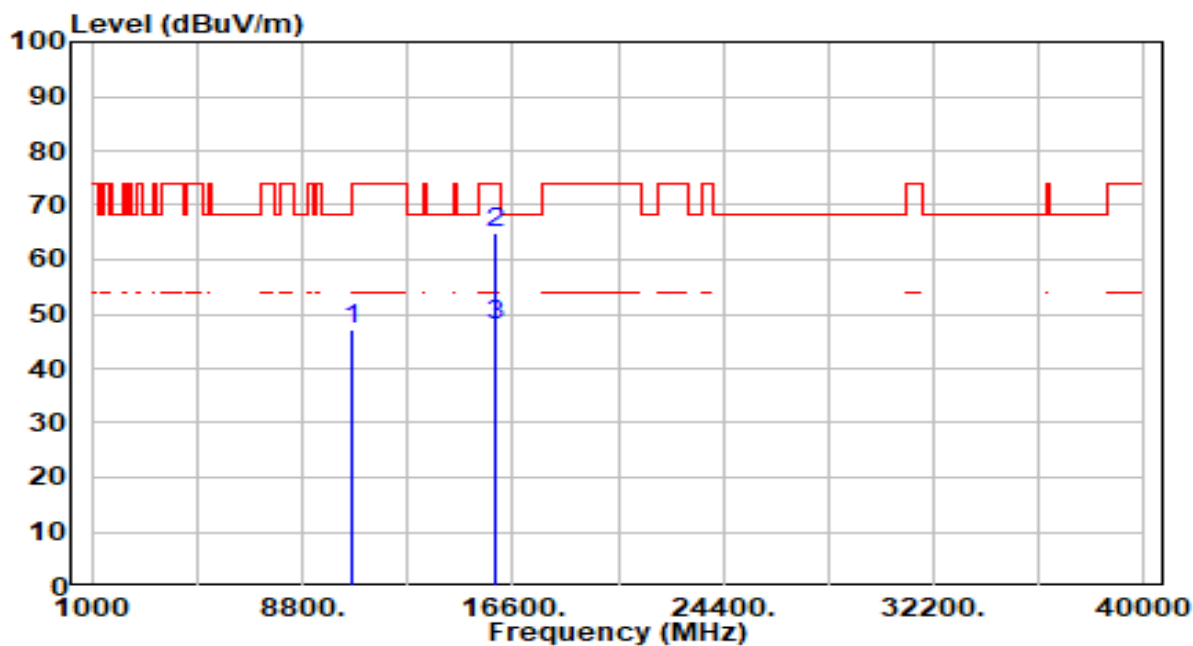


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.82	5.27	47.09	-26.91	74.00	100	152	Peak
2	* 15960.000	57.89	7.00	64.89	-9.11	74.00	100	346	Peak
3	* 15960.000	40.75	7.00	47.75	-6.25	54.00	100	346	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

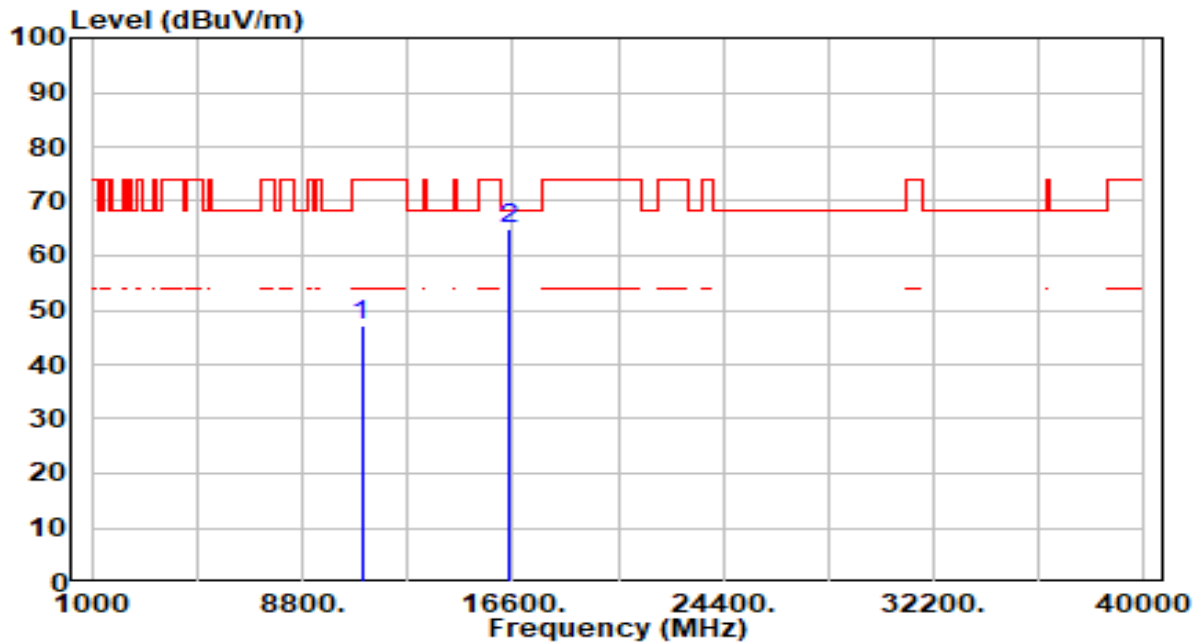


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.61	5.56	47.17	-26.83	74.00	200	24	Peak
2	* 16500.000	57.74	7.34	65.09	-3.11	68.20	200	324	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

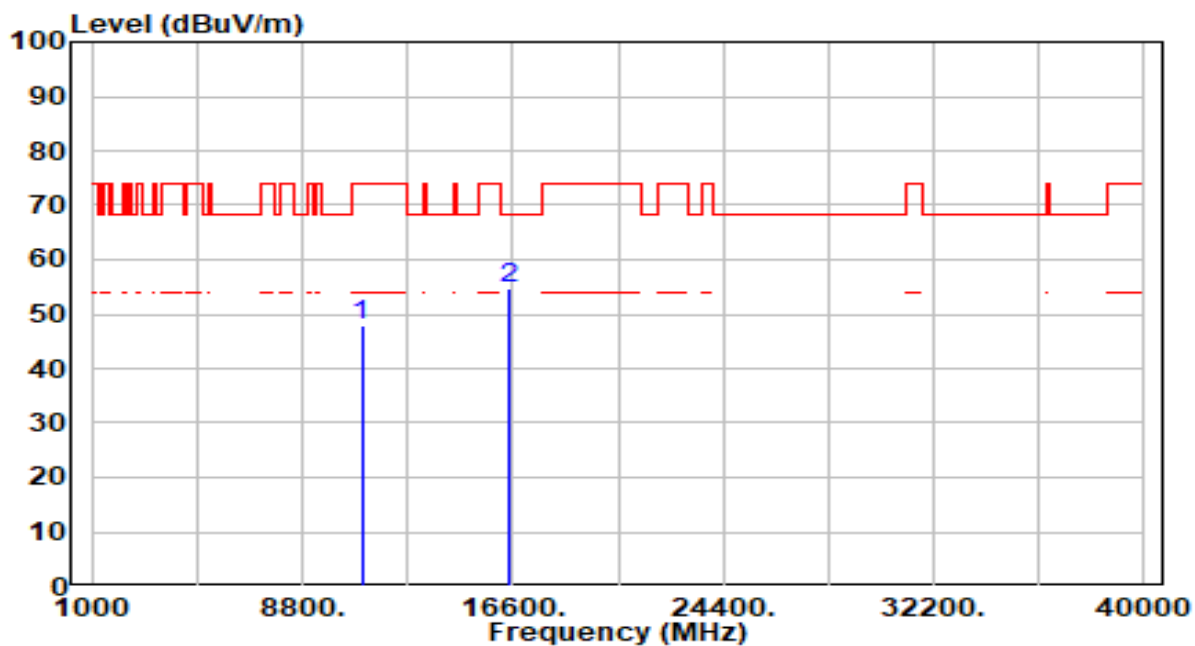


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.47	5.56	48.03	-25.97	74.00	130	360	Peak
2	* 16500.000	47.54	7.34	54.89	-13.31	68.20	200	335	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

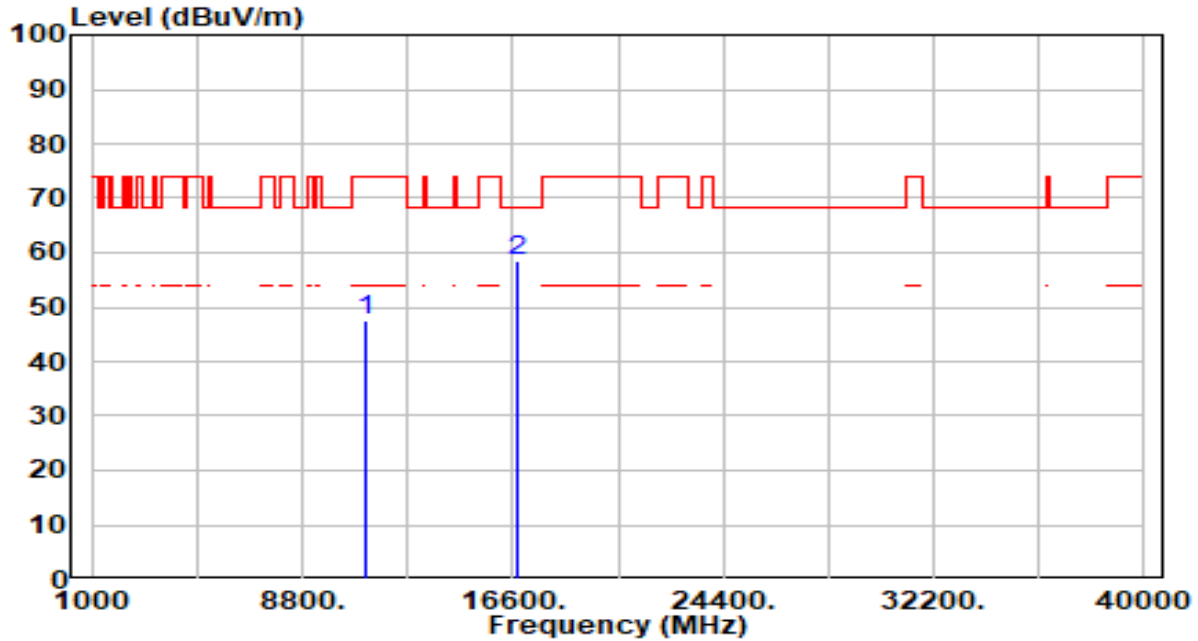


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	41.80	5.73	47.53	-26.47	74.00	200	315	Peak
2	* 16740.000	50.68	7.72	58.40	-9.80	68.20	200	324	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

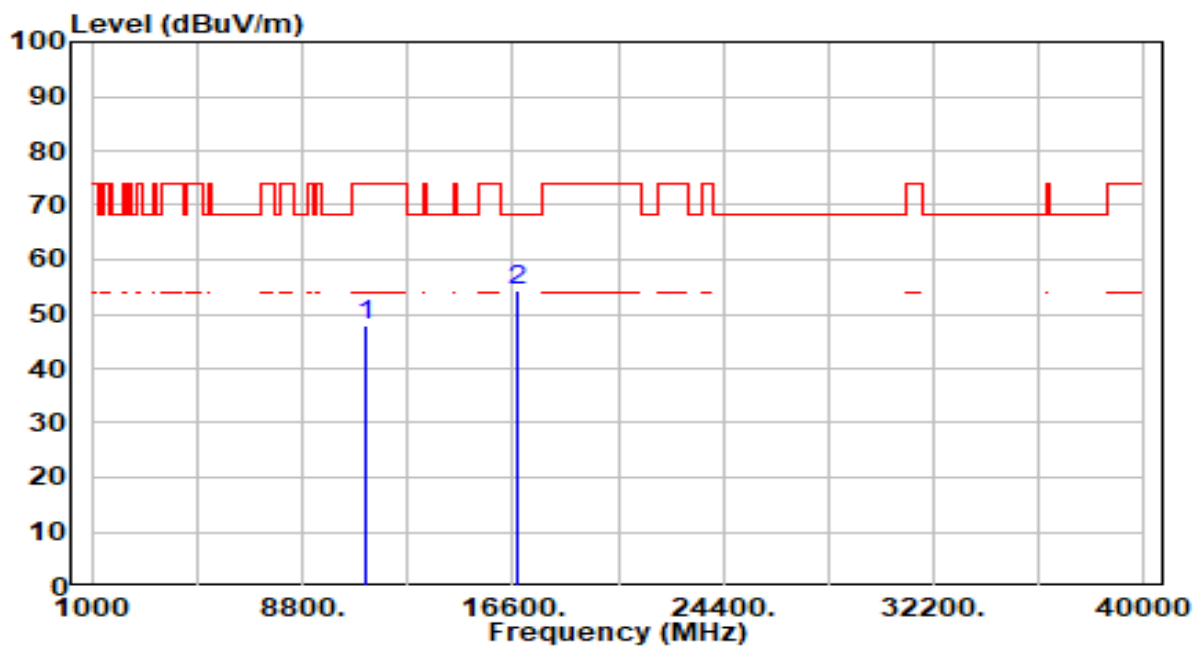


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.27	5.73	48.00	-26.00	74.00	238	203	Peak
2	* 16740.000	46.57	7.72	54.28	-13.92	68.20	276	333	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

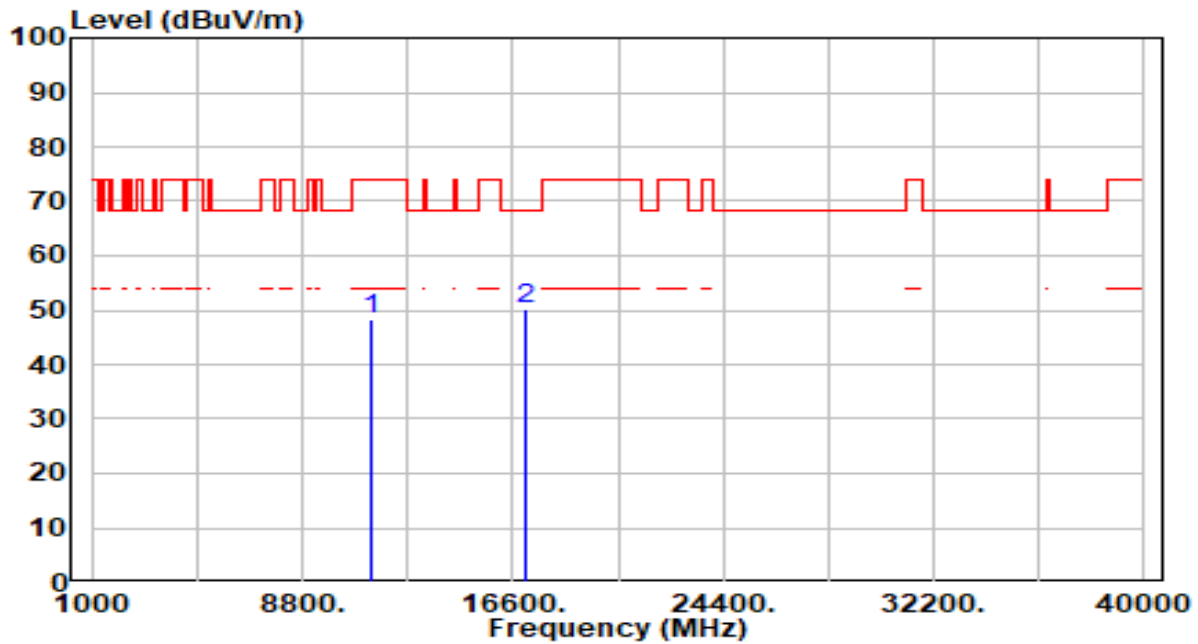


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.32	5.98	48.30	-25.70	74.00	200	360	Peak
2	* 17100.000	44.18	6.16	50.34	-17.86	68.20	200	321	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

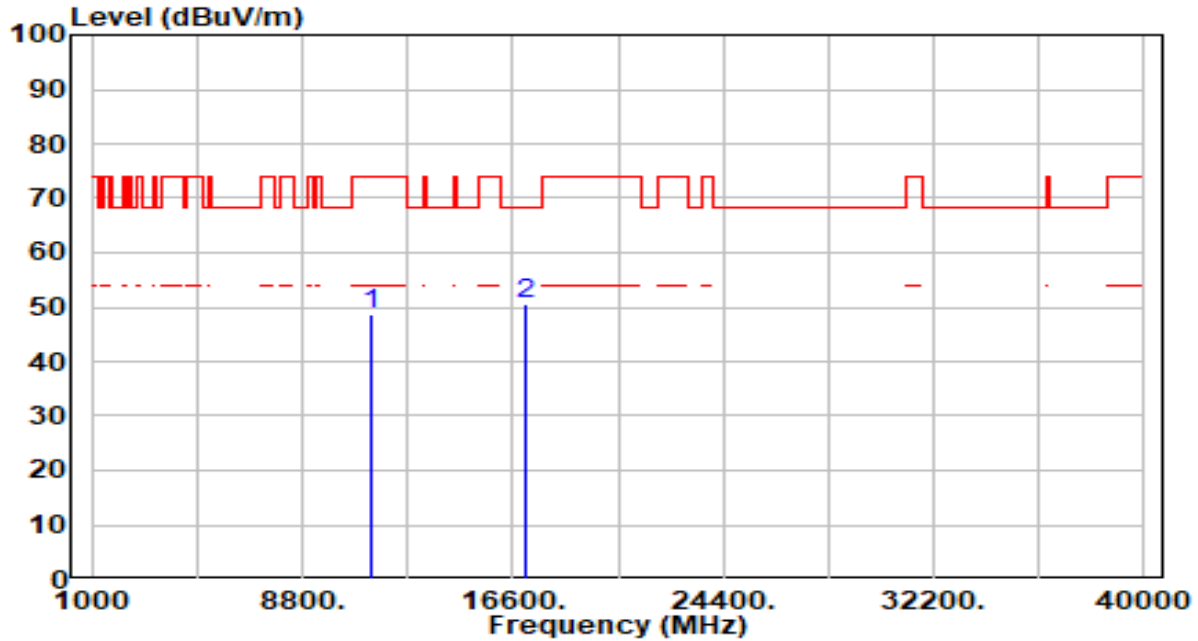


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.72	5.98	48.71	-25.29	74.00	200	0	Peak
2	* 17100.000	44.25	6.16	50.41	-17.79	68.20	100	331	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

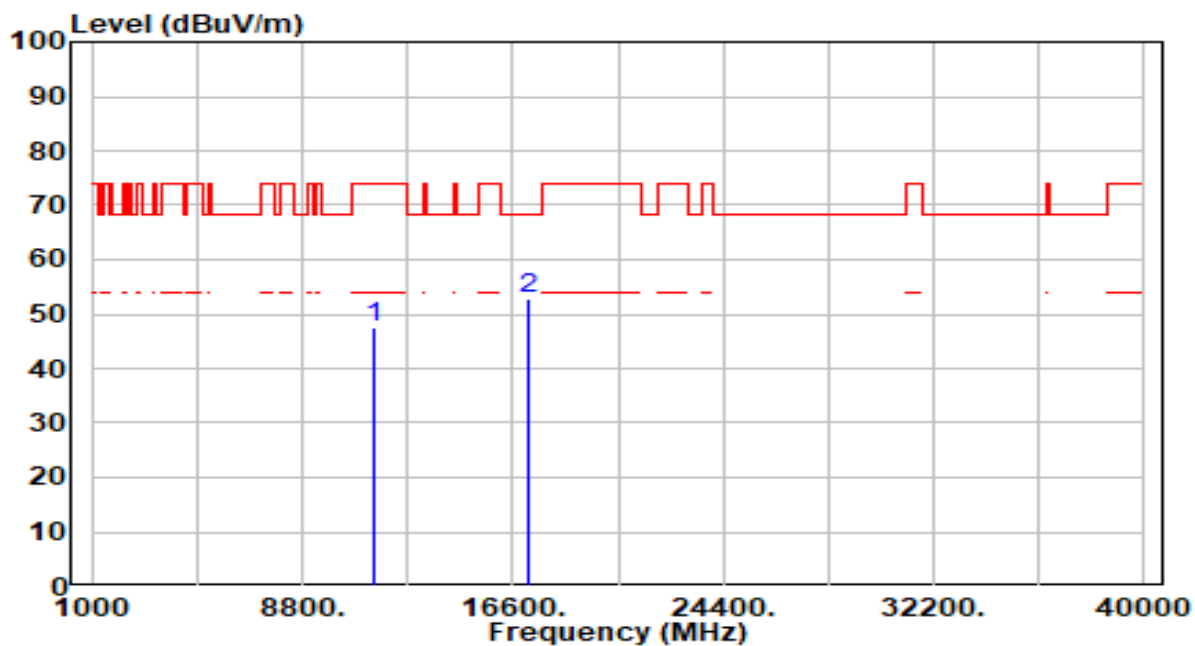


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.51	5.97	47.48	-26.52	74.00	200	211	Peak
2	* 17160.000	46.67	5.98	52.65	-15.55	68.20	200	287	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

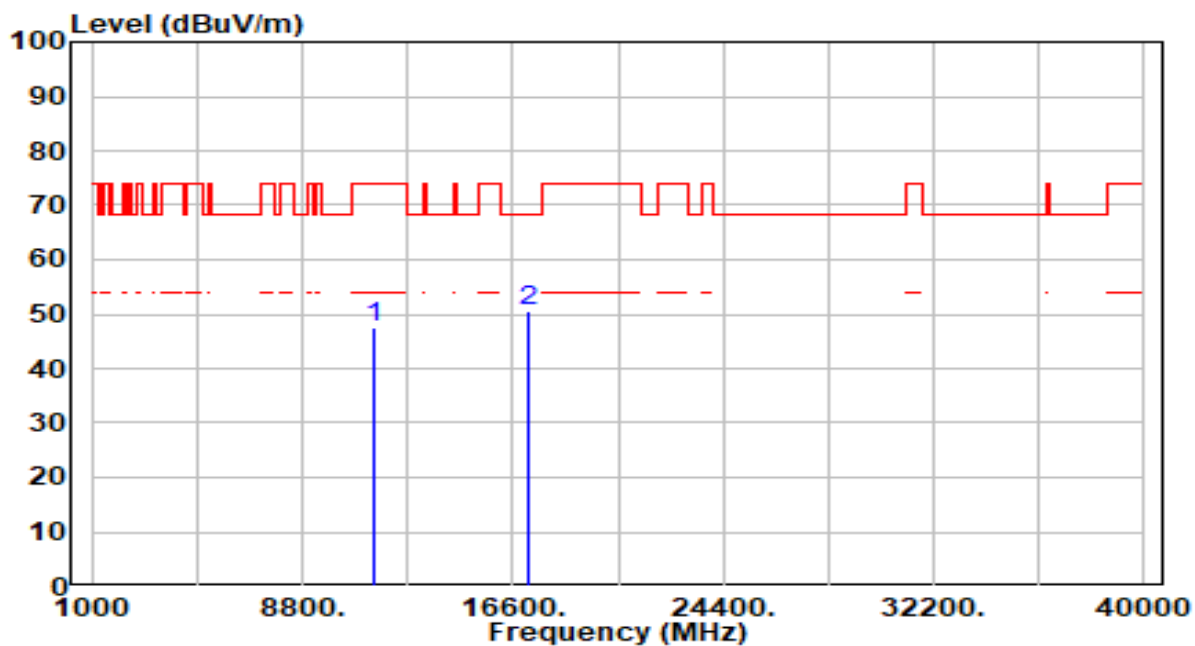


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.46	5.97	47.42	-26.58	74.00	200	149	Peak
2	* 17160.000	44.50	5.98	50.48	-17.72	68.20	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

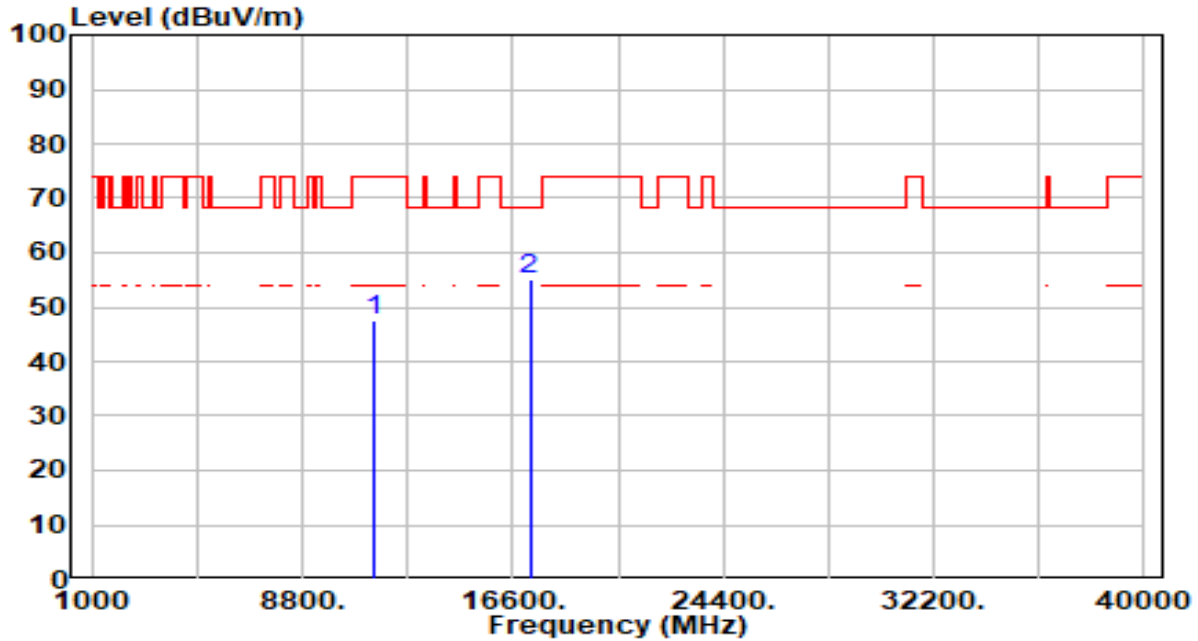


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	41.60	5.94	47.55	-26.45	74.00	200	25	Peak
2	* 17235.000	49.44	5.78	55.22	-12.98	68.20	200	328	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

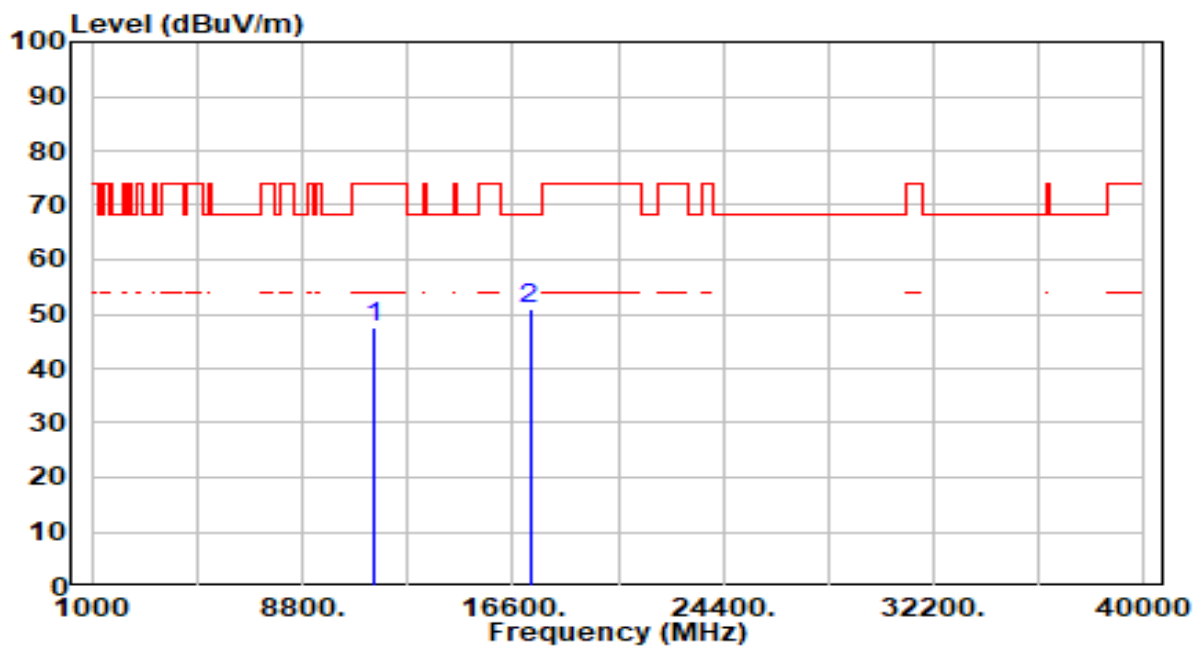


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	41.48	5.94	47.43	-26.57	74.00	100	250	Peak
2	* 17235.000	45.08	5.78	50.86	-17.34	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

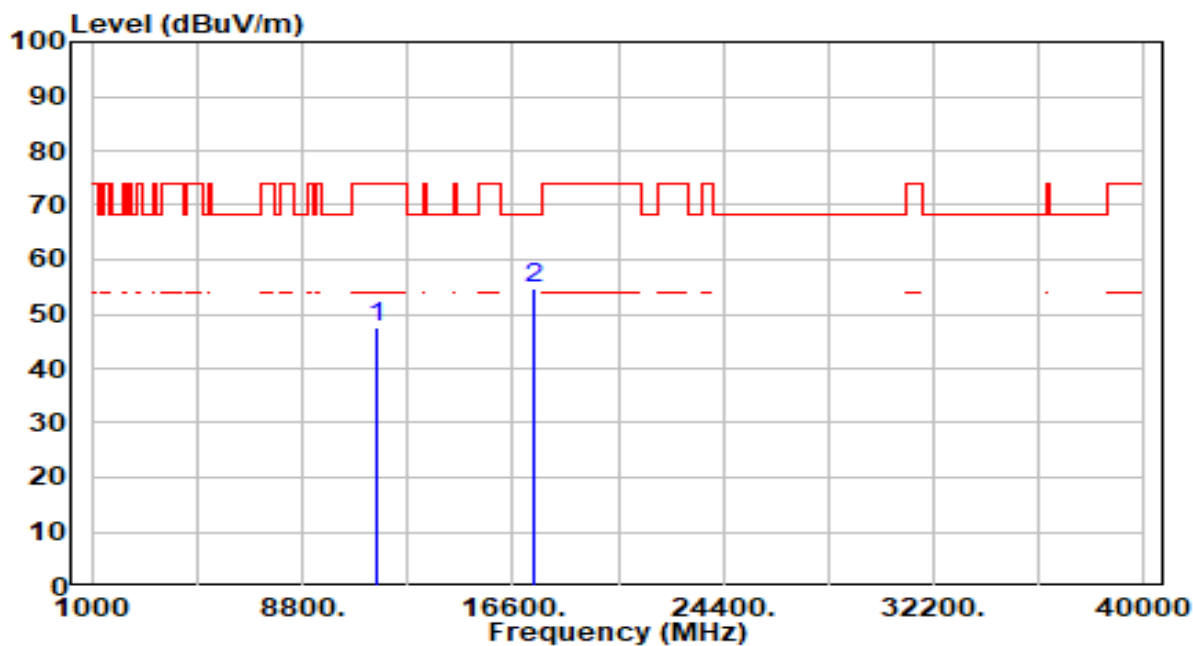


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	41.69	5.91	47.60	-26.40	74.00	200	0	Peak
2	* 17355.000	49.27	5.54	54.81	-13.39	68.20	200	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

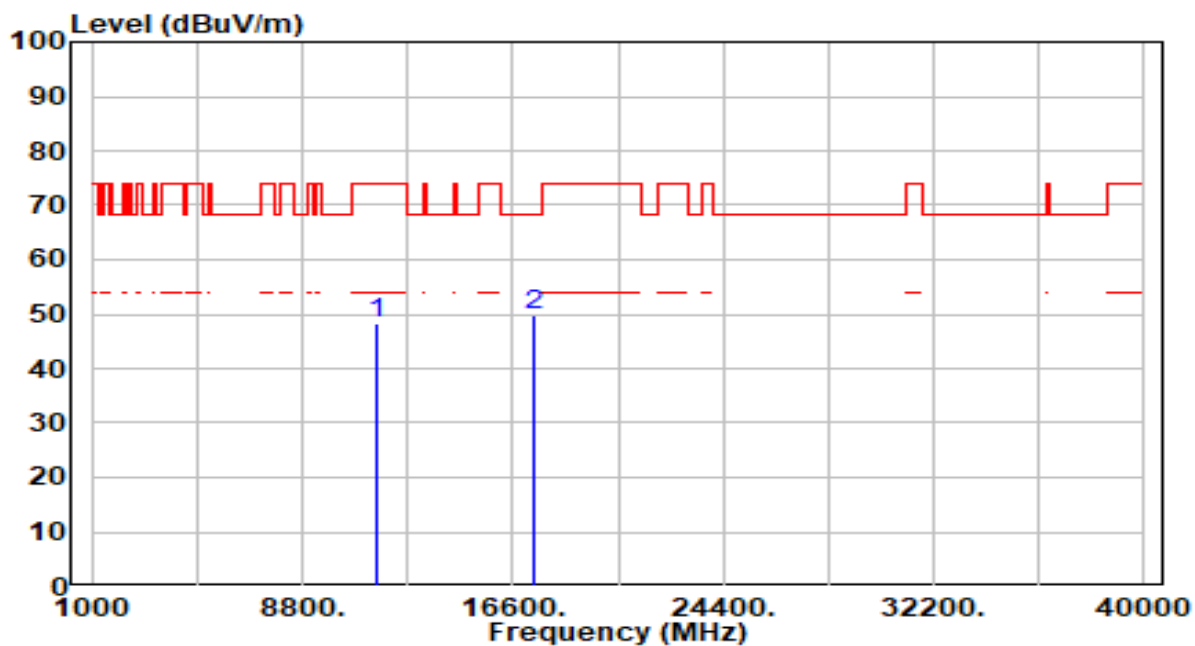


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	42.32	5.91	48.24	-25.76	74.00	200	351	Peak
2	* 17355.000	44.44	5.54	49.97	-18.23	68.20	200	351	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

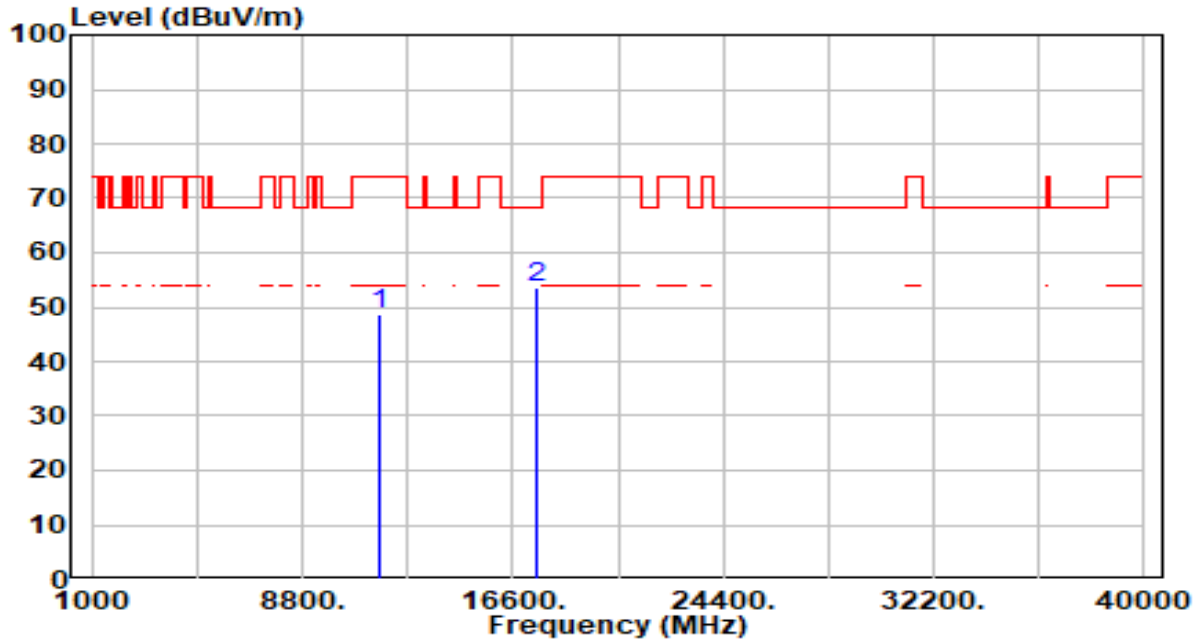


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	42.71	5.86	48.56	-25.44	74.00	200	353	Peak
2	* 17475.000	48.01	5.44	53.45	-14.75	68.20	200	282	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

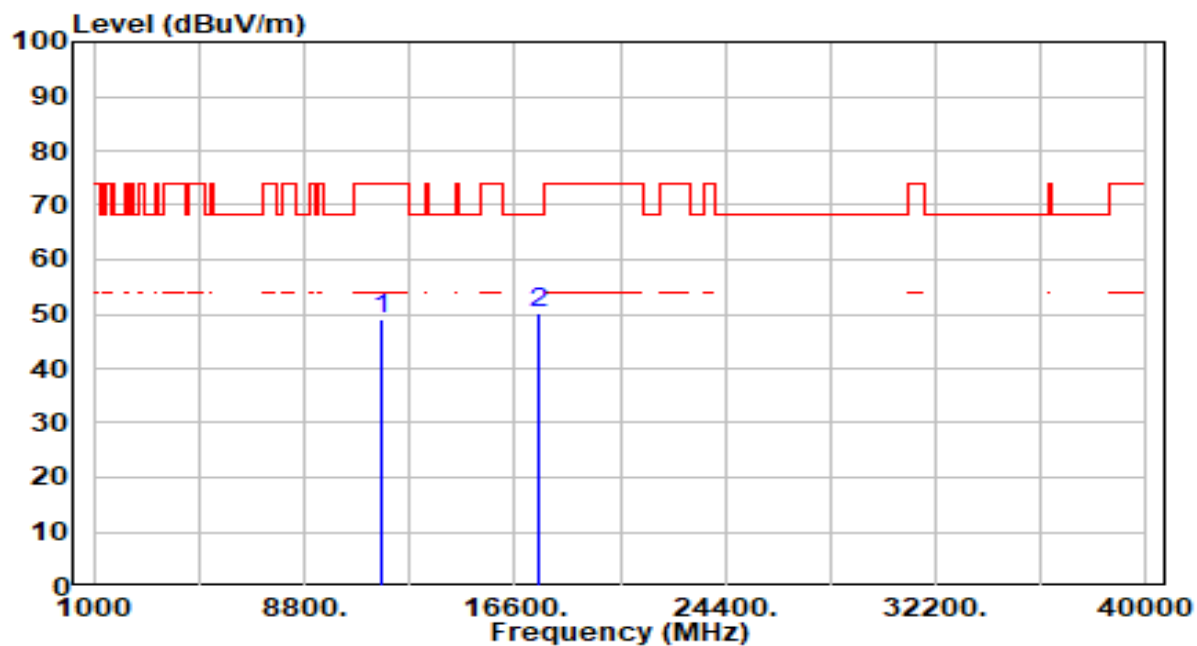


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	43.19	5.86	49.04	-24.96	74.00	100	45	Peak
2	* 17475.000	44.62	5.44	50.05	-18.15	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-12
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

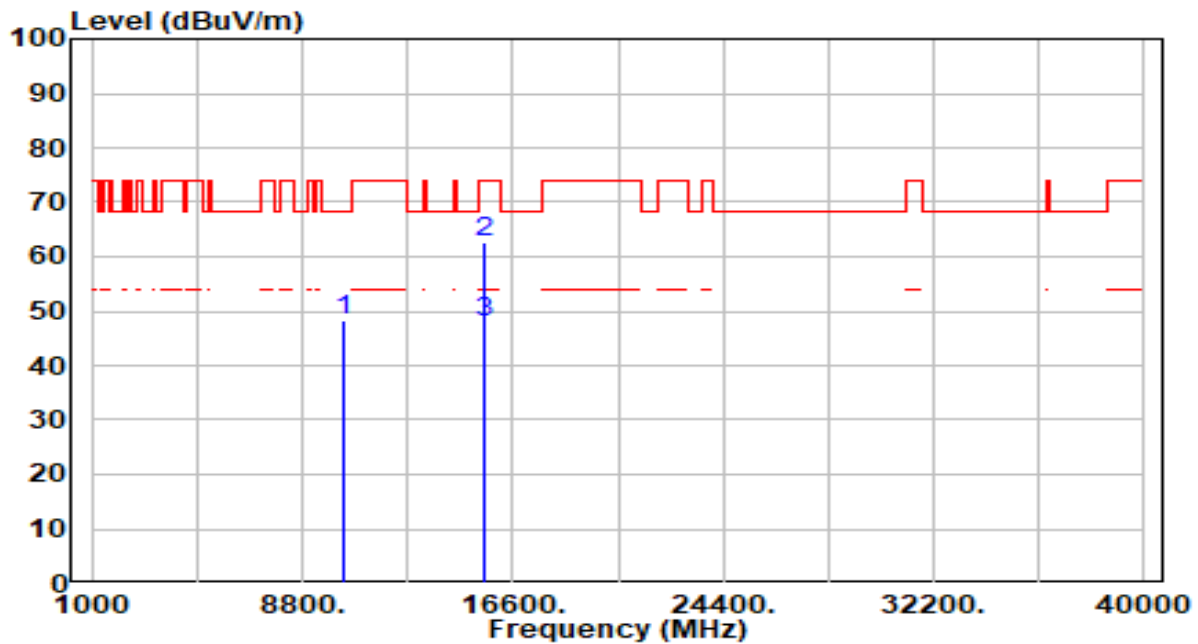

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10360.000	42.84	5.29	48.14	-20.06	68.20	200	360	Peak
2	* 15540.000	56.28	6.41	62.69	-11.31	74.00	223	352	Peak
3	* 15540.000	41.45	6.41	47.86	-6.14	54.00	223	352	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.