



Result – Ant 0


802.11a - Channel 48 (5240MHz)

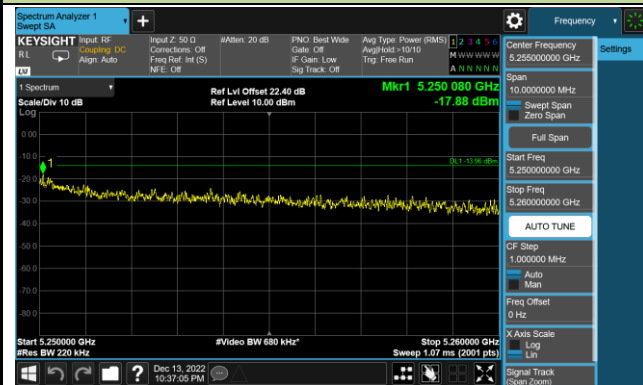


802.11ac20 - Channel 48 (5240MHz)

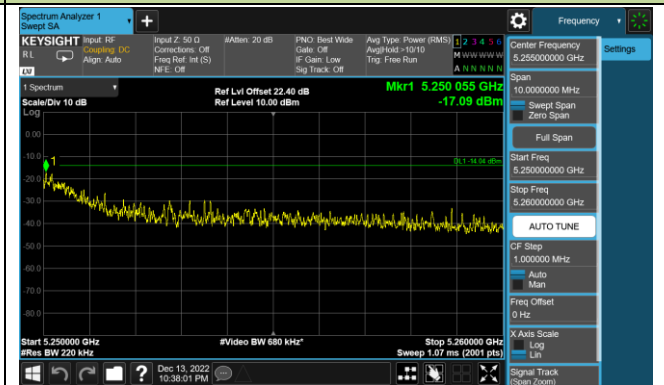

802.11ac40 - Channel 46 (5230MHz)

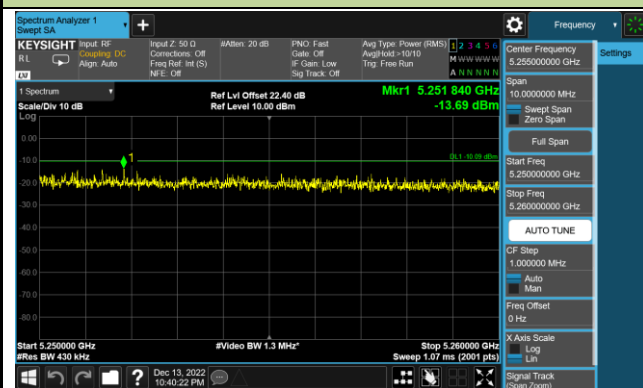


802.11ac80 - Channel 42 (5210MHz)

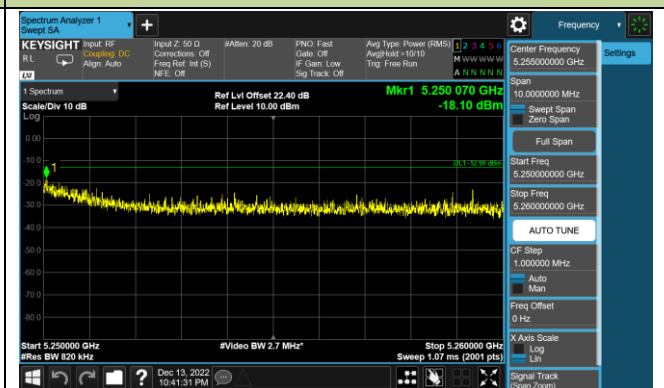


802.11ax20 - Channel 48 (5240MHz)



802.11ax40 - Channel 46 (5230MHz)

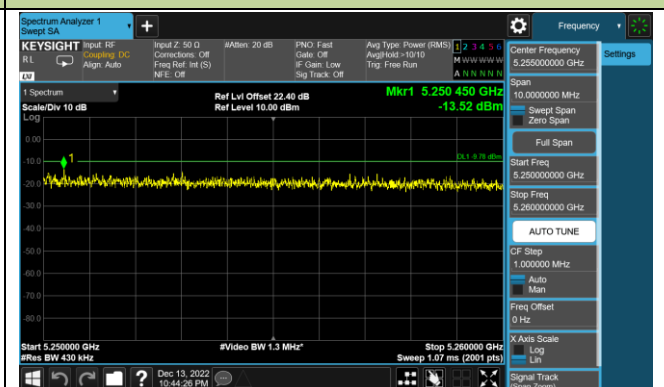


802.11ax80 - Channel 42 (5210MHz)

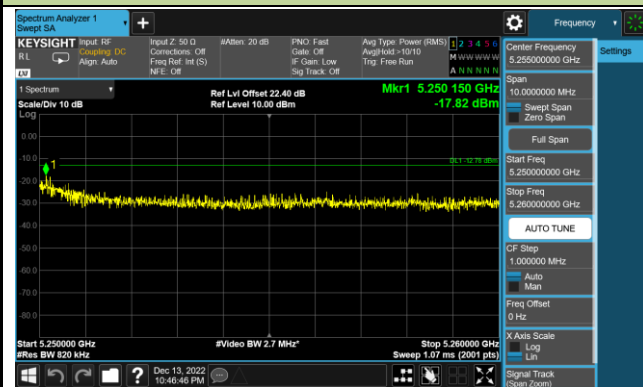


Result – Ant 1


802.11a - Channel 48 (5240MHz)

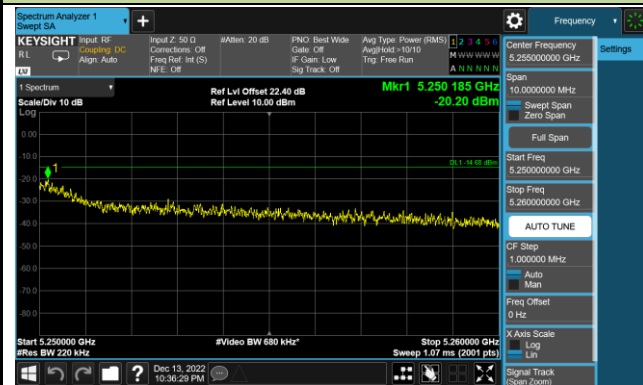


802.11ac20 - Channel 48 (5240MHz)

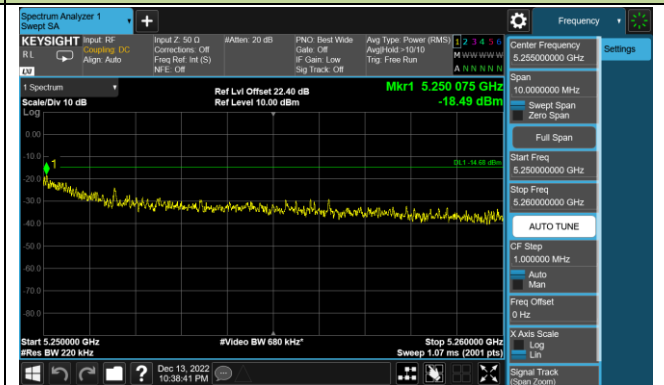

802.11ac40 - Channel 46 (5230MHz)

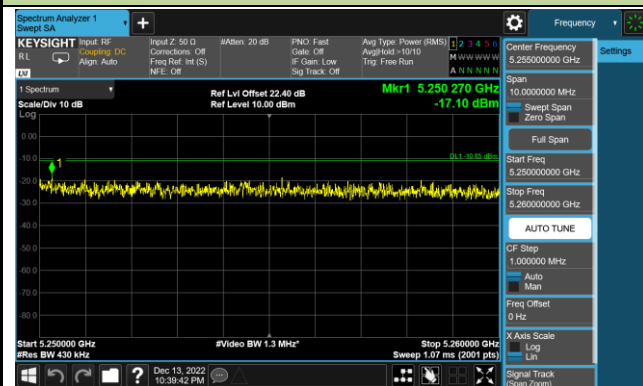


802.11ac80 - Channel 42 (5210MHz)

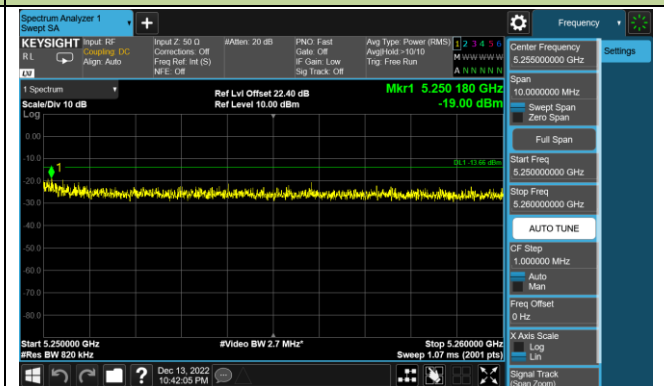


802.11ax20 - Channel 48 (5240MHz)



802.11ax40 - Channel 46 (5230MHz)

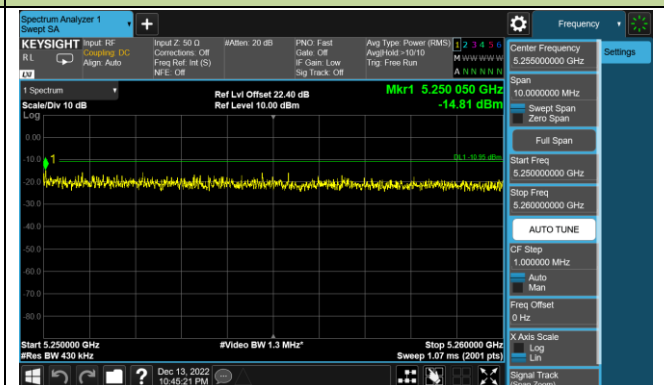

802.11ax80 - Channel 42 (5210MHz)

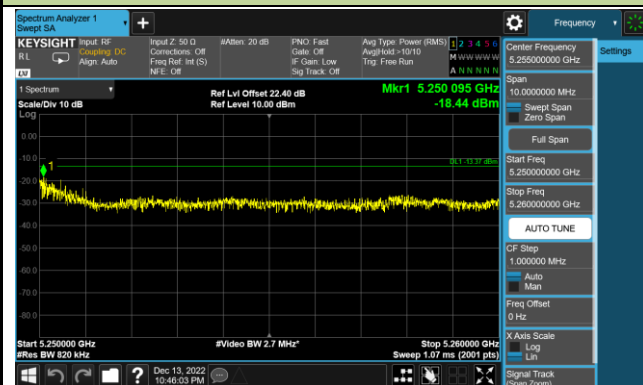

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For FCC transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For IC transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC-Radiated emission limits; general requirements.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.8.2. Test Result

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

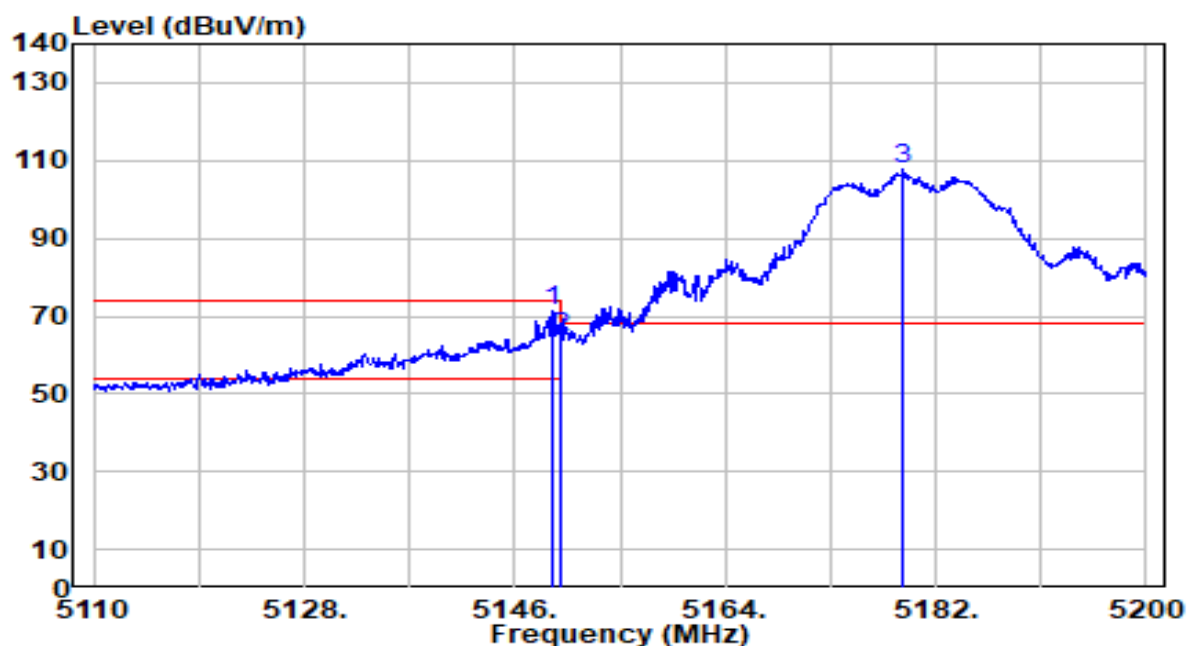


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.240	70.46	0.80	71.26	-2.74	74.00	223	322	Peak
2	5150.000	63.87	0.80	64.66	-9.34	74.00	223	322	Peak
3	5179.210	106.74	0.83	107.57	N/A	N/A	223	322	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

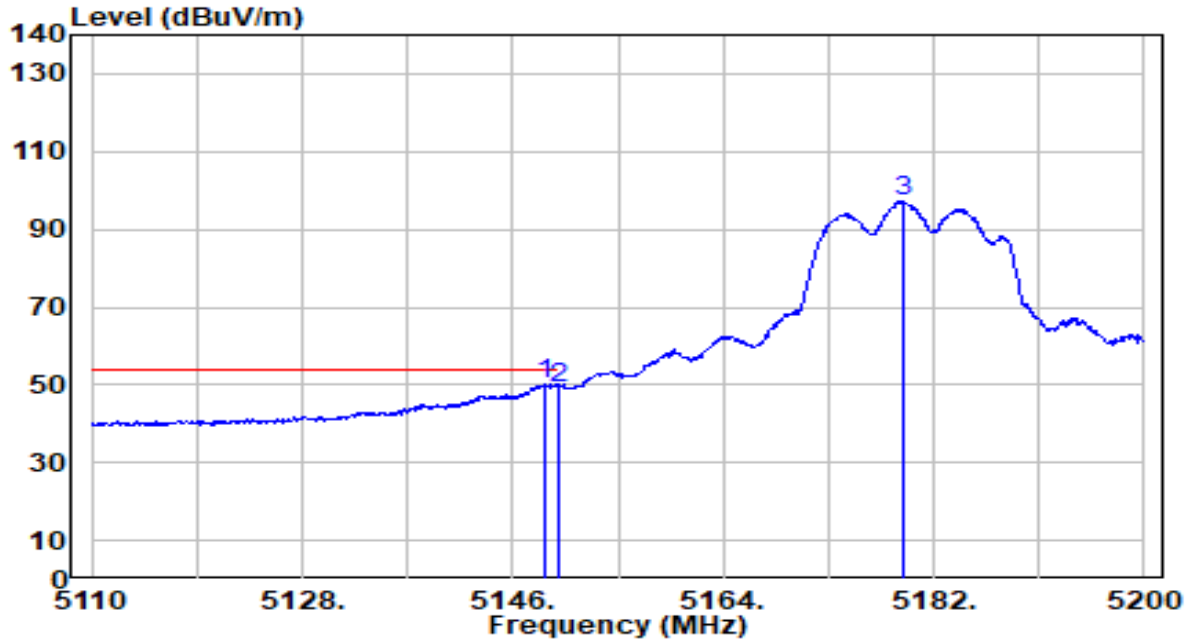


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	49.31	0.79	50.11	-3.89	54.00	223	322	Average
2		5150.000	48.58	0.80	49.37	-4.63	54.00	223	322	Average
3		5179.300	96.32	0.83	97.15	N/A	N/A	223	322	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

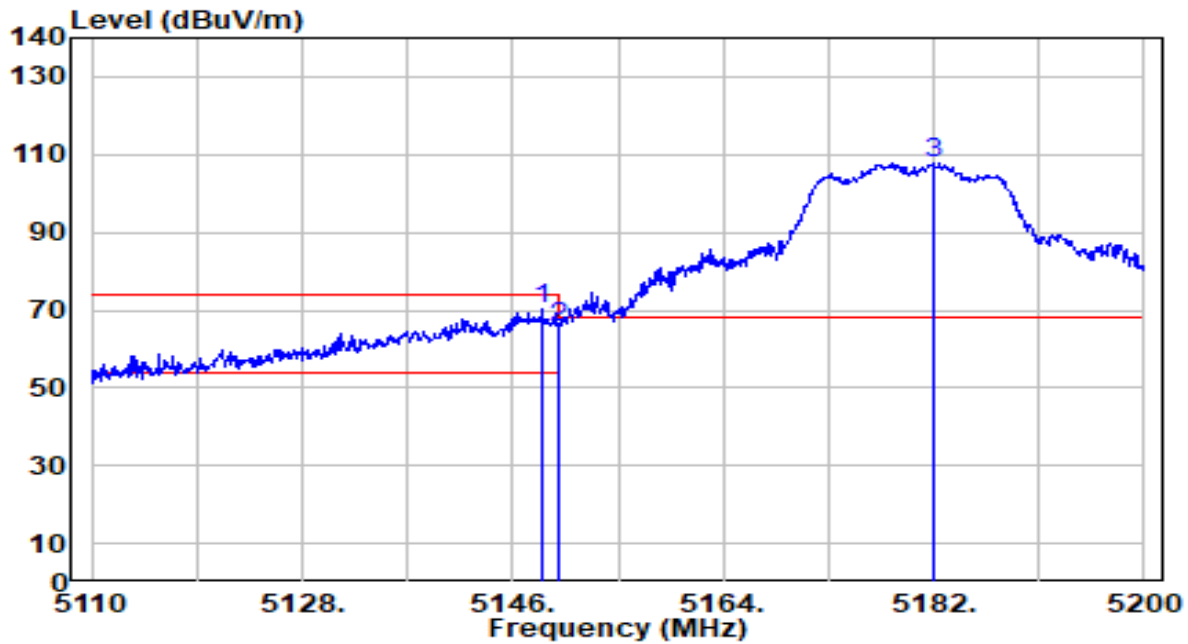


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.520	69.21	0.79	70.01	-3.99	74.00	100	21	Peak
2	5150.000	64.66	0.80	65.46	-8.54	74.00	100	21	Peak
3	5181.910	107.11	0.84	107.95	N/A	N/A	100	21	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

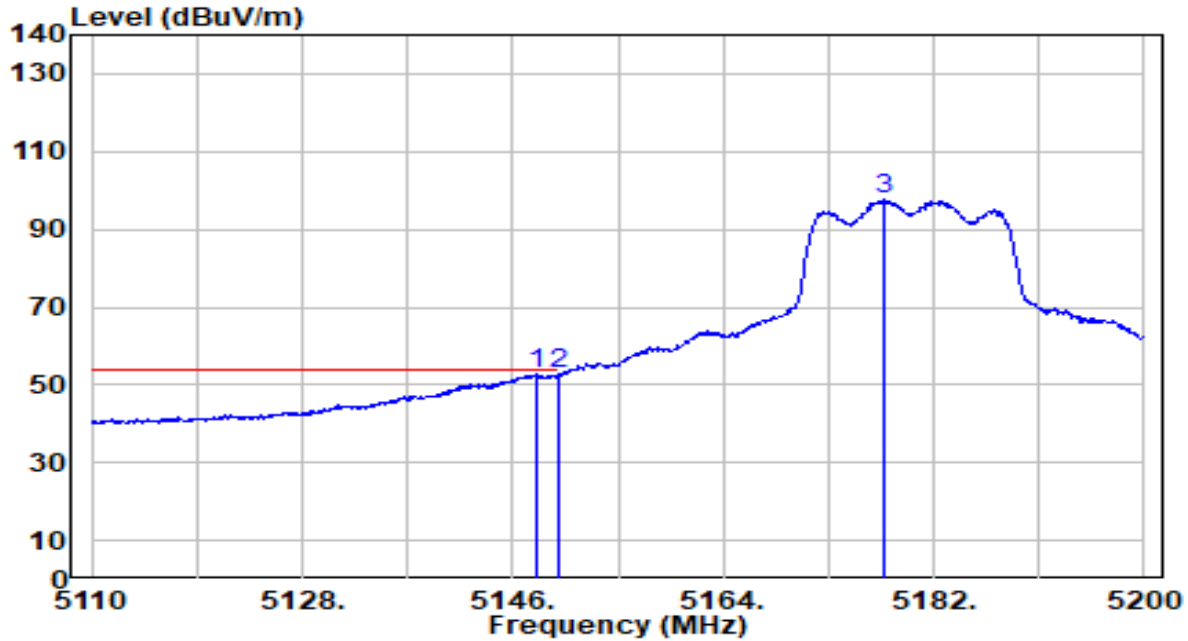


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.160	51.99	0.79	52.78	-1.22	54.00	100	21	Average
2		5150.000	51.85	0.80	52.64	-1.36	54.00	100	21	Average
3		5177.770	96.73	0.83	97.56	N/A	N/A	100	21	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

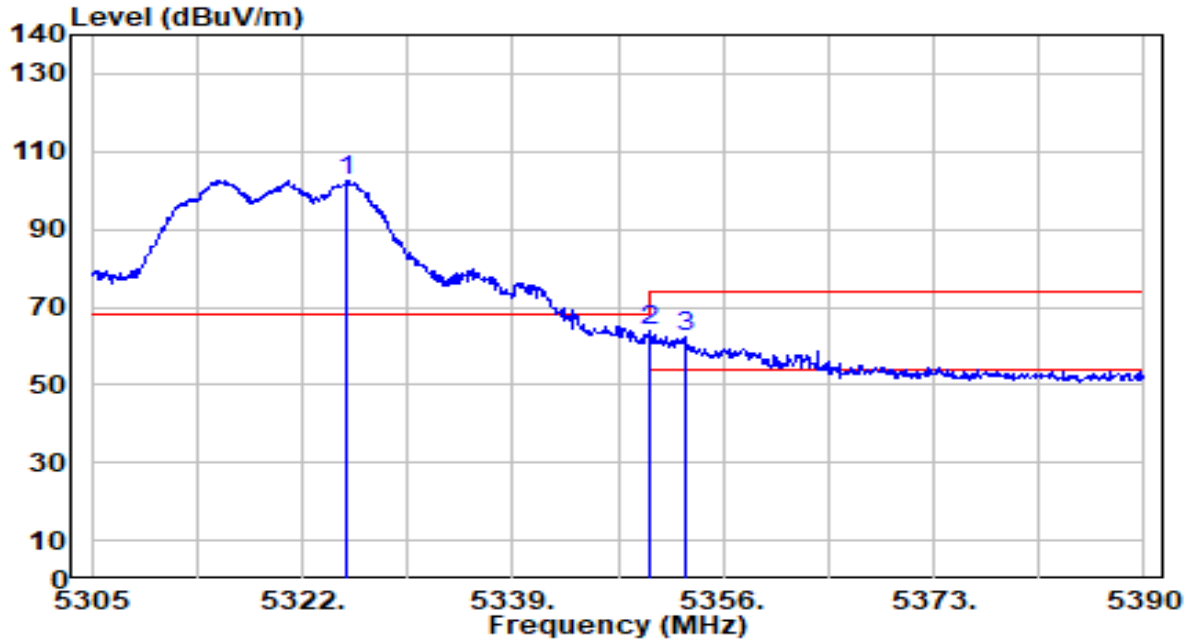


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.570	101.84	0.64	102.48	N/A	N/A	250	319	Peak
2	* 5350.000	63.40	0.59	63.99	-10.01	74.00	250	319	Peak
3	5352.855	61.70	0.59	62.29	-11.71	74.00	250	319	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

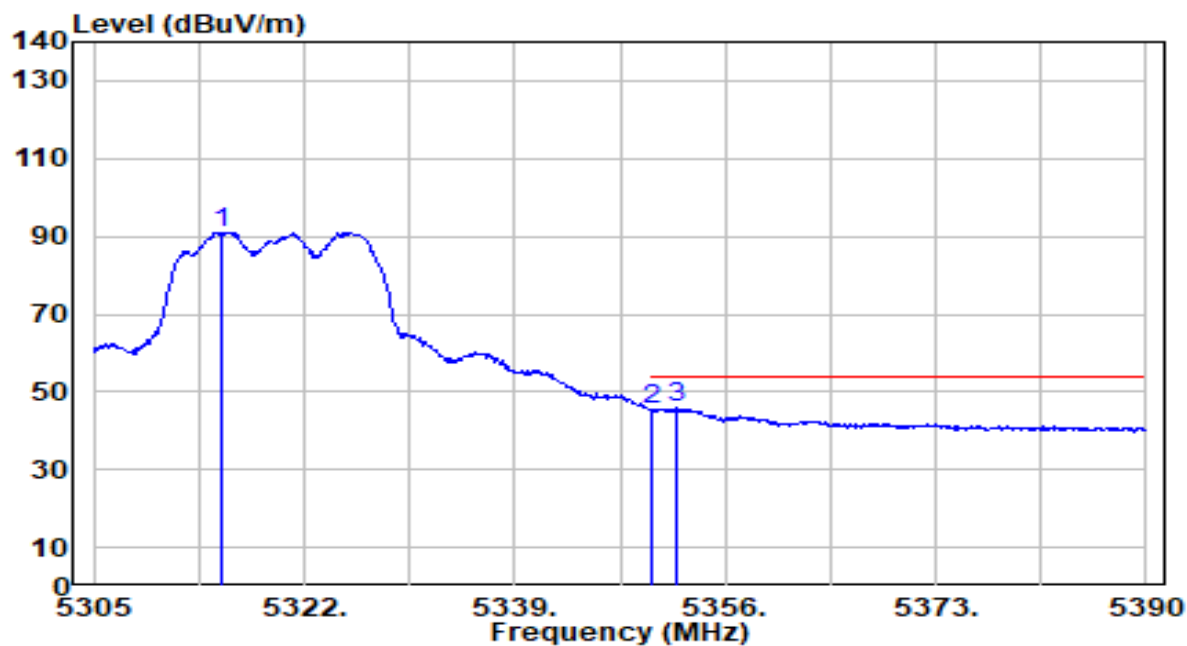


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.285	90.45	0.66	91.11	N/A	N/A	250	319	Average
2	5350.000	44.68	0.59	45.27	-8.73	54.00	250	319	Average
3	* 5352.005	45.25	0.59	45.84	-8.16	54.00	250	319	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

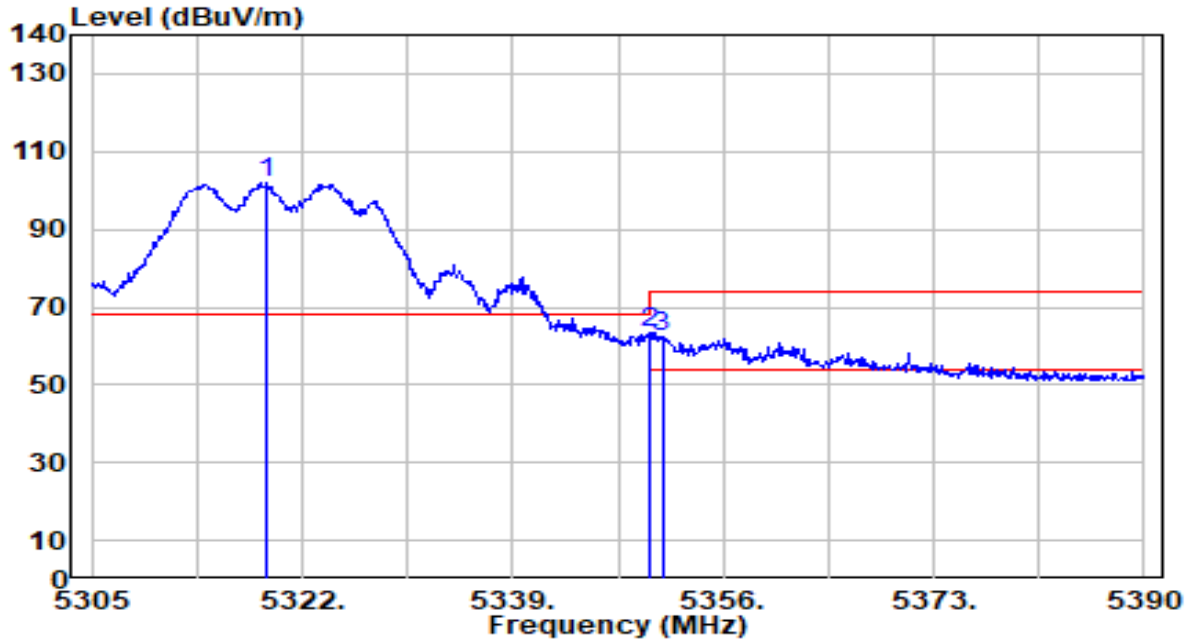


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.195	101.54	0.65	102.19	N/A	N/A	120	16	Peak
2	* 5350.000	62.59	0.59	63.18	-10.82	74.00	120	16	Peak
3	5351.070	61.94	0.59	62.53	-11.47	74.00	120	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

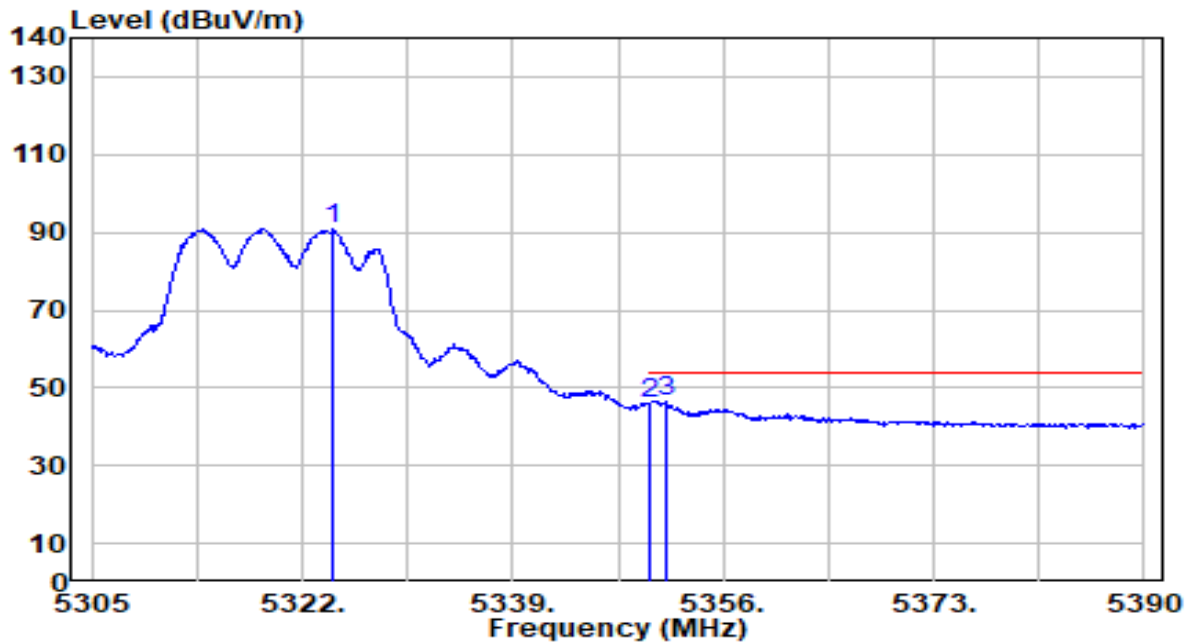


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.465	90.26	0.64	90.89	N/A	N/A	120	16	Average
2	5350.000	45.49	0.59	46.08	-7.92	54.00	120	16	Average
3	* 5351.410	45.77	0.59	46.36	-7.64	54.00	120	16	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

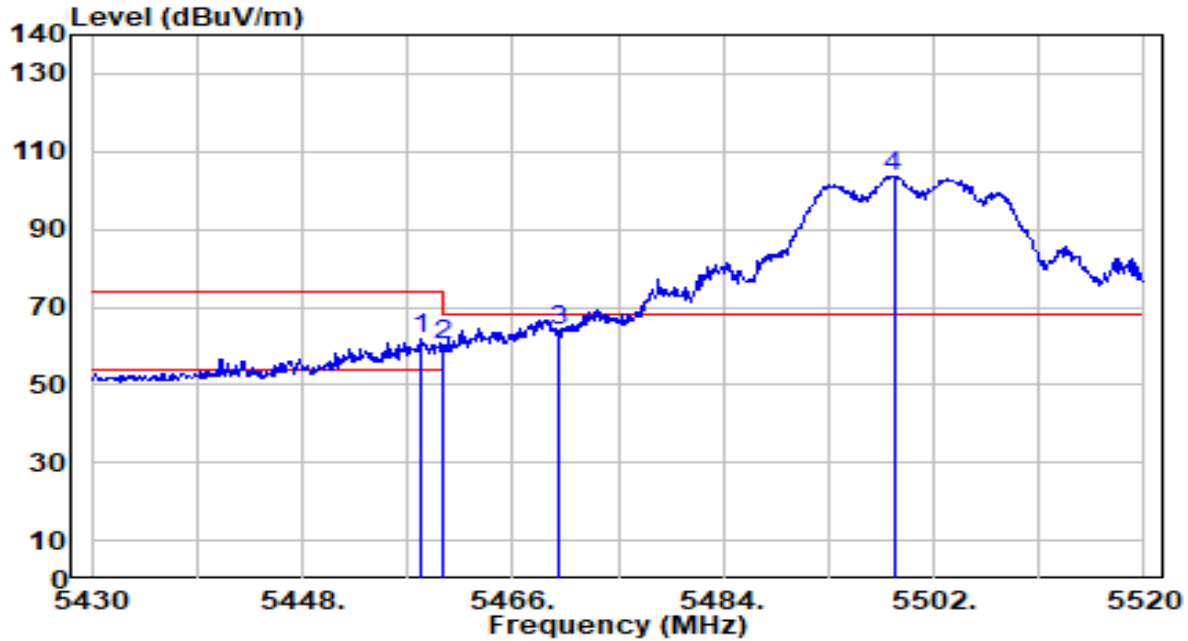


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.170	60.89	0.75	61.65	-12.35	74.00	214	12	Peak
2	5460.000	59.33	0.76	60.09	-13.91	74.00	214	12	Peak
3	* 5470.000	63.20	0.80	64.00	-4.20	68.20	214	12	Peak
4	5498.580	102.67	0.92	103.59	N/A	N/A	214	12	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

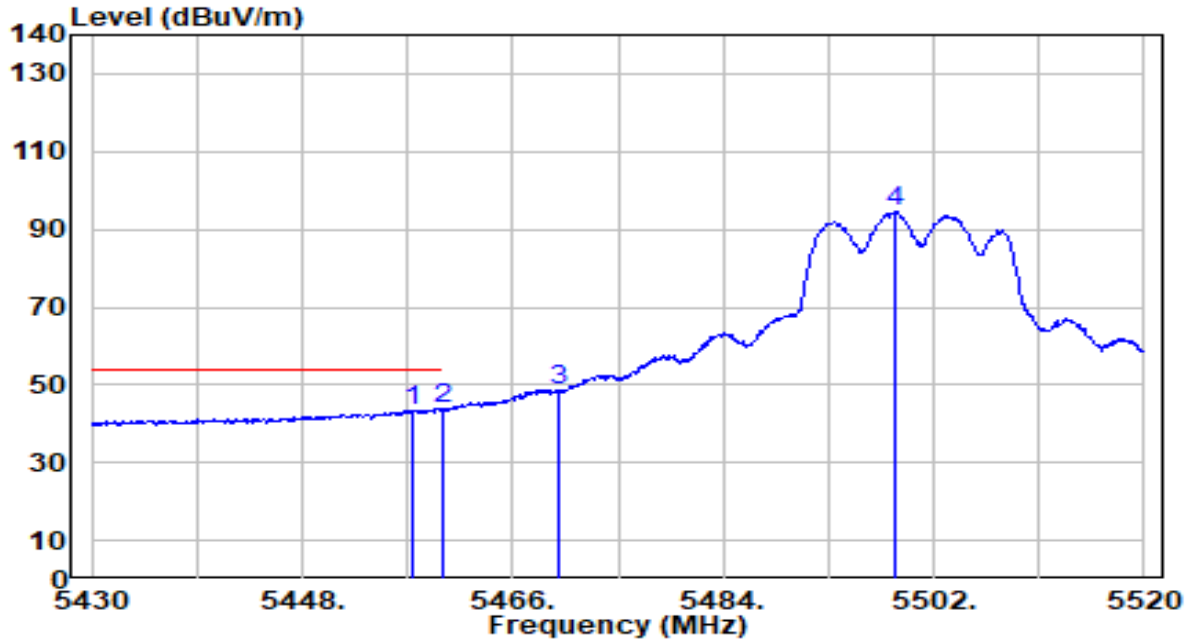


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.450	42.82	0.75	43.57	-10.43	54.00	214	12	Average
2	* 5460.000	42.98	0.76	43.74	-10.26	54.00	214	12	Average
3	5470.000	47.54	0.80	48.34	N/A	N/A	214	12	Average
4	5498.670	93.57	0.92	94.50	N/A	N/A	214	12	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

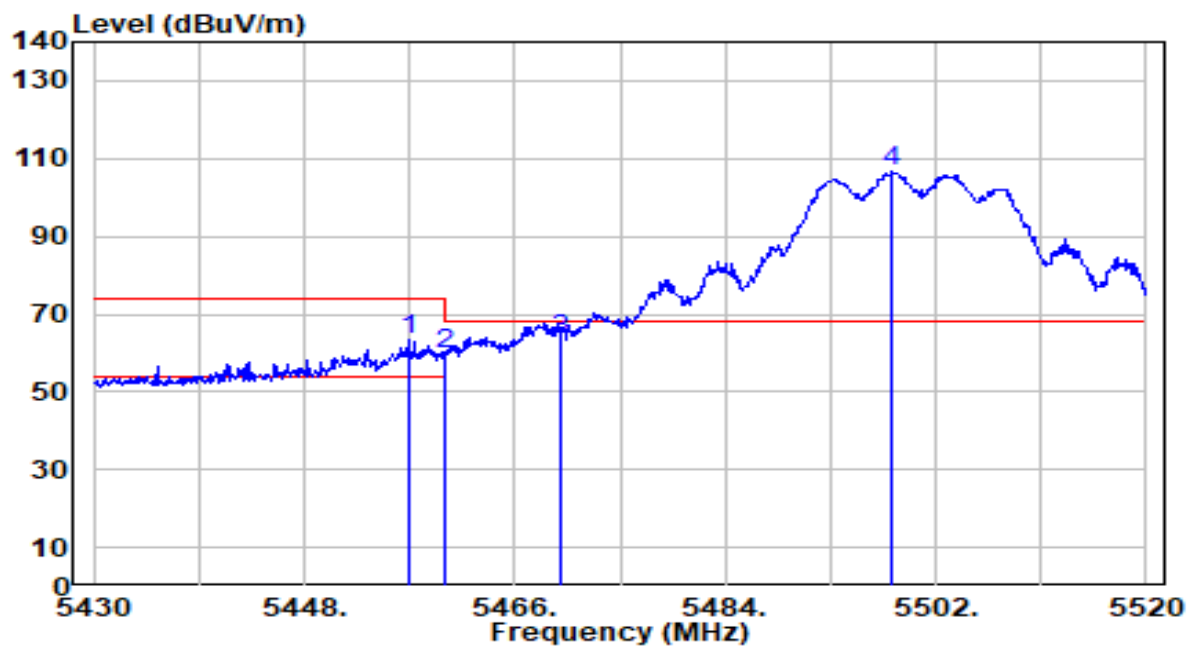


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.910	62.78	0.75	63.52	-10.48	74.00	278	331	Peak
2	5460.000	58.76	0.76	59.52	-14.48	74.00	278	331	Peak
3	* 5470.000	62.39	0.80	63.19	-5.01	68.20	278	331	Peak
4	5498.220	105.72	0.92	106.65	N/A	N/A	278	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

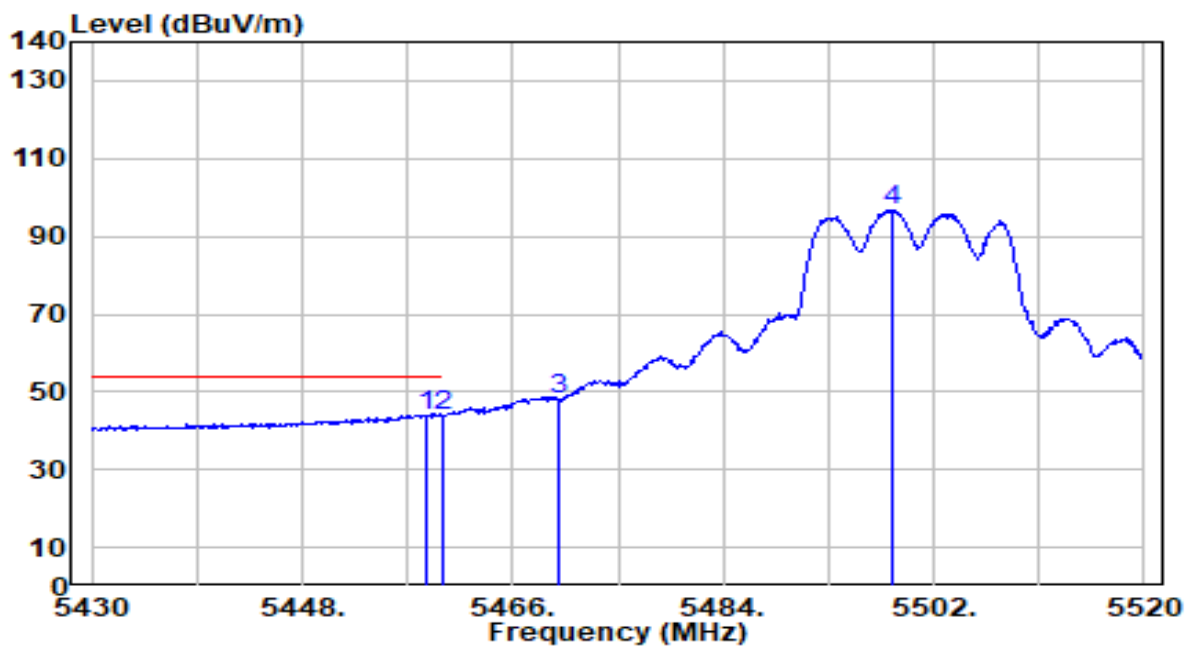


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5458.620	43.32	0.75	44.07	-9.93	54.00	278	331	Average
2	5460.000	43.09	0.76	43.85	-10.15	54.00	278	331	Average
3	5470.000	47.28	0.80	48.08	N/A	N/A	278	331	Average
4	5498.400	95.98	0.92	96.90	N/A	N/A	278	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

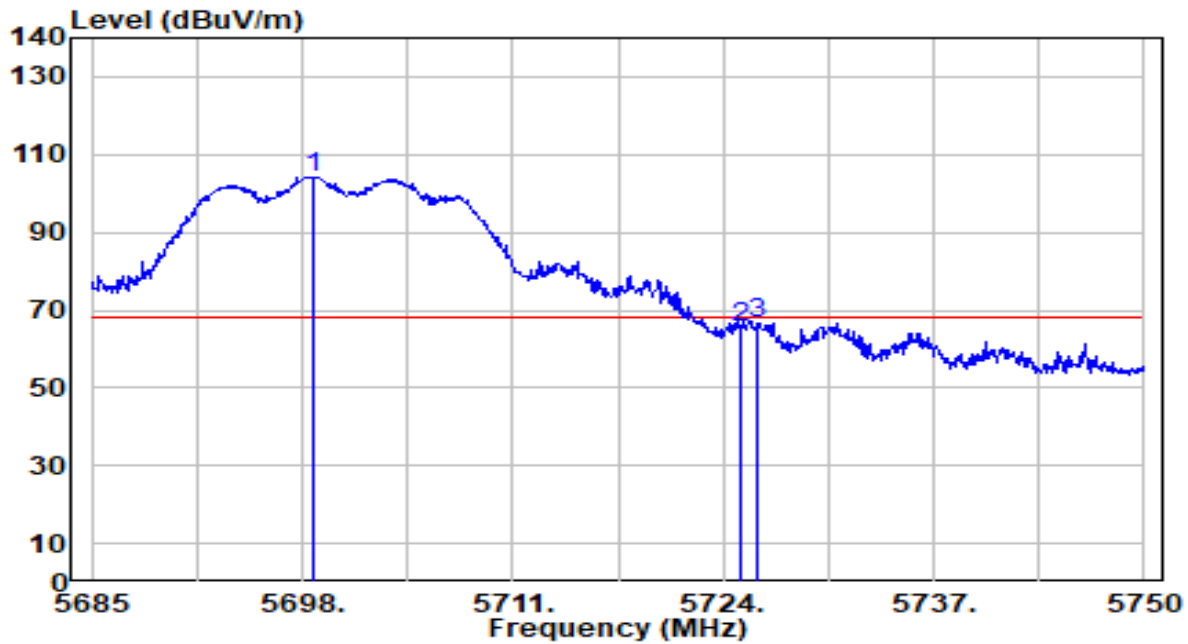


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.715	102.47	1.78	104.25	N/A	N/A	260	17	Peak
2	5725.000	63.75	1.89	65.64	-2.56	68.20	260	17	Peak
3	* 5726.080	64.82	1.89	66.71	-1.49	68.20	260	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

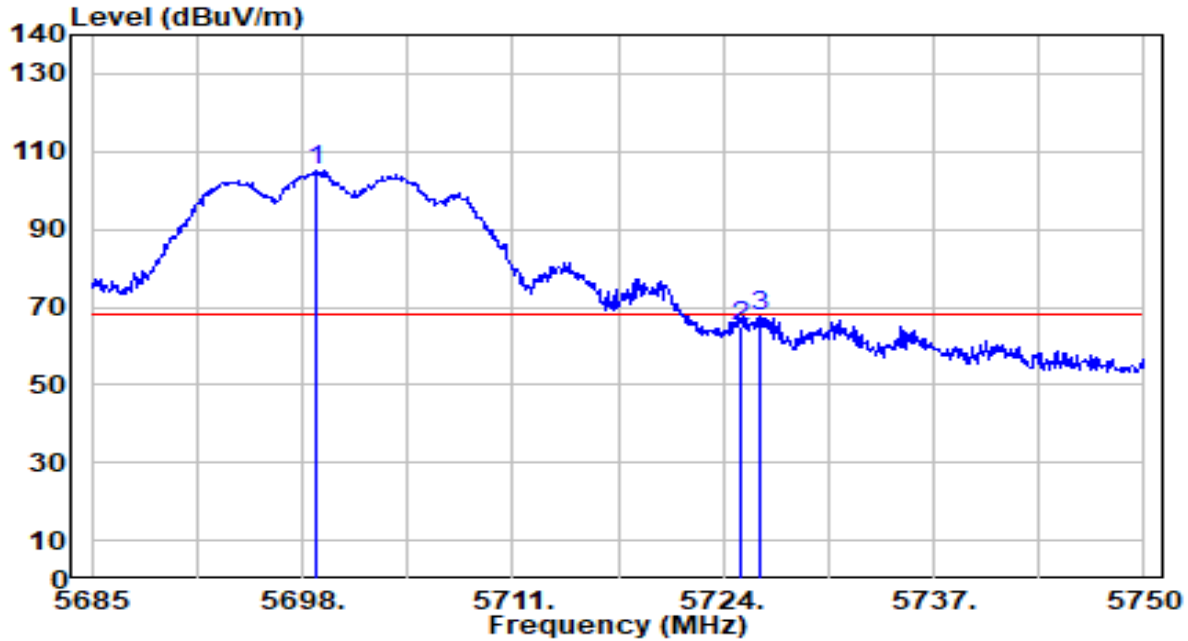


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.845	103.22	1.78	105.01	N/A	N/A	254	340	Peak
2	5725.000	63.07	1.89	64.96	-3.24	68.20	254	340	Peak
3	* 5726.210	65.77	1.89	67.66	-0.54	68.20	254	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

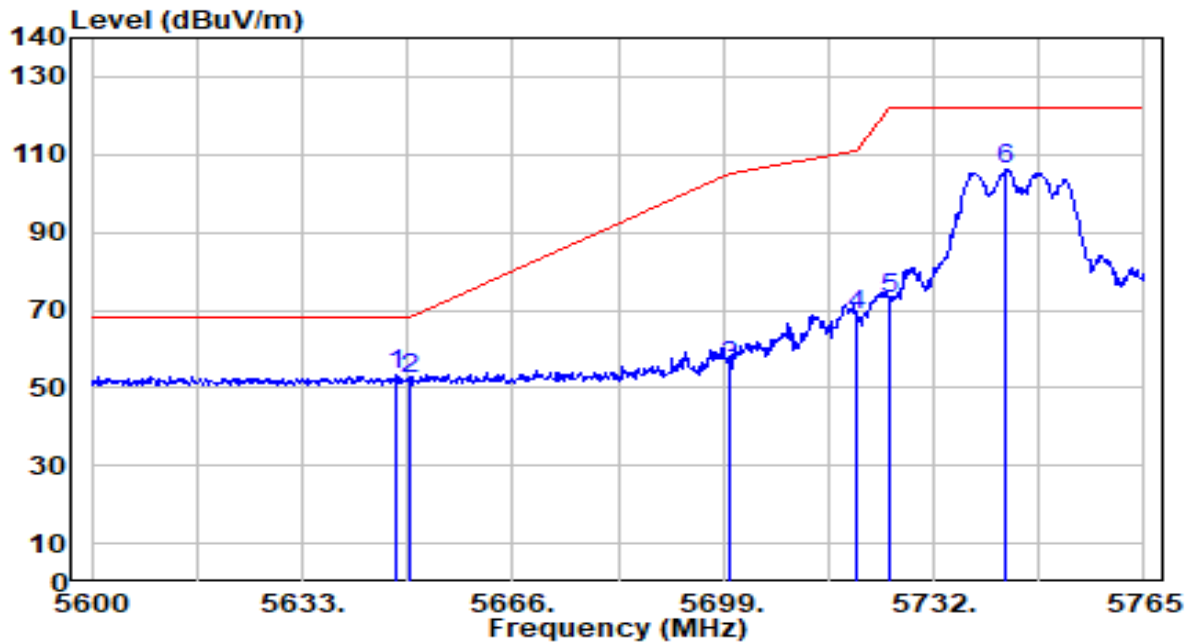


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.520	51.64	1.58	53.22	-14.98	68.20	260	16	Peak
2		5650.000	50.55	1.59	52.14	-16.06	68.20	260	16	Peak
3		5700.000	53.93	1.79	55.72	-49.48	105.20	260	16	Peak
4		5720.000	66.94	1.87	68.81	-41.99	110.80	260	16	Peak
5		5725.000	70.97	1.89	72.86	-49.34	122.20	260	16	Peak
6		5743.385	104.18	1.96	106.14	N/A	N/A	260	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

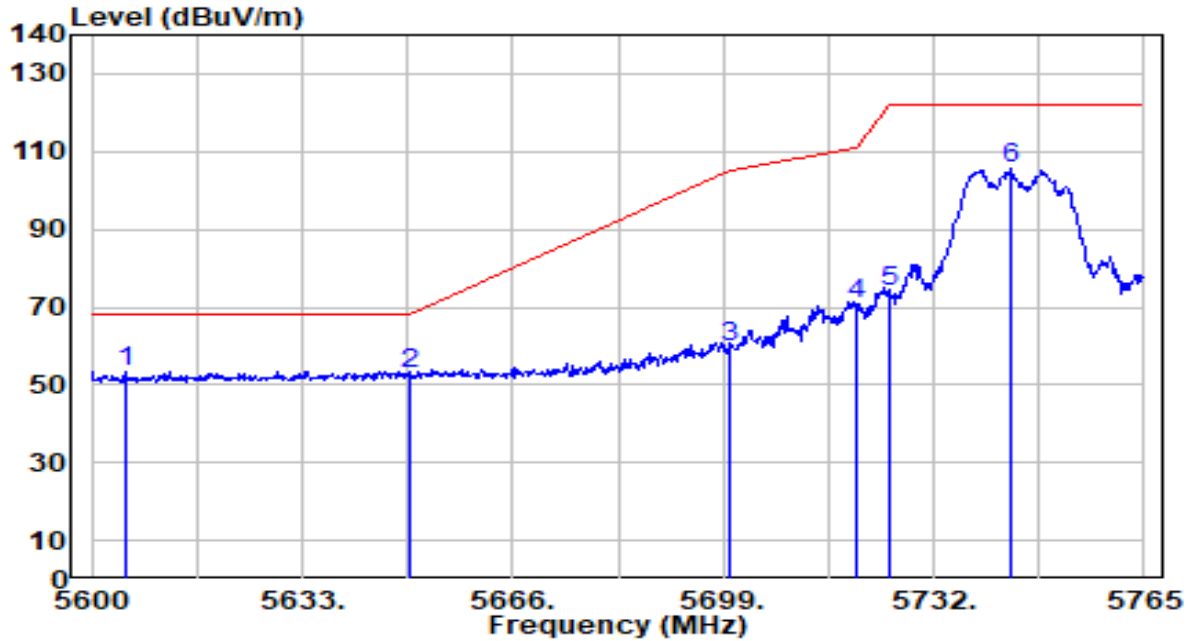


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5605.280	52.18	1.41	53.59	-14.61	68.20	267	336	Peak
2	5650.000	51.06	1.59	52.64	-15.56	68.20	267	336	Peak
3	5700.000	58.00	1.79	59.79	-45.41	105.20	267	336	Peak
4	5720.000	68.71	1.87	70.58	-40.22	110.80	267	336	Peak
5	5725.000	71.86	1.89	73.75	-48.45	122.20	267	336	Peak
6	5744.045	103.81	1.97	105.77	N/A	N/A	267	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

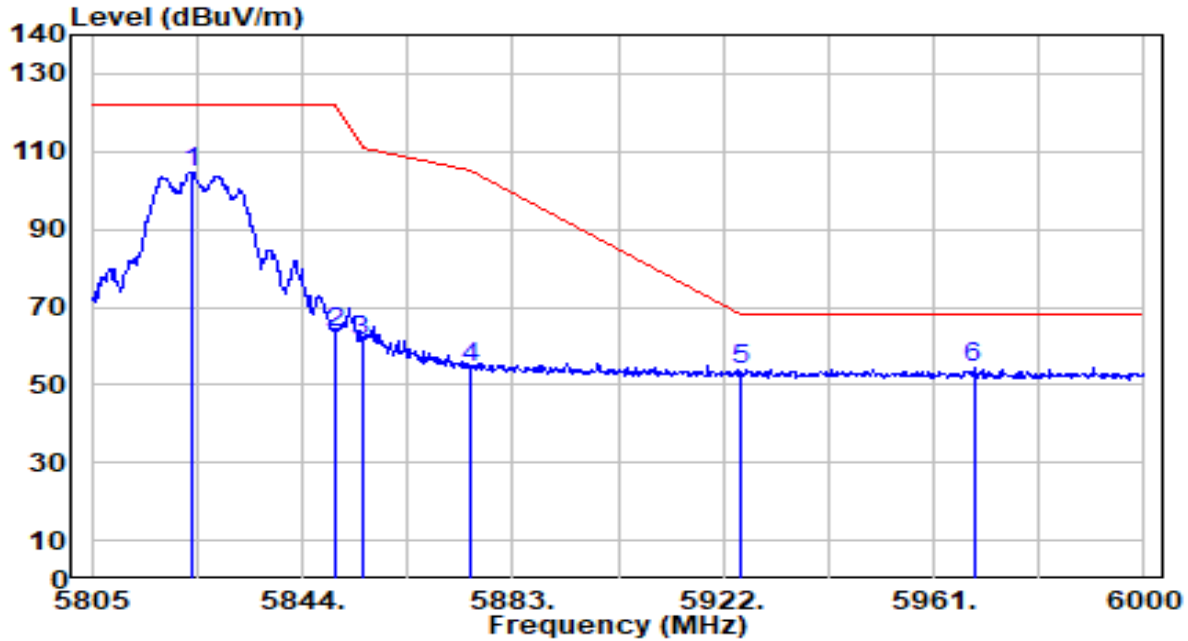


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.525	102.53	2.23	104.75	N/A	N/A	250	18	Peak
2	5850.000	61.39	2.27	63.66	-58.54	122.20	250	18	Peak
3	5855.000	59.10	2.28	61.37	-49.43	110.80	250	18	Peak
4	5875.000	52.23	2.31	54.54	-50.66	105.20	250	18	Peak
5	5925.000	51.76	2.38	54.14	-14.06	68.20	250	18	Peak
6	* 5968.410	51.87	2.45	54.32	-13.88	68.20	250	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

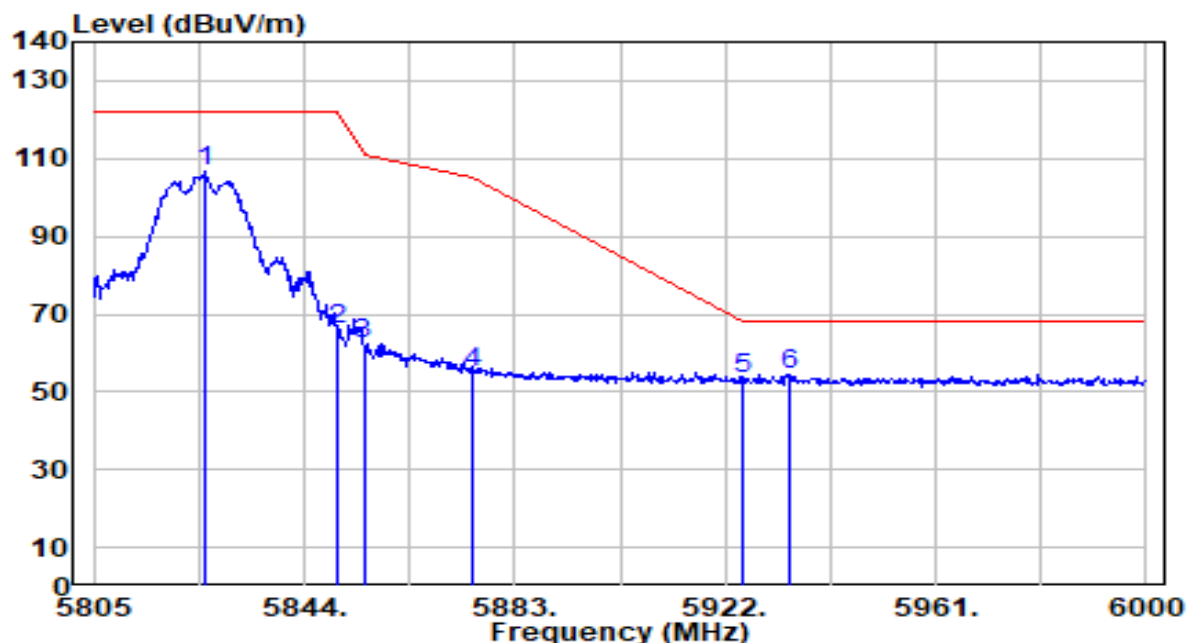


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.475	104.33	2.23	106.56	N/A	N/A	267	336	Peak
2	5850.000	63.73	2.27	65.99	-56.21	122.20	267	336	Peak
3	5855.000	59.89	2.28	62.16	-48.64	110.80	267	336	Peak
4	5875.000	52.74	2.31	55.05	-50.15	105.20	267	336	Peak
5	5925.000	50.95	2.38	53.34	-14.86	68.20	267	336	Peak
6	* 5934.090	52.25	2.40	54.65	-13.55	68.20	267	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

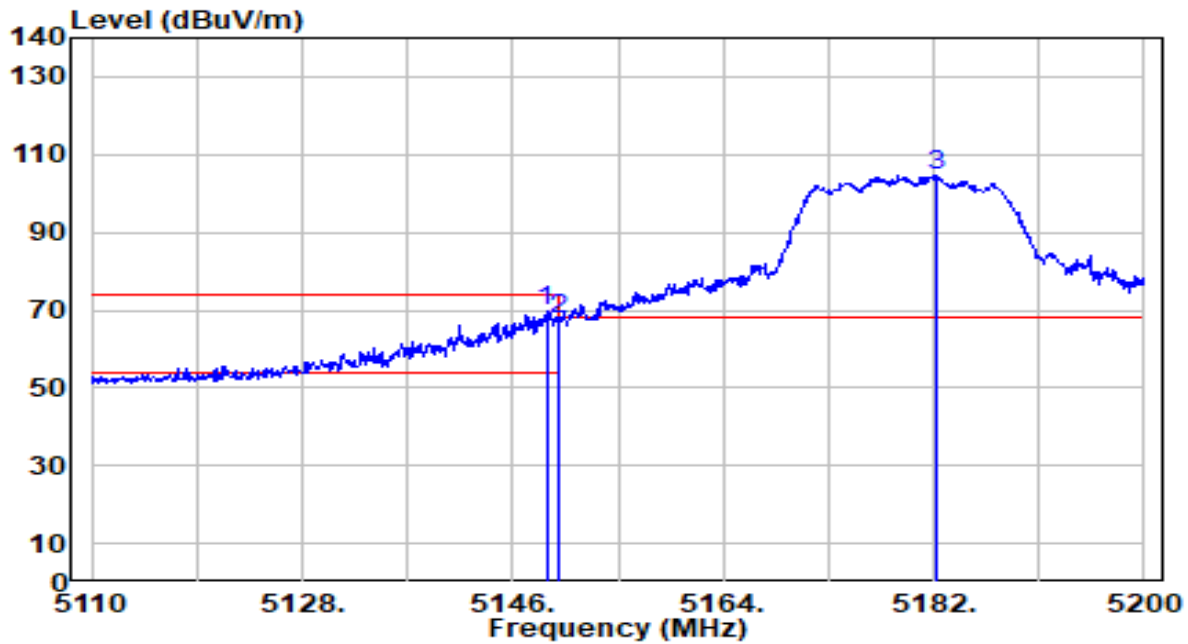


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.880	68.98	0.79	69.78	-4.22	74.00	223	324	Peak
2		5150.000	66.92	0.80	67.72	-6.28	74.00	223	324	Peak
3		5182.270	103.88	0.84	104.71	N/A	N/A	223	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

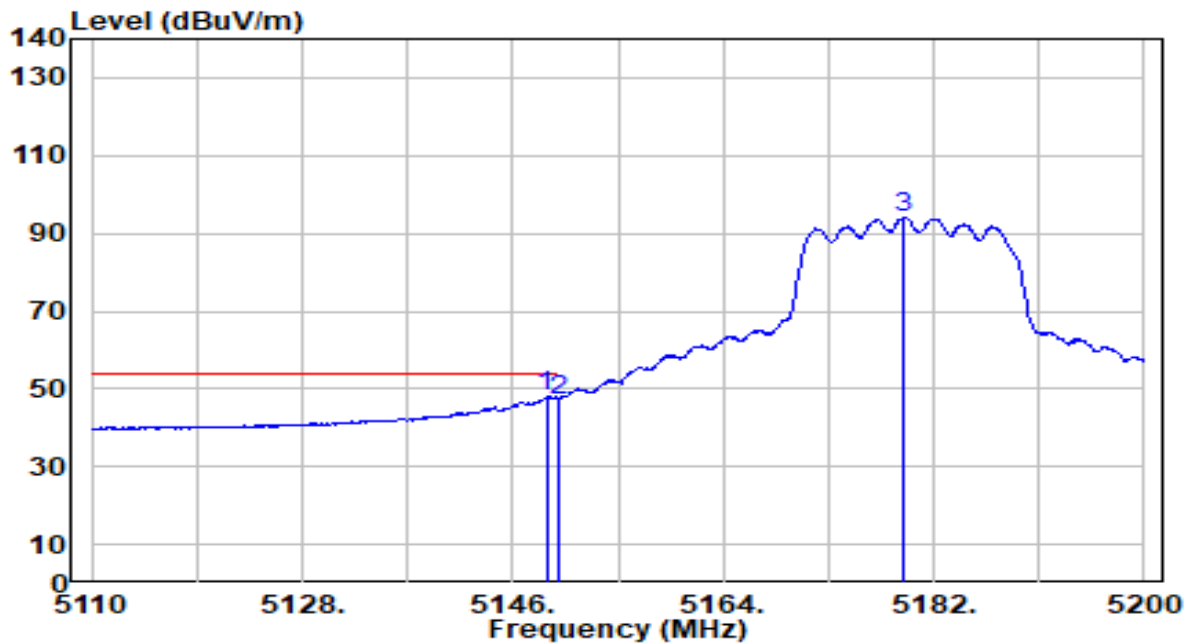


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.880	47.20	0.79	48.00	-6.00	54.00	223	324	Average
2	5150.000	46.44	0.80	47.24	-6.76	54.00	223	324	Average
3	5179.390	93.36	0.83	94.19	N/A	N/A	223	324	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

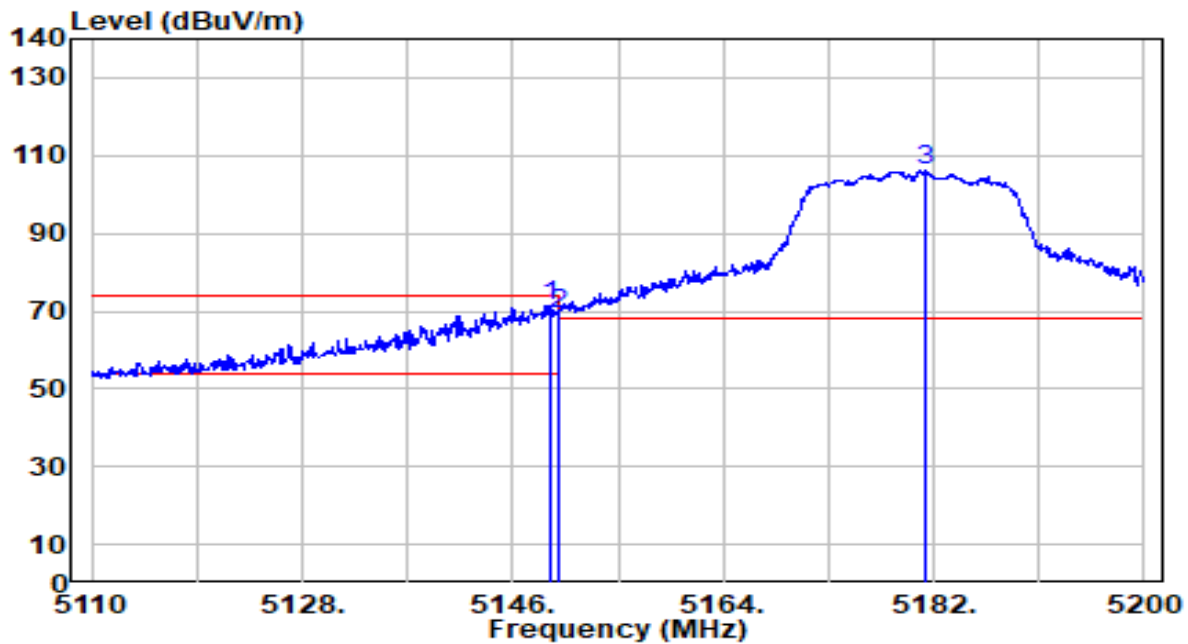


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.330	70.71	0.80	71.51	-2.49	74.00	100	21	Peak
2		5150.000	68.29	0.80	69.08	-4.92	74.00	100	21	Peak
3		5181.280	105.42	0.83	106.26	N/A	N/A	100	21	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

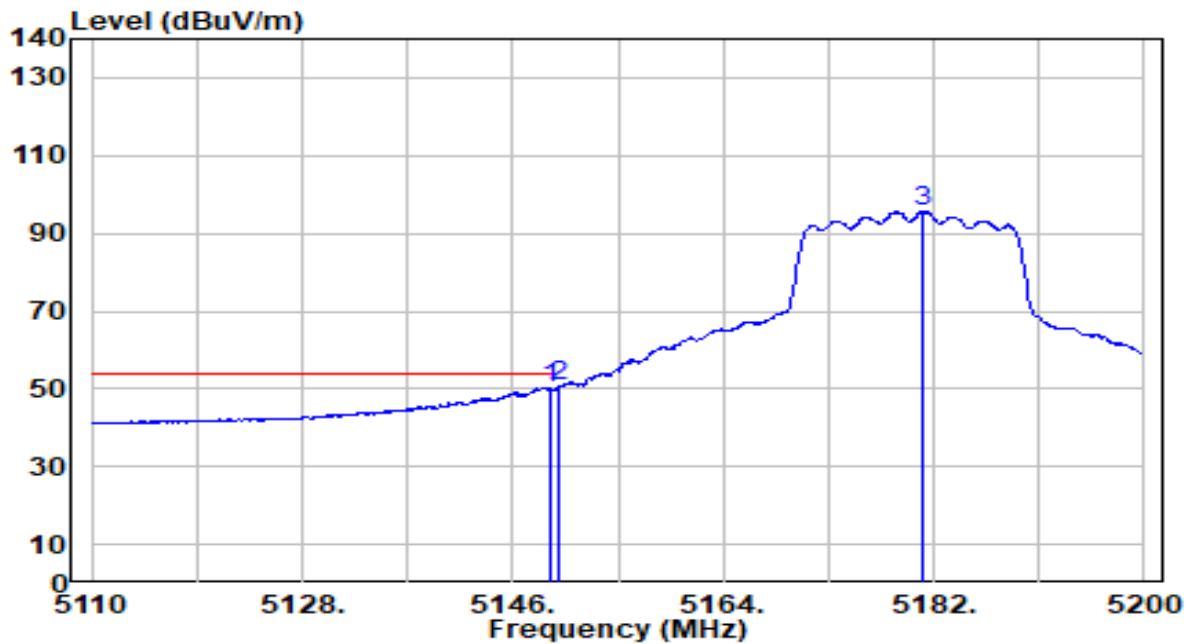


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.330	49.45	0.80	50.25	-3.75	54.00	100	21	Average
2	* 5150.000	49.91	0.80	50.71	-3.29	54.00	100	21	Average
3	5181.010	94.88	0.83	95.71	N/A	N/A	100	21	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

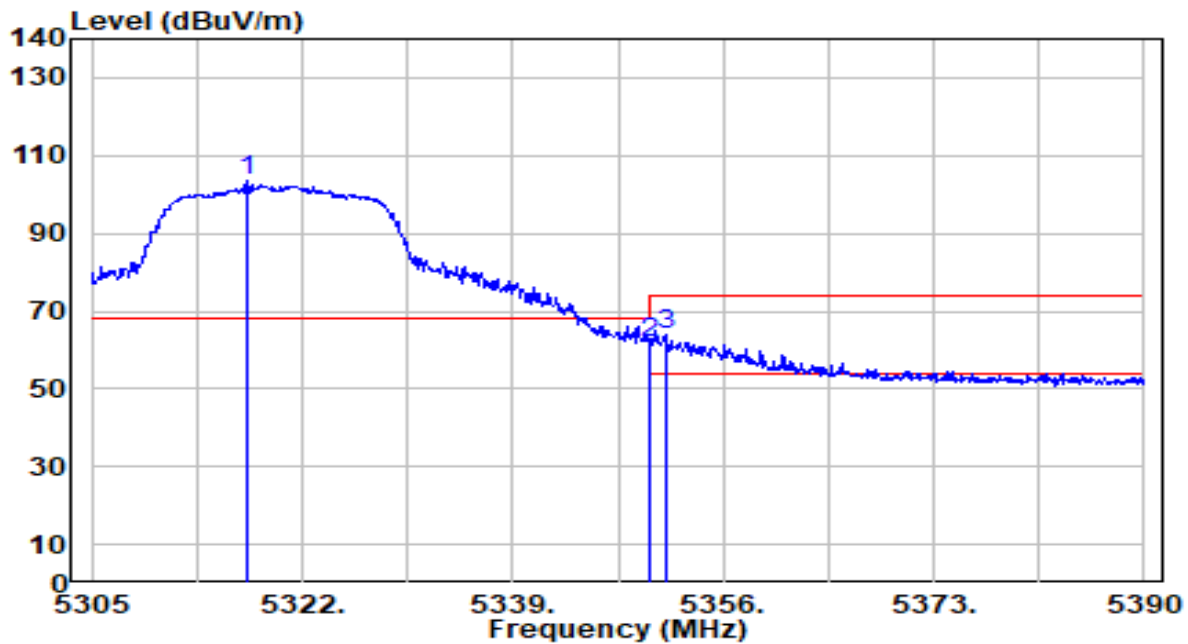


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.495	102.64	0.65	103.29	N/A	N/A	263	301	Peak
2	5350.000	61.30	0.59	61.90	-12.10	74.00	263	301	Peak
3	* 5351.325	63.29	0.59	63.88	-10.12	74.00	263	301	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

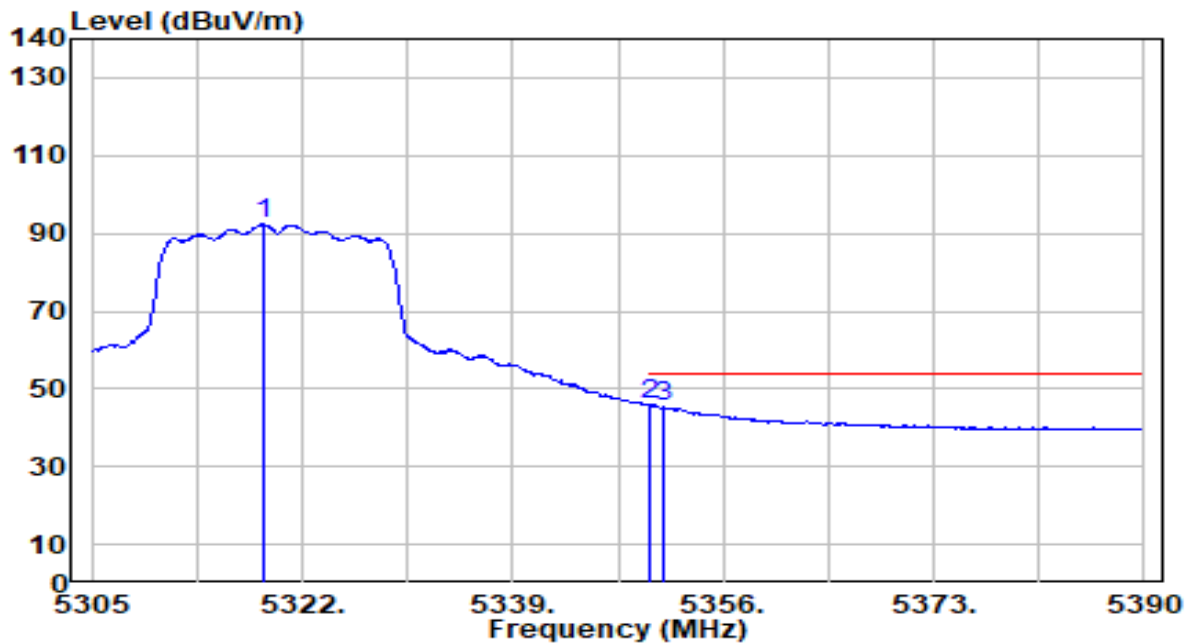


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.855	91.63	0.65	92.27	N/A	N/A	263	301	Average
2	* 5350.000	45.20	0.59	45.80	-8.20	54.00	263	301	Average
3	5351.155	44.64	0.59	45.23	-8.77	54.00	263	301	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

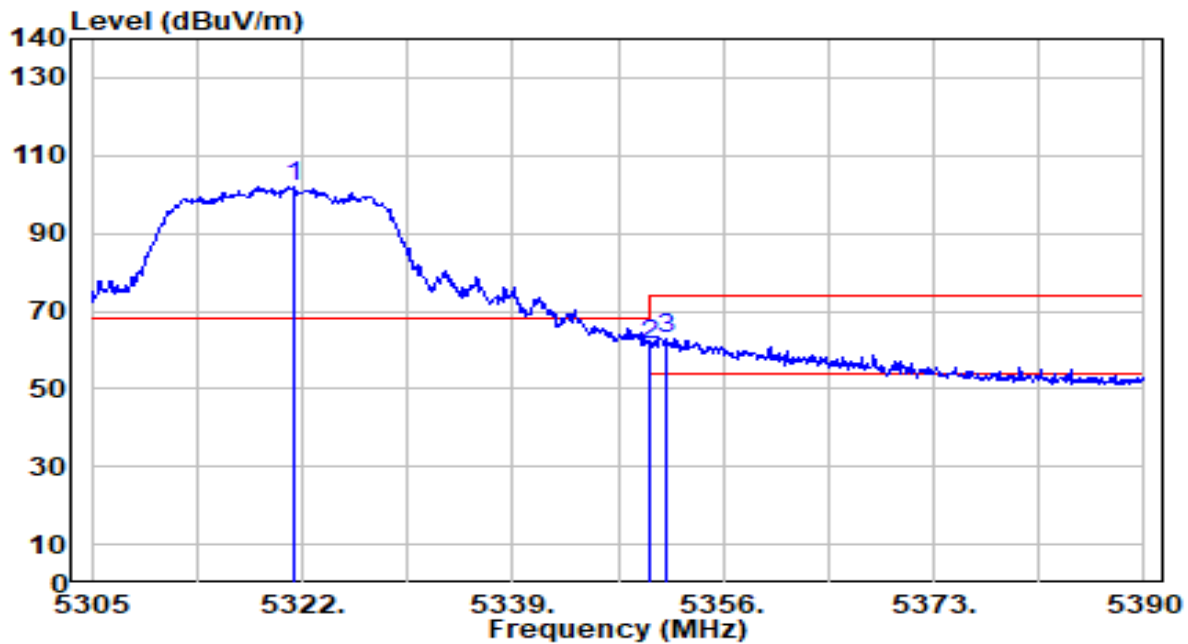


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.405	101.26	0.64	101.90	N/A	N/A	263	331	Peak
2	5350.000	60.75	0.59	61.35	-12.65	74.00	263	331	Peak
3	* 5351.325	62.12	0.59	62.71	-11.29	74.00	263	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

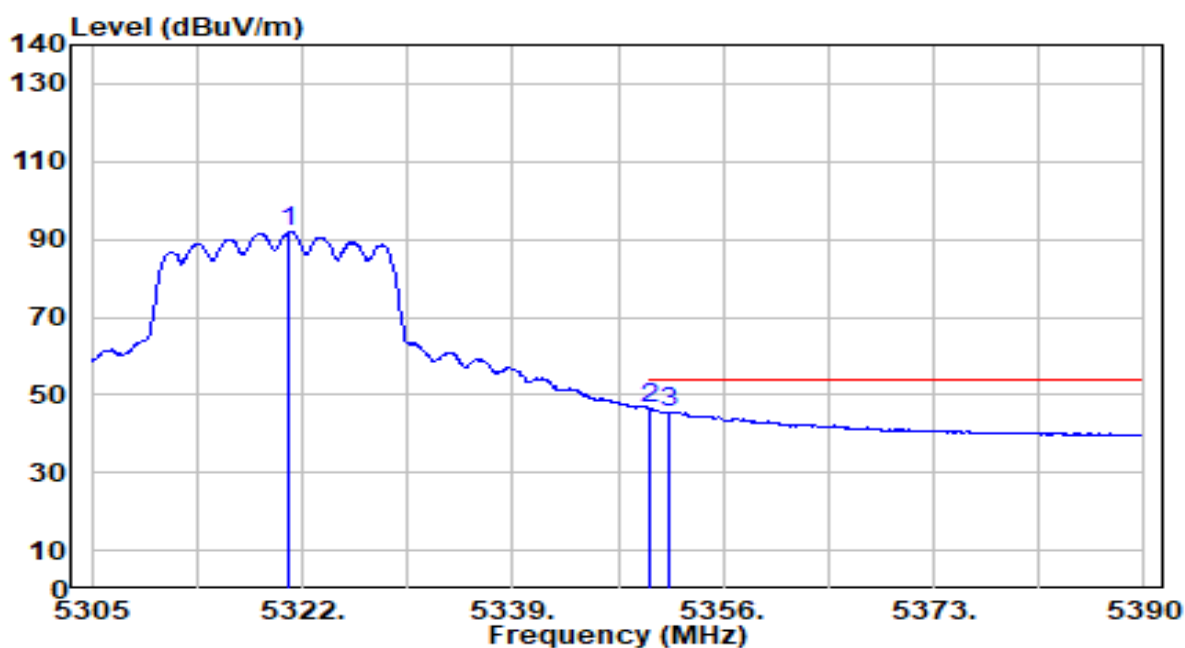


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.980	91.22	0.65	91.86	N/A	N/A	263	331	Average
2	* 5350.000	46.06	0.59	46.66	-7.34	54.00	263	331	Average
3	5351.580	45.04	0.59	45.63	-8.37	54.00	263	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

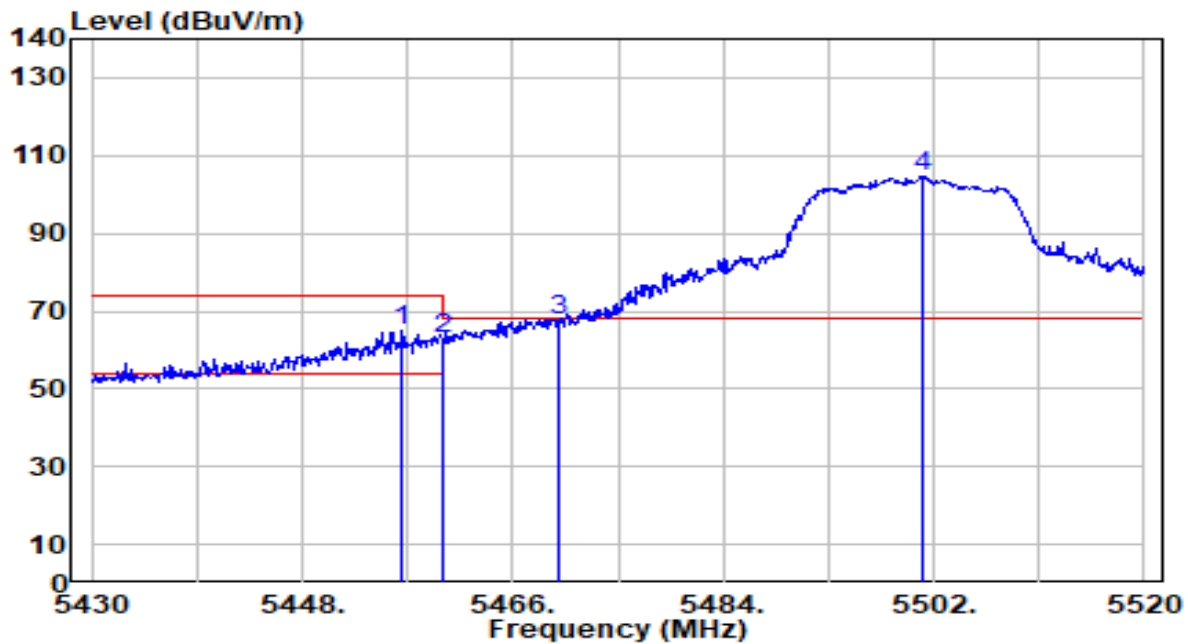


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.550	64.32	0.75	65.07	-8.93	74.00	234	316	Peak
2	5460.000	62.31	0.76	63.07	-10.93	74.00	234	316	Peak
3	* 5470.000	66.83	0.80	67.64	-0.56	68.20	234	316	Peak
4	5501.010	103.57	0.93	104.50	N/A	N/A	234	316	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

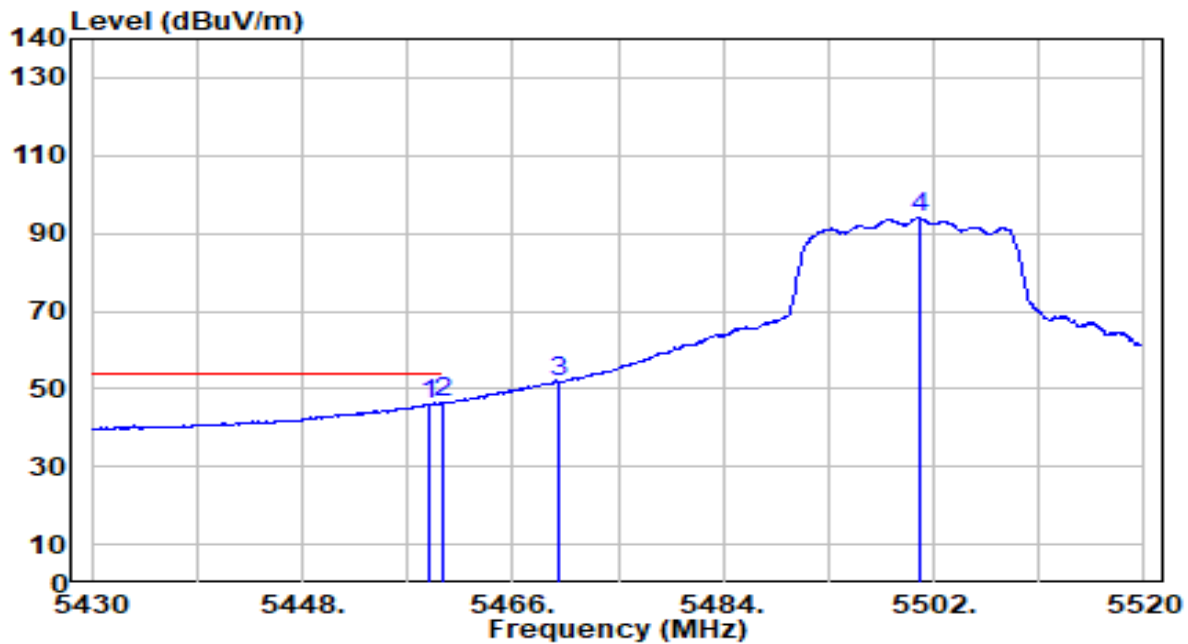


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.800	45.29	0.76	46.04	-7.96	54.00	234	316	Average
2	* 5460.000	45.57	0.76	46.33	-7.67	54.00	234	316	Average
3	5470.000	51.01	0.80	51.81	N/A	N/A	234	316	Average
4	5500.830	92.91	0.93	93.85	N/A	N/A	234	316	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

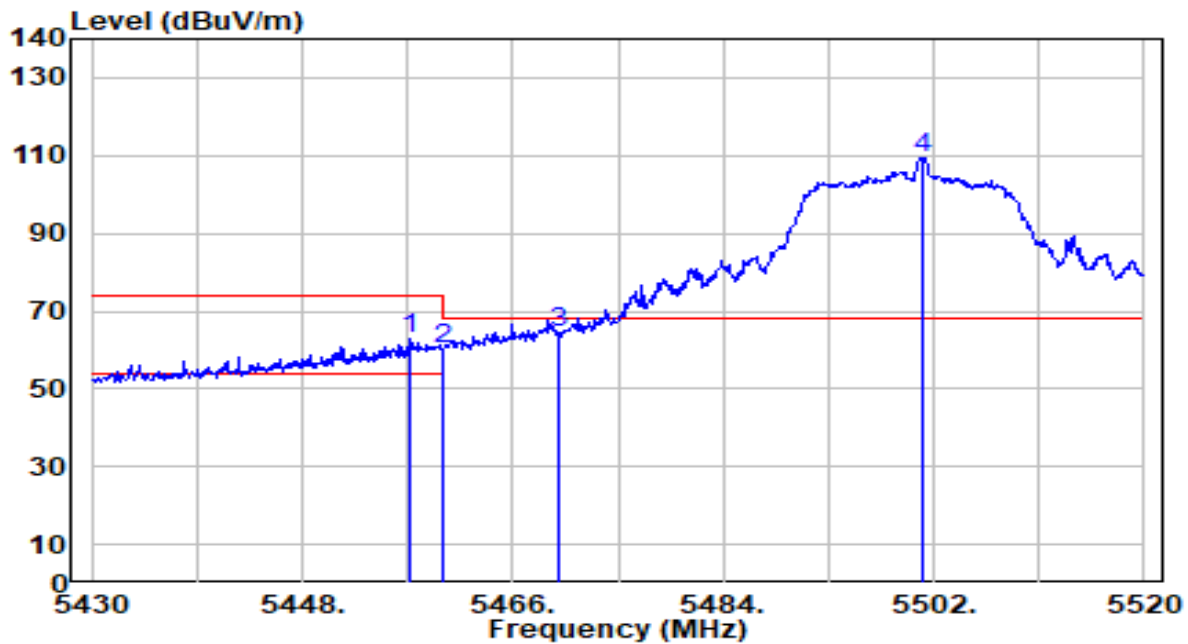


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.270	61.86	0.75	62.61	-11.39	74.00	279	338	Peak
2	5460.000	59.52	0.76	60.28	-13.72	74.00	279	338	Peak
3	* 5470.000	63.81	0.80	64.61	-3.59	68.20	279	338	Peak
4	5501.010	108.50	0.93	109.43	N/A	N/A	279	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

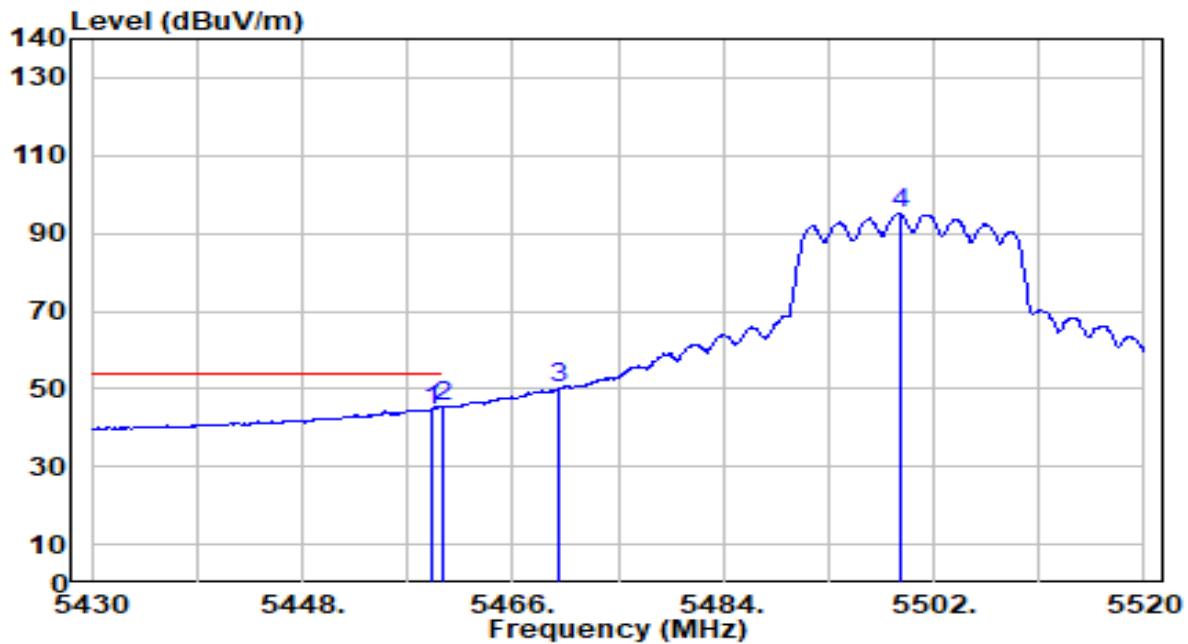


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.980	43.86	0.76	44.62	-9.38	54.00	279	338	Average
2	* 5460.000	44.77	0.76	45.53	-8.47	54.00	279	338	Average
3	5470.000	49.18	0.80	49.99	N/A	N/A	279	338	Average
4	5499.120	94.12	0.93	95.05	N/A	N/A	279	338	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

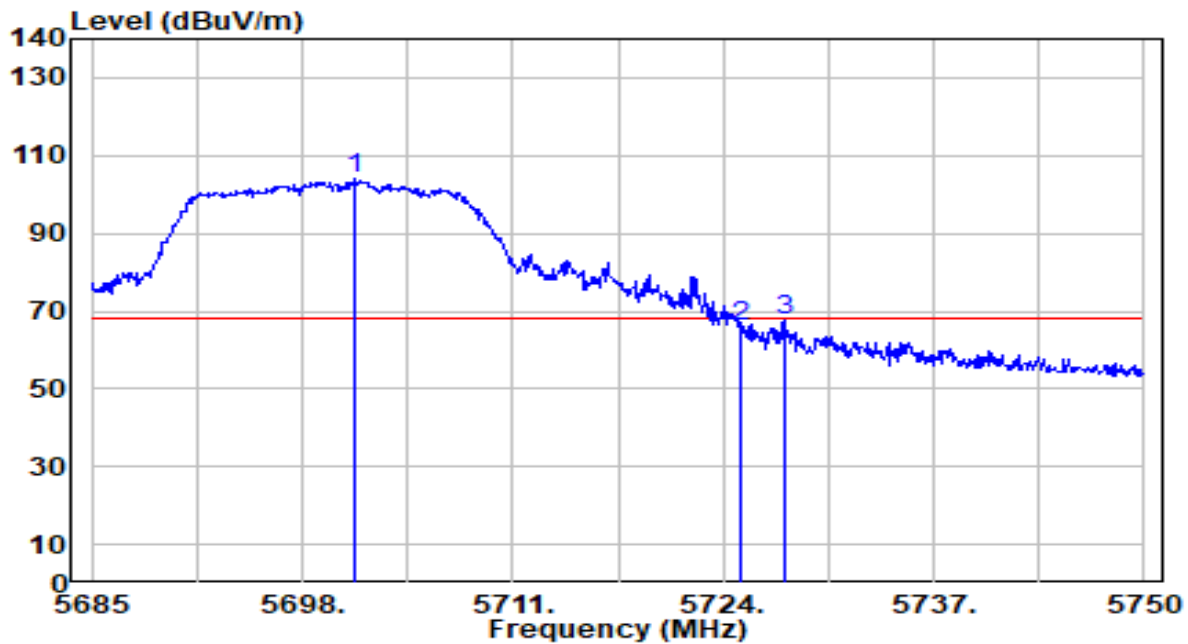


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.250	102.13	1.79	103.93	N/A	N/A	260	18	Peak
2	5725.000	63.95	1.89	65.84	-2.36	68.20	260	18	Peak
3	* 5727.770	65.86	1.90	67.76	-0.44	68.20	260	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

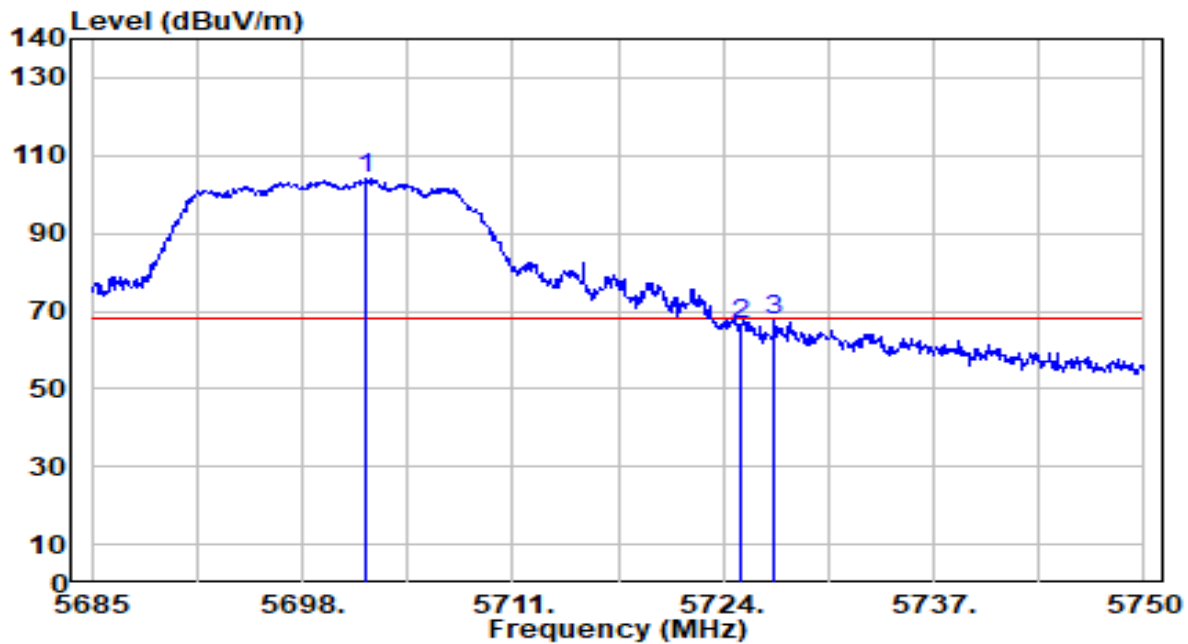


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.965	102.39	1.80	104.19	N/A	N/A	254	340	Peak
2	5725.000	64.86	1.89	66.75	-1.45	68.20	254	340	Peak
3	* 5727.185	65.90	1.90	67.80	-0.40	68.20	254	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

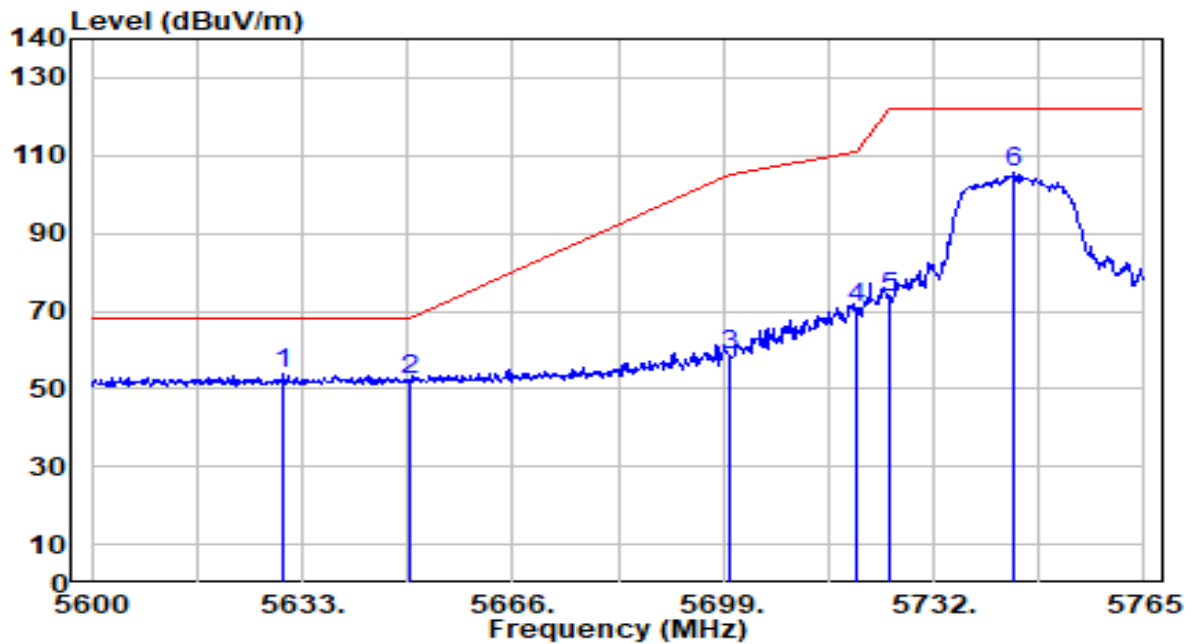


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5630.030	52.19	1.51	53.70	-14.50	68.20	260	16	Peak
2		5650.000	50.95	1.59	52.54	-15.66	68.20	260	16	Peak
3		5700.000	56.66	1.79	58.44	-46.76	105.20	260	16	Peak
4		5720.000	68.81	1.87	70.68	-40.12	110.80	260	16	Peak
5		5725.000	71.71	1.89	73.60	-48.60	122.20	260	16	Peak
6		5744.705	103.56	1.97	105.53	N/A	N/A	260	16	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

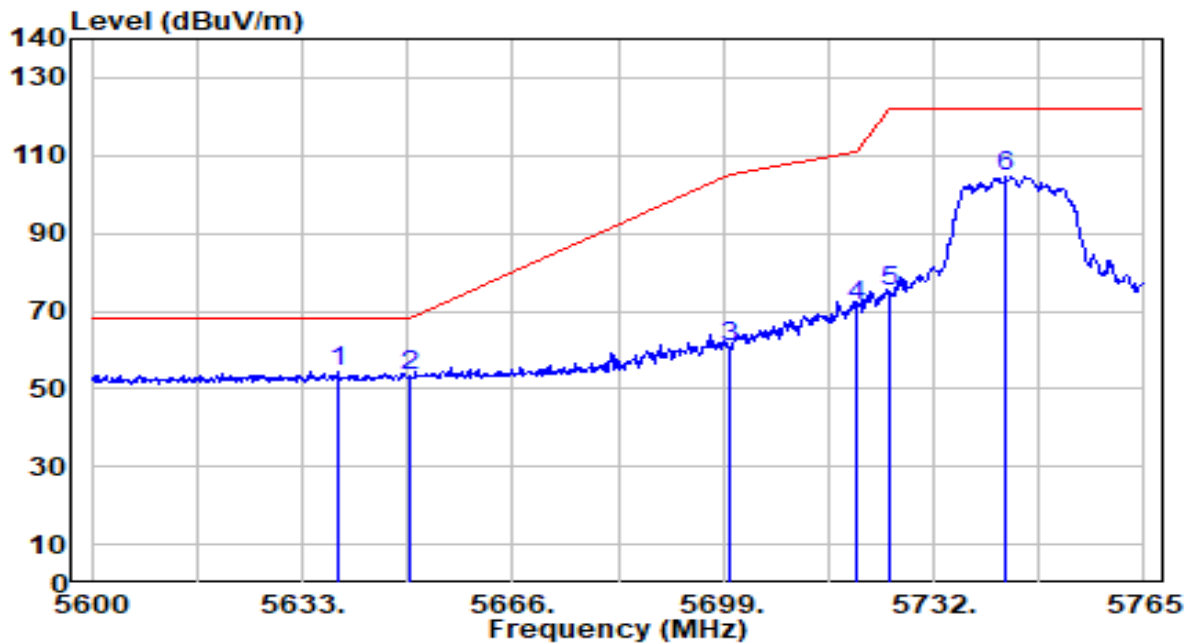


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.610	52.73	1.54	54.27	-13.93	68.20	267	336	Peak
2		5650.000	51.73	1.59	53.31	-14.89	68.20	267	336	Peak
3		5700.000	58.86	1.79	60.65	-44.55	105.20	267	336	Peak
4		5720.000	69.26	1.87	71.13	-39.67	110.80	267	336	Peak
5		5725.000	73.21	1.89	75.10	-47.10	122.20	267	336	Peak
6		5743.385	102.62	1.96	104.58	N/A	N/A	267	336	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

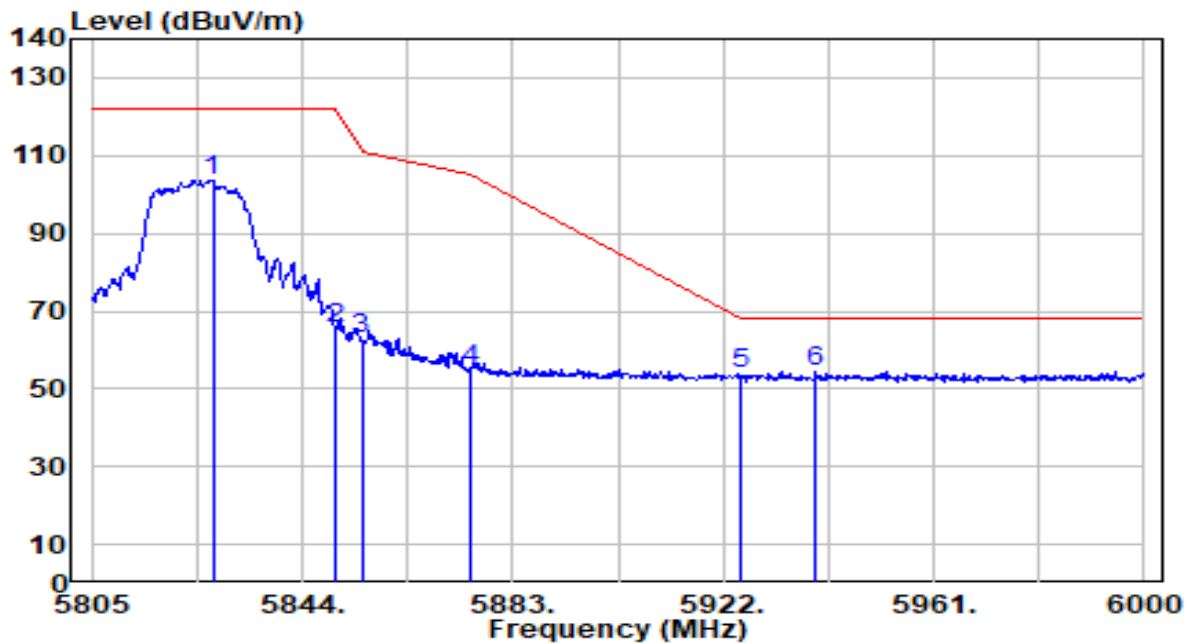


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.425	101.41	2.23	103.64	N/A	N/A	247	16	Peak
2	5850.000	63.27	2.27	65.53	-56.67	122.20	247	16	Peak
3	5855.000	60.68	2.28	62.96	-47.84	110.80	247	16	Peak
4	5875.000	52.89	2.31	55.19	-50.01	105.20	247	16	Peak
5	5925.000	51.29	2.38	53.67	-14.53	68.20	247	16	Peak
6	* 5939.160	52.25	2.41	54.66	-13.54	68.20	247	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

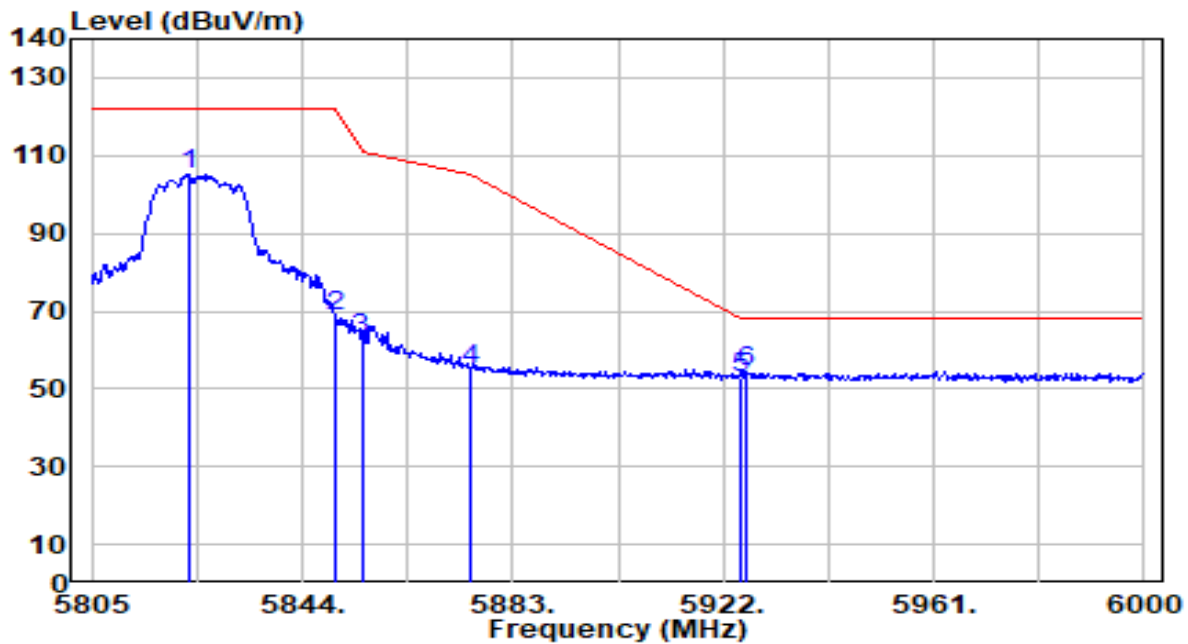


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.940	102.97	2.23	105.19	N/A	N/A	267	336	Peak
2	5850.000	66.64	2.27	68.91	-53.29	122.20	267	336	Peak
3	5855.000	60.58	2.28	62.86	-47.94	110.80	267	336	Peak
4	5875.000	52.84	2.31	55.14	-50.06	105.20	267	336	Peak
5	5925.000	50.28	2.38	52.66	-15.54	68.20	267	336	Peak
6	* 5926.095	52.26	2.39	54.65	-13.55	68.20	267	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

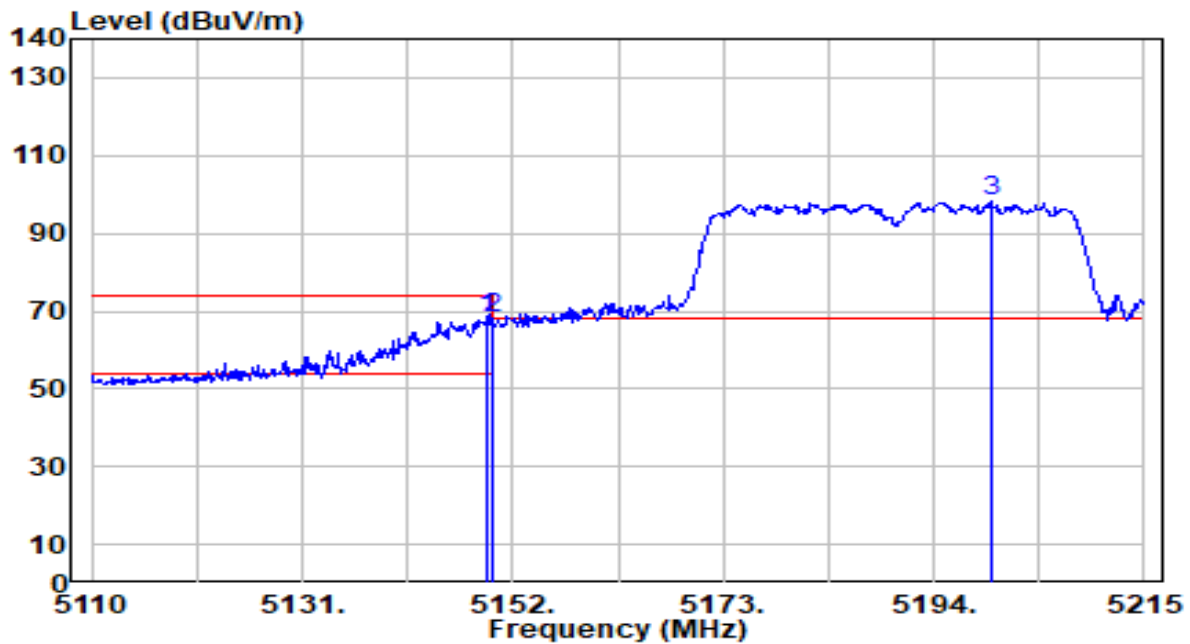


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.480	67.19	0.80	67.98	-6.02	74.00	223	324	Peak
2	5150.000	67.09	0.80	67.89	-6.11	74.00	223	324	Peak
3	5199.670	97.21	0.86	98.07	N/A	N/A	223	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

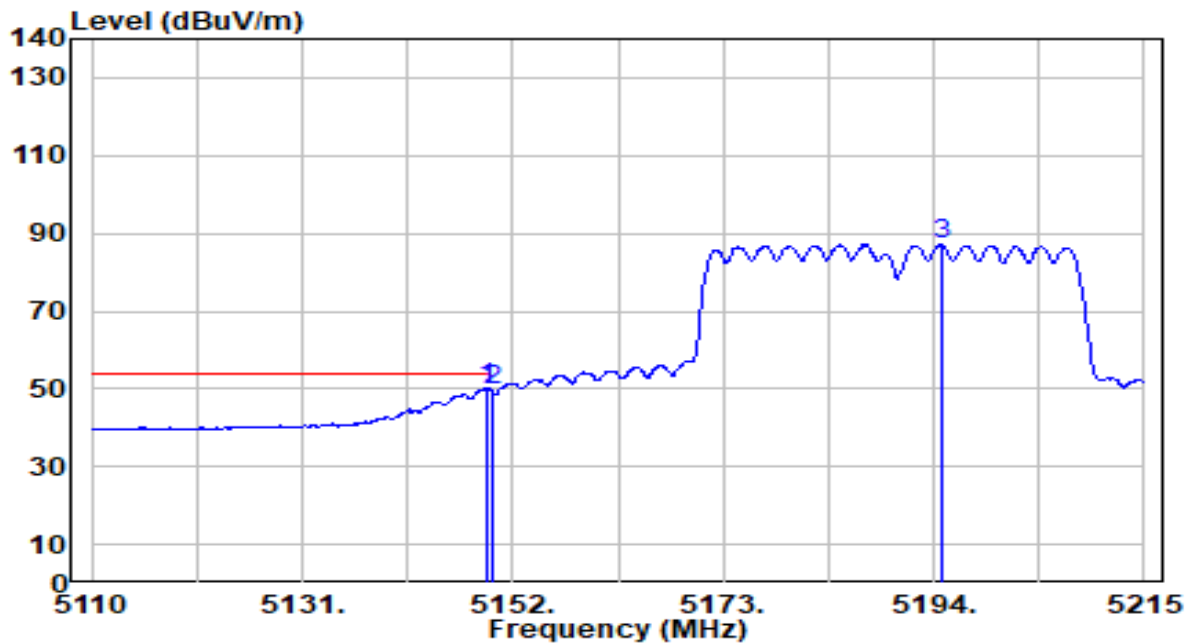


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	49.33	0.80	50.13	-3.87	54.00	223	324	Average
2		5150.000	48.81	0.80	49.60	-4.40	54.00	223	324	Average
3		5194.735	86.25	0.85	87.11	N/A	N/A	223	324	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

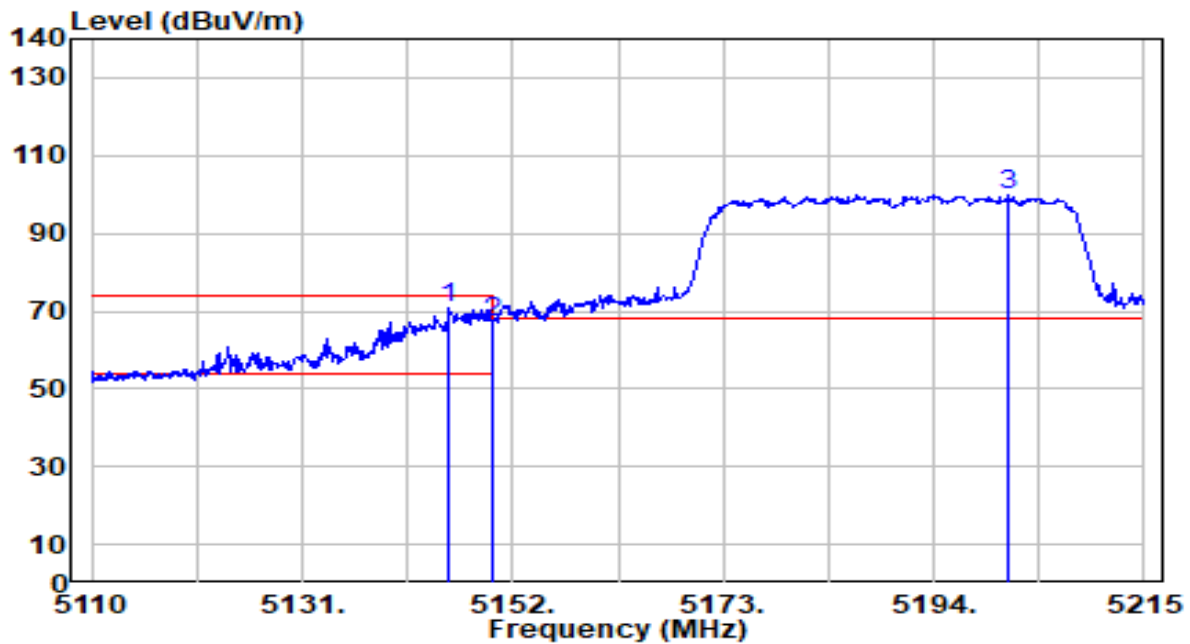


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.700	70.04	0.79	70.84	-3.16	74.00	116	19	Peak
2		5150.000	66.22	0.80	67.01	-6.99	74.00	116	19	Peak
3		5201.455	99.10	0.86	99.95	N/A	N/A	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

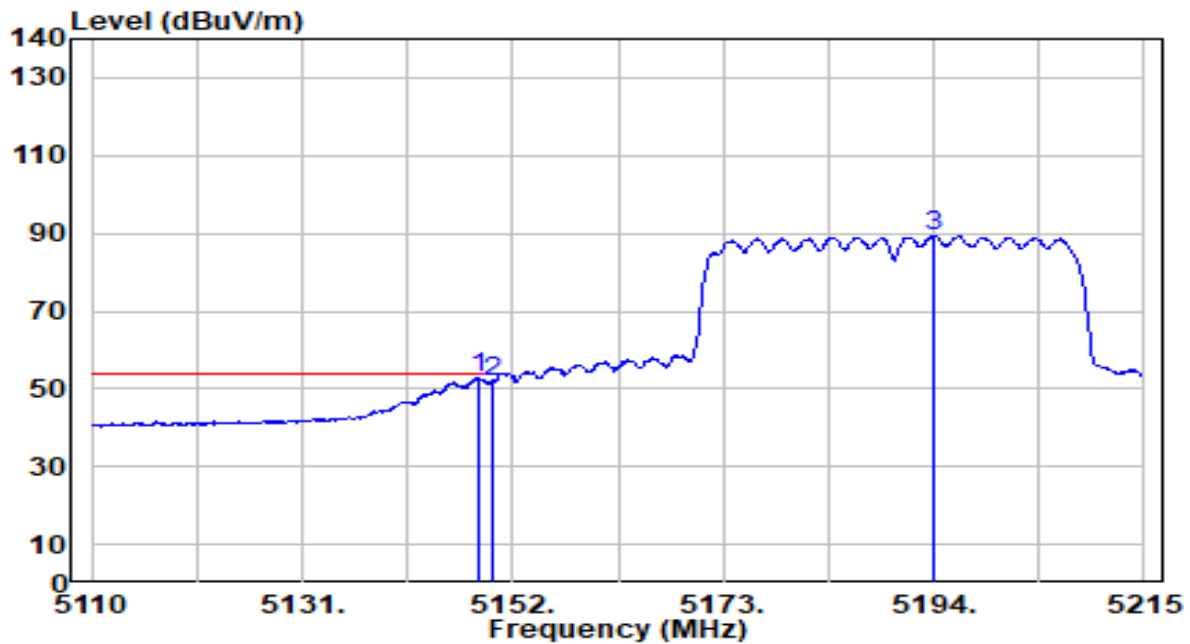


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.640	52.27	0.79	53.06	-0.94	54.00	116	19	Average
2		5150.000	51.22	0.80	52.02	-1.98	54.00	116	19	Average
3		5194.000	88.56	0.85	89.41	N/A	N/A	116	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

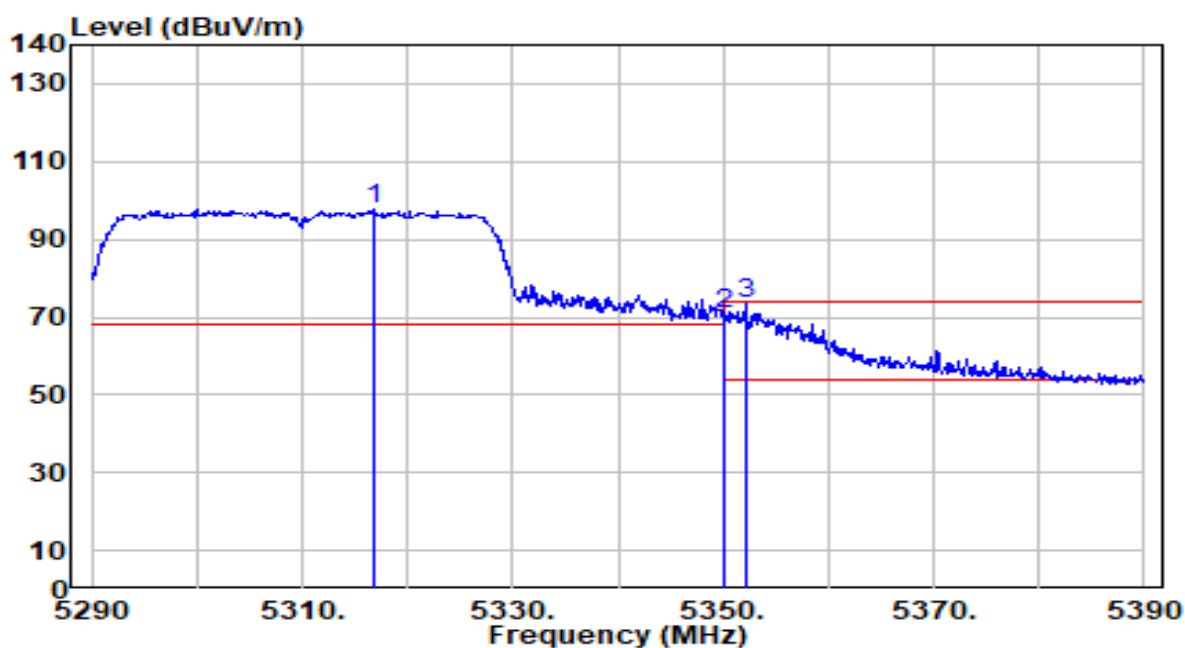


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.800	96.98	0.65	97.63	N/A	N/A	263	301	Peak
2	5350.000	70.29	0.59	70.88	-3.12	74.00	263	301	Peak
3	* 5352.100	72.78	0.59	73.37	-0.63	74.00	263	301	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

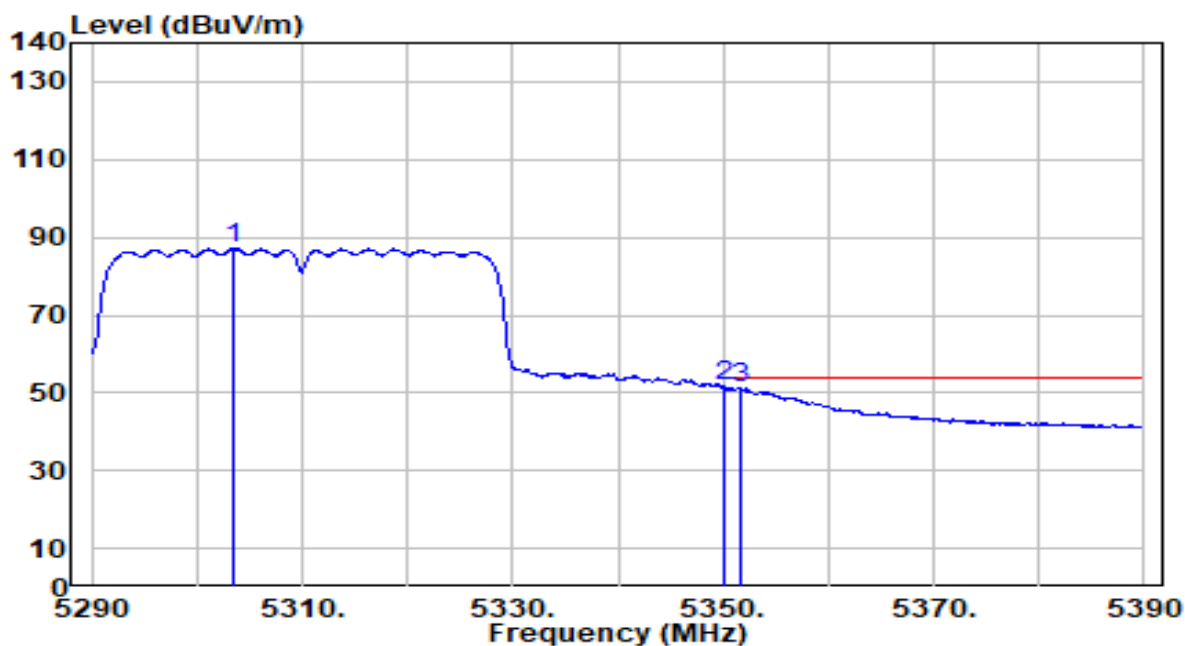


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5303.400	86.45	0.68	87.12	N/A	N/A	263	301	Average
2	* 5350.000	50.93	0.59	51.53	-2.47	54.00	263	301	Average
3	5351.600	50.92	0.59	51.51	-2.49	54.00	263	301	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

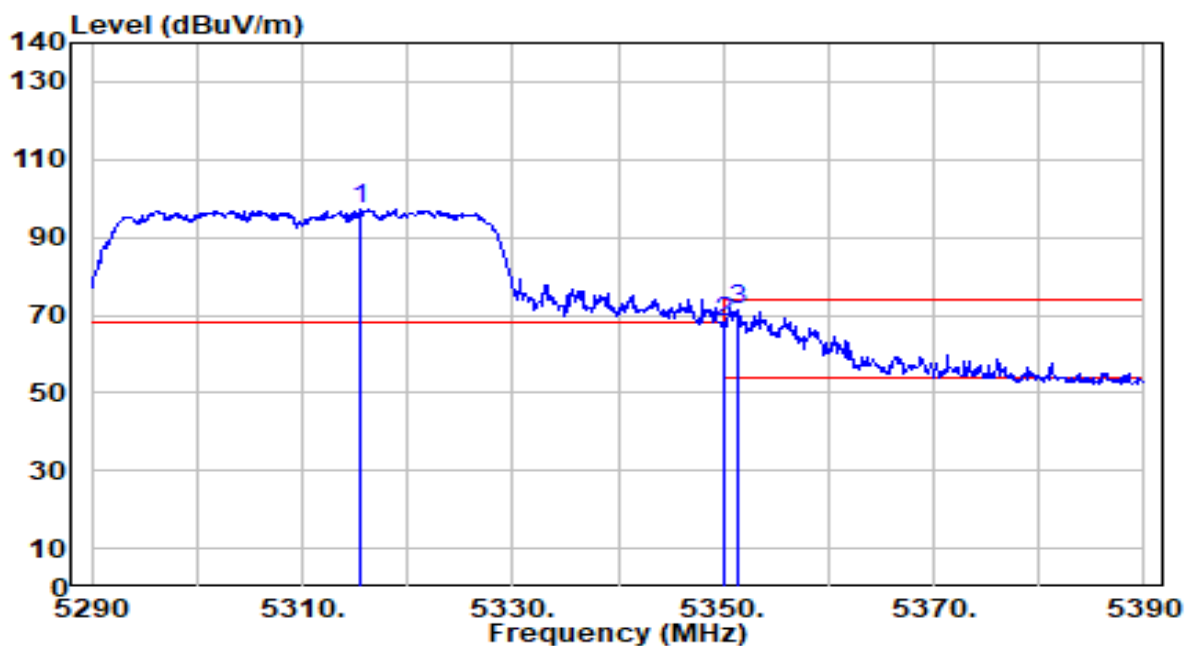


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.500	96.67	0.65	97.32	N/A	N/A	263	339	Peak
2	5350.000	67.57	0.59	68.17	-5.83	74.00	263	339	Peak
3	* 5351.300	70.86	0.59	71.46	-2.54	74.00	263	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

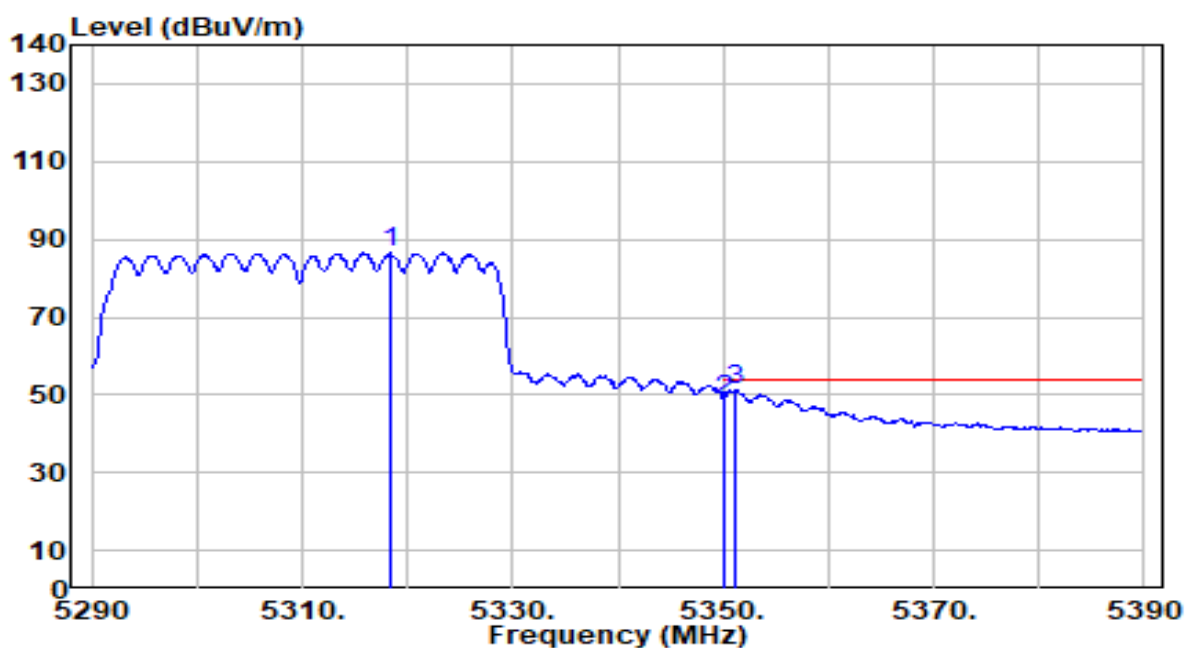


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.300	85.84	0.65	86.49	N/A	N/A	263	339	Average
2	5350.000	48.23	0.59	48.82	-5.18	54.00	263	339	Average
3	* 5351.100	50.51	0.59	51.10	-2.90	54.00	263	339	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

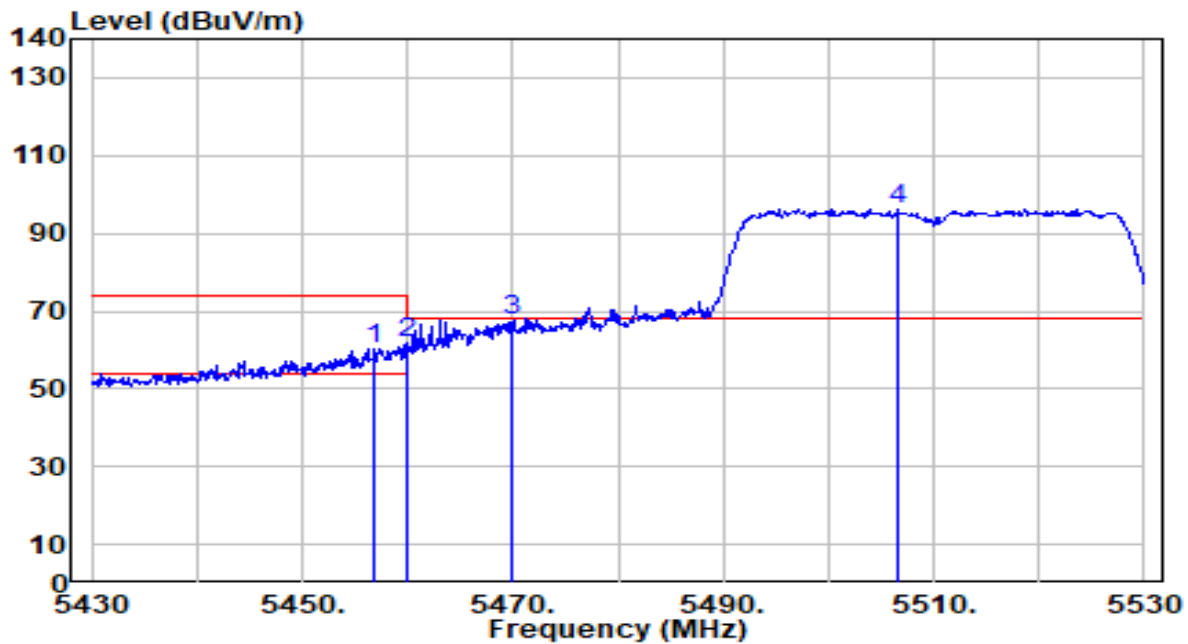


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.900	59.58	0.75	60.33	-13.67	74.00	248	305	Peak
2	5460.000	60.96	0.76	61.72	-12.28	74.00	248	305	Peak
3	* 5470.000	66.84	0.80	67.64	-0.56	68.20	248	305	Peak
4	5506.600	95.24	0.96	96.20	N/A	N/A	248	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

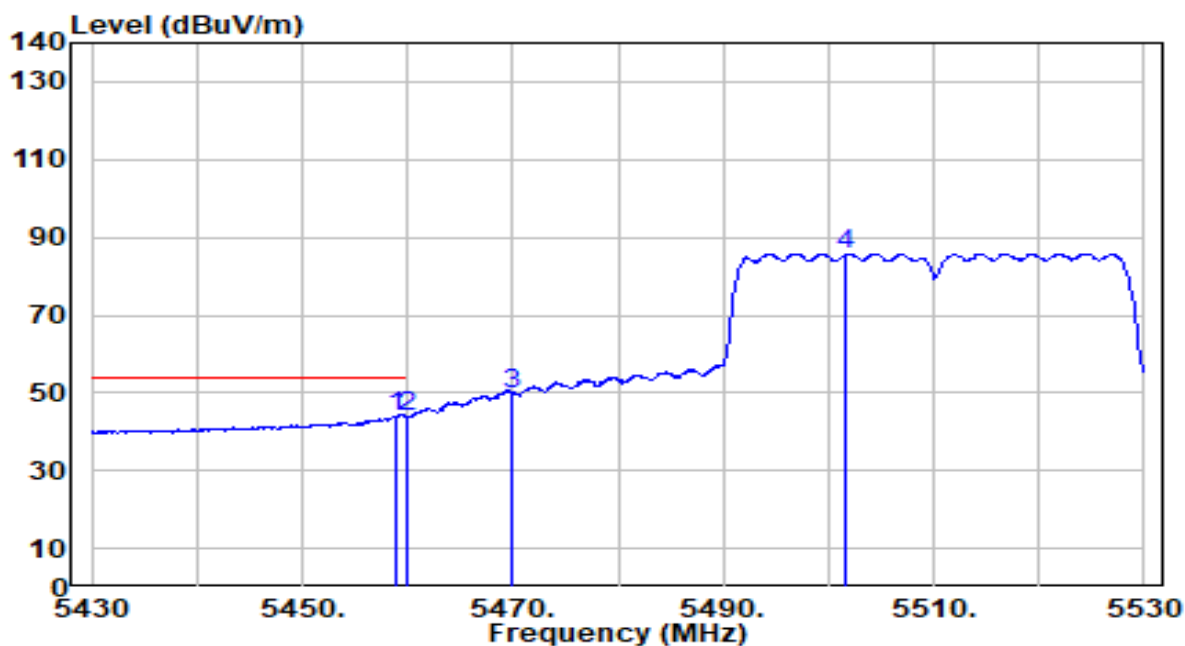


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.900	43.14	0.76	43.90	-10.10	54.00	248	305	Average
2	* 5460.000	43.26	0.76	44.02	-9.98	54.00	248	305	Average
3	5470.000	49.11	0.80	49.92	N/A	N/A	248	305	Average
4	5501.700	84.91	0.94	85.85	N/A	N/A	248	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

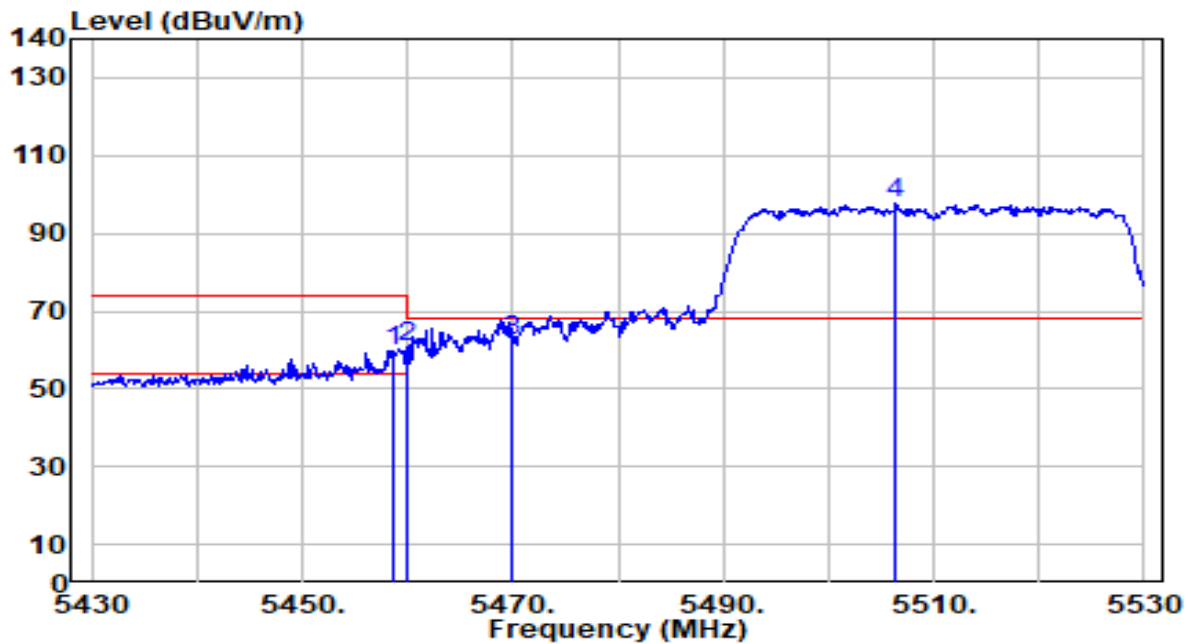


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.700	58.98	0.75	59.74	-14.26	74.00	279	338	Peak
2	5460.000	60.17	0.76	60.93	-13.07	74.00	279	338	Peak
3	* 5470.000	61.31	0.80	62.12	-6.08	68.20	279	338	Peak
4	5506.400	96.55	0.96	97.51	N/A	N/A	279	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

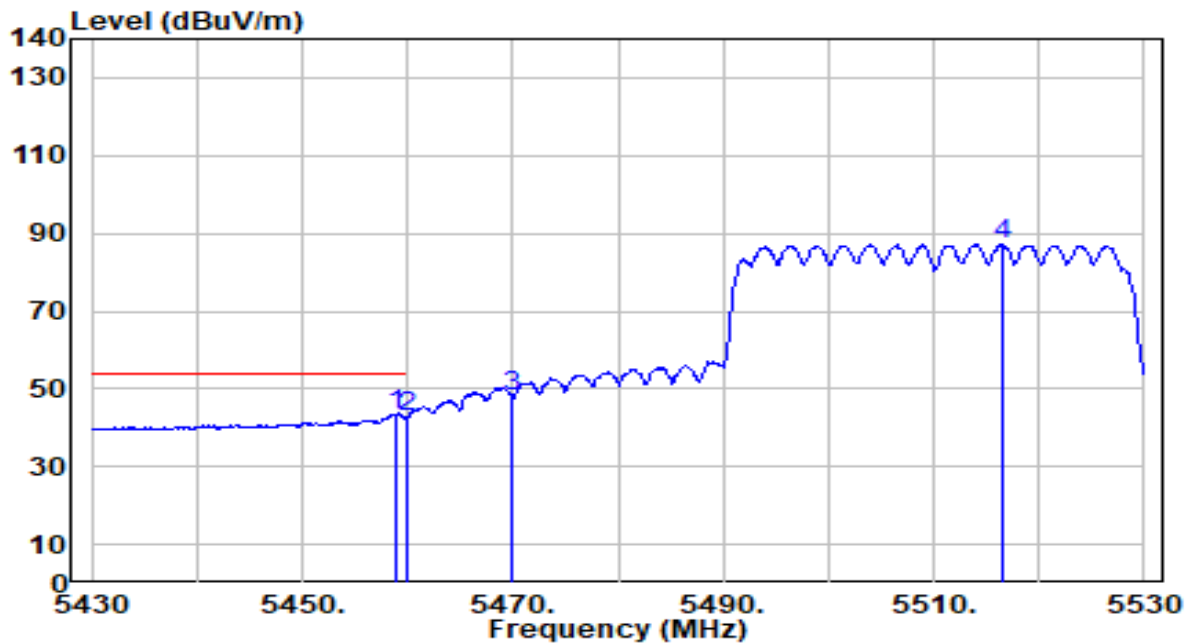


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.800	42.73	0.76	43.49	-10.51	54.00	279	338	Average
2		5460.000	42.02	0.76	42.78	-11.22	54.00	279	338	Average
3		5470.000	47.10	0.80	47.90	N/A	N/A	279	338	Average
4		5516.600	86.10	1.01	87.11	N/A	N/A	279	338	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

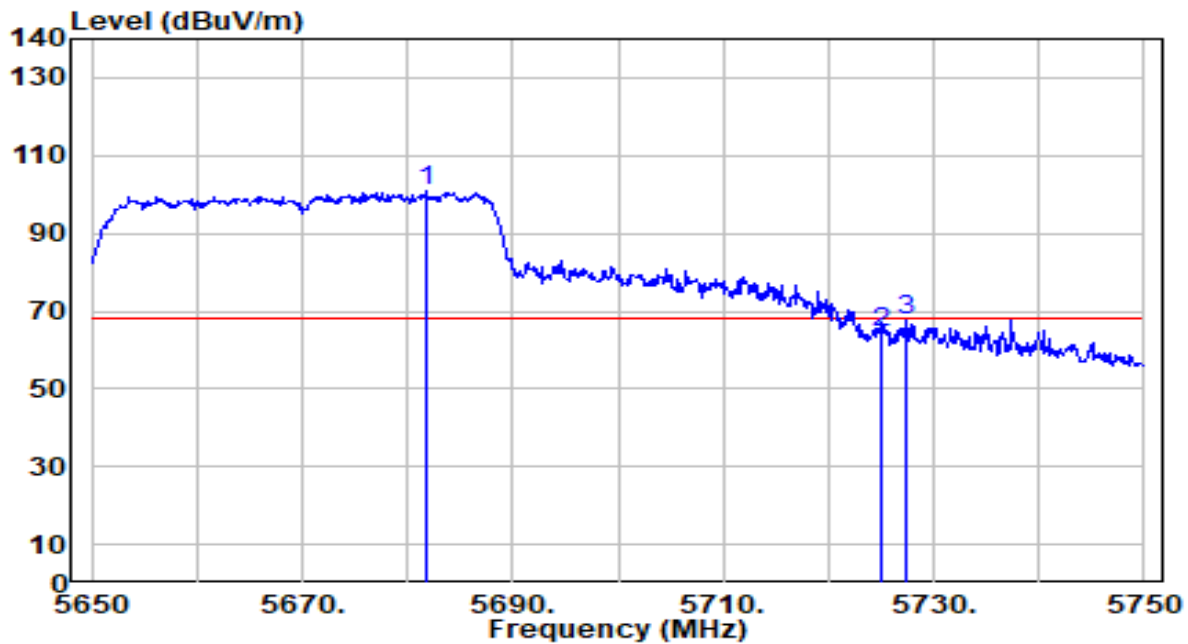


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5681.800	98.95	1.71	100.67	N/A	N/A	260	18	Peak
2	5725.000	62.69	1.89	64.58	-3.62	68.20	260	18	Peak
3	* 5727.500	65.85	1.90	67.75	-0.45	68.20	260	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

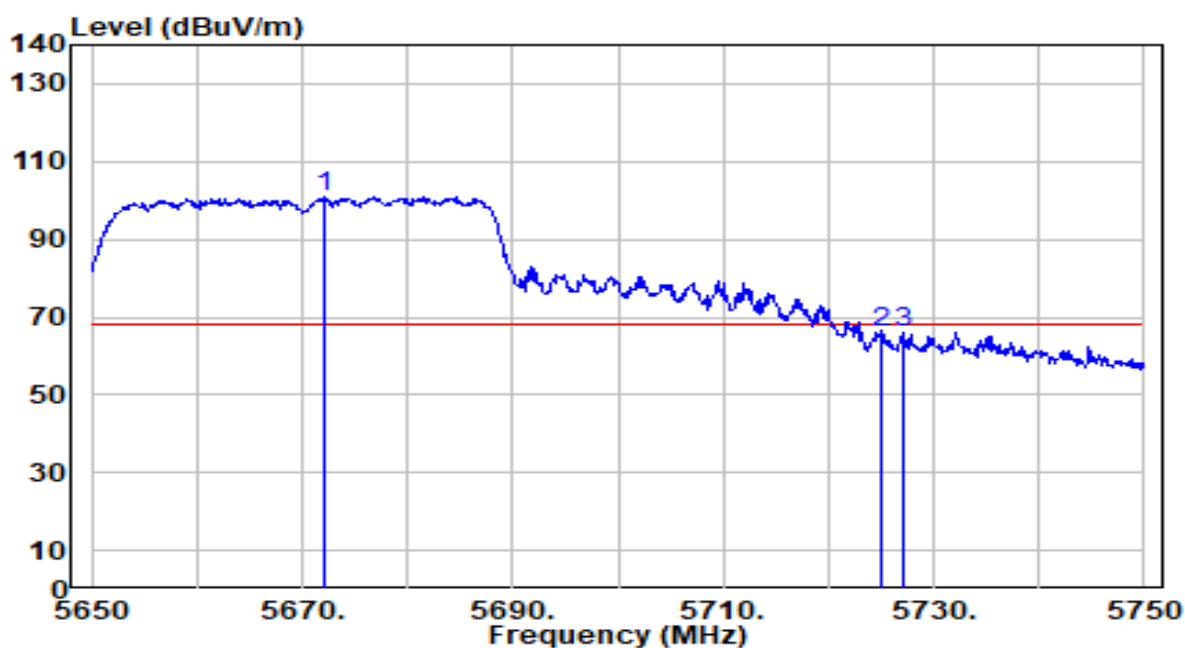


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5672.000	99.37	1.67	101.05	N/A	N/A	254	340	Peak
2	5725.000	64.04	1.89	65.93	-2.27	68.20	254	340	Peak
3	* 5727.000	64.09	1.90	65.99	-2.21	68.20	254	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

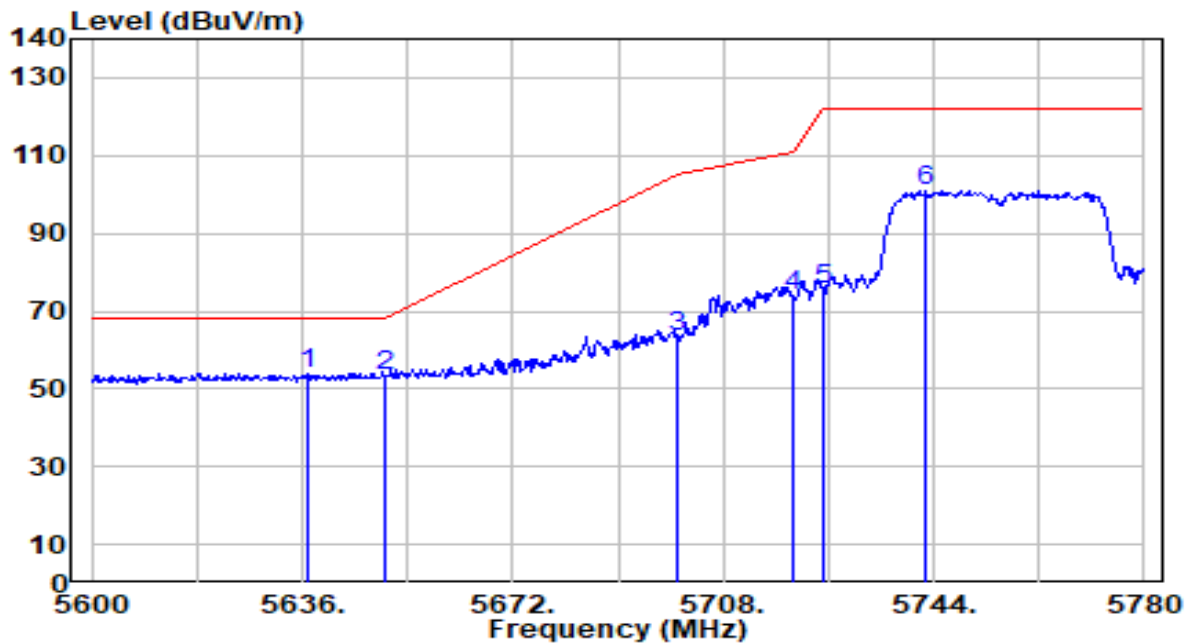


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.900	52.56	1.53	54.09	-14.11	68.20	260	16	Peak
2		5650.000	51.92	1.59	53.51	-14.69	68.20	260	16	Peak
3		5700.000	61.84	1.79	63.63	-41.57	105.20	260	16	Peak
4		5720.000	71.99	1.87	73.86	-36.94	110.80	260	16	Peak
5		5725.000	73.60	1.89	75.49	-46.71	122.20	260	16	Peak
6		5742.740	99.10	1.96	101.06	N/A	N/A	260	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

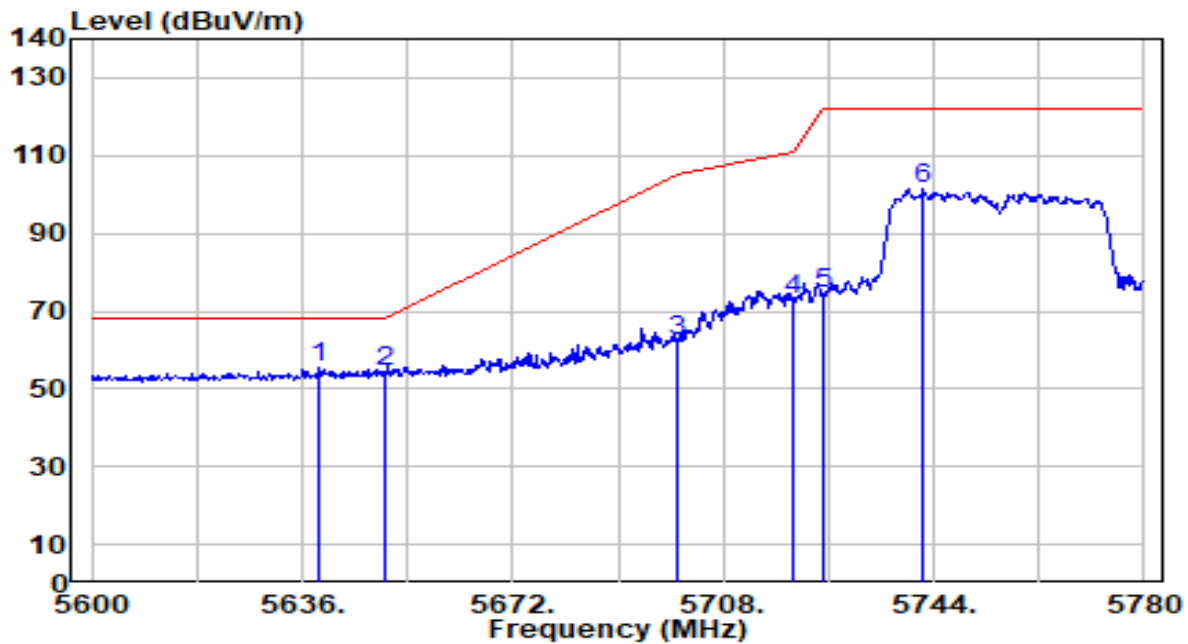


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.880	53.83	1.54	55.37	-12.83	68.20	267	336	Peak
2		5650.000	52.58	1.59	54.17	-14.03	68.20	267	336	Peak
3		5700.000	60.64	1.79	62.43	-42.77	105.20	267	336	Peak
4		5720.000	70.97	1.87	72.83	-37.97	110.80	267	336	Peak
5		5725.000	72.35	1.89	74.23	-47.97	122.20	267	336	Peak
6		5742.200	99.29	1.96	101.25	N/A	N/A	267	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

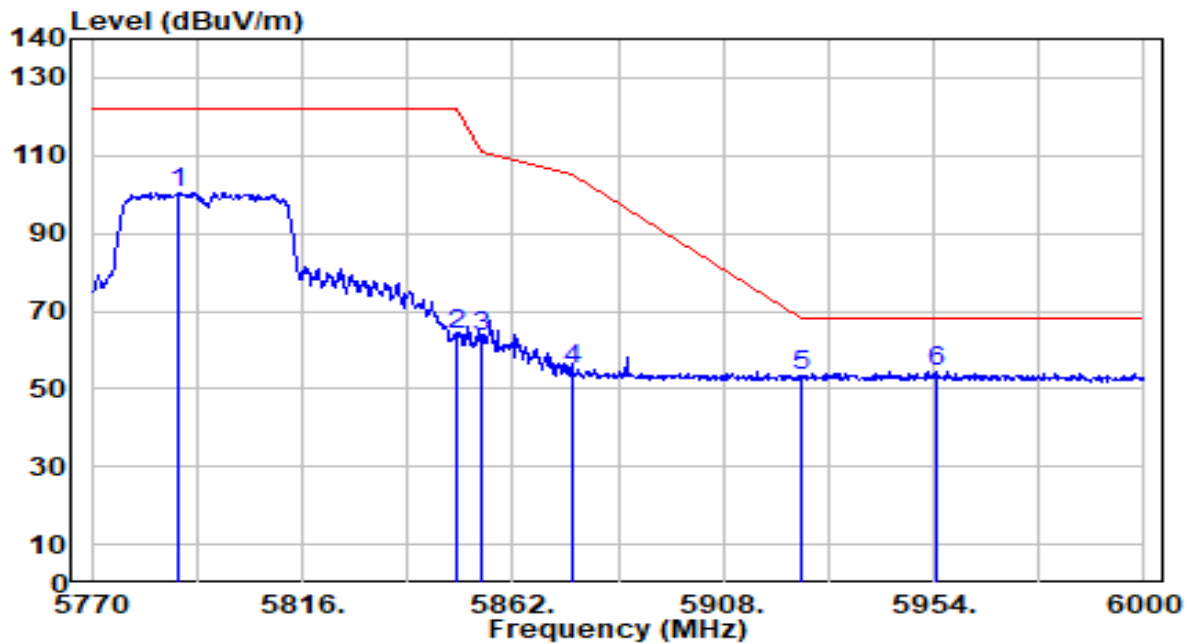


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5788.860	98.35	2.15	100.50	N/A	N/A	247	16	Peak
2	5850.000	61.64	2.27	63.91	-58.29	122.20	247	16	Peak
3	5855.000	60.91	2.28	63.19	-47.61	110.80	247	16	Peak
4	5875.000	52.60	2.31	54.91	-50.29	105.20	247	16	Peak
5	5925.000	50.96	2.38	53.34	-14.86	68.20	247	16	Peak
6	* 5954.690	52.14	2.43	54.57	-13.63	68.20	247	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

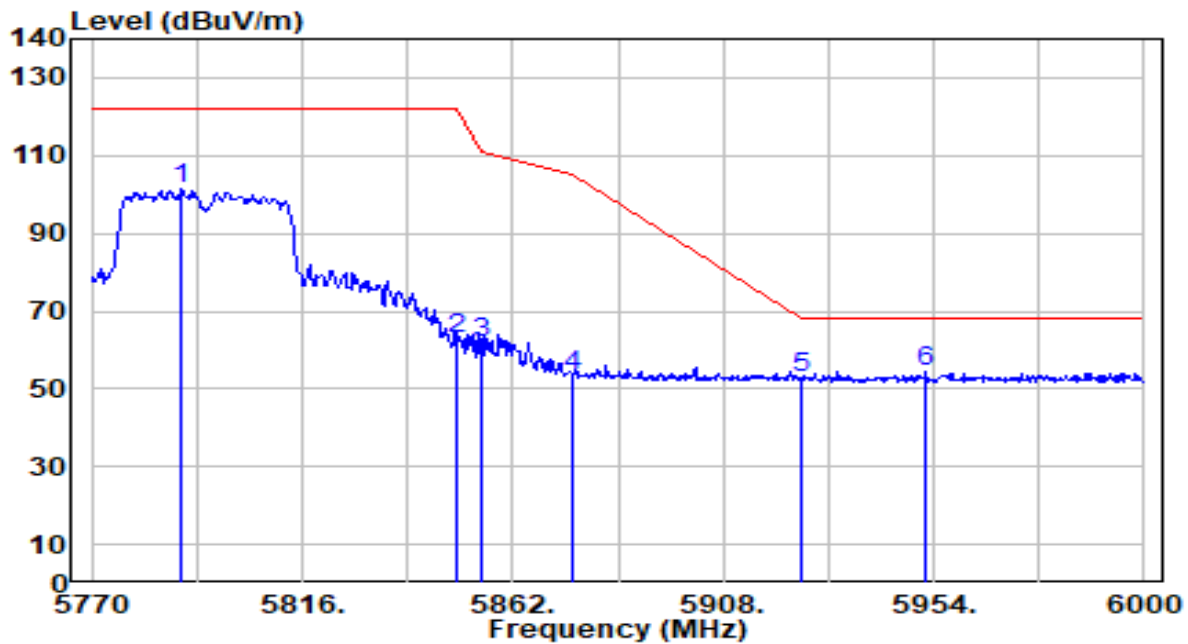


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5789.550	99.42	2.15	101.57	N/A	N/A	267	336	Peak
2	5850.000	60.77	2.27	63.04	-59.16	122.20	267	336	Peak
3	5855.000	59.67	2.28	61.95	-48.85	110.80	267	336	Peak
4	5875.000	51.22	2.31	53.53	-51.67	105.20	267	336	Peak
5	5925.000	50.42	2.38	52.81	-15.39	68.20	267	336	Peak
6	* 5952.160	52.04	2.43	54.46	-13.74	68.20	267	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

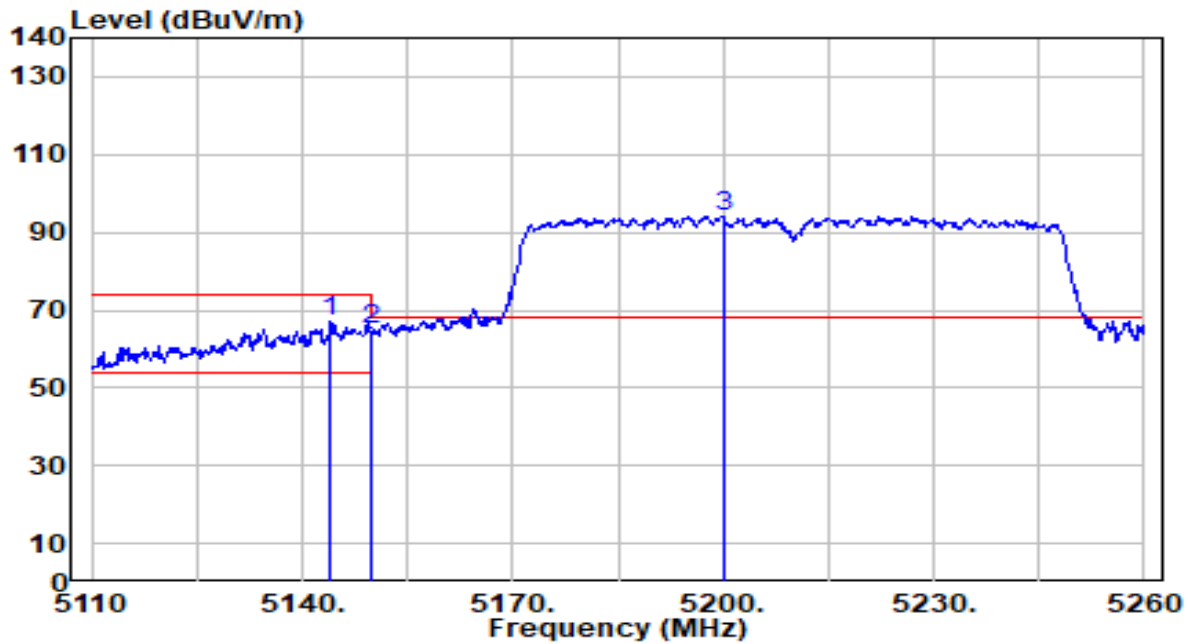


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.050	66.19	0.79	66.98	-7.02	74.00	223	324	Peak
2		5150.000	64.41	0.80	65.21	-8.79	74.00	223	324	Peak
3		5200.000	93.41	0.86	94.26	N/A	N/A	223	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

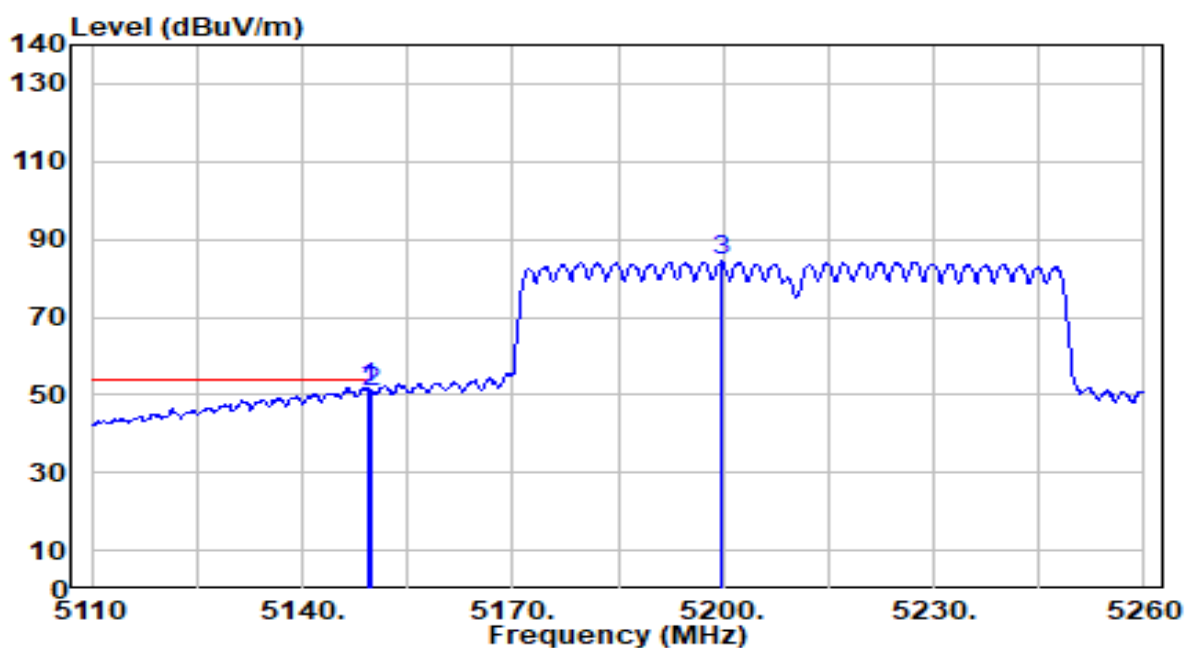


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.300	50.99	0.80	51.79	-2.21	54.00	223	324	Average
2		5150.000	49.74	0.80	50.54	-3.46	54.00	223	324	Average
3		5199.700	83.52	0.86	84.38	N/A	N/A	223	324	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

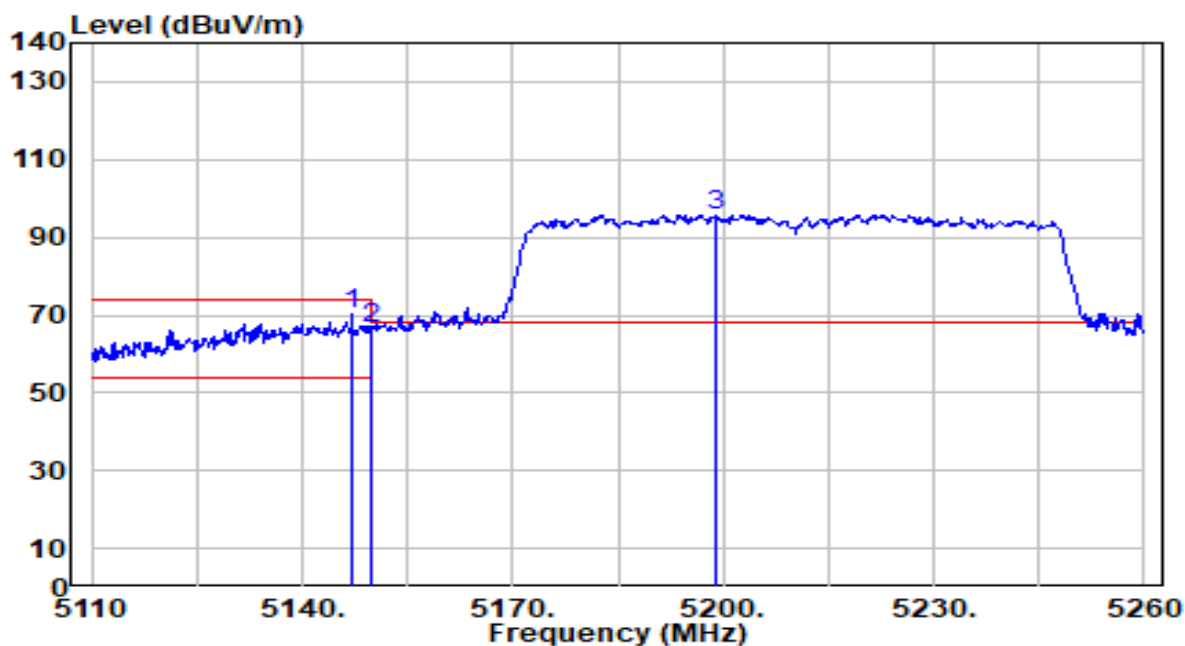


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.050	69.37	0.79	70.17	-3.83	74.00	116	19	Peak
2	5150.000	65.53	0.80	66.32	-7.68	74.00	116	19	Peak
3	5198.800	95.01	0.86	95.86	N/A	N/A	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

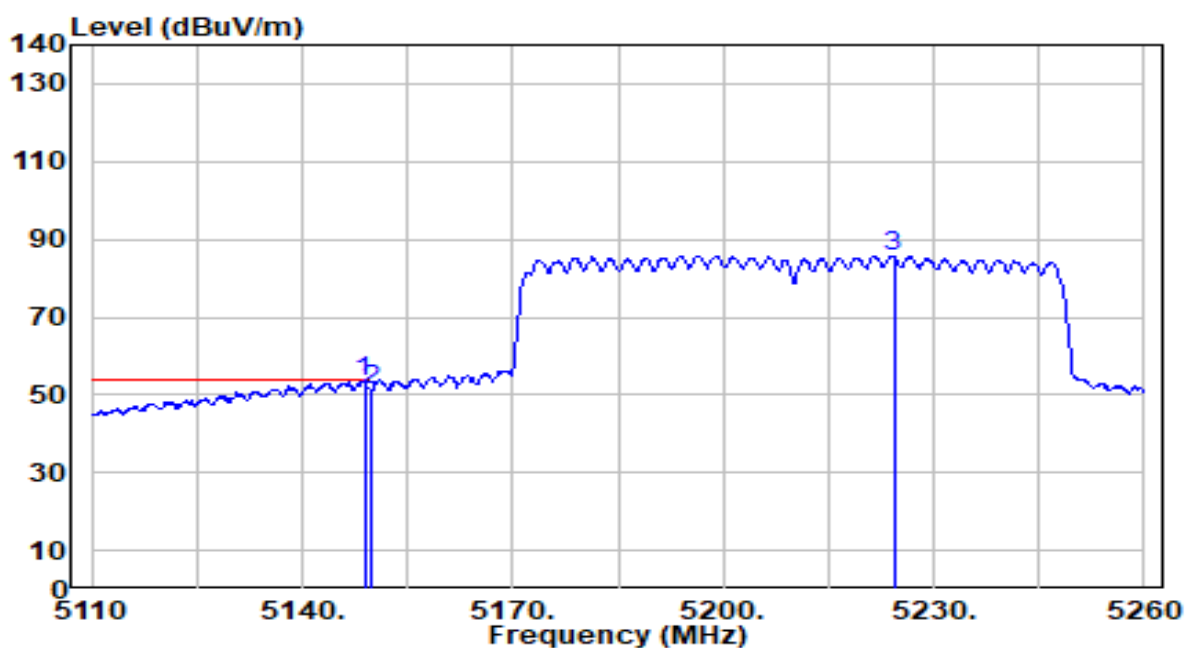


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	52.71	0.79	53.51	-0.49	54.00	116	19	Average
2		5150.000	50.69	0.80	51.49	-2.51	54.00	116	19	Average
3		5224.300	84.92	0.82	85.74	N/A	N/A	116	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

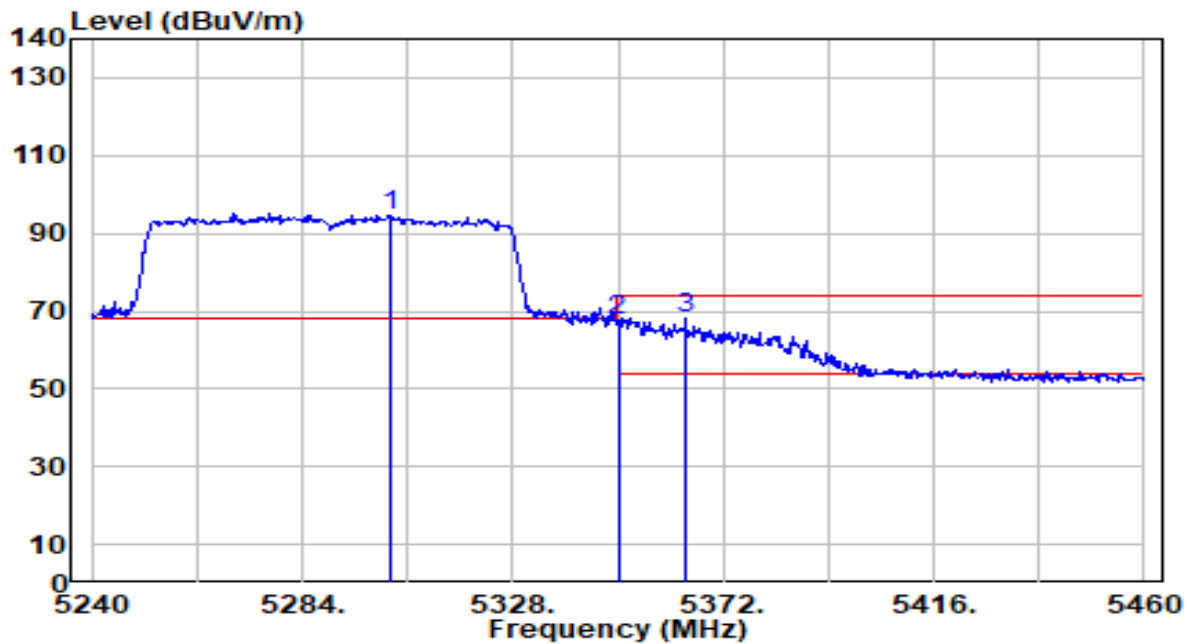


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5302.260	94.02	0.68	94.70	N/A	N/A	244	305	Peak
2	5350.000	67.26	0.59	67.86	-6.14	74.00	244	305	Peak
3	* 5364.080	67.74	0.57	68.31	-5.69	74.00	244	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

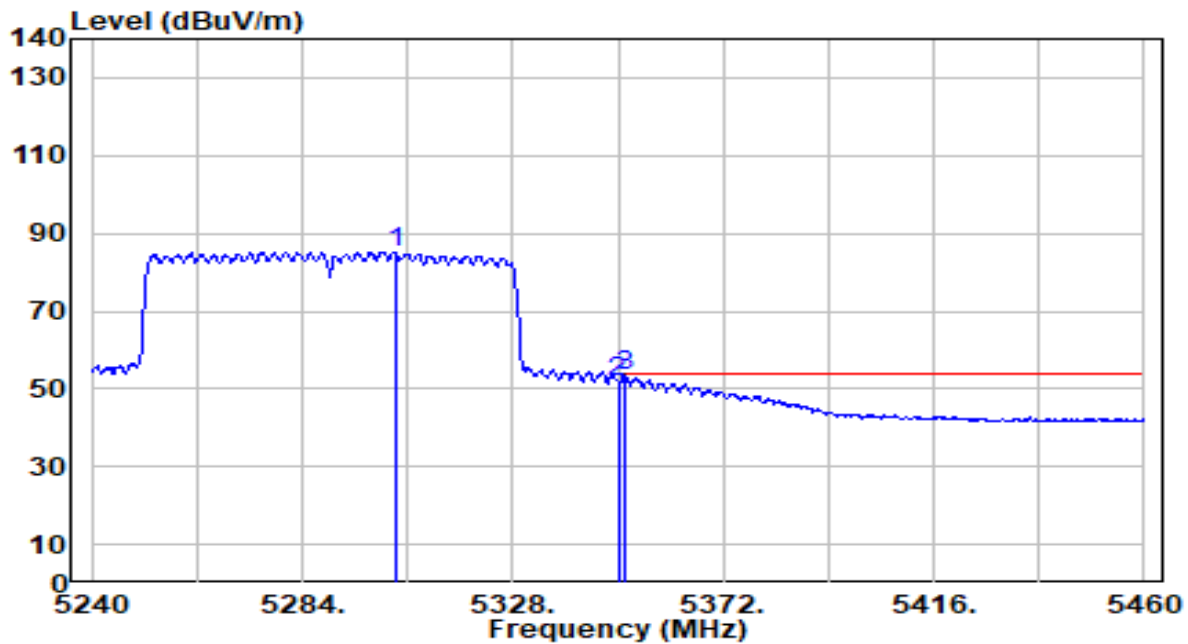


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5303.360	84.62	0.68	85.30	N/A	N/A	244	305	Average
2	5350.000	51.12	0.59	51.72	-2.28	54.00	244	305	Average
3	* 5351.540	52.68	0.59	53.27	-0.73	54.00	244	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

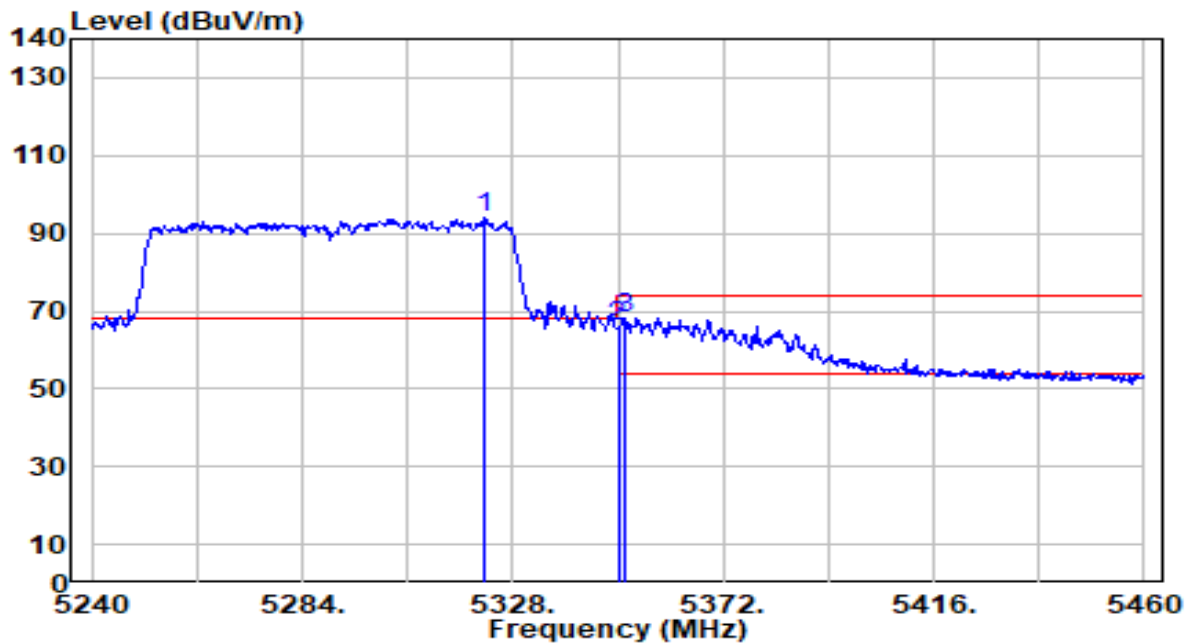


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.280	93.17	0.64	93.81	N/A	N/A	263	339	Peak
2	5350.000	65.59	0.59	66.18	-7.82	74.00	263	339	Peak
3	* 5351.320	67.72	0.59	68.31	-5.69	74.00	263	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

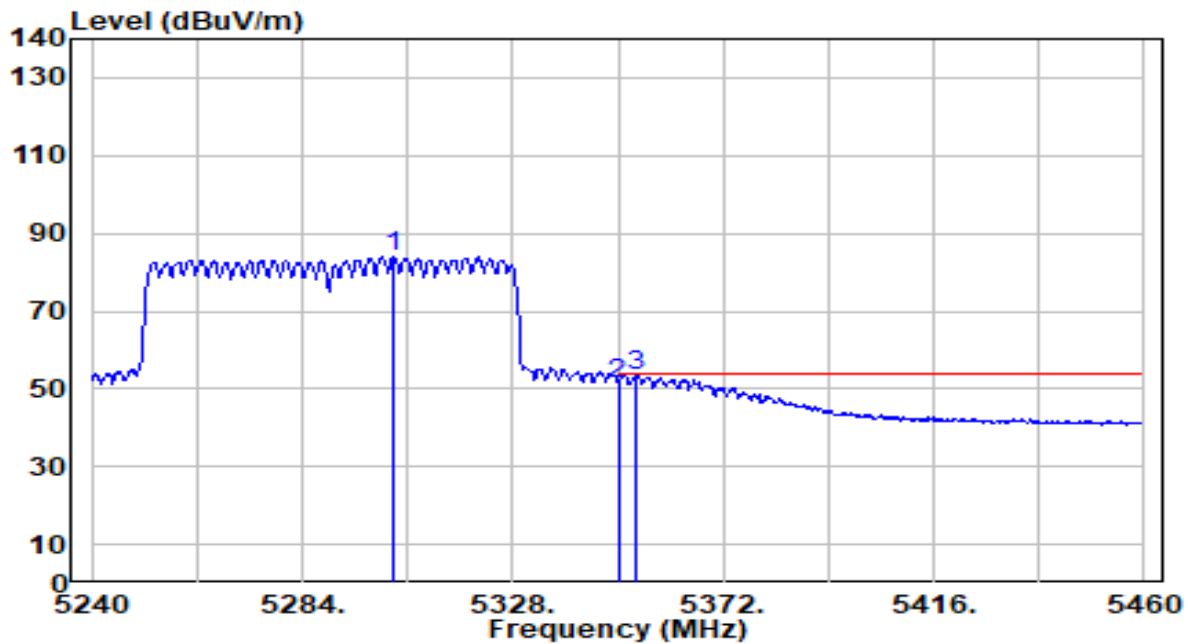


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5302.920	83.17	0.68	83.85	N/A	N/A	263	339	Average
2	5350.000	50.43	0.59	51.03	-2.97	54.00	263	339	Average
3	* 5353.520	52.99	0.59	53.58	-0.42	54.00	263	339	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

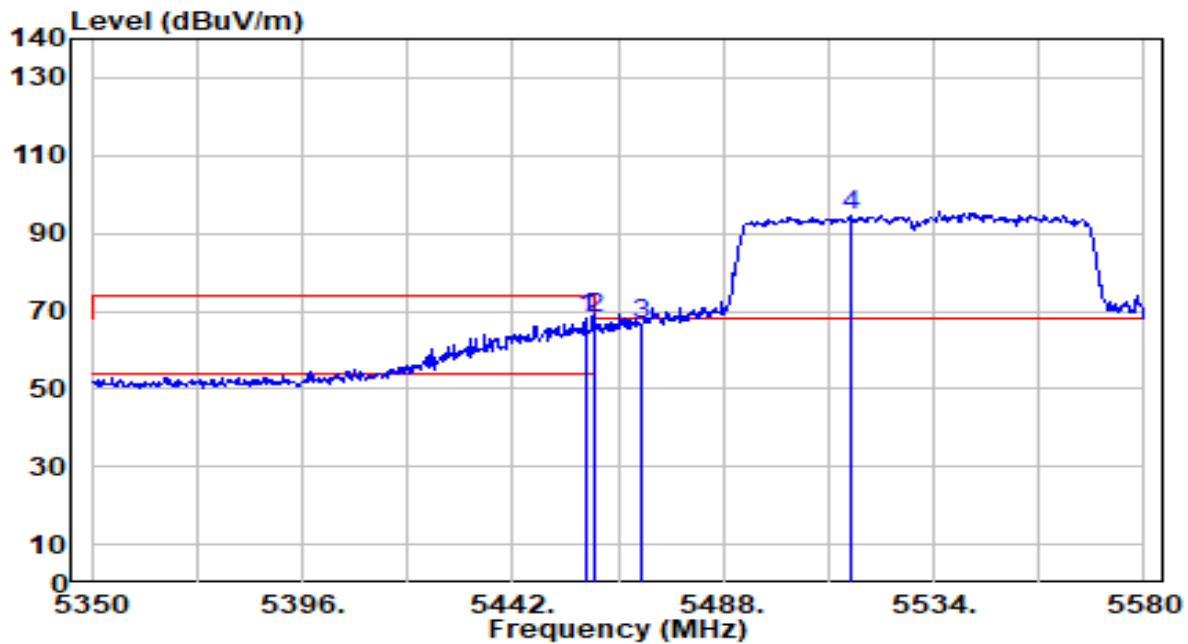


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	67.40	0.75	68.15	-5.85	74.00	230	314	Peak
2	5460.000	67.58	0.76	68.34	-5.66	74.00	230	314	Peak
3	* 5470.000	65.89	0.80	66.69	-1.51	68.20	230	314	Peak
4	5516.060	93.52	1.00	94.52	N/A	N/A	230	314	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

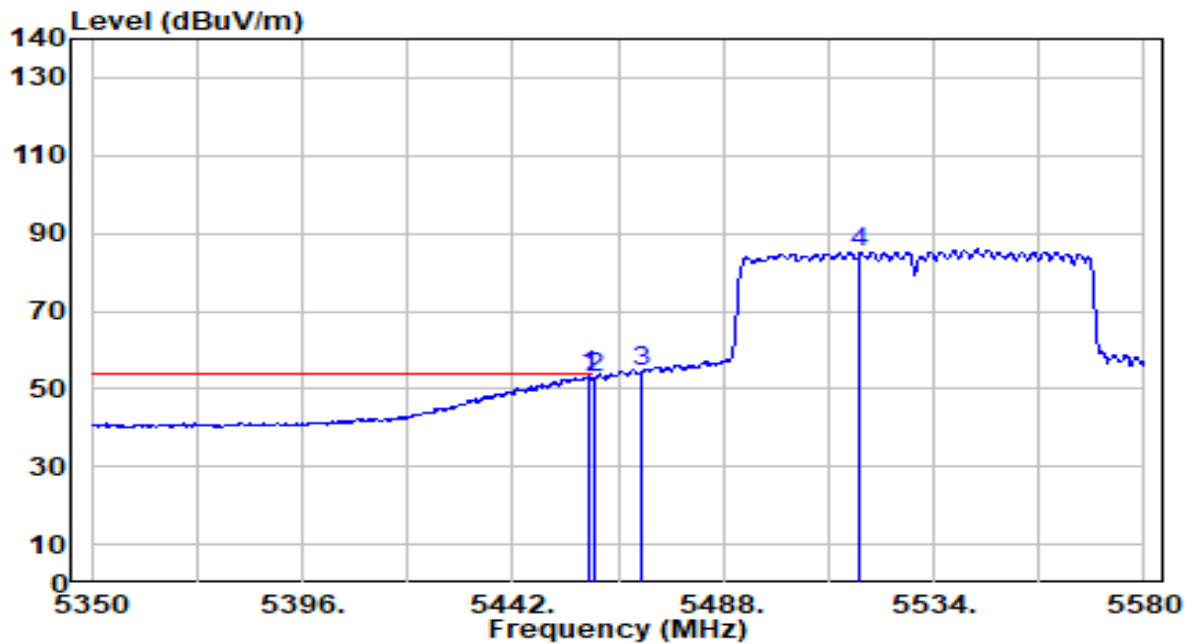


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.560	52.48	0.75	53.23	-0.77	54.00	230	314	Average
2		5460.000	51.96	0.76	52.72	-1.28	54.00	230	314	Average
3		5470.000	53.44	0.80	54.24	N/A	N/A	230	314	Average
4		5517.900	84.07	1.01	85.08	N/A	N/A	230	314	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

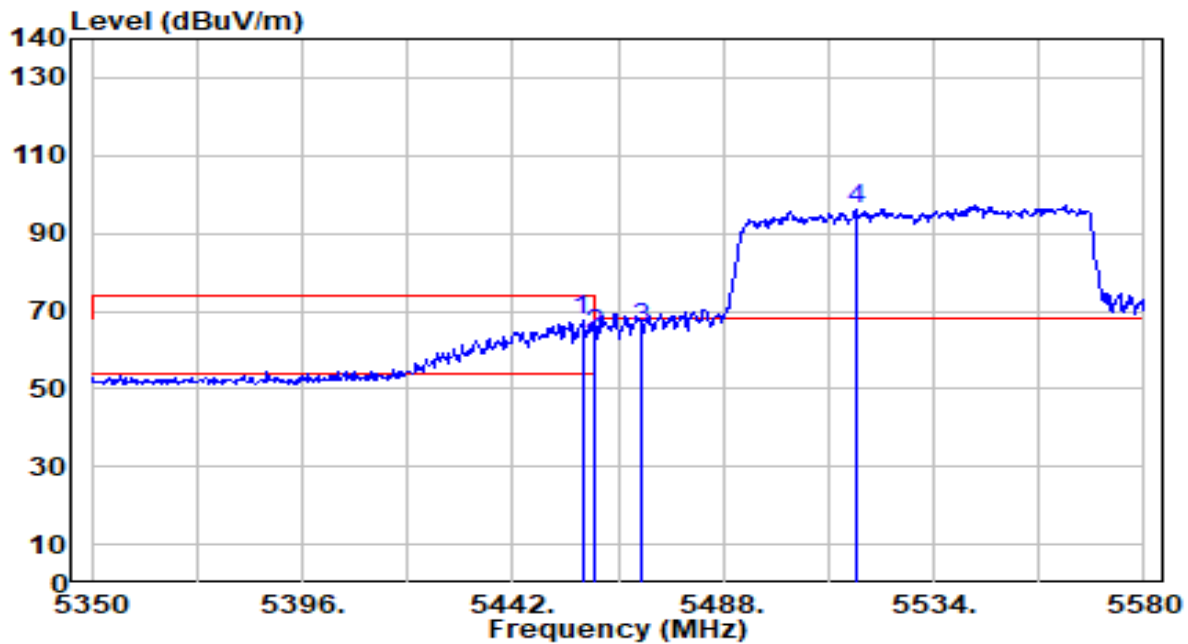


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.180	66.72	0.75	67.46	-6.54	74.00	262	339	Peak
2	5460.000	63.13	0.76	63.89	-10.11	74.00	262	339	Peak
3	* 5470.000	64.71	0.80	65.52	-2.68	68.20	262	339	Peak
4	5516.980	95.17	1.01	96.18	N/A	N/A	262	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

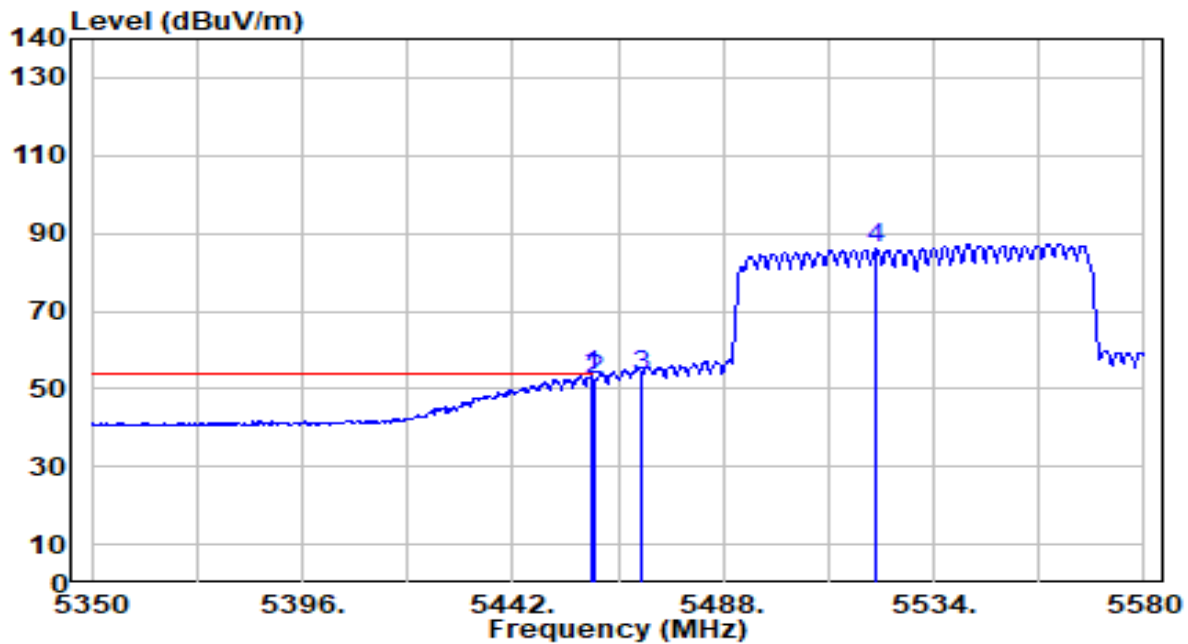


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5459.020	52.78	0.76	53.54	-0.46	54.00	262	339	Average
2		5460.000	51.54	0.76	52.30	-1.70	54.00	262	339	Average
3		5470.000	52.36	0.80	53.16	N/A	N/A	262	339	Average
4		5521.350	85.24	1.03	86.27	N/A	N/A	262	339	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C / 64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

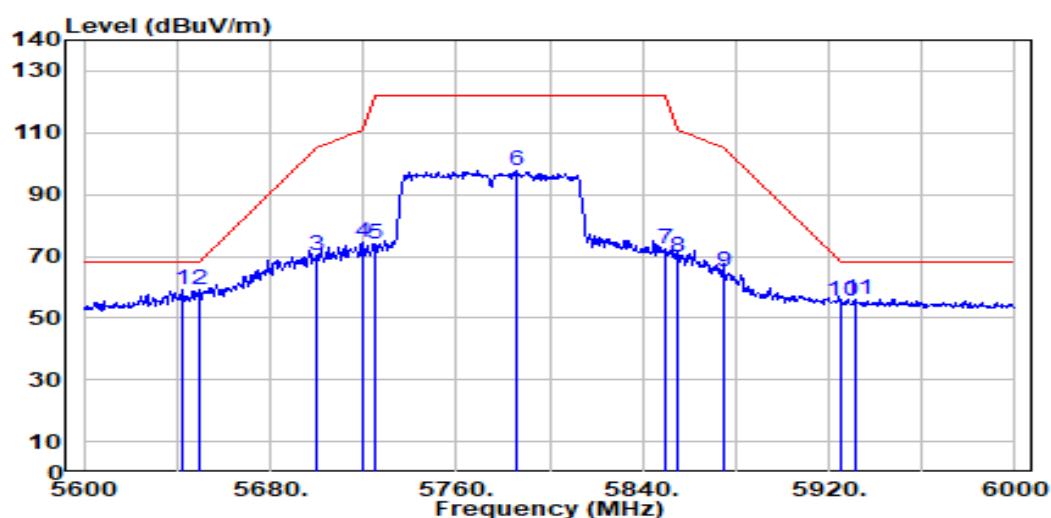


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5642.800	57.38	1.56	58.94	-9.26	68.20	260	16	Peak
2	* 5650.000	57.82	1.59	59.41	-8.79	68.20	260	16	Peak
3	5700.000	68.48	1.79	70.27	-34.93	105.20	260	16	Peak
4	5720.000	72.46	1.87	74.33	-36.47	110.80	260	16	Peak
5	5725.000	71.93	1.89	73.82	-48.38	122.20	260	16	Peak
6	5786.000	95.49	2.14	97.63	N/A	N/A	260	16	Peak
7	5850.000	70.09	2.27	72.36	-49.84	122.20	260	16	Peak
8	5855.000	67.38	2.28	69.66	-41.14	110.80	260	16	Peak
9	5875.000	62.91	2.31	65.22	-39.98	105.20	260	16	Peak
10	5925.000	52.96	2.38	55.34	-12.86	68.20	260	16	Peak
11	5932.000	53.77	2.40	56.16	-12.04	68.20	260	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

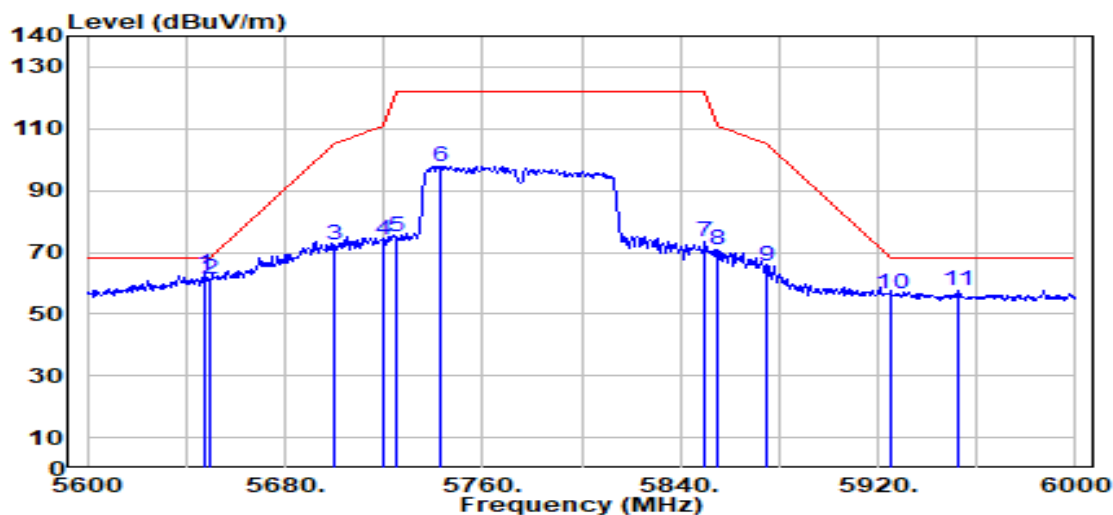


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.200	61.18	1.57	62.75	-5.45	68.20	267	336	Peak
2		5650.000	59.63	1.59	61.22	-6.98	68.20	267	336	Peak
3		5700.000	70.53	1.79	72.31	-32.89	105.20	267	336	Peak
4		5720.000	72.02	1.87	73.89	-36.91	110.80	267	336	Peak
5		5725.000	72.90	1.89	74.79	-47.41	122.20	267	336	Peak
6		5743.200	95.95	1.96	97.91	N/A	N/A	267	336	Peak
7		5850.000	71.17	2.27	73.44	-48.76	122.20	267	336	Peak
8		5855.000	68.26	2.28	70.53	-40.27	110.80	267	336	Peak
9		5875.000	62.99	2.31	65.30	-39.90	105.20	267	336	Peak
10		5925.000	54.18	2.38	56.57	-11.63	68.20	267	336	Peak
11		5952.400	55.07	2.43	57.50	-10.70	68.20	267	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

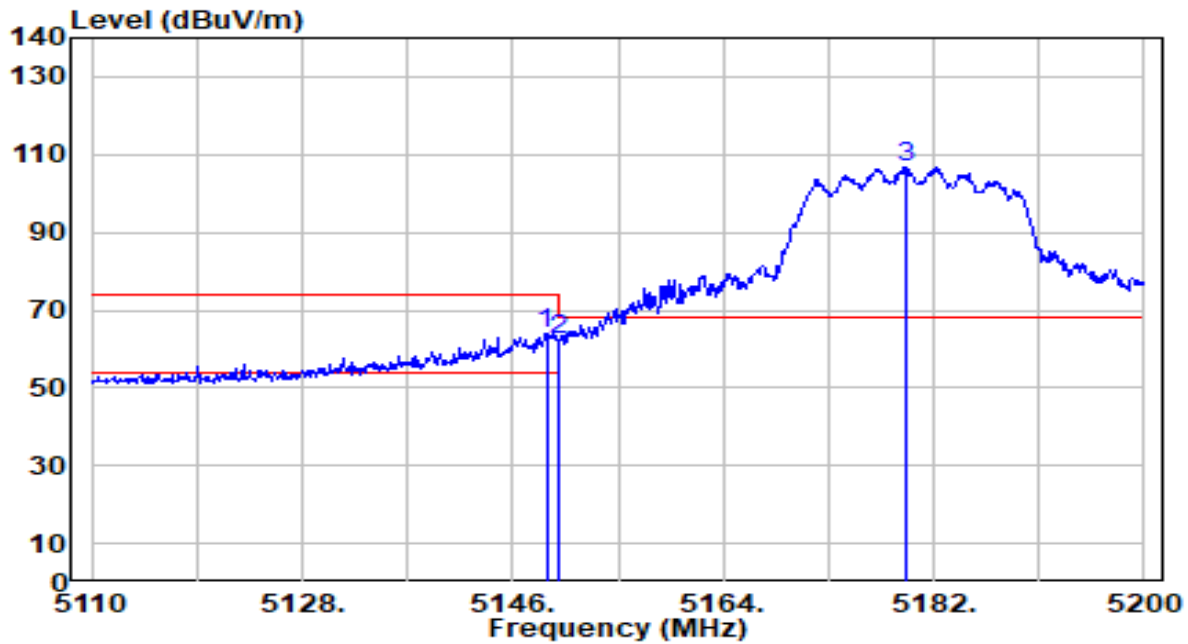


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.880	63.34	0.79	64.14	-9.86	74.00	223	324	Peak
2		5150.000	61.31	0.80	62.10	-11.90	74.00	223	324	Peak
3		5179.750	105.81	0.83	106.64	N/A	N/A	223	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

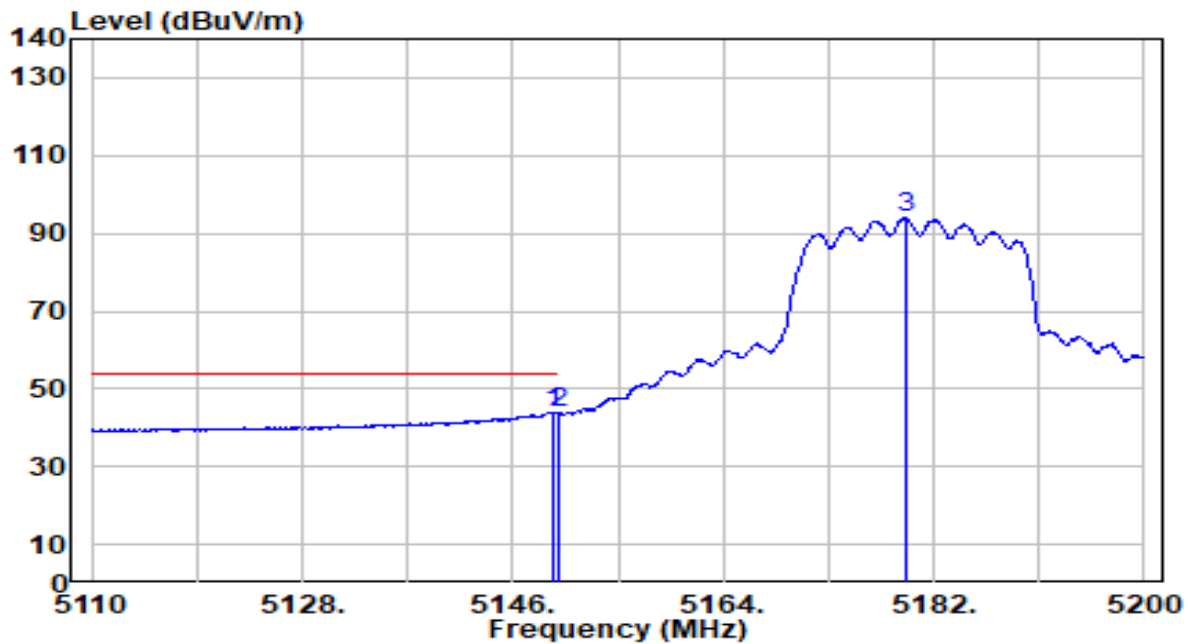


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	43.12	0.80	43.91	-10.09	54.00	223	324	Average
2		5150.000	42.89	0.80	43.68	-10.32	54.00	223	324	Average
3		5179.570	93.01	0.83	93.85	N/A	N/A	223	324	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

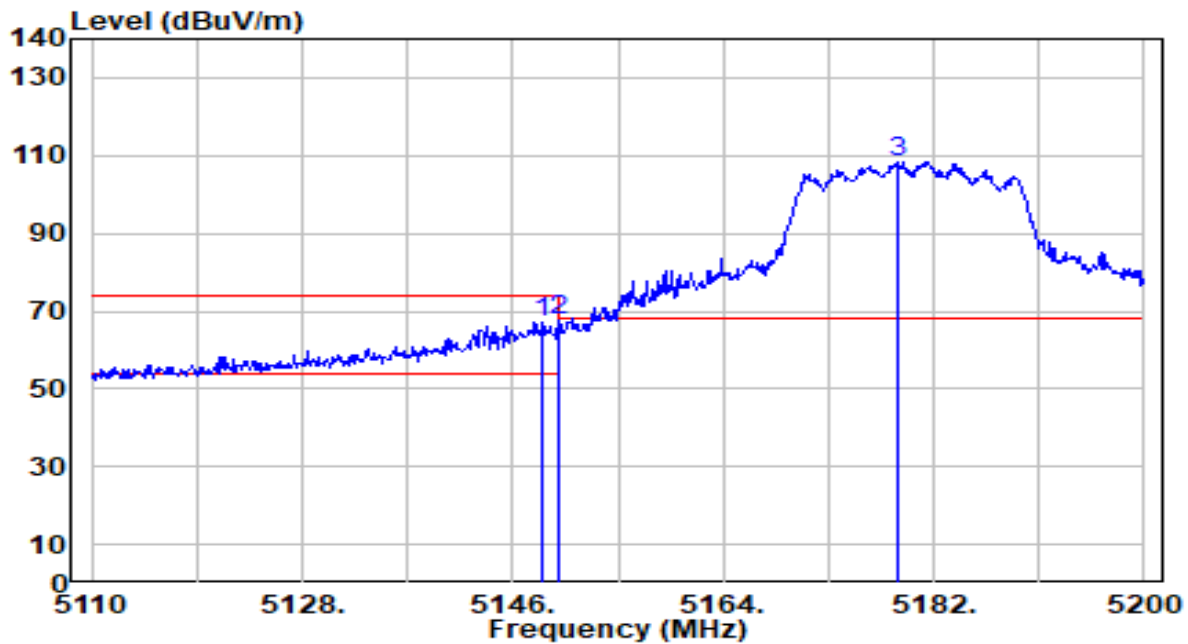


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.520	66.41	0.79	67.21	-6.79	74.00	110	19	Peak
2	* 5150.000	66.86	0.80	67.66	-6.34	74.00	110	19	Peak
3	5178.940	107.64	0.83	108.47	N/A	N/A	110	19	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

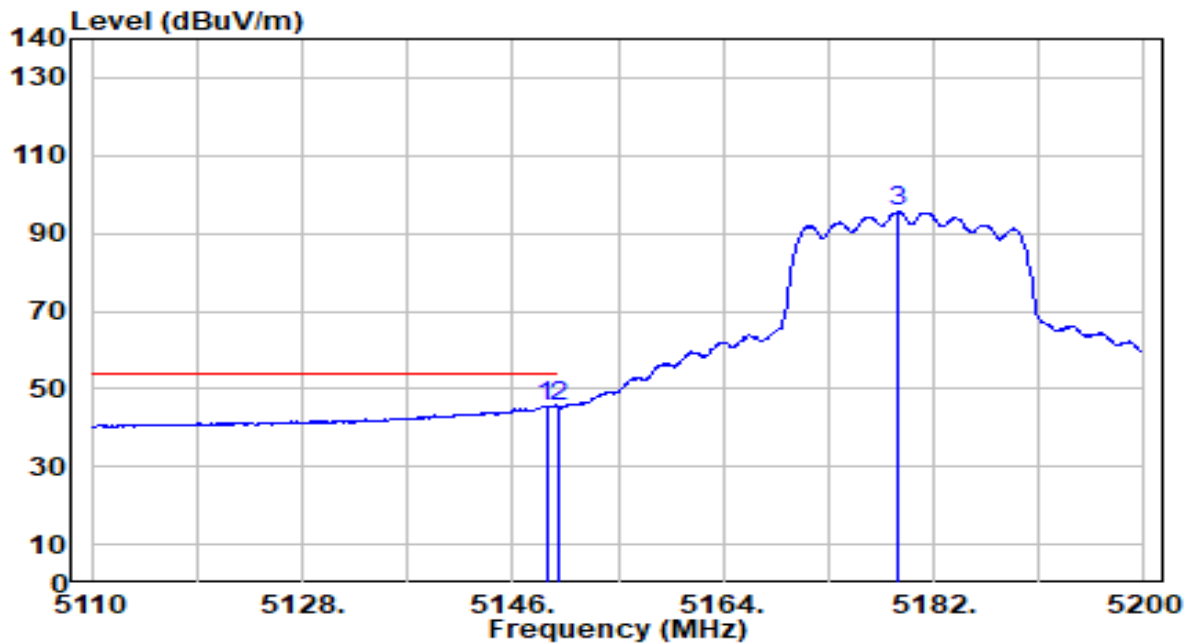


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.880	44.80	0.79	45.59	-8.41	54.00	110	19	Average
2		5150.000	44.46	0.80	45.25	-8.75	54.00	110	19	Average
3		5178.940	94.74	0.83	95.58	N/A	N/A	110	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

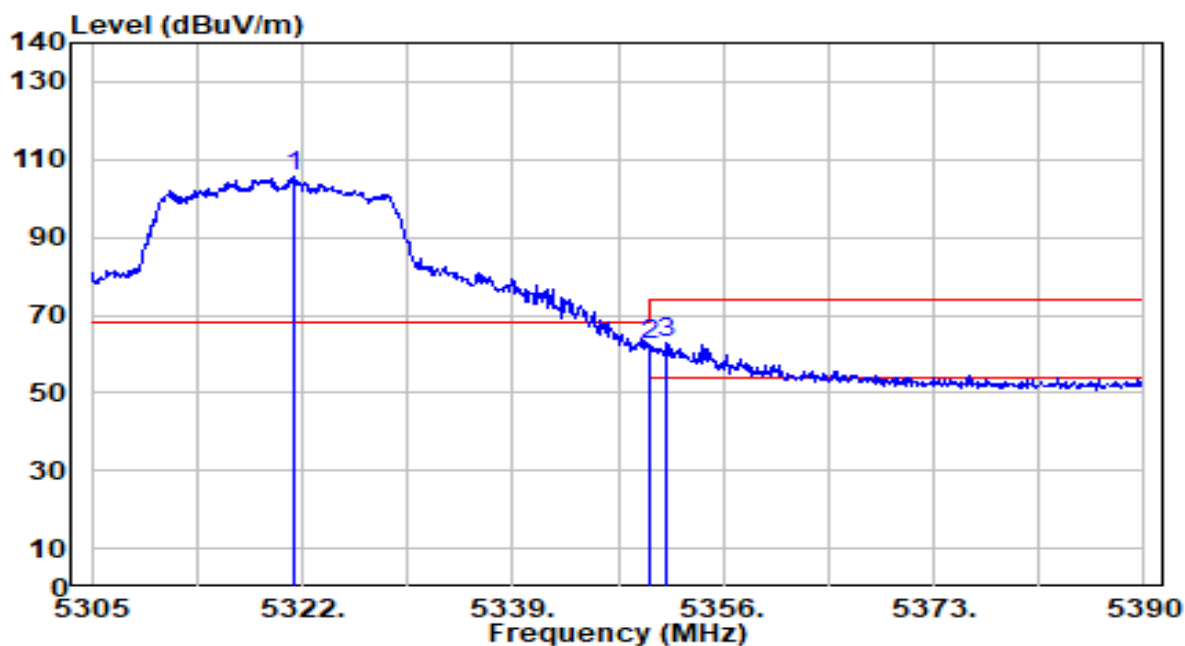


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.320	105.16	0.64	105.80	N/A	N/A	263	301	Peak
2	5350.000	61.78	0.59	62.37	-11.63	74.00	263	301	Peak
3	* 5351.495	62.15	0.59	62.74	-11.26	74.00	263	301	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

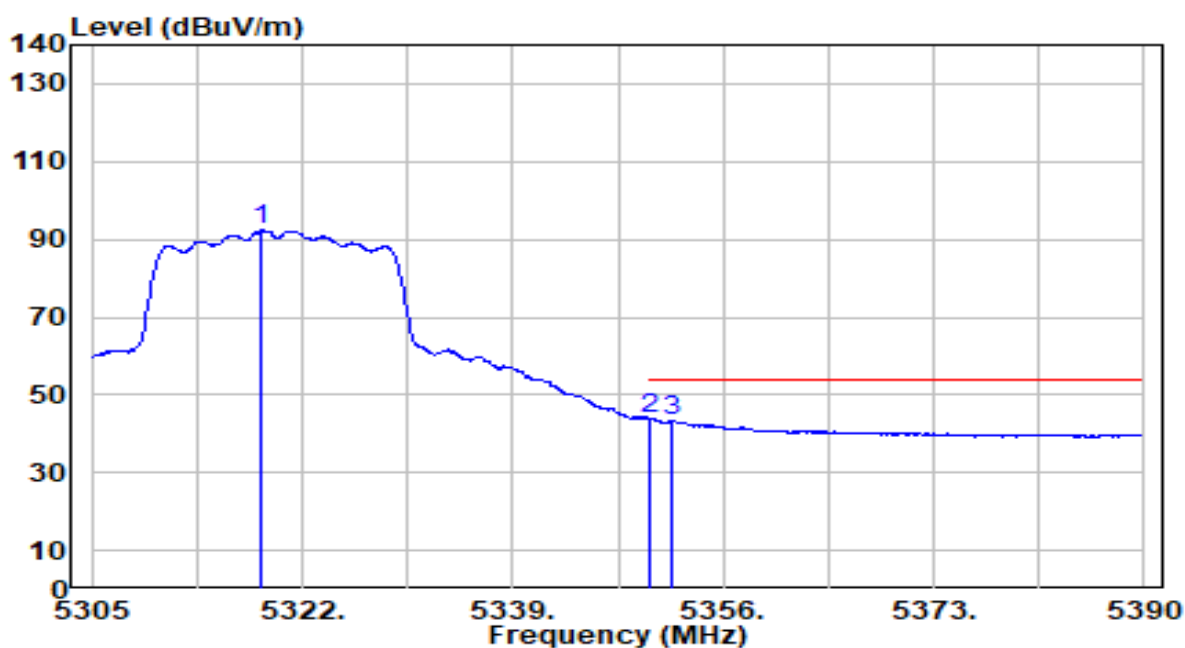


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.770	91.81	0.65	92.45	N/A	N/A	263	301	Average
2	* 5350.000	43.20	0.59	43.79	-10.21	54.00	263	301	Average
3	5351.920	42.56	0.59	43.15	-10.85	54.00	263	301	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

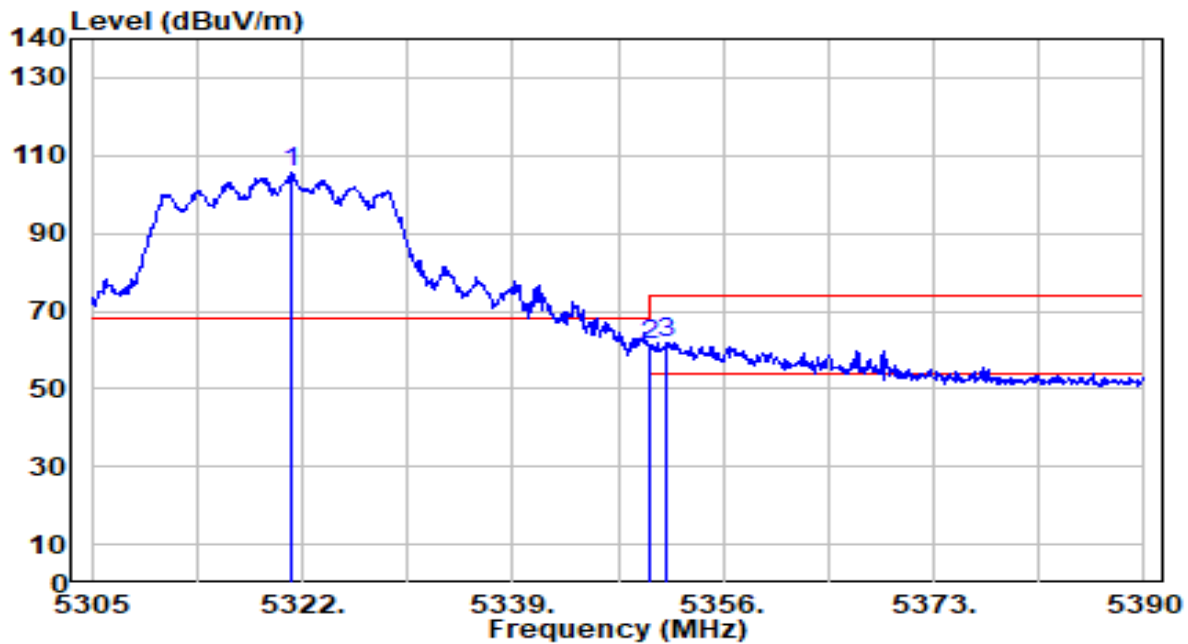


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.065	104.99	0.64	105.63	N/A	N/A	263	331	Peak
2	5350.000	60.43	0.59	61.03	-12.97	74.00	263	331	Peak
3	* 5351.325	61.38	0.59	61.97	-12.03	74.00	263	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

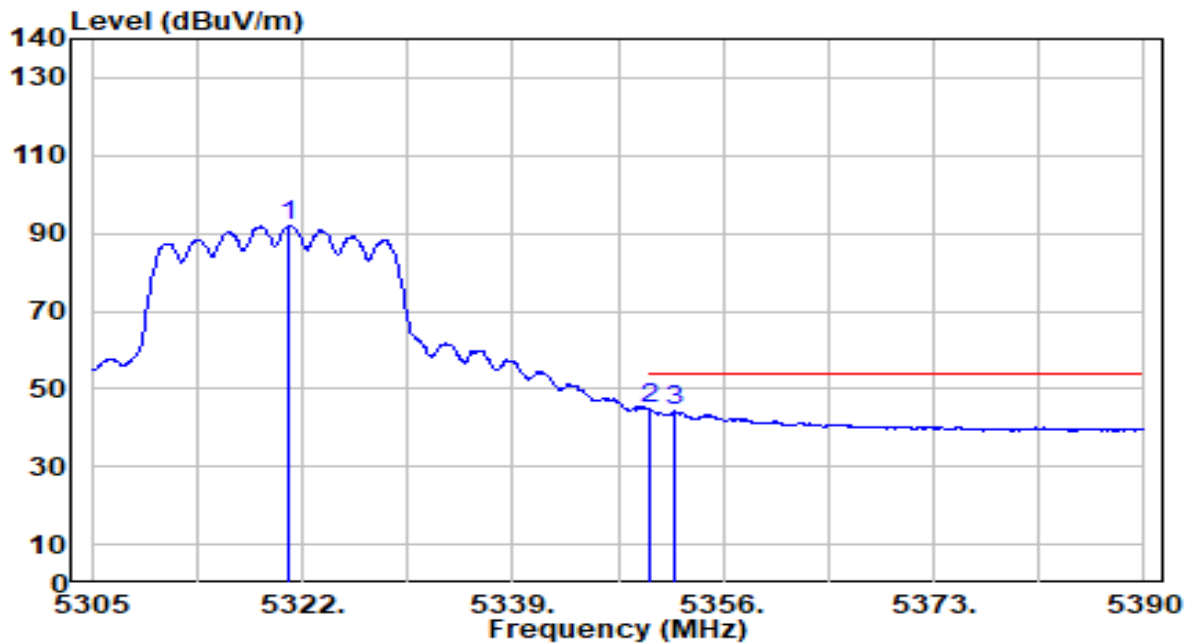


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.980	91.14	0.65	91.79	N/A	N/A	263	331	Average
2	* 5350.000	44.39	0.59	44.99	-9.01	54.00	263	331	Average
3	5352.005	43.62	0.59	44.21	-9.79	54.00	263	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

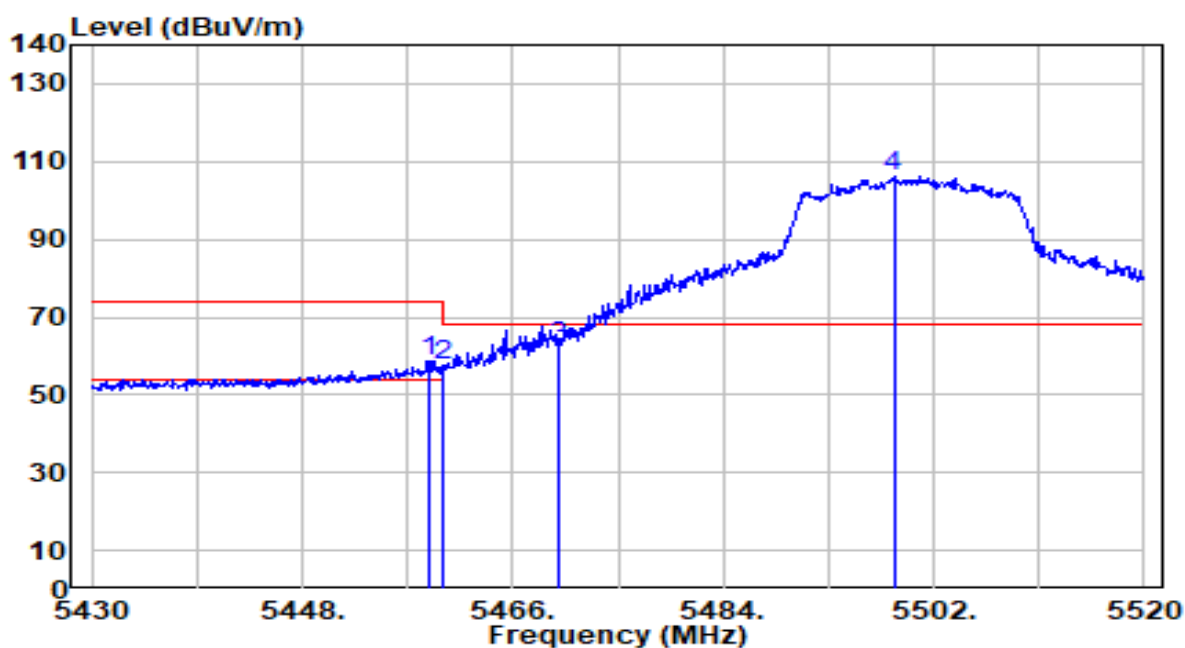


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.890	57.97	0.76	58.73	-15.27	74.00	254	315	Peak
2	5460.000	56.67	0.76	57.43	-16.57	74.00	254	315	Peak
3	* 5470.000	61.71	0.80	62.51	-5.69	68.20	254	315	Peak
4	5498.580	105.45	0.92	106.37	N/A	N/A	254	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

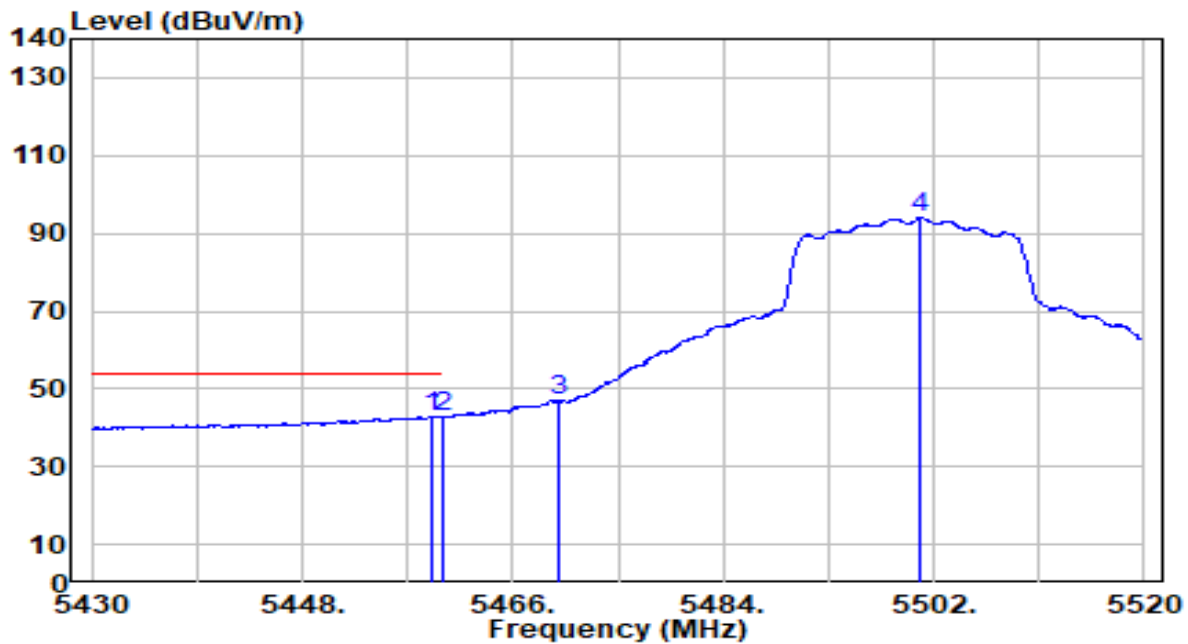


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.980	42.14	0.76	42.90	-11.10	54.00	254	315	Average
2	* 5460.000	42.18	0.76	42.94	-11.06	54.00	254	315	Average
3	5470.000	45.99	0.80	46.79	N/A	N/A	254	315	Average
4	5500.740	93.03	0.93	93.96	N/A	N/A	254	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

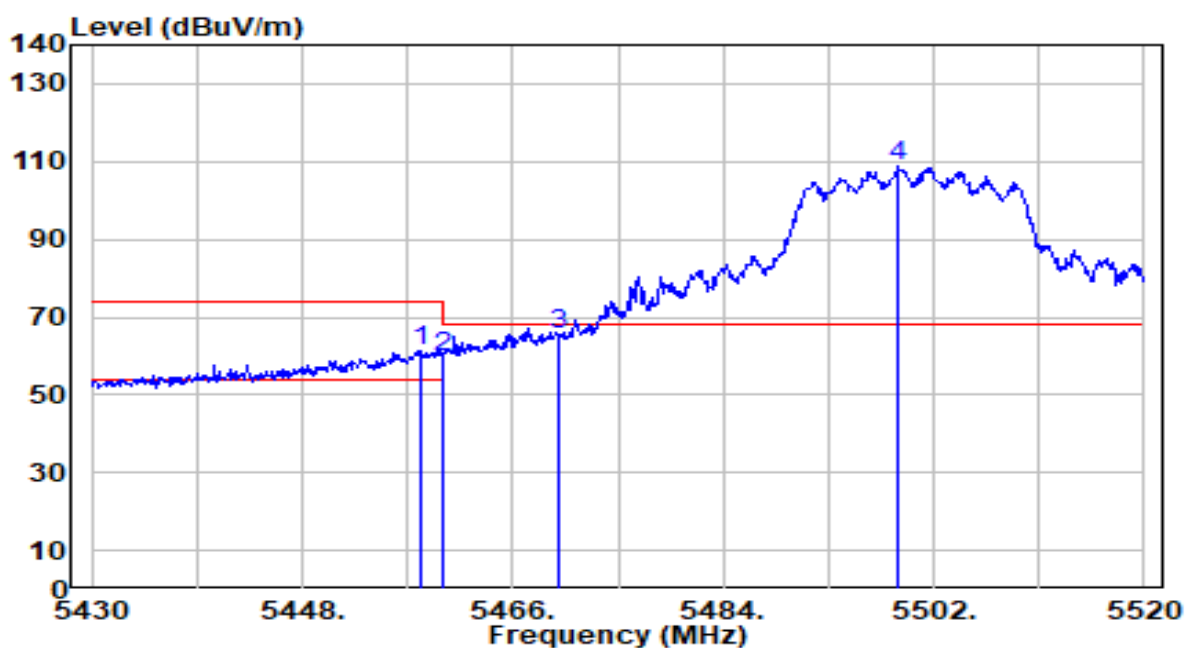


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.260	60.50	0.75	61.25	-12.75	74.00	274	332	Peak
2	5460.000	58.81	0.76	59.57	-14.43	74.00	274	332	Peak
3	* 5470.000	64.68	0.80	65.48	-2.72	68.20	274	332	Peak
4	5498.940	107.99	0.93	108.92	N/A	N/A	274	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

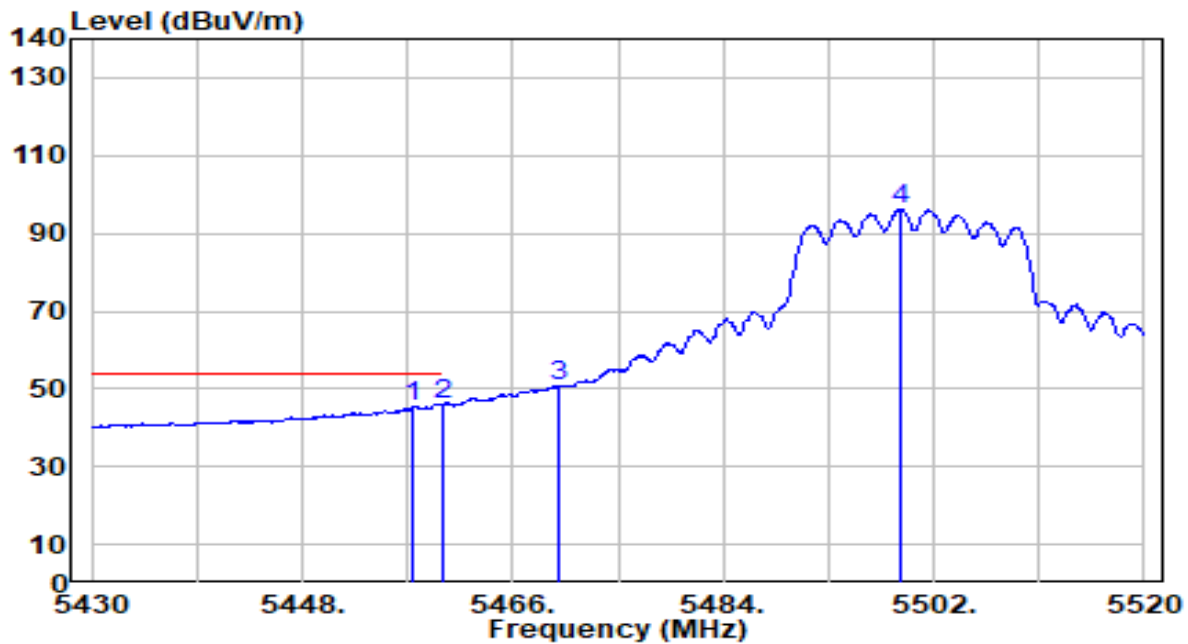


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.540	44.86	0.75	45.61	-8.39	54.00	274	332	Average
2	* 5460.000	45.12	0.76	45.88	-8.12	54.00	274	332	Average
3	5470.000	49.65	0.80	50.46	N/A	N/A	274	332	Average
4	5499.210	95.30	0.93	96.22	N/A	N/A	274	332	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

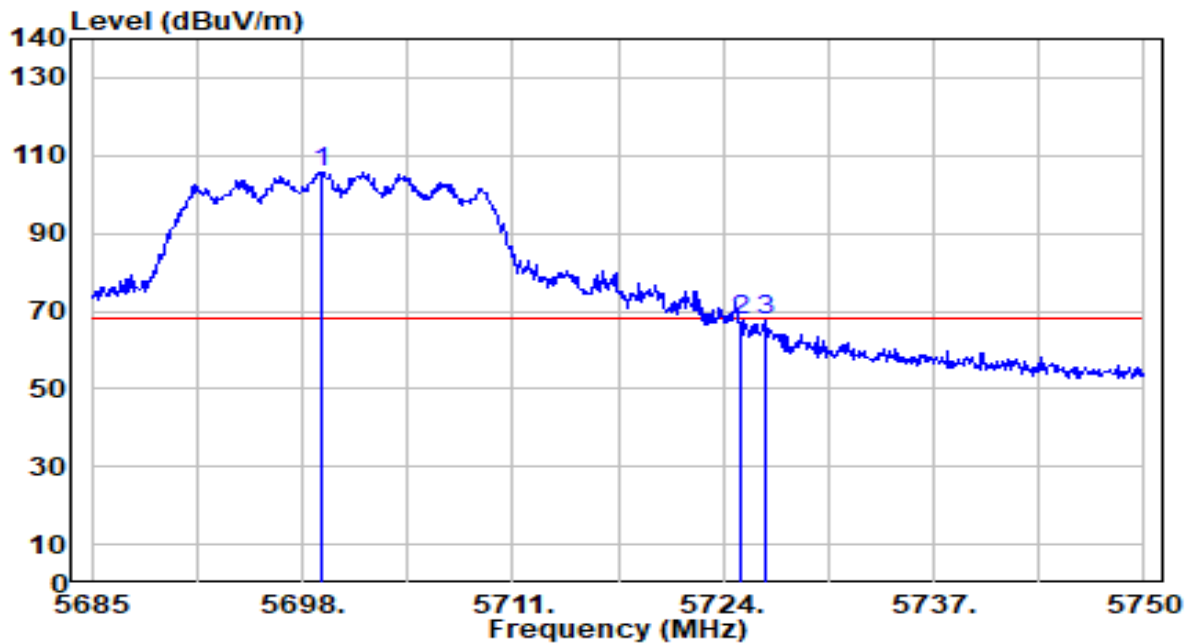


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.170	104.08	1.78	105.86	N/A	N/A	260	18	Peak
2	5725.000	65.74	1.89	67.63	-0.57	68.20	260	18	Peak
3	* 5726.535	65.74	1.90	67.63	-0.57	68.20	260	18	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

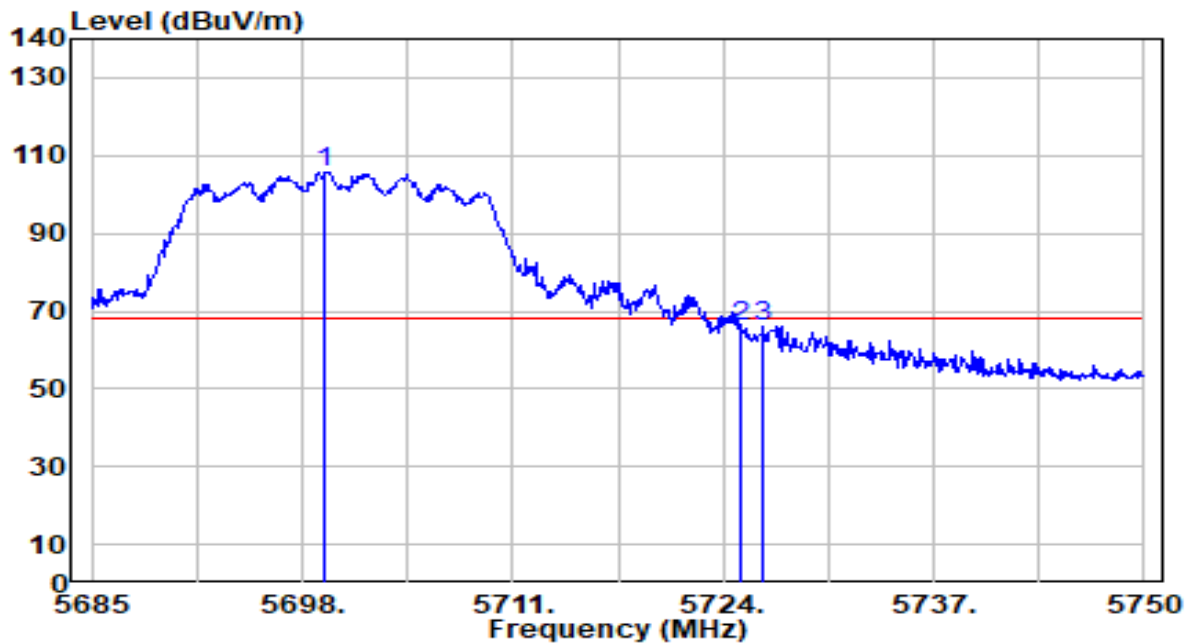


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.365	104.13	1.79	105.91	N/A	N/A	254	340	Peak
2	5725.000	63.98	1.89	65.87	-2.33	68.20	254	340	Peak
3	* 5726.470	64.29	1.89	66.18	-2.02	68.20	254	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

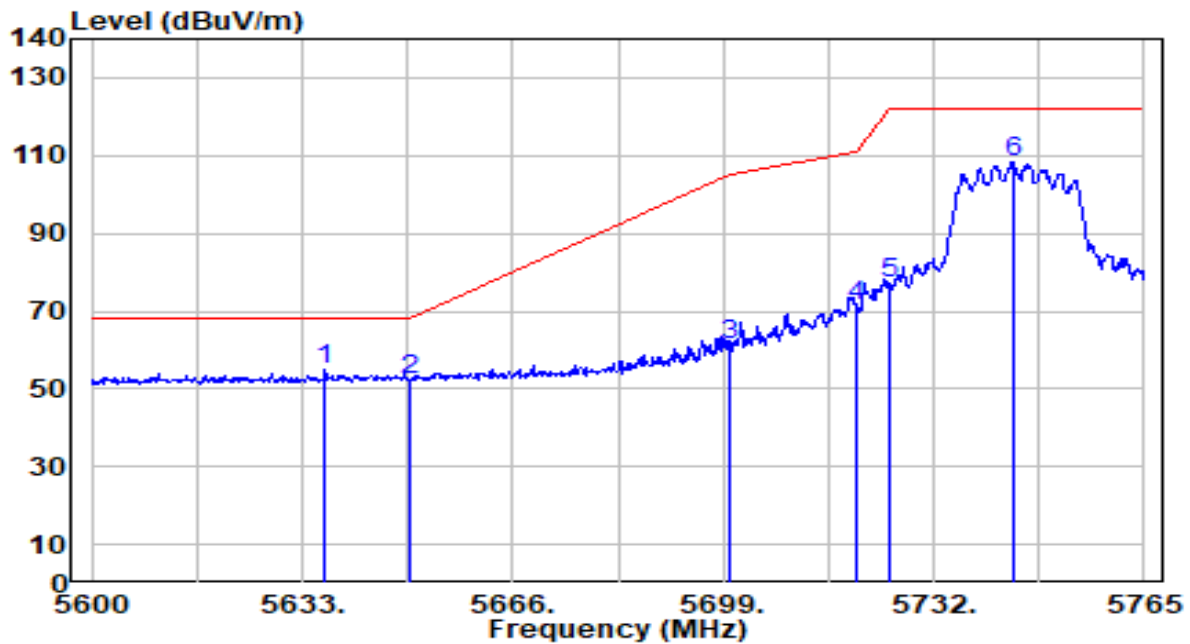


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.630	53.30	1.53	54.83	-13.37	68.20	260	16	Peak
2		5650.000	50.96	1.59	52.54	-15.66	68.20	260	16	Peak
3		5700.000	59.24	1.79	61.03	-44.17	105.20	260	16	Peak
4		5720.000	69.54	1.87	71.41	-39.39	110.80	260	16	Peak
5		5725.000	75.33	1.89	77.21	-44.99	122.20	260	16	Peak
6		5744.375	106.54	1.97	108.51	N/A	N/A	260	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

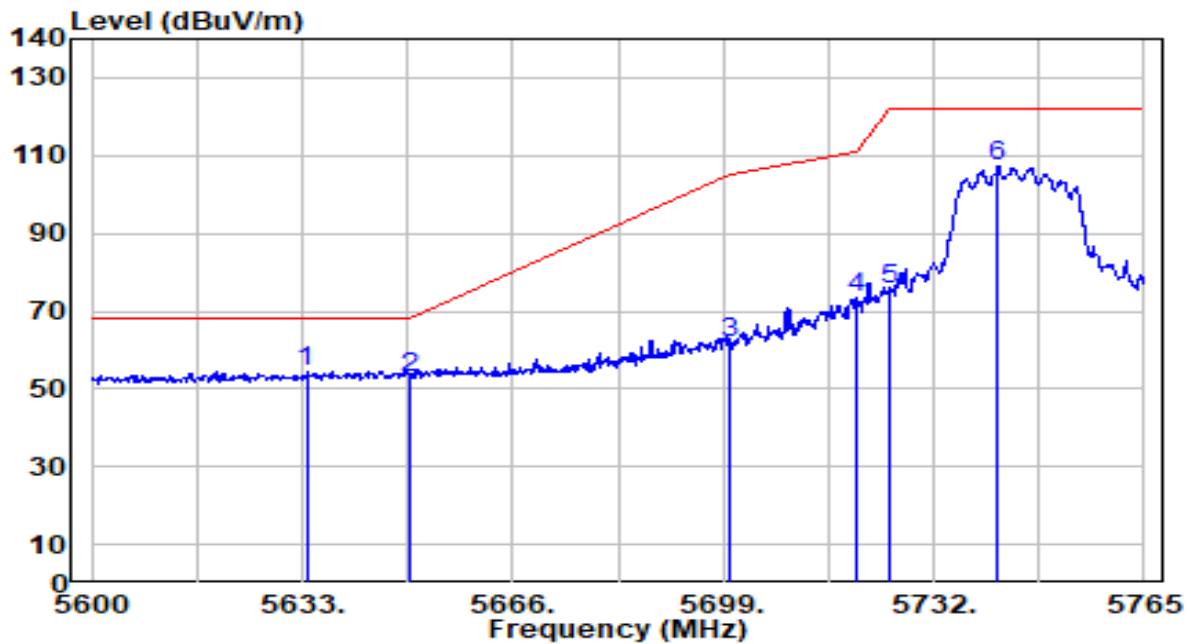


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5633.660	53.13	1.52	54.65	-13.55	68.20	267	336	Peak
2		5650.000	51.24	1.59	52.83	-15.37	68.20	267	336	Peak
3		5700.000	60.23	1.79	62.02	-43.18	105.20	267	336	Peak
4		5720.000	71.71	1.87	73.57	-37.23	110.80	267	336	Peak
5		5725.000	73.49	1.89	75.38	-46.82	122.20	267	336	Peak
6		5742.065	105.23	1.96	107.19	N/A	N/A	267	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

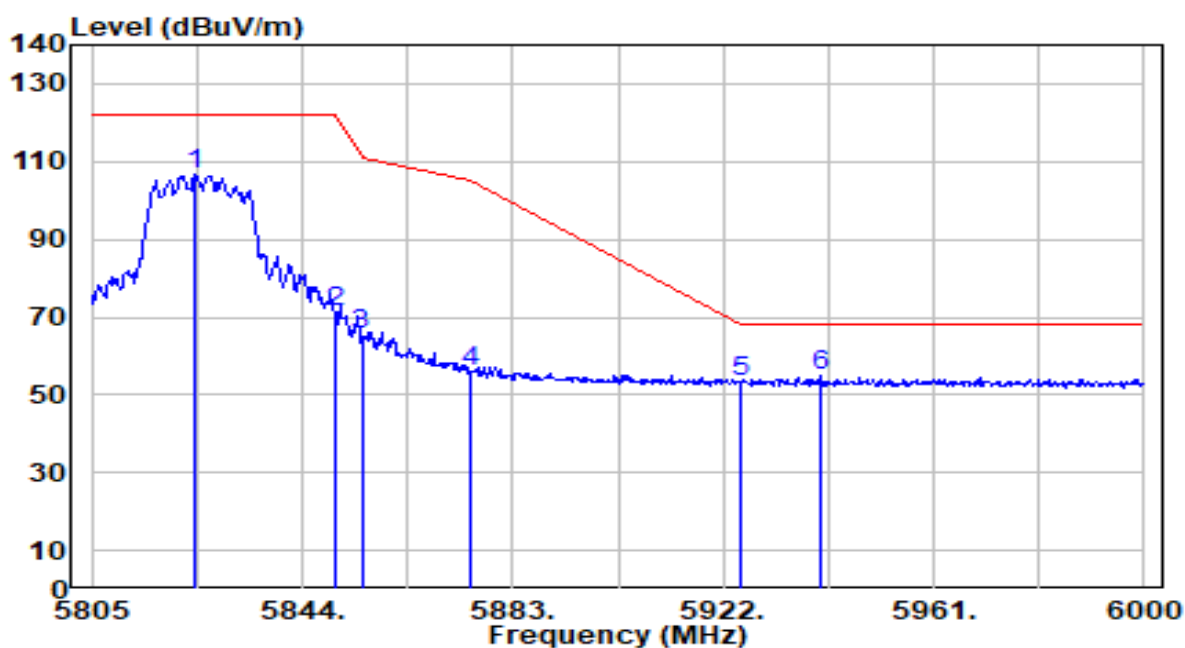


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.110	104.28	2.23	106.50	N/A	N/A	247	16	Peak
2	5850.000	68.80	2.27	71.07	-51.13	122.20	247	16	Peak
3	5855.000	63.00	2.28	65.27	-45.53	110.80	247	16	Peak
4	5875.000	53.95	2.31	56.26	-48.94	105.20	247	16	Peak
5	5925.000	50.84	2.38	53.23	-14.97	68.20	247	16	Peak
6	* 5939.940	52.53	2.41	54.94	-13.26	68.20	247	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

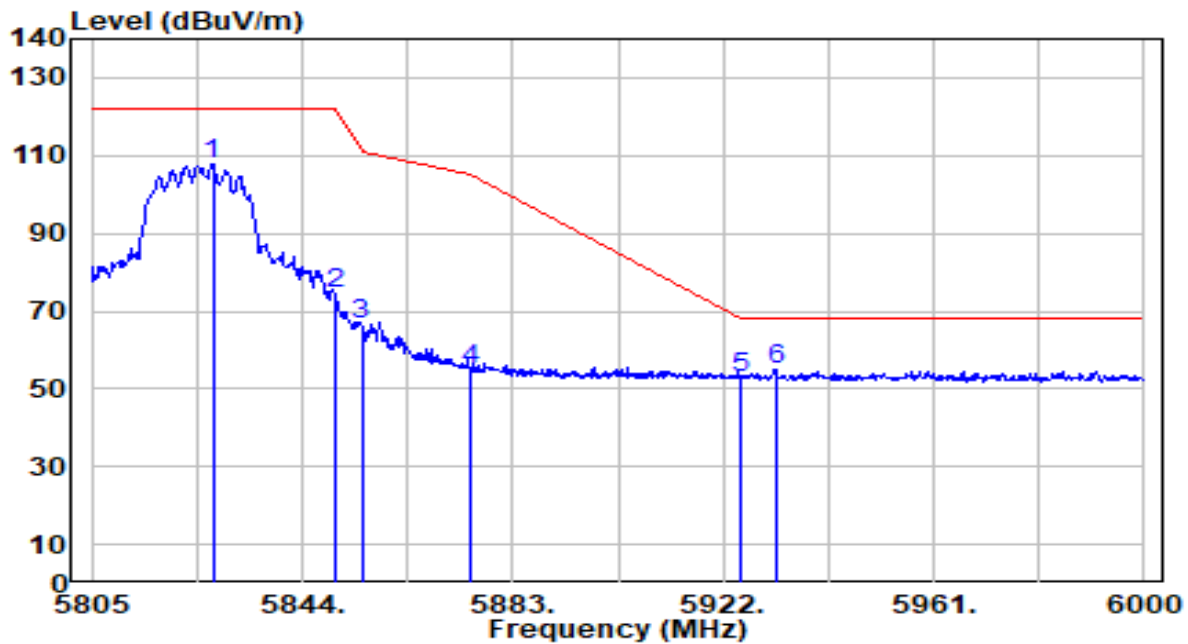


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.425	105.72	2.23	107.95	N/A	N/A	267	336	Peak
2	5850.000	72.20	2.27	74.47	-47.73	122.20	267	336	Peak
3	5855.000	64.21	2.28	66.48	-44.32	110.80	267	336	Peak
4	5875.000	52.49	2.31	54.80	-50.40	105.20	267	336	Peak
5	5925.000	50.64	2.38	53.02	-15.18	68.20	267	336	Peak
6	* 5931.750	52.63	2.39	55.02	-13.18	68.20	267	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

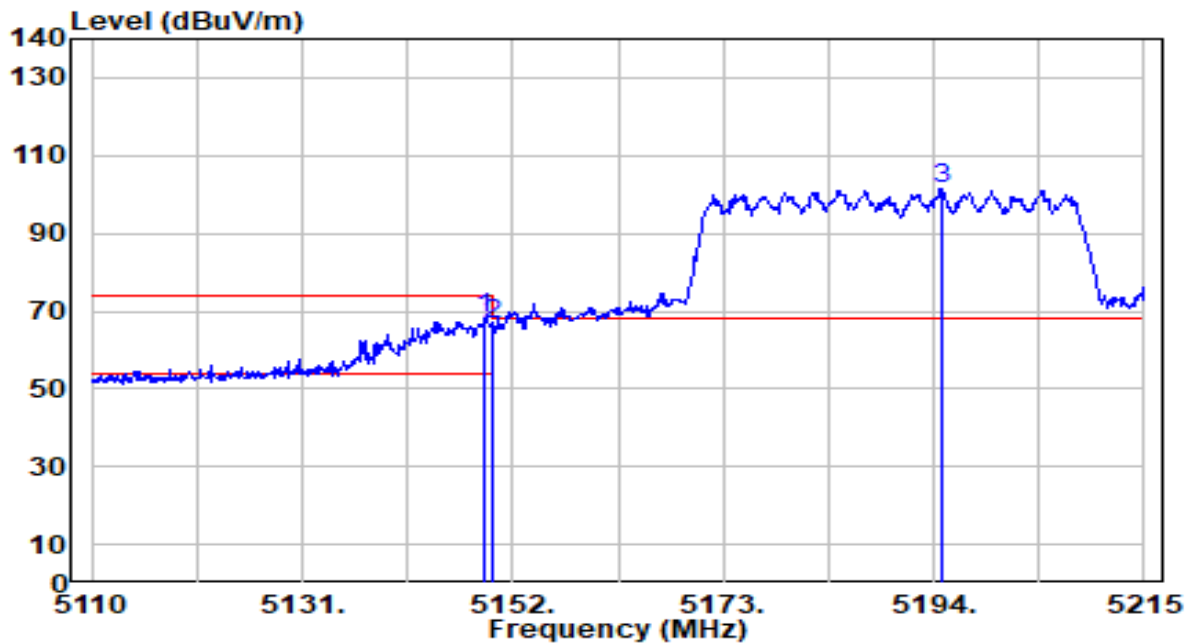


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.165	67.47	0.79	68.26	-5.74	74.00	223	324	Peak
2		5150.000	65.58	0.80	66.37	-7.63	74.00	223	324	Peak
3		5194.840	100.51	0.85	101.36	N/A	N/A	223	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

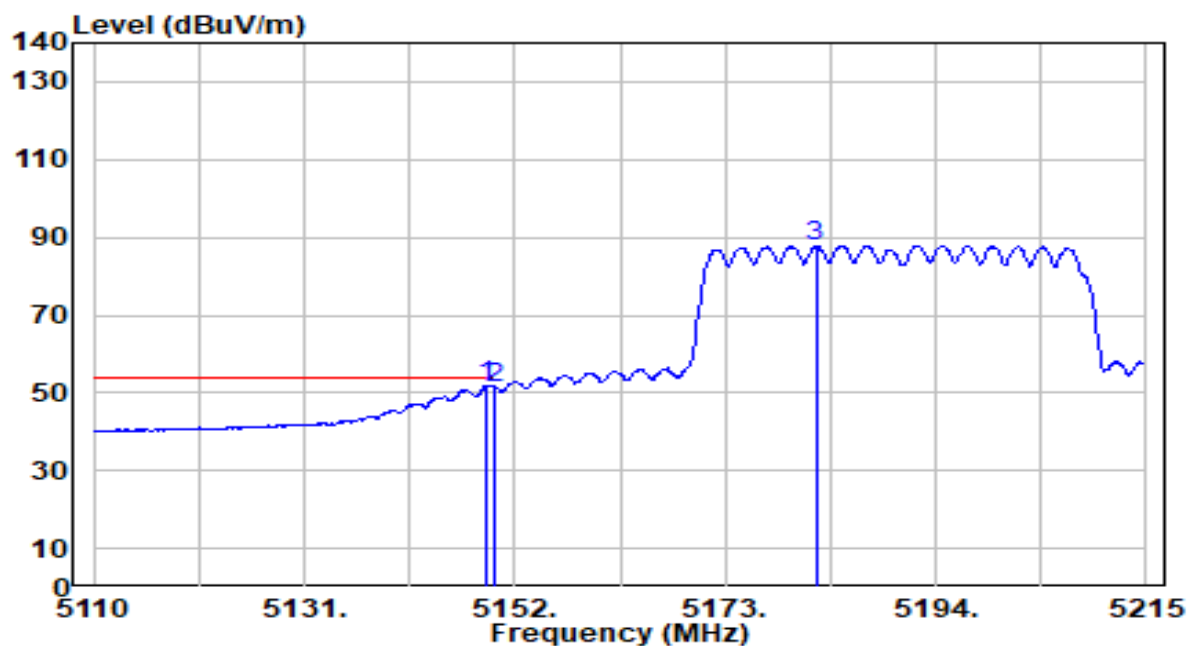


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.270	51.19	0.80	51.98	-2.02	54.00	223	324	Average
2	5150.000	50.67	0.80	51.46	-2.54	54.00	223	324	Average
3	5182.030	87.08	0.84	87.92	N/A	N/A	223	324	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

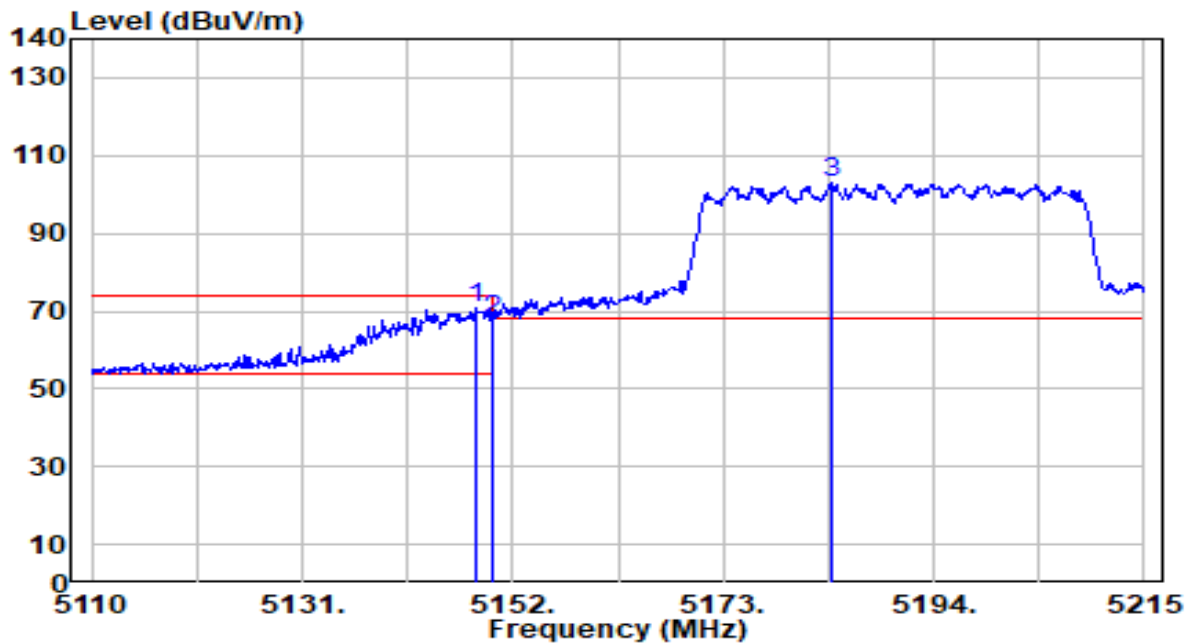


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.325	69.80	0.79	70.59	-3.41	74.00	116	19	Peak
2		5150.000	66.57	0.80	67.37	-6.63	74.00	116	19	Peak
3		5183.920	102.26	0.84	103.10	N/A	N/A	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

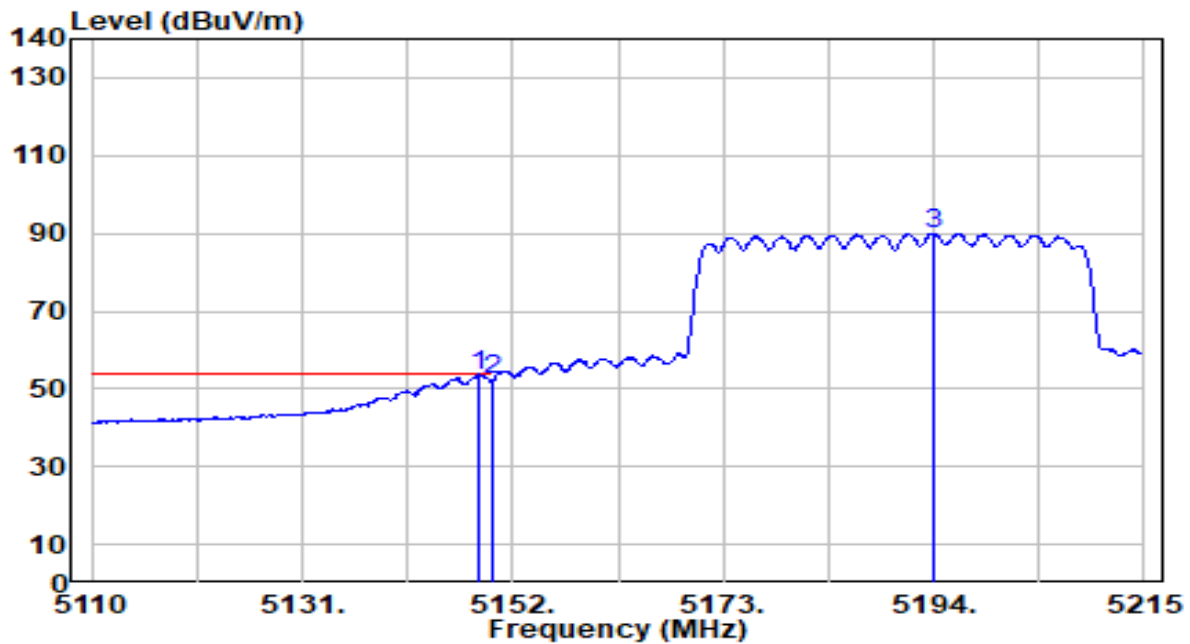


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.640	52.65	0.79	53.44	-0.56	54.00	116	19	Average
2		5150.000	51.36	0.80	52.16	-1.84	54.00	116	19	Average
3		5194.000	89.17	0.85	90.02	N/A	N/A	116	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

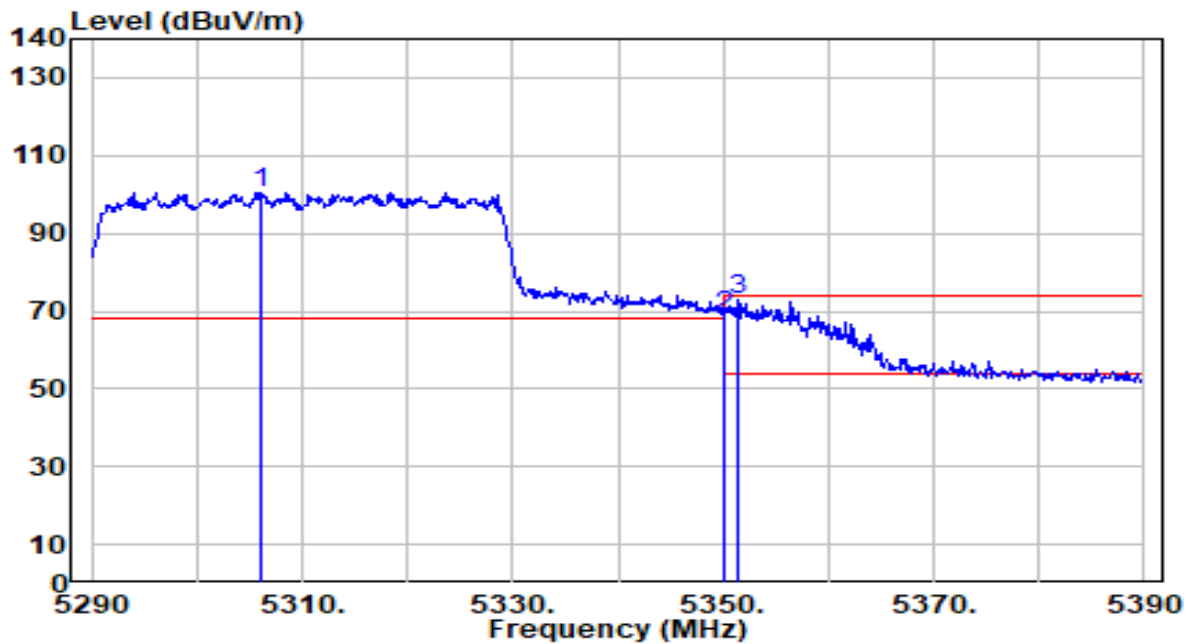


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.000	99.94	0.67	100.62	N/A	N/A	252	296	Peak
2	5350.000	68.00	0.59	68.59	-5.41	74.00	252	296	Peak
3	* 5351.300	72.22	0.59	72.81	-1.19	74.00	252	296	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

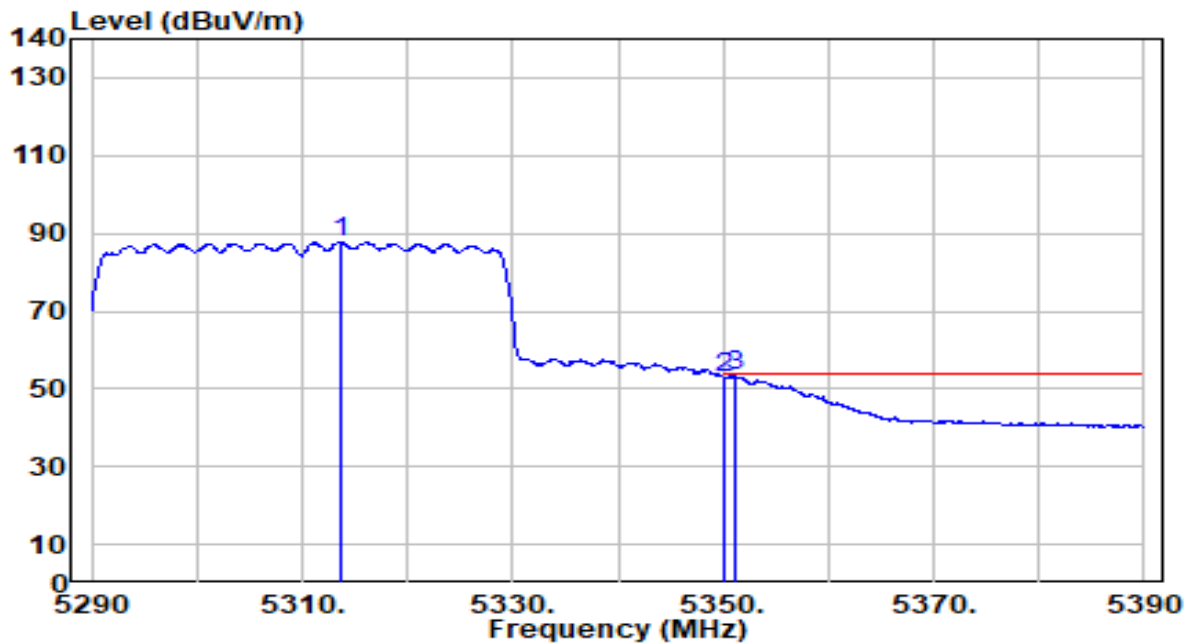


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.700	87.14	0.66	87.80	N/A	N/A	252	296	Average
2	5350.000	52.10	0.59	52.70	-1.30	54.00	252	296	Average
3	* 5351.200	52.75	0.59	53.34	-0.66	54.00	252	296	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

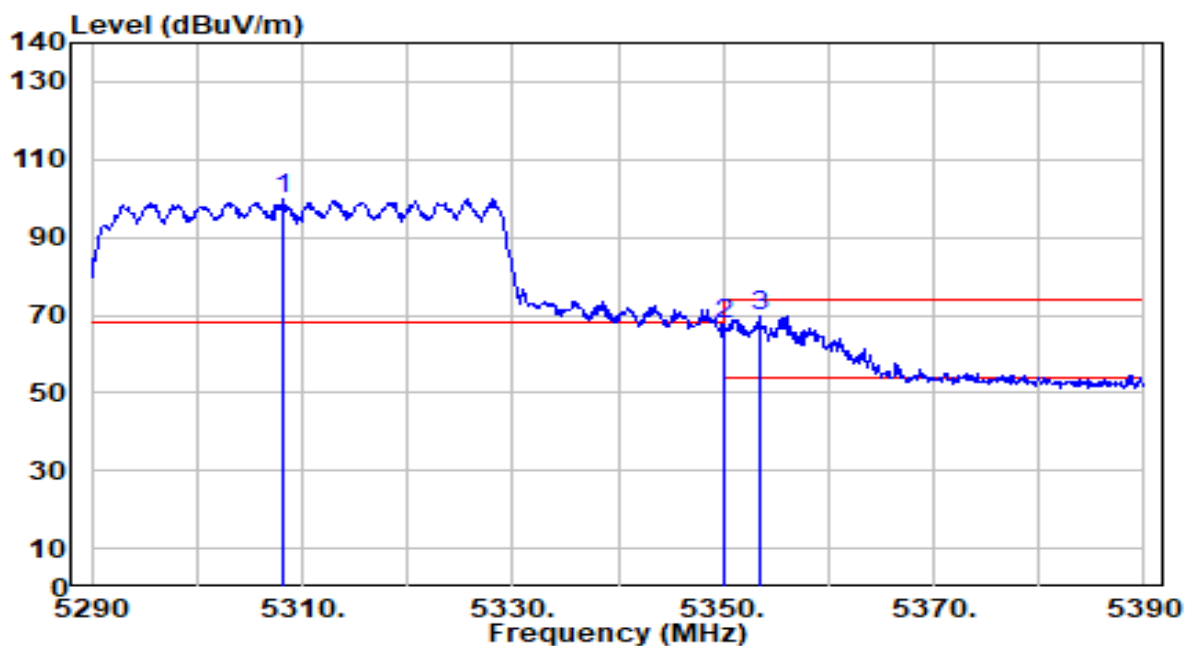


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.200	99.41	0.67	100.08	N/A	N/A	256	338	Peak
2	5350.000	67.21	0.59	67.80	-6.20	74.00	256	338	Peak
3	* 5353.400	69.32	0.59	69.90	-4.10	74.00	256	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

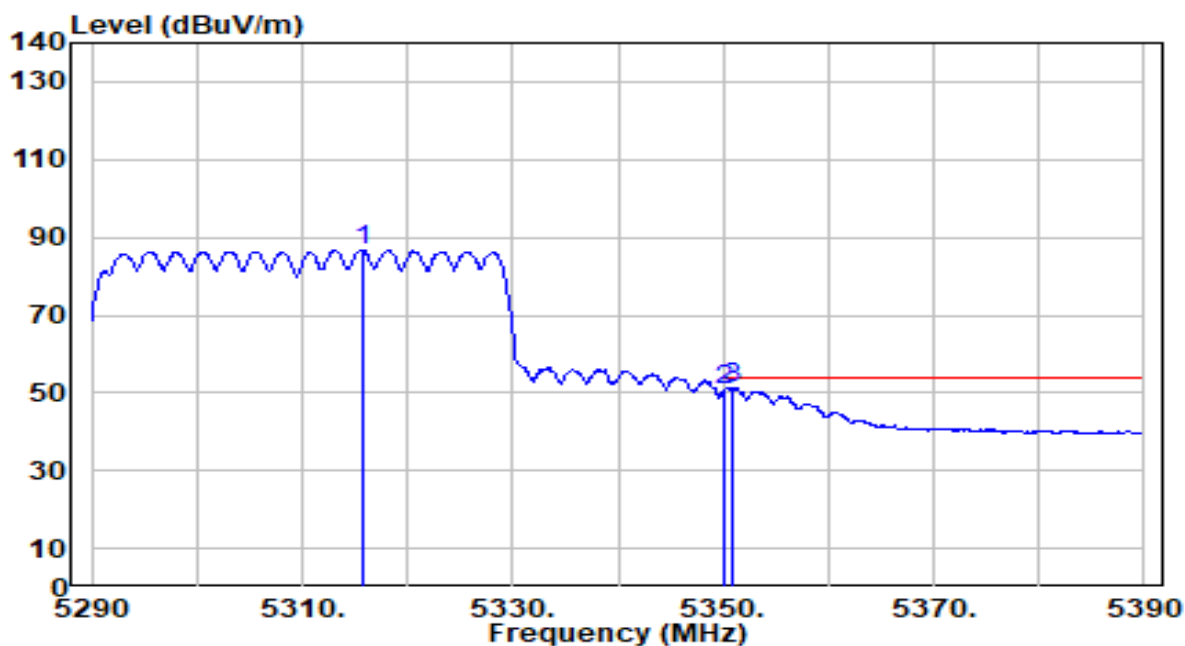


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.700	86.11	0.65	86.77	N/A	N/A	256	338	Average
2	5350.000	49.91	0.59	50.50	-3.50	54.00	256	338	Average
3	* 5351.000	50.80	0.59	51.39	-2.61	54.00	256	338	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

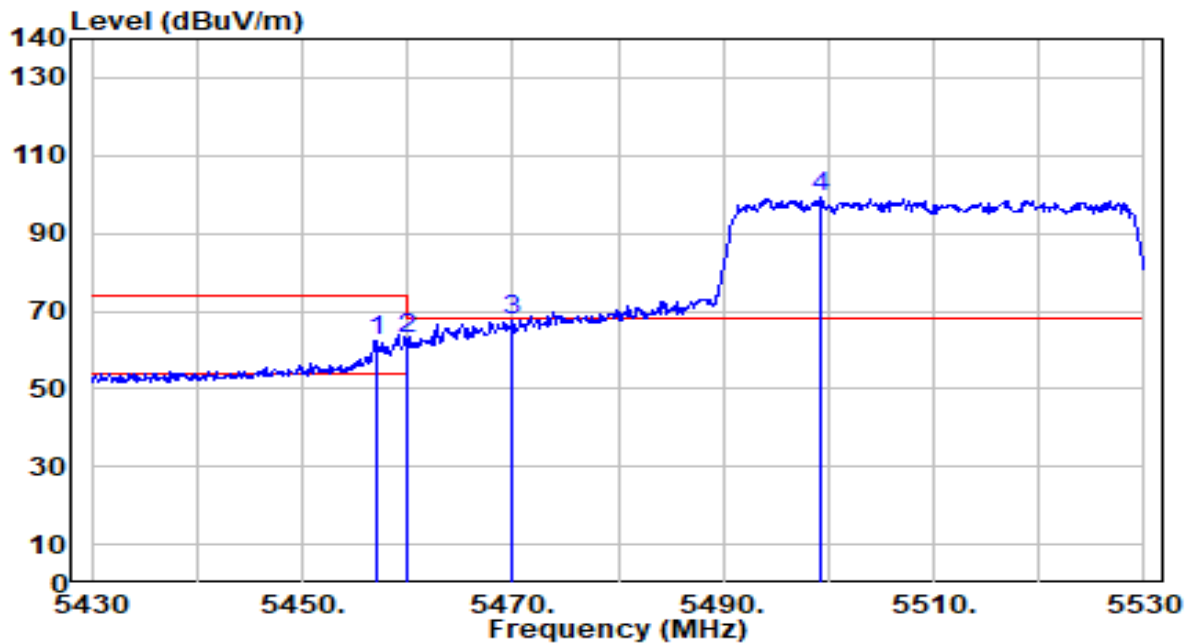


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.100	61.76	0.75	62.50	-11.50	74.00	248	303	Peak
2	5460.000	61.94	0.76	62.70	-11.30	74.00	248	303	Peak
3	* 5470.000	66.68	0.80	67.48	-0.72	68.20	248	303	Peak
4	5499.300	98.35	0.93	99.27	N/A	N/A	248	303	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

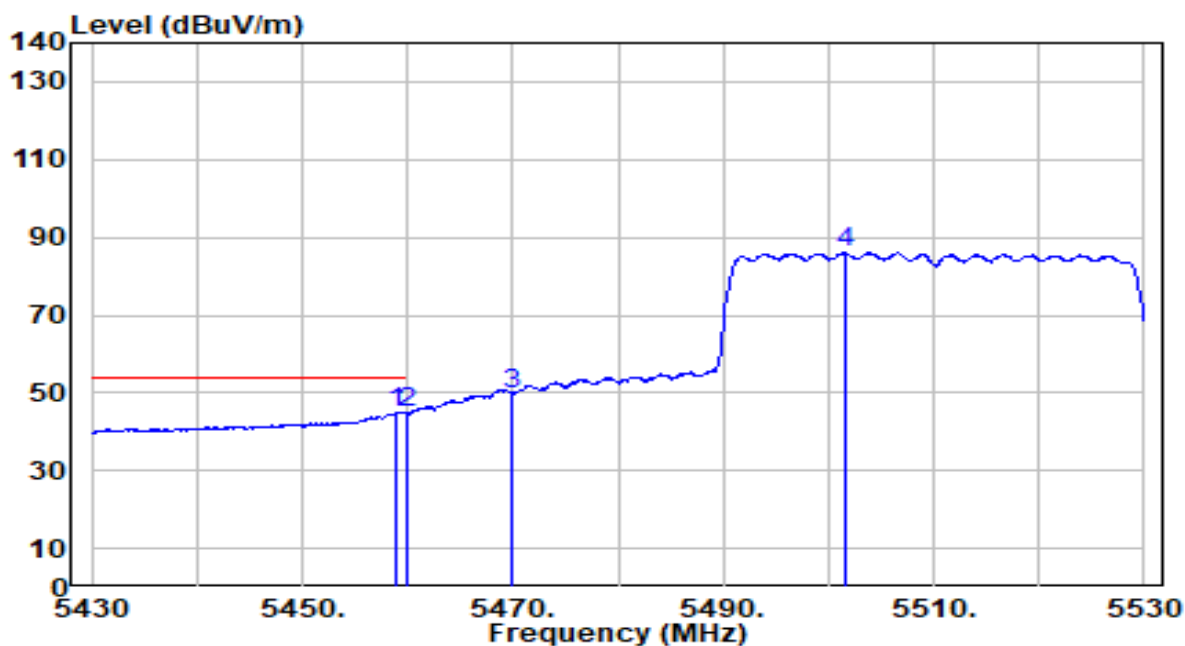


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5459.000	44.14	0.76	44.90	-9.10	54.00	248	303	Average
2	5460.000	44.00	0.76	44.76	-9.24	54.00	248	303	Average
3	5470.000	48.92	0.80	49.73	N/A	N/A	248	303	Average
4	5501.600	85.03	0.94	85.97	N/A	N/A	248	303	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

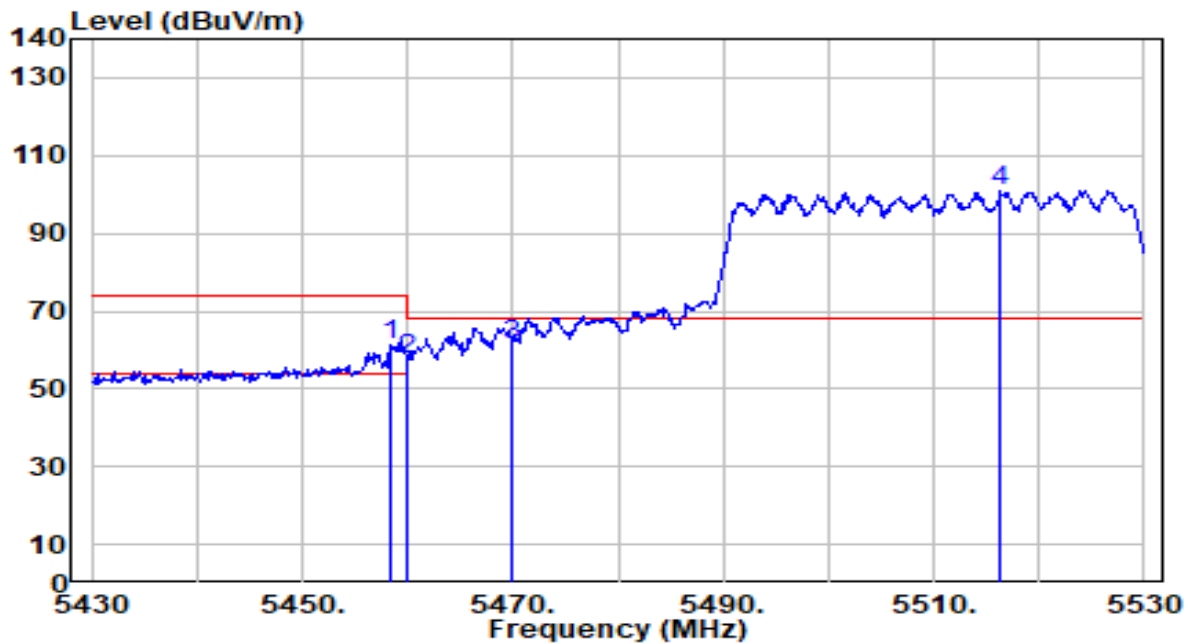


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.400	60.48	0.75	61.23	-12.77	74.00	277	331	Peak
2	5460.000	57.03	0.76	57.79	-16.21	74.00	277	331	Peak
3	* 5470.000	60.68	0.80	61.49	-6.71	68.20	277	331	Peak
4	5516.400	100.09	1.00	101.10	N/A	N/A	277	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

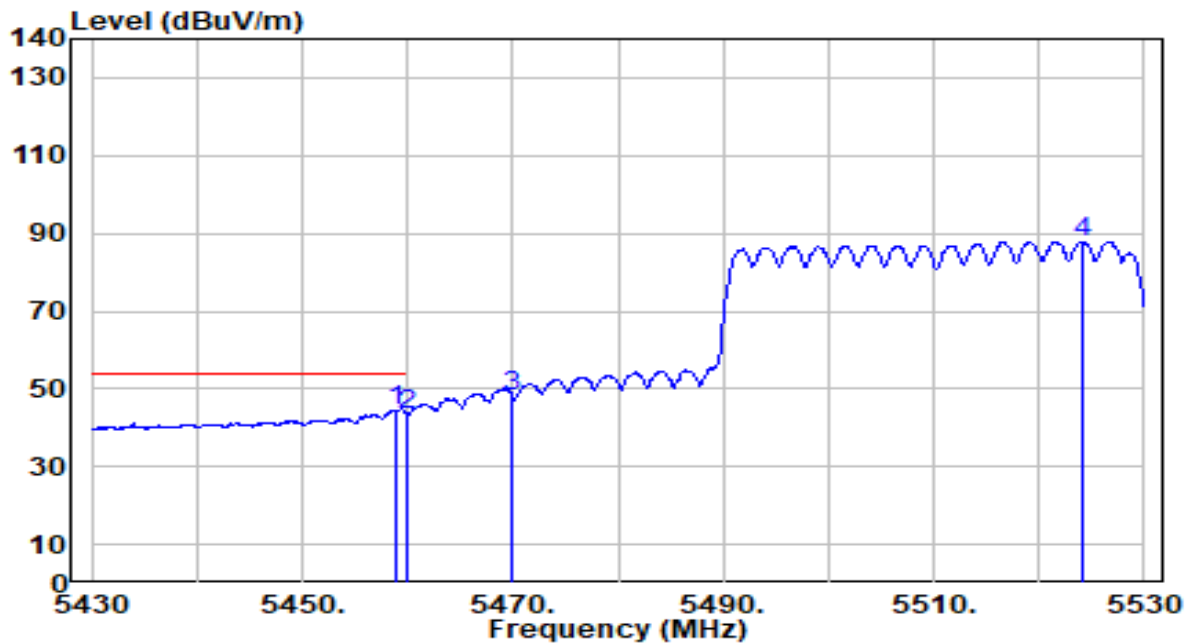


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5459.000	43.88	0.76	44.63	-9.37	54.00	277	331	Average
2		5460.000	42.80	0.76	43.56	-10.44	54.00	277	331	Average
3		5470.000	47.44	0.80	48.24	N/A	N/A	277	331	Average
4		5524.100	86.84	1.04	87.88	N/A	N/A	277	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

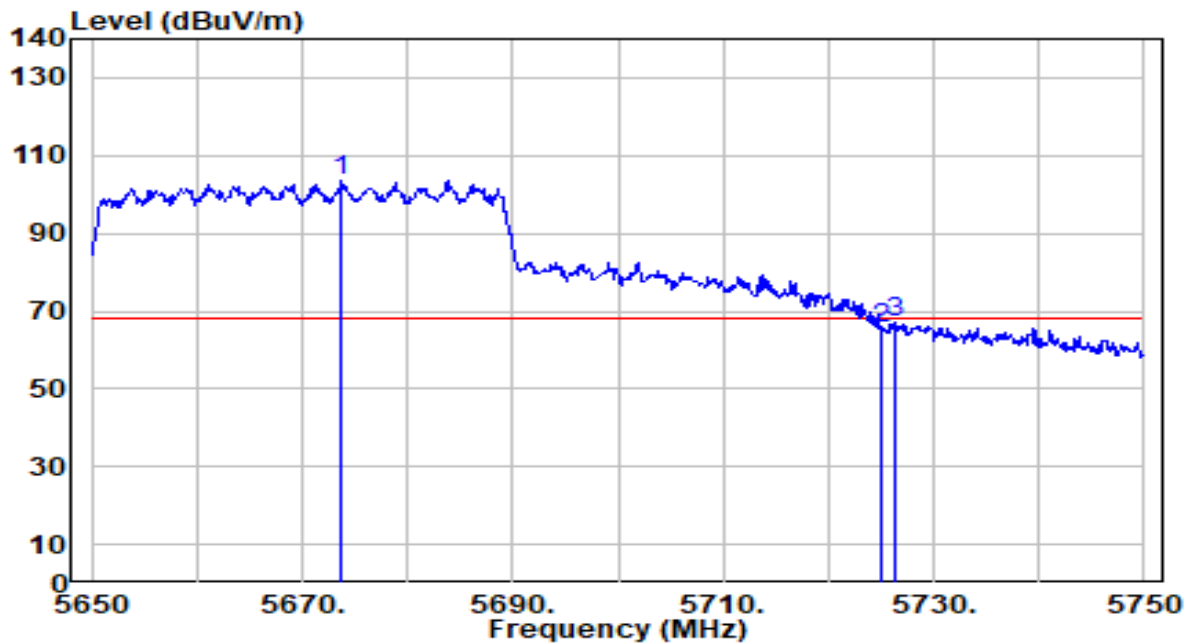


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5673.800	101.74	1.68	103.42	N/A	N/A	266	17	Peak
2	5725.000	63.68	1.89	65.57	-2.63	68.20	266	17	Peak
3	* 5726.300	64.97	1.89	66.87	-1.33	68.20	266	17	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

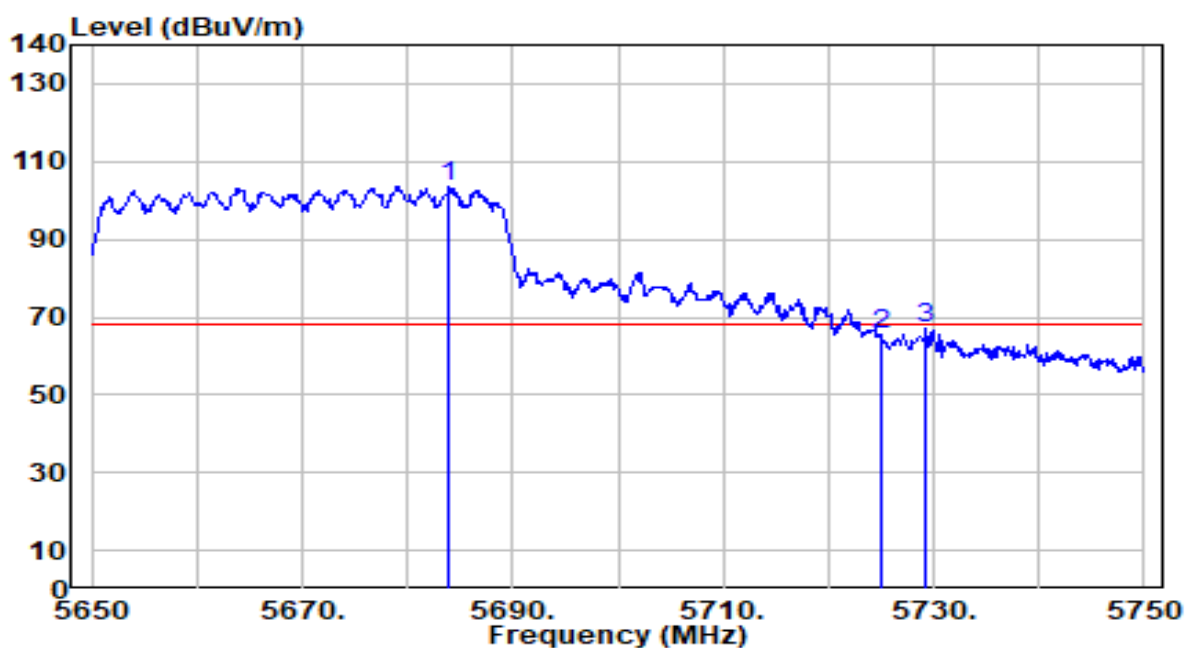


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5683.900	101.66	1.72	103.39	N/A	N/A	279	336	Peak
2	5725.000	63.57	1.89	65.46	-2.74	68.20	279	336	Peak
3	* 5729.200	65.32	1.91	67.23	-0.97	68.20	279	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

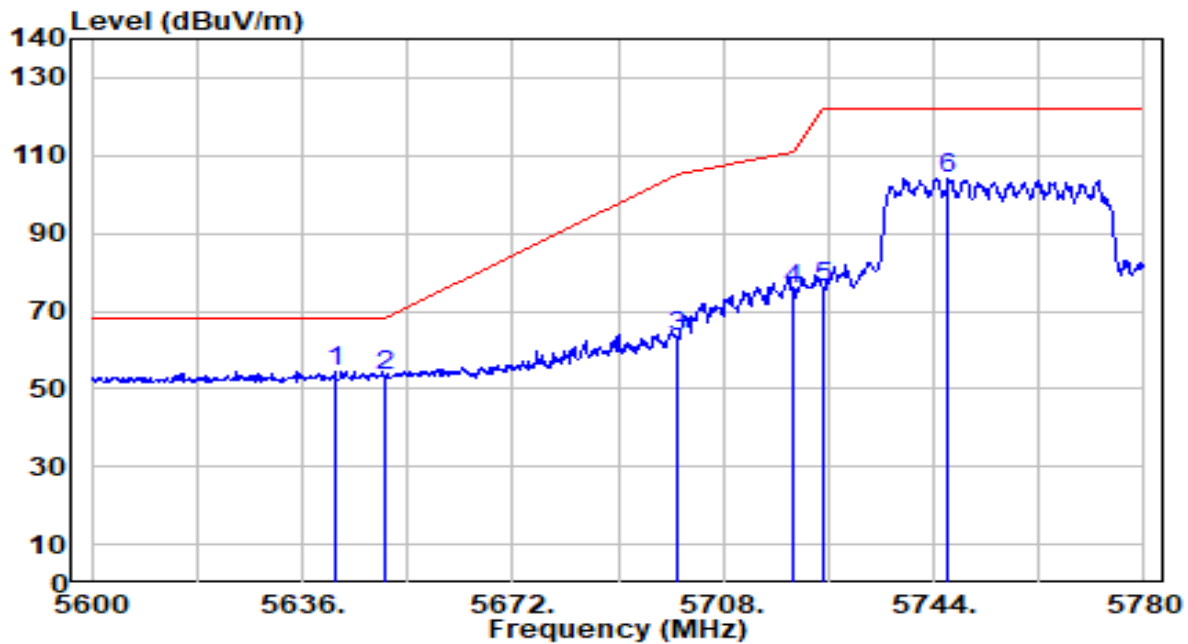


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.580	52.85	1.55	54.40	-13.80	68.20	260	16	Peak
2		5650.000	51.82	1.59	53.40	-14.80	68.20	260	16	Peak
3		5700.000	61.50	1.79	63.28	-41.92	105.20	260	16	Peak
4		5720.000	73.54	1.87	75.41	-35.39	110.80	260	16	Peak
5		5725.000	74.01	1.89	75.90	-46.30	122.20	260	16	Peak
6		5746.520	102.24	1.98	104.21	N/A	N/A	260	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

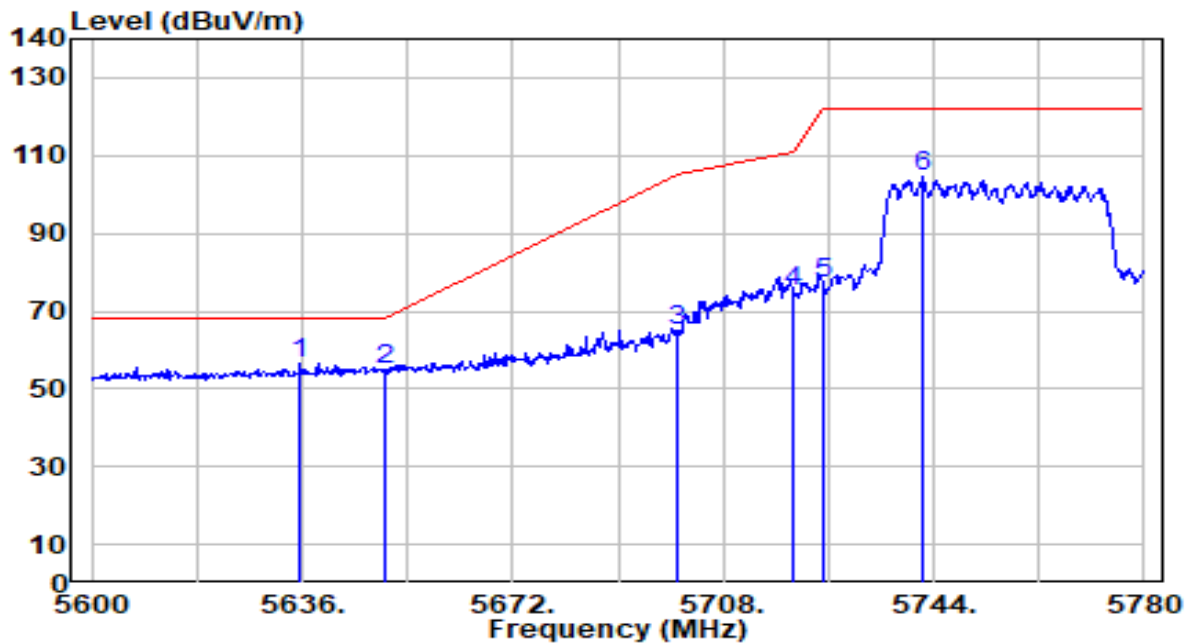


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.640	54.87	1.53	56.40	-11.80	68.20	267	336	Peak
2		5650.000	53.16	1.59	54.75	-13.45	68.20	267	336	Peak
3		5700.000	63.11	1.79	64.90	-40.30	105.20	267	336	Peak
4		5720.000	73.26	1.87	75.13	-35.67	110.80	267	336	Peak
5		5725.000	75.40	1.89	77.28	-44.92	122.20	267	336	Peak
6		5742.200	102.71	1.96	104.67	N/A	N/A	267	336	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

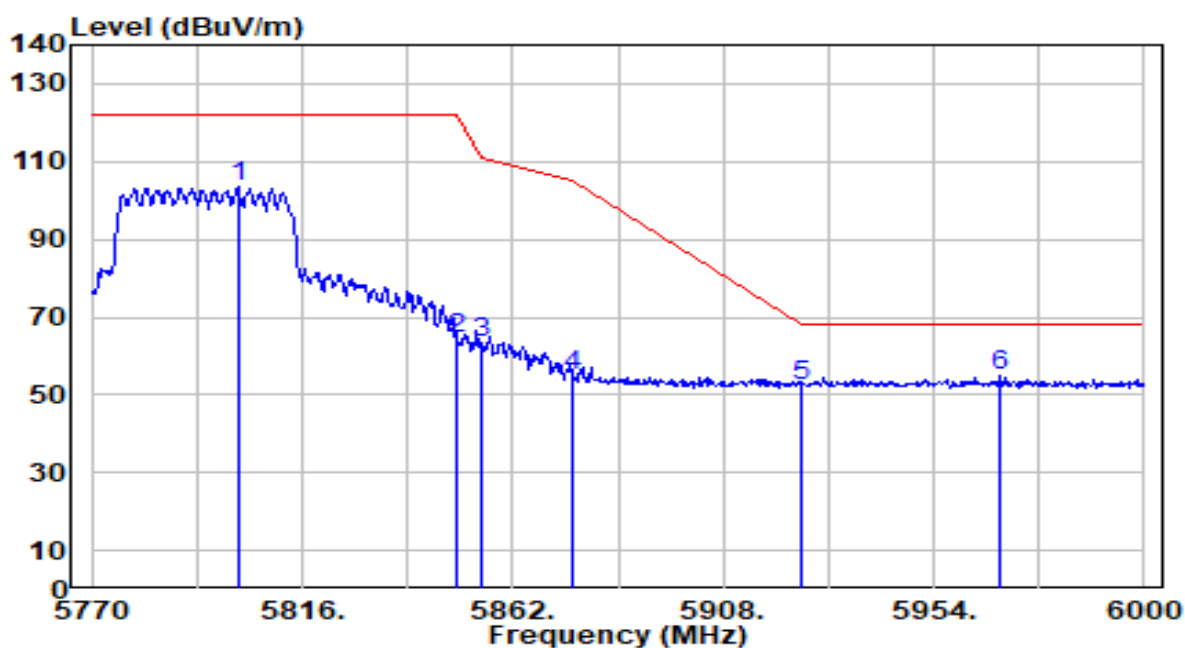


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5801.970	101.21	2.20	103.40	N/A	N/A	247	16	Peak
2	5850.000	62.11	2.27	64.38	-57.82	122.20	247	16	Peak
3	5855.000	61.09	2.28	63.36	-47.44	110.80	247	16	Peak
4	5875.000	52.48	2.31	54.78	-50.42	105.20	247	16	Peak
5	5925.000	50.16	2.38	52.54	-15.66	68.20	247	16	Peak
6	* 5968.490	52.36	2.45	54.81	-13.39	68.20	247	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

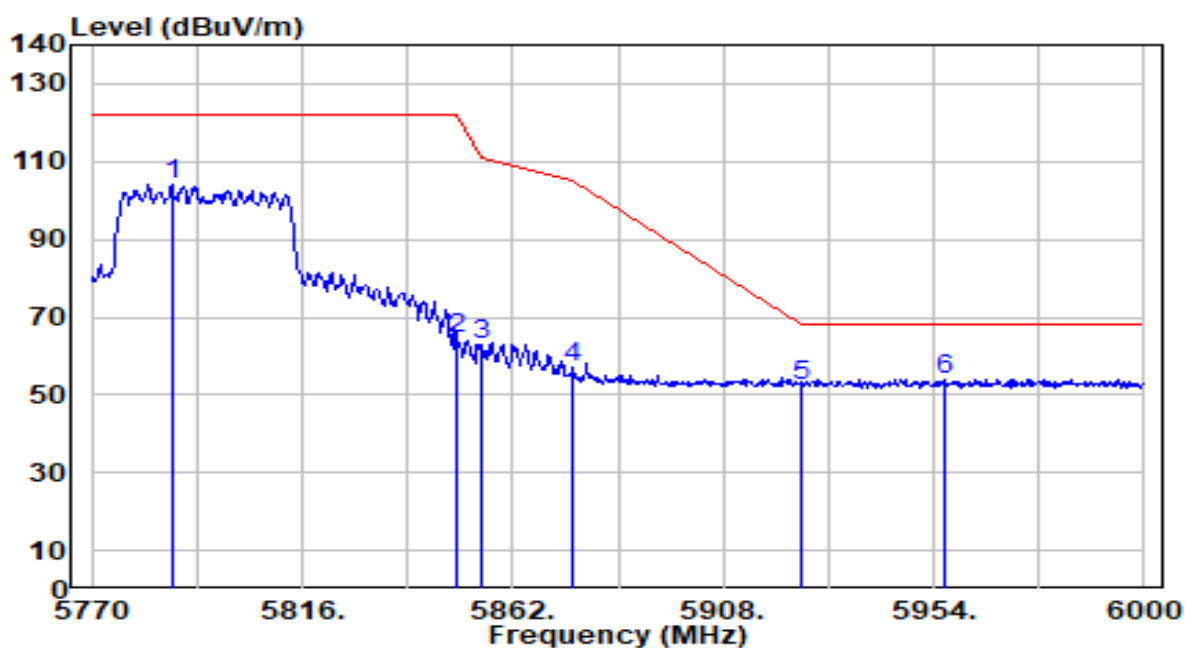


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5787.710	101.78	2.14	103.92	N/A	N/A	267	336	Peak
2	5850.000	62.14	2.27	64.41	-57.79	122.20	267	336	Peak
3	5855.000	60.68	2.28	62.96	-47.84	110.80	267	336	Peak
4	5875.000	54.81	2.31	57.12	-48.08	105.20	267	336	Peak
5	5925.000	50.12	2.38	52.51	-15.69	68.20	267	336	Peak
6	* 5956.300	51.64	2.43	54.07	-14.13	68.20	267	336	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

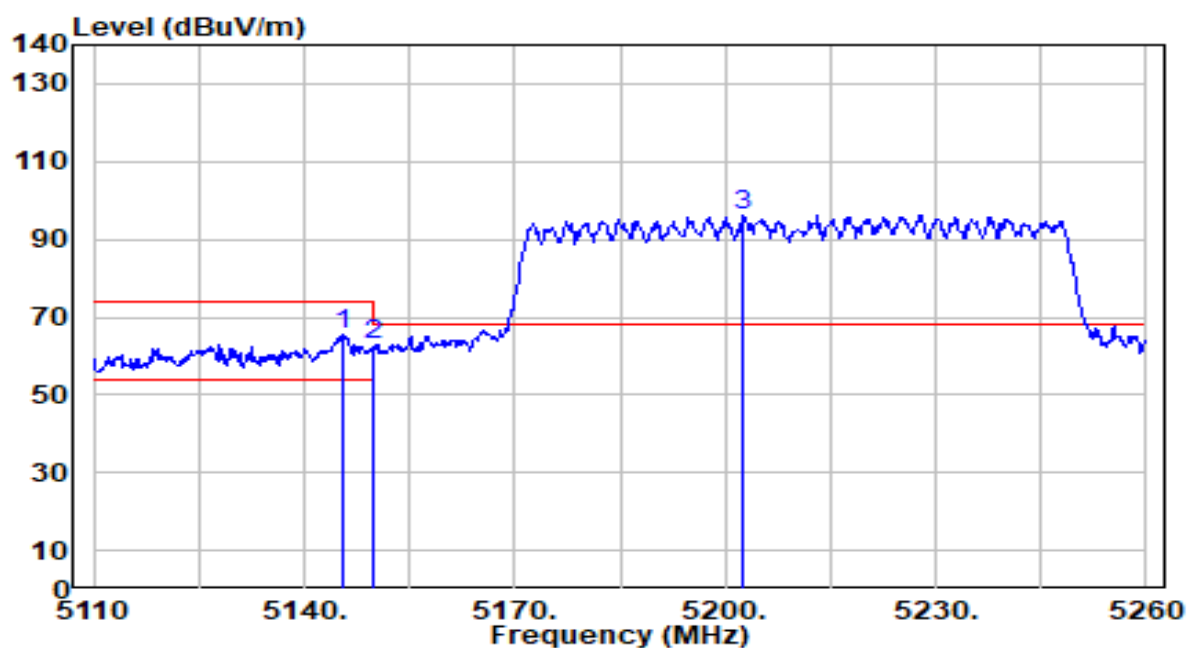


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.550	64.63	0.79	65.42	-8.58	74.00	244	313	Peak
2		5150.000	62.09	0.80	62.89	-11.11	74.00	244	313	Peak
3		5202.550	95.39	0.85	96.24	N/A	N/A	244	313	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

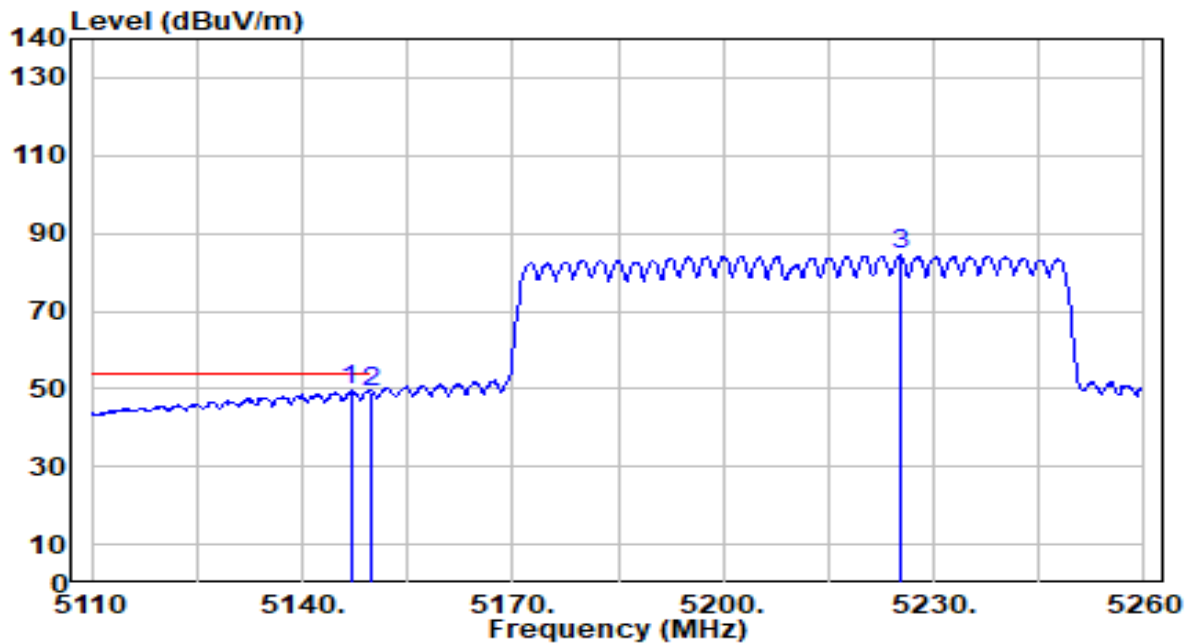


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5146.900	48.82	0.79	49.61	-4.39	54.00	244	313	Average
2	5150.000	48.33	0.80	49.13	-4.87	54.00	244	313	Average
3	5225.200	83.59	0.81	84.41	N/A	N/A	244	313	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

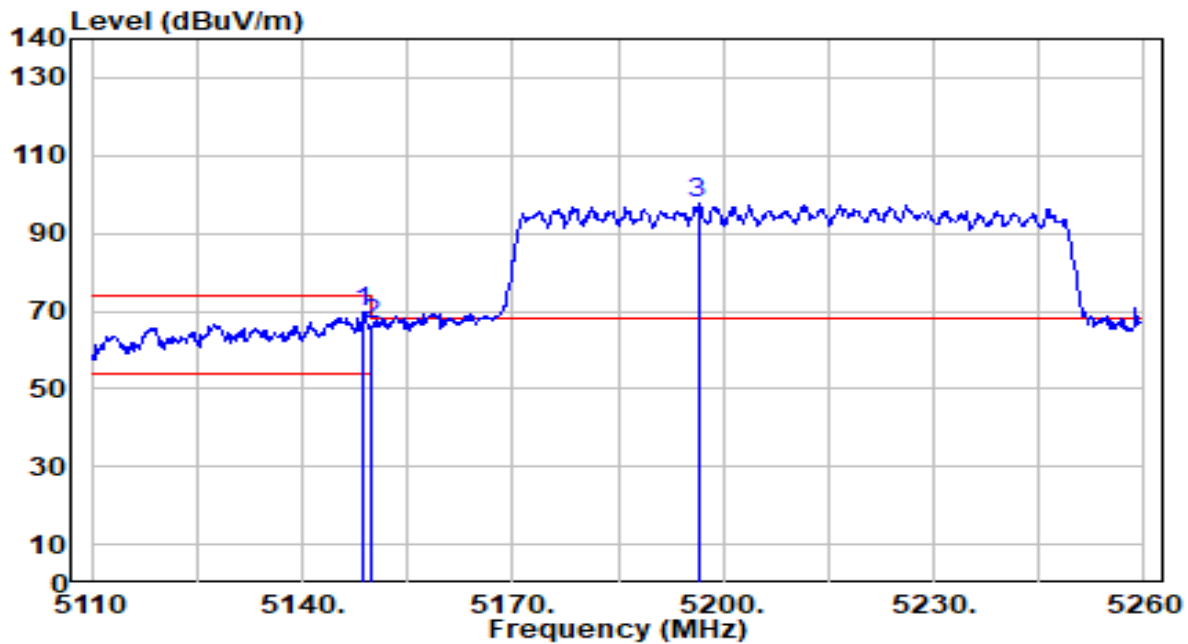


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	68.95	0.79	69.75	-4.25	74.00	116	19	Peak
2		5150.000	65.82	0.80	66.62	-7.38	74.00	116	19	Peak
3		5196.400	96.88	0.85	97.73	N/A	N/A	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

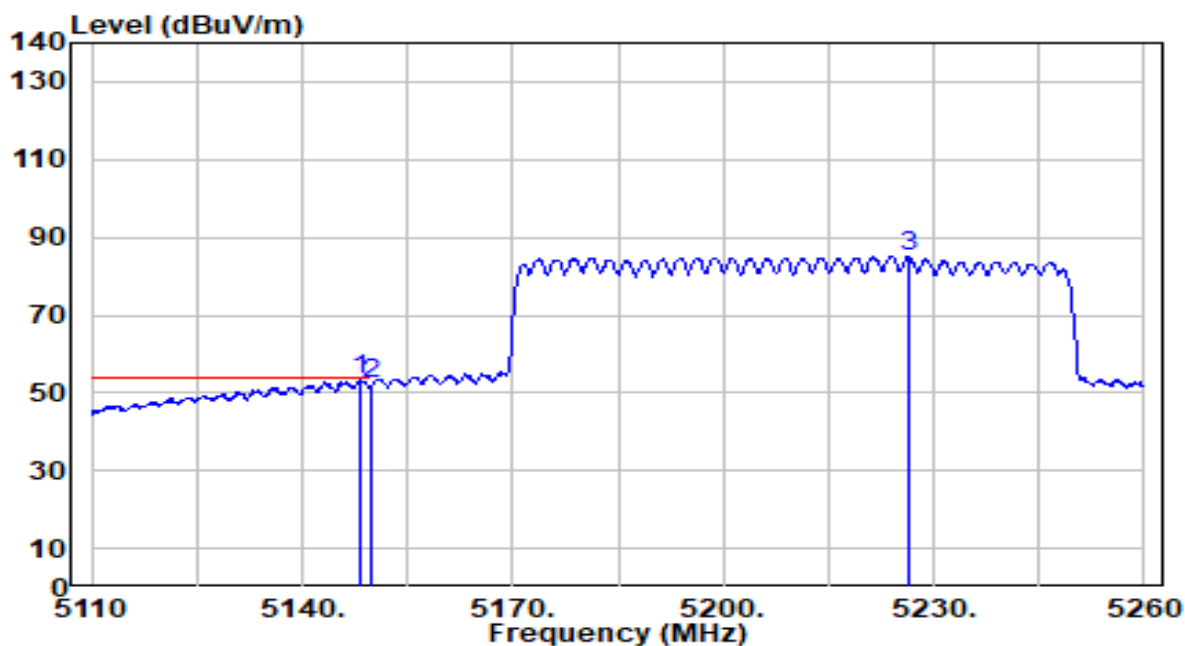


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.250	52.56	0.79	53.36	-0.64	54.00	116	19	Average
2	5150.000	51.54	0.80	52.34	-1.66	54.00	116	19	Average
3	5226.400	84.22	0.81	85.03	N/A	N/A	116	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

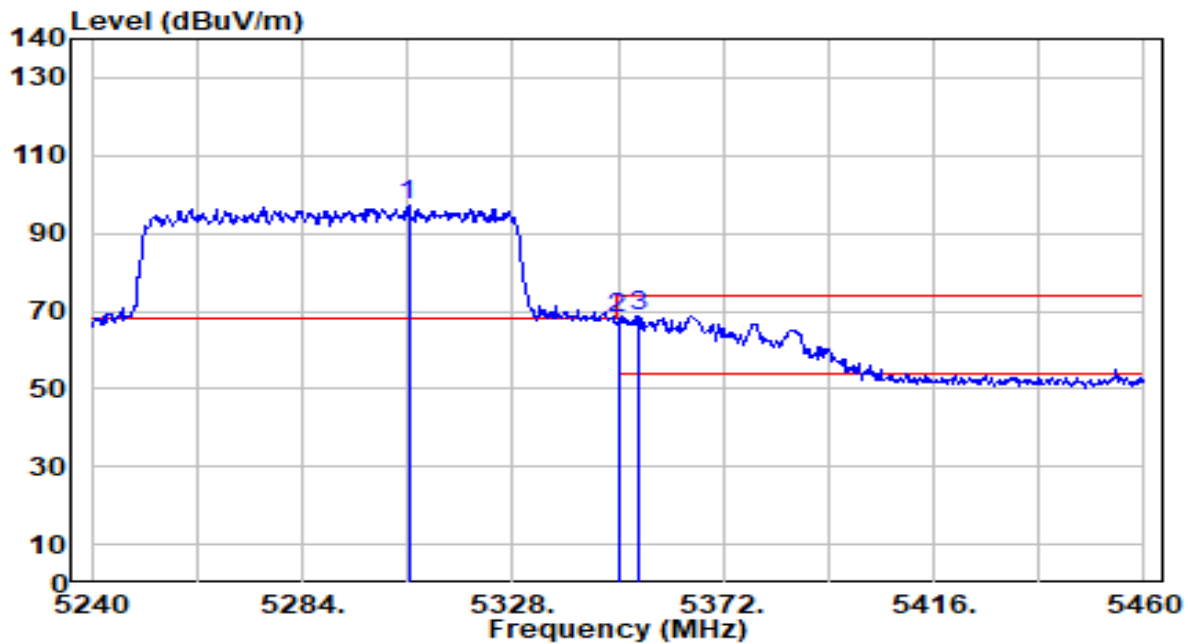


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.220	96.52	0.67	97.19	N/A	N/A	252	296	Peak
2	5350.000	67.34	0.59	67.93	-6.07	74.00	252	296	Peak
3	* 5354.400	68.28	0.59	68.87	-5.13	74.00	252	296	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

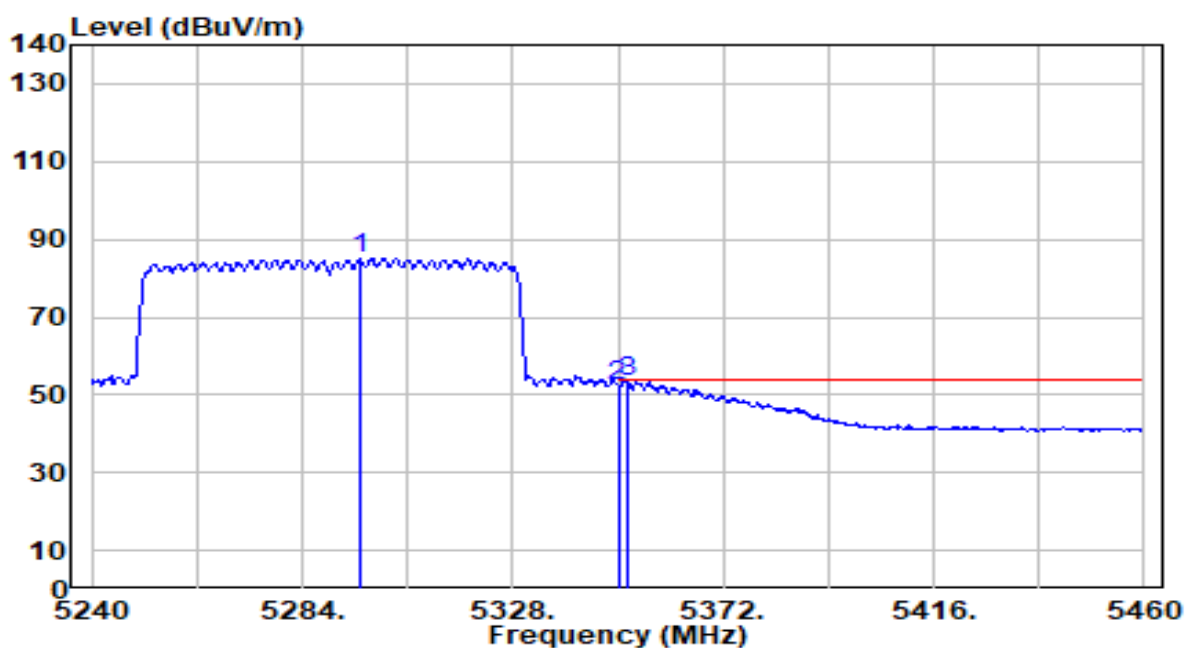


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.100	84.42	0.69	85.11	N/A	N/A	252	296	Average
2	5350.000	51.97	0.59	52.56	-1.44	54.00	252	296	Average
3	* 5351.760	52.93	0.59	53.52	-0.48	54.00	252	296	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

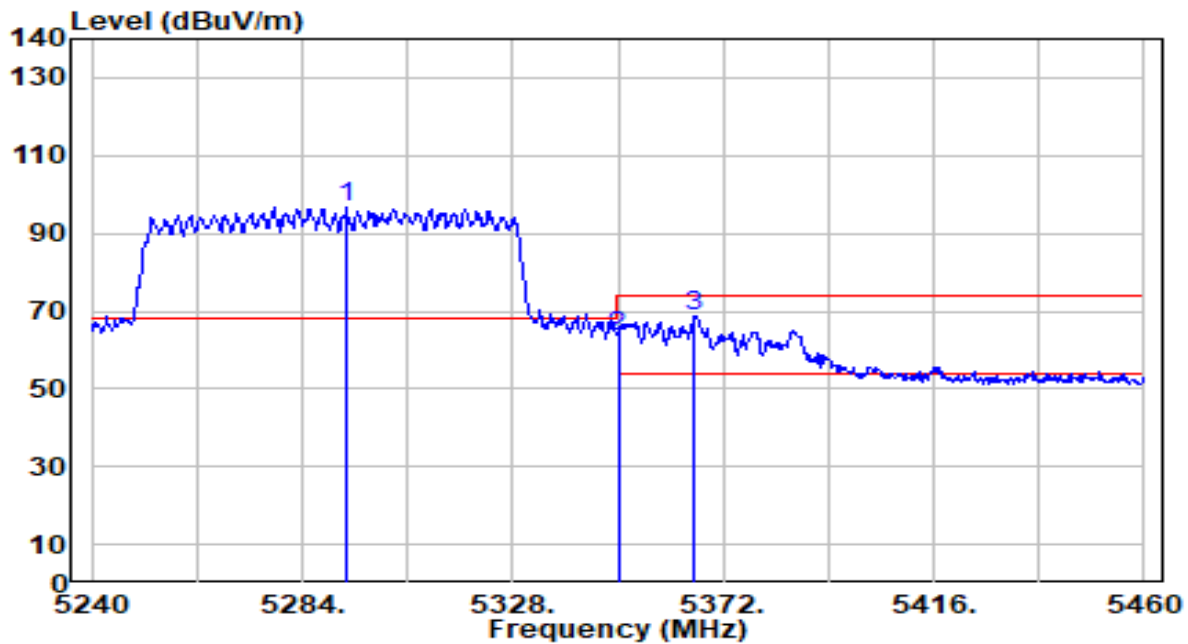


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5293.240	95.98	0.69	96.67	N/A	N/A	259	337	Peak
2	5350.000	62.83	0.59	63.43	-10.57	74.00	259	337	Peak
3	* 5366.060	68.13	0.57	68.69	-5.31	74.00	259	337	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

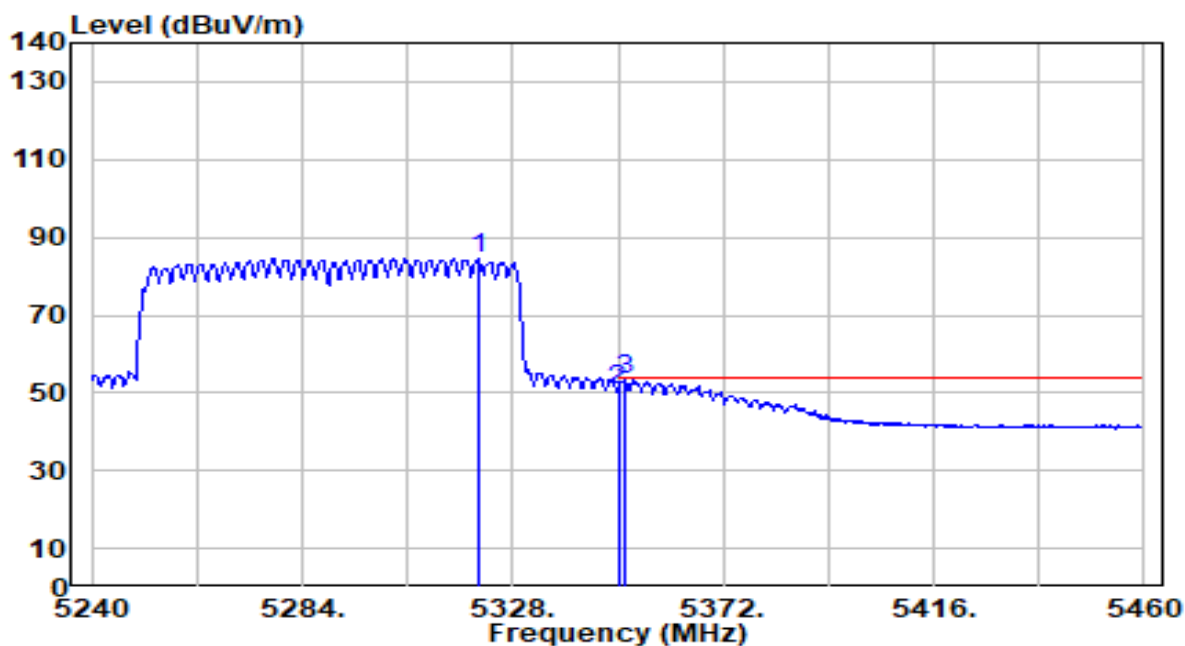

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.740	83.86	0.65	84.50	N/A	N/A	259	337	Average
2	5350.000	50.26	0.59	50.86	-3.14	54.00	259	337	Average
3	* 5351.320	52.65	0.59	53.24	-0.76	54.00	259	337	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.