


EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

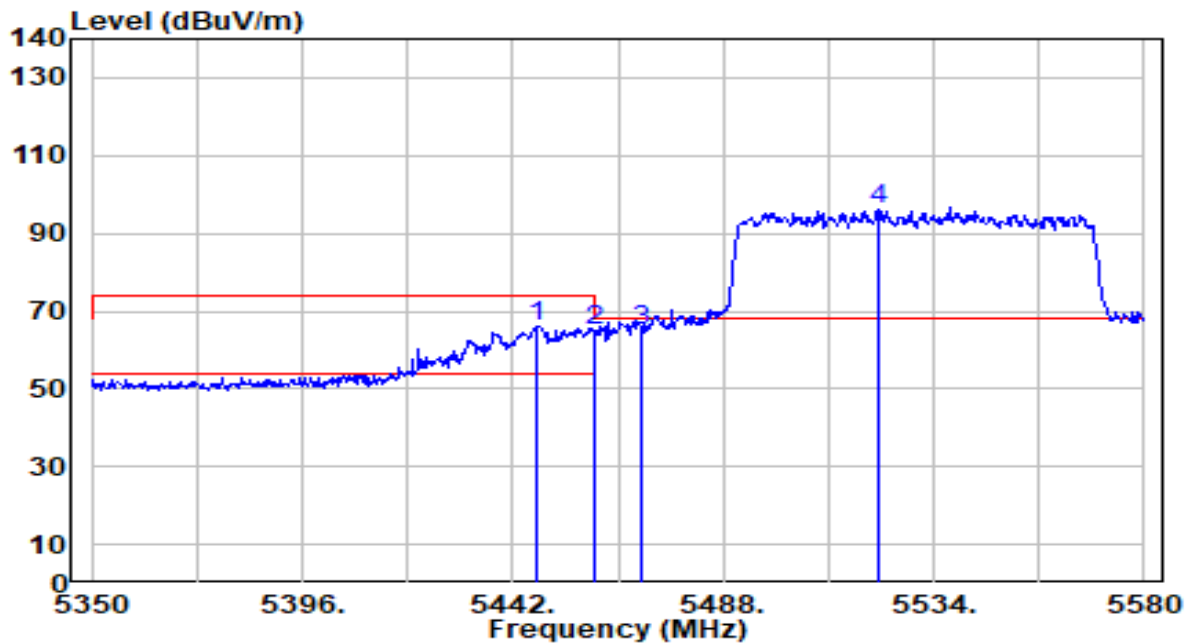


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.290	65.35	0.71	66.06	-7.94	74.00	248	303	Peak
2	5460.000	64.40	0.76	65.16	-8.84	74.00	248	303	Peak
3	* 5470.000	64.22	0.80	65.02	-3.18	68.20	248	303	Peak
4	5522.040	95.00	1.03	96.03	N/A	N/A	248	303	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

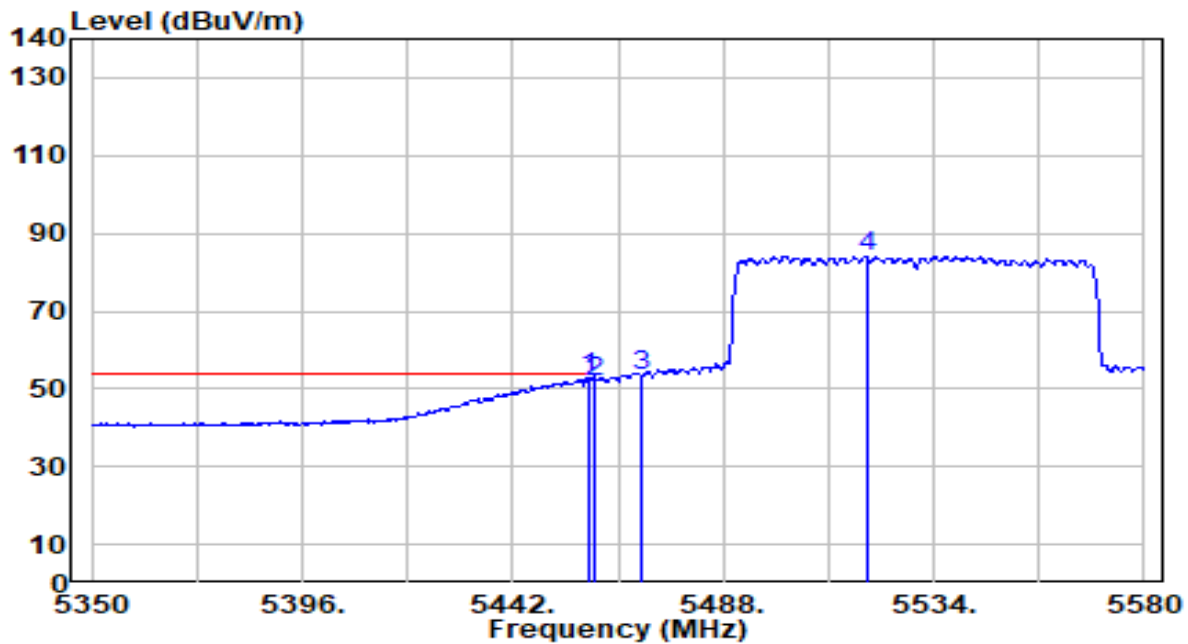


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.790	52.31	0.76	53.07	-0.93	54.00	248	303	Average
2		5460.000	51.12	0.76	51.88	-2.12	54.00	248	303	Average
3		5470.000	52.52	0.80	53.32	N/A	N/A	248	303	Average
4		5519.280	82.96	1.02	83.97	N/A	N/A	248	303	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

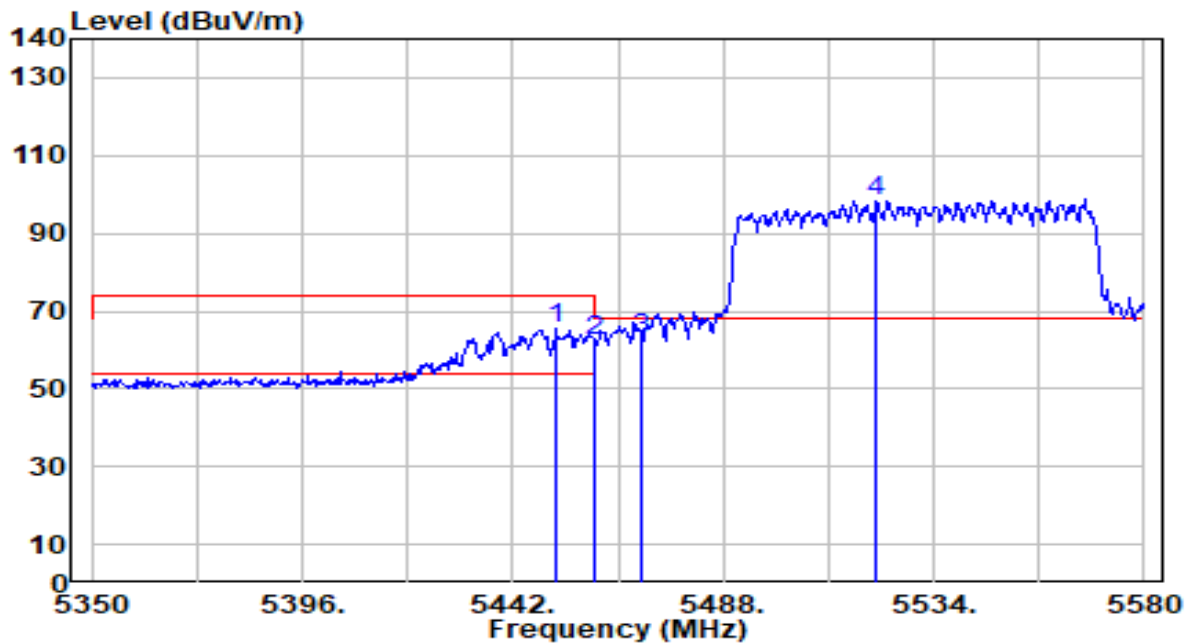


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.430	64.54	0.72	65.26	-8.74	74.00	277	331	Peak
2	5460.000	61.79	0.76	62.55	-11.45	74.00	277	331	Peak
3	* 5470.000	62.22	0.80	63.02	-5.18	68.20	277	331	Peak
4	5521.580	97.18	1.03	98.21	N/A	N/A	277	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

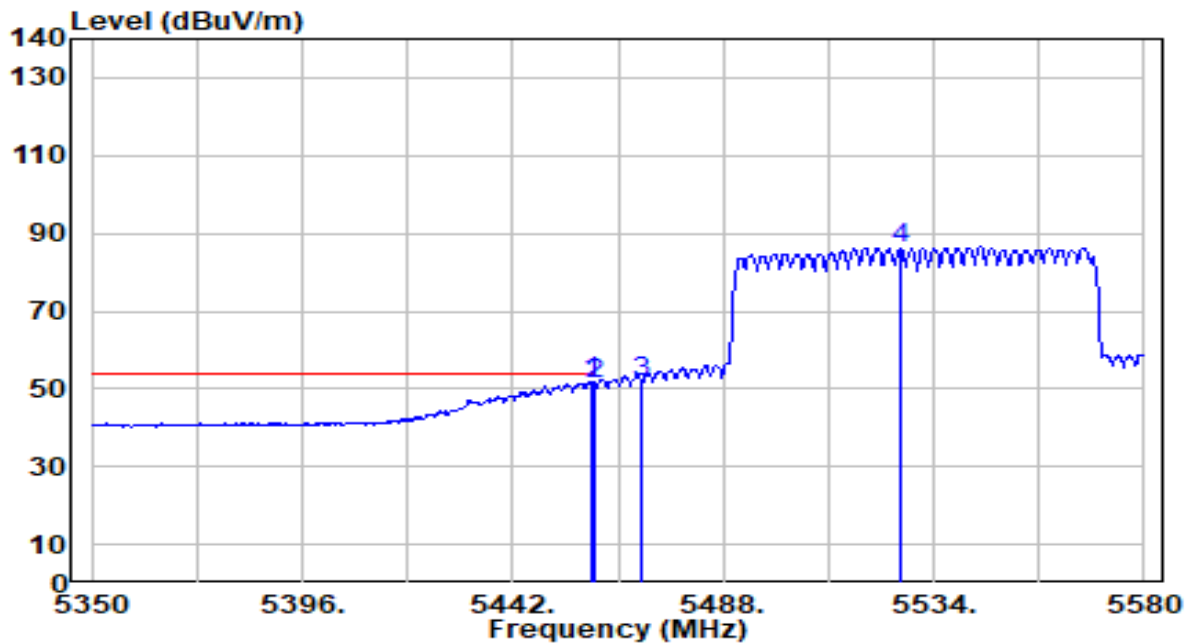


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5459.020	51.16	0.76	51.91	-2.09	54.00	277	331	Average
2		5460.000	50.55	0.76	51.31	-2.69	54.00	277	331	Average
3		5470.000	51.05	0.80	51.86	N/A	N/A	277	331	Average
4		5526.870	85.13	1.05	86.19	N/A	N/A	277	331	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

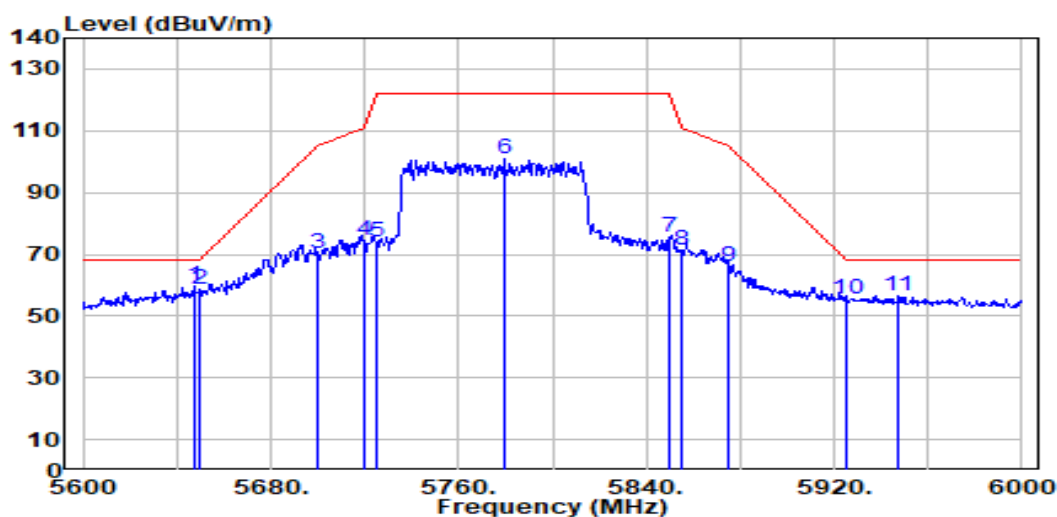


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	58.08	1.58	59.65	-8.55	68.20	247	16	Peak
2		5650.000	56.95	1.59	58.53	-9.67	68.20	247	16	Peak
3		5700.000	68.50	1.79	70.29	-34.91	105.20	247	16	Peak
4		5720.000	72.52	1.87	74.39	-36.41	110.80	247	16	Peak
5		5725.000	72.06	1.89	73.95	-48.25	122.20	247	16	Peak
6		5779.600	98.69	2.11	100.79	N/A	N/A	247	16	Peak
7		5850.000	73.25	2.27	75.52	-46.68	122.20	247	16	Peak
8		5855.000	69.30	2.28	71.57	-39.23	110.80	247	16	Peak
9		5875.000	63.54	2.31	65.85	-39.35	105.20	247	16	Peak
10		5925.000	53.22	2.38	55.61	-12.59	68.20	247	16	Peak
11		5947.200	54.30	2.42	56.72	-11.48	68.20	247	16	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

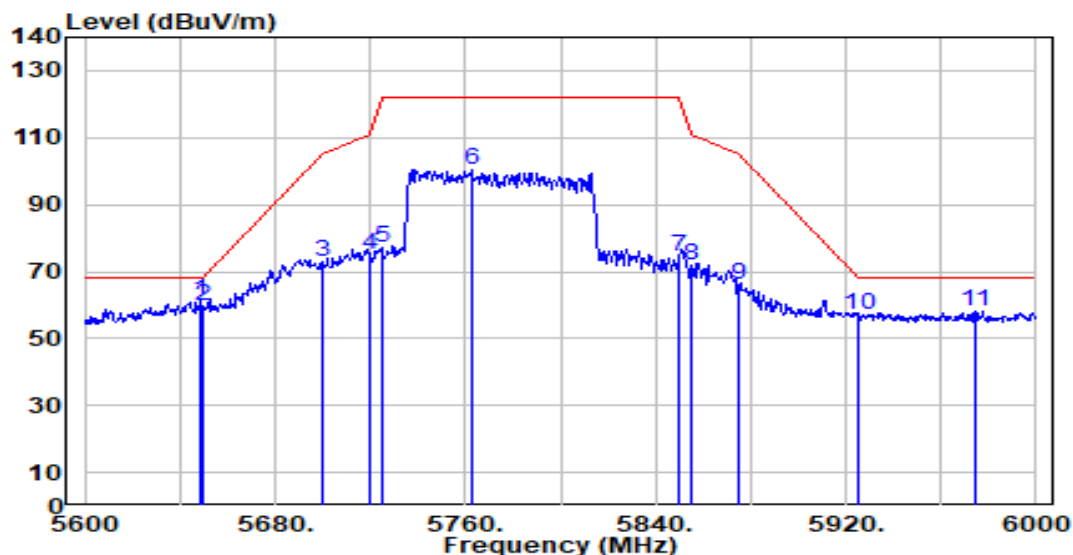


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.800	59.86	1.58	61.44	-6.76	68.20	267	336	Peak
2		5650.000	57.91	1.59	59.49	-8.71	68.20	267	336	Peak
3		5700.000	70.96	1.79	72.75	-32.45	105.20	267	336	Peak
4		5720.000	73.16	1.87	75.03	-35.77	110.80	267	336	Peak
5		5725.000	75.18	1.89	77.07	-45.13	122.20	267	336	Peak
6		5762.400	98.41	2.04	100.45	N/A	N/A	267	336	Peak
7		5850.000	72.35	2.27	74.62	-47.58	122.20	267	336	Peak
8		5855.000	69.35	2.28	71.62	-39.18	110.80	267	336	Peak
9		5875.000	63.63	2.31	65.94	-39.26	105.20	267	336	Peak
10		5925.000	54.50	2.38	56.88	-11.32	68.20	267	336	Peak
11		5974.000	55.80	2.46	58.26	-9.94	68.20	267	336	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

IC Band1 Band Edge Data:

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

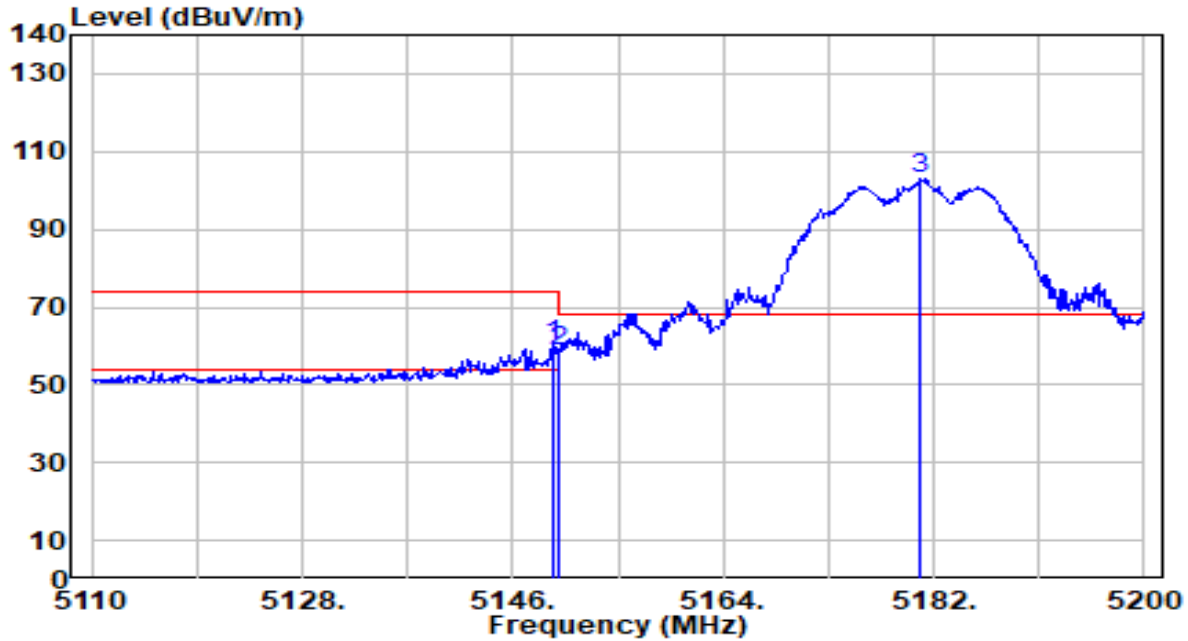


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	59.18	0.80	59.97	-14.03	74.00	236	307	Peak
2		5150.000	57.98	0.80	58.78	-15.22	74.00	236	307	Peak
3		5180.830	102.01	0.83	102.85	N/A	N/A	236	307	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

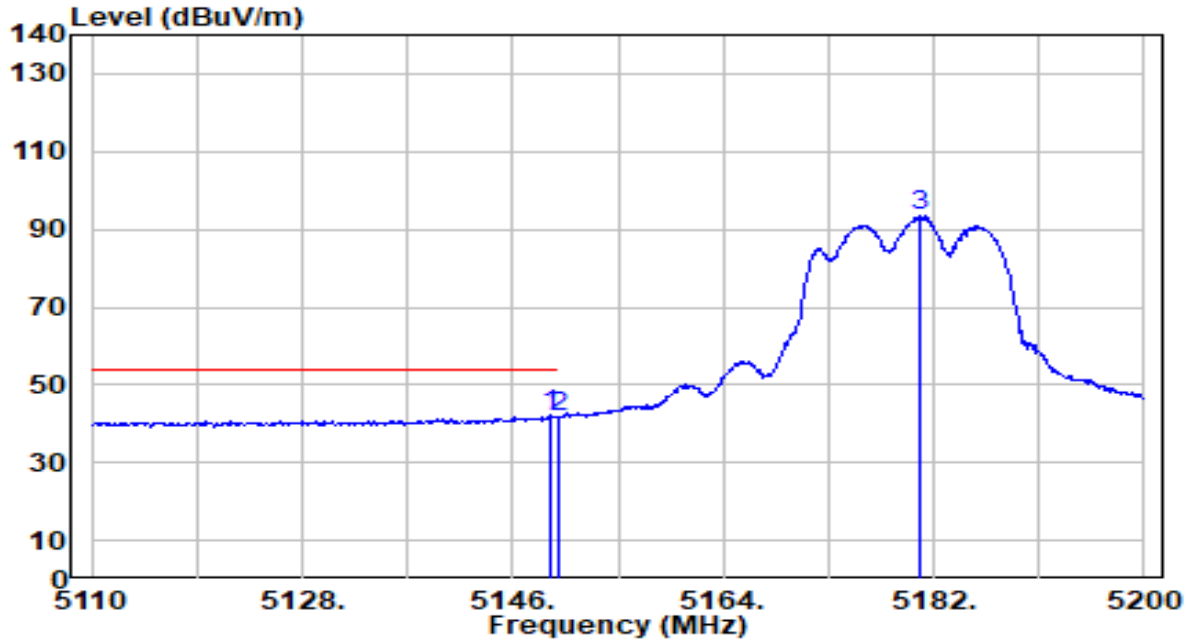


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.240	41.21	0.80	42.00	-12.00	54.00	236	307	Average
2		5150.000	40.75	0.80	41.54	-12.46	54.00	236	307	Average
3		5180.830	92.63	0.83	93.46	N/A	N/A	236	307	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

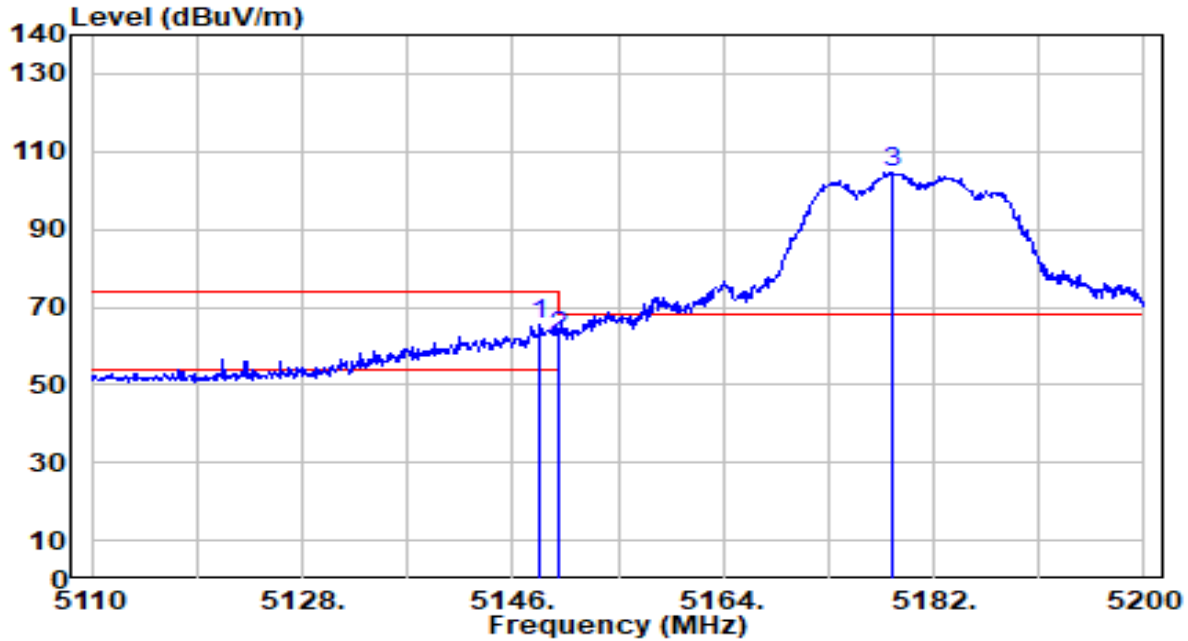


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.340	64.51	0.79	65.31	-8.69	74.00	102	13	Peak
2	5150.000	61.52	0.80	62.32	-11.68	74.00	102	13	Peak
3	5178.490	103.86	0.83	104.69	N/A	N/A	102	13	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

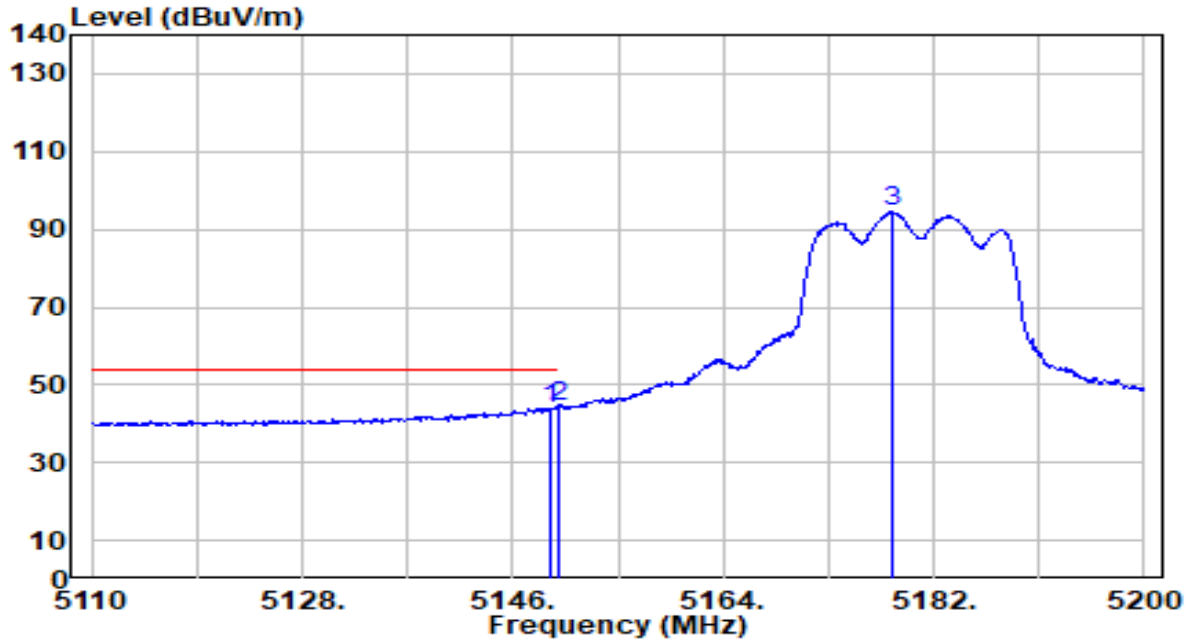


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.330	43.29	0.80	44.08	-9.92	54.00	102	13	Average
2	* 5150.000	43.77	0.80	44.57	-9.43	54.00	102	13	Average
3	5178.400	93.62	0.83	94.45	N/A	N/A	102	13	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

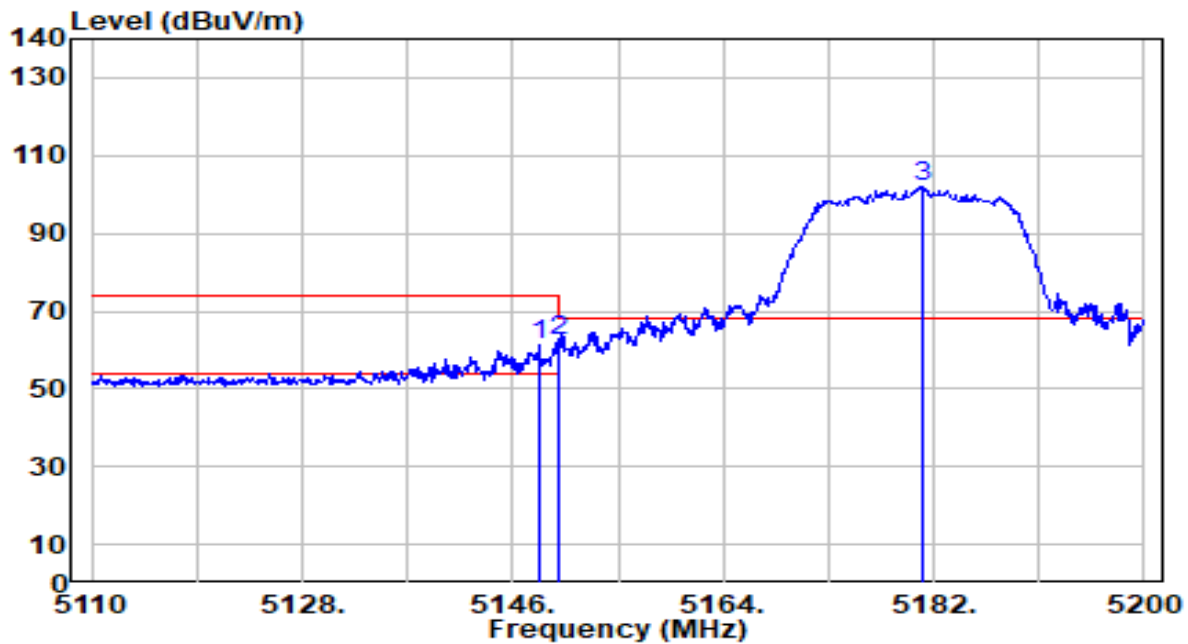


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.250	60.34	0.79	61.13	-12.87	74.00	236	307	Peak
2	* 5150.000	61.67	0.80	62.47	-11.53	74.00	236	307	Peak
3	5181.010	100.90	0.83	101.73	N/A	N/A	236	307	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

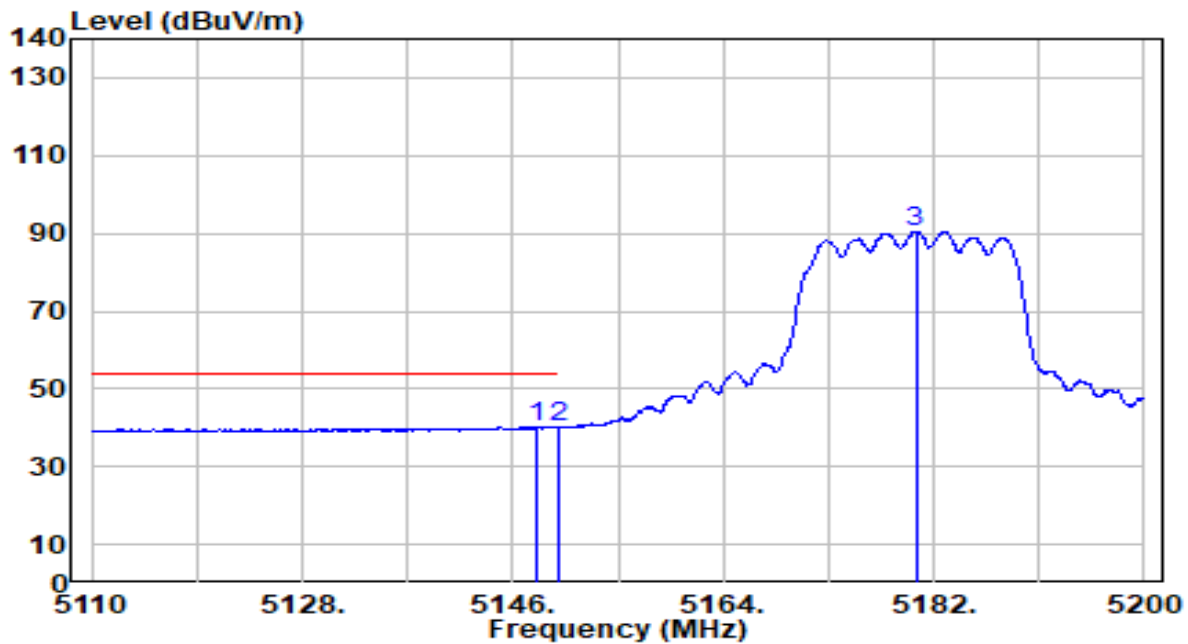


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.160	39.44	0.79	40.23	-13.77	54.00	236	307	Average
2	* 5150.000	39.61	0.80	40.40	-13.60	54.00	236	307	Average
3	5180.470	89.76	0.83	90.59	N/A	N/A	236	307	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

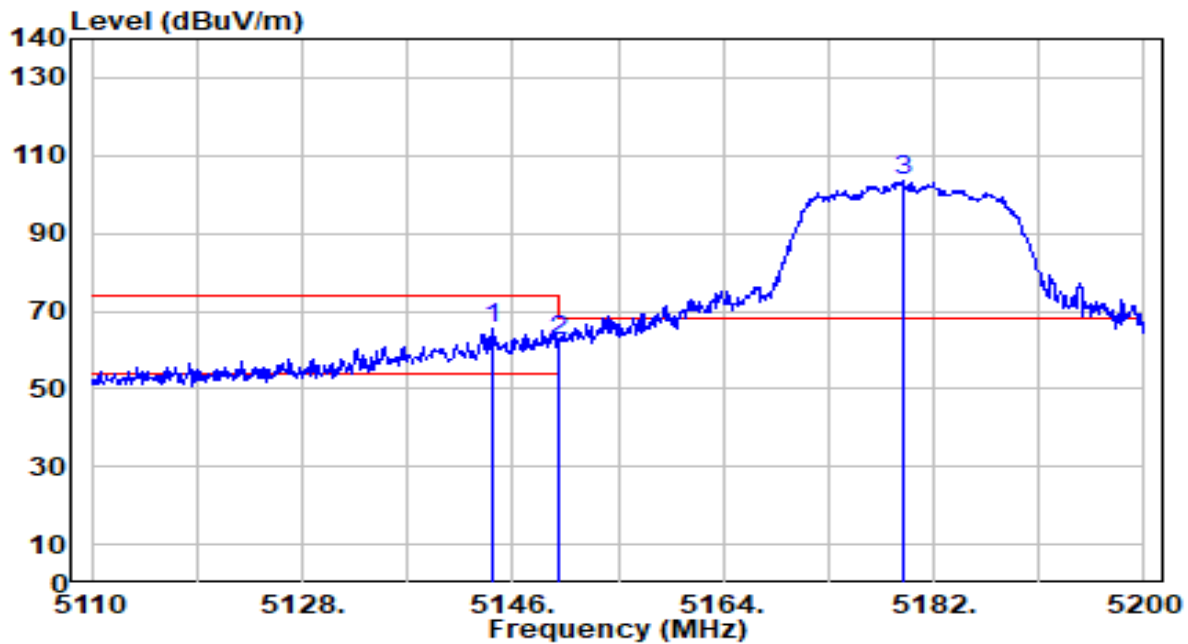


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.380	64.85	0.79	65.64	-8.36	74.00	102	13	Peak
2		5150.000	61.53	0.80	62.32	-11.68	74.00	102	13	Peak
3		5179.390	102.57	0.83	103.41	N/A	N/A	102	13	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

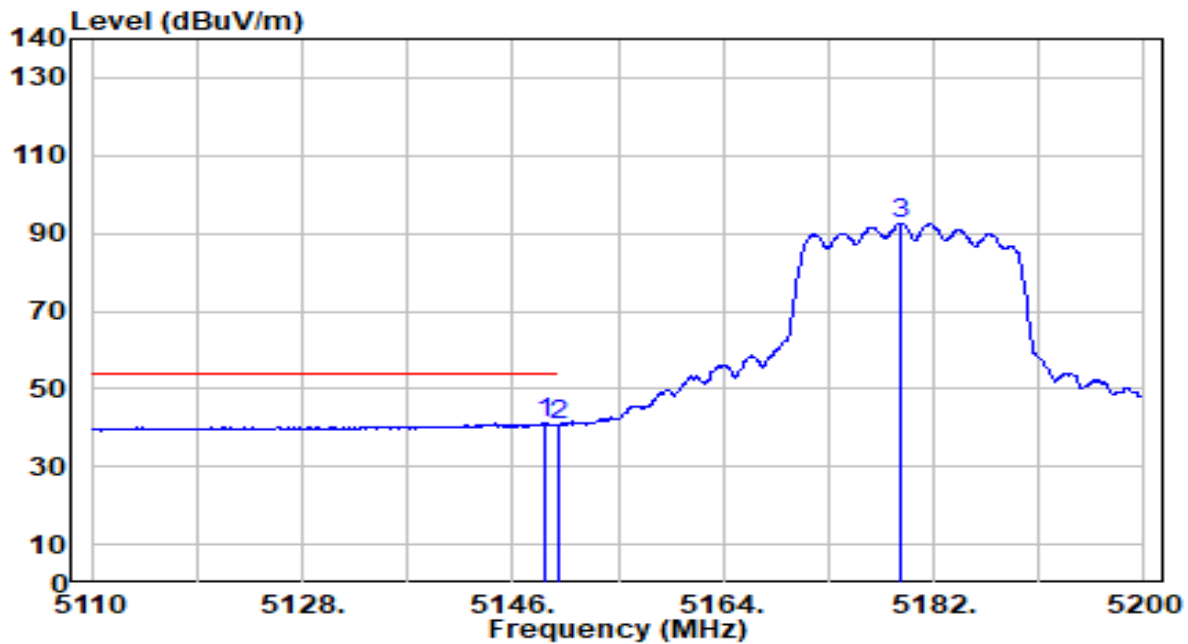


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	40.51	0.79	41.30	-12.70	54.00	102	13	Average
2		5150.000	39.94	0.80	40.74	-13.26	54.00	102	13	Average
3		5179.210	91.87	0.83	92.71	N/A	N/A	102	13	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

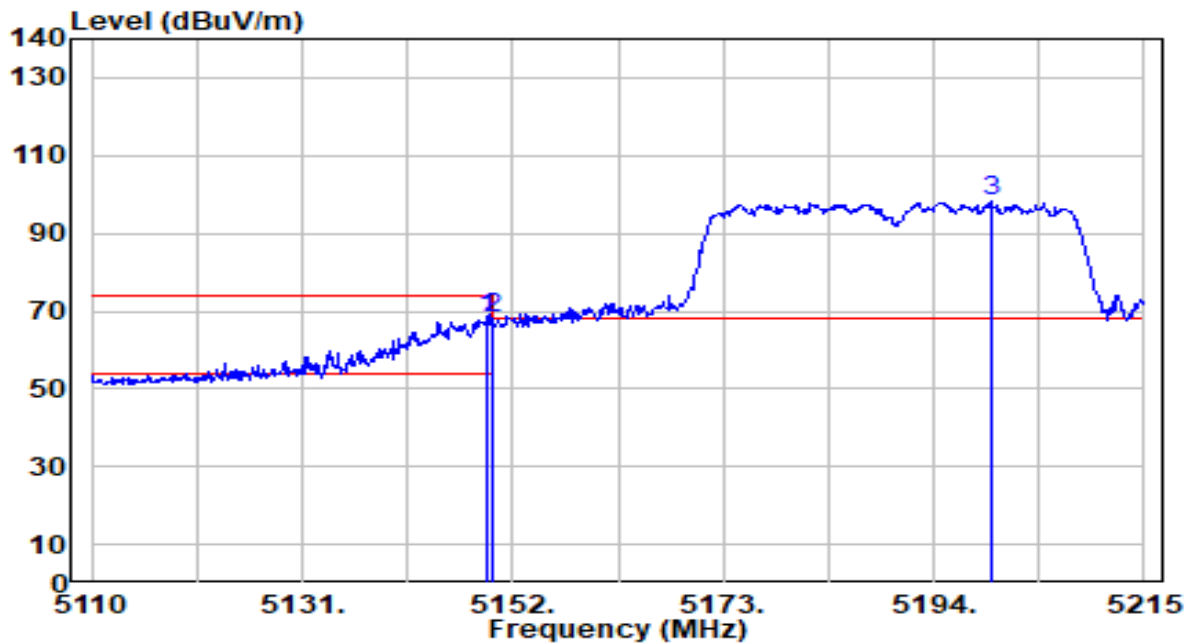


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.480	67.19	0.80	67.98	-6.02	74.00	223	324	Peak
2	5150.000	67.09	0.80	67.89	-6.11	74.00	223	324	Peak
3	5199.670	97.21	0.86	98.07	N/A	N/A	223	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

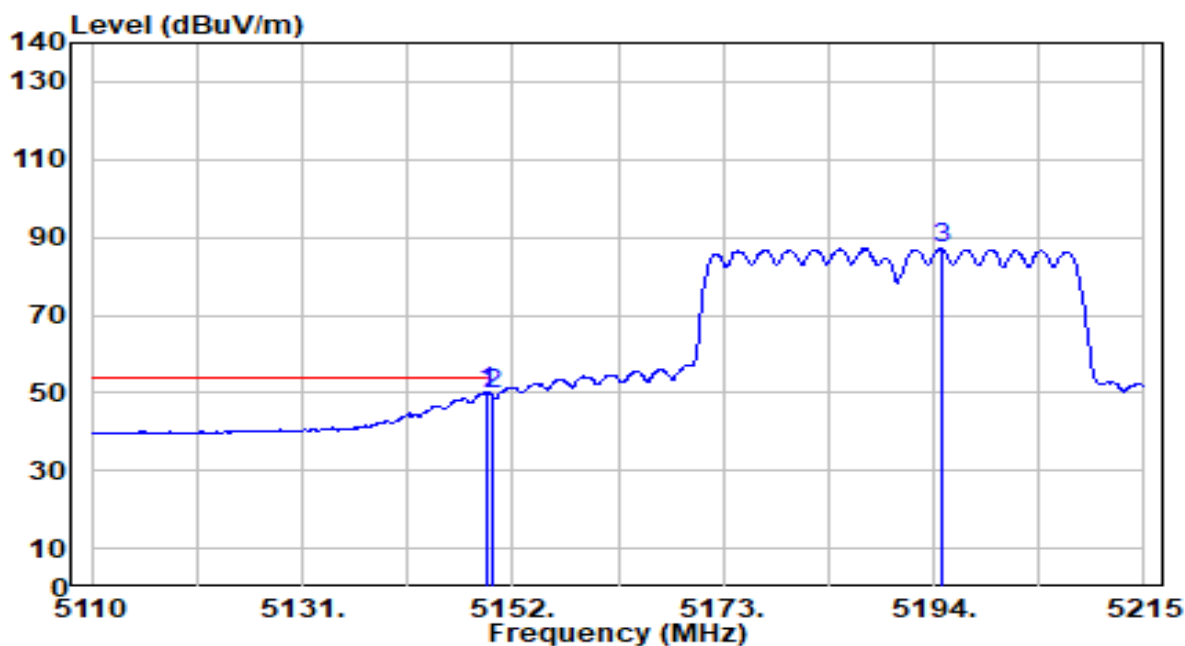


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	49.33	0.80	50.13	-3.87	54.00	223	324	Average
2		5150.000	48.81	0.80	49.60	-4.40	54.00	223	324	Average
3		5194.735	86.25	0.85	87.11	N/A	N/A	223	324	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

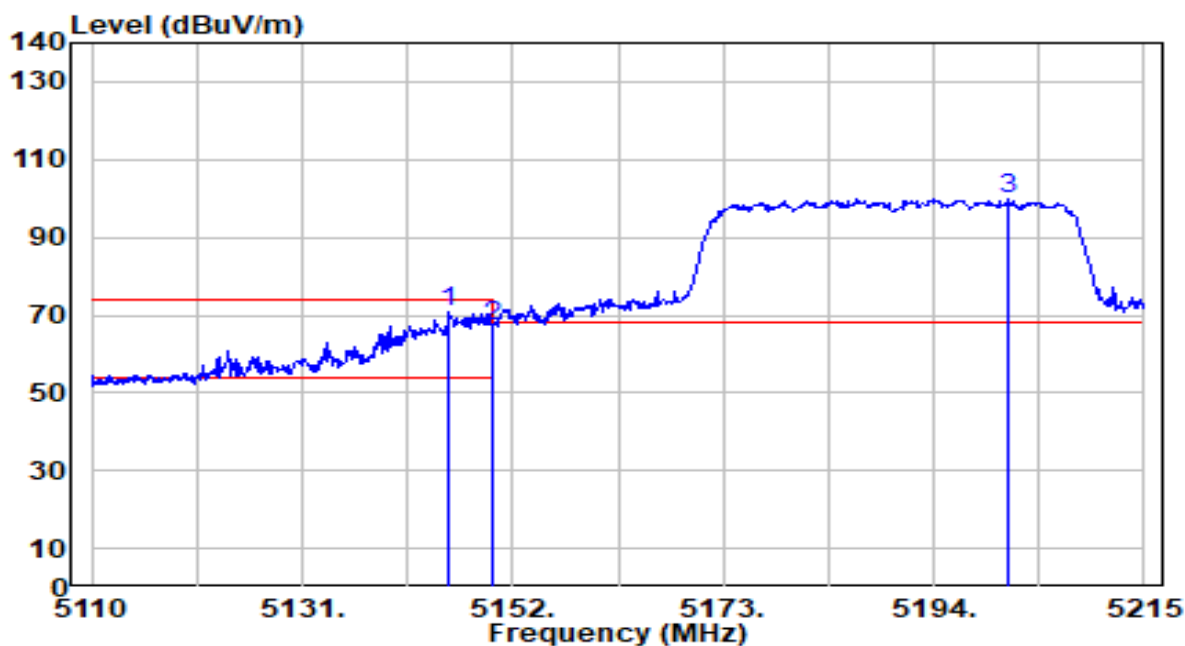


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5145.700	70.04	0.79	70.84	-3.16	74.00	116	19	Peak
2	5150.000	66.22	0.80	67.01	-6.99	74.00	116	19	Peak
3	5201.455	99.10	0.86	99.95	N/A	N/A	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

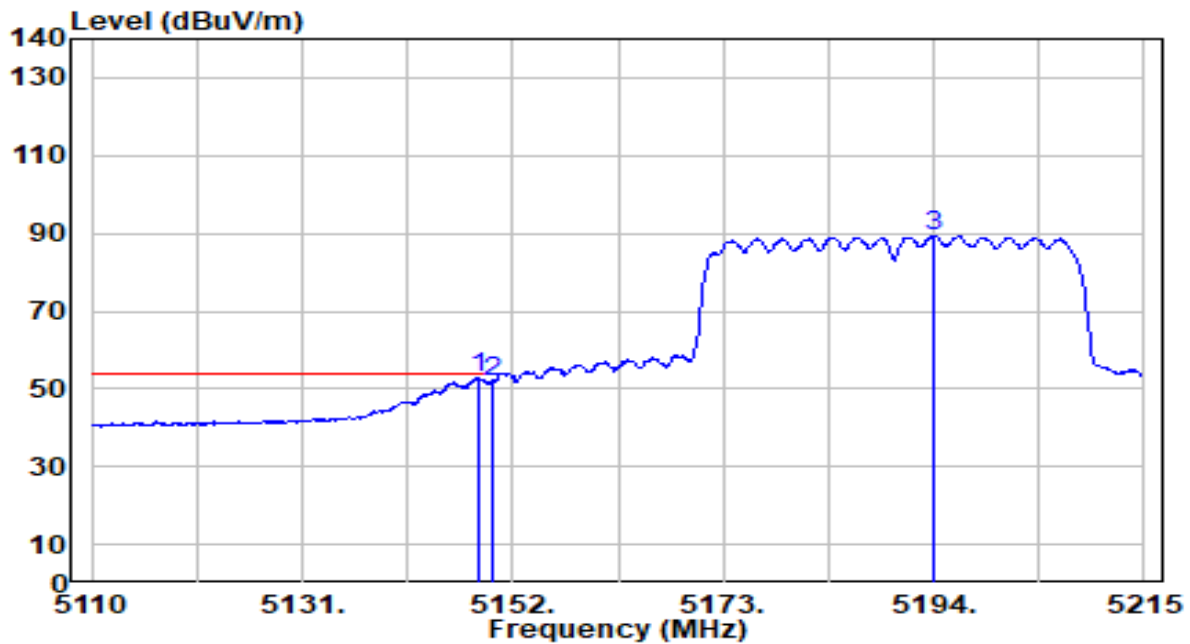


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.640	52.27	0.79	53.06	-0.94	54.00	116	19	Average
2	5150.000	51.22	0.80	52.02	-1.98	54.00	116	19	Average
3	5194.000	88.56	0.85	89.41	N/A	N/A	116	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

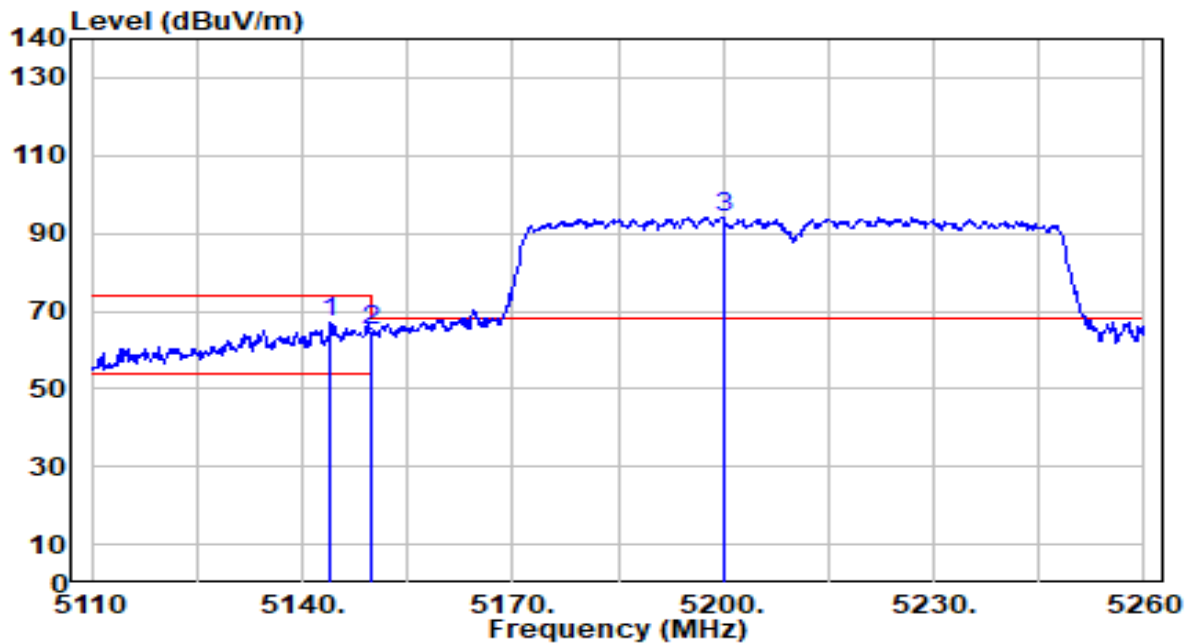


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.050	66.19	0.79	66.98	-7.02	74.00	223	324	Peak
2		5150.000	64.41	0.80	65.21	-8.79	74.00	223	324	Peak
3		5200.000	93.41	0.86	94.26	N/A	N/A	223	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

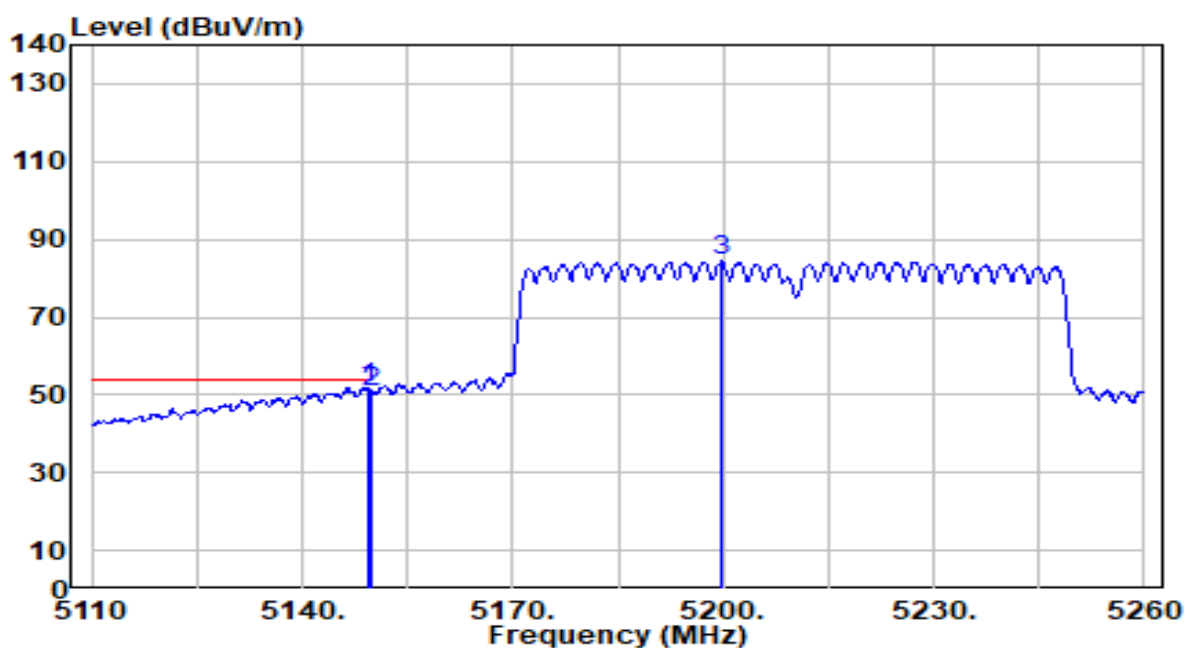


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.300	50.99	0.80	51.79	-2.21	54.00	223	324	Average
2		5150.000	49.74	0.80	50.54	-3.46	54.00	223	324	Average
3		5199.700	83.52	0.86	84.38	N/A	N/A	223	324	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

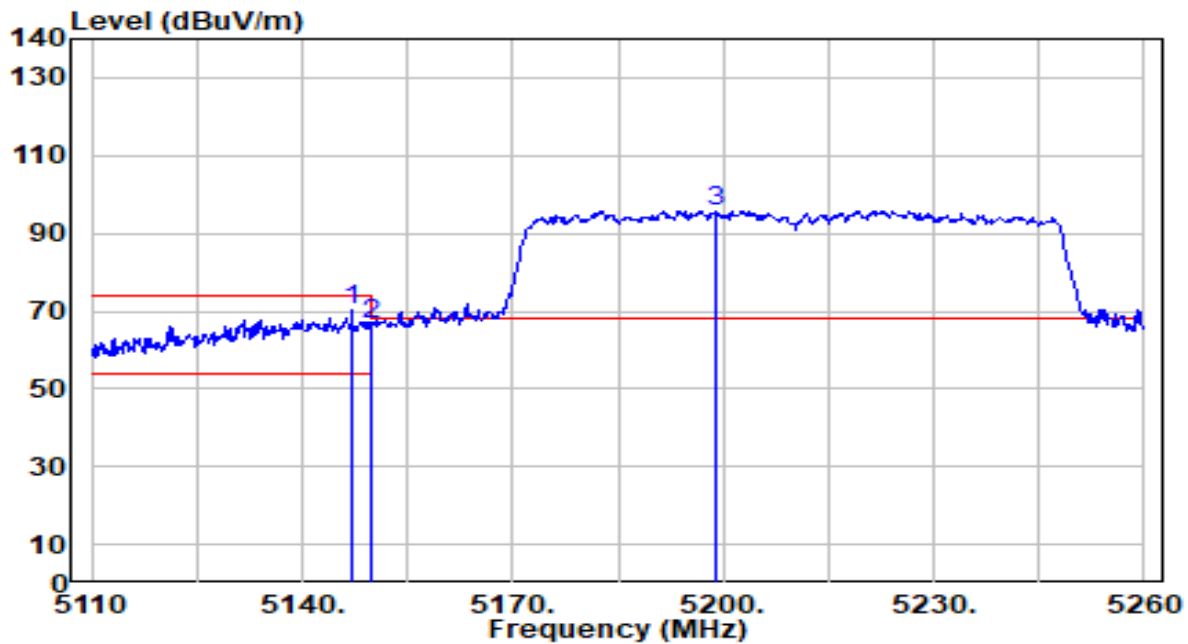


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.050	69.37	0.79	70.17	-3.83	74.00	116	19	Peak
2		5150.000	65.53	0.80	66.32	-7.68	74.00	116	19	Peak
3		5198.800	95.01	0.86	95.86	N/A	N/A	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

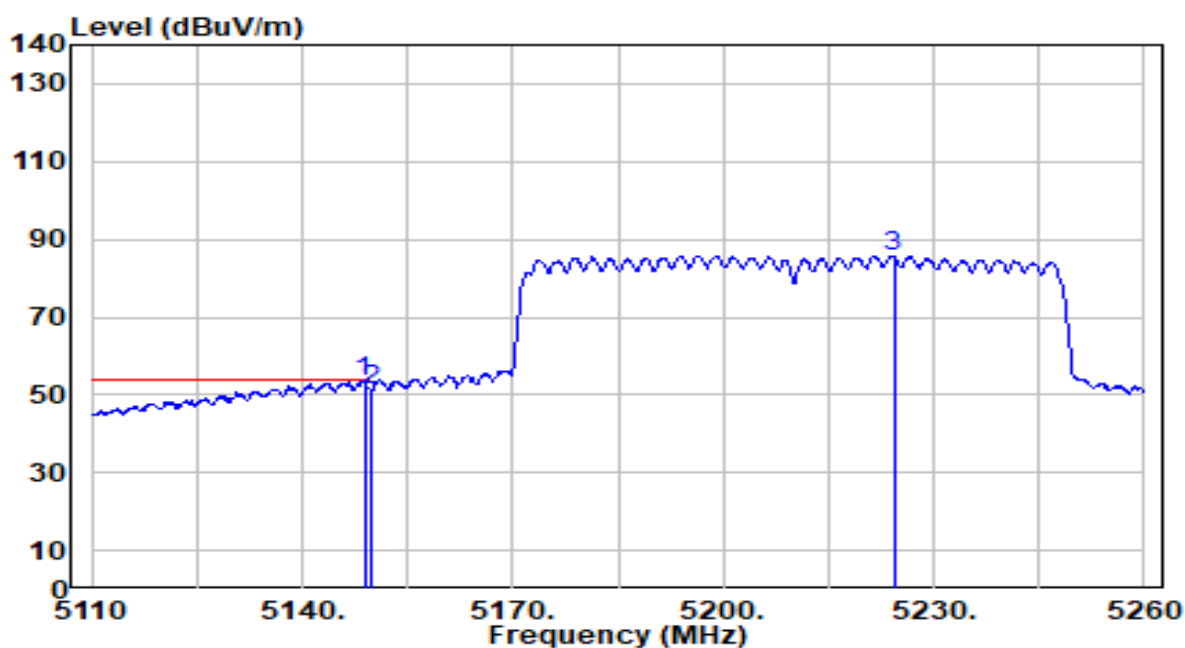


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	52.71	0.79	53.51	-0.49	54.00	116	19	Average
2		5150.000	50.69	0.80	51.49	-2.51	54.00	116	19	Average
3		5224.300	84.92	0.82	85.74	N/A	N/A	116	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

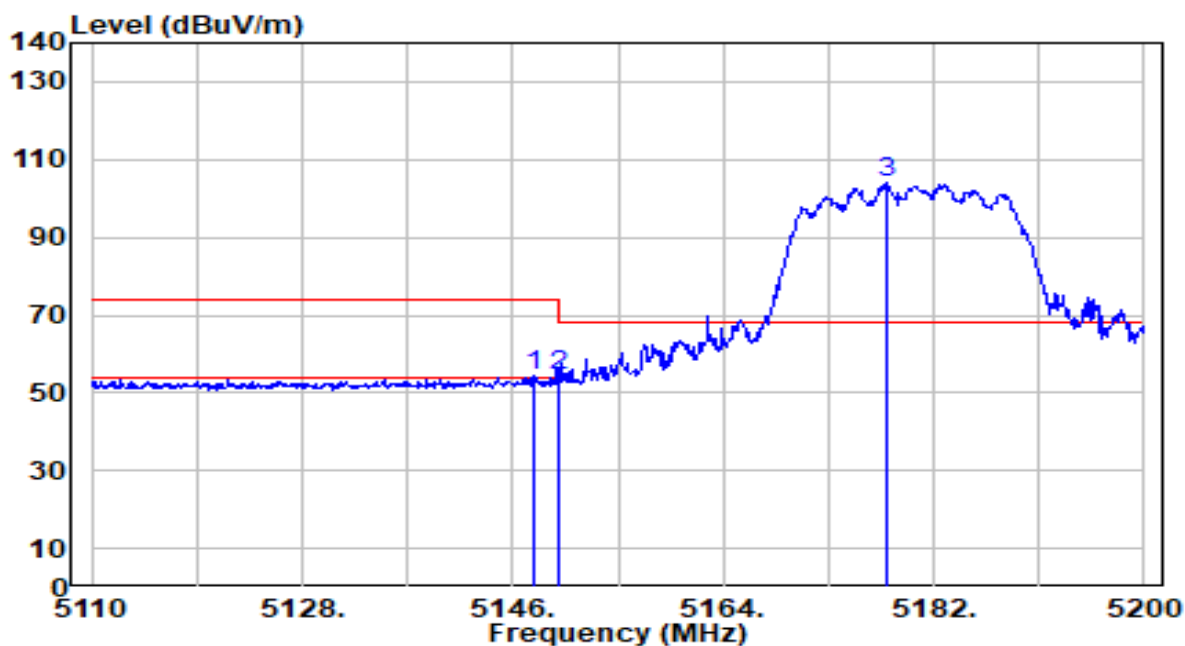


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.710	53.63	0.79	54.42	-19.58	74.00	236	307	Peak
2		5150.000	53.56	0.80	54.35	-19.65	74.00	236	307	Peak
3		5178.040	103.05	0.83	103.88	N/A	N/A	236	307	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

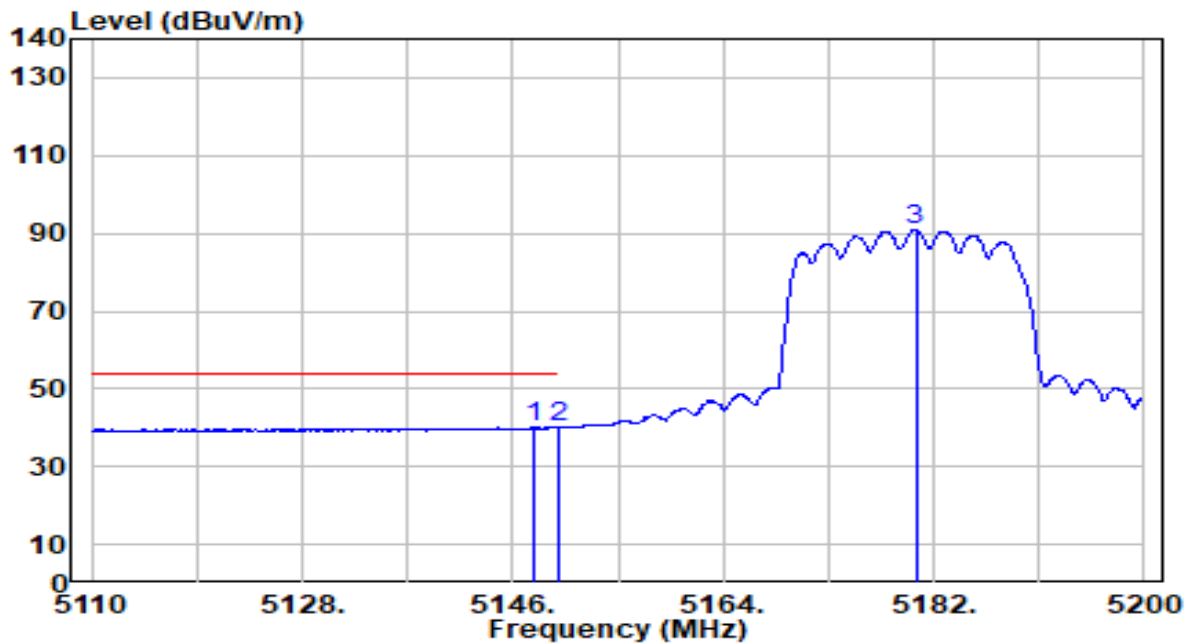


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.710	39.33	0.79	40.13	-13.87	54.00	236	307	Average
2		5150.000	39.30	0.80	40.10	-13.90	54.00	236	307	Average
3		5180.470	90.24	0.83	91.07	N/A	N/A	236	307	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

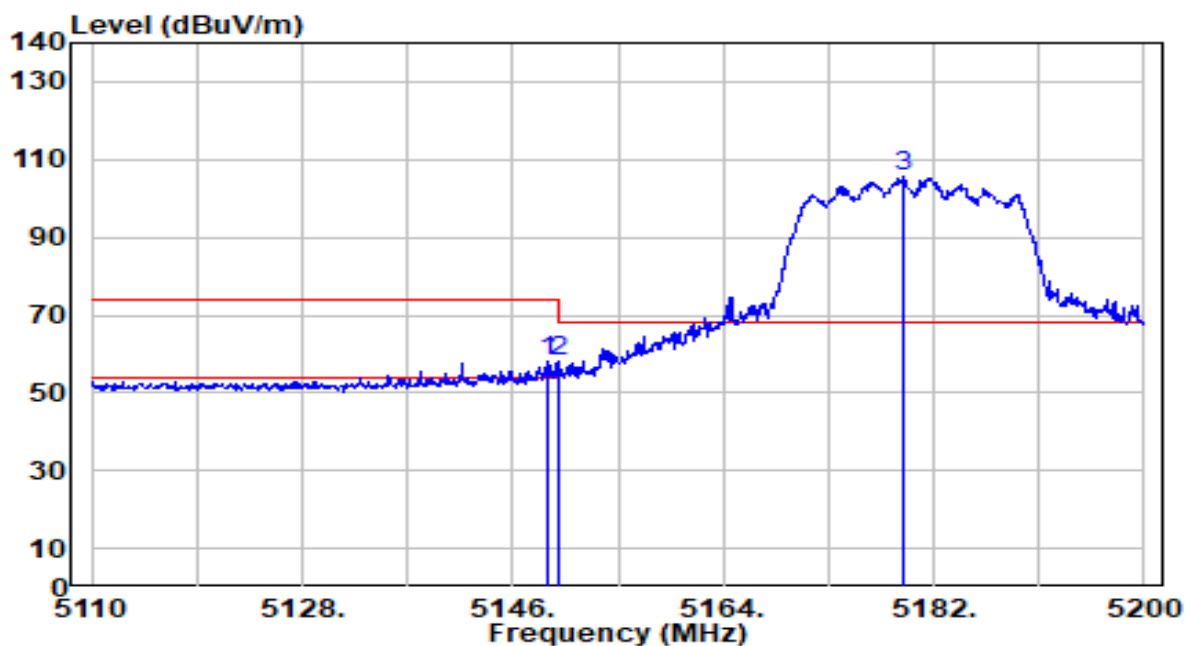


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.970	57.17	0.79	57.97	-16.03	74.00	102	13	Peak
2	5150.000	57.14	0.80	57.94	-16.06	74.00	102	13	Peak
3	5179.480	104.73	0.83	105.57	N/A	N/A	102	13	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-14
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

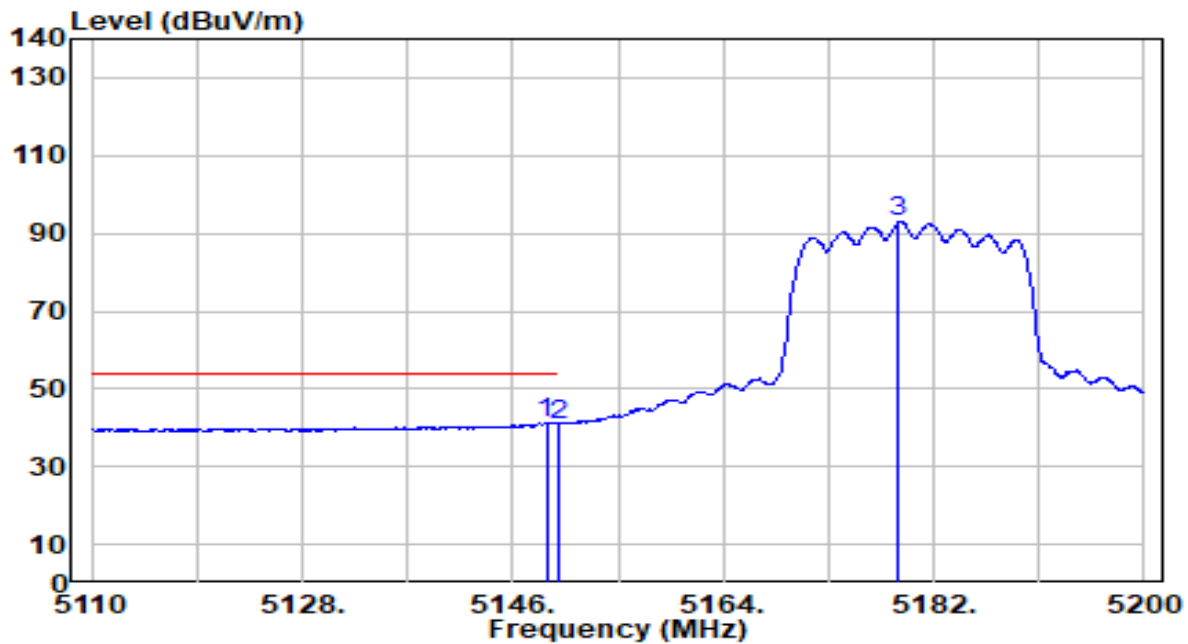


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.880	40.49	0.79	41.29	-12.71	54.00	102	13	Average
2		5150.000	40.14	0.80	40.94	-13.06	54.00	102	13	Average
3		5179.030	92.08	0.83	92.91	N/A	N/A	102	13	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

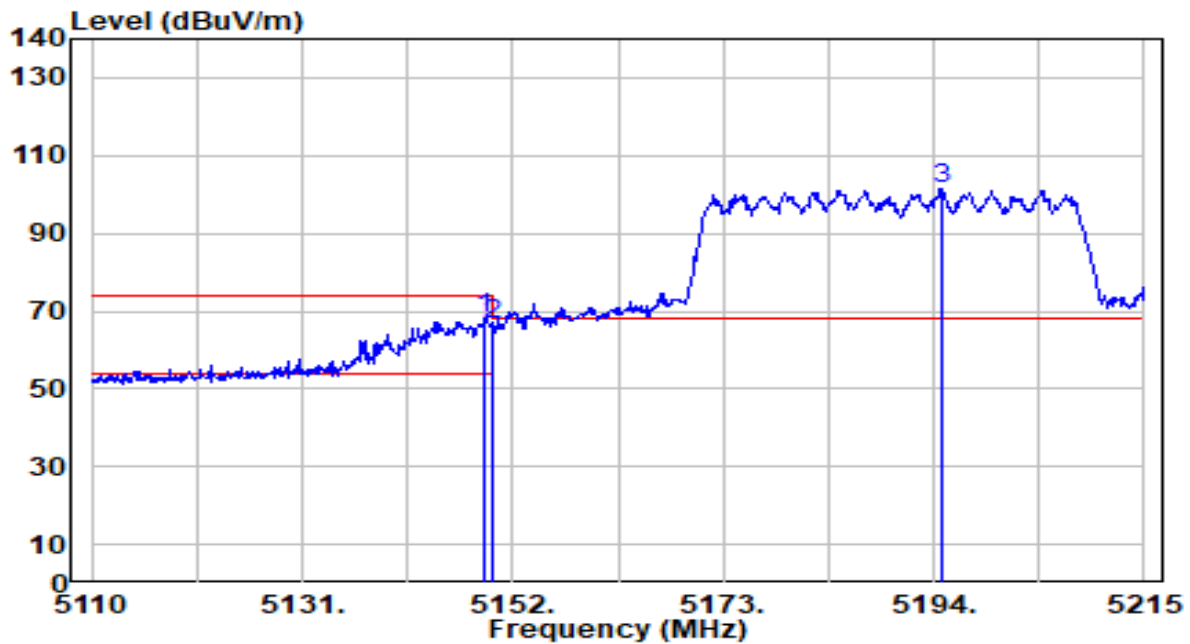


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.165	67.47	0.79	68.26	-5.74	74.00	223	324	Peak
2		5150.000	65.58	0.80	66.37	-7.63	74.00	223	324	Peak
3		5194.840	100.51	0.85	101.36	N/A	N/A	223	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

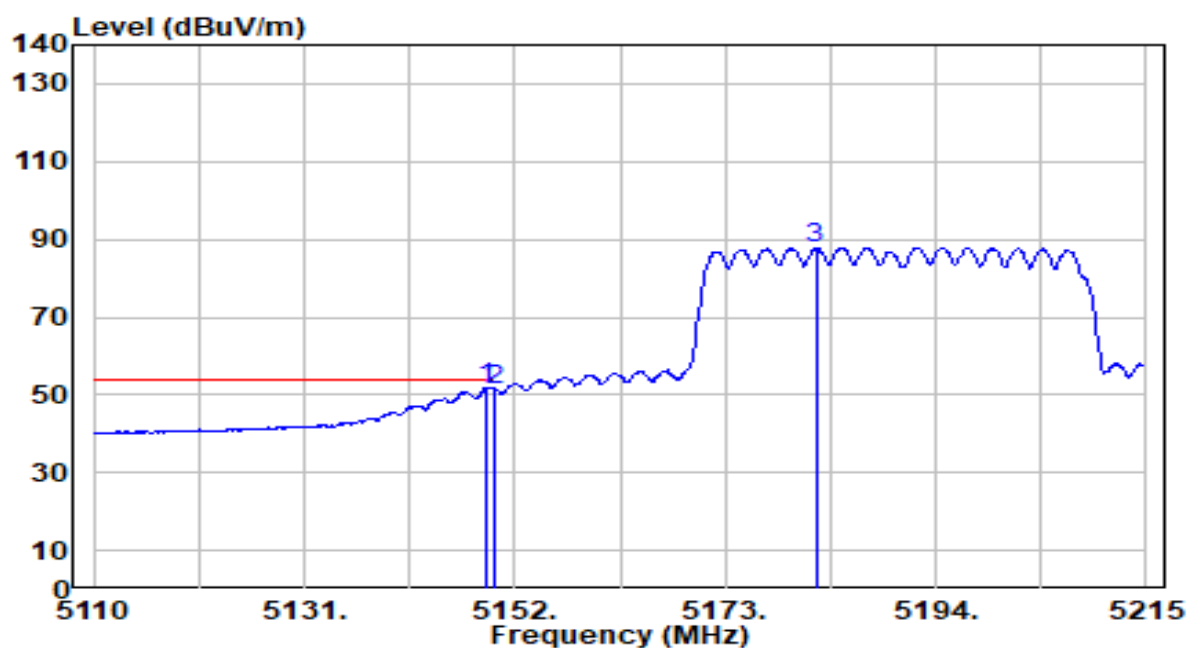


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.270	51.19	0.80	51.98	-2.02	54.00	223	324	Average
2		5150.000	50.67	0.80	51.46	-2.54	54.00	223	324	Average
3		5182.030	87.08	0.84	87.92	N/A	N/A	223	324	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

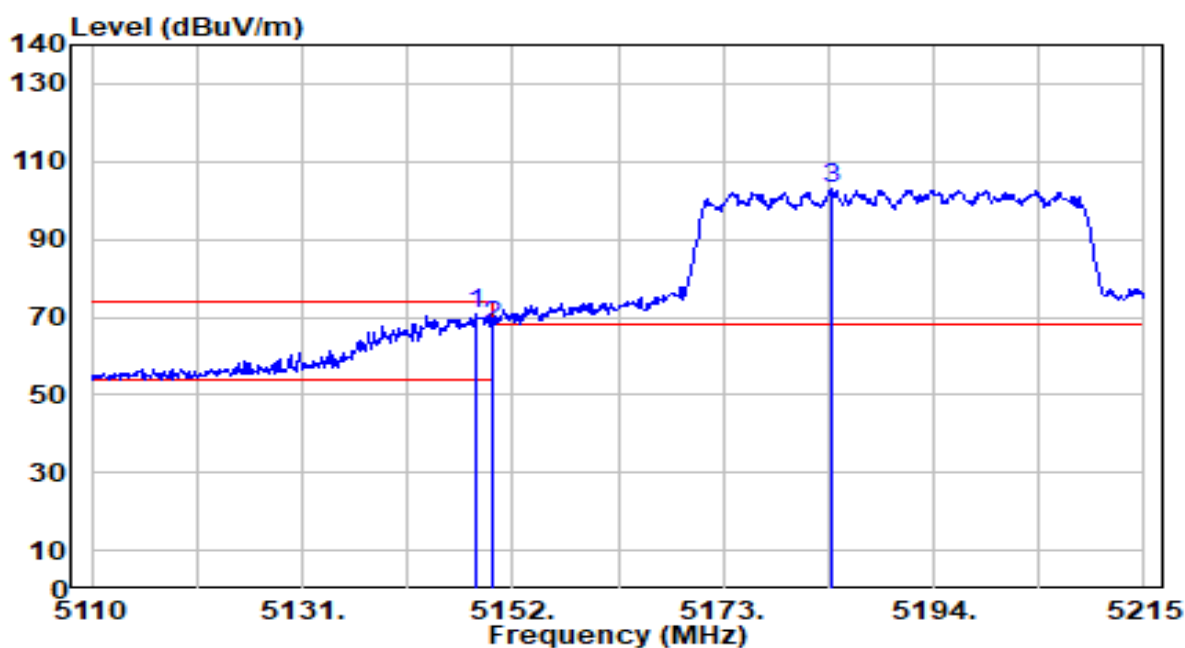


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.325	69.80	0.79	70.59	-3.41	74.00	116	19	Peak
2	5150.000	66.57	0.80	67.37	-6.63	74.00	116	19	Peak
3	5183.920	102.26	0.84	103.10	N/A	N/A	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

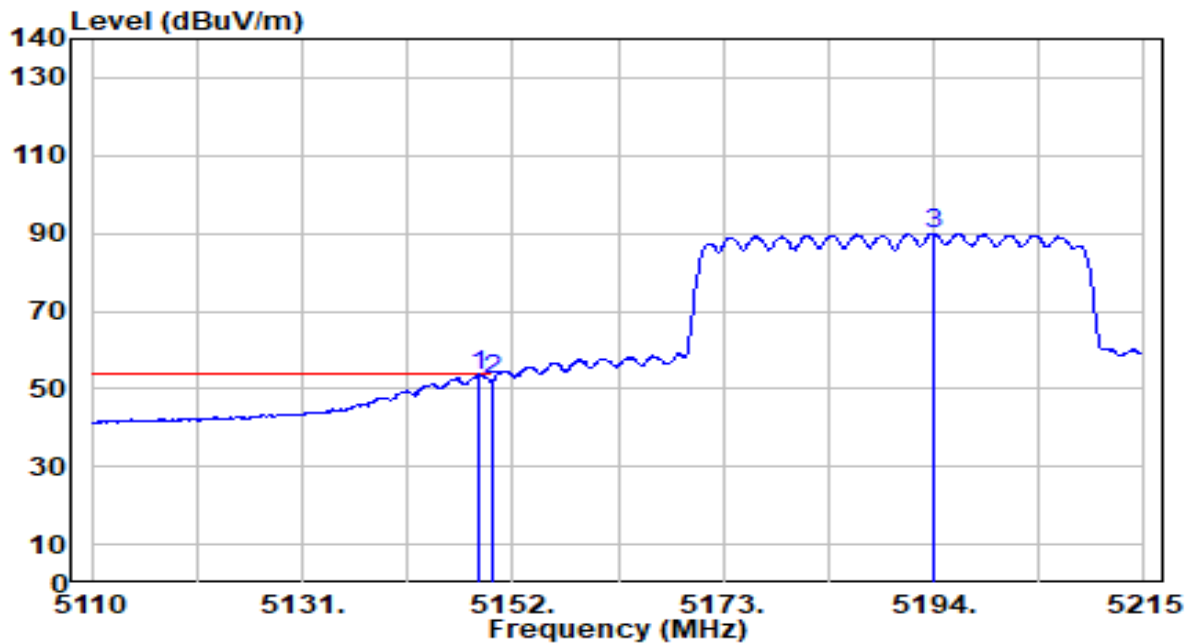


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.640	52.65	0.79	53.44	-0.56	54.00	116	19	Average
2		5150.000	51.36	0.80	52.16	-1.84	54.00	116	19	Average
3		5194.000	89.17	0.85	90.02	N/A	N/A	116	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

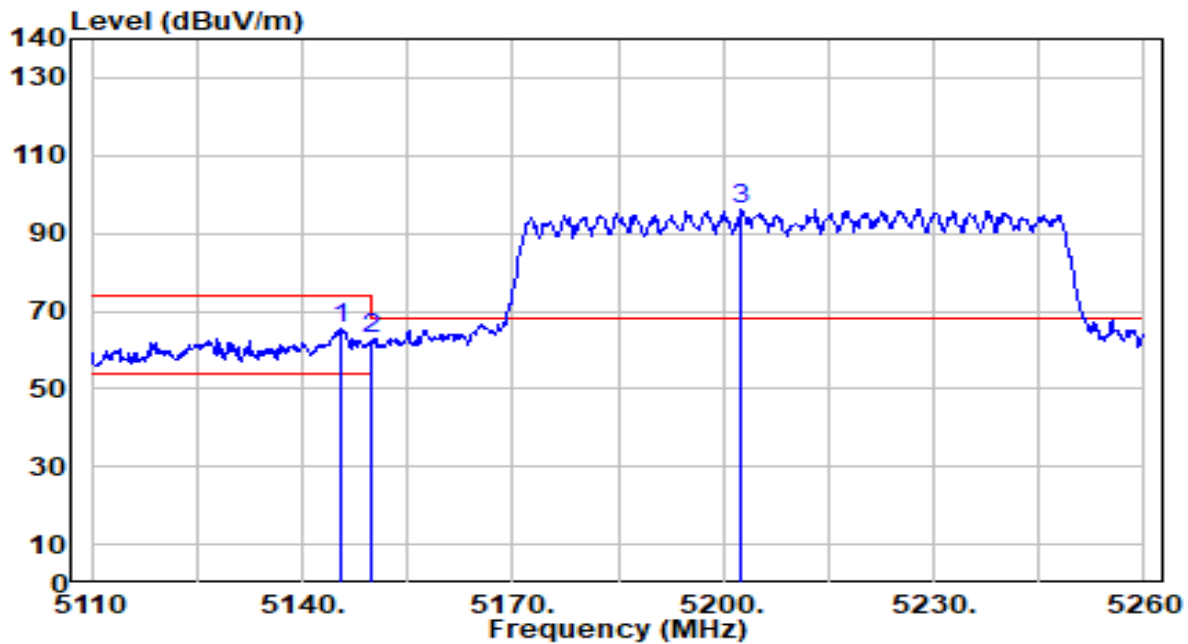


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.550	64.63	0.79	65.42	-8.58	74.00	244	313	Peak
2		5150.000	62.09	0.80	62.89	-11.11	74.00	244	313	Peak
3		5202.550	95.39	0.85	96.24	N/A	N/A	244	313	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

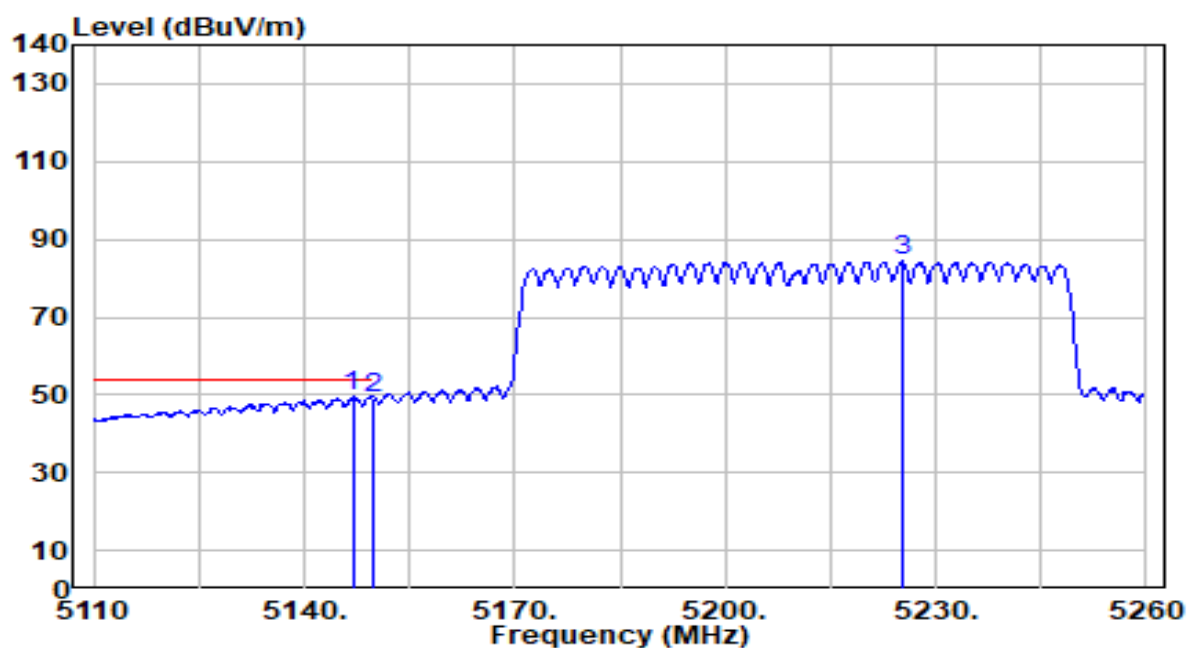


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5146.900	48.82	0.79	49.61	-4.39	54.00	244	313	Average
2	5150.000	48.33	0.80	49.13	-4.87	54.00	244	313	Average
3	5225.200	83.59	0.81	84.41	N/A	N/A	244	313	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

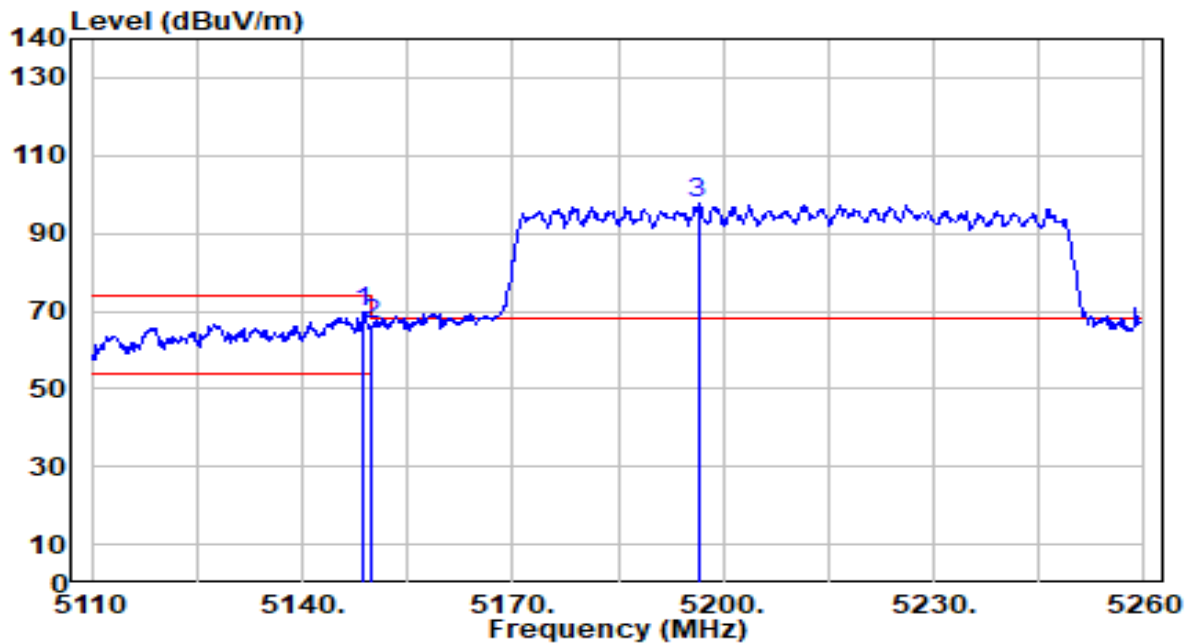


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.700	68.95	0.79	69.75	-4.25	74.00	116	19	Peak
2		5150.000	65.82	0.80	66.62	-7.38	74.00	116	19	Peak
3		5196.400	96.88	0.85	97.73	N/A	N/A	116	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Module	Date of Test	2022-12-10
Factor	DRH18-E	Temp. / Humidity	22°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

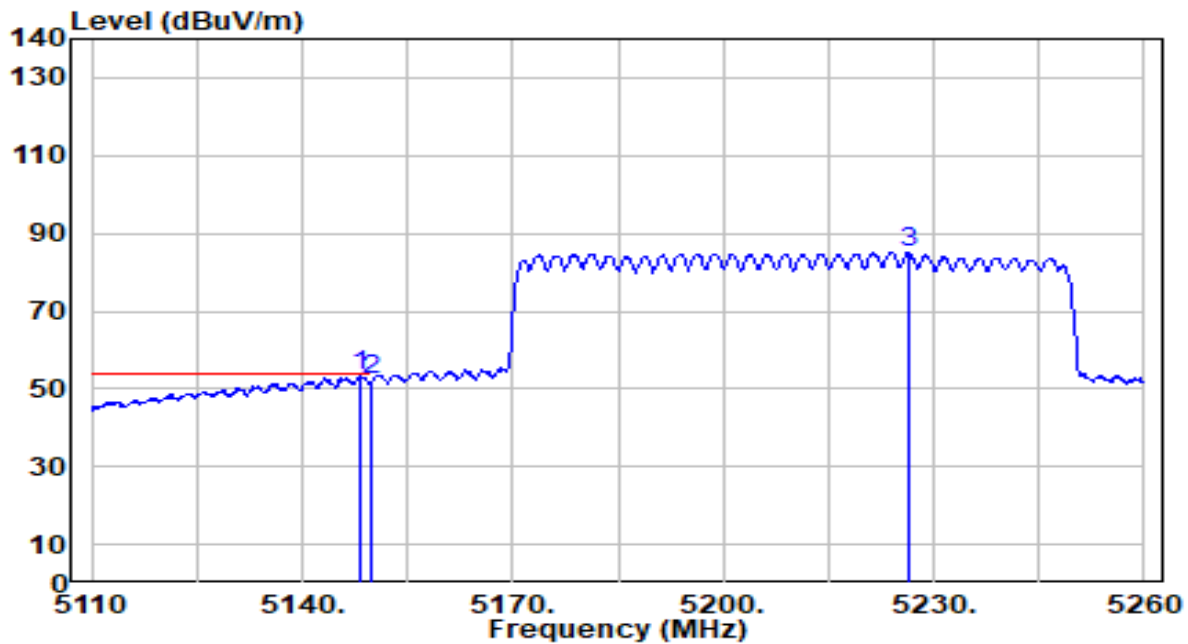

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.250	52.56	0.79	53.36	-0.64	54.00	116	19	Average
2	5150.000	51.54	0.80	52.34	-1.66	54.00	116	19	Average
3	5226.400	84.22	0.81	85.03	N/A	N/A	116	19	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.9.3. Test Setup

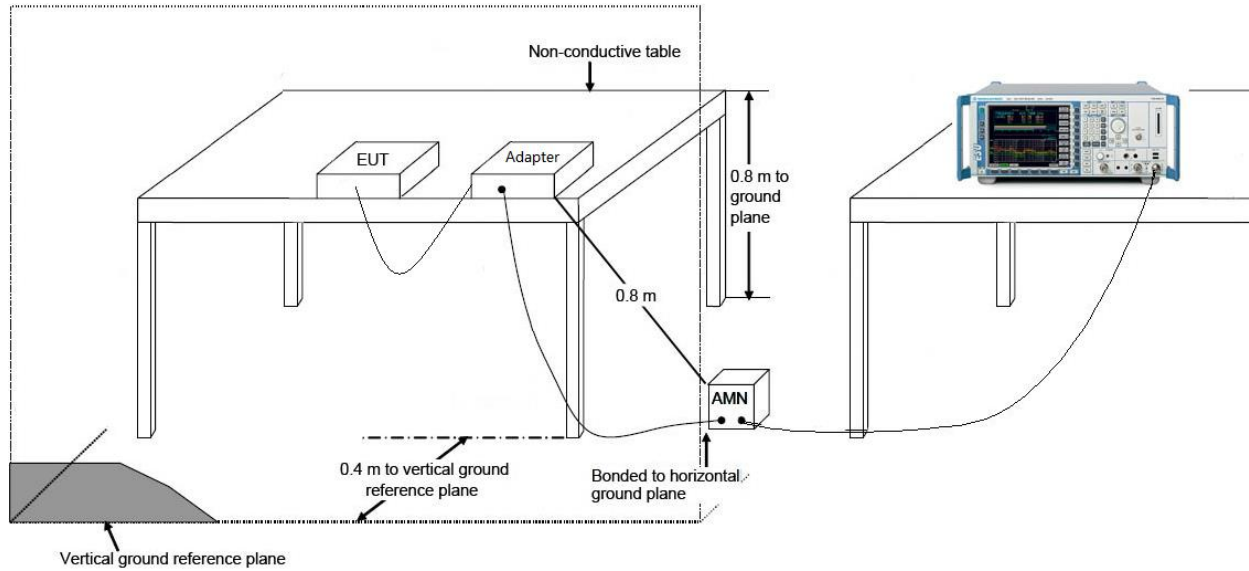

7.9.4. Test Result

EUT	Module	Date of Test	2022-12-16
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.8°C /64%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

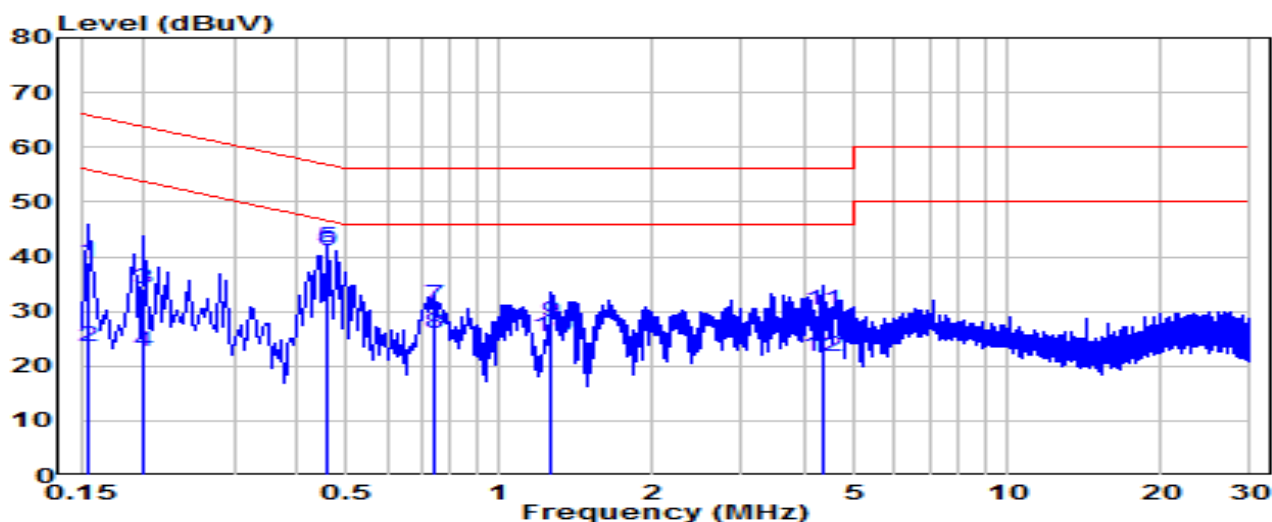


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.154	29.20	9.62	38.82	-26.94	65.75	QP
2		0.154	13.91	9.62	23.53	-32.22	55.75	Average
3		0.199	24.44	9.62	34.06	-29.57	63.63	QP
4		0.199	12.99	9.62	22.62	-31.02	53.63	Average
5	*	0.460	31.91	9.64	41.55	-15.13	56.68	QP
6	*	0.460	31.47	9.64	41.11	-5.58	46.68	Average
7		0.744	21.59	9.66	31.24	-24.76	56.00	QP
8		0.744	16.38	9.66	26.04	-19.96	46.00	Average
9		1.266	18.41	9.68	28.08	-27.92	56.00	QP
10		1.266	15.71	9.68	25.38	-20.62	46.00	Average
11		4.308	20.44	9.73	30.18	-25.82	56.00	QP
12		4.308	11.88	9.73	21.62	-24.38	46.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Module	Date of Test	2022-12-16
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.8°C /64%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

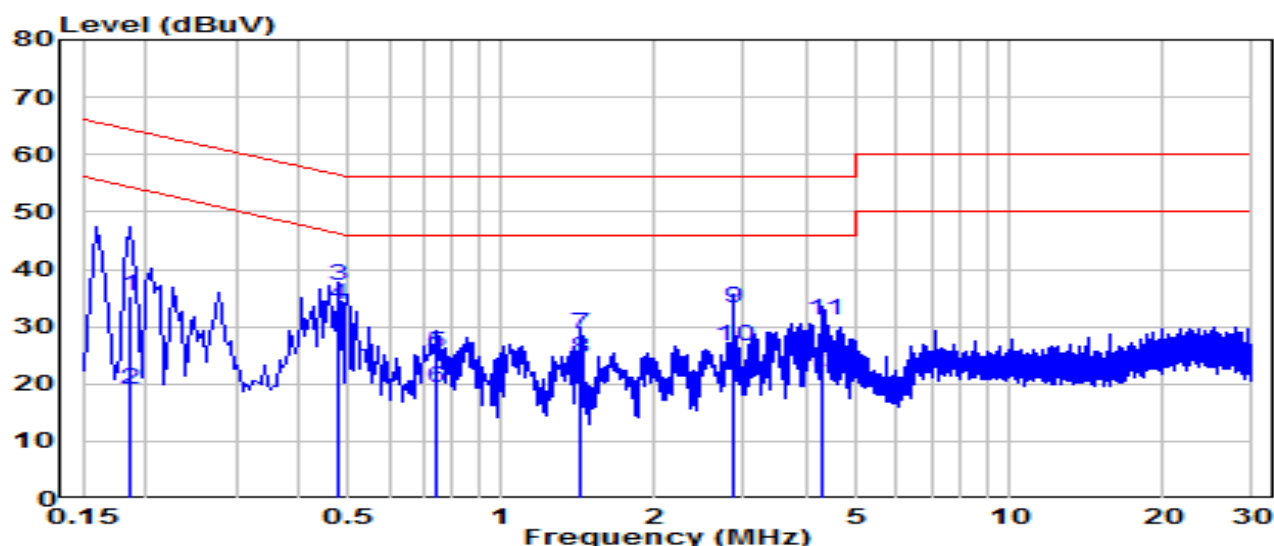


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.186	25.68	9.62	35.30	-28.91	64.21	QP
2		0.186	9.36	9.62	18.98	-35.23	54.21	Average
3	*	0.478	27.41	9.64	37.05	-19.31	56.37	QP
4	*	0.478	24.29	9.64	33.93	-12.44	46.37	Average
5		0.744	15.73	9.66	25.39	-30.61	56.00	QP
6		0.744	9.79	9.66	19.44	-26.56	46.00	Average
7		1.437	18.88	9.68	28.56	-27.44	56.00	QP
8		1.437	14.73	9.68	24.40	-21.60	46.00	Average
9		2.868	23.59	9.71	33.30	-22.70	56.00	QP
10		2.868	16.75	9.71	26.46	-19.54	46.00	Average
11		4.303	21.41	9.74	31.15	-24.85	56.00	QP
12		4.303	12.19	9.74	21.92	-24.08	46.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Module	Date of Test	2022-12-16
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	22.8°C /64%
Polarity	Line1	Site / Test Engineer	SR2 / Amber
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

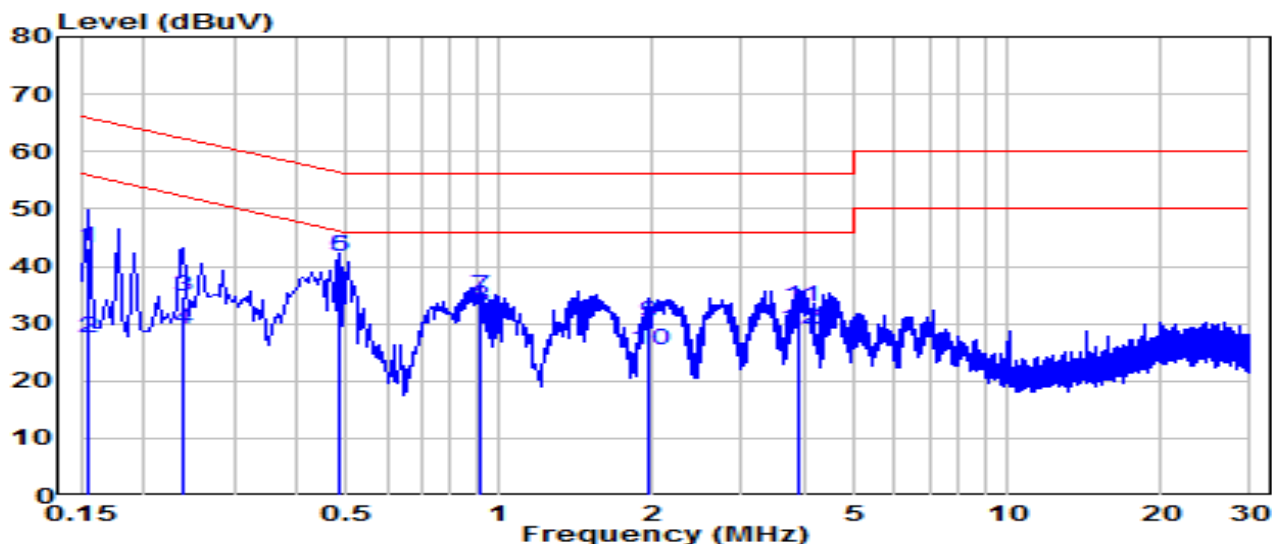


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.154	33.48	9.62	43.10	-22.66	65.75	QP
2		0.154	17.89	9.62	27.51	-28.24	55.75	Average
3		0.240	25.15	9.63	34.77	-27.32	62.10	QP
4		0.240	19.29	9.63	28.91	-23.18	52.10	Average
5	*	0.483	32.13	9.64	41.77	-14.52	56.29	QP
6	*	0.483	31.95	9.64	41.59	-4.70	46.29	Average
7		0.910	25.04	9.66	34.70	-21.30	56.00	QP
8		0.910	23.26	9.66	32.92	-13.08	46.00	Average
9		1.963	20.41	9.69	30.10	-25.90	56.00	QP
10		1.963	15.68	9.69	25.36	-20.64	46.00	Average
11		3.898	23.27	9.73	33.00	-23.00	56.00	QP
12		3.898	19.11	9.73	28.84	-17.16	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Module	Date of Test	2022-12-16
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	22.8°C /64%
Polarity	Neutral	Site / Test Engineer	SR2 / Amber
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

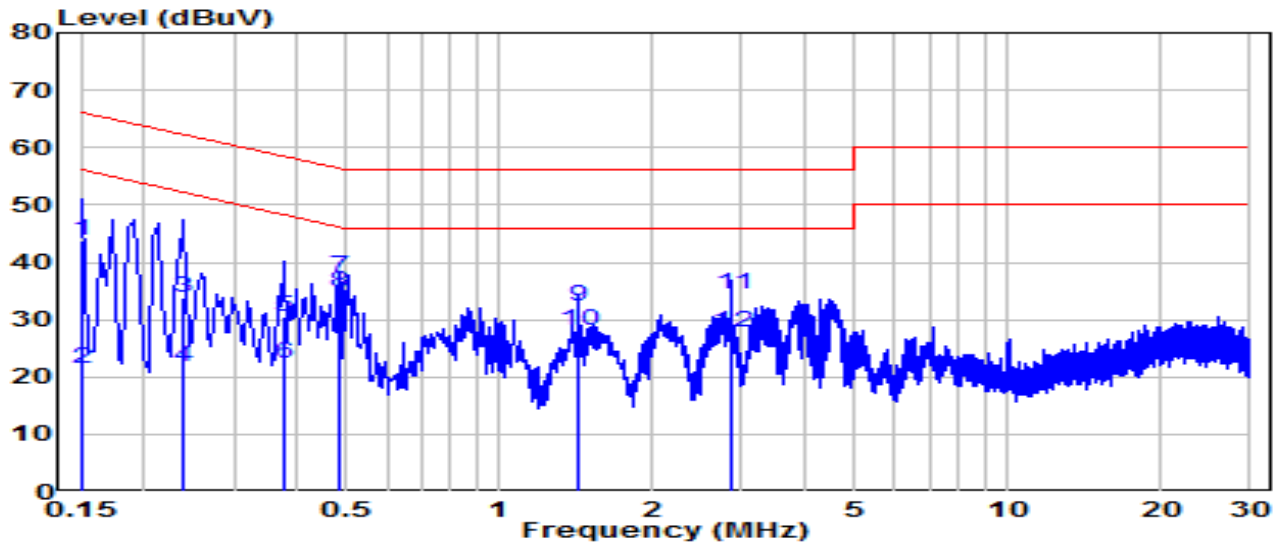

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.150	34.05	9.62	43.67	-22.33	66.00	QP
2		0.150	11.75	9.62	21.37	-34.63	56.00	Average
3		0.240	24.07	9.63	33.69	-28.40	62.10	QP
4		0.240	12.14	9.63	21.77	-30.33	52.10	Average
5		0.375	20.77	9.63	30.40	-27.99	58.39	QP
6		0.375	12.75	9.63	22.39	-26.00	48.39	Average
7	*	0.483	27.93	9.64	37.57	-18.72	56.29	QP
8	*	0.483	24.96	9.64	34.60	-11.68	46.29	Average
9		1.432	22.60	9.68	32.28	-23.72	56.00	QP
10		1.432	18.29	9.68	27.97	-18.03	46.00	Average
11		2.868	24.73	9.71	34.44	-21.56	56.00	QP
12		2.868	17.98	9.71	27.69	-18.31	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Module, Model Number:**

AP6275S is in compliance with Part 15E & IC RSS-247 of the FCC & IC Rules.

_____ The End _____