




802.11 n20 CH01 (2412MHz)

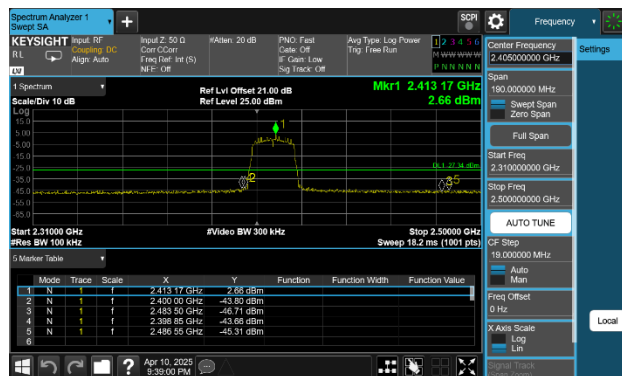


802.11 n20 CH01 (2412MHz)

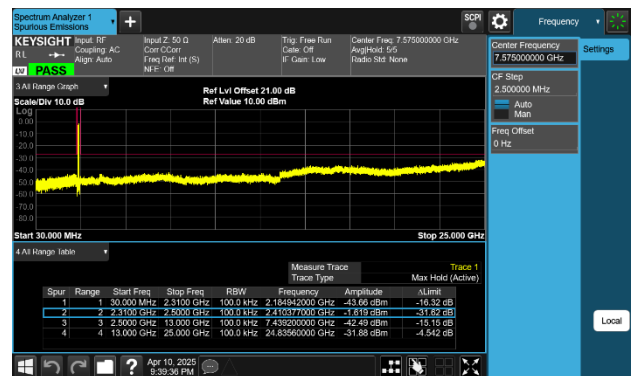


802.11 n20 CH06 (2437MHz)

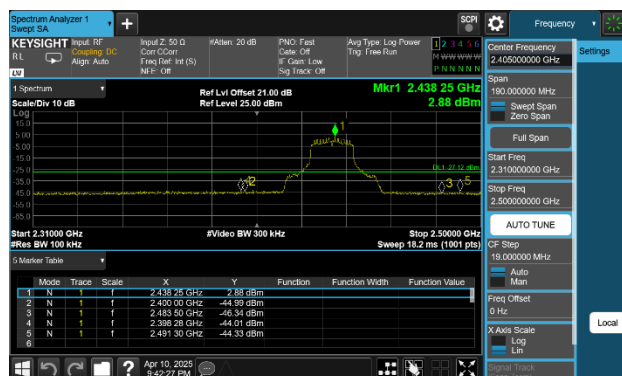


802.11 n20 CH06 (2437MHz)

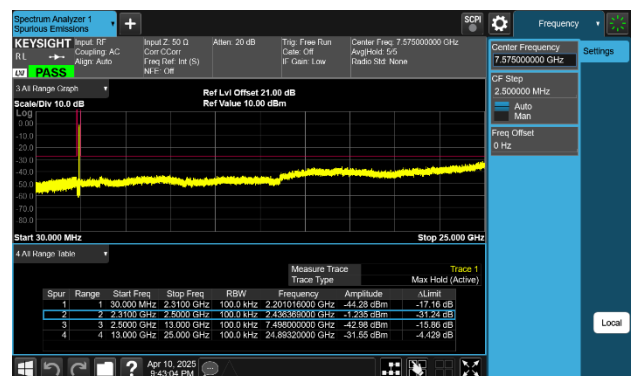

802.11 n20 CH11 (2462MHz)

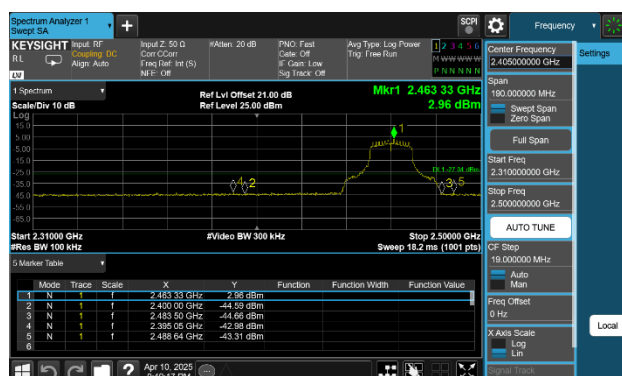


802.11 n20 CH11 (2462MHz)

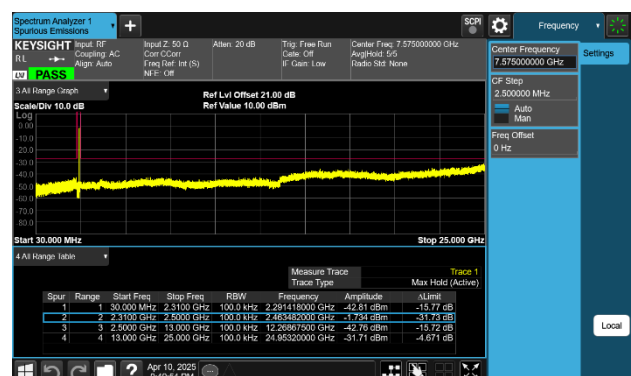


802.11 n40 CH03 (2422MHz)




802.11 n40 CH03 (2422MHz)

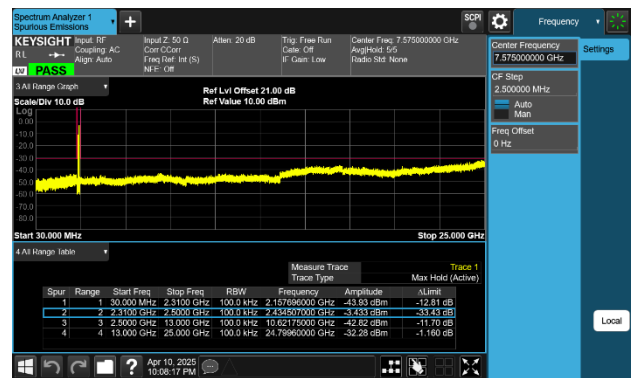


802.11 n40 CH06 (2437MHz)

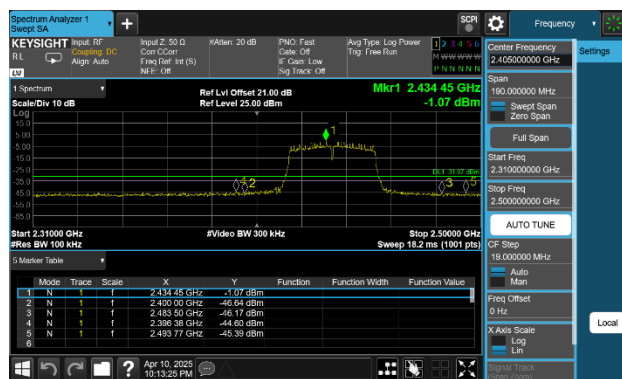


802.11 n40 CH06 (2437MHz)

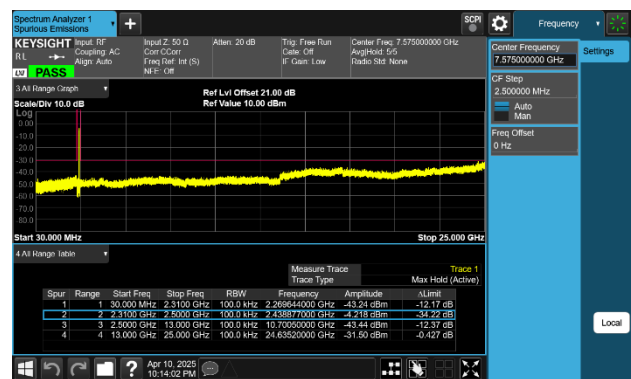


802.11 n40 CH09 (2452MHz)

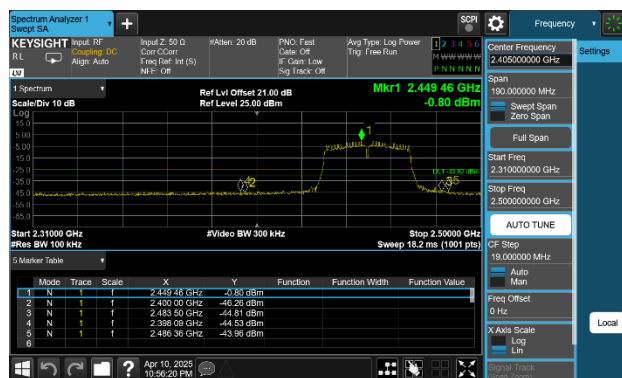


802.11 n40 CH09 (2452MHz)

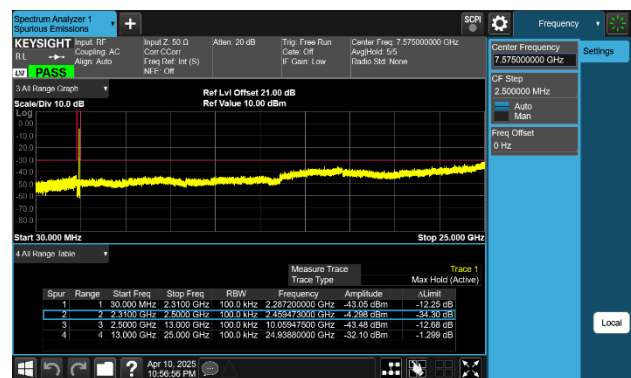


802.11 ax20 CH01 (2412MHz)

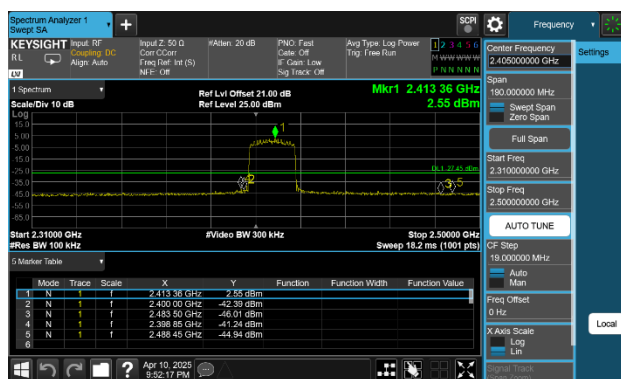


802.11 ax20 CH01 (2412MHz)

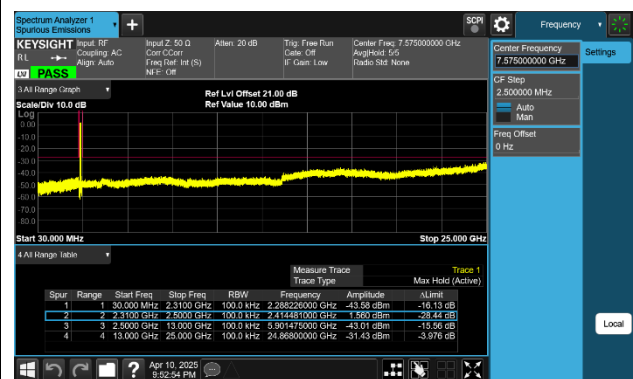

802.11 ax20 CH06 (2437MHz)

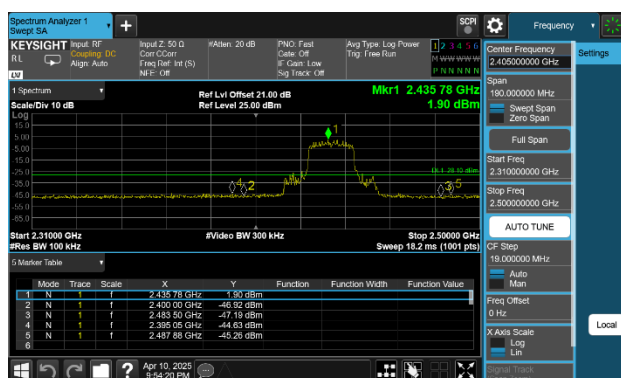


802.11 ax20 CH06 (2437MHz)

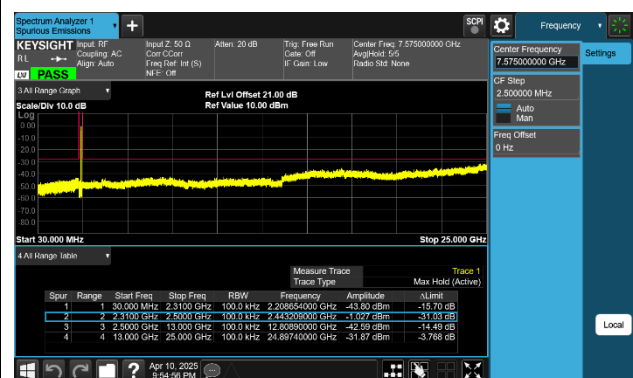

802.11 ax20 CH11 (2462MHz)




802.11 ax20 CH11 (2462MHz)

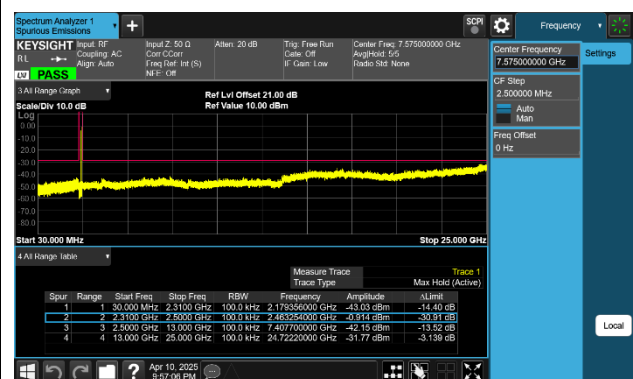


802.11 ax40 CH03 (2422MHz)




802.11 ax40 CH03 (2422MHz)

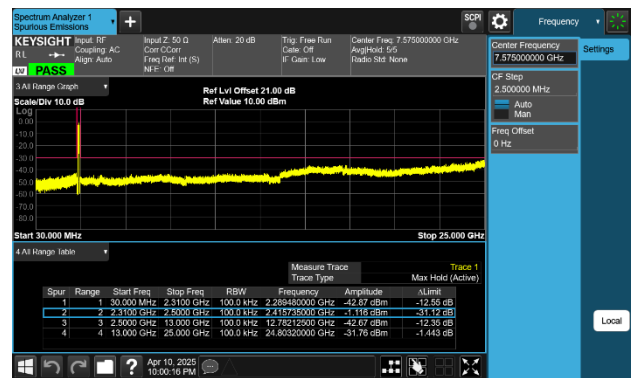


802.11 ax40 CH06 (2437MHz)

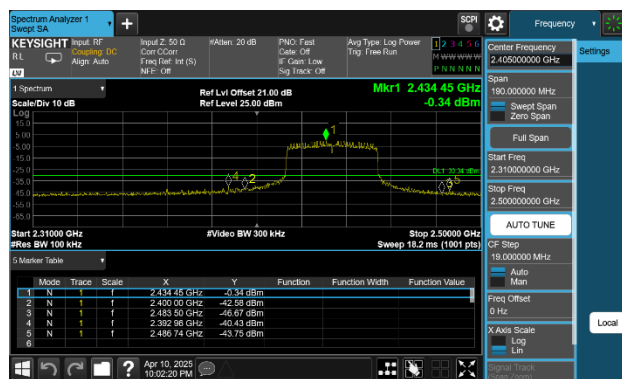


802.11 ax40 CH06 (2437MHz)

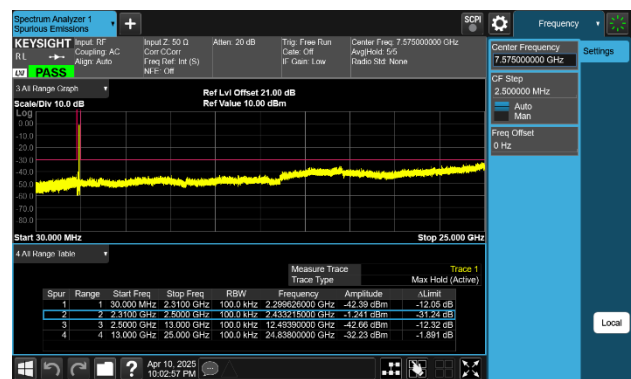

802.11 ax40 CH09 (2452MHz)

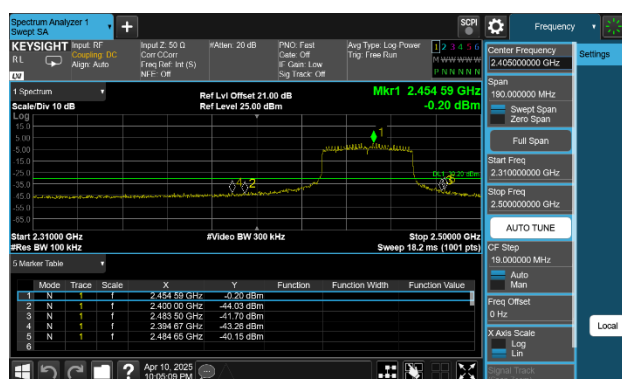


802.11 ax40 CH09 (2452MHz)

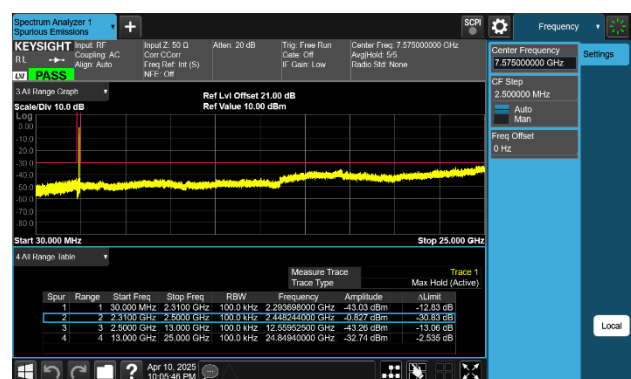


Ant 1


802.11 b CH01 (2412MHz)

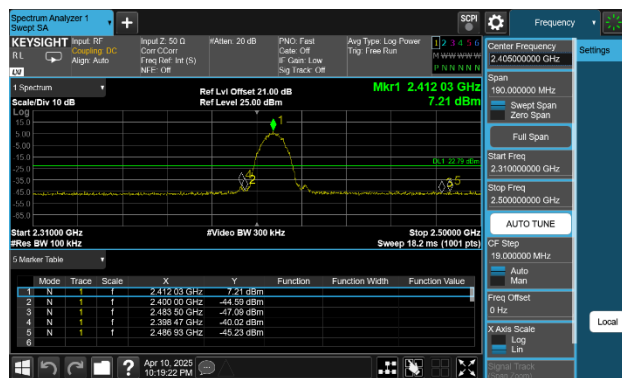


802.11 b CH01 (2412MHz)

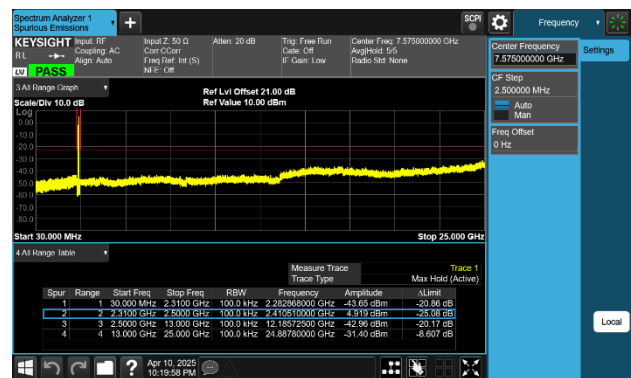


802.11 b CH06 (2437MHz)

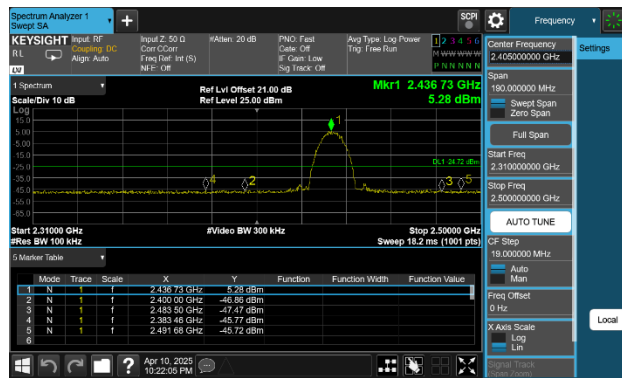


802.11 b CH06 (2437MHz)

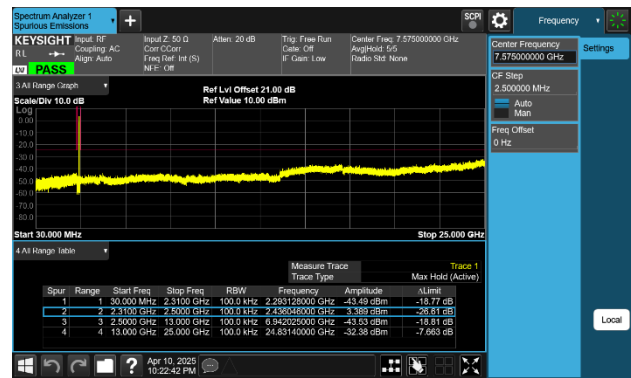


802.11 b CH11 (2462MHz)

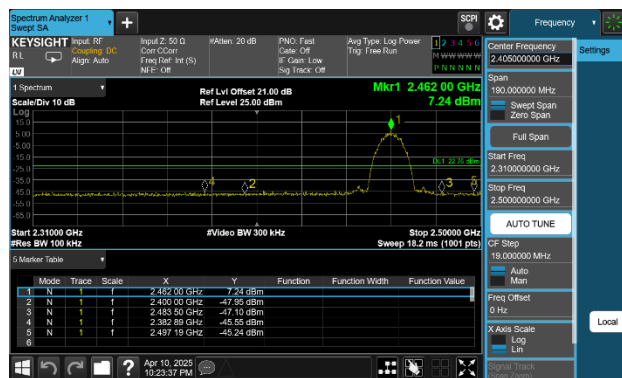


802.11 b CH11 (2462MHz)

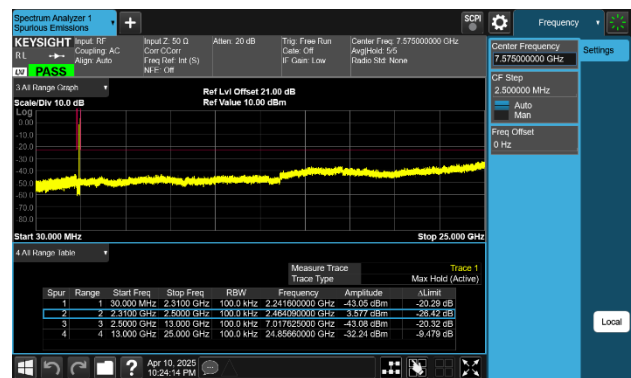

802.11 g CH01 (2412MHz)

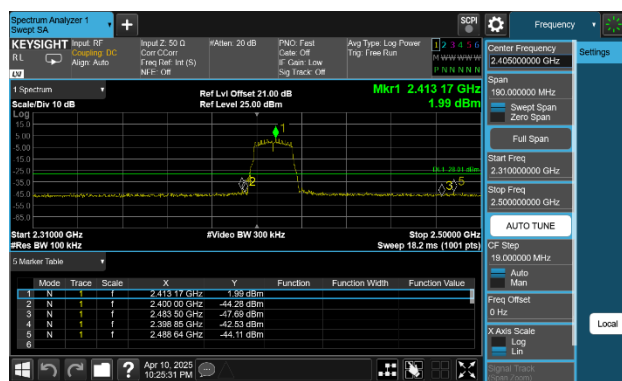


802.11 g CH01 (2412MHz)

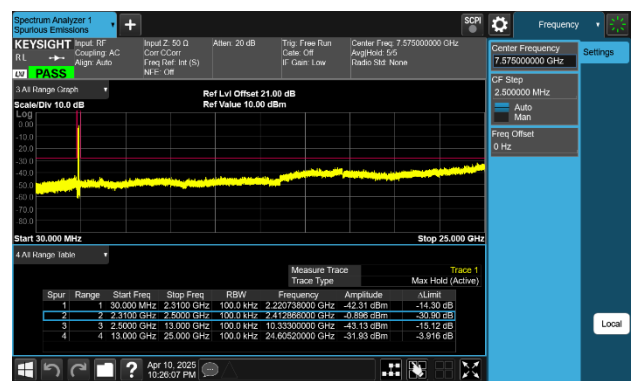


802.11 g CH06 (2437MHz)




802.11 g CH06 (2437MHz)

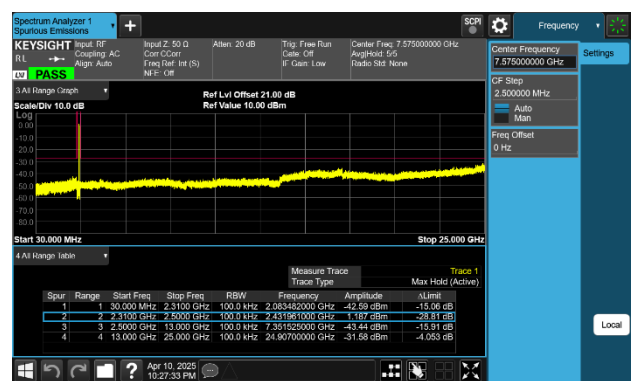


802.11 g CH11 (2462MHz)

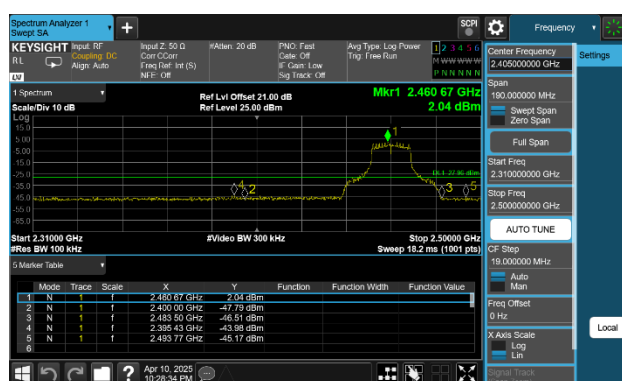


802.11 g CH11 (2462MHz)

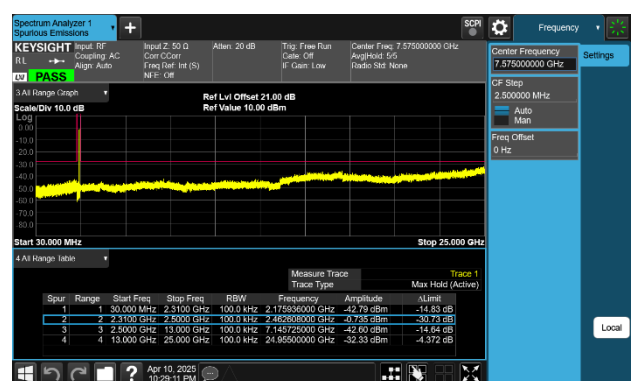


802.11 n20 CH01 (2412MHz)

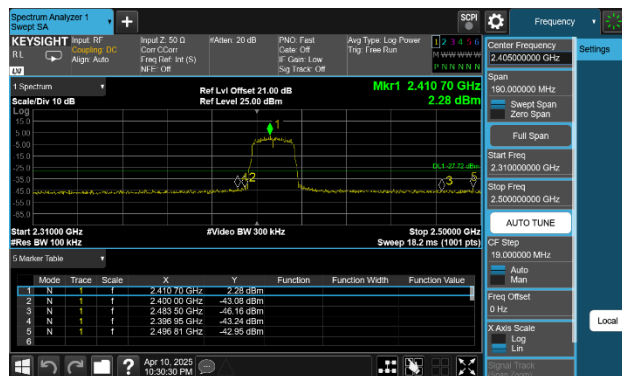


802.11 n20 CH01 (2412MHz)

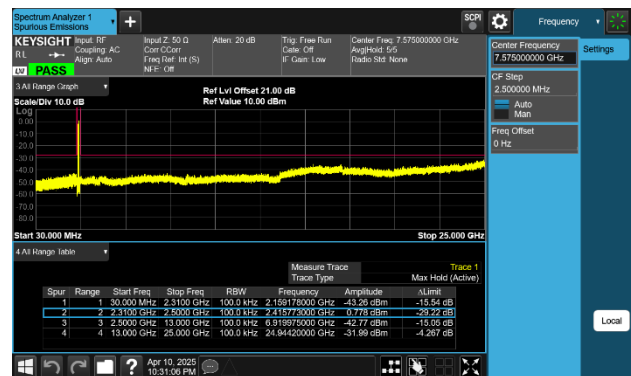


802.11 n20 CH06 (2437MHz)

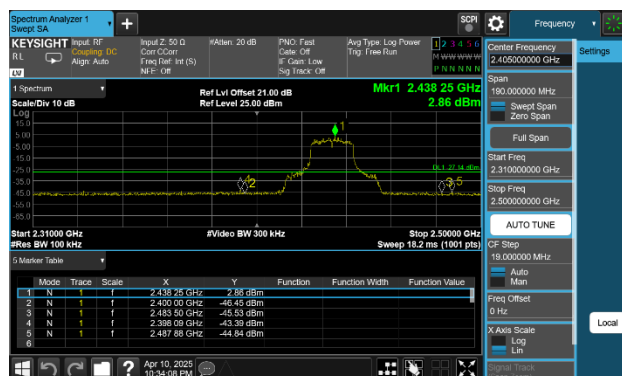


802.11 n20 CH06 (2437MHz)

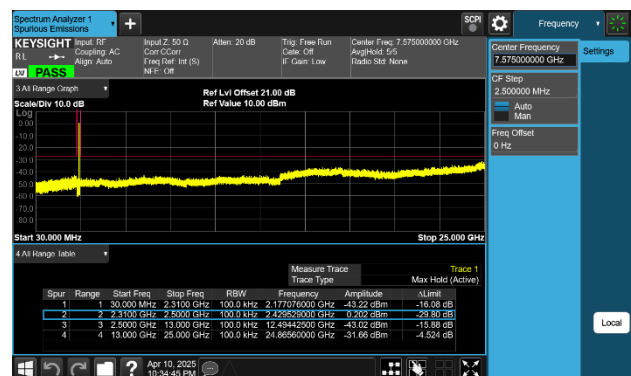

802.11 n20 CH11 (2462MHz)

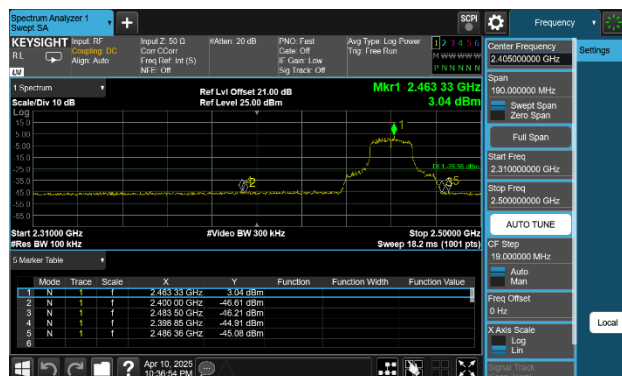


802.11 n20 CH11 (2462MHz)

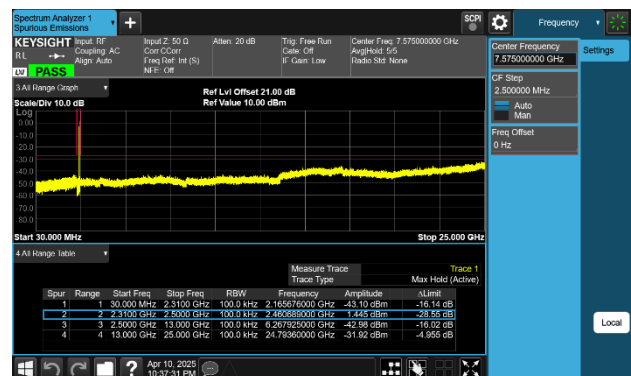


802.11 n40 CH03 (2422MHz)




802.11 n40 CH03 (2422MHz)

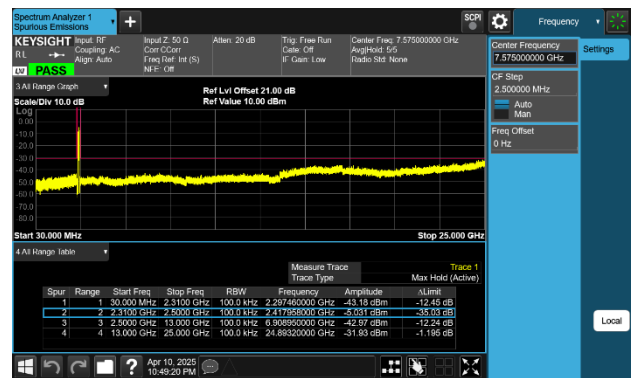


802.11 n40 CH06 (2437MHz)

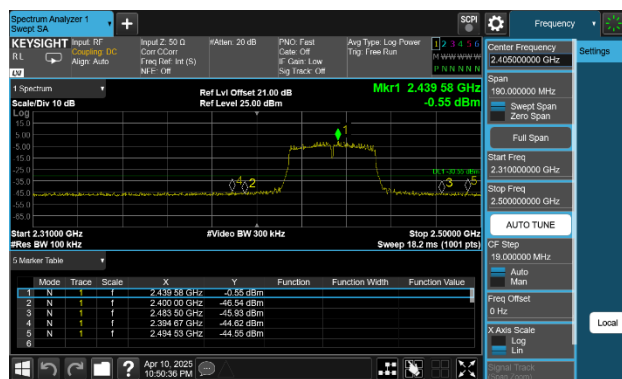


802.11 n40 CH06 (2437MHz)

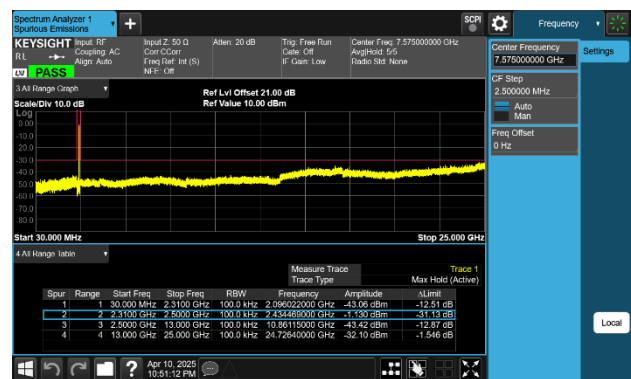


802.11 n40 CH09 (2452MHz)

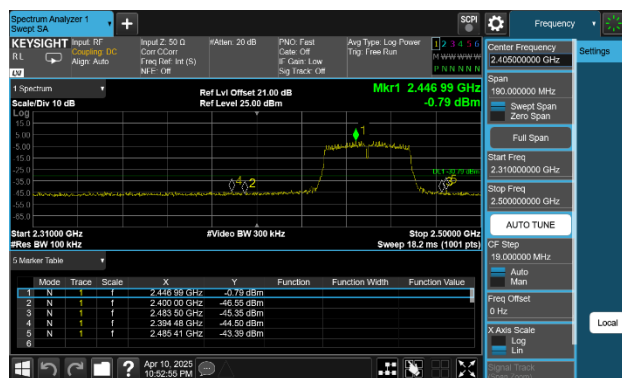


802.11 n40 CH09 (2452MHz)

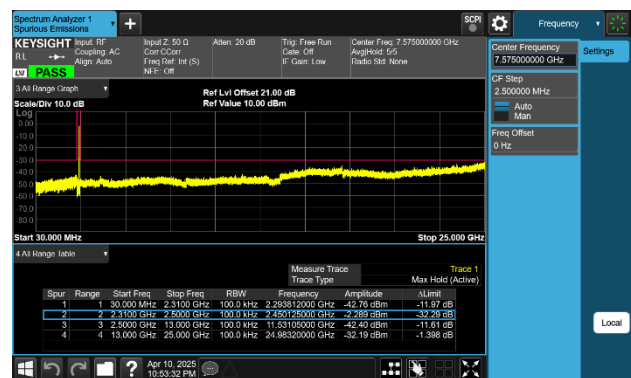


802.11 ax20 CH01 (2412MHz)

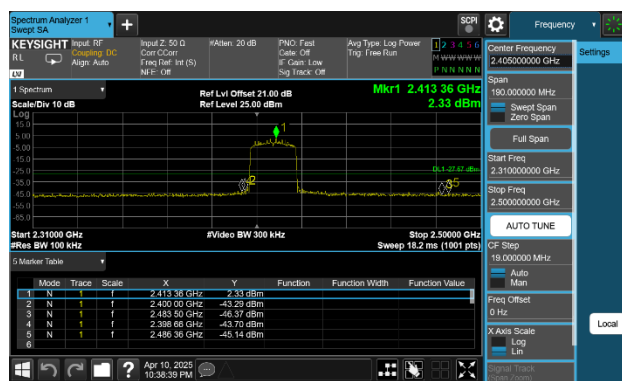


802.11 ax20 CH01 (2412MHz)

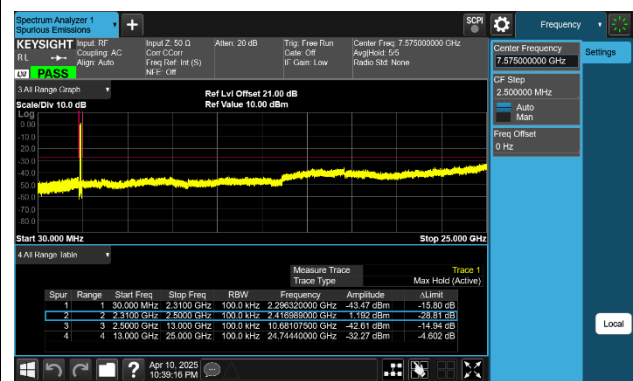


802.11 ax20 CH06 (2437MHz)

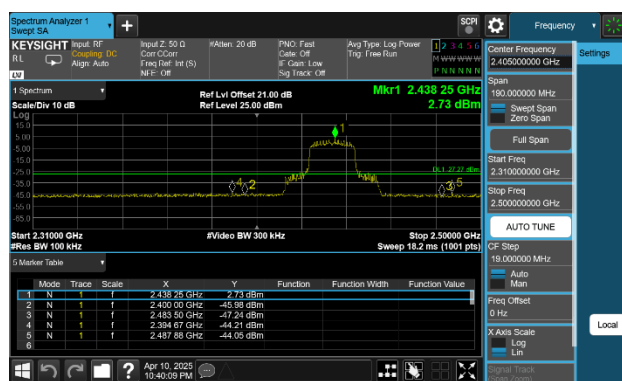


802.11 ax20 CH06 (2437MHz)

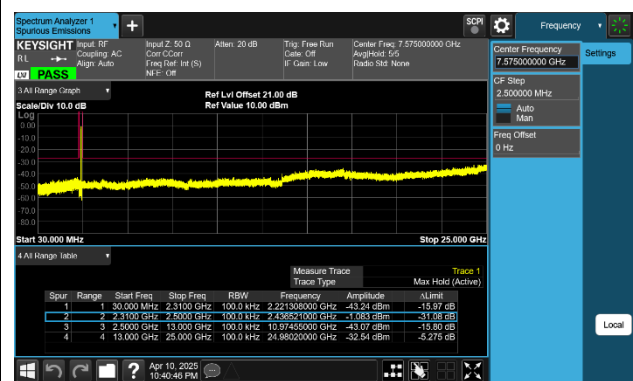

802.11 ax20 CH11 (2462MHz)

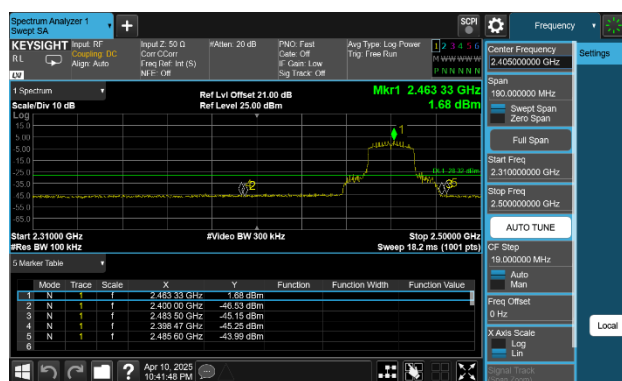


802.11 ax20 CH11 (2462MHz)

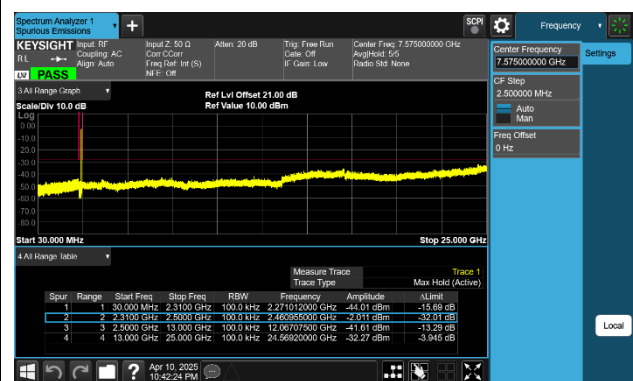


802.11 ax40 CH03 (2422MHz)




802.11 ax40 CH03 (2422MHz)

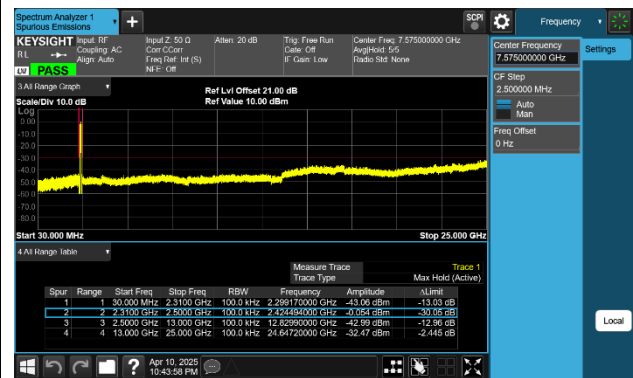


802.11 ax40 CH06 (2437MHz)

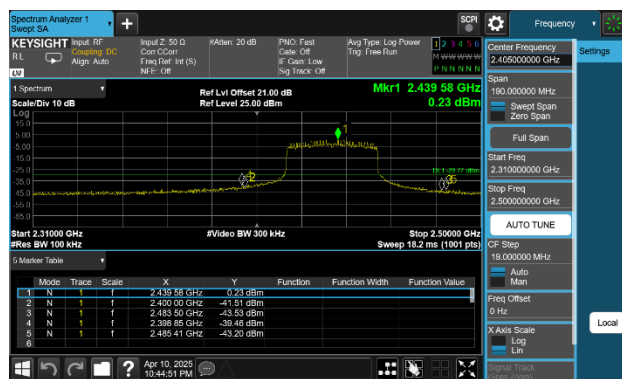


802.11 ax40 CH06 (2437MHz)

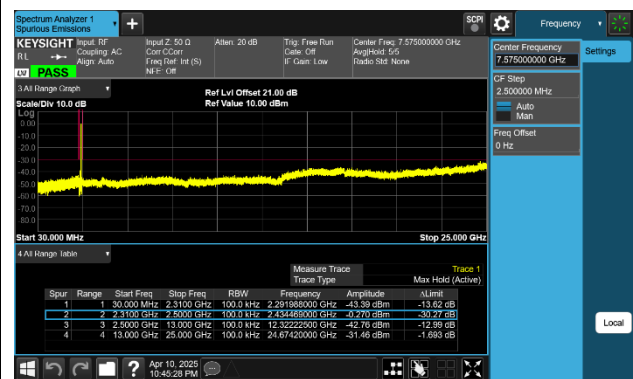

802.11 ax40 CH09 (2452MHz)

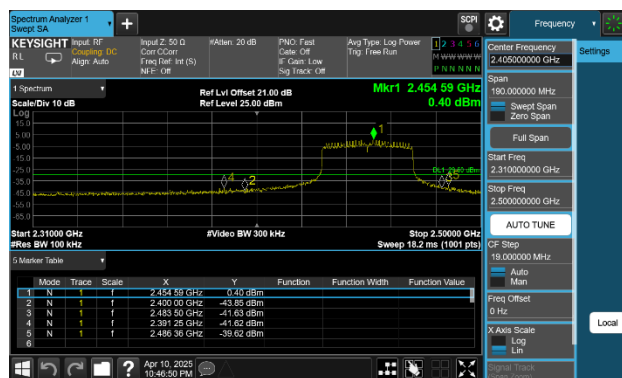

802.11 ax40 CH09 (2452MHz)

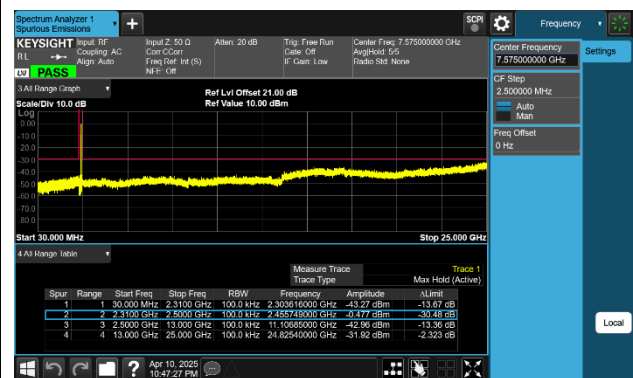

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

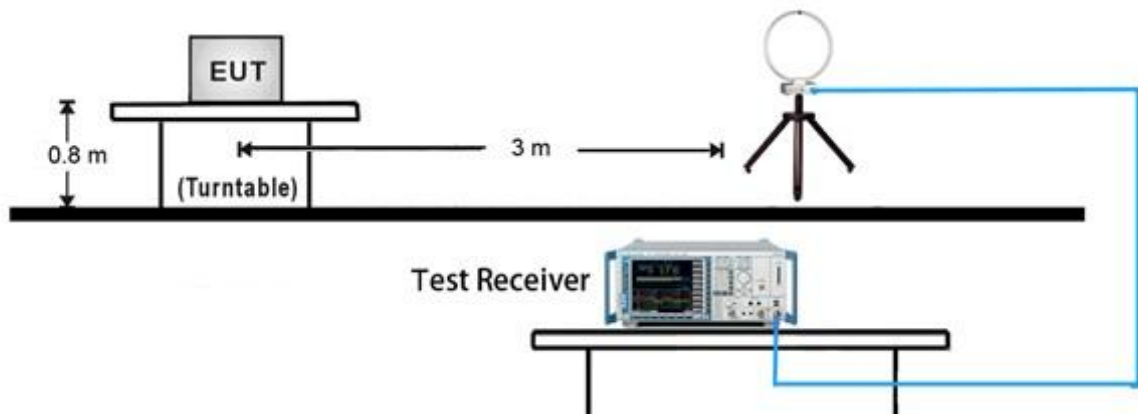


30MHz ~ 1GHz Test Setup:

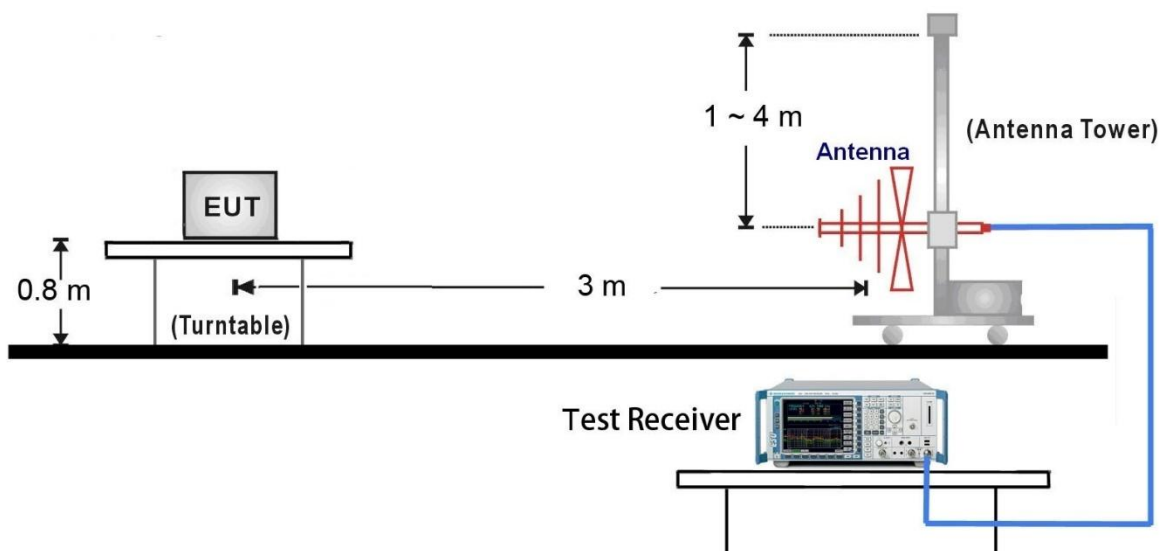

1GHz ~ 18GHz Test Setup:

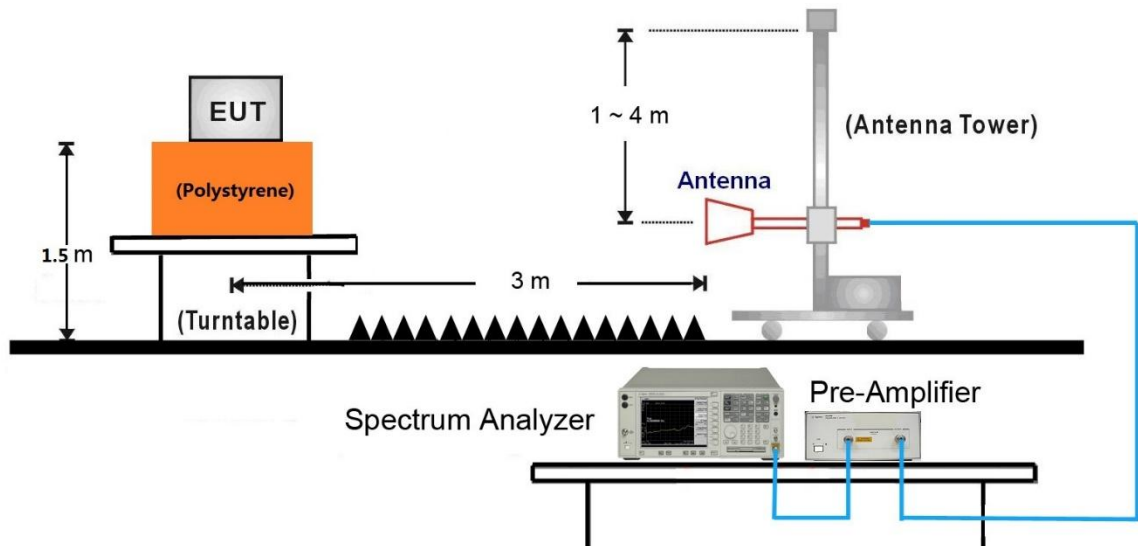


18GHz ~ 25GHz Test Setup:

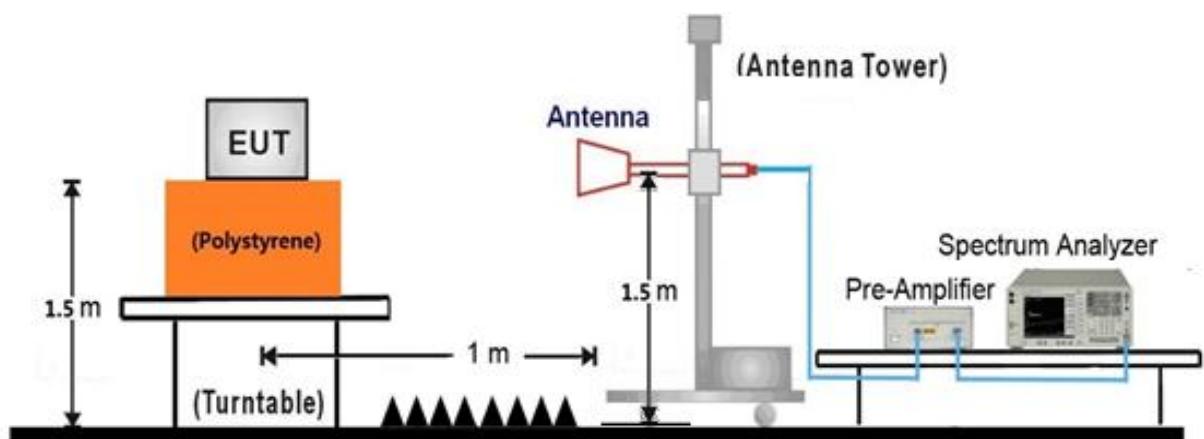

7.6.5. Test Result

EUT	Smart touch panel tablet	Date of Test	2025-03-31
Factor	VULB 9162	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

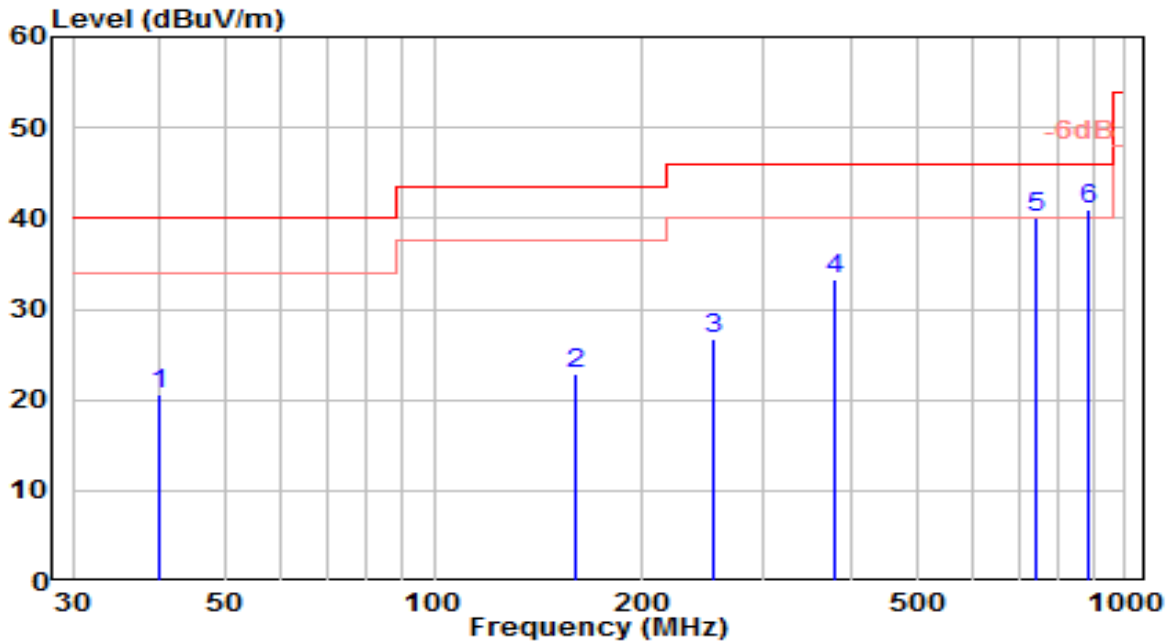


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	40.156	0.39	20.12	20.51	-19.49	40.00	150	255	QP
2	160.138	6.86	16.03	22.90	-20.60	43.50	150	110	QP
3	253.037	6.18	20.47	26.64	-19.36	46.00	100	115	QP
4	379.733	9.71	23.47	33.18	-12.82	46.00	100	180	QP
5	743.235	10.60	29.47	40.07	-5.93	46.00	100	300	QP
6	* 882.268	9.55	31.52	41.07	-4.93	46.00	150	310	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-03-31
Factor	VULB 9162	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

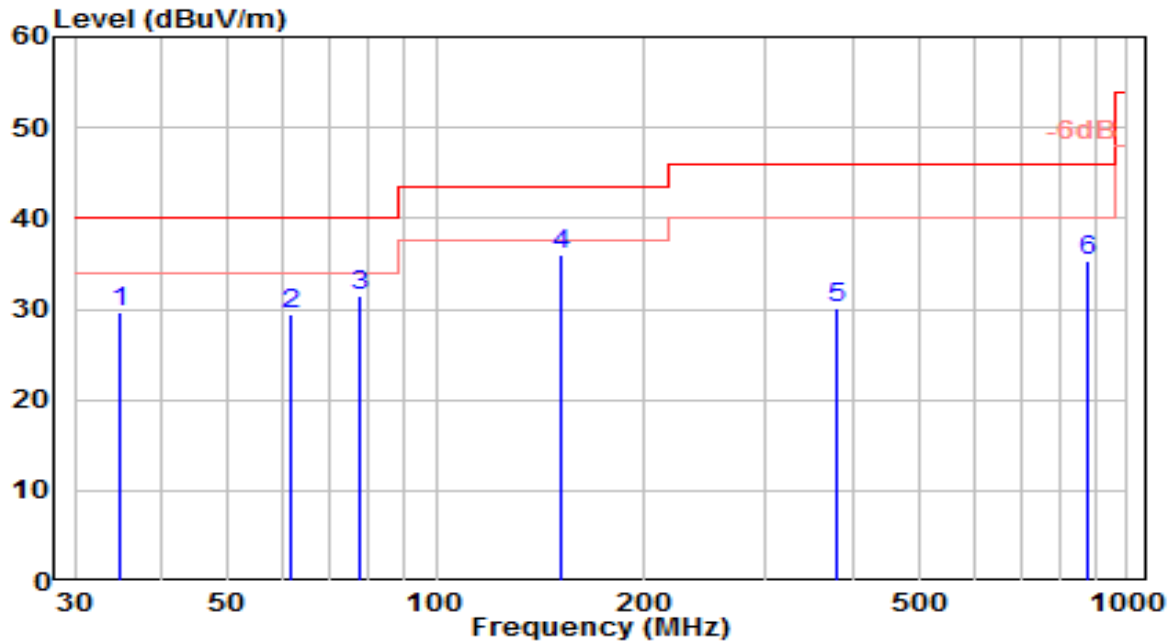


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	34.833	11.38	18.24	29.62	-10.38	40.00	100	345	QP
2	61.790	10.26	19.26	29.52	-10.48	40.00	100	335	QP
3	77.772	16.87	14.58	31.45	-8.55	40.00	150	15	QP
4	* 151.937	20.37	15.68	36.04	-7.46	43.50	100	230	QP
5	379.324	6.71	23.47	30.18	-15.82	46.00	150	200	QP
6	874.534	3.77	31.46	35.23	-10.77	46.00	100	0	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-03-31
Factor	VULB 9162	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_RX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

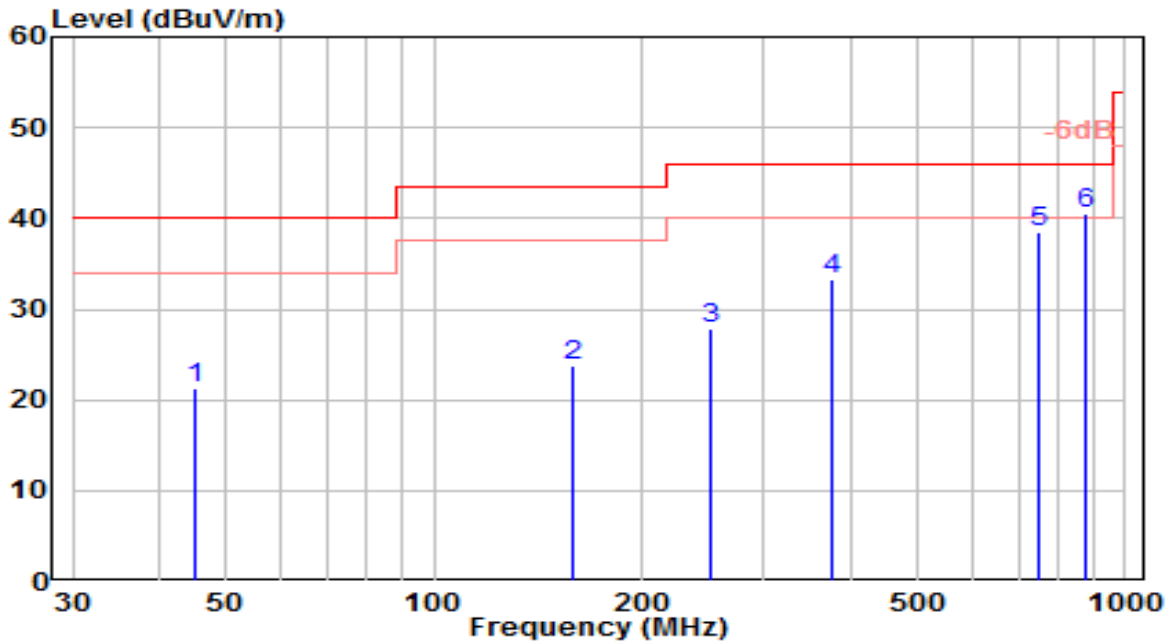


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	44.946	0.19	21.01	21.19	-18.81	40.00	150	255	QP
2	159.305	7.76	16.00	23.76	-19.74	43.50	150	110	QP
3	250.606	7.32	20.44	27.76	-18.24	46.00	100	115	QP
4	376.457	9.79	23.42	33.21	-12.79	46.00	100	180	QP
5	747.326	9.05	29.55	38.59	-7.41	46.00	100	300	QP
6	* 878.030	9.15	31.49	40.64	-5.36	46.00	150	310	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-03-31
Factor	VULB 9162	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_RX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

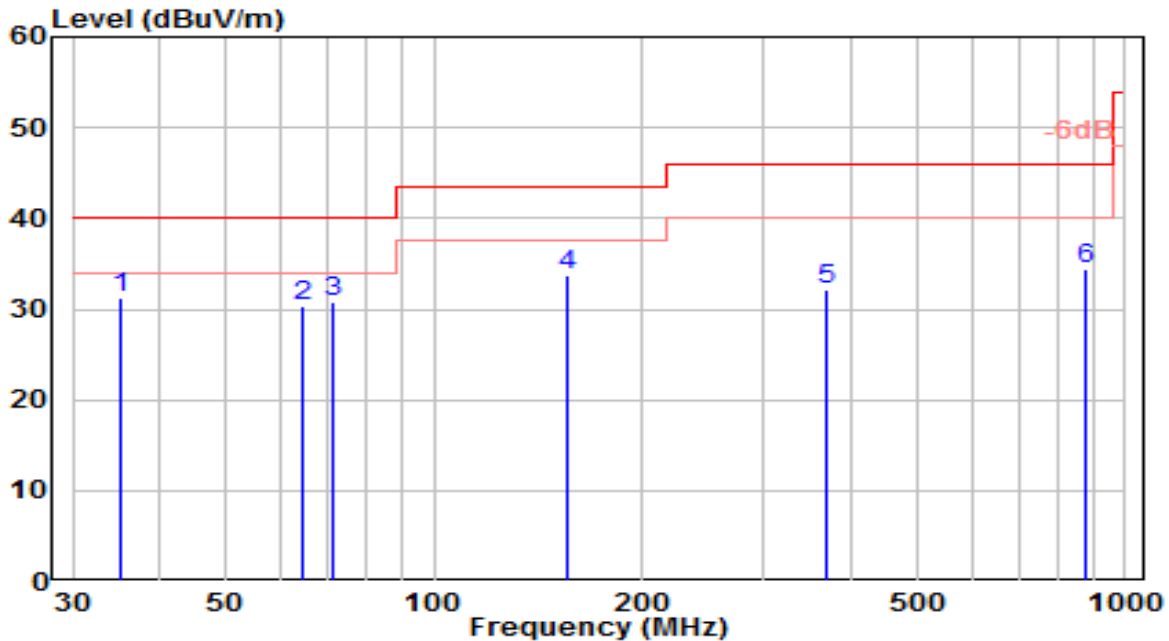


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	35.098	12.89	18.31	31.19	-8.81	40.00	100	345	QP
2		64.335	11.93	18.32	30.26	-9.74	40.00	100	335	QP
3		71.464	14.77	15.94	30.71	-9.29	40.00	150	15	QP
4		156.135	17.89	15.86	33.75	-9.75	43.50	100	230	QP
5		370.612	8.92	23.32	32.25	-13.75	46.00	150	200	QP
6		878.204	2.97	31.49	34.46	-11.54	46.00	100	0	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

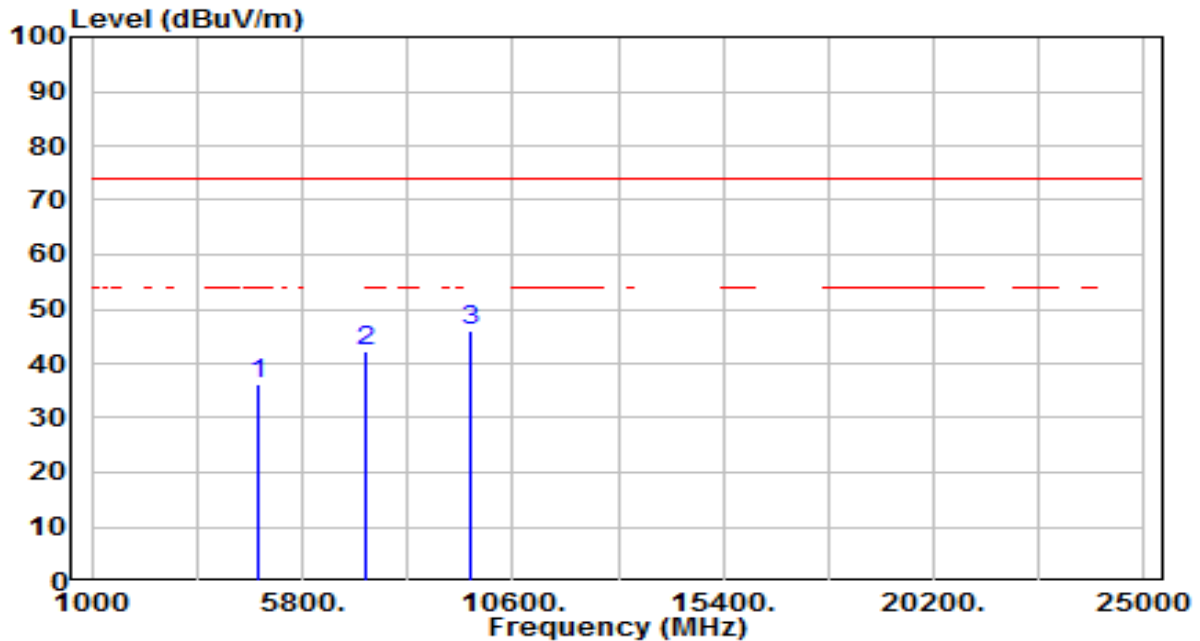


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.00	3.39	36.39	-37.61	74.00	100	42	Peak
2	7236.000	31.08	11.33	42.40	-31.60	74.00	100	251	Peak
3	* 9648.000	30.81	15.09	45.90	-28.10	74.00	100	356	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

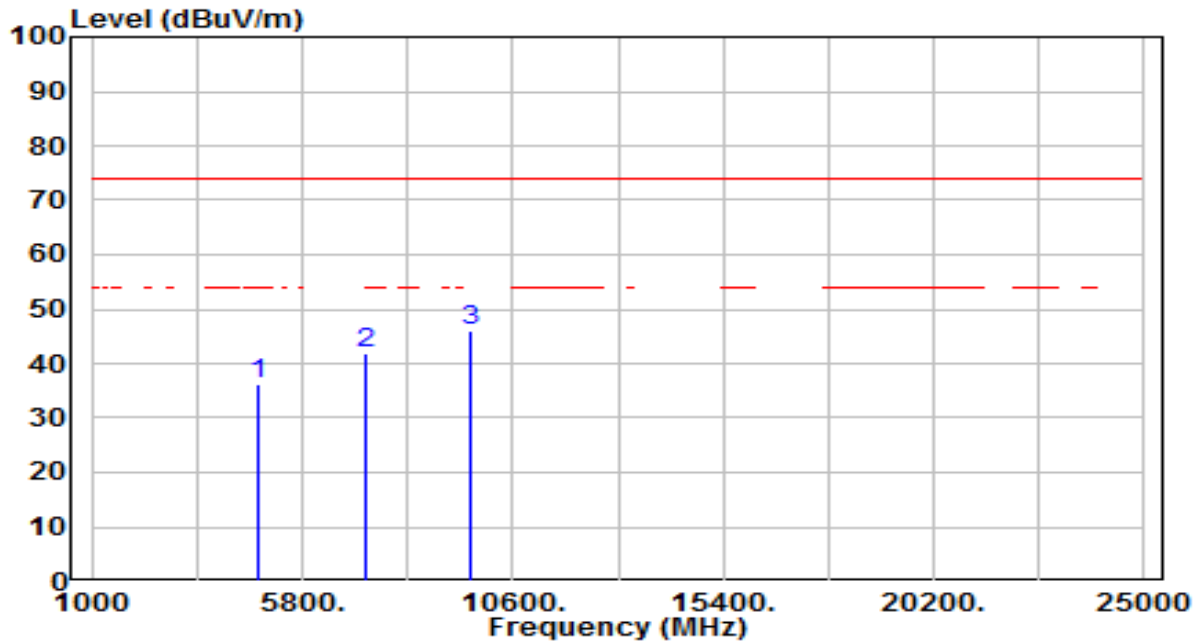


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.00	3.39	36.39	-37.61	74.00	100	353	Peak
2	7236.000	30.57	11.33	41.89	-32.11	74.00	100	156	Peak
3	* 9648.000	31.05	15.09	46.14	-27.86	74.00	100	191	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

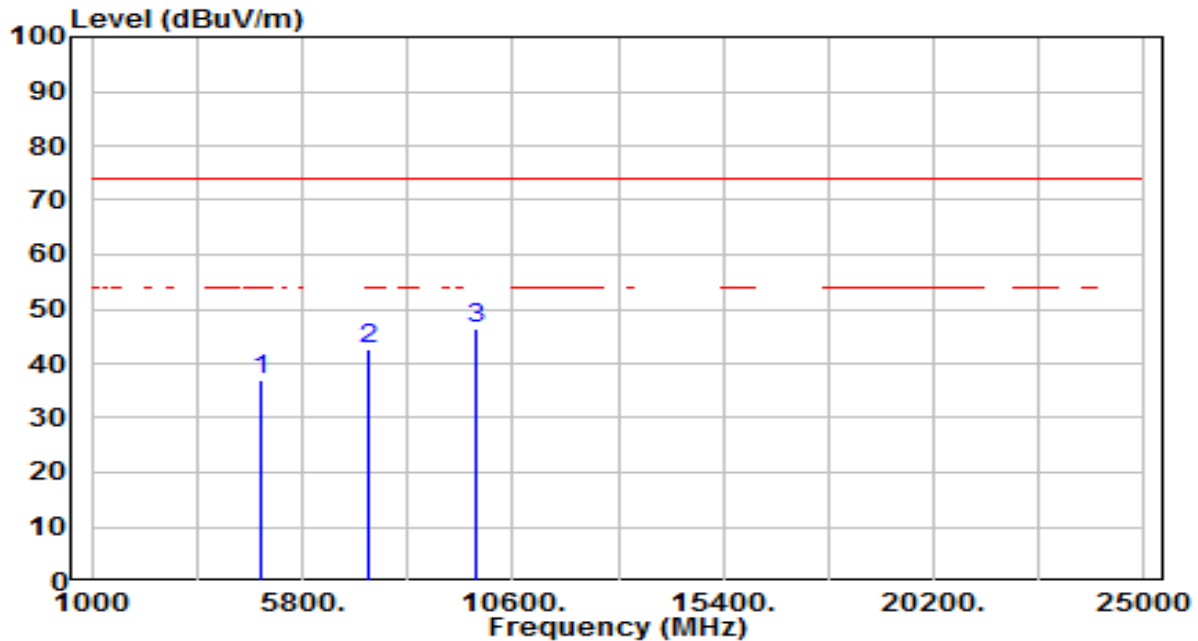


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.34	3.51	36.85	-37.15	74.00	100	303	Peak
2	7311.000	31.08	11.70	42.78	-31.22	74.00	100	103	Peak
3	* 9748.000	31.17	15.26	46.43	-27.57	74.00	100	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

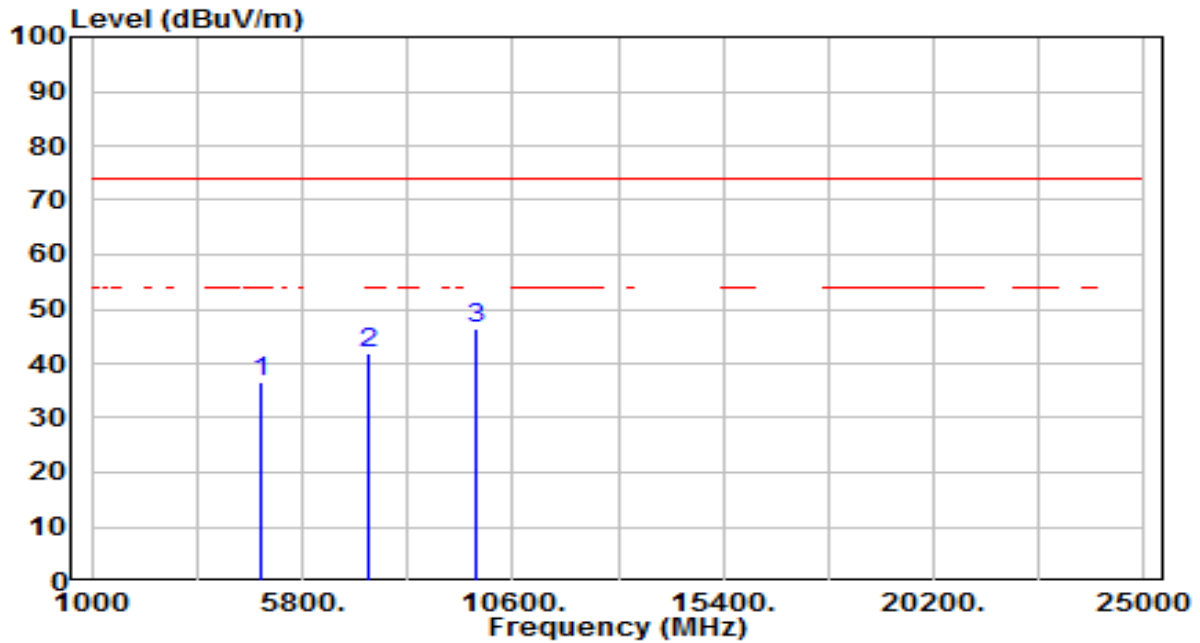


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.00	3.51	36.51	-37.49	74.00	100	150	Peak
2	7311.000	30.06	11.70	41.76	-32.24	74.00	100	216	Peak
3	* 9748.000	31.24	15.26	46.49	-27.51	74.00	100	323	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

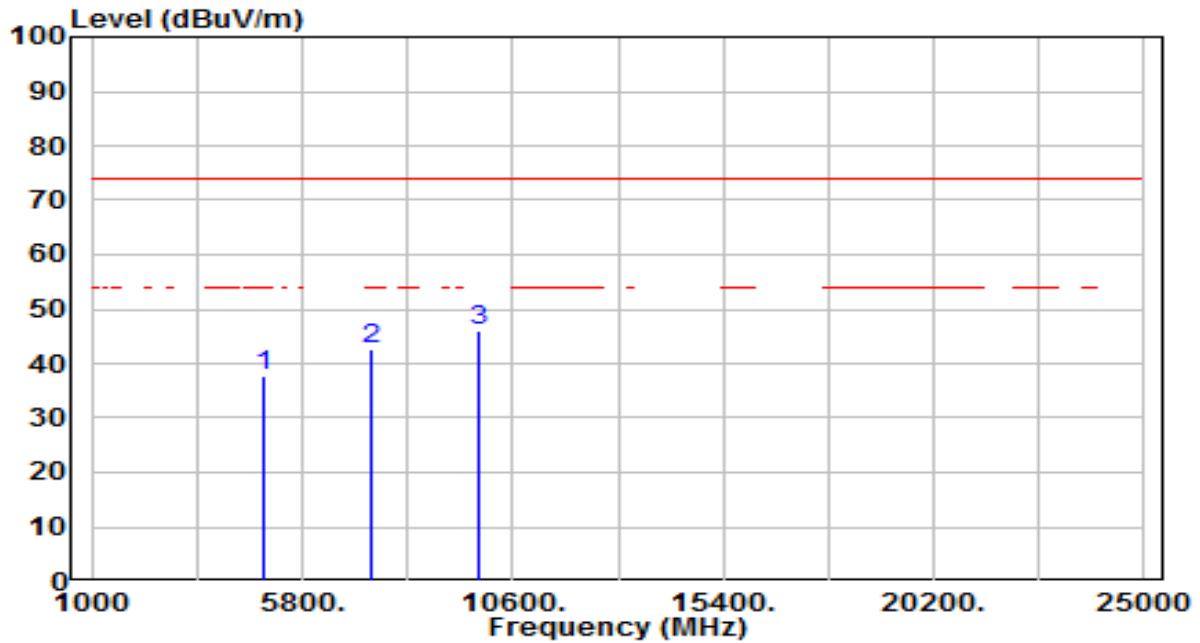


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.19	3.62	37.81	-36.19	74.00	100	338	Peak
2	7386.000	30.58	12.07	42.65	-31.35	74.00	100	268	Peak
3	* 9848.000	30.42	15.43	45.85	-28.15	74.00	100	122	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

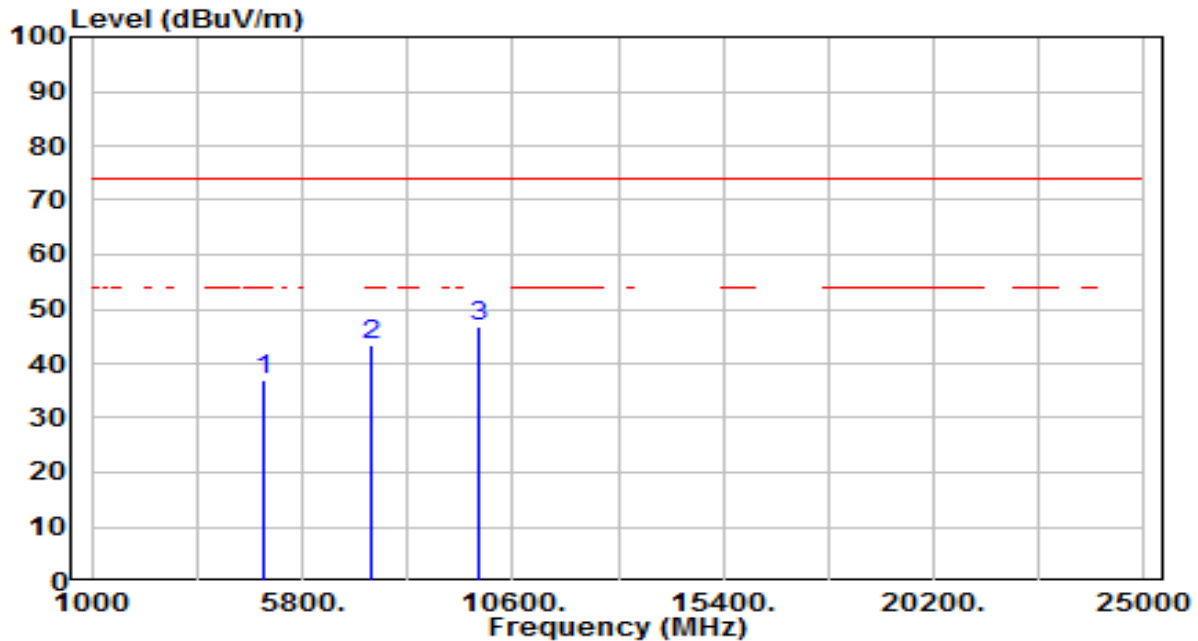


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.21	3.62	36.83	-37.17	74.00	100	223	Peak
2	7386.000	31.20	12.07	43.27	-30.73	74.00	100	243	Peak
3	* 9848.000	31.35	15.43	46.78	-27.22	74.00	100	131	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

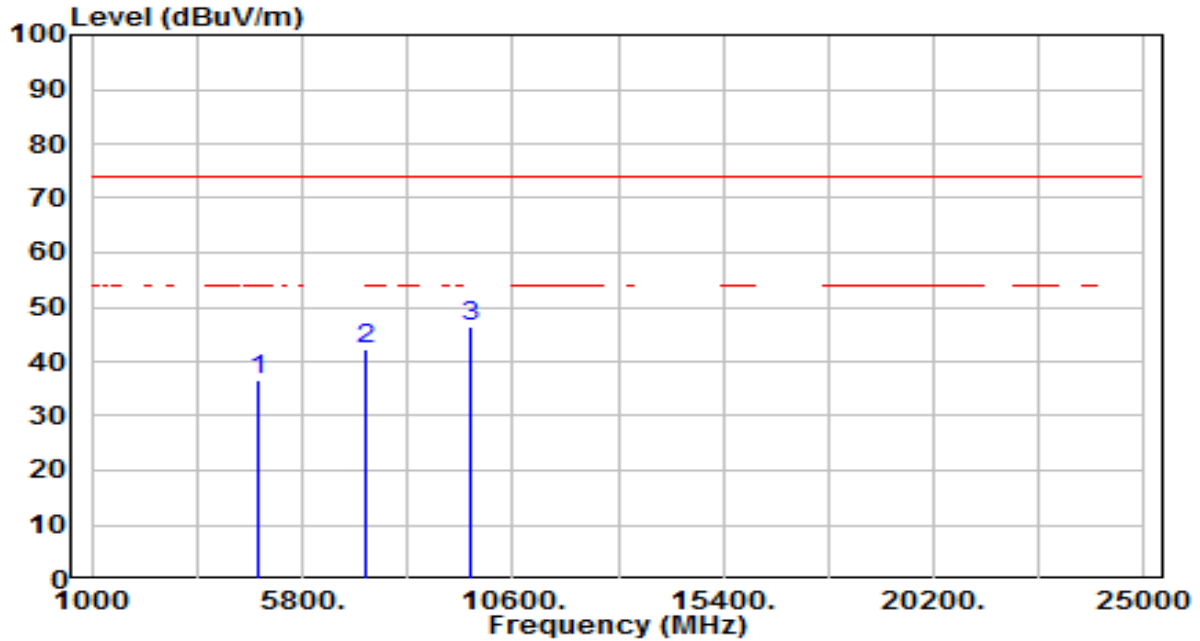


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.29	3.39	36.68	-37.32	74.00	100	232	Peak
2	7236.000	31.06	11.33	42.38	-31.62	74.00	100	308	Peak
3	* 9648.000	31.18	15.09	46.27	-27.73	74.00	100	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

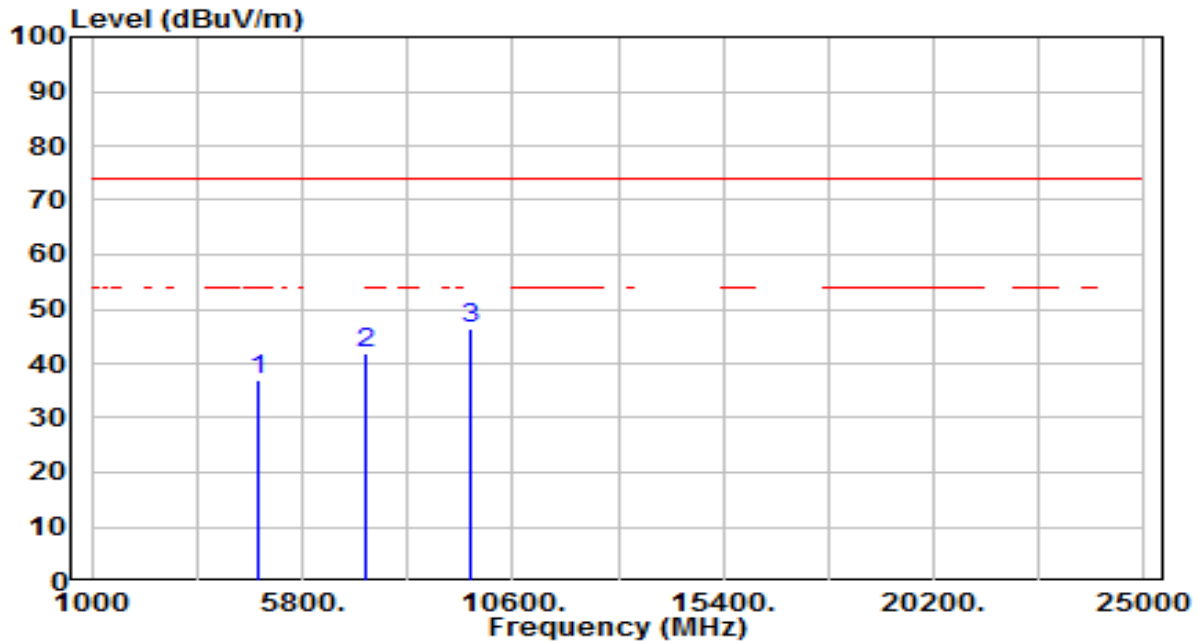


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.68	3.39	37.07	-36.93	74.00	100	278	Peak
2	7236.000	30.50	11.33	41.83	-32.17	74.00	100	211	Peak
3	* 9648.000	31.18	15.09	46.27	-27.73	74.00	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

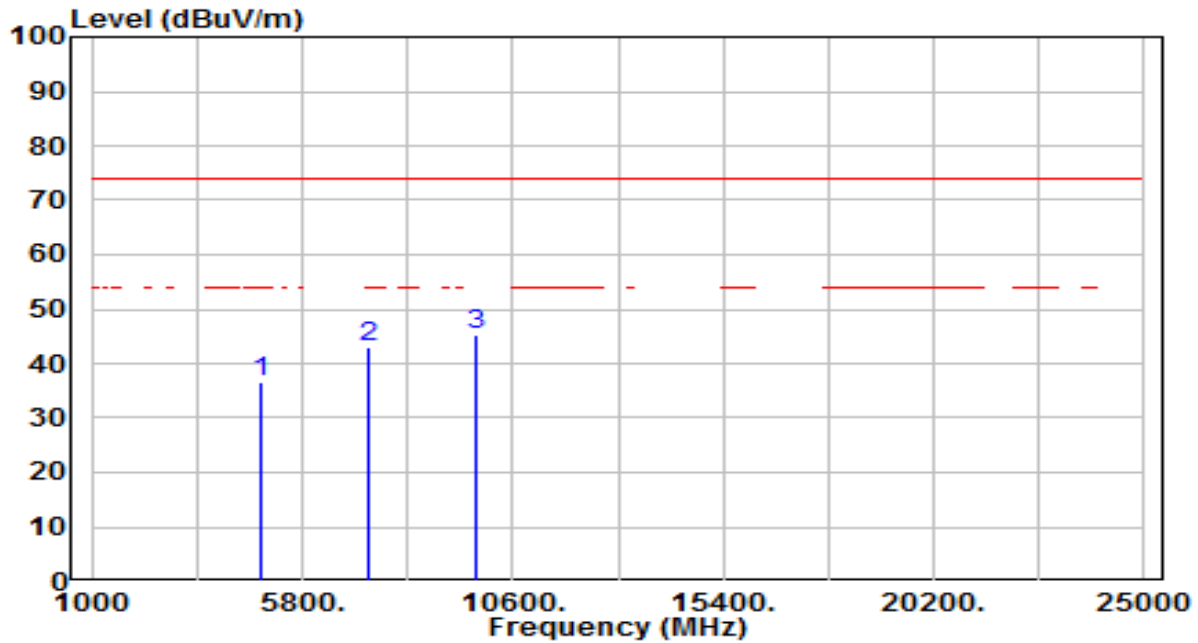


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.06	3.51	36.56	-37.44	74.00	100	77	Peak
2	7311.000	31.27	11.70	42.96	-31.04	74.00	100	316	Peak
3	* 9748.000	30.09	15.26	45.35	-28.65	74.00	100	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

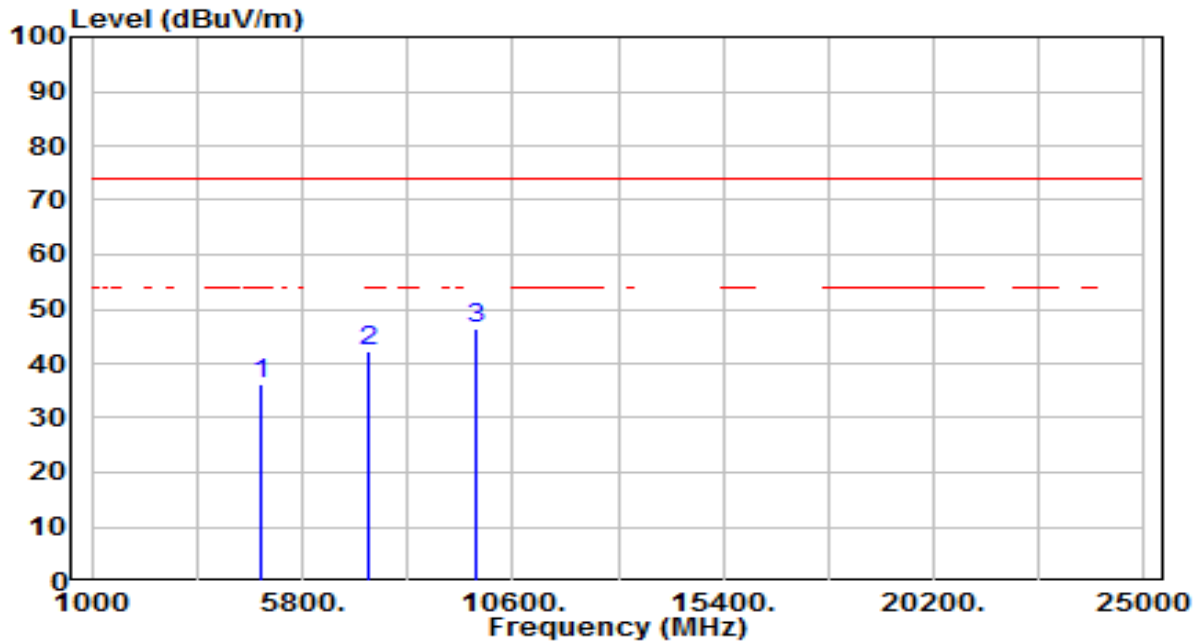


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	32.59	3.51	36.10	-37.90	74.00	100	2	Peak
2	7311.000	30.43	11.70	42.13	-31.87	74.00	100	220	Peak
3	* 9748.000	30.99	15.26	46.25	-27.75	74.00	100	104	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

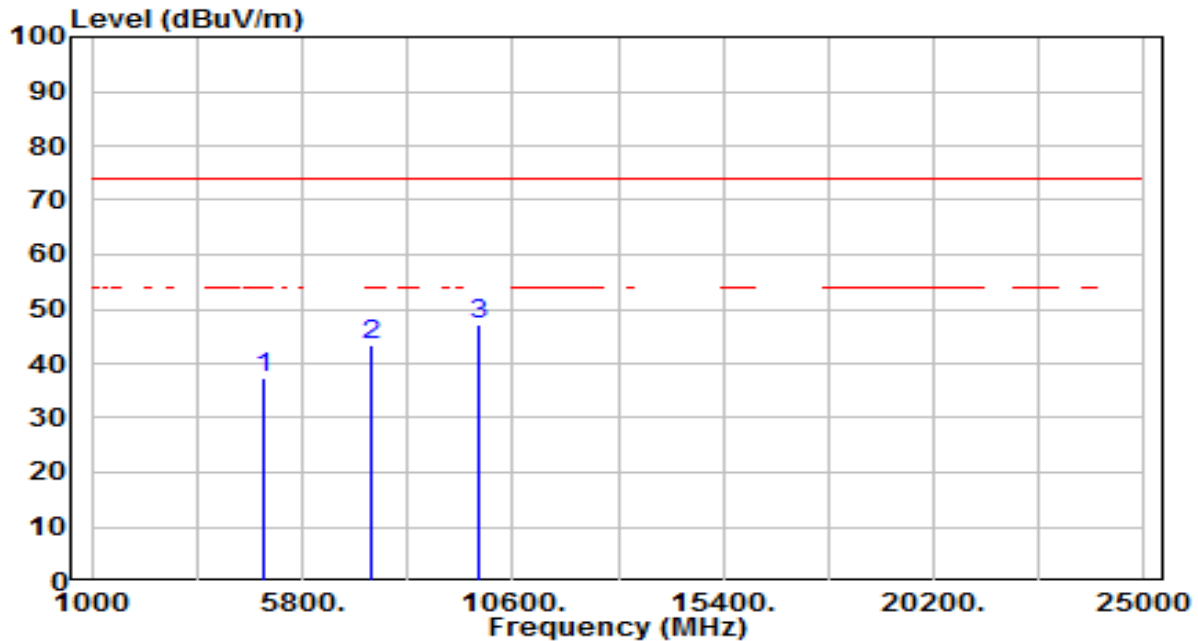


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.87	3.62	37.48	-36.52	74.00	100	220	Peak
2	7386.000	31.44	12.07	43.51	-30.49	74.00	100	321	Peak
3	* 9848.000	31.81	15.43	47.24	-26.76	74.00	100	144	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

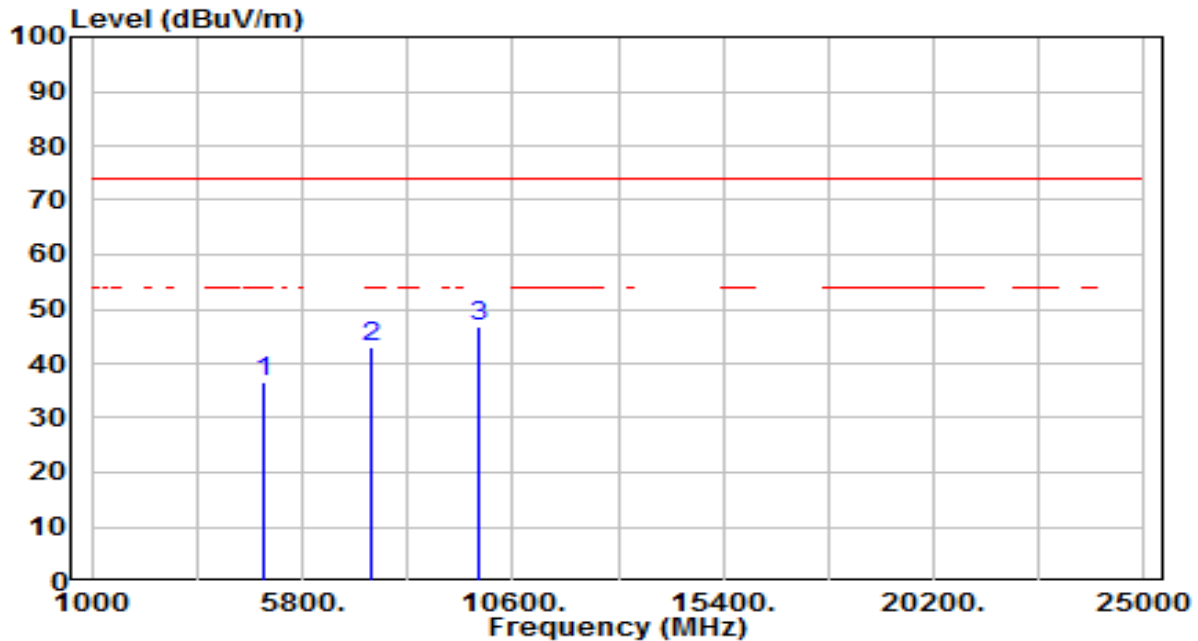


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.10	3.62	36.72	-37.28	74.00	100	292	Peak
2	7386.000	30.78	12.07	42.85	-31.15	74.00	100	57	Peak
3	* 9848.000	31.26	15.43	46.69	-27.31	74.00	100	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

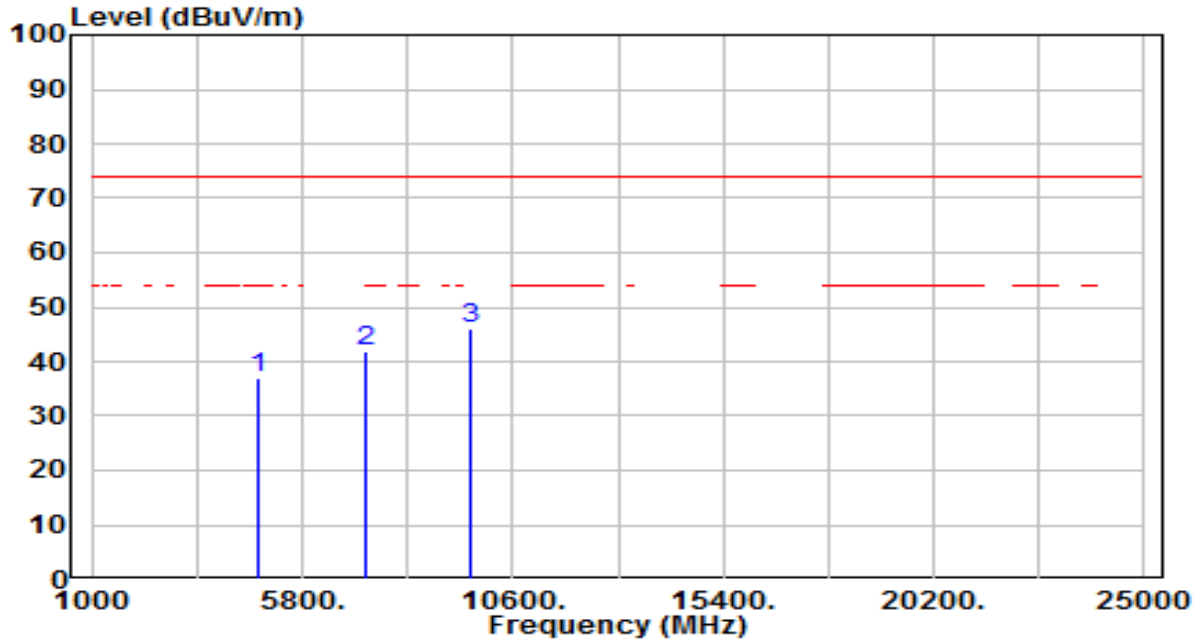


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.42	3.39	36.81	-37.19	74.00	100	47	Peak
2	7236.000	30.71	11.33	42.04	-31.96	74.00	100	357	Peak
3	* 9648.000	30.78	15.09	45.86	-28.14	74.00	100	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

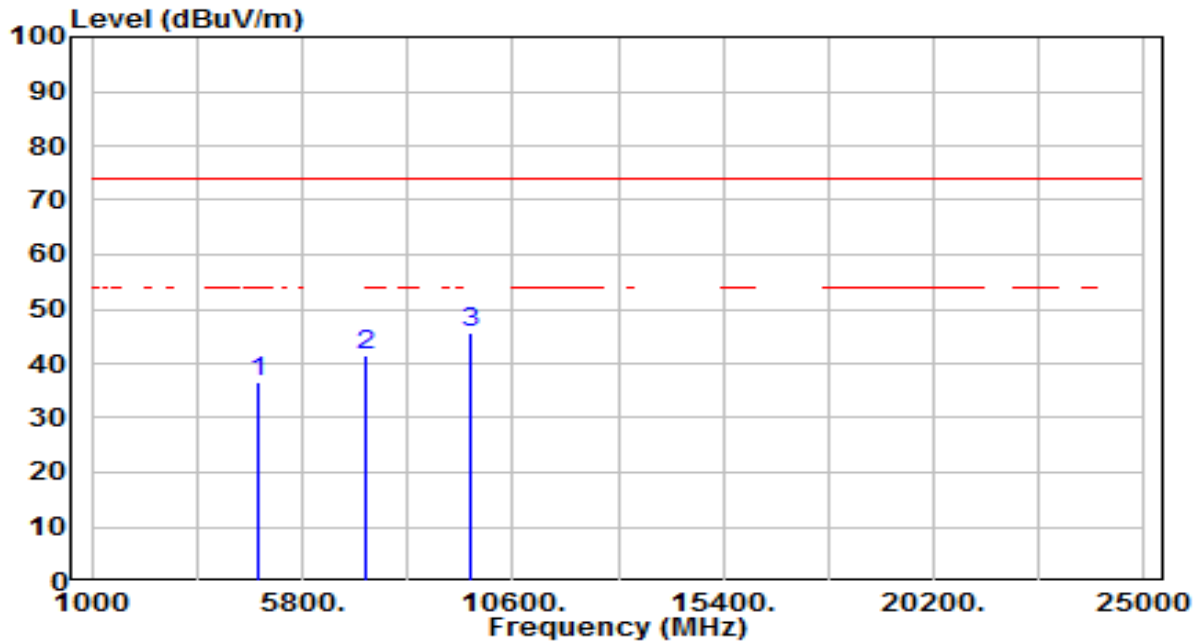


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.37	3.39	36.76	-37.24	74.00	100	358	Peak
2	7236.000	30.14	11.33	41.47	-32.53	74.00	100	261	Peak
3	* 9648.000	30.67	15.09	45.76	-28.24	74.00	100	52	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

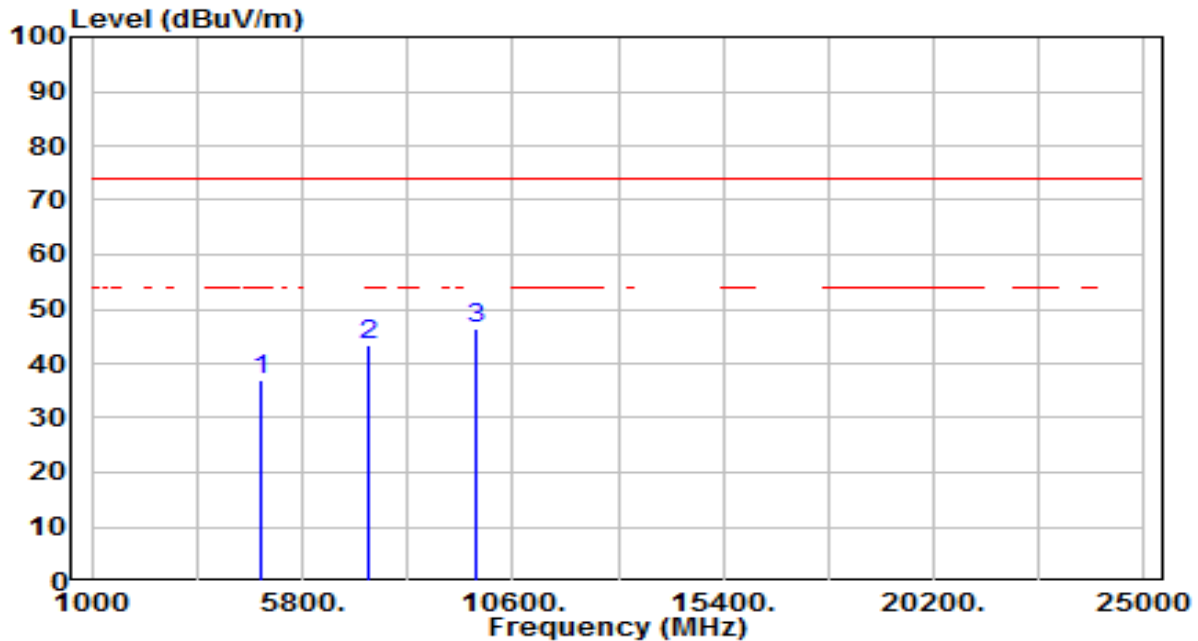


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.43	3.51	36.93	-37.07	74.00	100	154	Peak
2	7311.000	31.51	11.70	43.21	-30.79	74.00	100	251	Peak
3	* 9748.000	30.99	15.26	46.25	-27.75	74.00	100	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

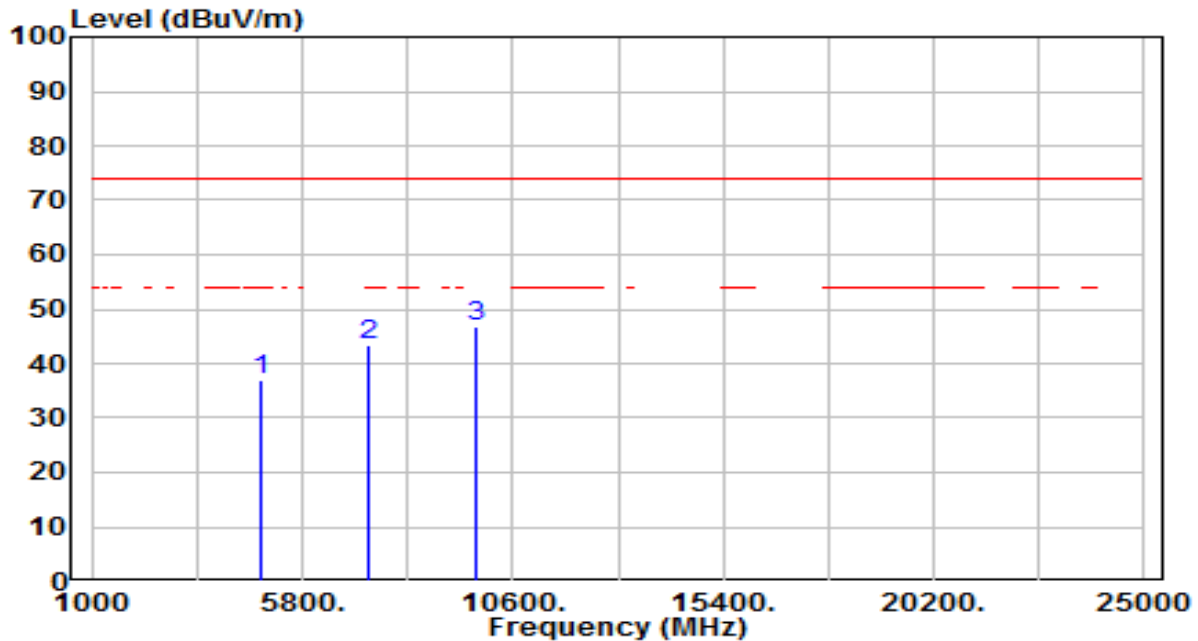


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.55	3.51	37.05	-36.95	74.00	100	297	Peak
2	7311.000	31.73	11.70	43.43	-30.57	74.00	100	338	Peak
3	* 9748.000	31.63	15.26	46.89	-27.11	74.00	100	115	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

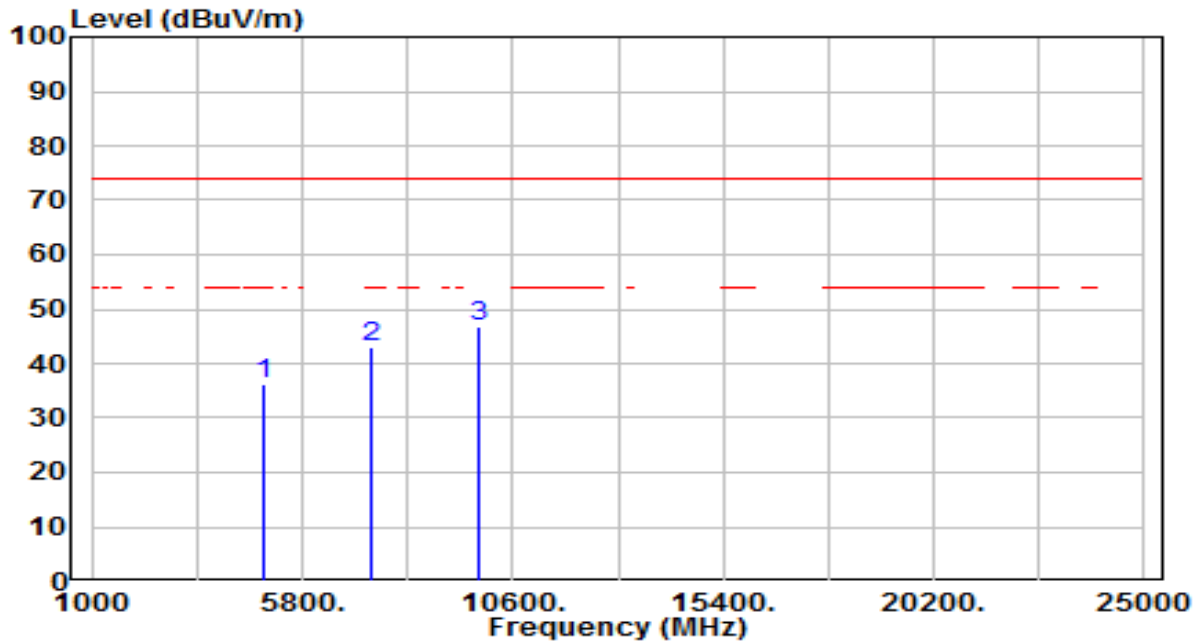


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	32.57	3.62	36.19	-37.81	74.00	100	109	Peak
2	7386.000	30.82	12.07	42.89	-31.11	74.00	100	22	Peak
3	* 9848.000	31.28	15.43	46.71	-27.29	74.00	100	38	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

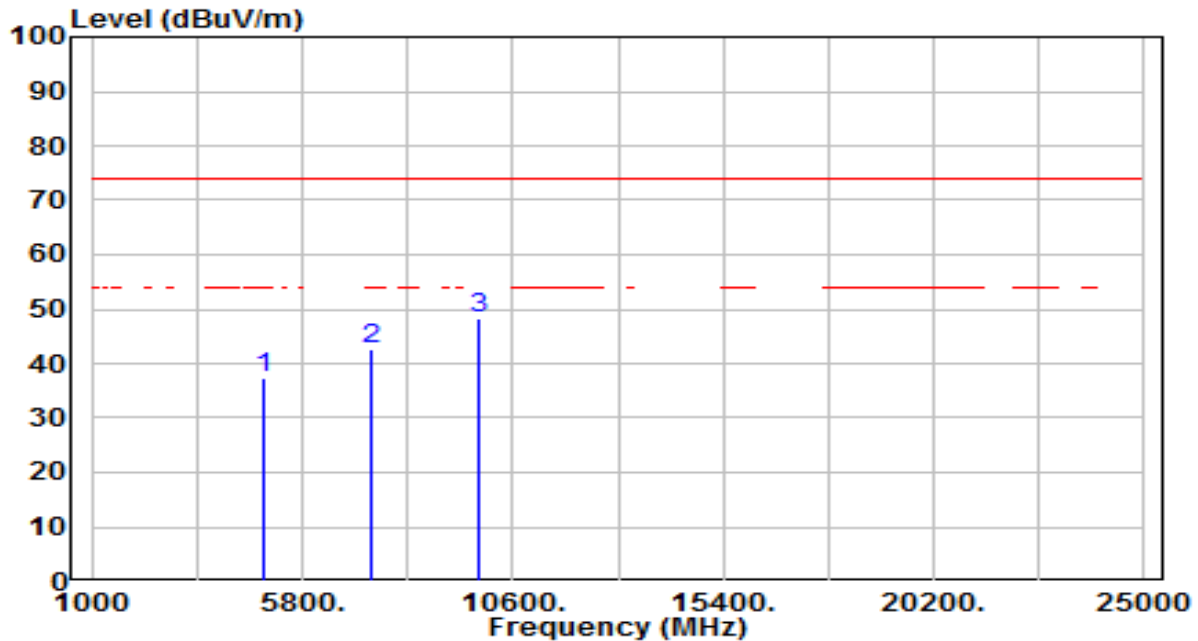


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.59	3.62	37.21	-36.79	74.00	100	18	Peak
2	7386.000	30.43	12.07	42.50	-31.50	74.00	100	38	Peak
3	* 9848.000	32.81	15.43	48.24	-25.76	74.00	100	257	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

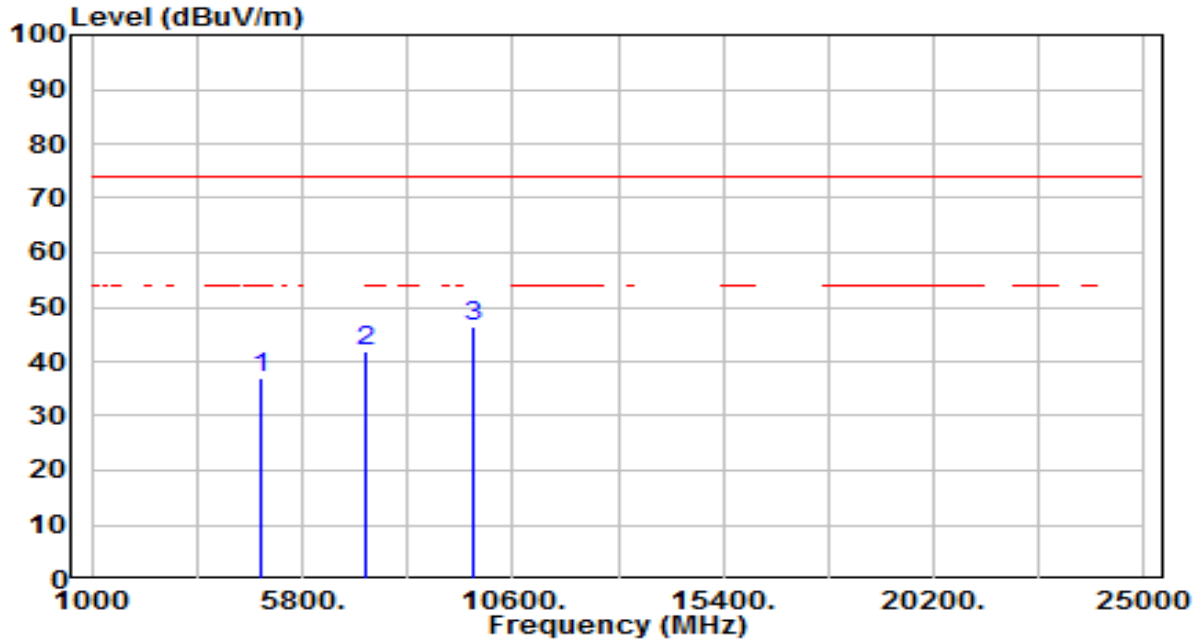


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	33.61	3.44	37.05	-36.95	74.00	100	139	Peak
2	7266.000	30.42	11.47	41.90	-32.10	74.00	100	0	Peak
3	* 9688.000	31.08	15.16	46.24	-27.76	74.00	100	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

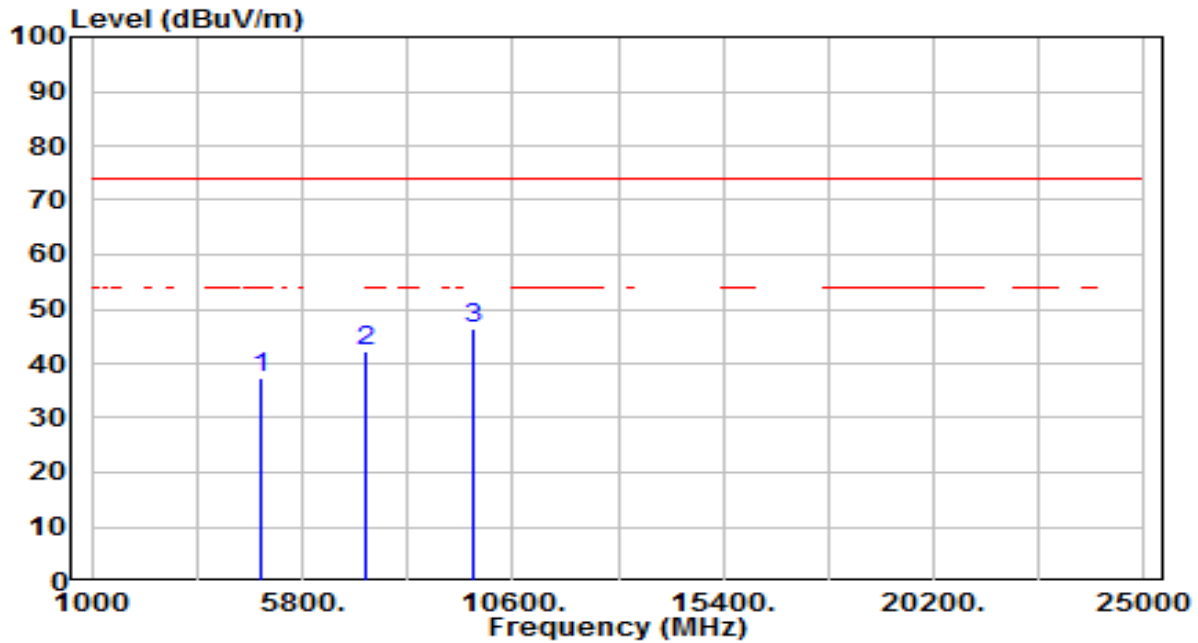


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	33.87	3.44	37.30	-36.70	74.00	100	42	Peak
2	7266.000	30.72	11.47	42.19	-31.81	74.00	100	47	Peak
3	* 9688.000	31.23	15.16	46.38	-27.62	74.00	100	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

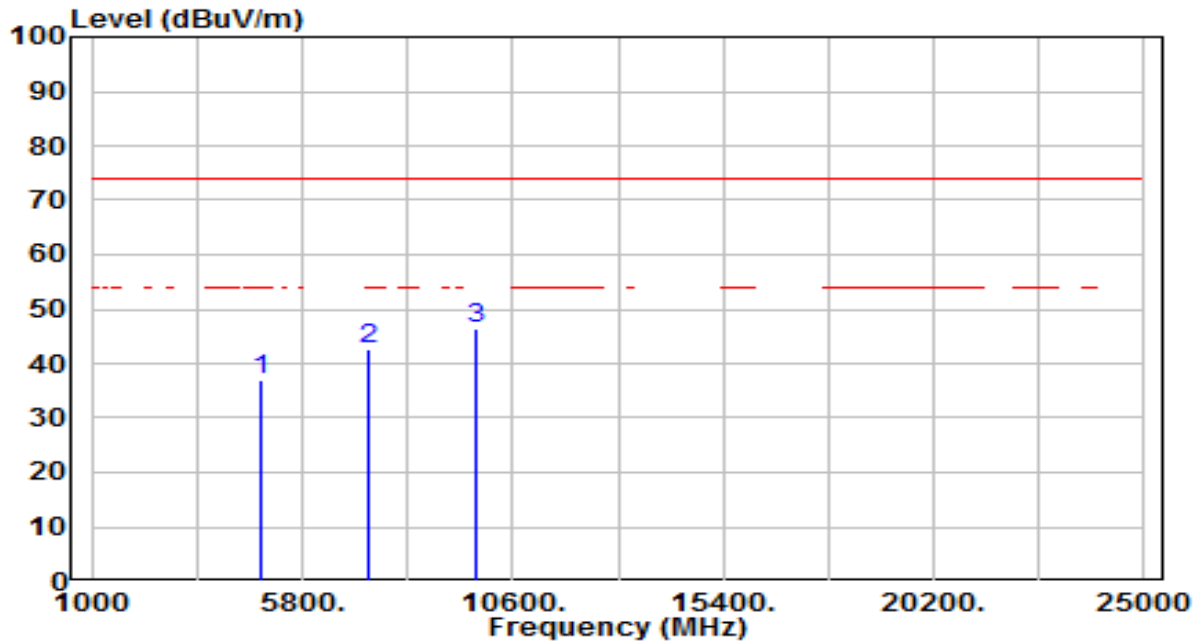


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.41	3.51	36.91	-37.09	74.00	100	88	Peak
2	7311.000	31.06	11.70	42.76	-31.24	74.00	100	306	Peak
3	* 9748.000	30.99	15.26	46.25	-27.75	74.00	100	108	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

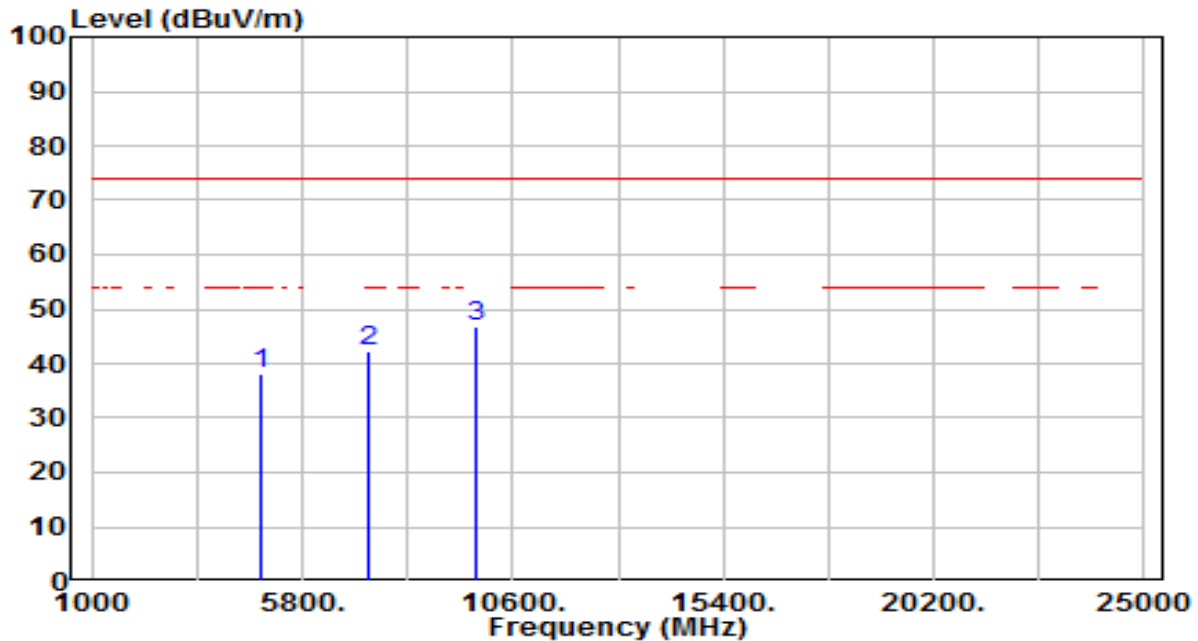


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.48	3.51	37.98	-36.02	74.00	100	78	Peak
2	7311.000	30.69	11.70	42.39	-31.61	74.00	100	2	Peak
3	* 9748.000	31.37	15.26	46.63	-27.37	74.00	100	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

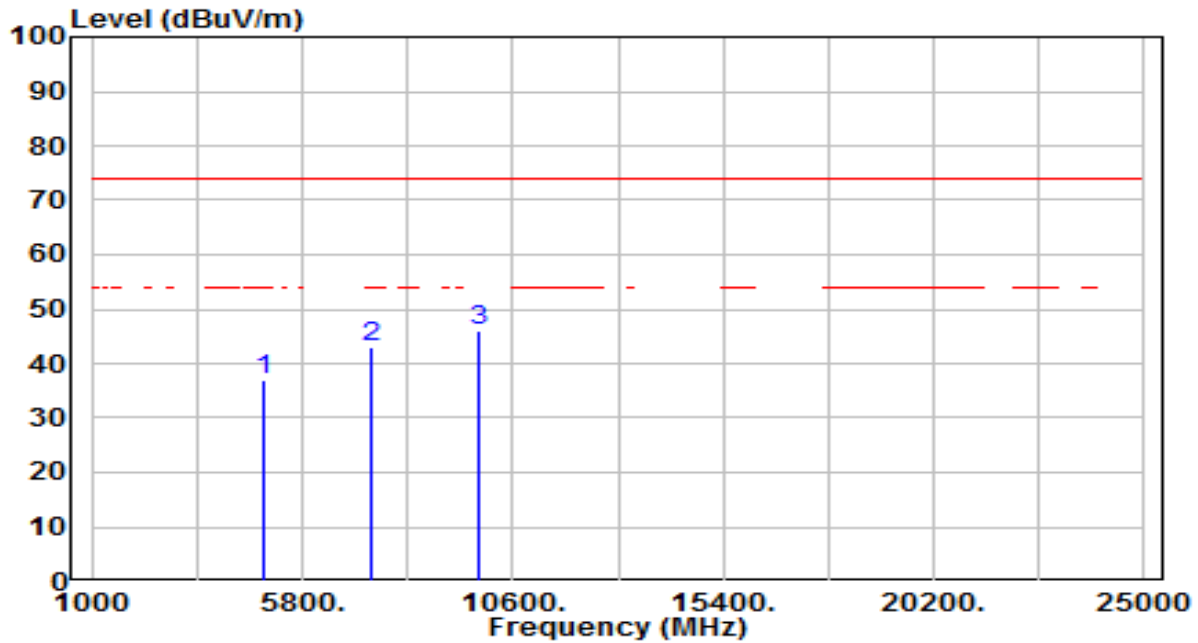


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.51	3.57	37.09	-36.91	74.00	100	157	Peak
2	7356.000	31.14	11.92	43.06	-30.94	74.00	100	208	Peak
3	* 9808.000	30.76	15.36	46.13	-27.87	74.00	100	116	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

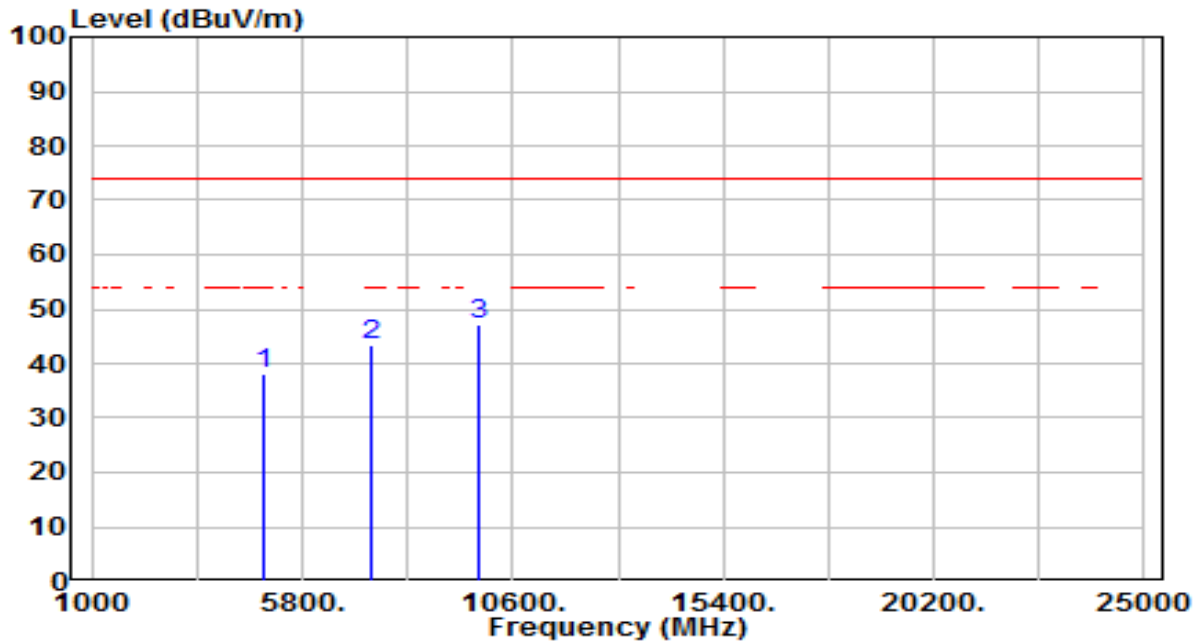


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.36	3.57	37.94	-36.06	74.00	100	28	Peak
2	7356.000	31.31	11.92	43.24	-30.76	74.00	100	24	Peak
3	* 9808.000	31.74	15.36	47.10	-26.90	74.00	100	338	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

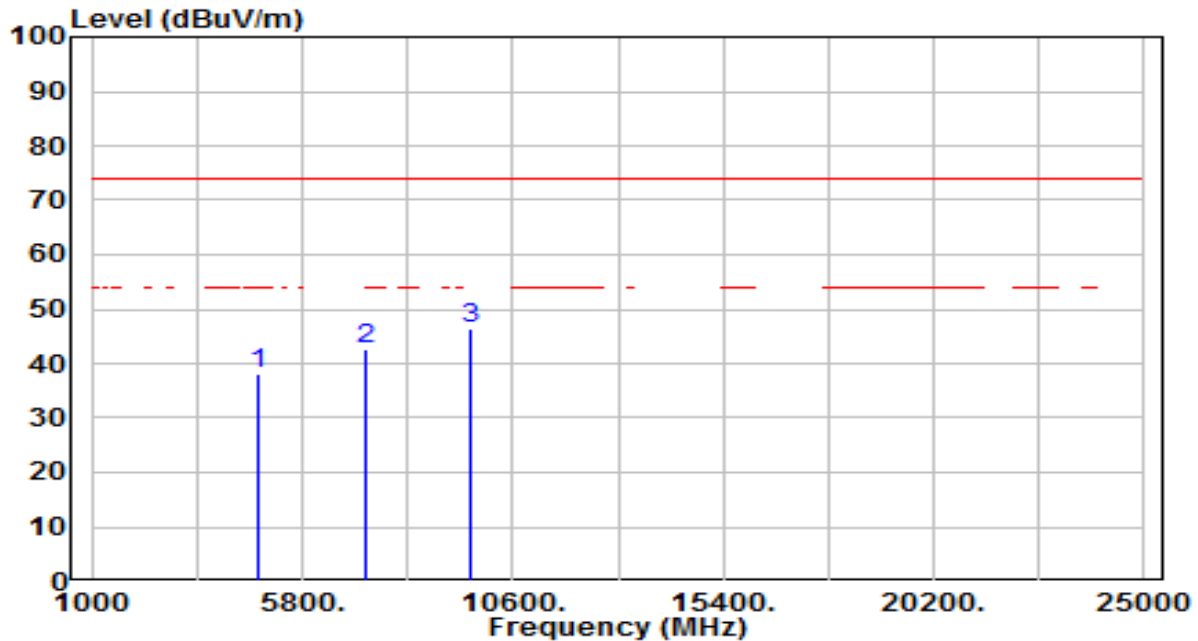


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.71	3.39	38.11	-35.89	74.00	100	194	Peak
2	7236.000	31.24	11.33	42.57	-31.43	74.00	100	123	Peak
3	* 9648.000	31.20	15.09	46.29	-27.71	74.00	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

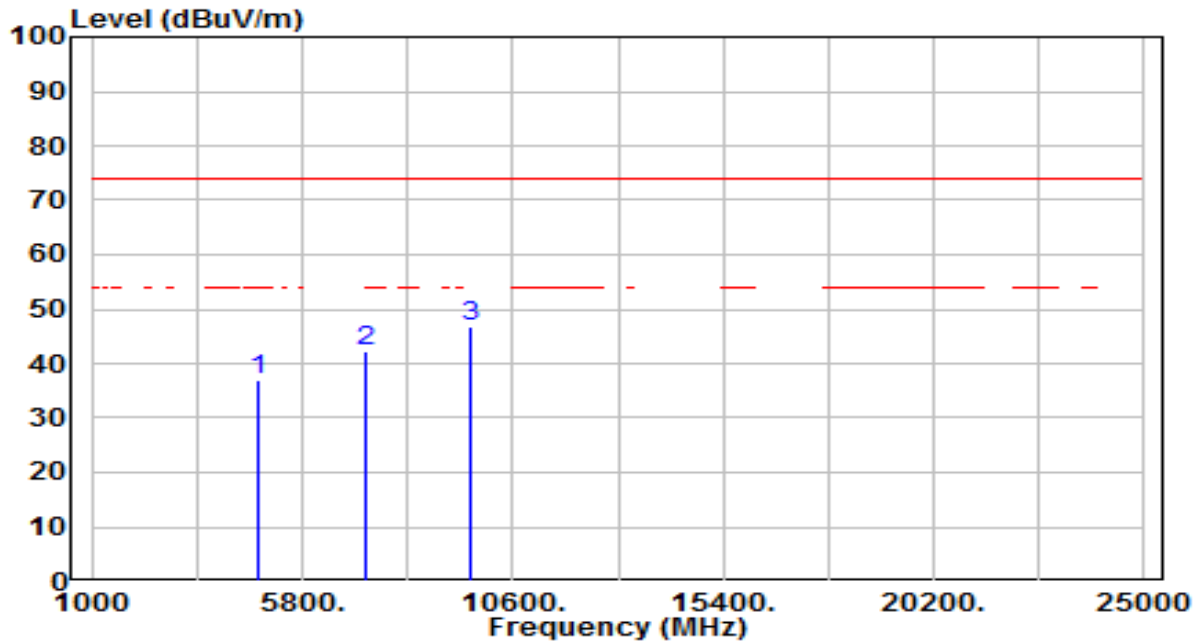


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.52	3.39	36.91	-37.09	74.00	100	360	Peak
2	7236.000	30.81	11.33	42.13	-31.87	74.00	100	353	Peak
3	* 9648.000	31.88	15.09	46.97	-27.03	74.00	100	114	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

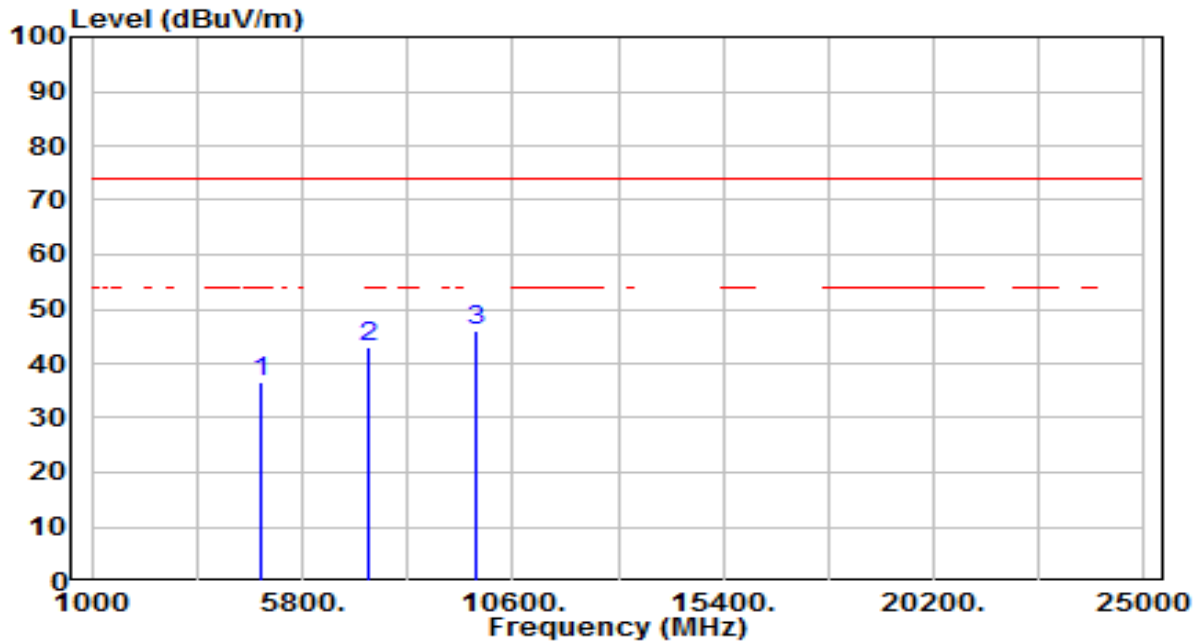


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	32.96	3.51	36.47	-37.53	74.00	100	73	Peak
2	7311.000	31.22	11.70	42.92	-31.08	74.00	100	58	Peak
3	* 9748.000	30.69	15.26	45.95	-28.05	74.00	100	306	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

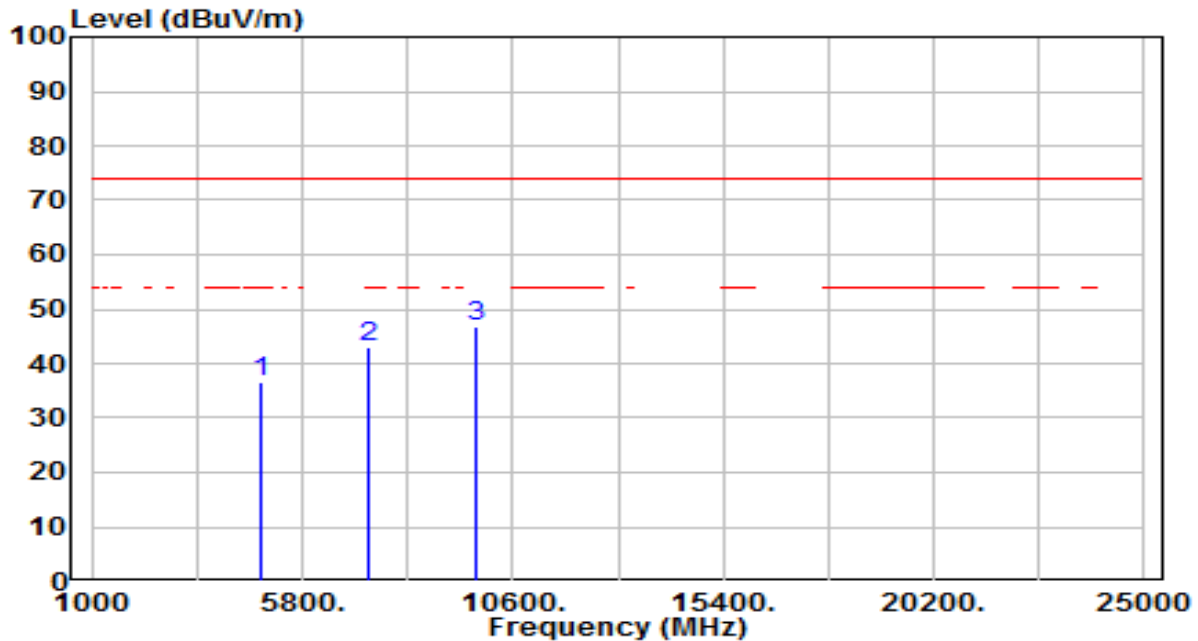


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.03	3.51	36.54	-37.46	74.00	100	334	Peak
2	7311.000	31.35	11.70	43.05	-30.95	74.00	100	360	Peak
3	* 9748.000	31.36	15.26	46.62	-27.38	74.00	100	14	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

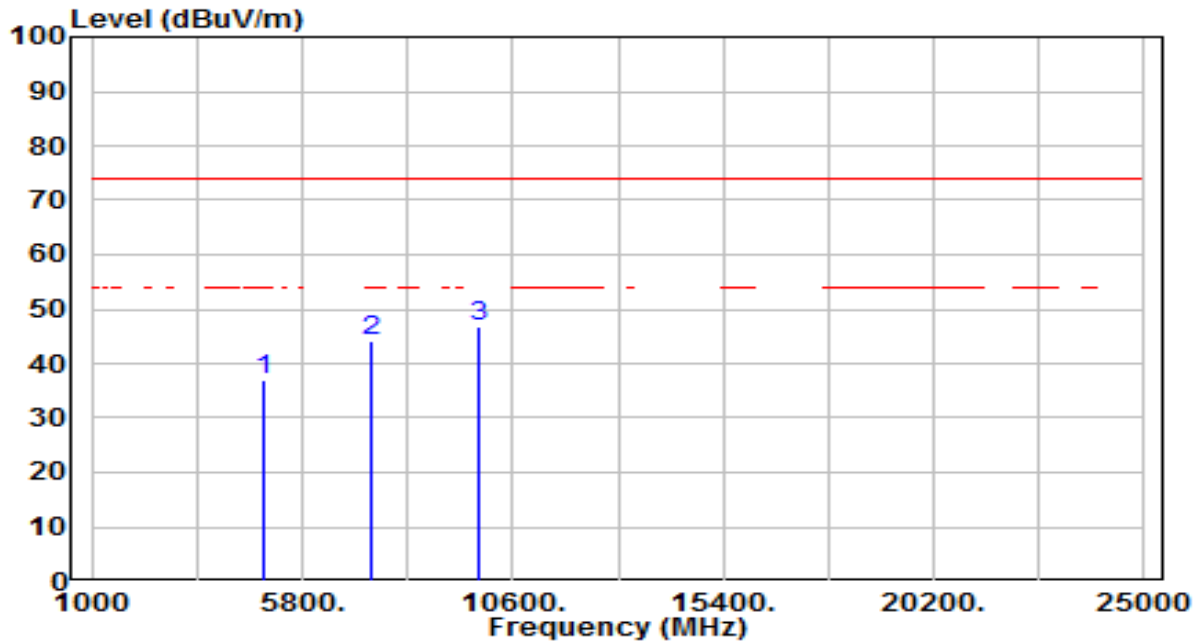


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.38	3.62	36.99	-37.01	74.00	100	287	Peak
2	7386.000	31.92	12.07	43.99	-30.01	74.00	100	298	Peak
3	* 9848.000	31.21	15.43	46.64	-27.36	74.00	100	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

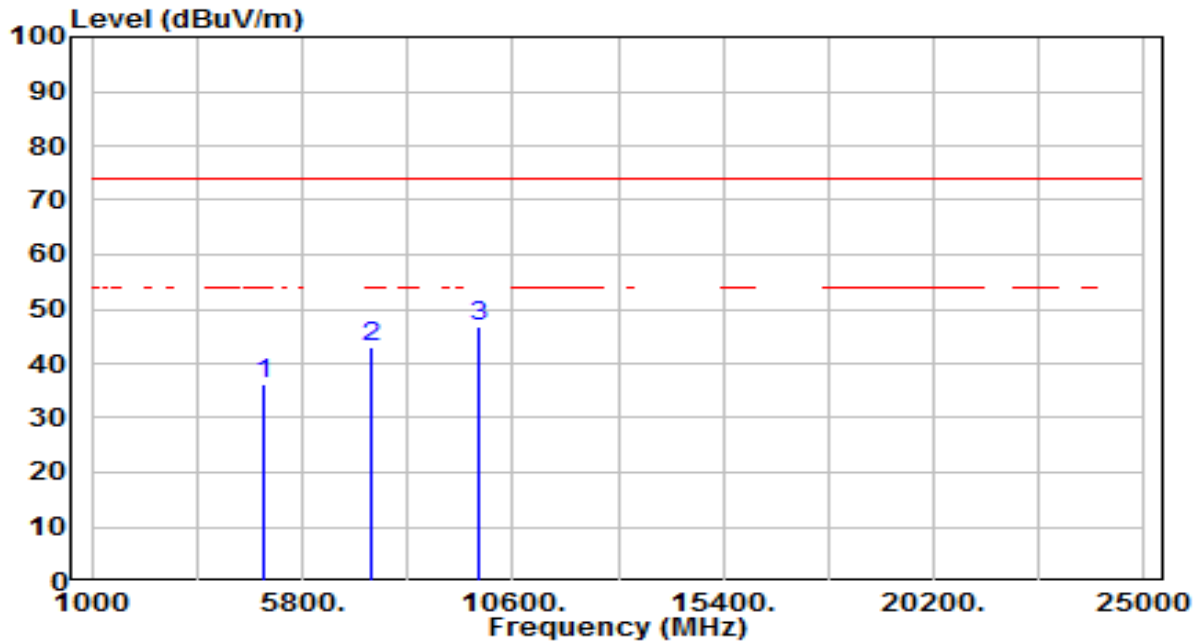


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	32.50	3.62	36.12	-37.88	74.00	100	348	Peak
2	7386.000	30.77	12.07	42.84	-31.16	74.00	100	292	Peak
3	* 9848.000	31.23	15.43	46.66	-27.34	74.00	100	103	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

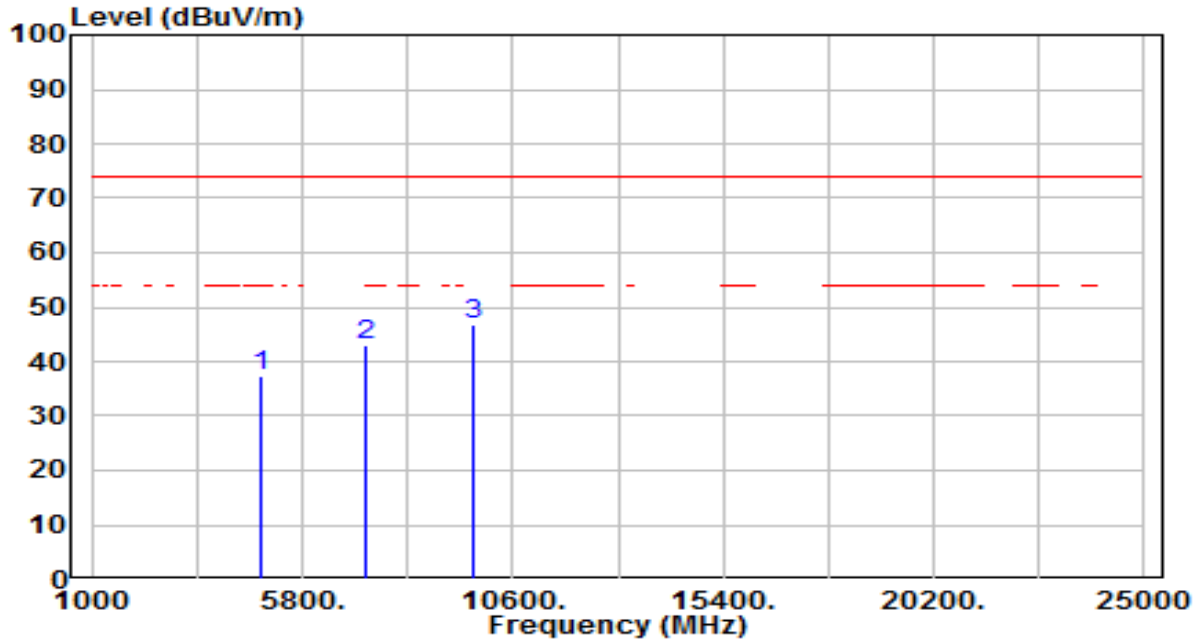


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	33.93	3.44	37.36	-36.64	74.00	100	88	Peak
2	7266.000	31.49	11.47	42.97	-31.03	74.00	100	221	Peak
3	* 9688.000	31.48	15.16	46.63	-27.37	74.00	100	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

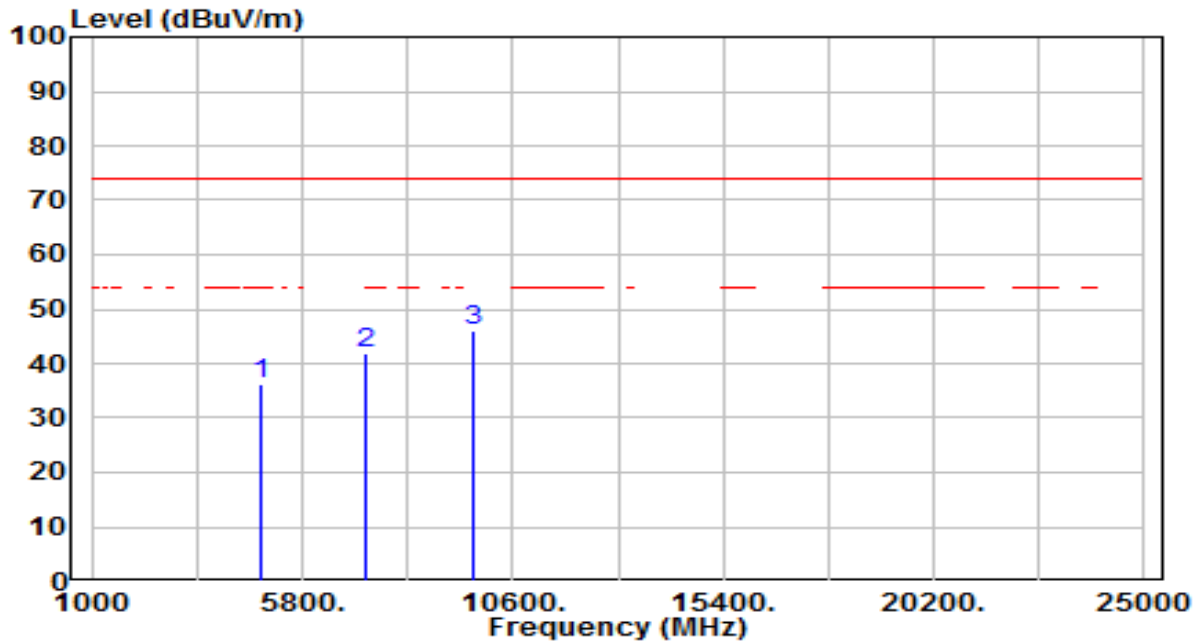


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	32.70	3.44	36.14	-37.86	74.00	100	354	Peak
2	7266.000	30.44	11.47	41.92	-32.08	74.00	100	47	Peak
3	* 9688.000	30.83	15.16	45.98	-28.02	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

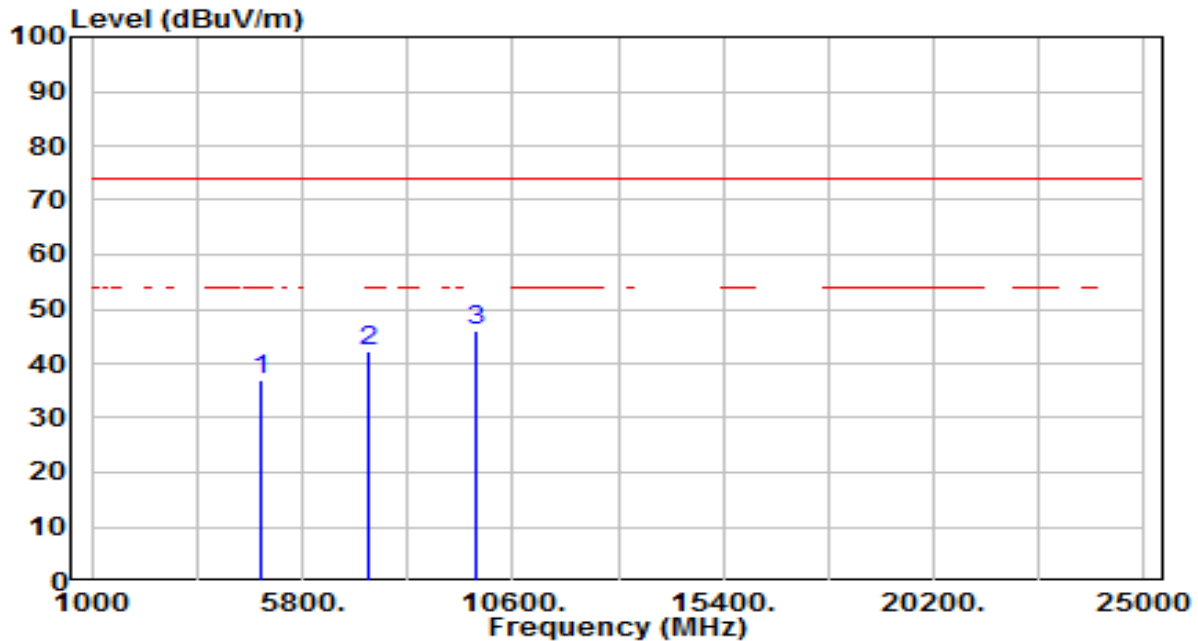


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.37	3.51	36.88	-37.12	74.00	100	353	Peak
2	7311.000	30.70	11.70	42.40	-31.60	74.00	100	220	Peak
3	* 9748.000	30.82	15.26	46.08	-27.92	74.00	100	174	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

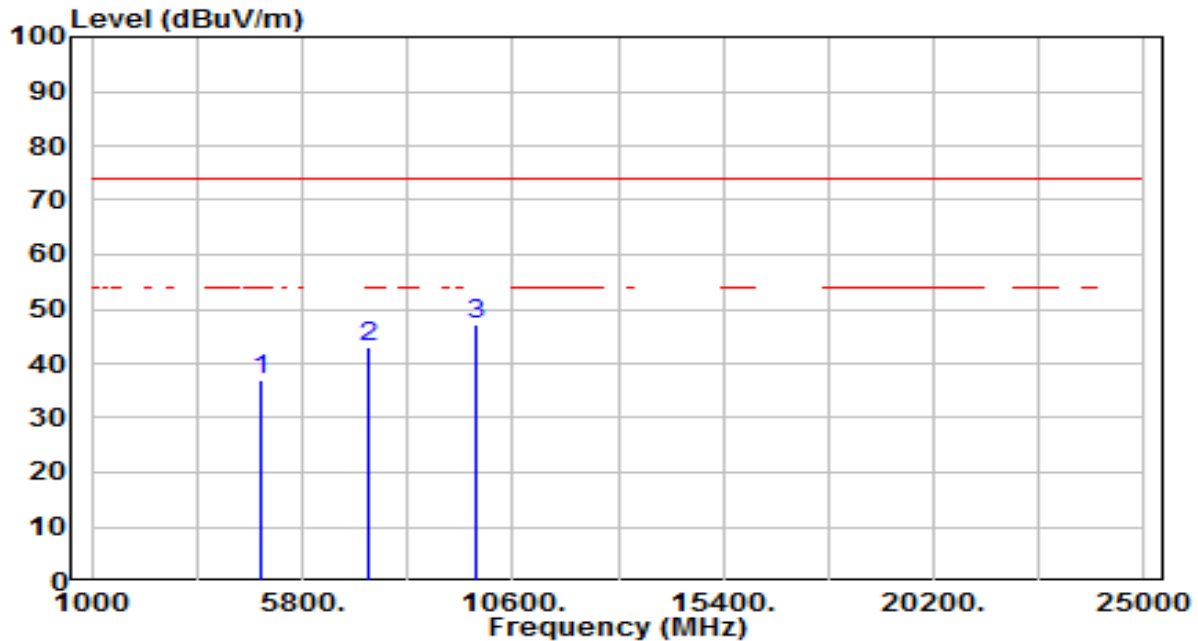


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.37	3.51	36.88	-37.12	74.00	100	317	Peak
2	7311.000	31.44	11.70	43.14	-30.86	74.00	100	231	Peak
3	* 9748.000	31.85	15.26	47.11	-26.89	74.00	100	231	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

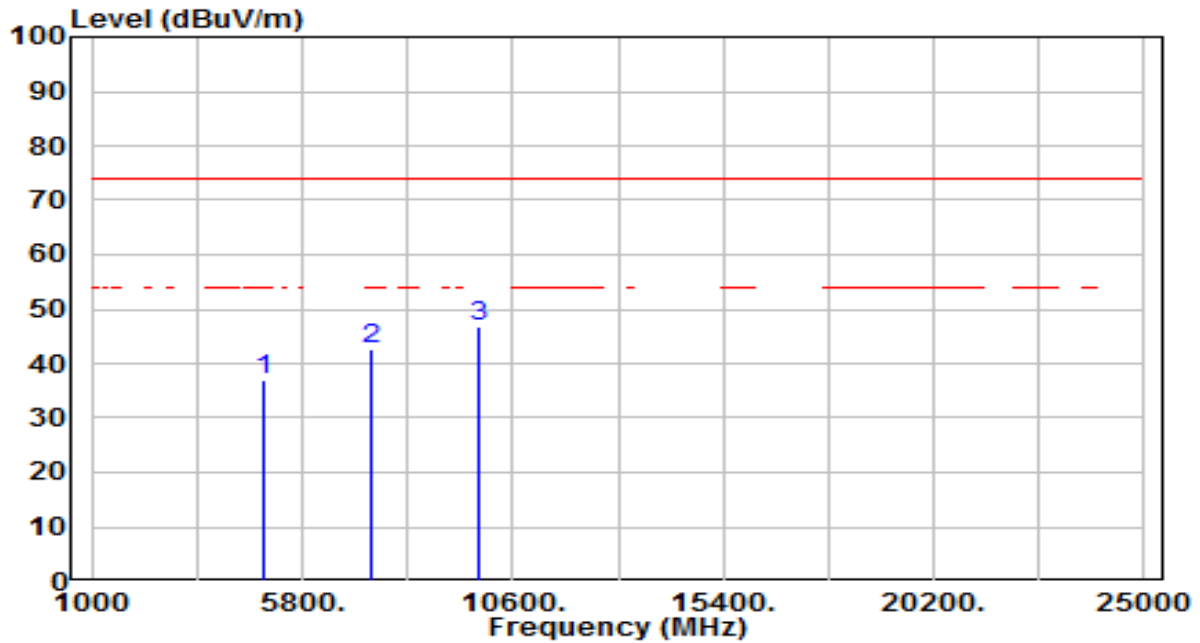


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.57	3.57	37.15	-36.85	74.00	100	185	Peak
2	7356.000	30.84	11.92	42.76	-31.24	74.00	100	241	Peak
3	* 9808.000	31.35	15.36	46.72	-27.28	74.00	100	12	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

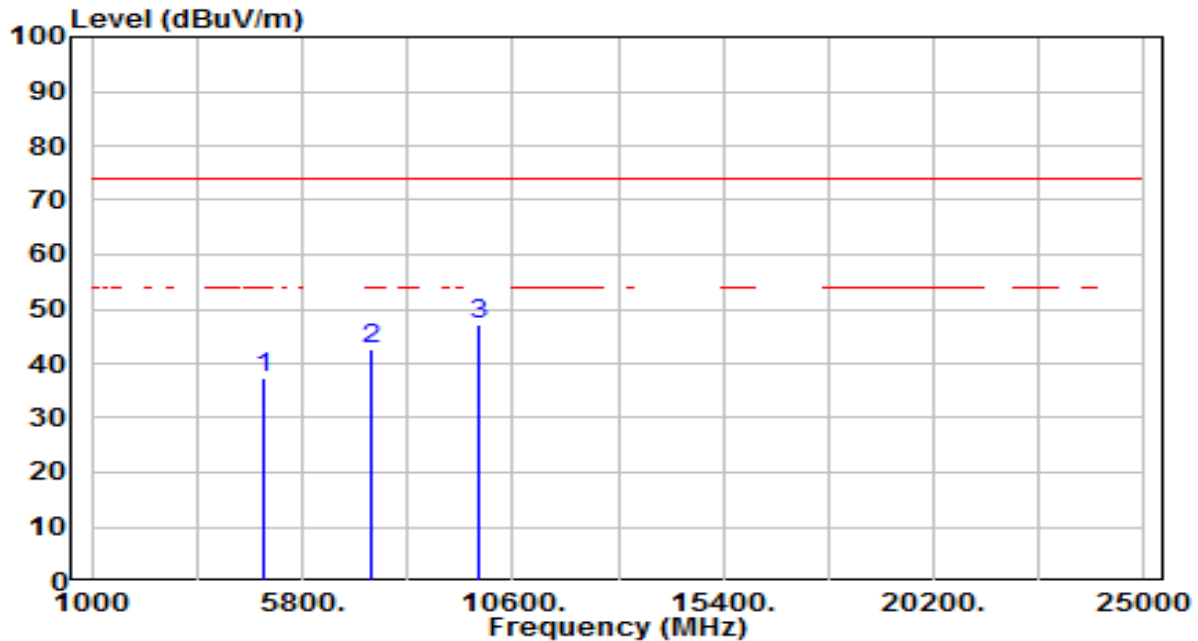

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.78	3.57	37.36	-36.64	74.00	100	236	Peak
2	7356.000	30.84	11.92	42.76	-31.24	74.00	100	333	Peak
3	* 9808.000	31.62	15.36	46.98	-27.02	74.00	100	17	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

7.7.3. Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

1GHz ~ 18GHz Test Setup:

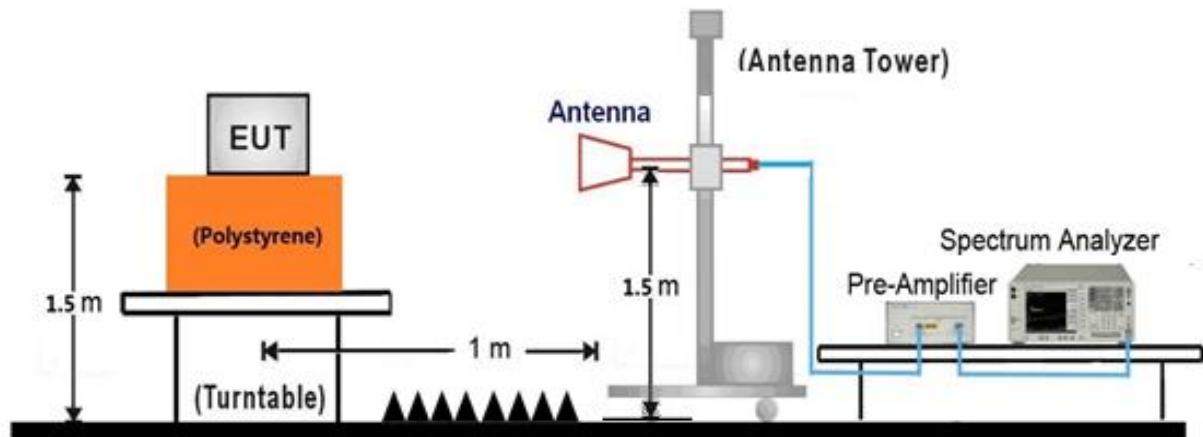

7.7.5. Test Result

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

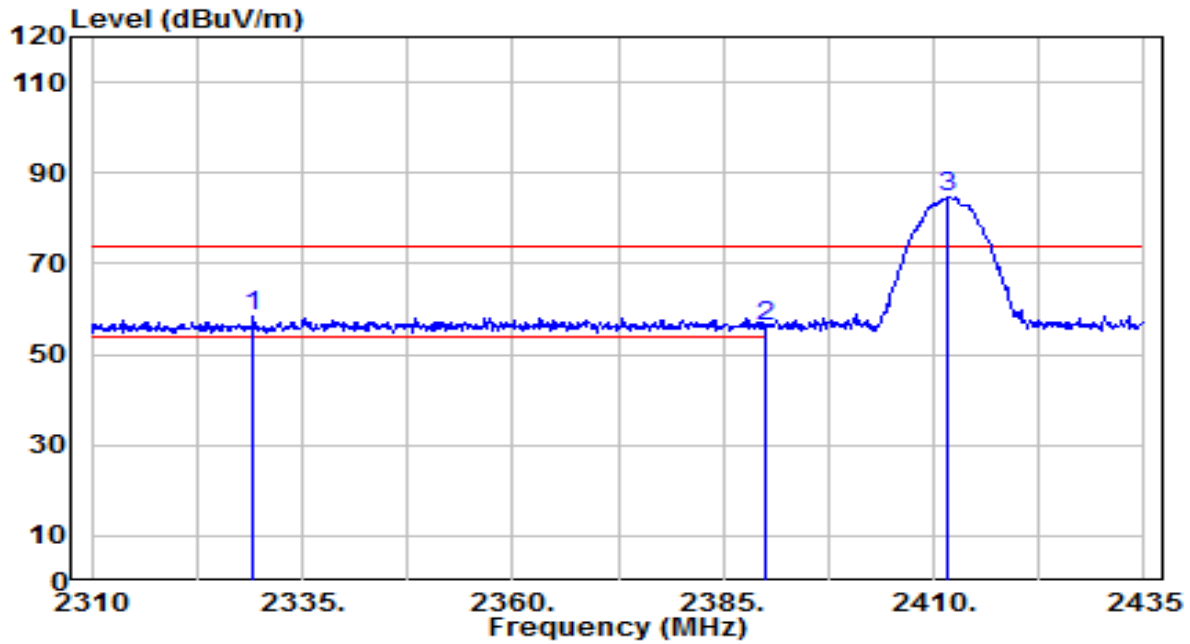


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2329.250	26.62	31.62	58.24	-15.76	74.00	180	60	Peak
2		2390.000	24.42	31.85	56.27	-17.73	74.00	180	60	Peak
3		2411.625	52.83	31.93	84.76	N/A	N/A	180	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

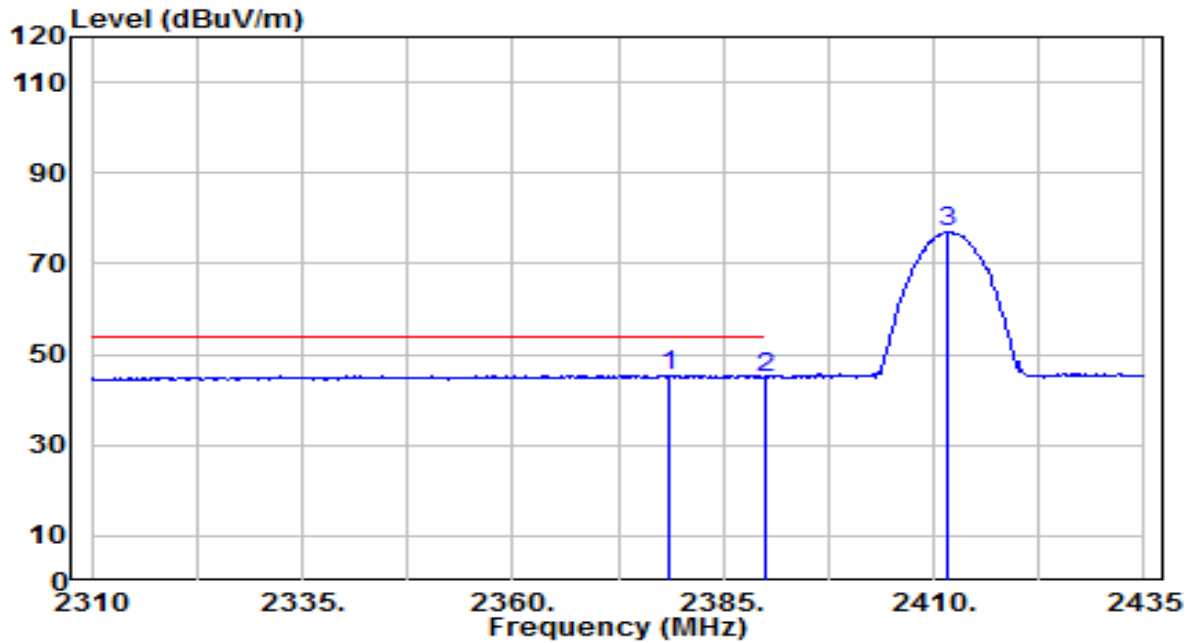


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.625	13.57	31.81	45.38	-8.62	54.00	180	60	Average
2		2390.000	13.11	31.85	44.96	-9.04	54.00	180	60	Average
3		2411.750	45.05	31.93	76.98	N/A	N/A	180	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

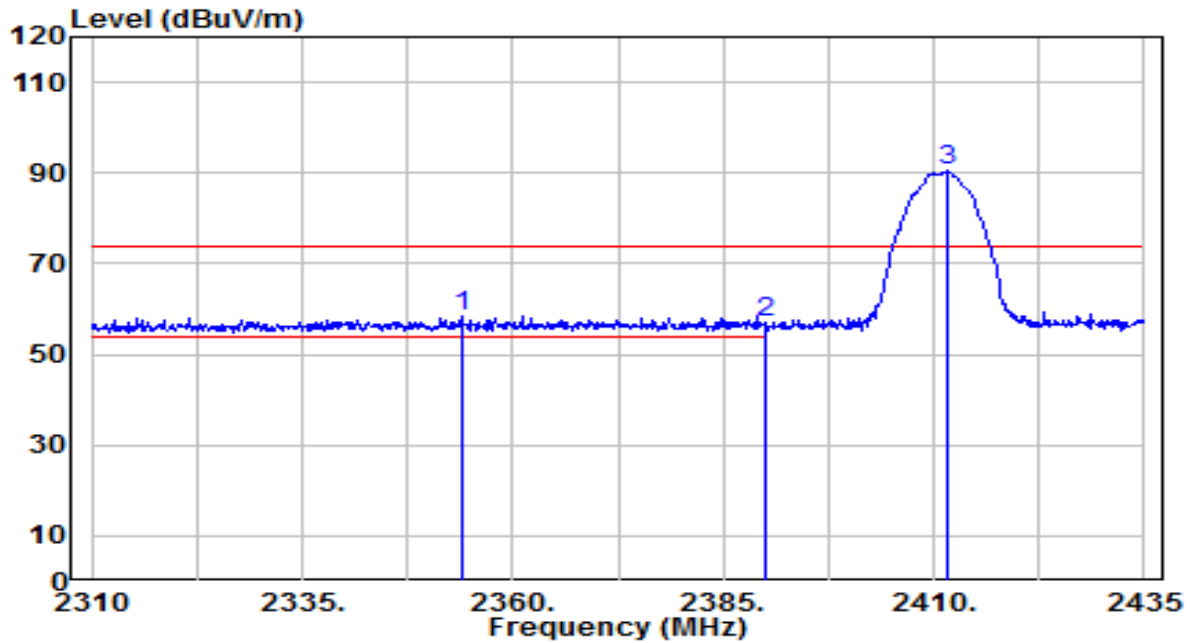


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2353.875	26.78	31.71	58.49	-15.51	74.00	170	355	Peak
2		2390.000	25.02	31.85	56.87	-17.13	74.00	170	355	Peak
3		2411.625	58.47	31.93	90.40	N/A	N/A	170	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

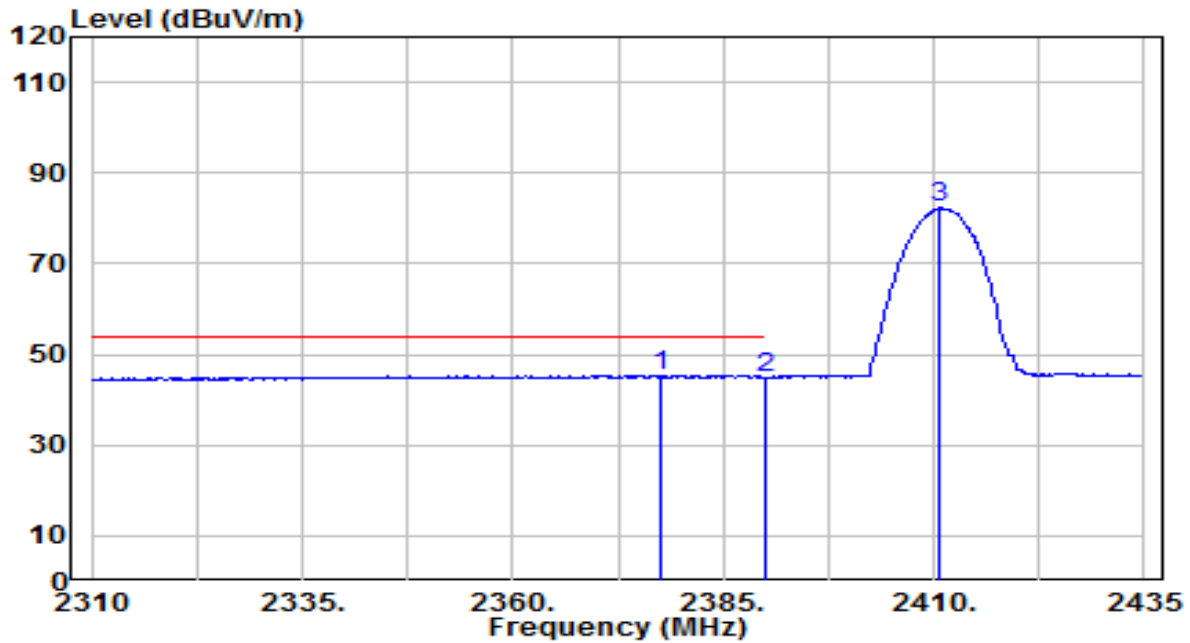


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2377.625	13.62	31.80	45.43	-8.57	54.00	170	355	Average
2		2390.000	13.05	31.85	44.90	-9.10	54.00	170	355	Average
3		2410.750	50.34	31.93	82.27	N/A	N/A	170	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

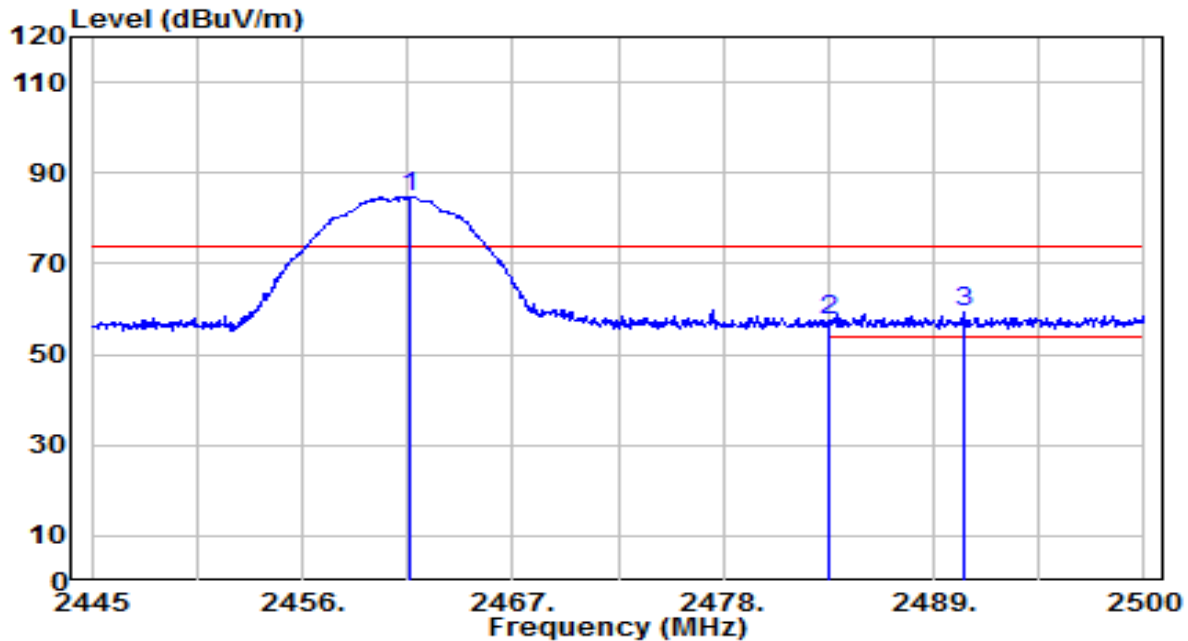


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.665	52.68	32.12	84.79	N/A	N/A	125	300	Peak
2	2483.500	25.49	32.20	57.69	-16.31	74.00	125	300	Peak
3	* 2490.650	26.94	32.23	59.16	-14.84	74.00	125	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

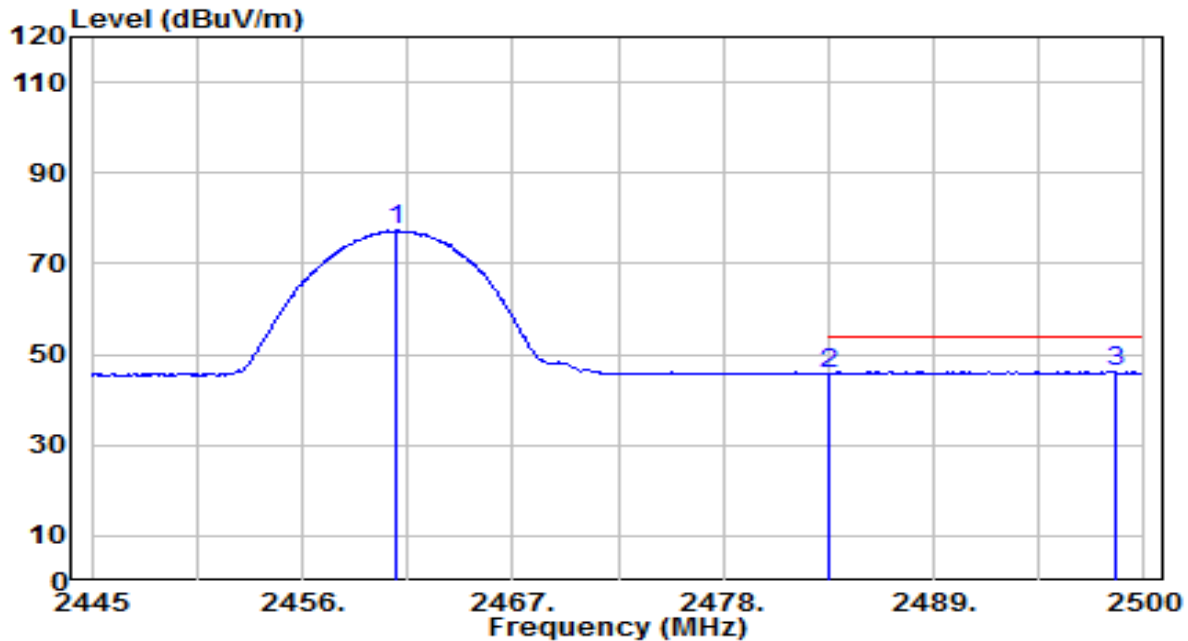


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.840	45.14	32.11	77.26	N/A	N/A	125	300	Average
2	2483.500	13.54	32.20	45.74	-8.26	54.00	125	300	Average
3	* 2498.460	13.98	32.25	46.24	-7.76	54.00	125	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

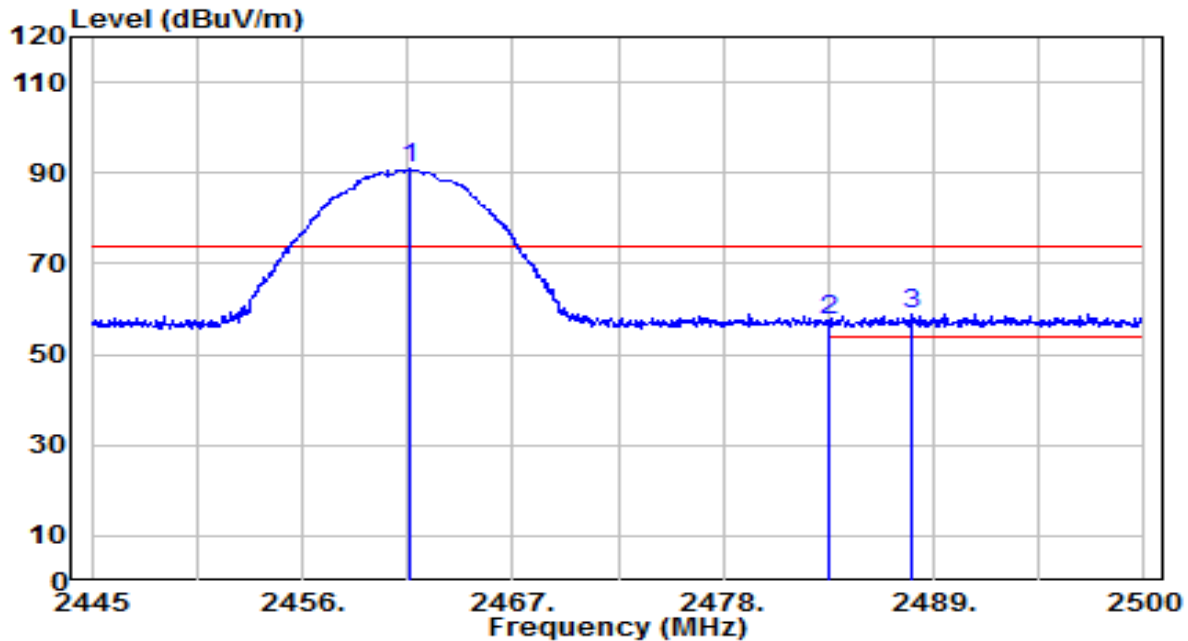


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.665	58.72	32.12	90.83	N/A	N/A	110	340	Peak
2	2483.500	25.33	32.20	57.53	-16.47	74.00	110	340	Peak
3	* 2487.845	26.86	32.21	59.08	-14.92	74.00	110	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

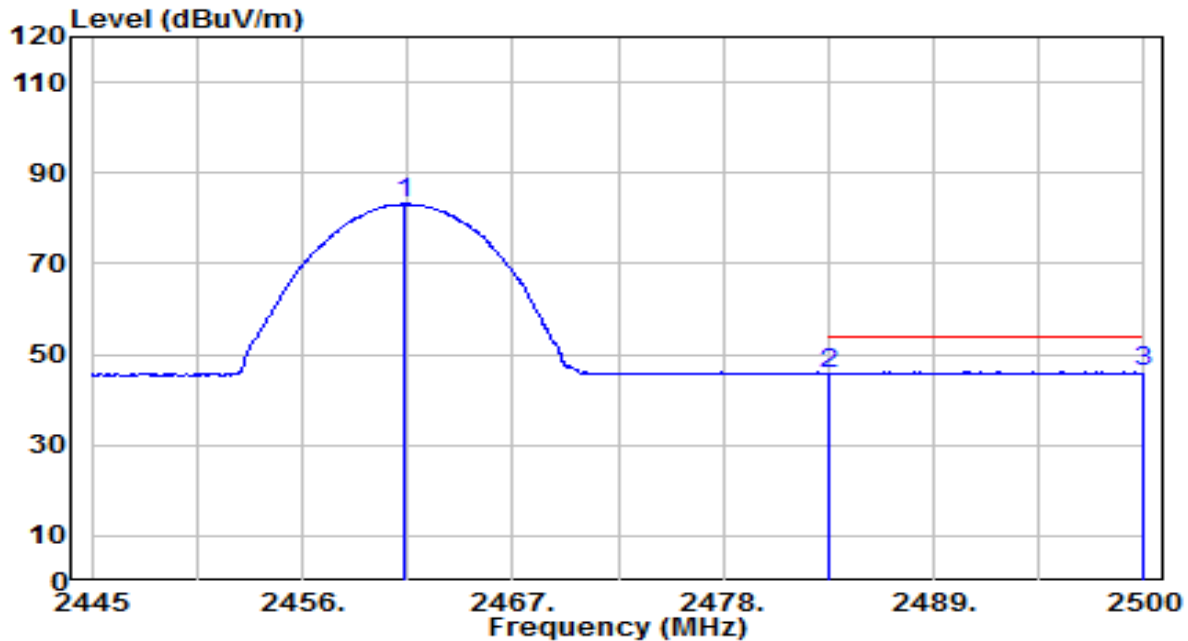


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.390	51.07	32.12	83.19	N/A	N/A	110	340	Average
2	2483.500	13.46	32.20	45.66	-8.34	54.00	110	340	Average
3	* 2500.000	13.97	32.26	46.23	-7.77	54.00	110	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

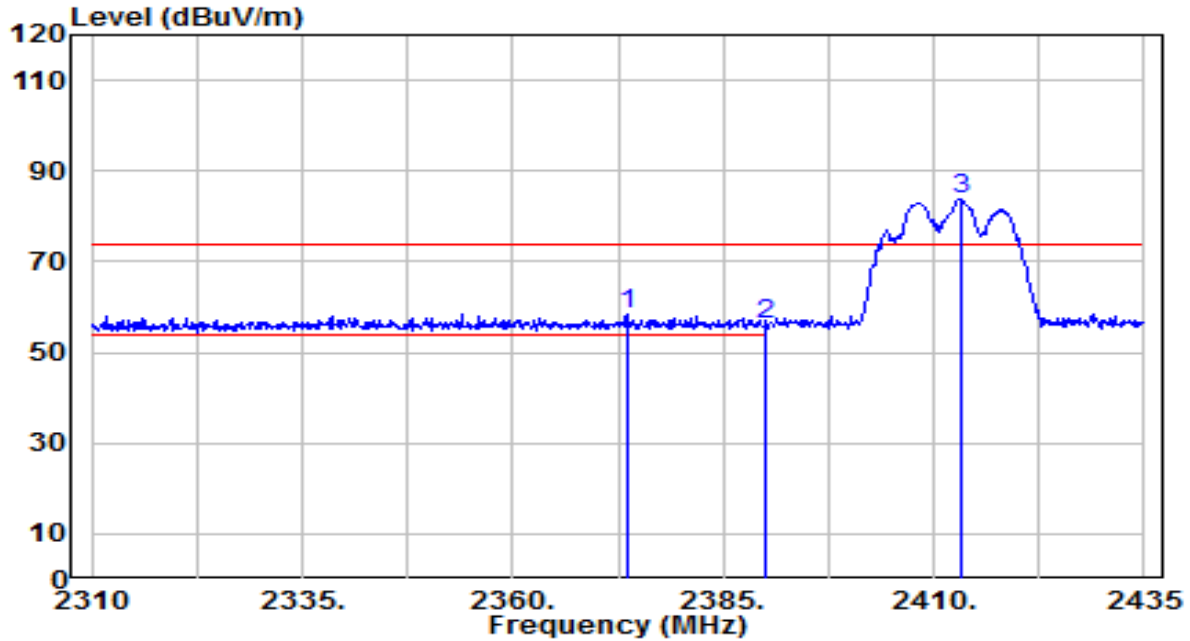


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2373.500	26.45	31.79	58.24	-15.76	74.00	160	295	Peak
2	2390.000	24.48	31.85	56.33	-17.67	74.00	160	295	Peak
3	2413.125	51.82	31.94	83.76	N/A	N/A	160	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

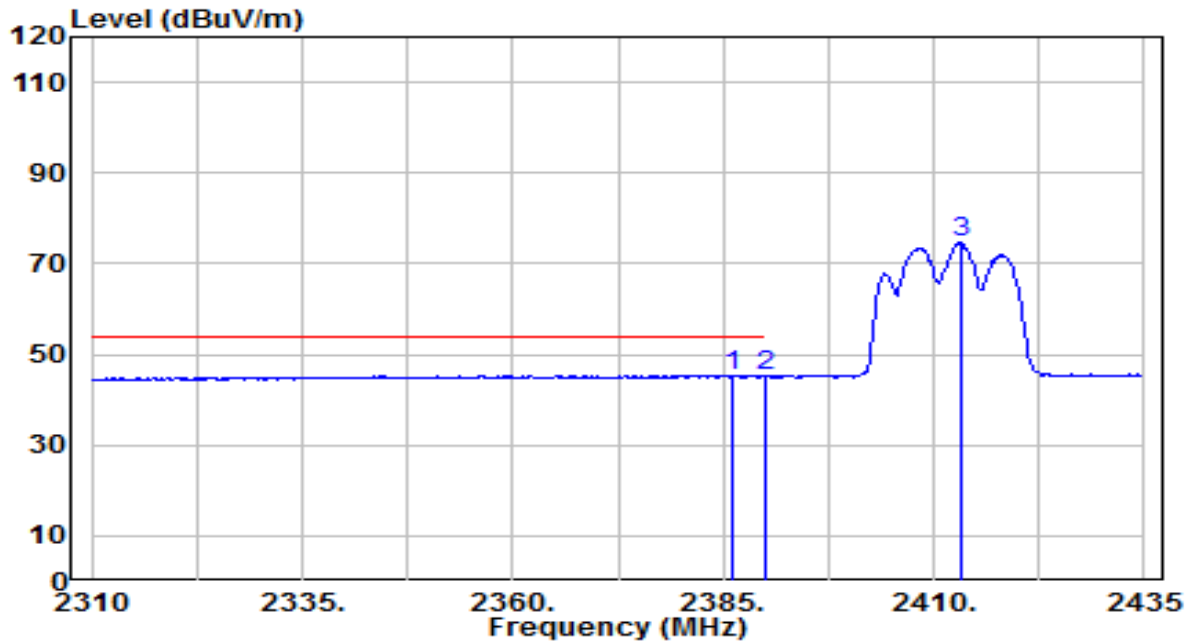


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.000	13.55	31.83	45.38	-8.62	54.00	160	295	Average
2		2390.000	13.26	31.85	45.11	-8.89	54.00	160	295	Average
3		2413.125	42.64	31.94	74.57	N/A	N/A	160	295	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

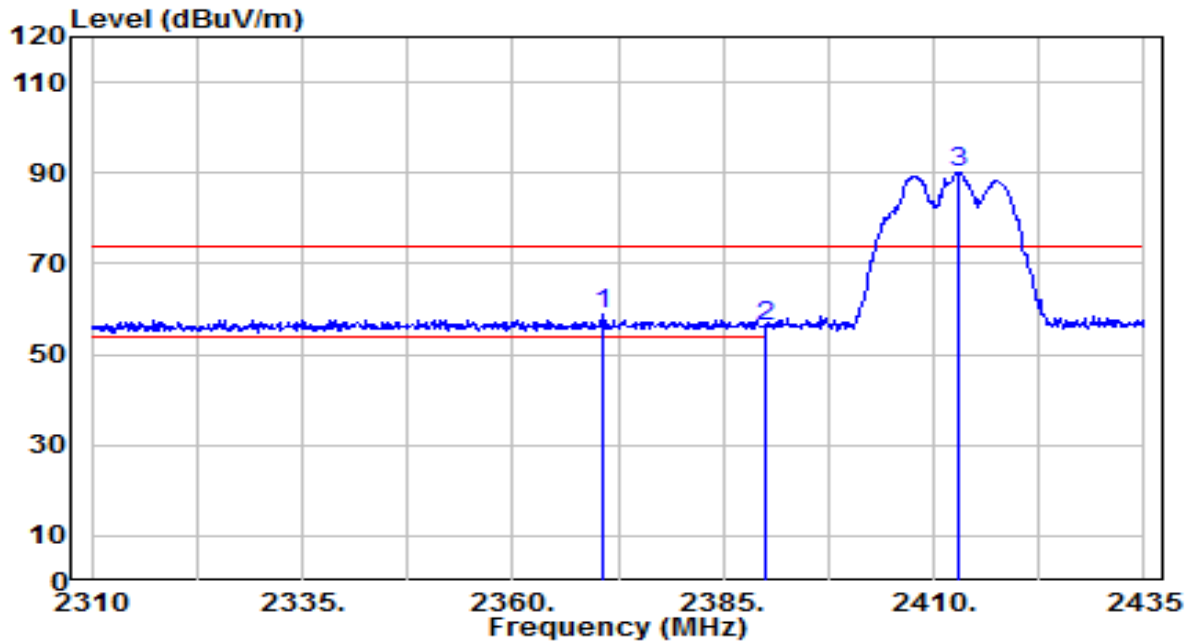


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2370.625	27.06	31.78	58.84	-15.16	74.00	150	335	Peak
2		2390.000	24.43	31.85	56.28	-17.72	74.00	150	335	Peak
3		2413.000	58.22	31.93	90.15	N/A	N/A	150	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

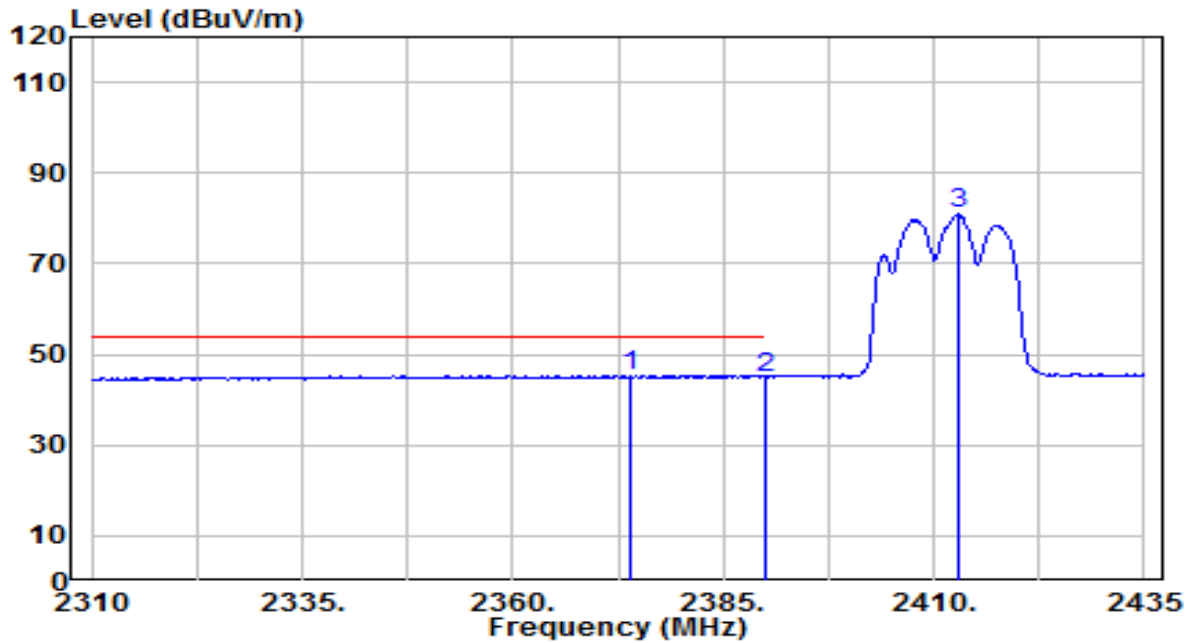


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2374.125	13.54	31.79	45.33	-8.67	54.00	150	335	Average
2		2390.000	13.19	31.85	45.04	-8.96	54.00	150	335	Average
3		2413.000	49.01	31.93	80.94	N/A	N/A	150	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

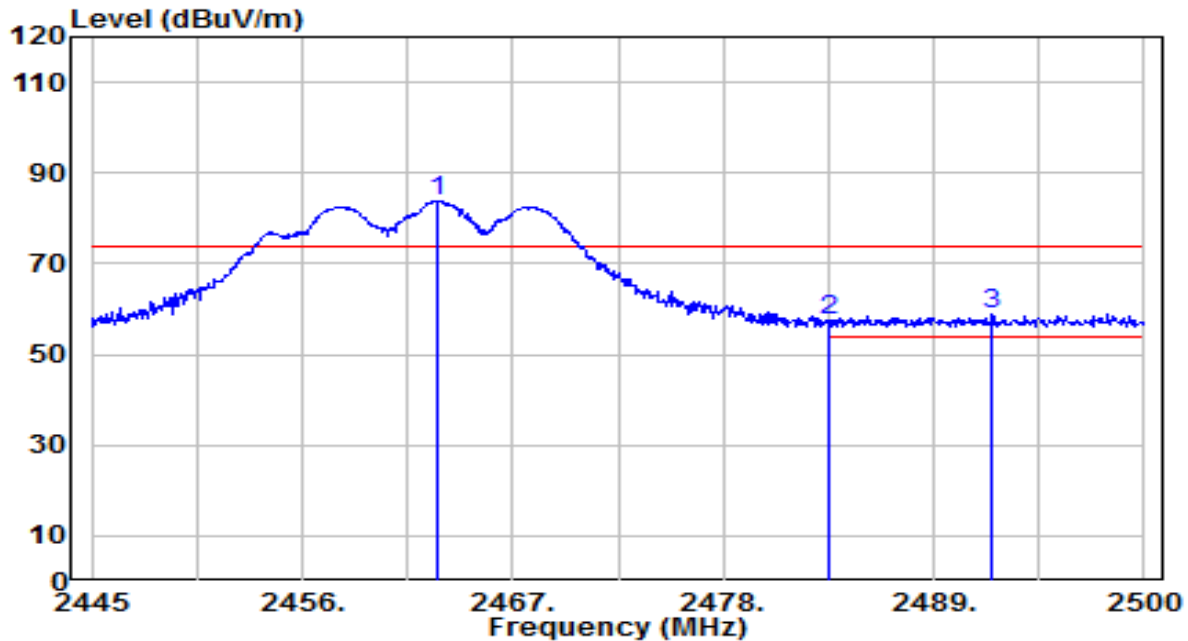


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	51.85	32.12	83.97	N/A	N/A	125	300	Peak
2	2483.500	25.25	32.20	57.45	-16.55	74.00	125	300	Peak
3	* 2492.080	26.54	32.23	58.77	-15.23	74.00	125	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

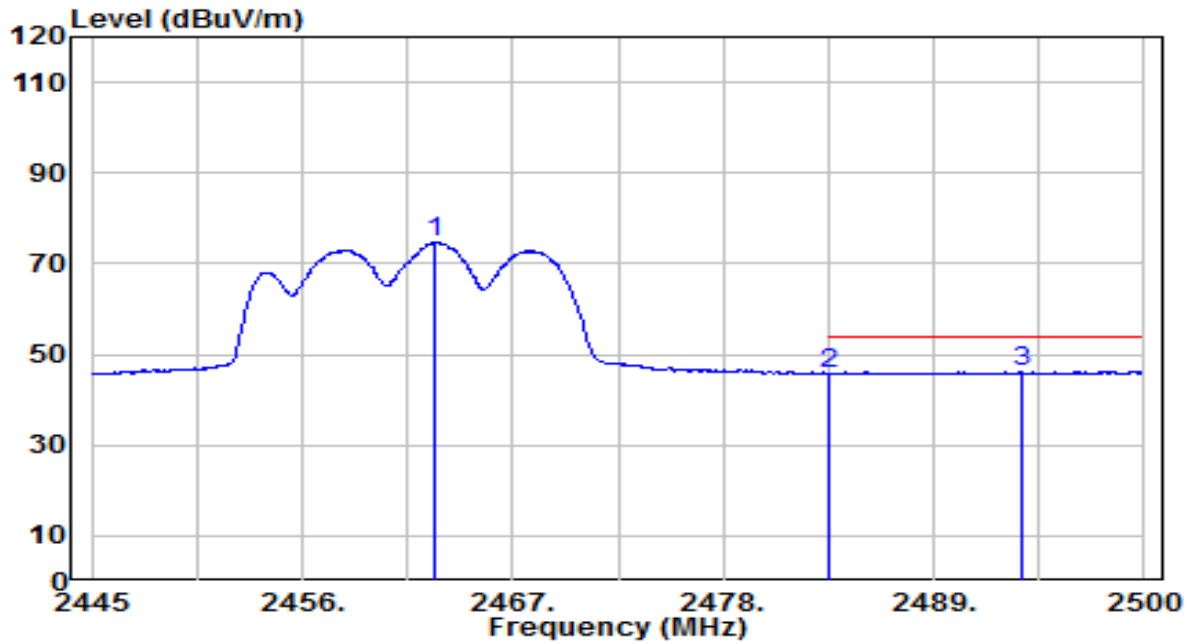


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.930	42.66	32.12	74.78	N/A	N/A	125	300	Average
2	2483.500	13.59	32.20	45.79	-8.21	54.00	125	300	Average
3	* 2493.565	13.89	32.24	46.13	-7.87	54.00	125	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

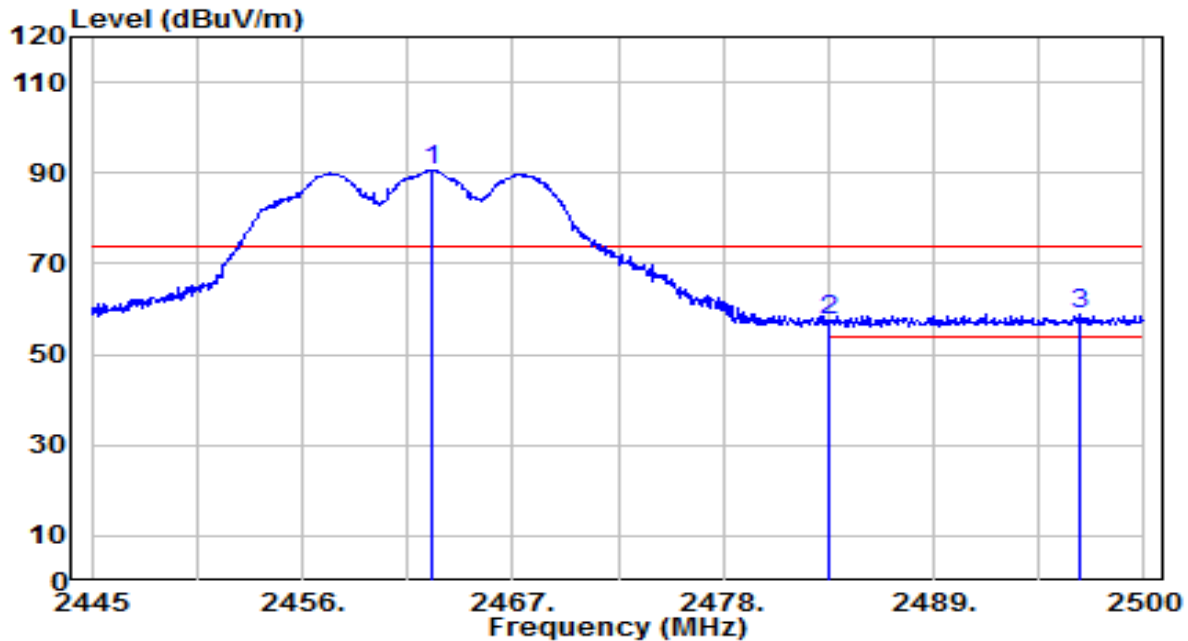


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.765	58.55	32.12	90.67	N/A	N/A	125	335	Peak
2	2483.500	25.25	32.20	57.45	-16.55	74.00	125	335	Peak
3	* 2496.590	26.46	32.25	58.71	-15.29	74.00	125	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

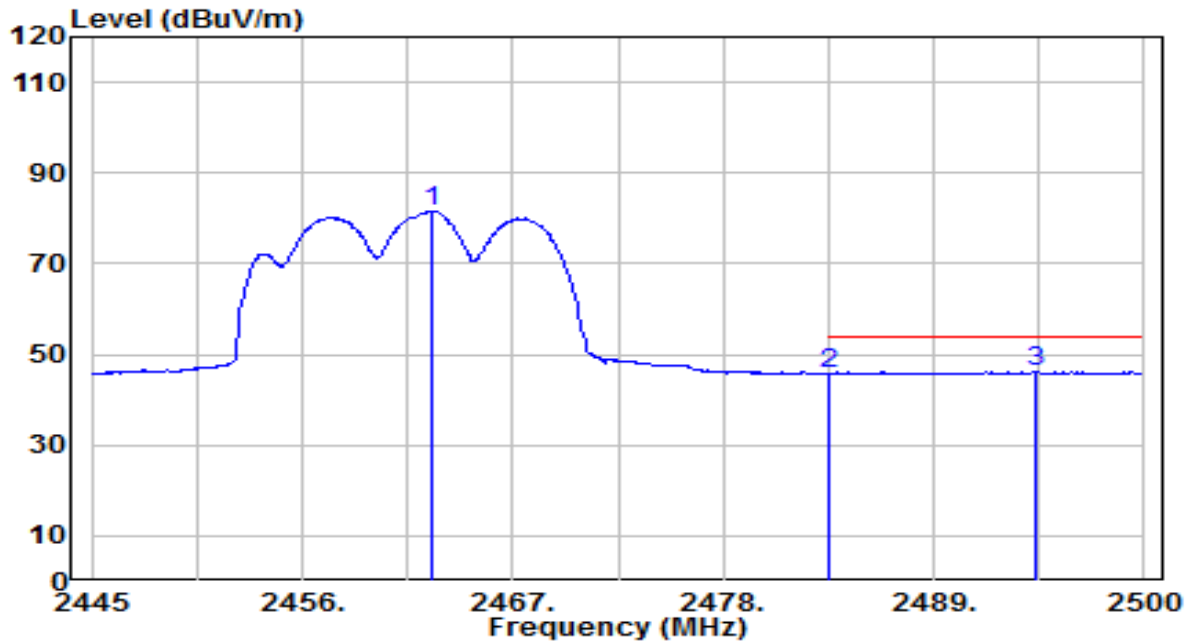


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.820	49.43	32.12	81.55	N/A	N/A	125	335	Average
2	2483.500	13.53	32.20	45.73	-8.27	54.00	125	335	Average
3	* 2494.280	13.86	32.24	46.10	-7.90	54.00	125	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

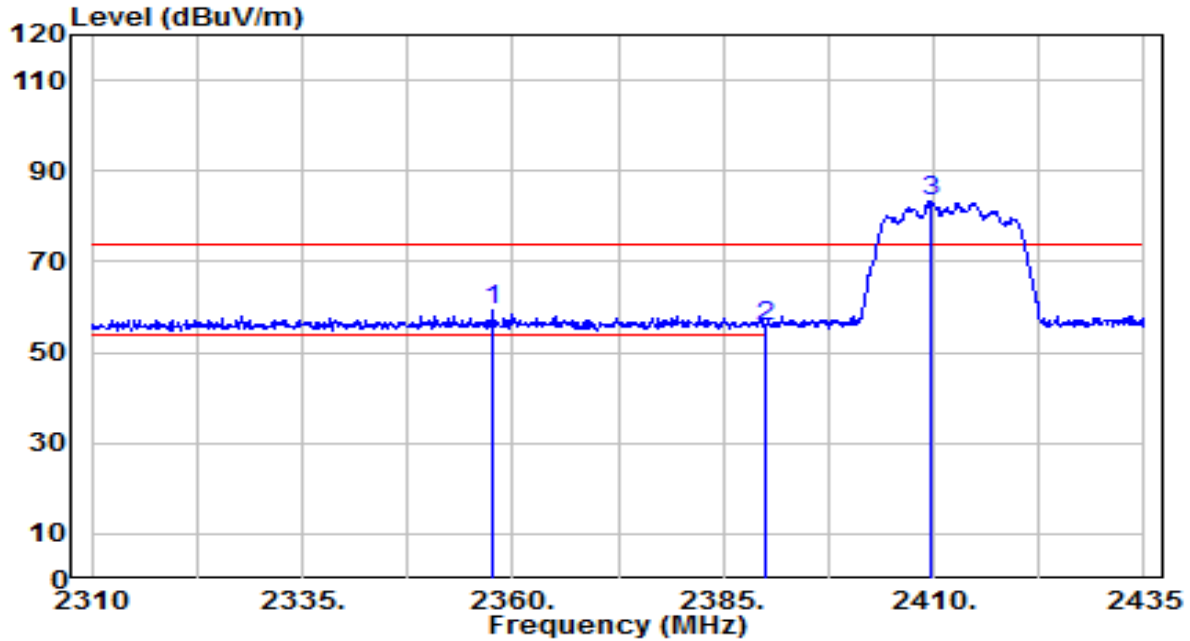


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2357.750	27.52	31.73	59.25	-14.75	74.00	180	60	Peak
2		2390.000	23.69	31.85	55.53	-18.47	74.00	180	60	Peak
3		2409.625	51.22	31.92	83.14	N/A	N/A	180	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

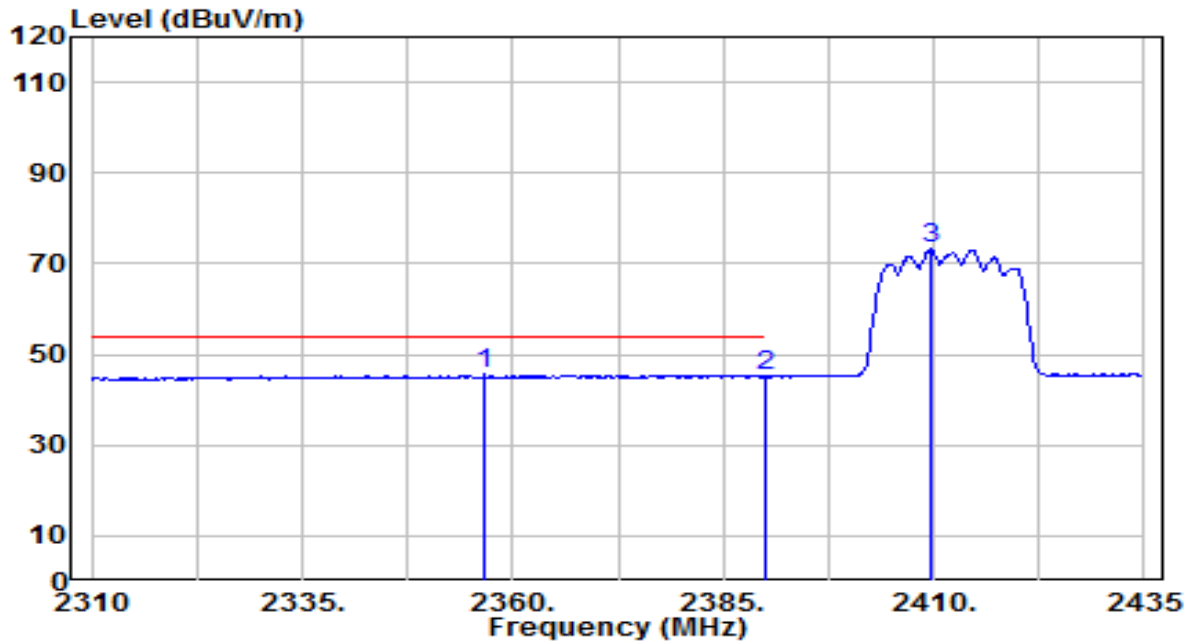


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2356.625	13.93	31.72	45.65	-8.35	54.00	180	60	Average
2		2390.000	13.24	31.85	45.09	-8.91	54.00	180	60	Average
3		2409.625	41.28	31.92	73.20	N/A	N/A	180	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

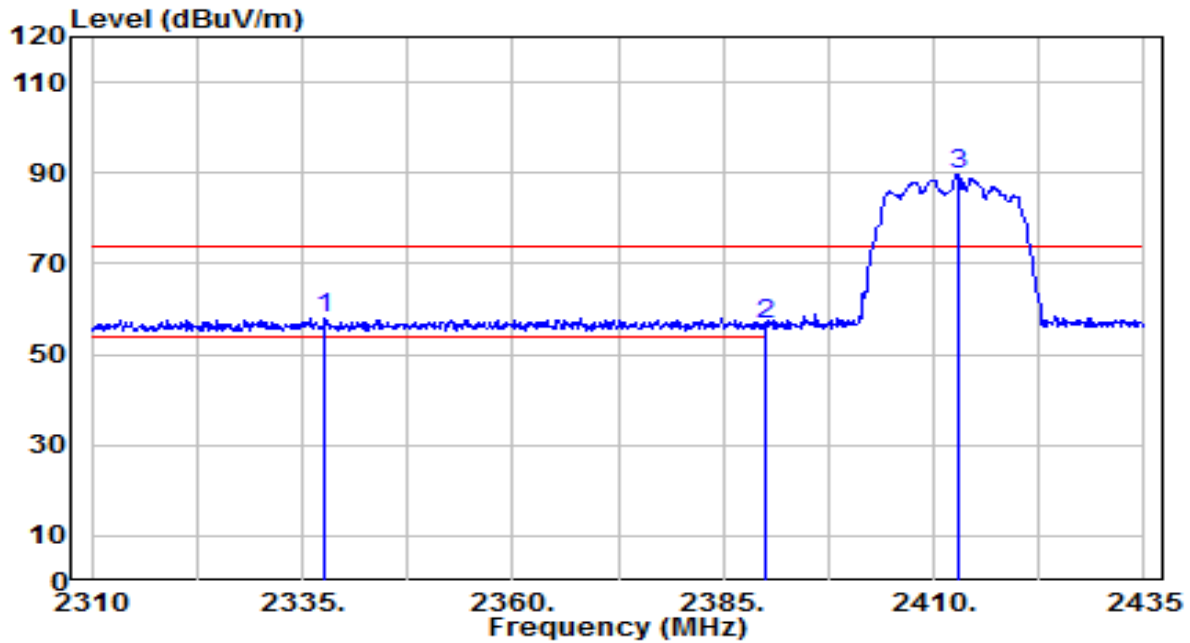


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2337.750	26.27	31.65	57.93	-16.07	74.00	145	340	Peak
2		2390.000	24.60	31.85	56.45	-17.55	74.00	145	340	Peak
3		2412.875	57.76	31.93	89.70	N/A	N/A	145	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

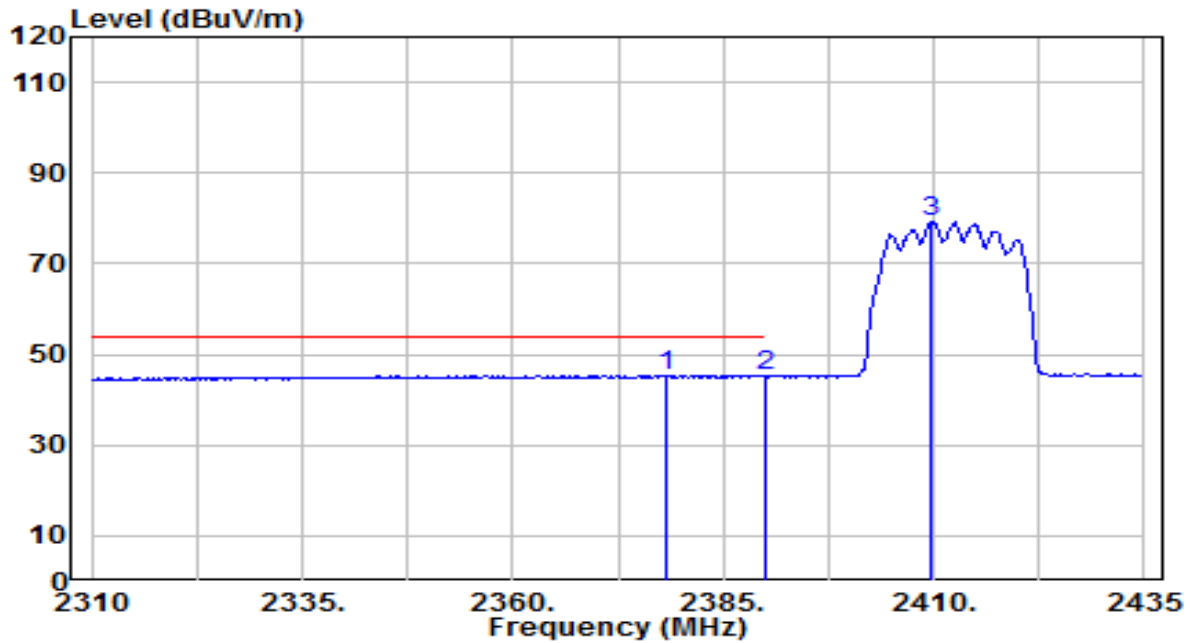


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.250	13.63	31.80	45.43	-8.57	54.00	145	340	Average
2		2390.000	13.44	31.85	45.29	-8.71	54.00	145	340	Average
3		2409.750	47.29	31.92	79.21	N/A	N/A	145	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

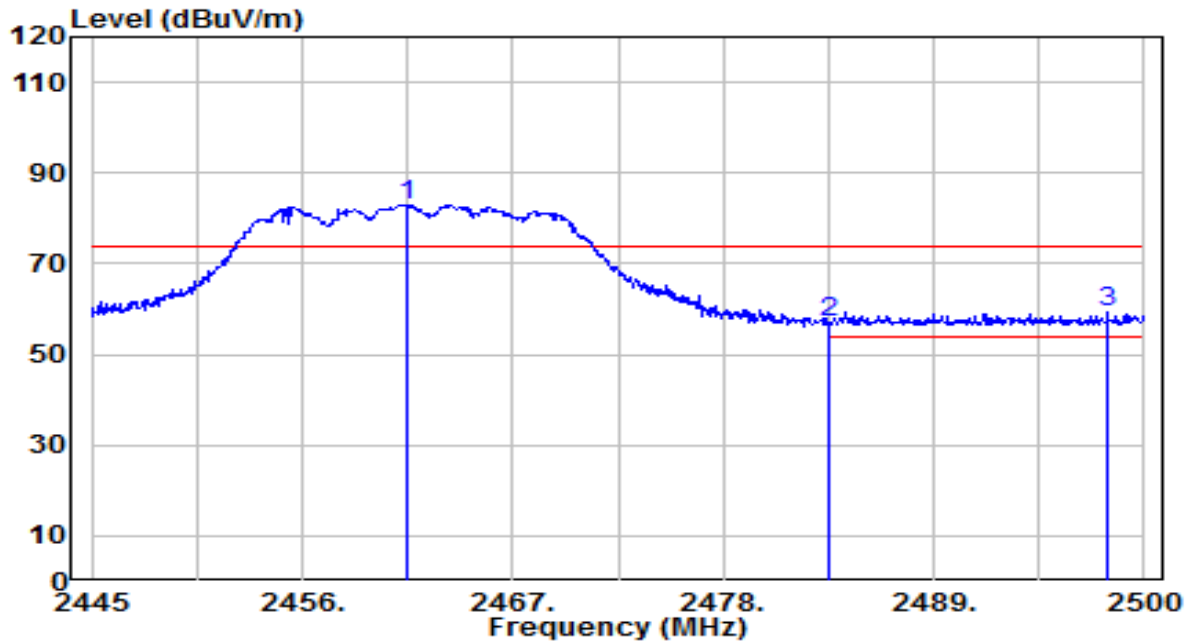


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.500	50.78	32.12	82.90	N/A	N/A	115	300	Peak
2	2483.500	24.65	32.20	56.85	-17.15	74.00	115	300	Peak
3	* 2498.075	26.91	32.25	59.16	-14.84	74.00	115	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

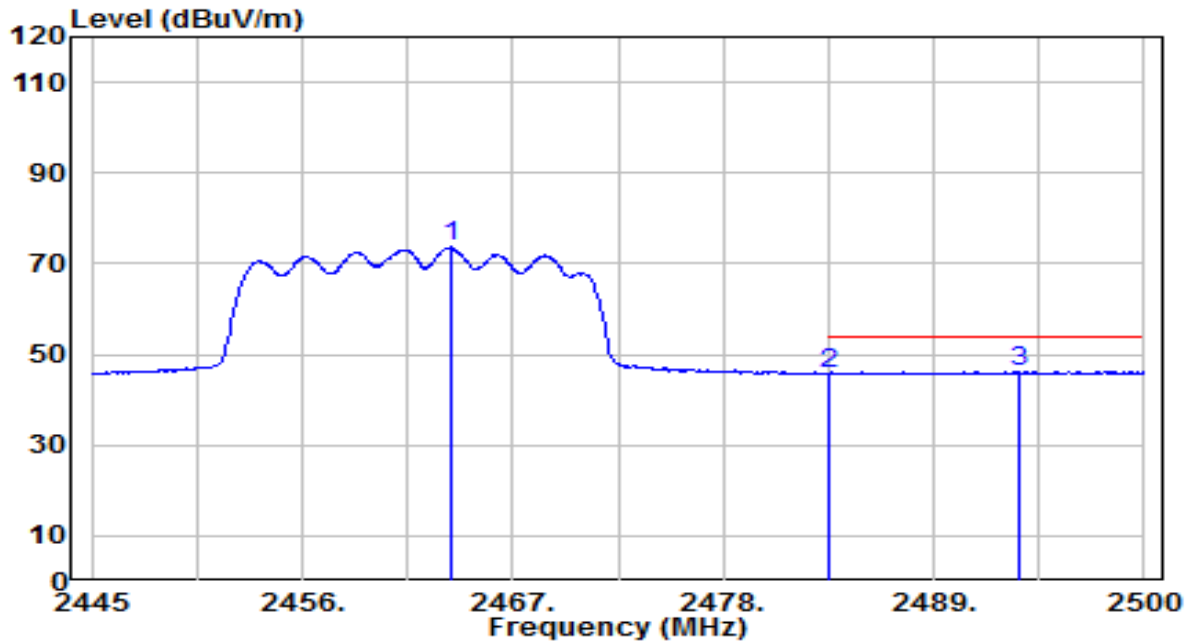


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.755	41.54	32.12	73.66	N/A	N/A	115	300	Average
2	2483.500	13.45	32.20	45.65	-8.35	54.00	115	300	Average
3	* 2493.455	13.95	32.24	46.19	-7.81	54.00	115	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

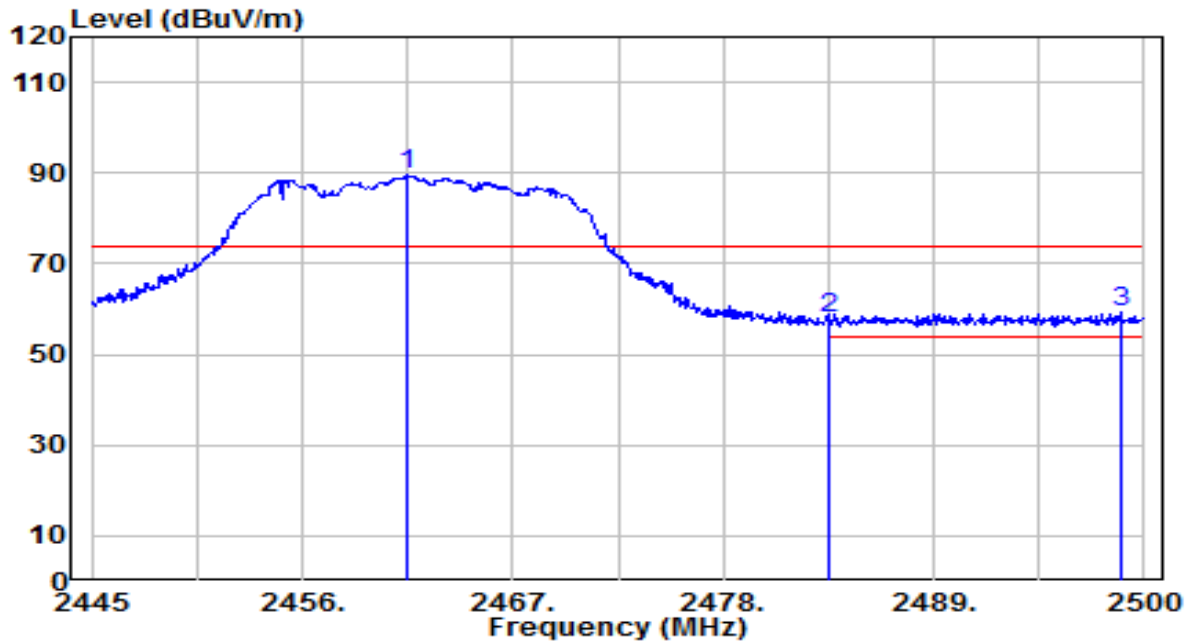


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.445	57.32	32.12	89.44	N/A	N/A	125	340	Peak
2	2483.500	25.66	32.20	57.86	-16.14	74.00	125	340	Peak
3	* 2498.735	26.90	32.26	59.16	-14.84	74.00	125	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

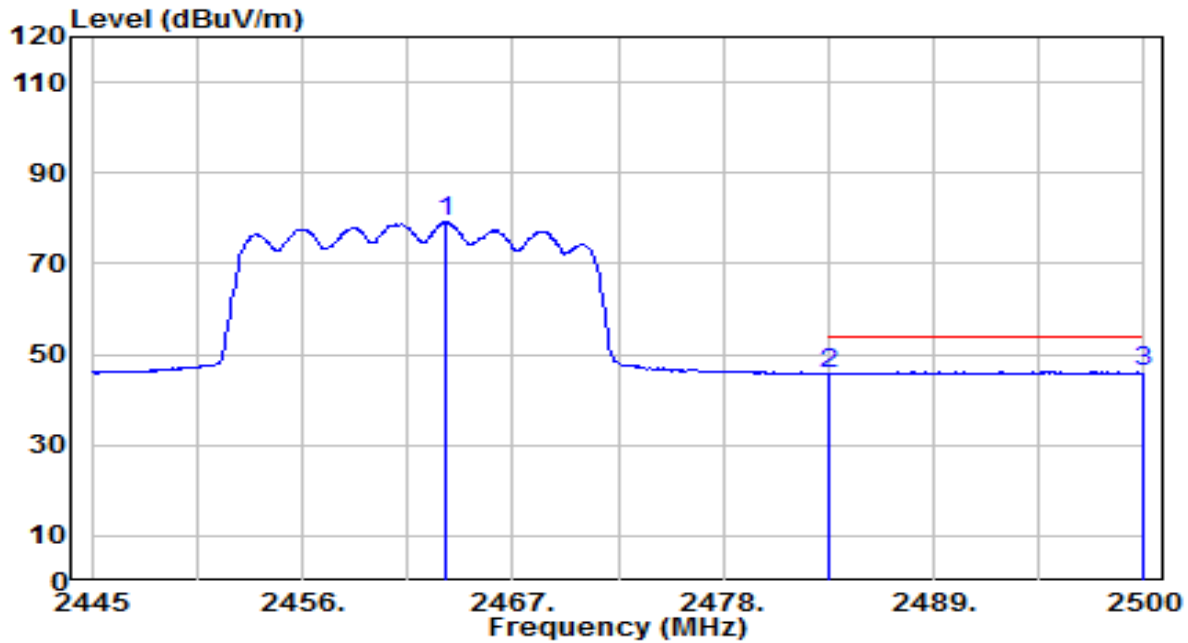


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.480	47.18	32.12	79.30	N/A	N/A	125	340	Average
2	2483.500	13.43	32.20	45.63	-8.37	54.00	125	340	Average
3	* 2500.000	13.99	32.26	46.25	-7.75	54.00	125	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

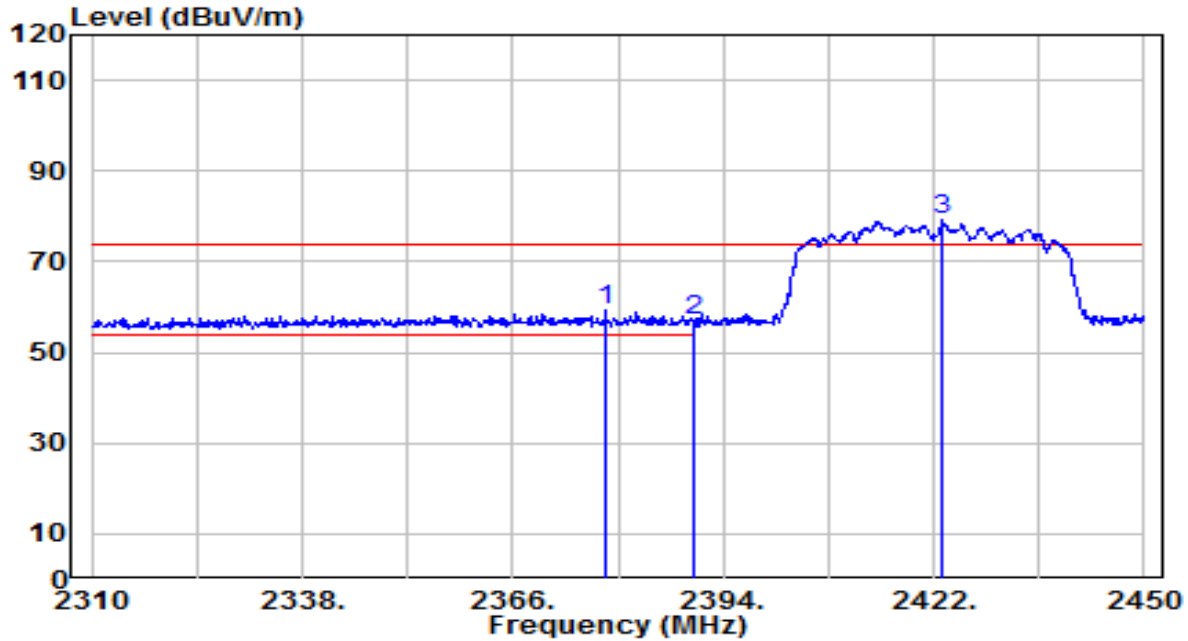


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.320	27.67	31.80	59.47	-14.53	74.00	180	60	Peak
2		2390.000	25.34	31.85	57.19	-16.81	74.00	180	60	Peak
3		2423.120	47.07	31.97	79.04	N/A	N/A	180	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

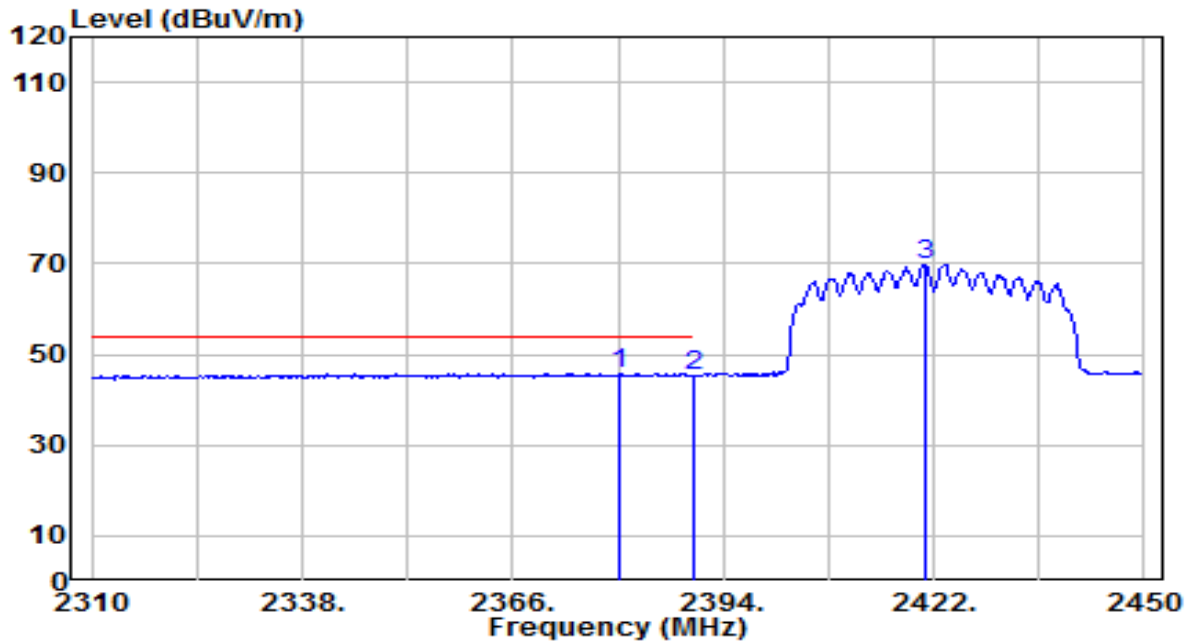


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.280	14.00	31.81	45.82	-8.18	54.00	180	60	Average
2		2390.000	13.42	31.85	45.27	-8.73	54.00	180	60	Average
3		2420.880	37.93	31.96	69.89	N/A	N/A	180	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

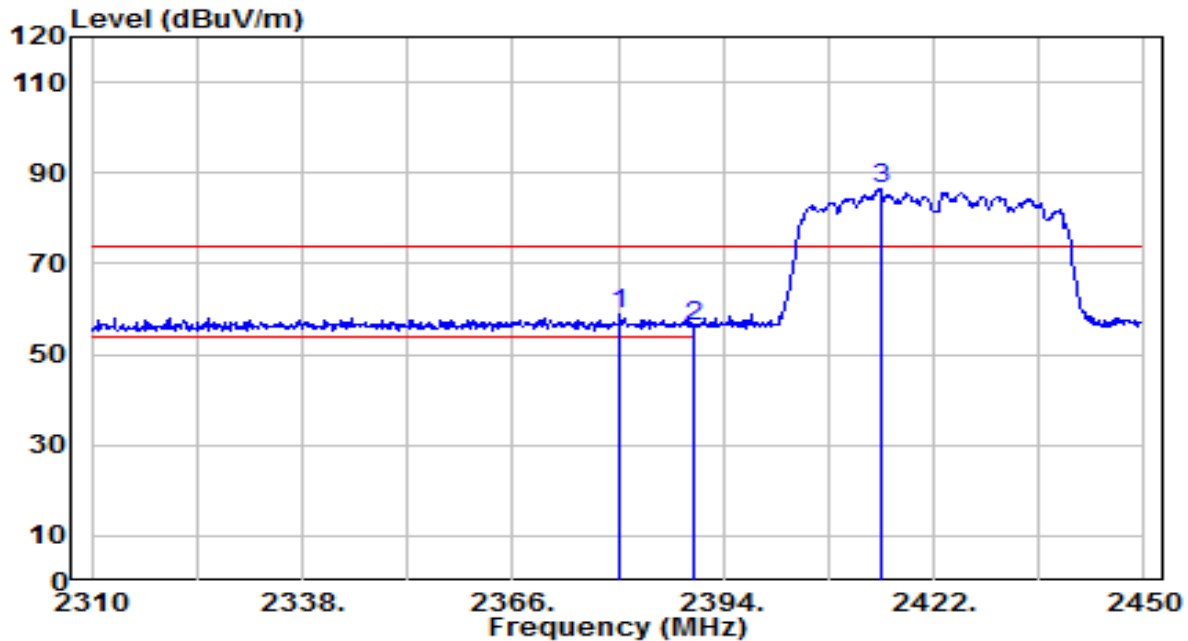


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.280	26.94	31.81	58.76	-15.24	74.00	145	340	Peak
2		2390.000	24.34	31.85	56.19	-17.81	74.00	145	340	Peak
3		2414.860	54.45	31.94	86.39	N/A	N/A	145	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

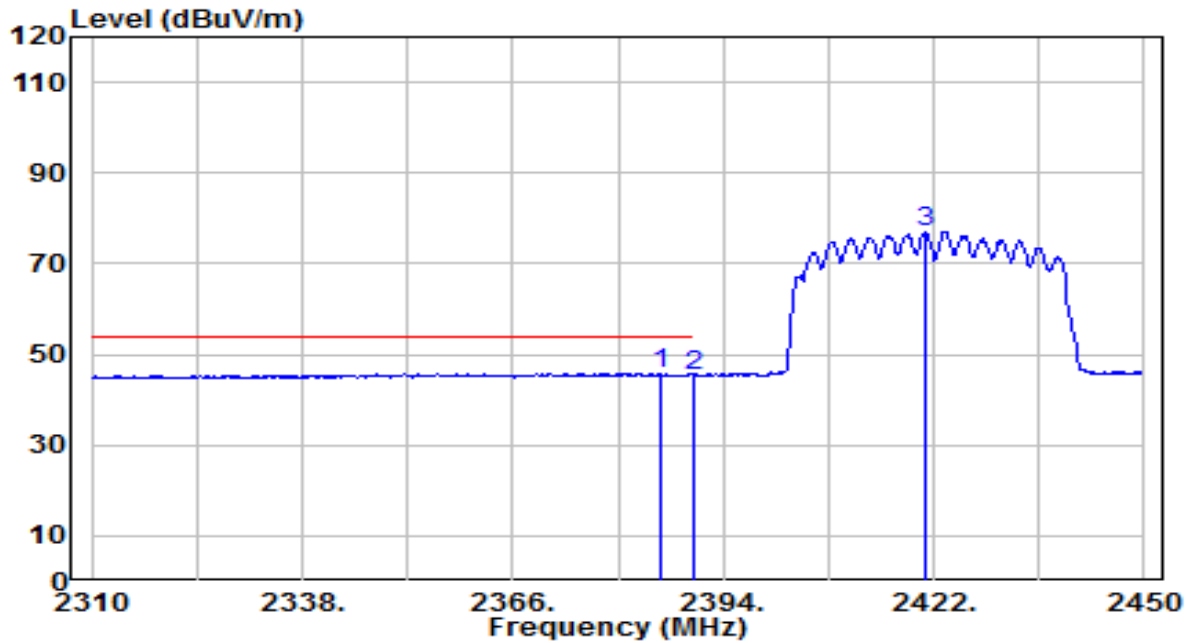


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.600	14.01	31.83	45.85	-8.15	54.00	145	340	Average
2		2390.000	13.64	31.85	45.49	-8.51	54.00	145	340	Average
3		2420.880	45.07	31.96	77.03	N/A	N/A	145	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

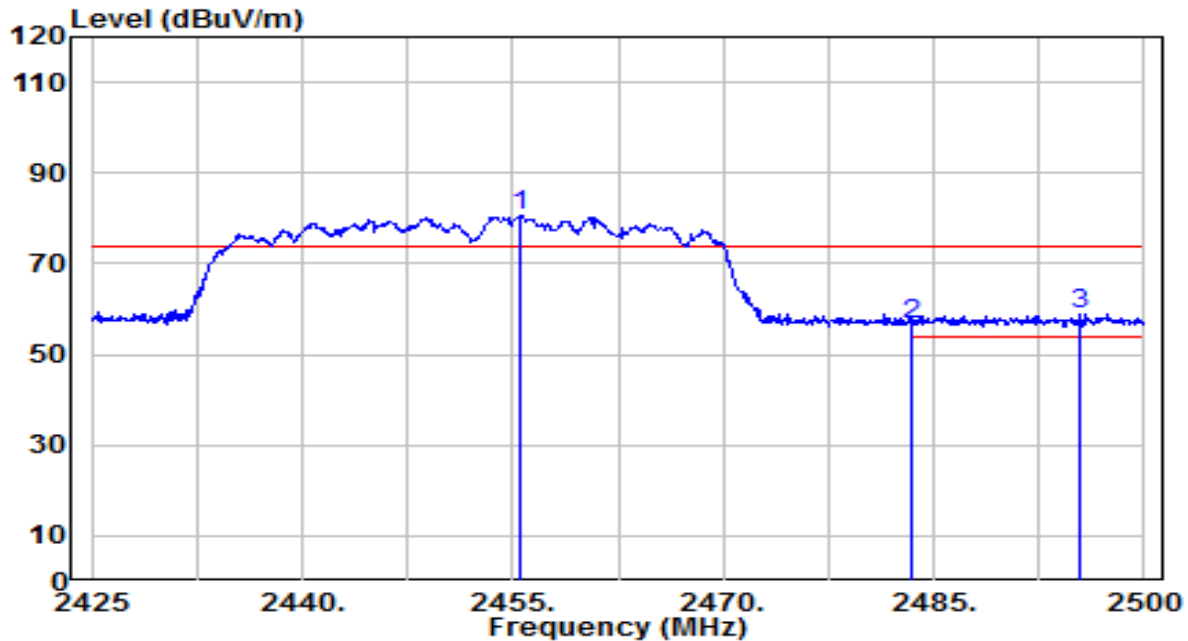


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.600	48.67	32.09	80.77	N/A	N/A	115	300	Peak
2	2483.500	24.61	32.20	56.81	-17.19	74.00	115	300	Peak
3	* 2495.425	26.68	32.24	58.92	-15.08	74.00	115	300	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

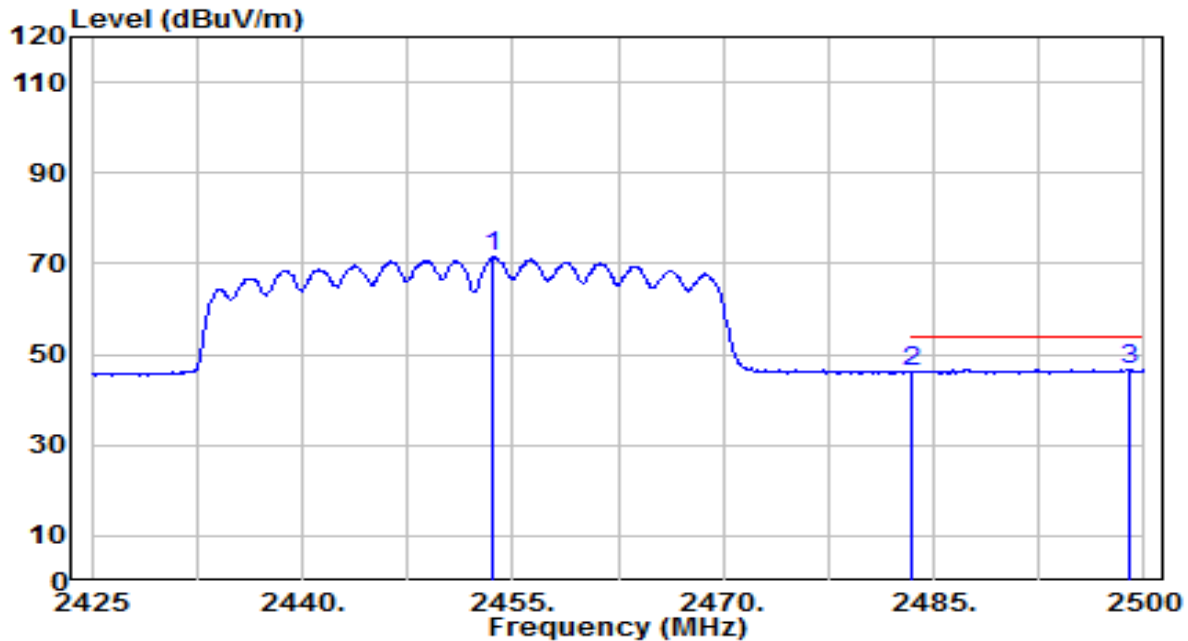


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.575	39.33	32.09	71.41	N/A	N/A	115	300	Average
2	2483.500	14.01	32.20	46.21	-7.79	54.00	115	300	Average
3	* 2498.875	14.42	32.26	46.67	-7.33	54.00	115	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

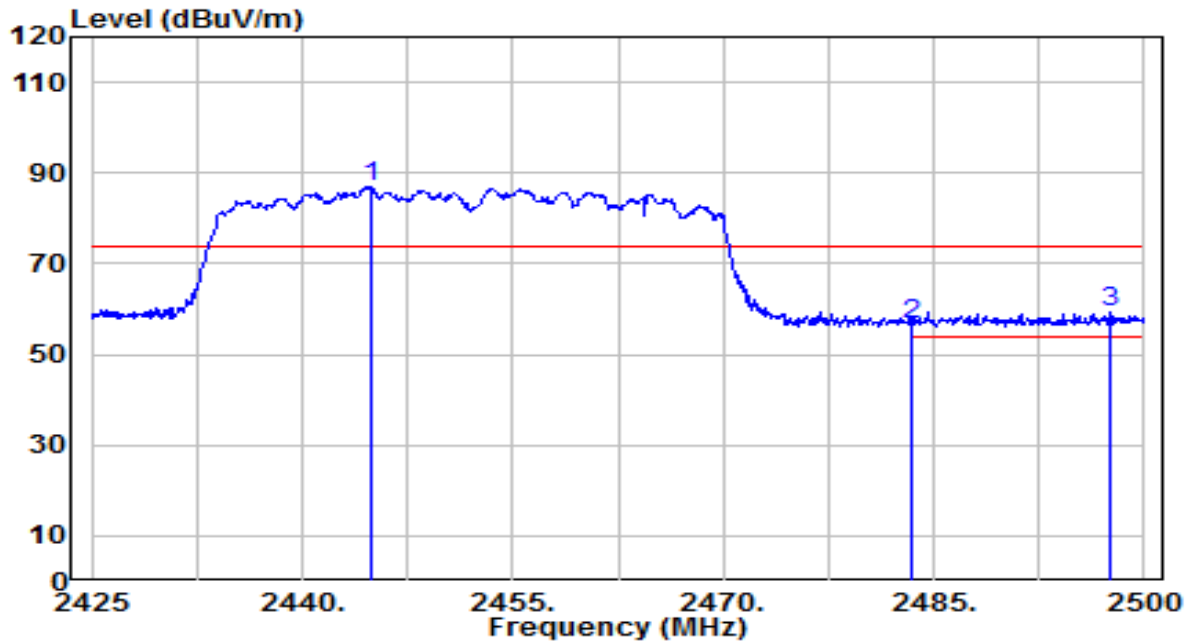


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2444.875	54.82	32.05	86.88	N/A	N/A	125	340	Peak
2	2483.500	24.54	32.20	56.74	-17.26	74.00	125	340	Peak
3	* 2497.600	27.02	32.25	59.27	-14.73	74.00	125	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

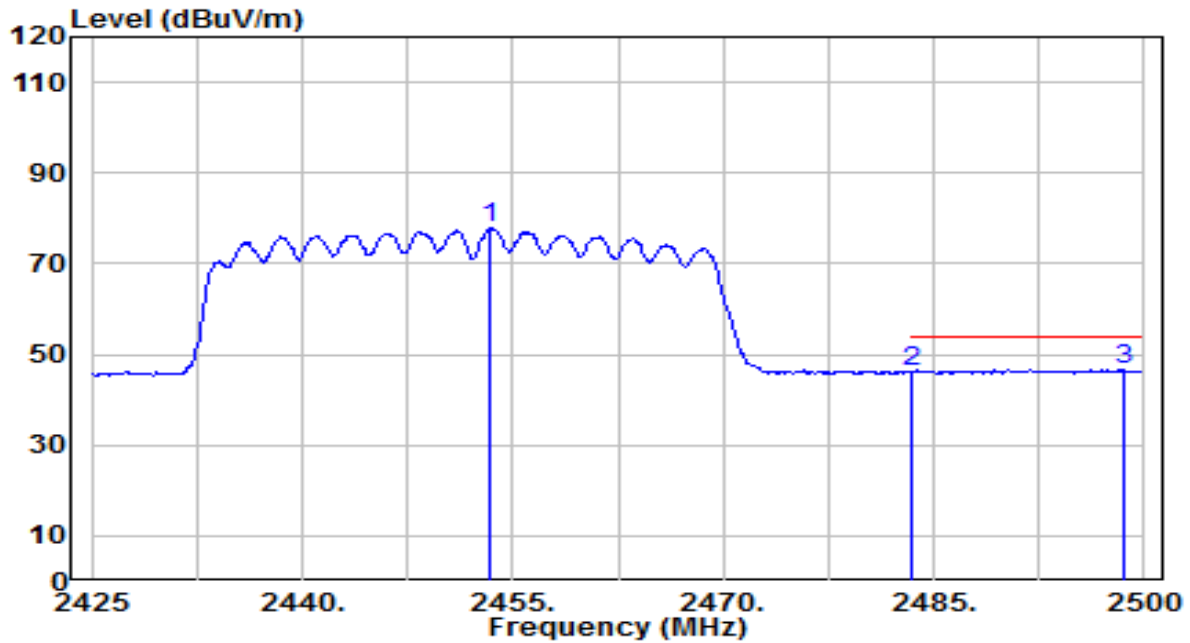


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.425	45.79	32.09	77.87	N/A	N/A	125	340	Average
2	2483.500	13.81	32.20	46.00	-8.00	54.00	125	340	Average
3	* 2498.575	14.40	32.25	46.65	-7.35	54.00	125	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

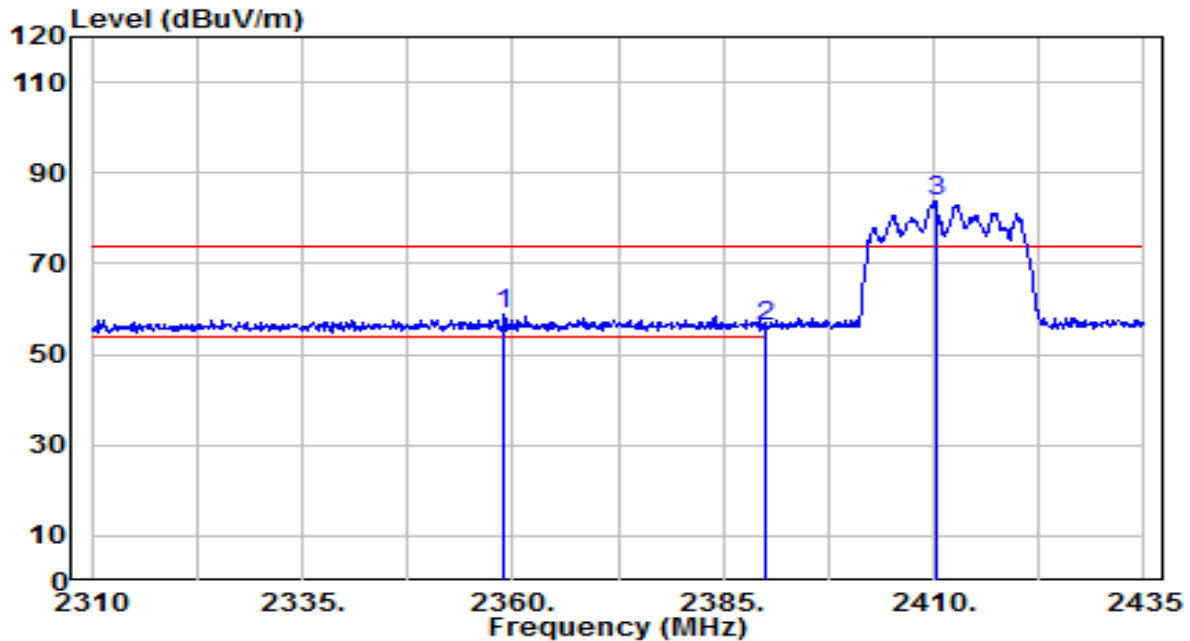


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2358.875	26.96	31.73	58.70	-15.30	74.00	155	290	Peak
2	2390.000	24.26	31.85	56.11	-17.89	74.00	155	290	Peak
3	2410.250	51.93	31.92	83.86	N/A	N/A	155	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

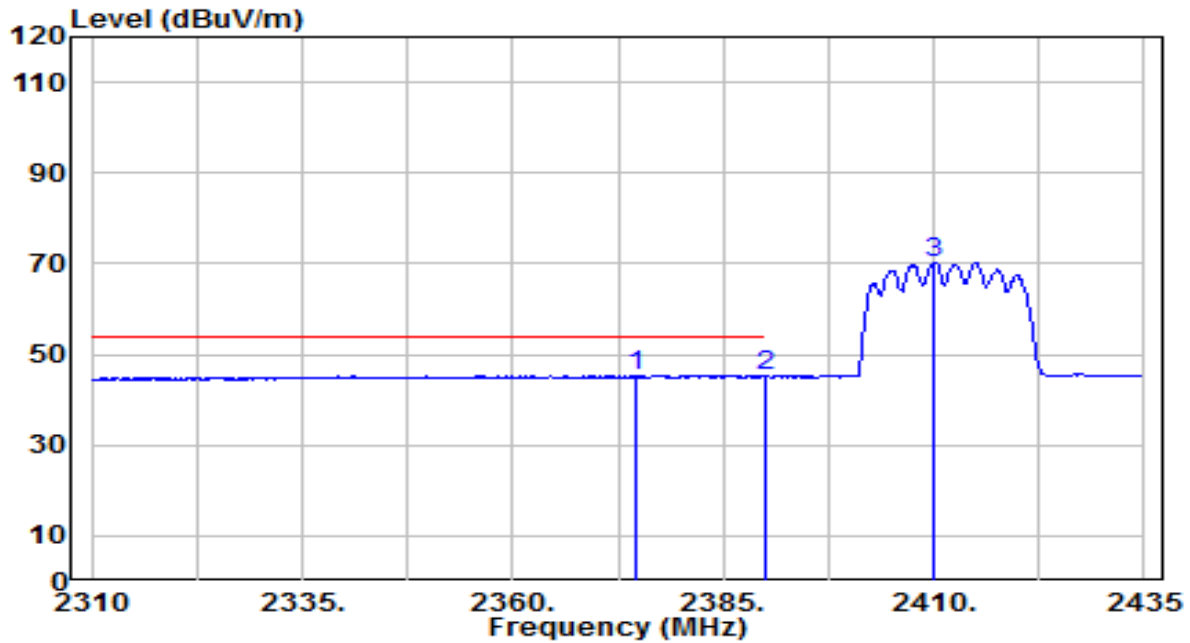


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2374.750	13.56	31.79	45.35	-8.65	54.00	155	290	Average
2	2390.000	13.41	31.85	45.26	-8.74	54.00	155	290	Average
3	2410.125	38.48	31.92	70.41	N/A	N/A	155	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

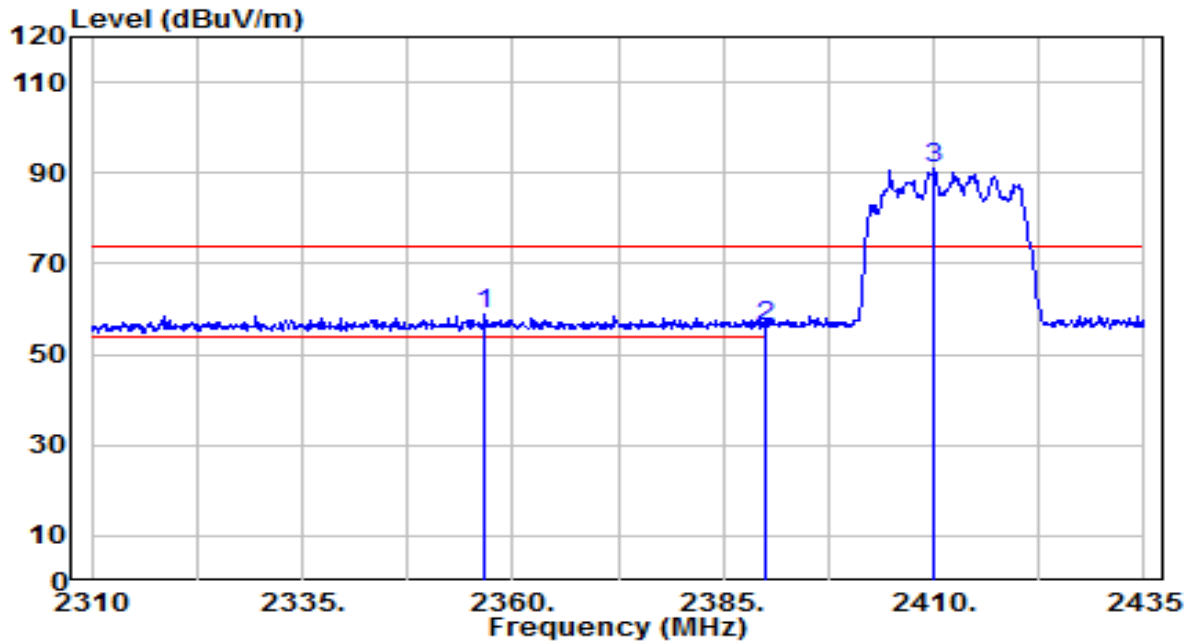


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2356.750	27.27	31.72	58.99	-15.01	74.00	130	340	Peak
2		2390.000	24.22	31.85	56.07	-17.93	74.00	130	340	Peak
3		2410.125	58.92	31.92	90.84	N/A	N/A	130	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

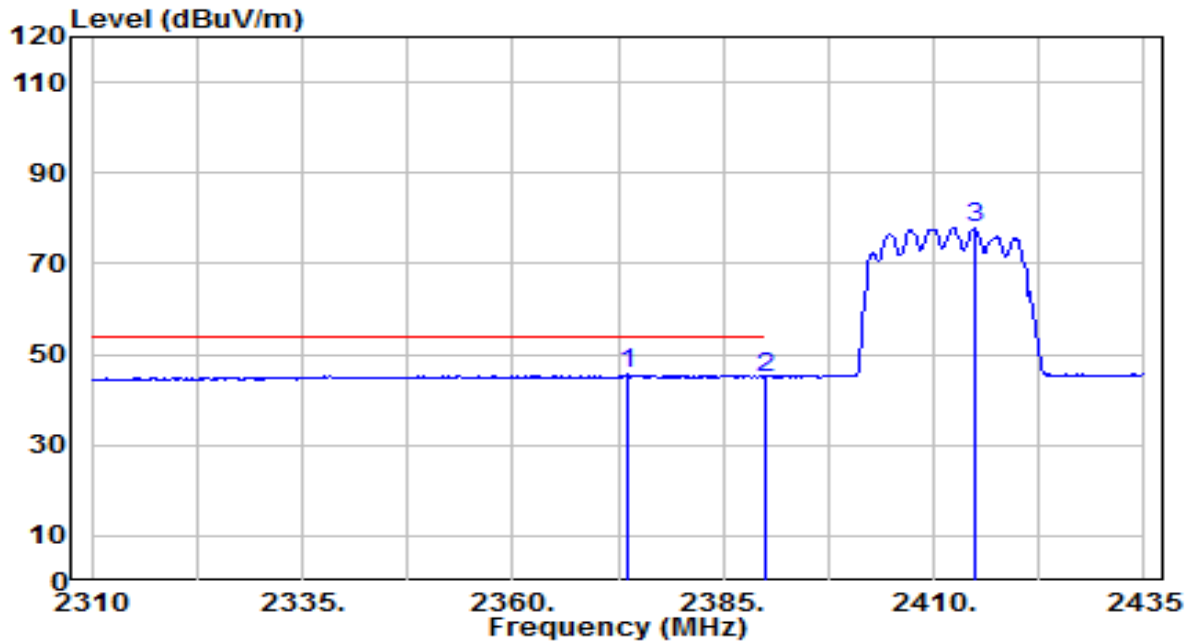


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2373.625	13.74	31.79	45.53	-8.47	54.00	130	340	Average
2	2390.000	13.14	31.85	44.99	-9.01	54.00	130	340	Average
3	2414.875	46.10	31.94	78.04	N/A	N/A	130	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

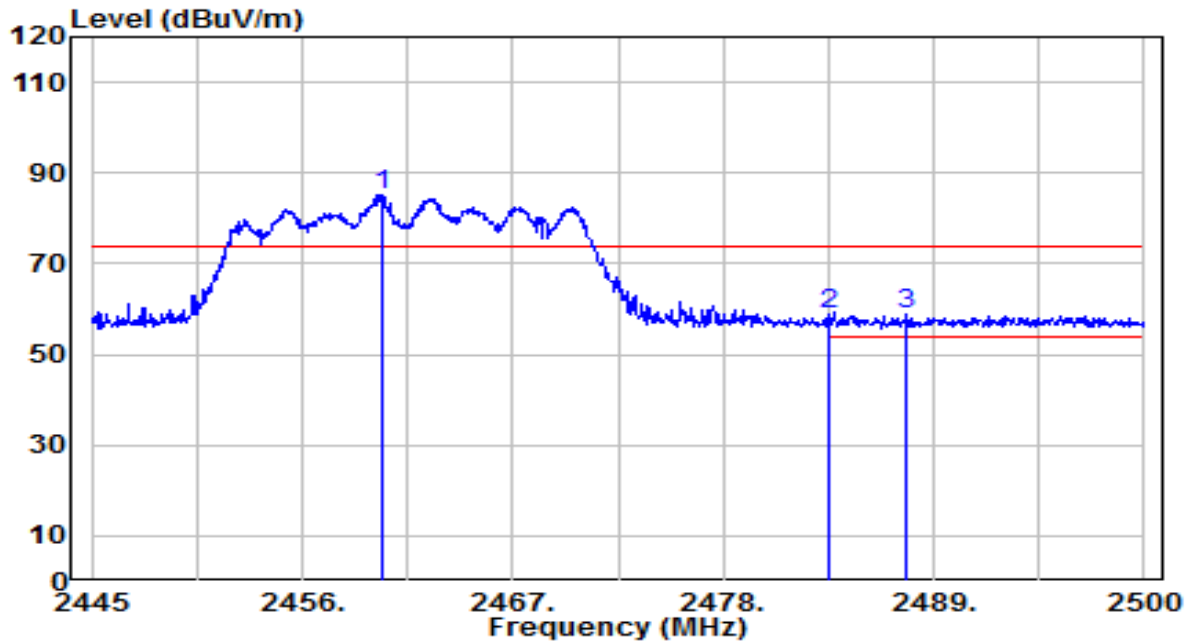


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.180	52.99	32.11	85.10	N/A	N/A	130	300	Peak
2	2483.500	26.64	32.20	58.84	-15.16	74.00	130	300	Peak
3	* 2487.625	26.78	32.21	58.99	-15.01	74.00	130	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

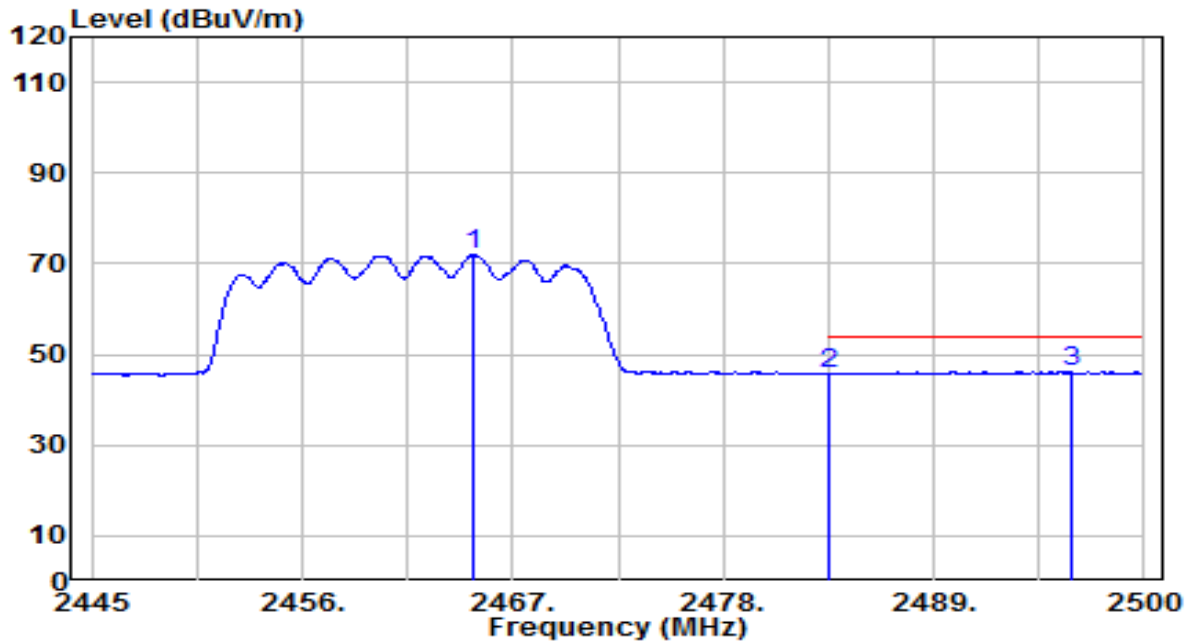


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.965	39.77	32.13	71.90	N/A	N/A	130	300	Average
2	2483.500	13.69	32.20	45.89	-8.11	54.00	130	300	Average
3	* 2496.260	13.93	32.25	46.18	-7.82	54.00	130	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

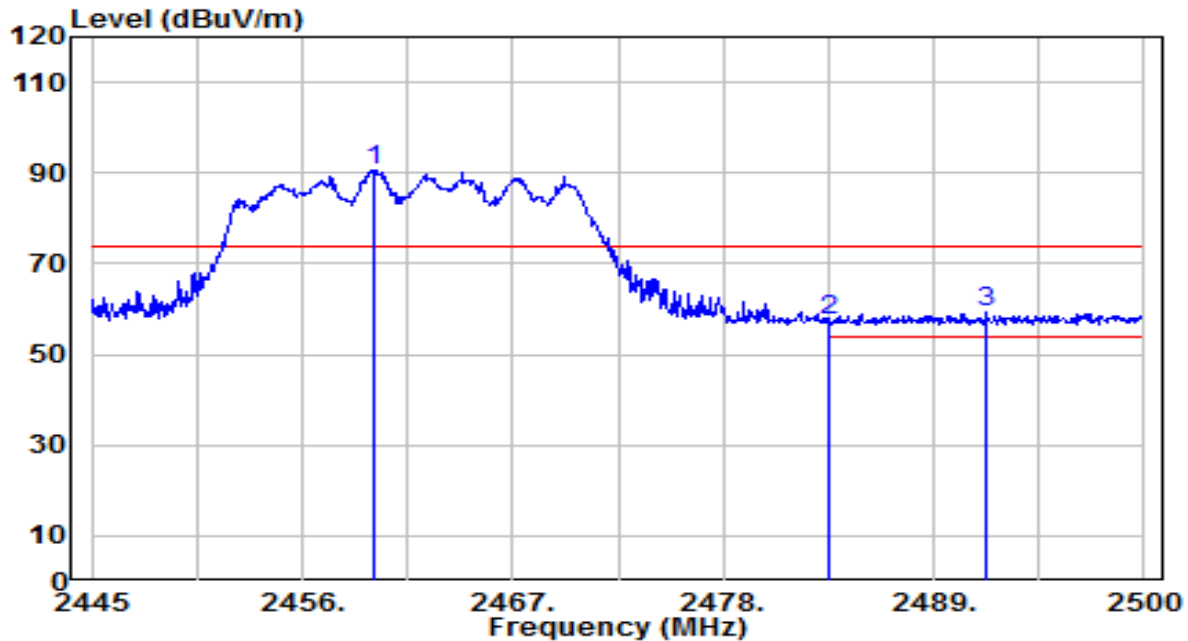


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.795	58.65	32.11	90.76	N/A	N/A	145	345	Peak
2	2483.500	25.21	32.20	57.41	-16.59	74.00	145	345	Peak
3	* 2491.750	26.89	32.23	59.12	-14.88	74.00	145	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

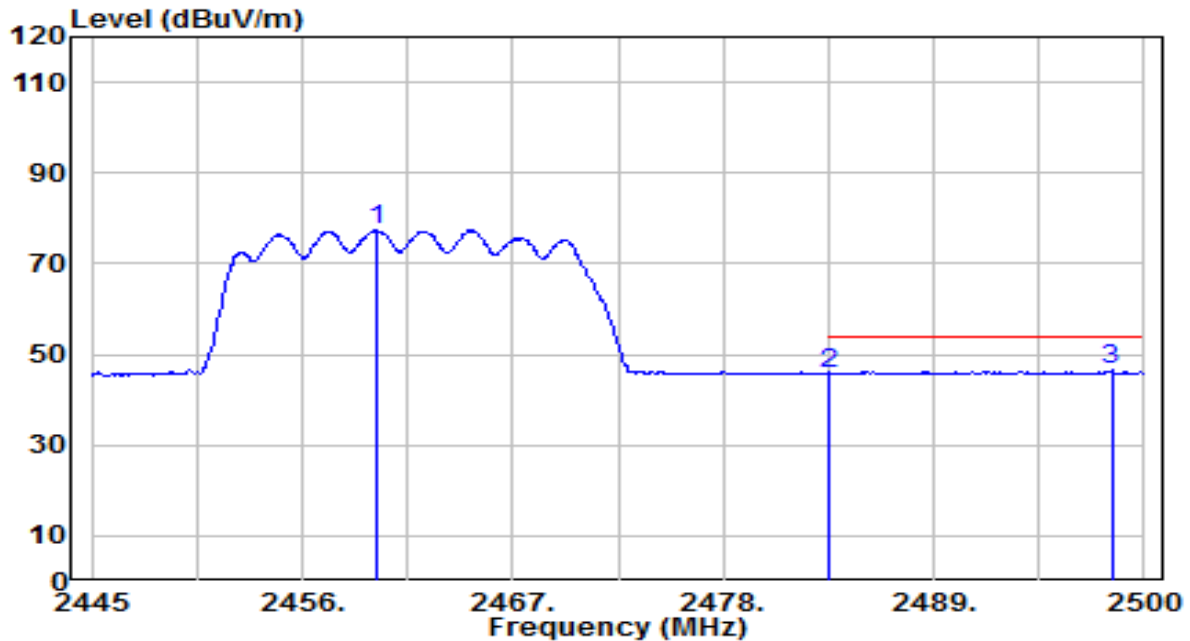


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.905	45.24	32.11	77.35	N/A	N/A	145	345	Average
2	2483.500	13.72	32.20	45.91	-8.09	54.00	145	345	Average
3	* 2498.295	14.17	32.25	46.42	-7.58	54.00	145	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

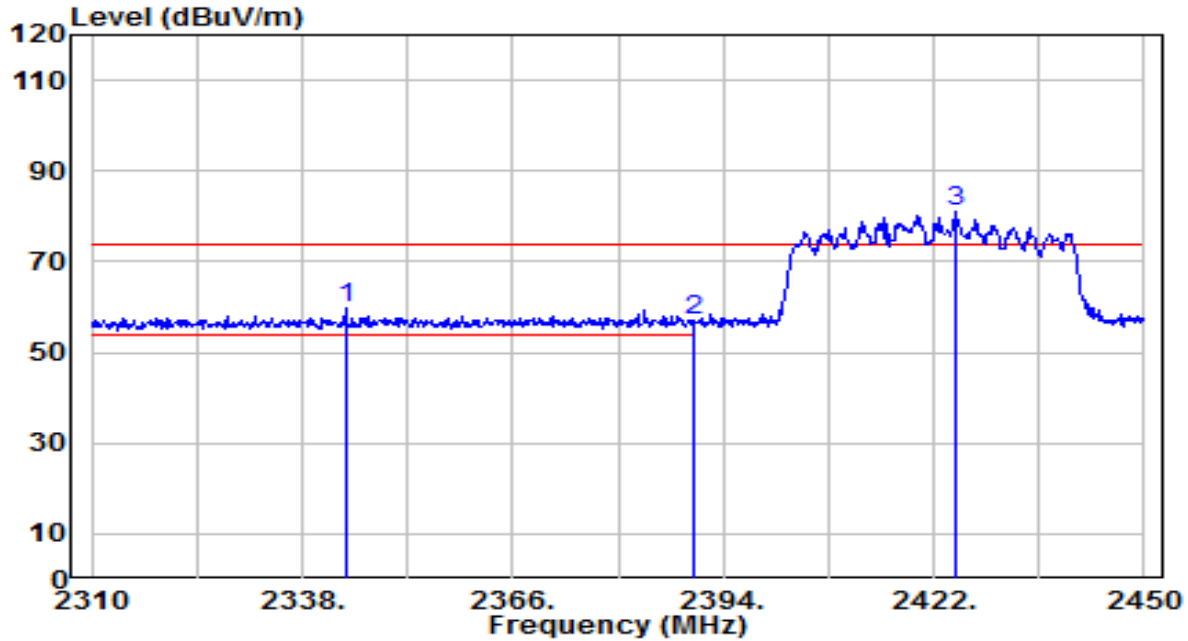


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2343.740	27.98	31.68	59.65	-14.35	74.00	155	290	Peak
2		2390.000	25.37	31.85	57.22	-16.78	74.00	155	290	Peak
3		2425.080	48.86	31.98	80.84	N/A	N/A	155	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

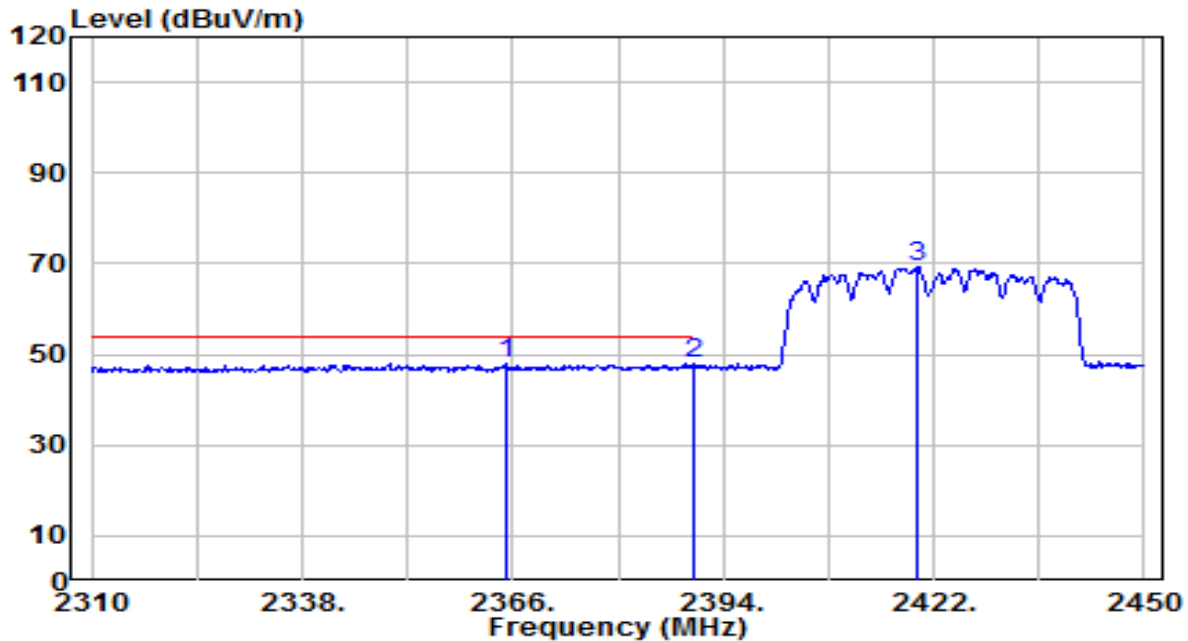


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2365.020	16.13	31.76	47.89	-6.11	54.00	155	290	Average
2	* 2390.000	16.13	31.85	47.98	-6.02	54.00	155	290	Average
3	2419.760	37.31	31.96	69.27	N/A	N/A	155	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

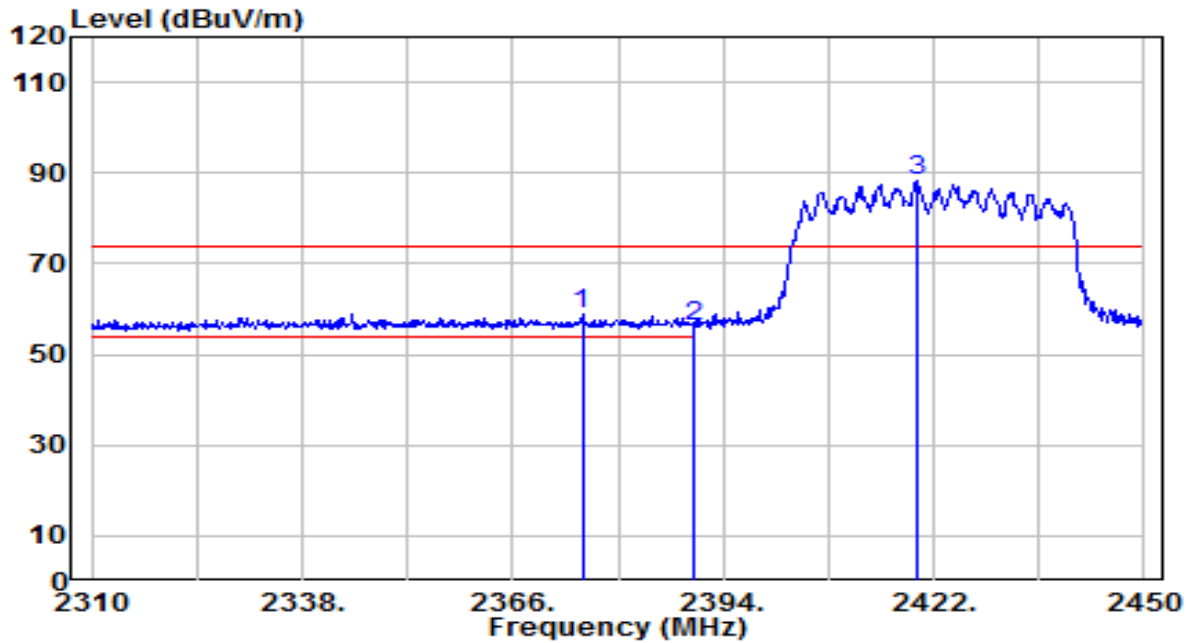


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2375.240	27.23	31.79	59.02	-14.98	74.00	130	340	Peak
2		2390.000	24.48	31.85	56.32	-17.68	74.00	130	340	Peak
3		2419.760	56.21	31.96	88.17	N/A	N/A	130	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

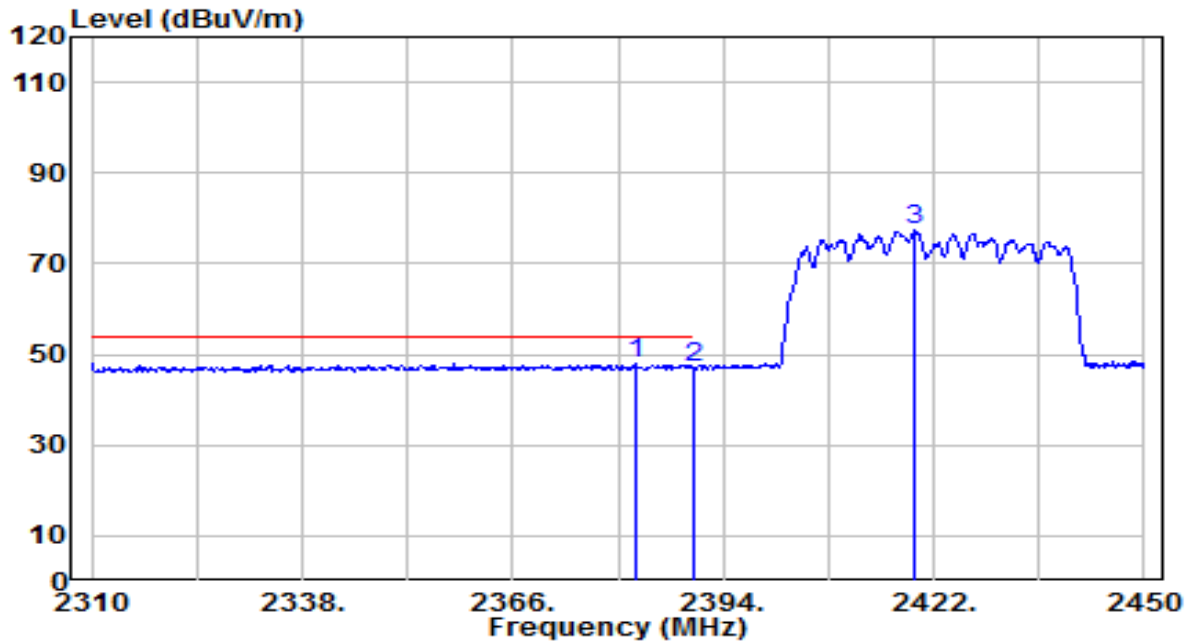


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2382.520	16.06	31.82	47.88	-6.12	54.00	130	340	Average
2	2390.000	15.46	31.85	47.31	-6.69	54.00	130	340	Average
3	2419.340	45.30	31.96	77.26	N/A	N/A	130	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

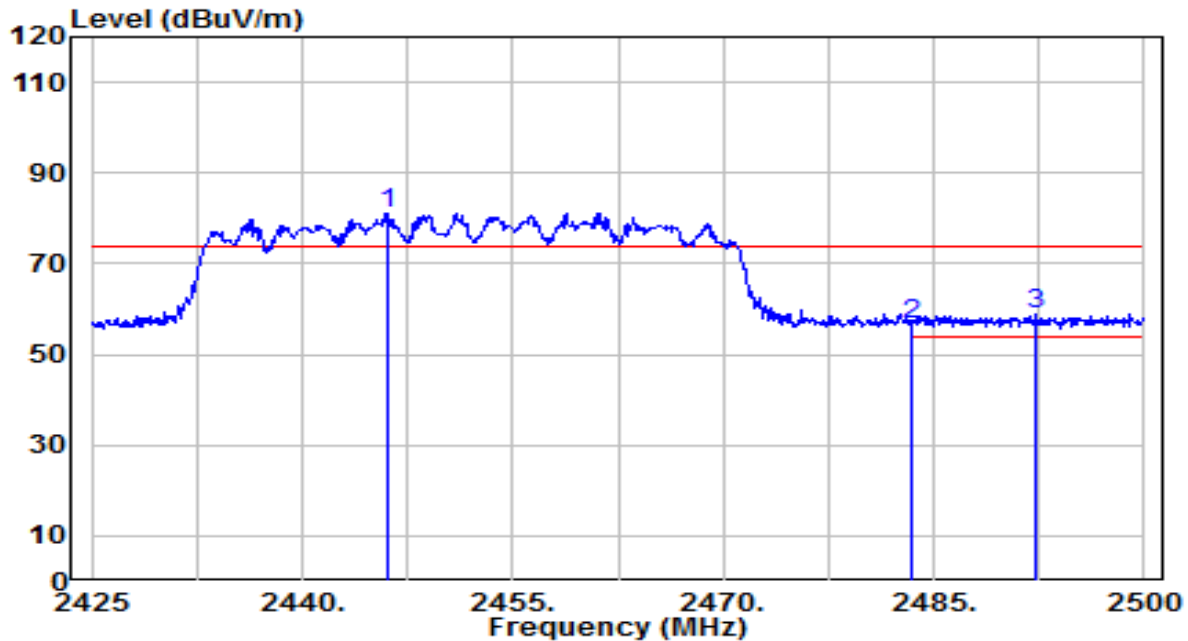


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2446.150	49.21	32.06	81.27	N/A	N/A	130	300	Peak
2	2483.500	24.61	32.20	56.81	-17.19	74.00	130	300	Peak
3	* 2492.275	26.56	32.23	58.79	-15.21	74.00	130	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

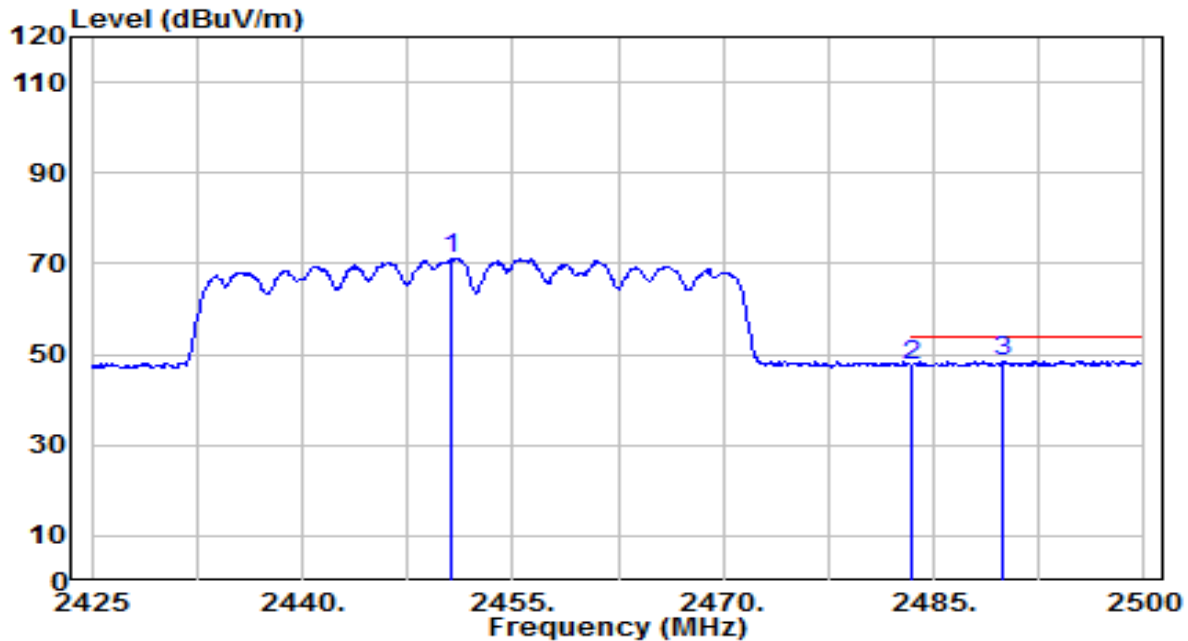


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.650	39.13	32.08	71.21	N/A	N/A	130	300	Average
2	2483.500	15.41	32.20	47.61	-6.39	54.00	130	300	Average
3	* 2489.950	16.43	32.22	48.65	-5.35	54.00	130	300	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

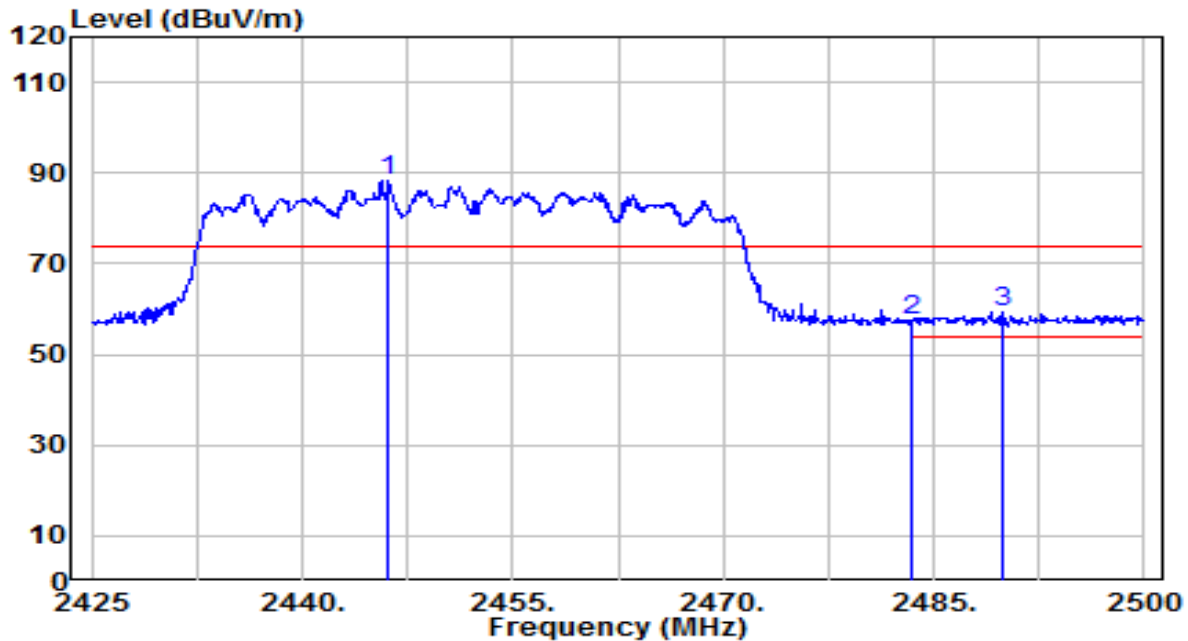


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2446.075	56.04	32.06	88.09	N/A	N/A	145	345	Peak
2	2483.500	25.32	32.20	57.51	-16.49	74.00	145	345	Peak
3	* 2489.950	27.17	32.22	59.40	-14.60	74.00	145	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

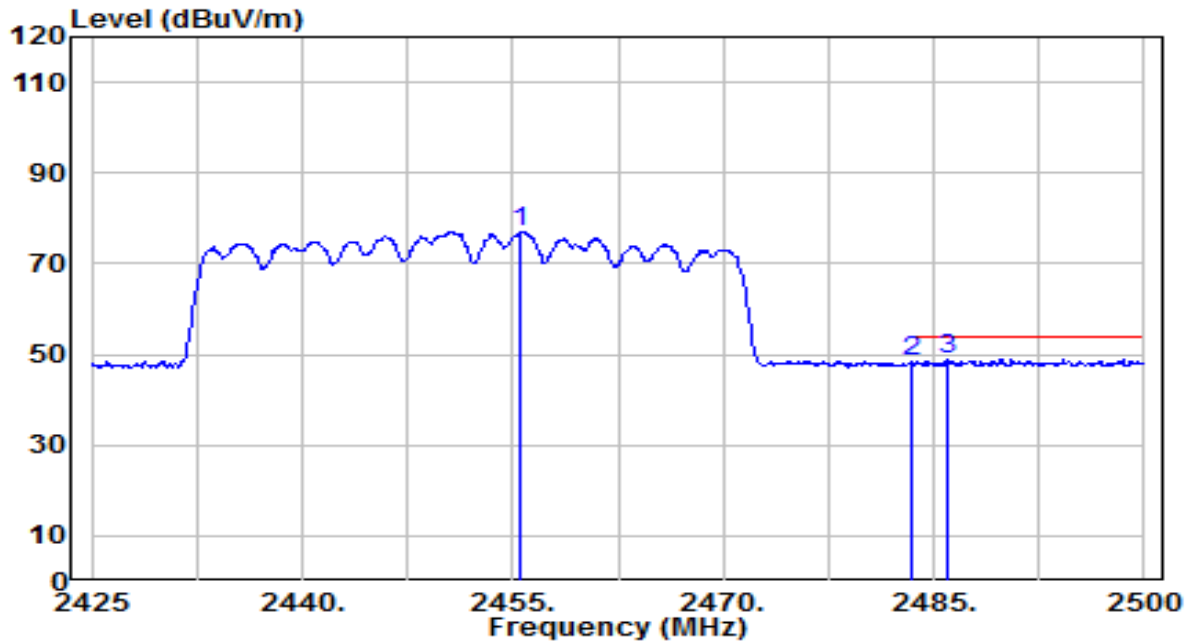

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.600	45.11	32.09	77.20	N/A	N/A	145	345	Average
2	2483.500	16.46	32.20	48.65	-5.35	54.00	145	345	Average
3	* 2485.900	16.89	32.21	49.09	-4.91	54.00	145	345	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.