


EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

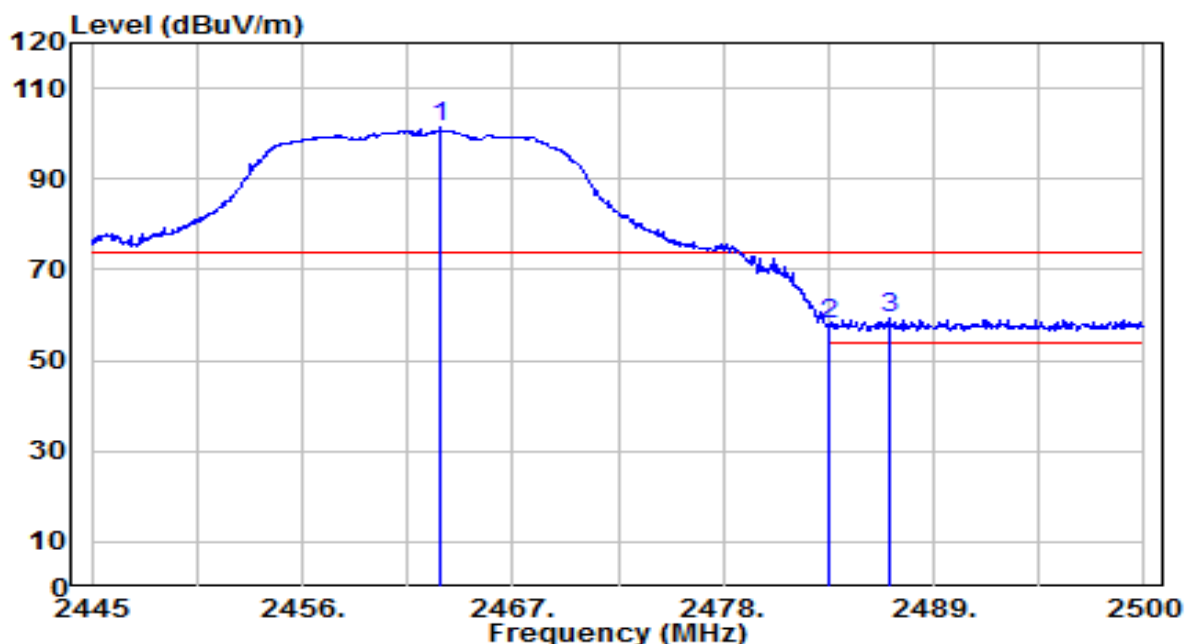


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.260	69.27	32.12	101.39	N/A	N/A	150	210	Peak
2	2483.500	25.56	32.20	57.76	-16.24	74.00	150	210	Peak
3	* 2486.635	27.14	32.21	59.35	-14.65	74.00	150	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

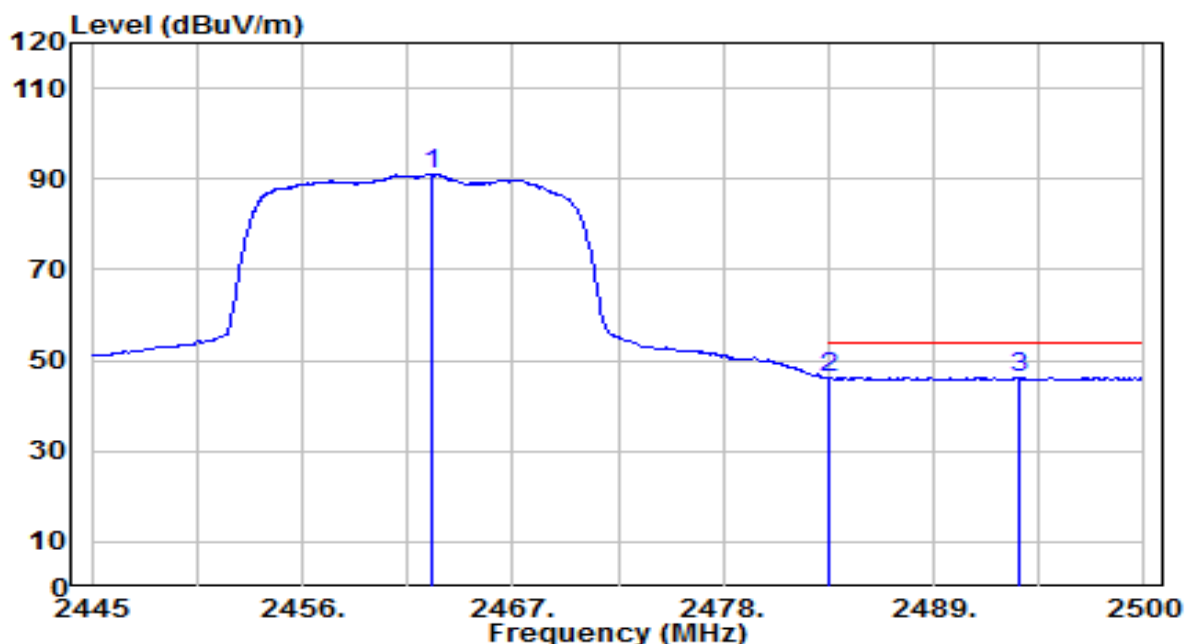


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.710	59.00	32.12	91.12	N/A	N/A	150	210	Average
2	2483.500	13.97	32.20	46.17	-7.83	54.00	150	210	Average
3	* 2493.400	14.08	32.24	46.31	-7.69	54.00	150	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

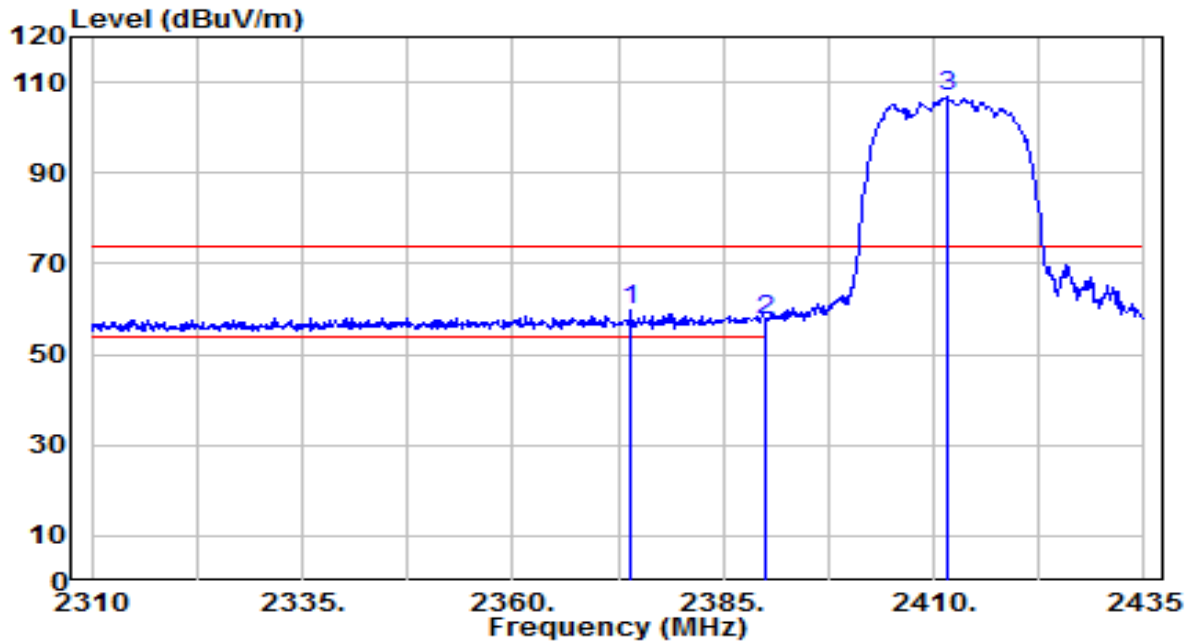


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2374.000	27.80	31.79	59.59	-14.41	74.00	155	5	Peak
2		2390.000	25.68	31.85	57.53	-16.47	74.00	155	5	Peak
3		2411.625	74.74	31.93	106.67	N/A	N/A	155	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

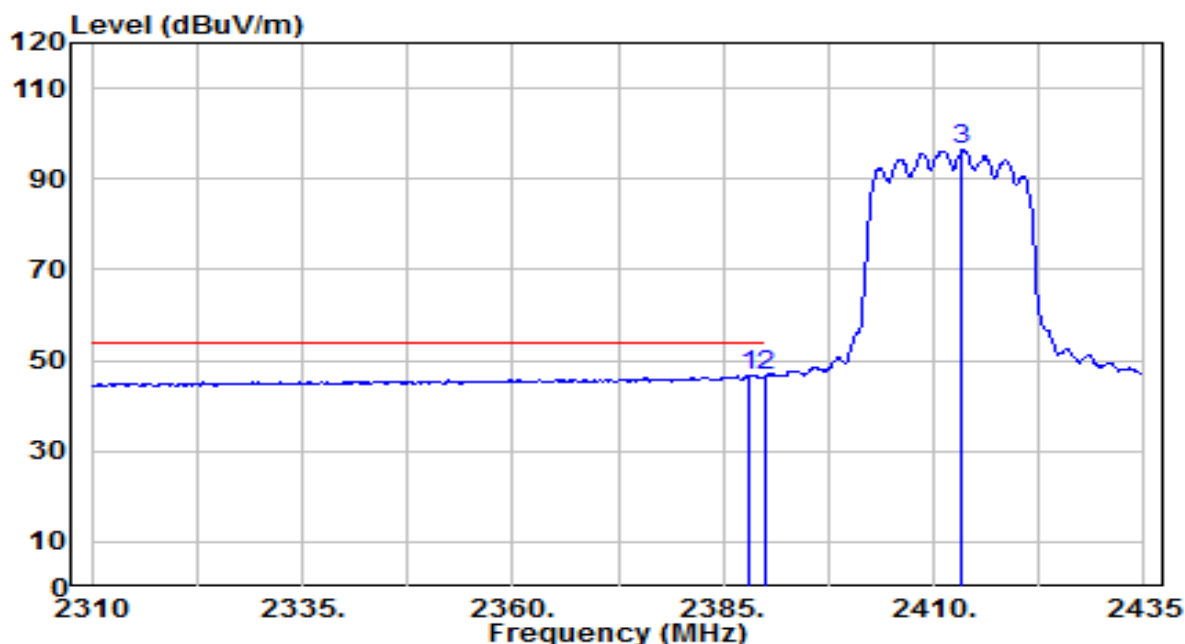


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.000	14.88	31.84	46.72	-7.28	54.00	155	5	Average
2	2390.000	14.66	31.85	46.51	-7.49	54.00	155	5	Average
3	2413.250	64.48	31.94	96.42	N/A	N/A	155	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

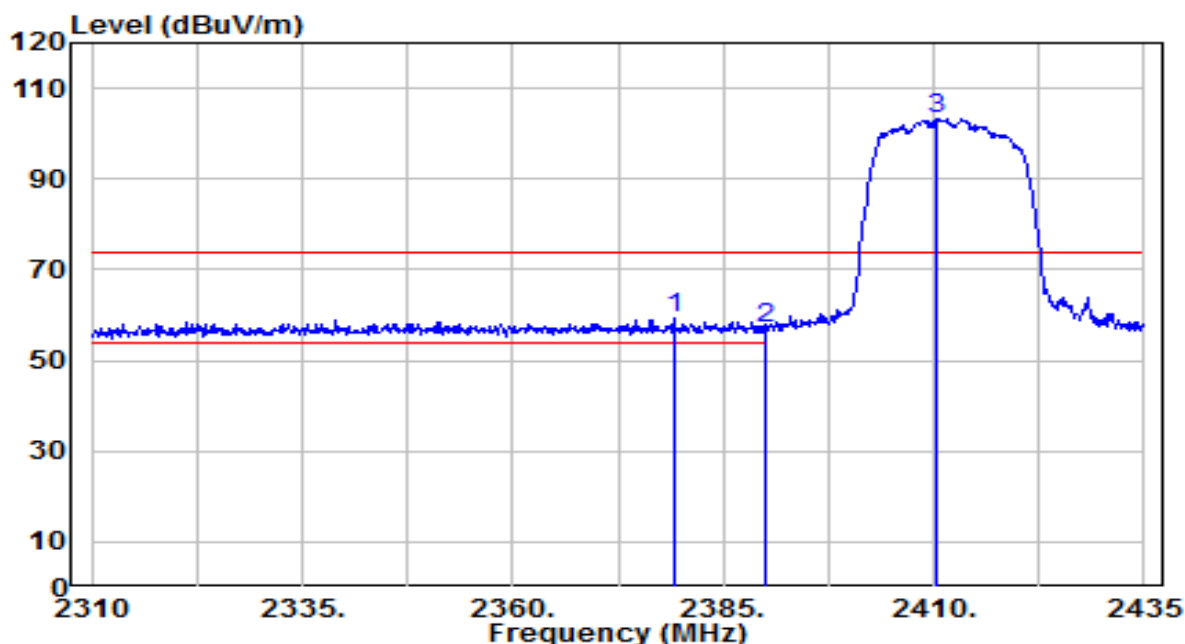


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2379.125	27.36	31.81	59.17	-14.83	74.00	150	355	Peak
2	2390.000	25.03	31.85	56.88	-17.12	74.00	150	355	Peak
3	2410.250	71.26	31.92	103.18	N/A	N/A	150	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

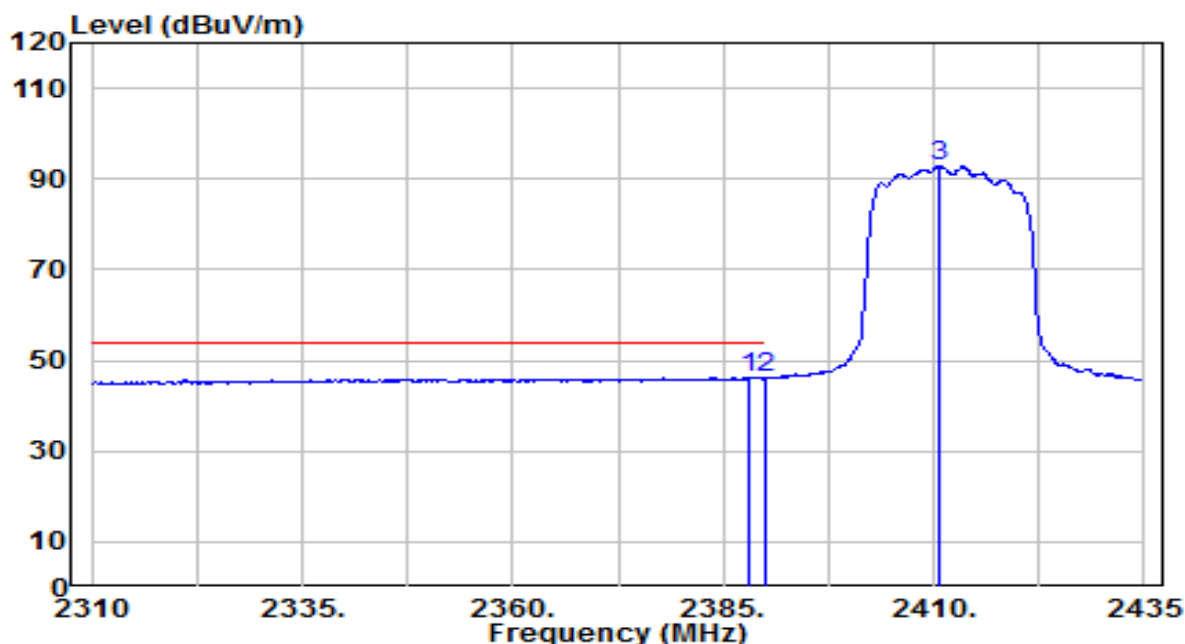


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	14.24	31.84	46.08	-7.92	54.00	150	355	Average
2	* 2390.000	14.42	31.85	46.27	-7.73	54.00	150	355	Average
3	2410.500	61.13	31.93	93.06	N/A	N/A	150	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

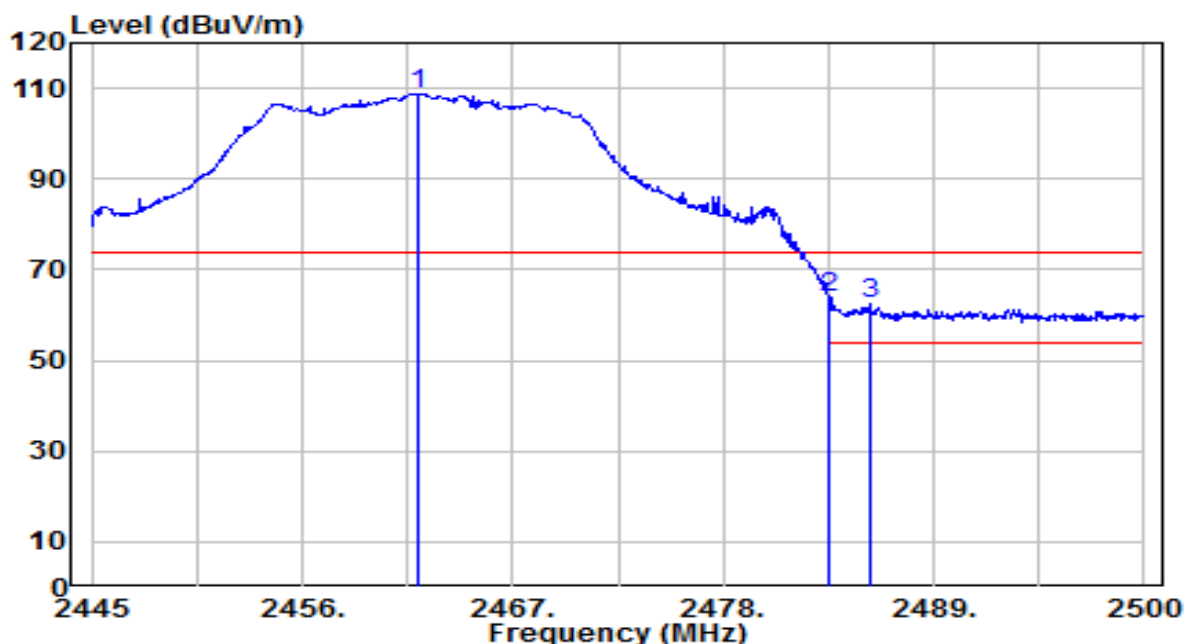


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.105	76.73	32.12	108.85	N/A	N/A	125	10	Peak
2	* 2483.500	31.63	32.20	63.82	-10.18	74.00	125	10	Peak
3	2485.700	30.32	32.21	62.52	-11.48	74.00	125	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

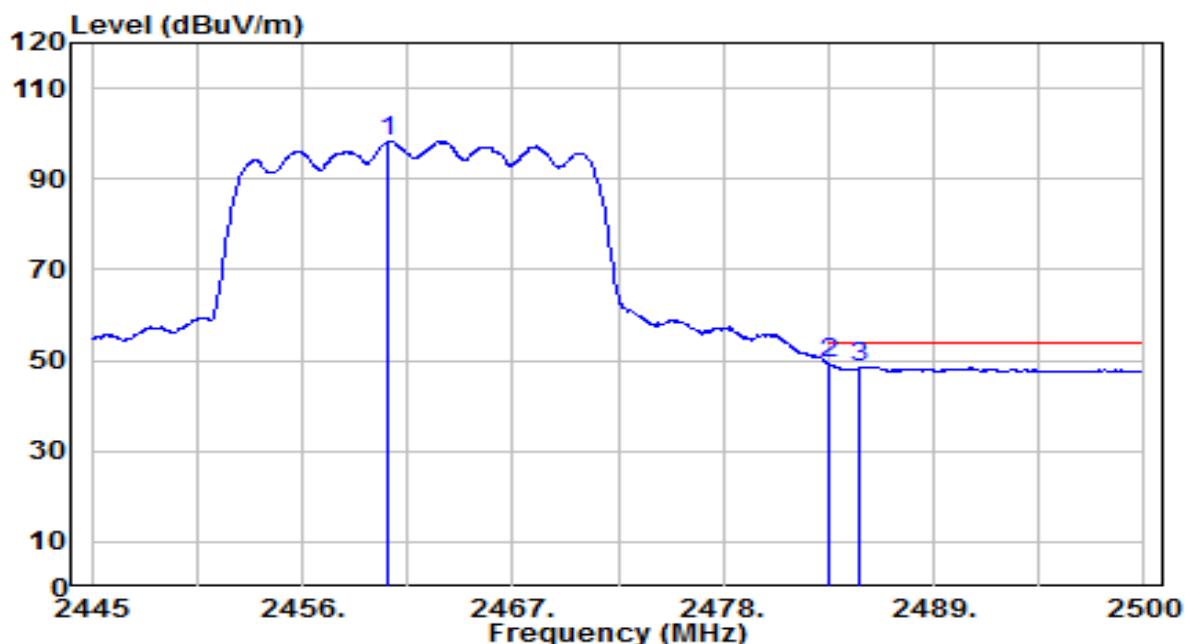


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.455	66.29	32.11	98.40	N/A	N/A	125	10	Average
2	* 2483.500	17.21	32.20	49.40	-4.60	54.00	125	10	Average
3	2485.150	16.30	32.20	48.50	-5.50	54.00	125	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

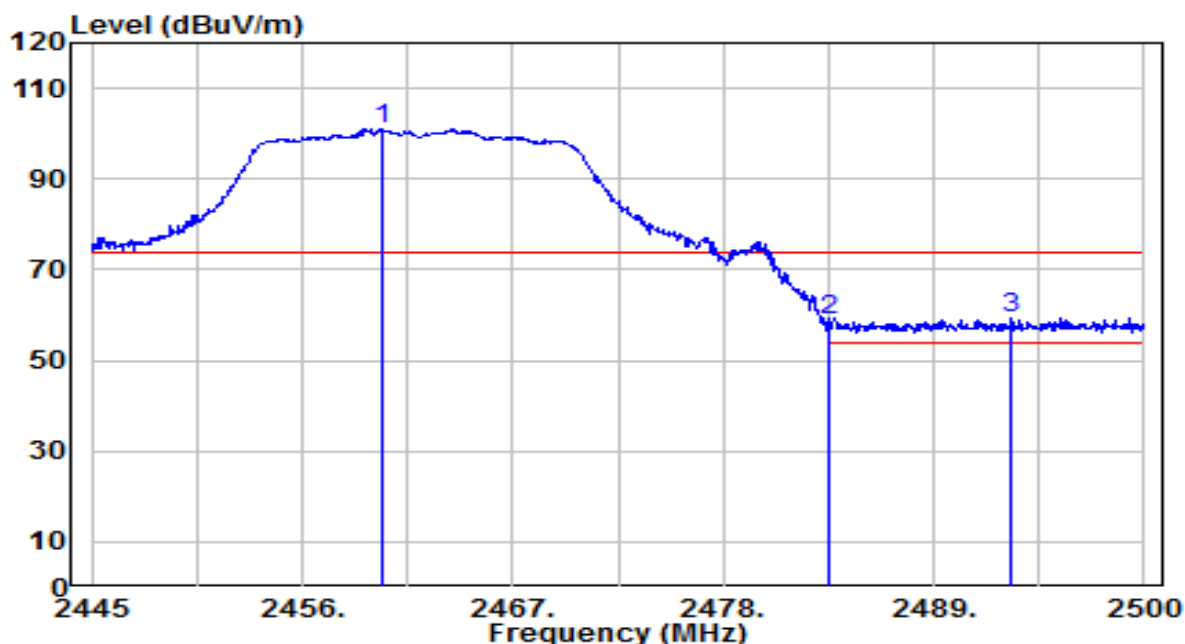


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.235	68.94	32.11	101.05	N/A	N/A	150	210	Peak
2	2483.500	26.68	32.20	58.88	-15.12	74.00	150	210	Peak
3	* 2493.015	27.16	32.23	59.40	-14.60	74.00	150	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

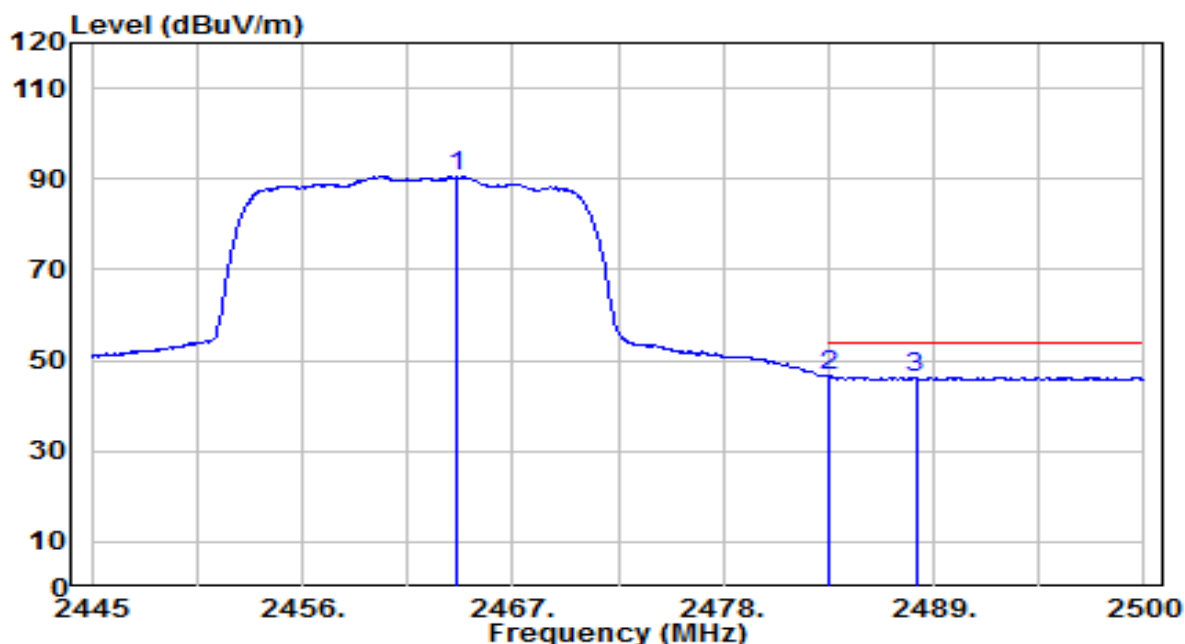


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.085	58.43	32.13	90.55	N/A	N/A	150	210	Average
2	* 2483.500	14.24	32.20	46.44	-7.56	54.00	150	210	Average
3	2488.065	14.13	32.22	46.35	-7.65	54.00	150	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

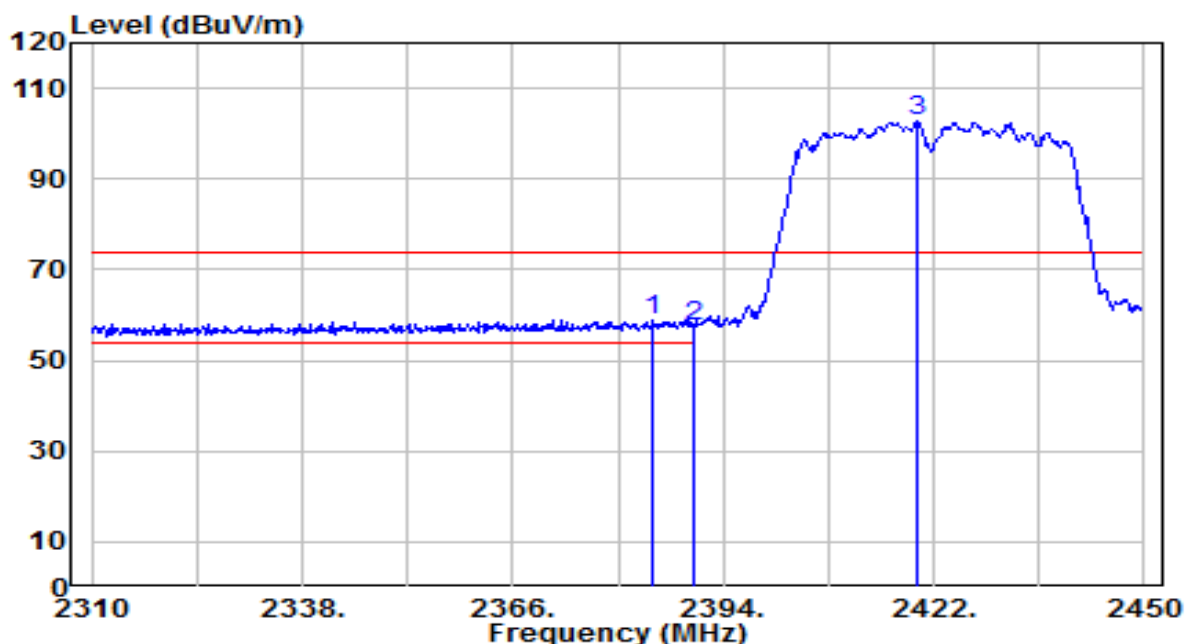


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2384.760	26.98	31.83	58.80	-15.20	74.00	155	5	Peak
2	2390.000	25.70	31.85	57.55	-16.45	74.00	155	5	Peak
3	2419.900	70.61	31.96	102.57	N/A	N/A	155	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

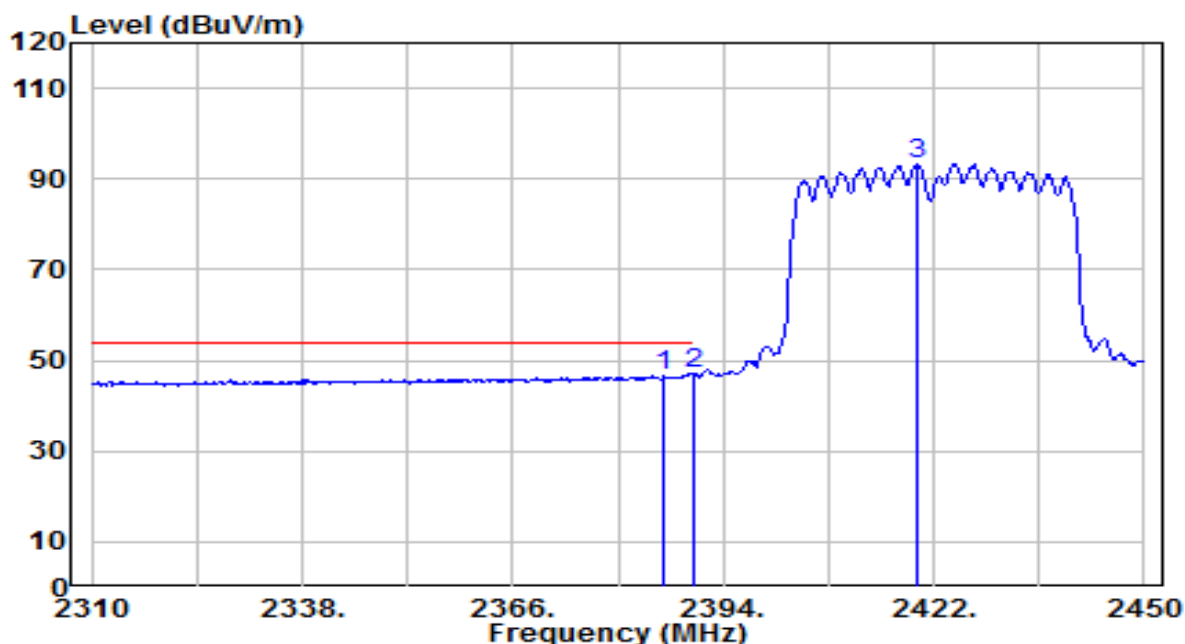


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.020	14.70	31.83	46.54	-7.46	54.00	155	5	Average
2	* 2390.000	15.26	31.85	47.11	-6.89	54.00	155	5	Average
3	2419.760	61.40	31.96	93.36	N/A	N/A	155	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

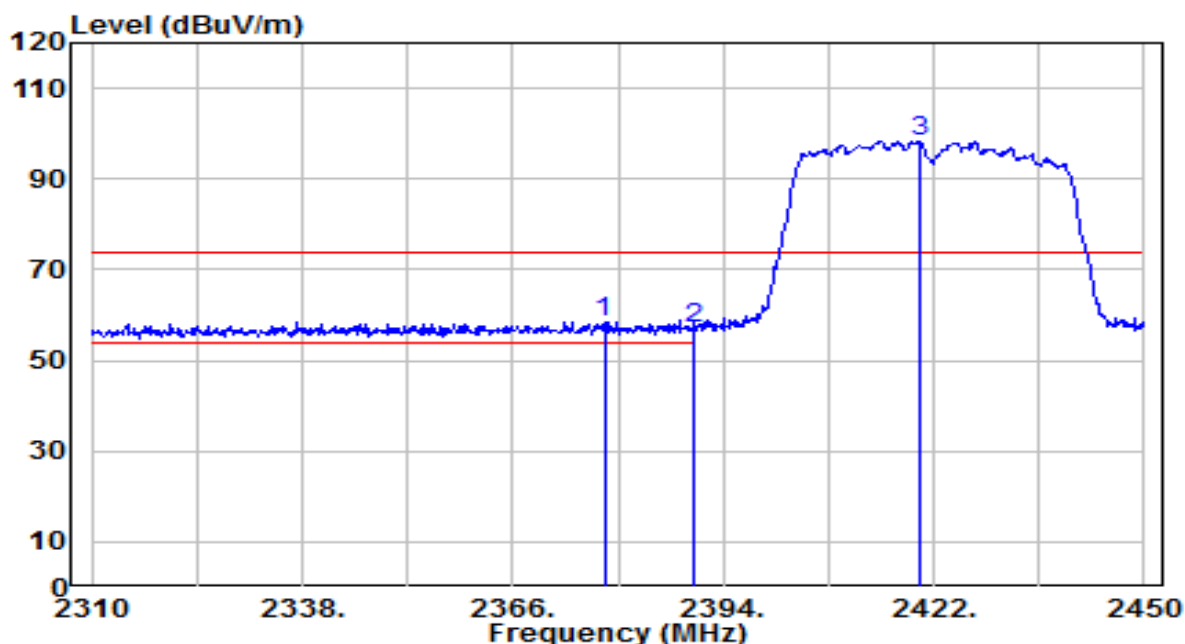


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2378.180	26.76	31.80	58.56	-15.44	74.00	150	355	Peak
2		2390.000	25.33	31.85	57.18	-16.82	74.00	150	355	Peak
3		2420.320	66.49	31.96	98.45	N/A	N/A	150	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

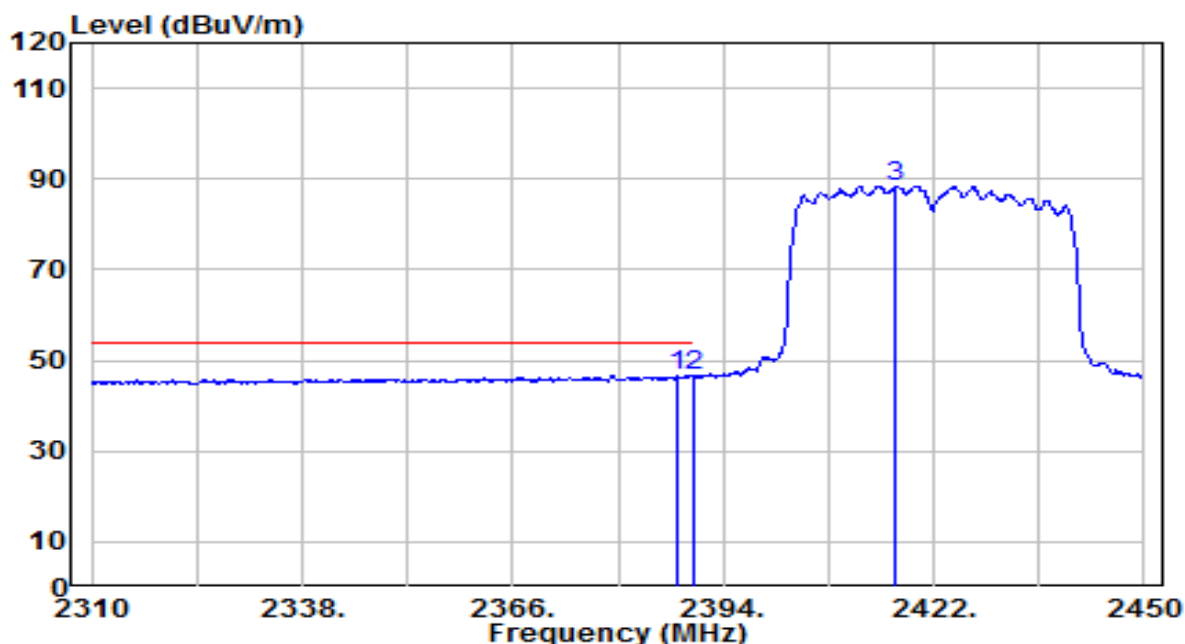


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.840	14.67	31.84	46.51	-7.49	54.00	150	355	Average
2	* 2390.000	14.70	31.85	46.55	-7.45	54.00	150	355	Average
3	2416.960	56.44	31.95	88.39	N/A	N/A	150	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

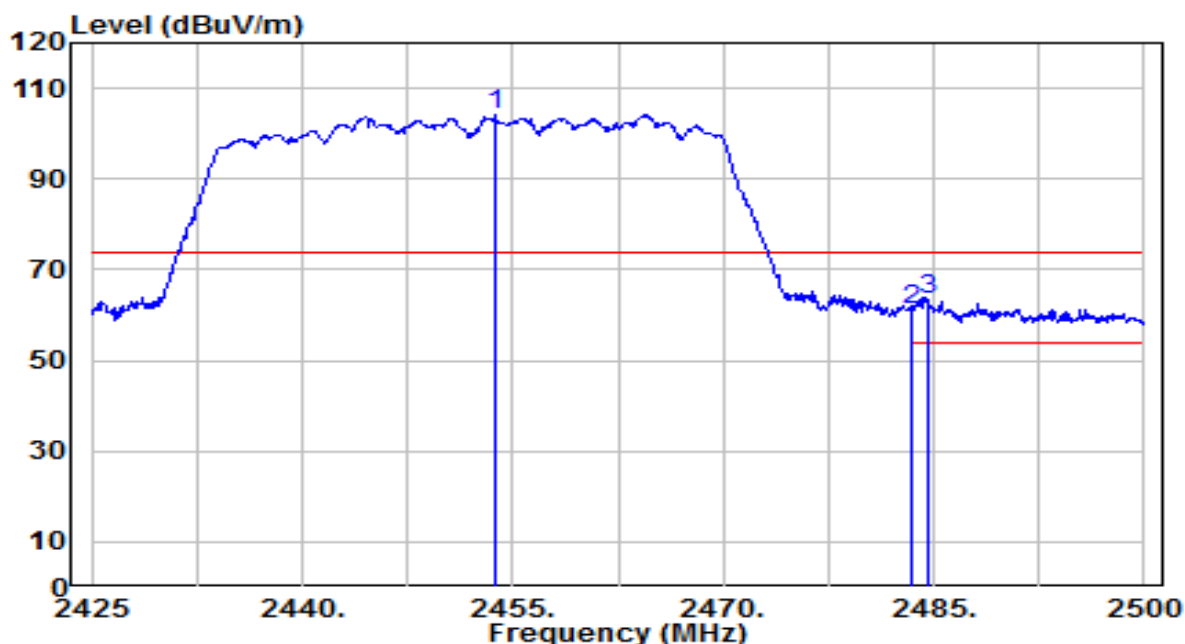


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.725	71.88	32.09	103.97	N/A	N/A	125	10	Peak
2	2483.500	28.96	32.20	61.16	-12.84	74.00	125	10	Peak
3	* 2484.625	31.11	32.20	63.31	-10.69	74.00	125	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

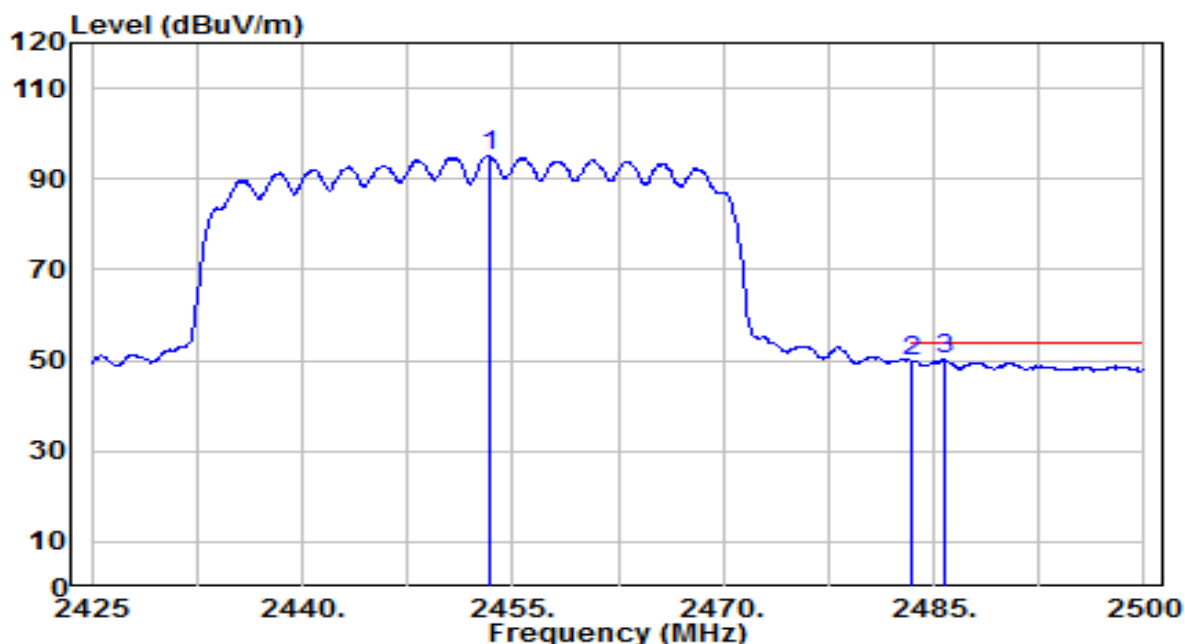


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.350	63.10	32.09	95.19	N/A	N/A	125	10	Average
2	2483.500	17.57	32.20	49.77	-4.23	54.00	125	10	Average
3	* 2485.750	18.06	32.21	50.27	-3.73	54.00	125	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

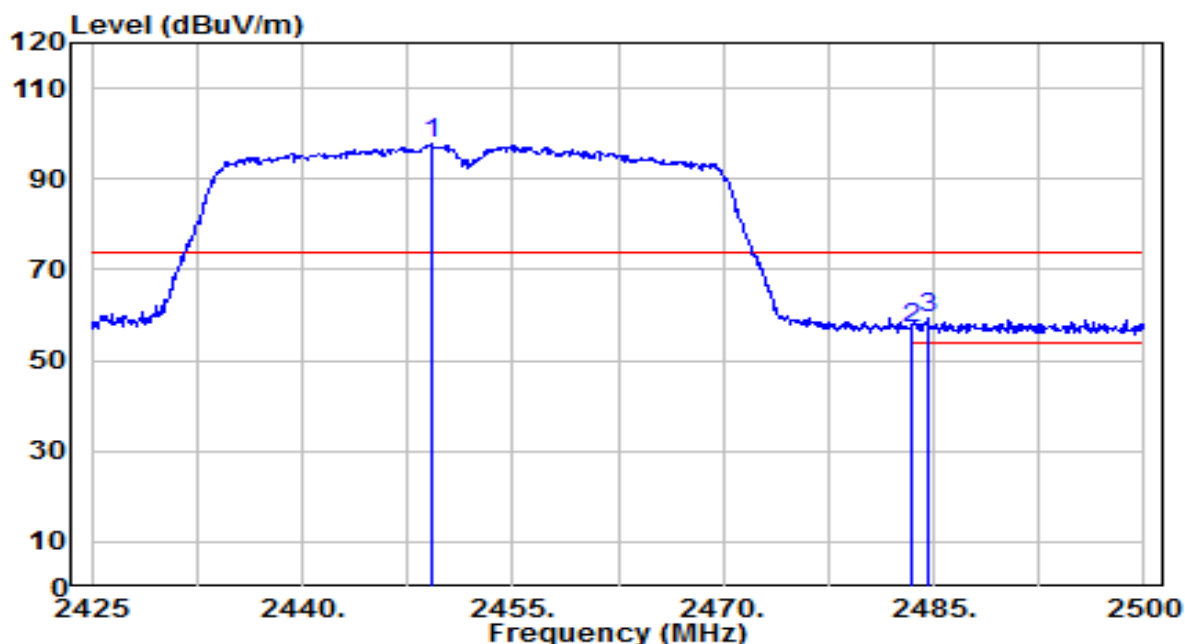


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.150	65.65	32.07	97.72	N/A	N/A	150	210	Peak
2	2483.500	24.65	32.20	56.85	-17.15	74.00	150	210	Peak
3	* 2484.625	26.92	32.20	59.12	-14.88	74.00	150	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

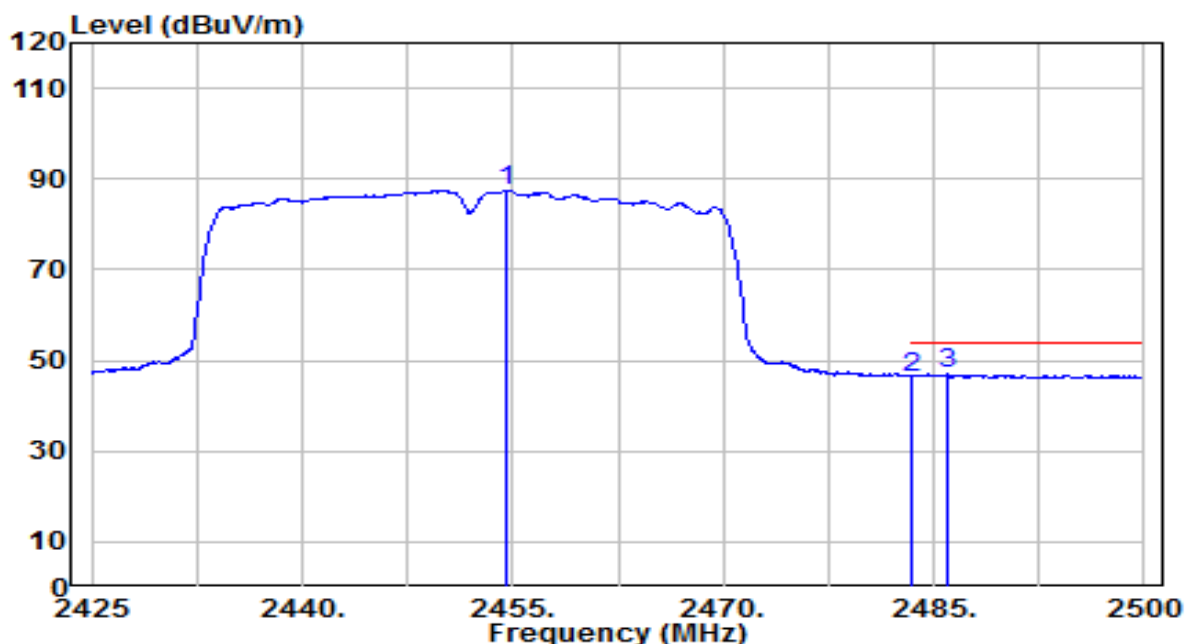


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.475	55.37	32.09	87.46	N/A	N/A	150	210	Average
2	2483.500	14.18	32.20	46.38	-7.62	54.00	150	210	Average
3	* 2485.975	14.77	32.21	46.97	-7.03	54.00	150	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

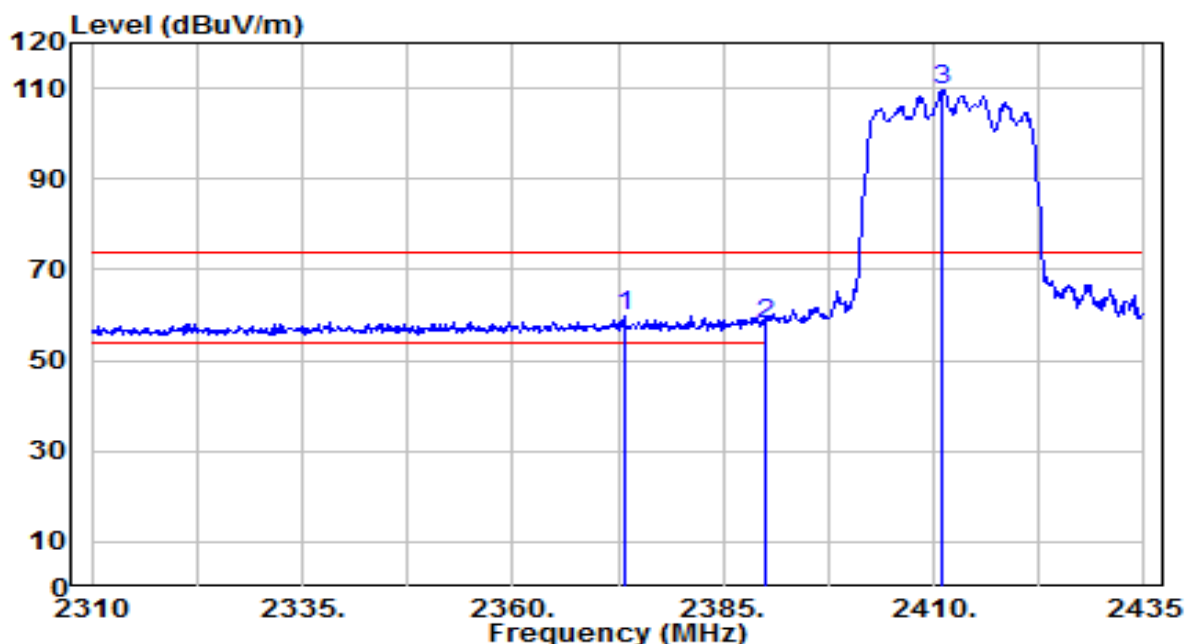


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2373.250	28.20	31.79	59.99	-14.01	74.00	155	5	Peak
2		2390.000	25.97	31.85	57.82	-16.18	74.00	155	5	Peak
3		2411.125	77.76	31.93	109.68	N/A	N/A	155	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

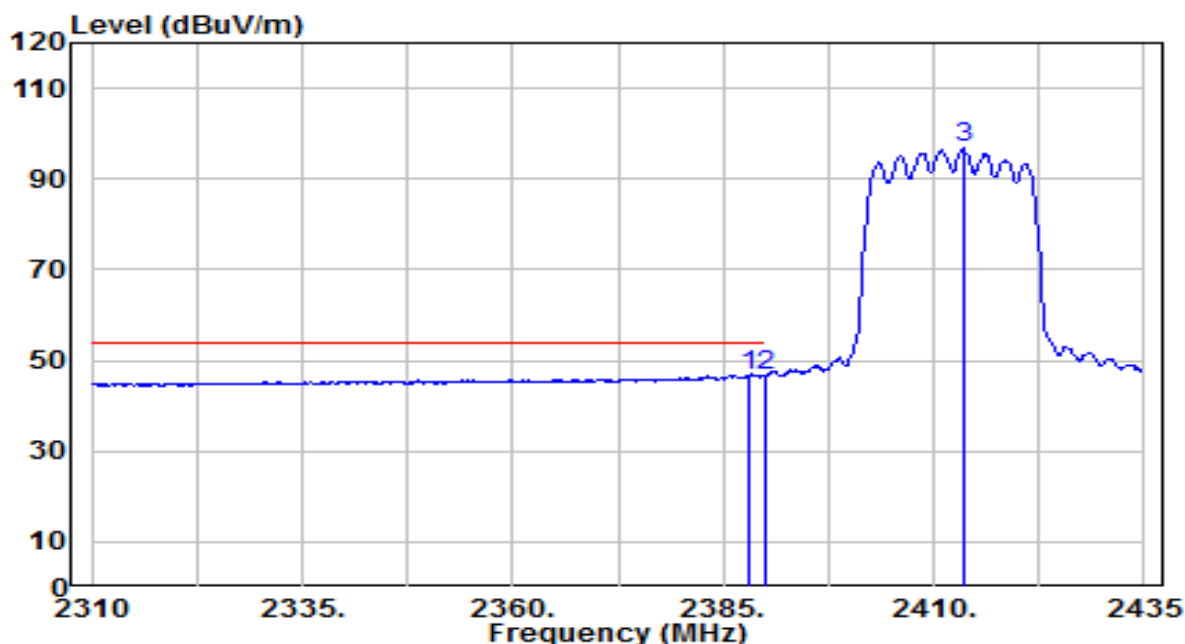


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.000	14.88	31.84	46.72	-7.28	54.00	155	5	Average
2	* 2390.000	14.93	31.85	46.78	-7.22	54.00	155	5	Average
3	2413.500	64.79	31.94	96.72	N/A	N/A	155	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

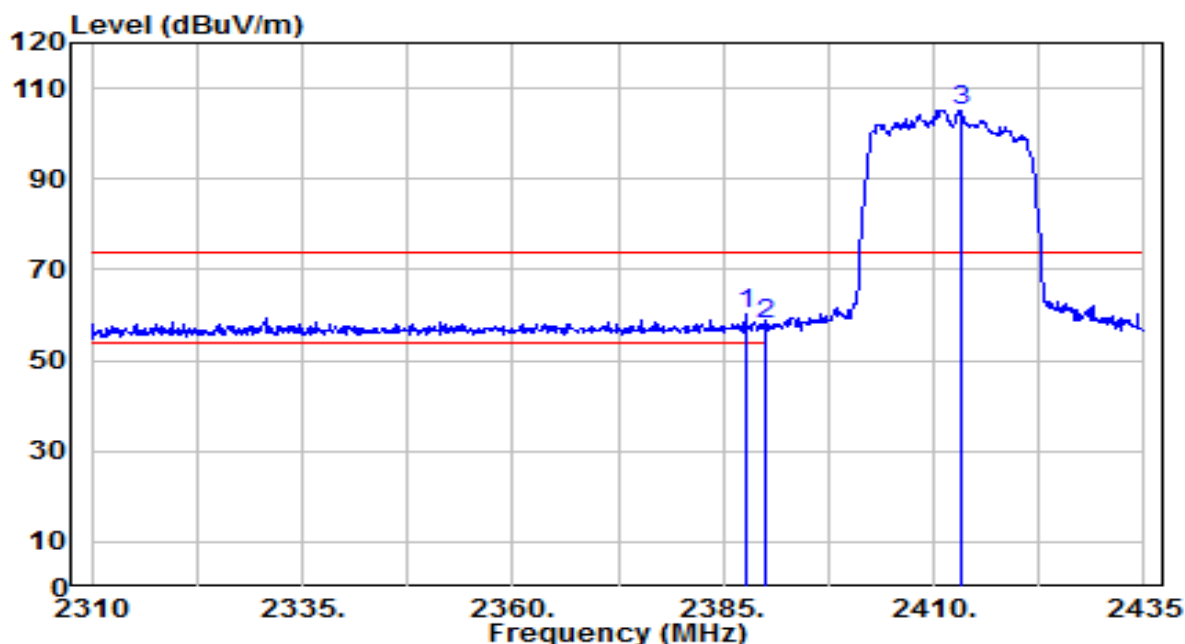


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.625	28.20	31.84	60.04	-13.96	74.00	150	355	Peak
2		2390.000	26.30	31.85	58.15	-15.85	74.00	150	355	Peak
3		2413.125	73.26	31.94	105.19	N/A	N/A	150	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

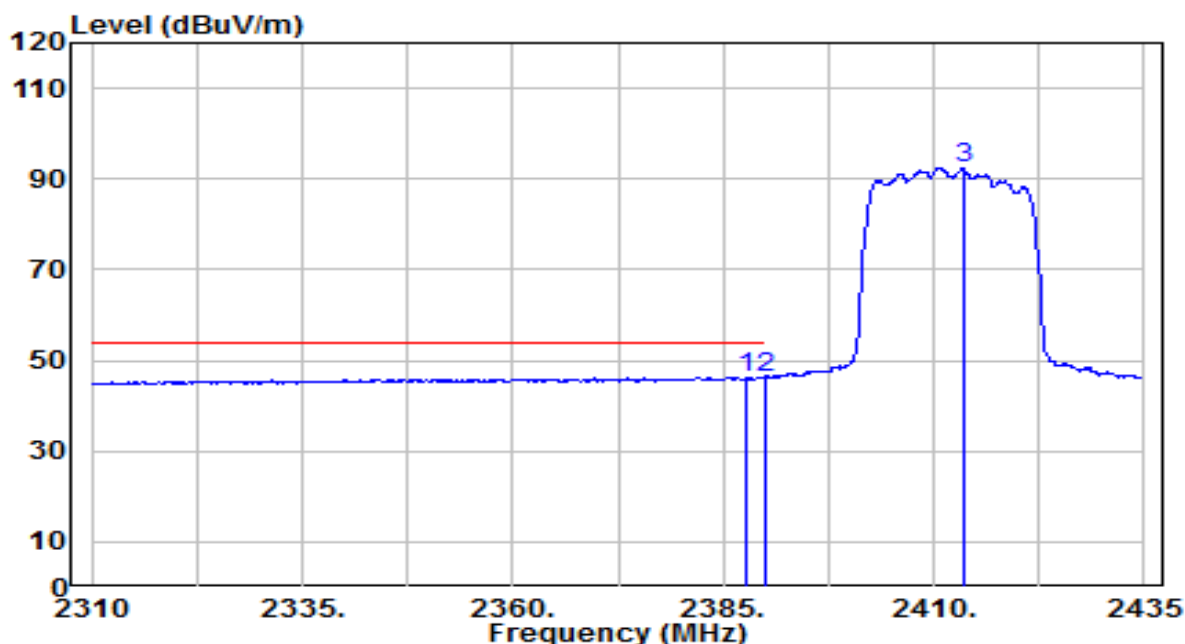


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	14.38	31.84	46.22	-7.78	54.00	150	355	Average
2	* 2390.000	14.47	31.85	46.32	-7.68	54.00	150	355	Average
3	2413.500	60.55	31.94	92.49	N/A	N/A	150	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

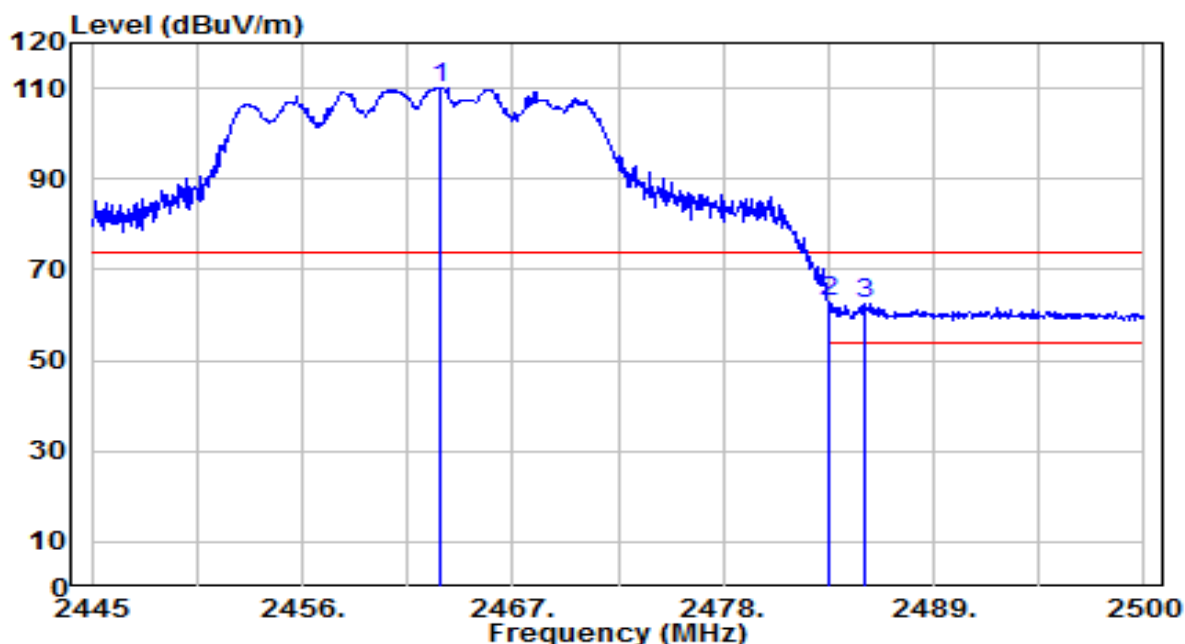


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.205	78.13	32.12	110.25	N/A	N/A	125	10	Peak
2	* 2483.500	30.68	32.20	62.88	-11.12	74.00	125	10	Peak
3	2485.370	30.21	32.21	62.42	-11.58	74.00	125	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

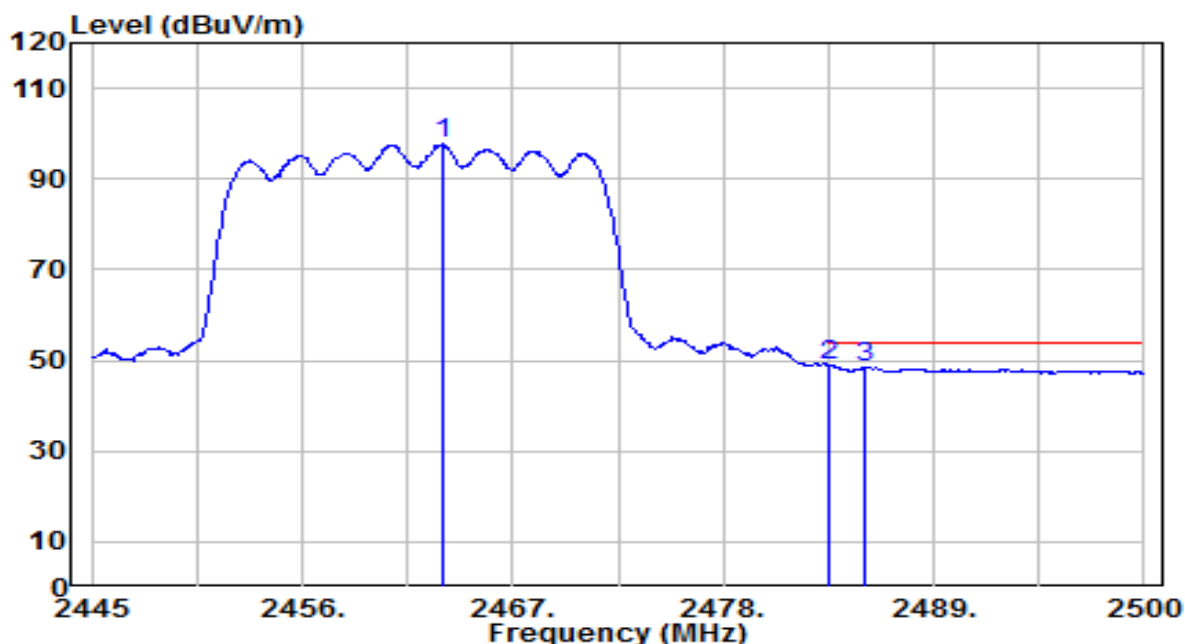


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.370	65.49	32.12	97.62	N/A	N/A	125	10	Average
2	* 2483.500	16.78	32.20	48.98	-5.02	54.00	125	10	Average
3	2485.370	16.21	32.21	48.41	-5.59	54.00	125	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

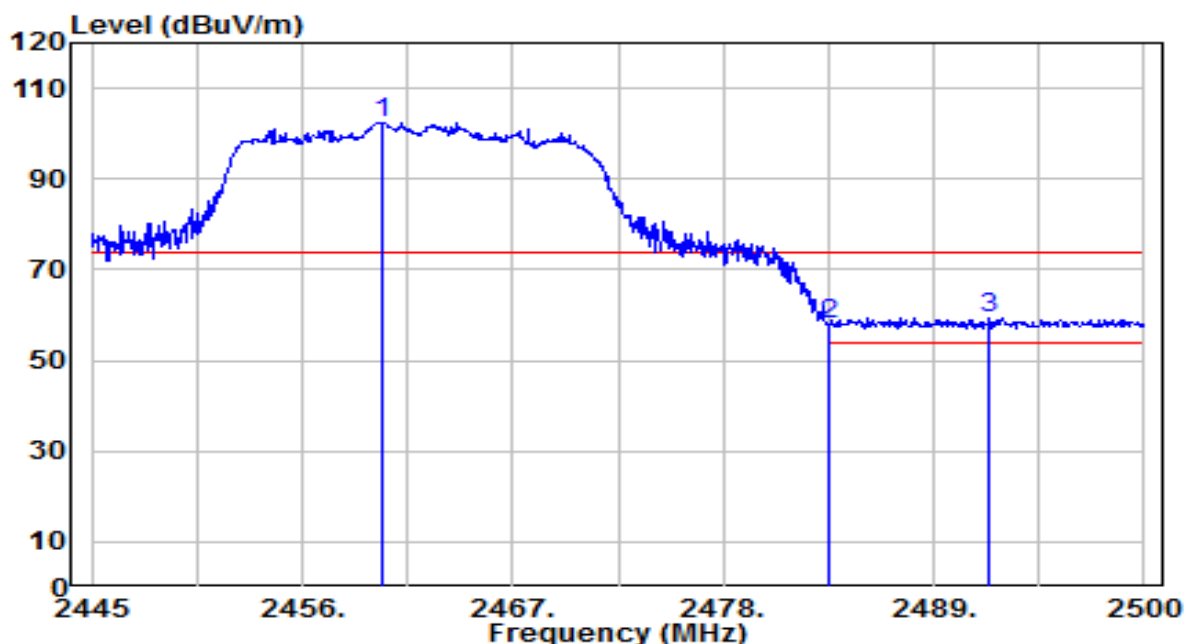


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.125	70.41	32.11	102.52	N/A	N/A	150	210	Peak
2	2483.500	25.80	32.20	58.00	-16.00	74.00	150	210	Peak
3	* 2491.915	27.12	32.23	59.35	-14.65	74.00	150	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

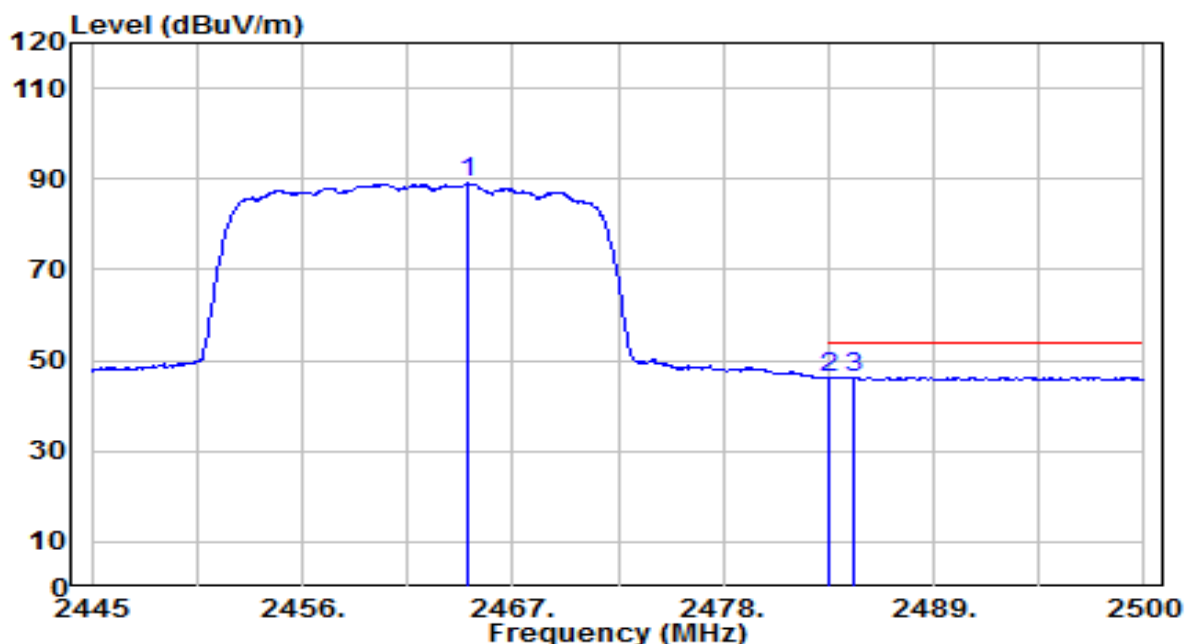


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.690	56.88	32.13	89.01	N/A	N/A	150	210	Average
2	2483.500	13.88	32.20	46.08	-7.92	54.00	150	210	Average
3	* 2484.820	14.13	32.20	46.34	-7.66	54.00	150	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

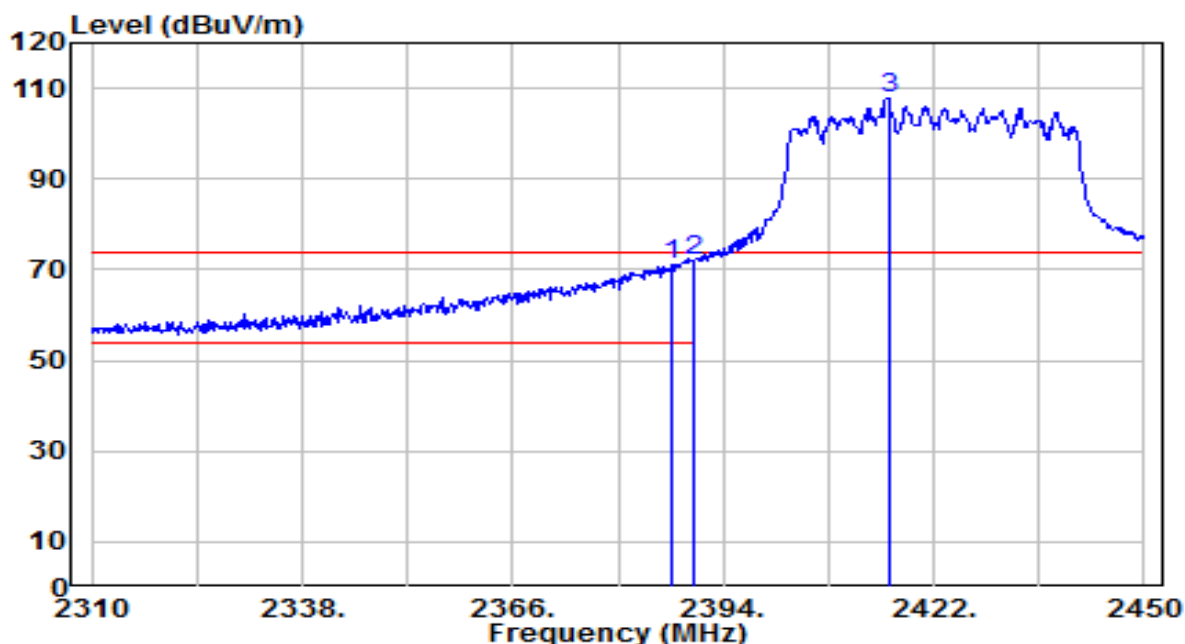


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.280	39.44	31.84	71.28	-2.72	74.00	155	5	Peak
2	* 2390.000	40.30	31.85	72.15	-1.85	74.00	155	5	Peak
3	2415.980	75.79	31.95	107.74	N/A	N/A	155	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

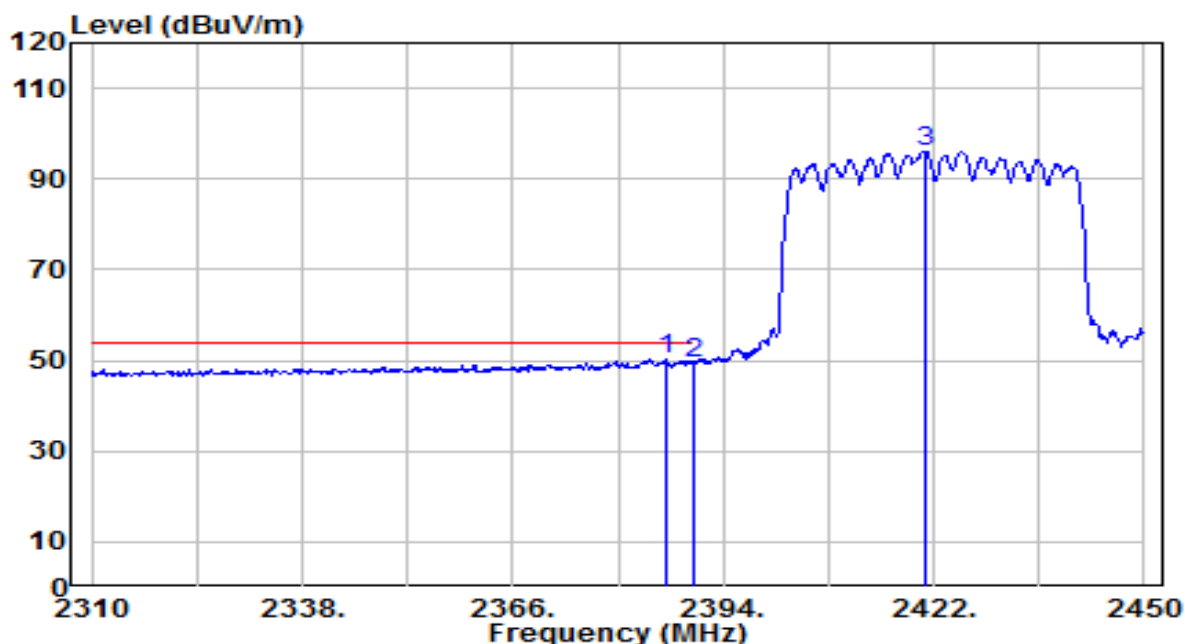


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2386.300	18.61	31.83	50.45	-3.55	54.00	155	5	Average
2	2390.000	17.58	31.85	49.43	-4.57	54.00	155	5	Average
3	2420.880	64.23	31.96	96.20	N/A	N/A	155	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

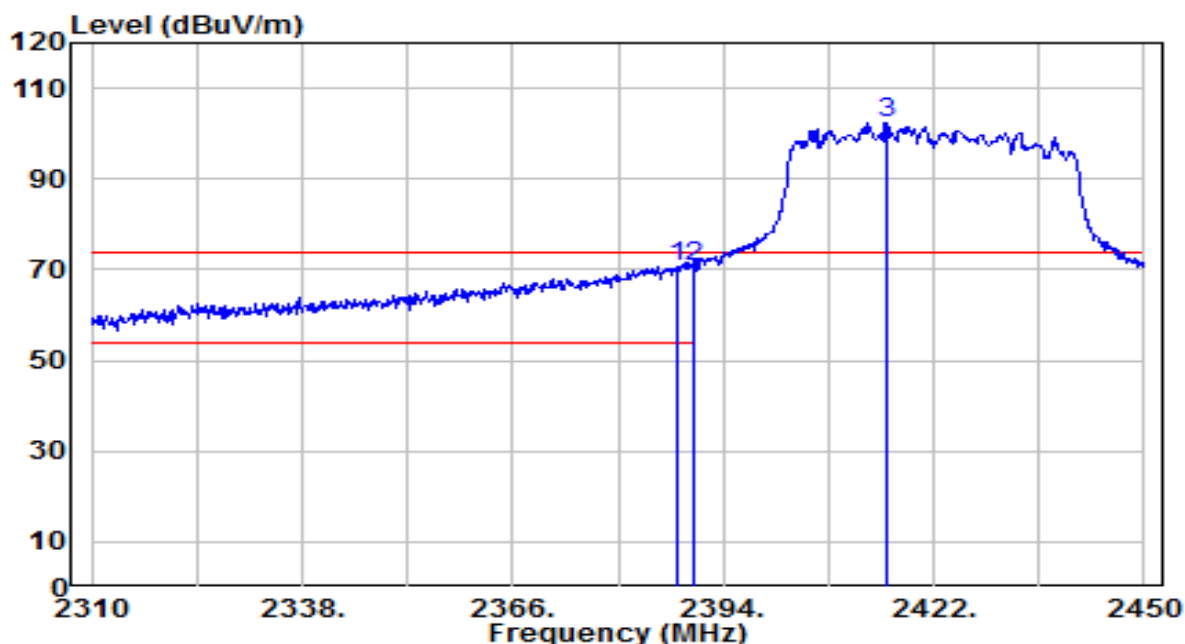


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.980	38.91	31.84	70.75	-3.25	74.00	150	355	Peak
2	* 2390.000	39.00	31.85	70.85	-3.15	74.00	150	355	Peak
3	2415.700	70.57	31.94	102.51	N/A	N/A	150	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

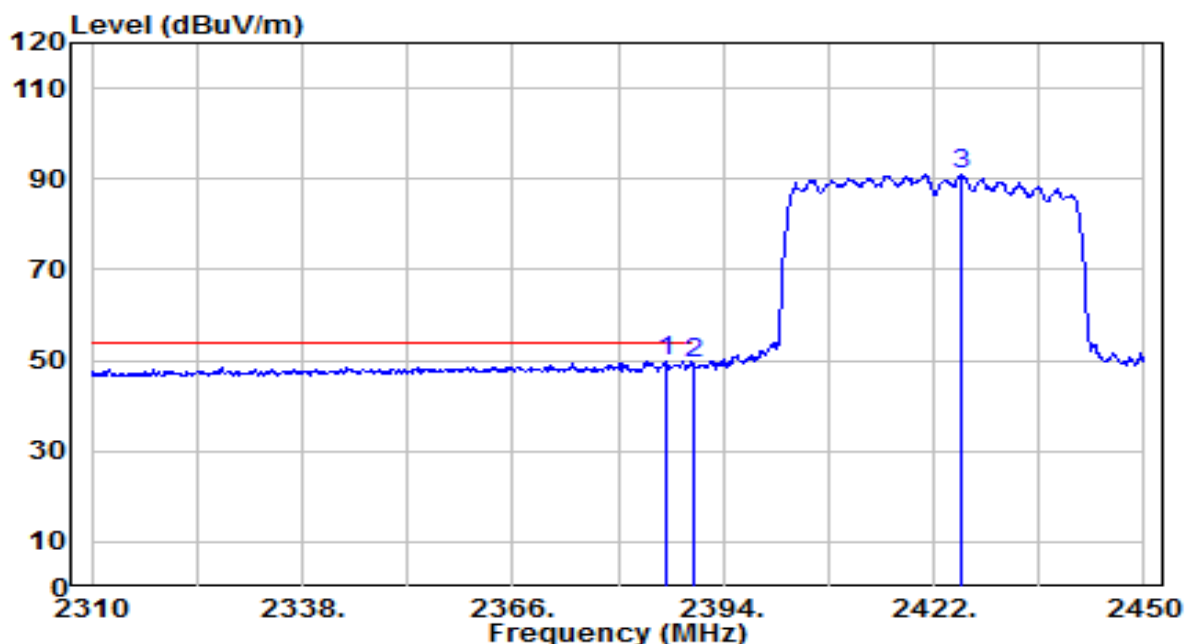


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2386.580	17.92	31.84	49.76	-4.24	54.00	150	355	Average
2	2390.000	17.47	31.85	49.32	-4.68	54.00	150	355	Average
3	2425.640	59.04	31.98	91.02	N/A	N/A	150	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

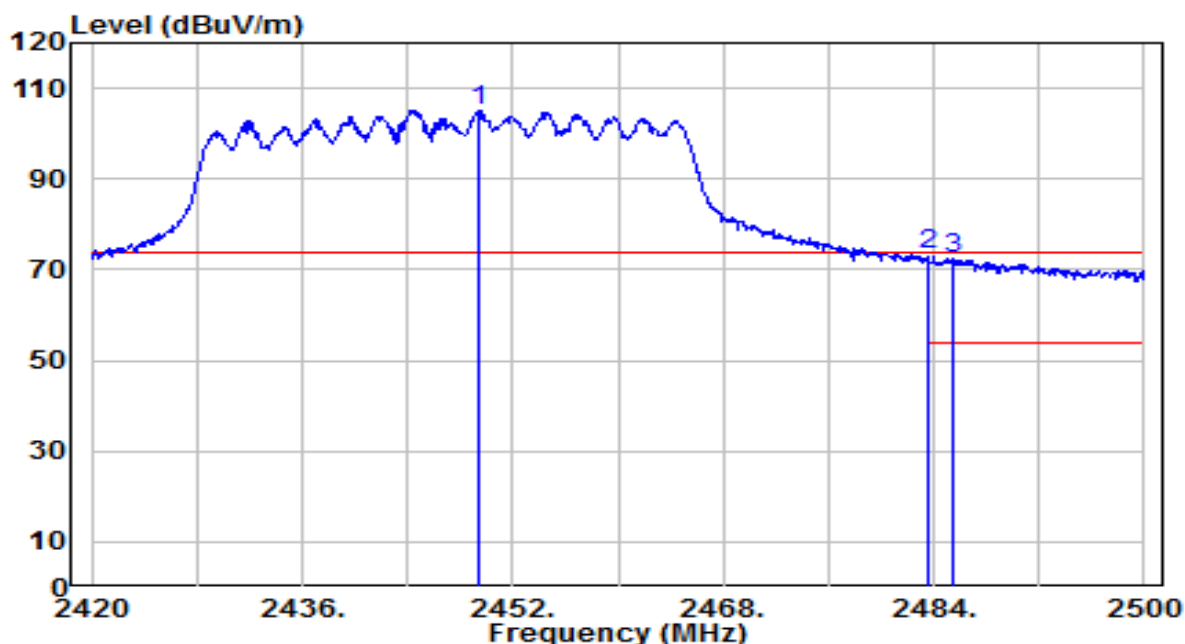


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.440	73.03	32.07	105.10	N/A	N/A	125	10	Peak
2	* 2483.500	41.08	32.20	73.28	-0.72	74.00	125	10	Peak
3	2485.520	40.45	32.21	72.65	-1.35	74.00	125	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

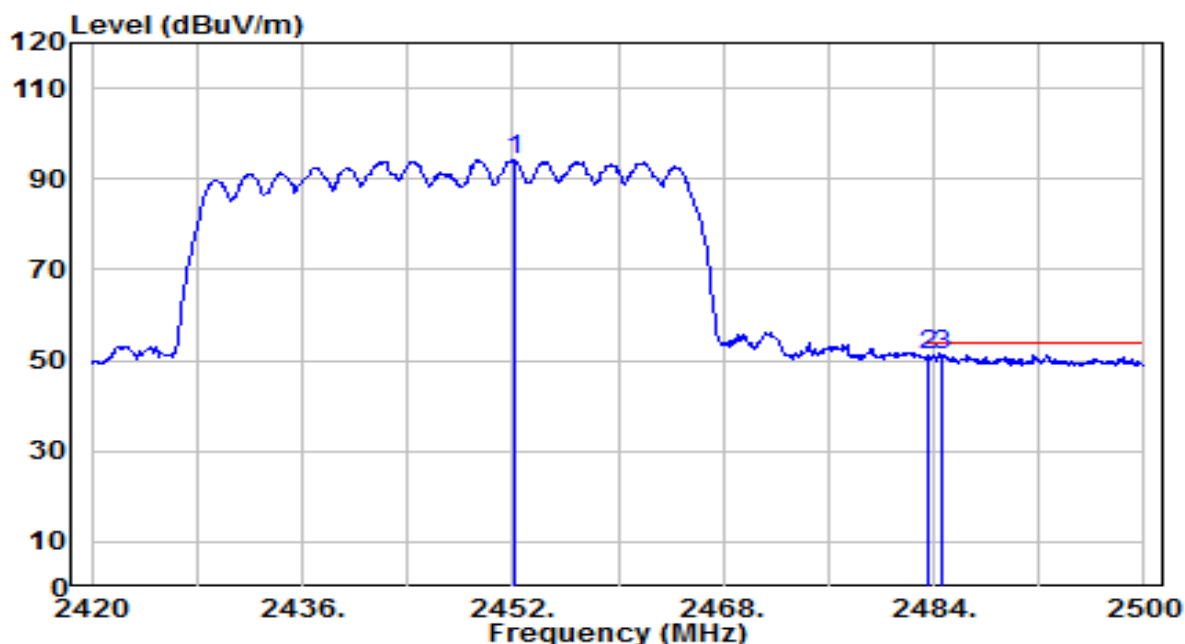


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2452.160	62.04	32.08	94.12	N/A	N/A	125	10	Average
2	2483.500	18.84	32.20	51.04	-2.96	54.00	125	10	Average
3	* 2484.640	19.00	32.20	51.20	-2.80	54.00	125	10	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

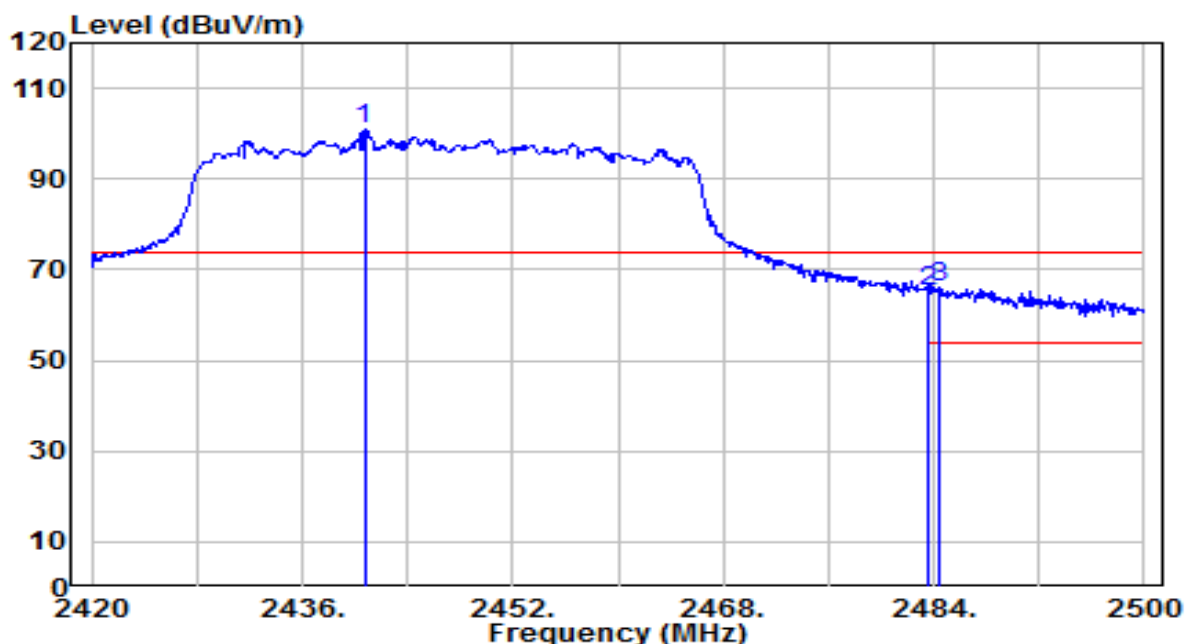


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2440.720	68.77	32.04	100.80	N/A	N/A	150	210	Peak
2	2483.500	33.08	32.20	65.28	-8.72	74.00	150	210	Peak
3	* 2484.480	33.94	32.20	66.14	-7.86	74.00	150	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 8_ANT 0+1	Test Voltage	AC 120V/60Hz

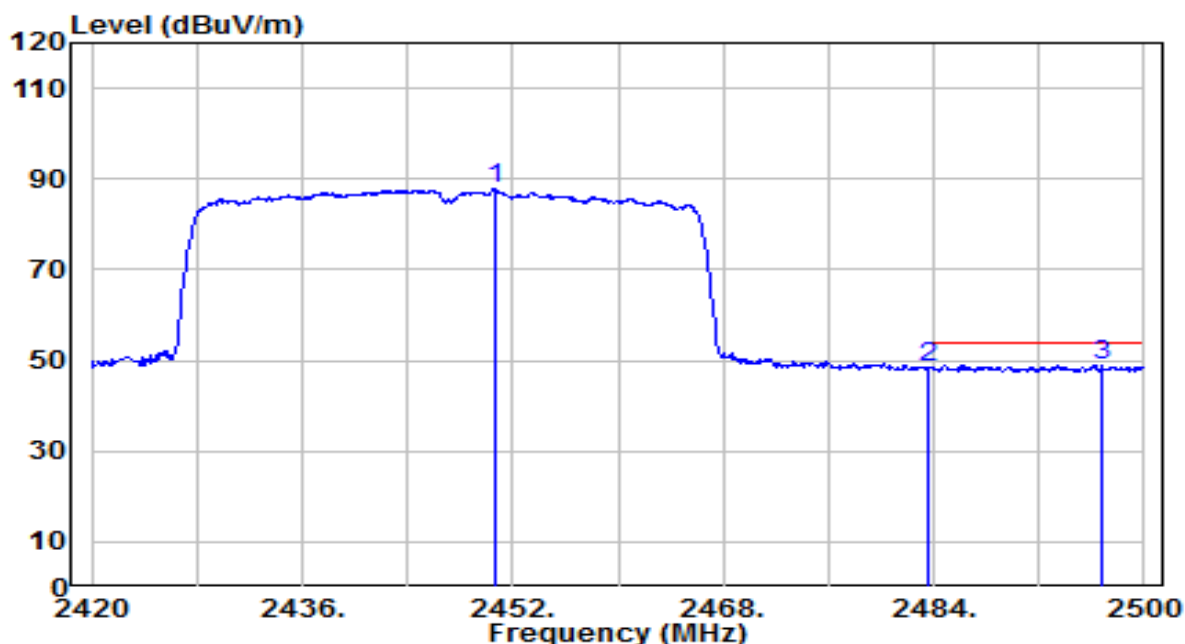


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.640	55.81	32.08	87.89	N/A	N/A	150	210	Average
2	2483.500	16.30	32.20	48.50	-5.50	54.00	150	210	Average
3	* 2496.880	16.77	32.25	49.02	-4.98	54.00	150	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

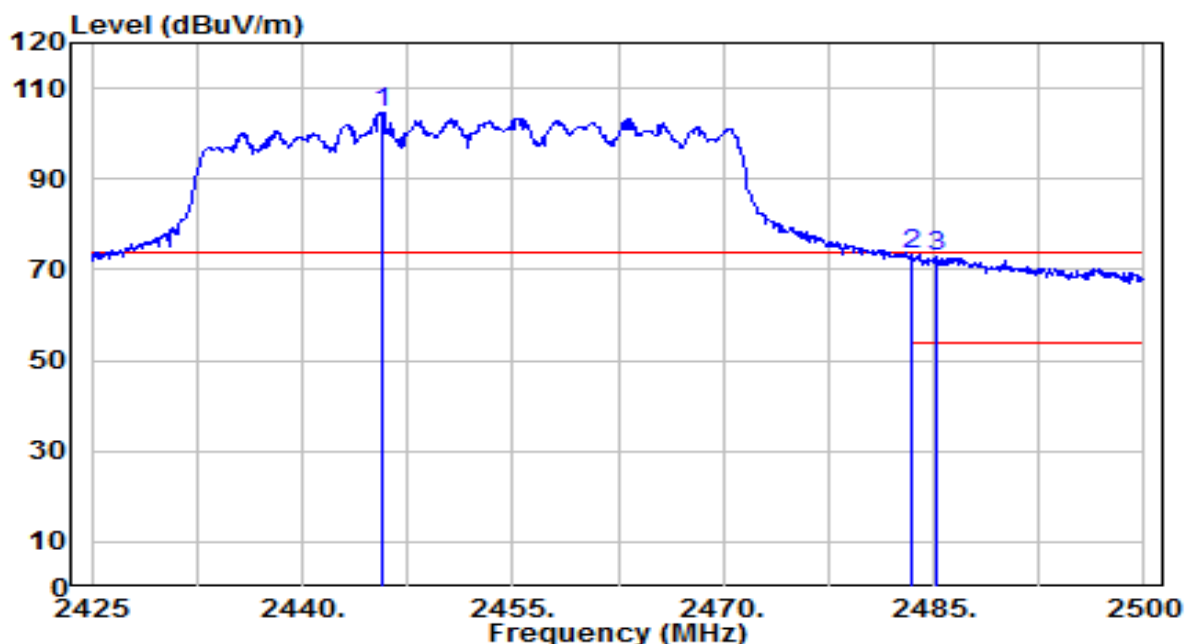


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.775	72.60	32.06	104.66	N/A	N/A	125	10	Peak
2	* 2483.500	40.94	32.20	73.14	-0.86	74.00	125	10	Peak
3	2485.150	40.55	32.20	72.76	-1.24	74.00	125	10	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

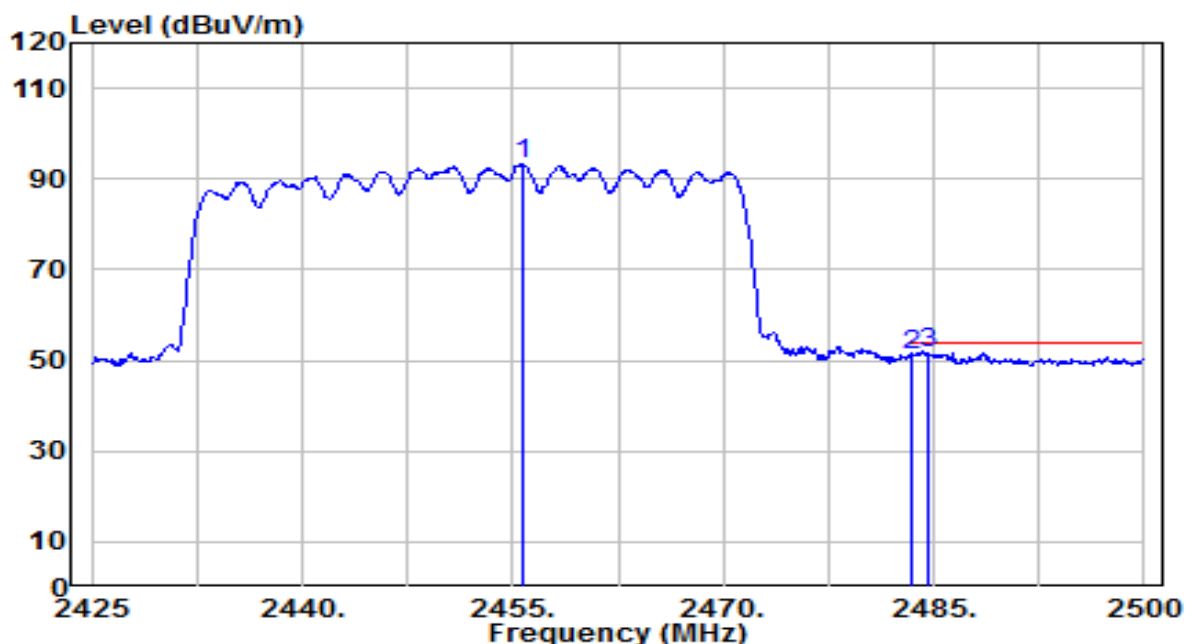


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.750	61.35	32.09	93.44	N/A	N/A	125	10	Average
2	2483.500	19.04	32.20	51.24	-2.76	54.00	125	10	Average
3	* 2484.625	19.48	32.20	51.69	-2.31	54.00	125	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

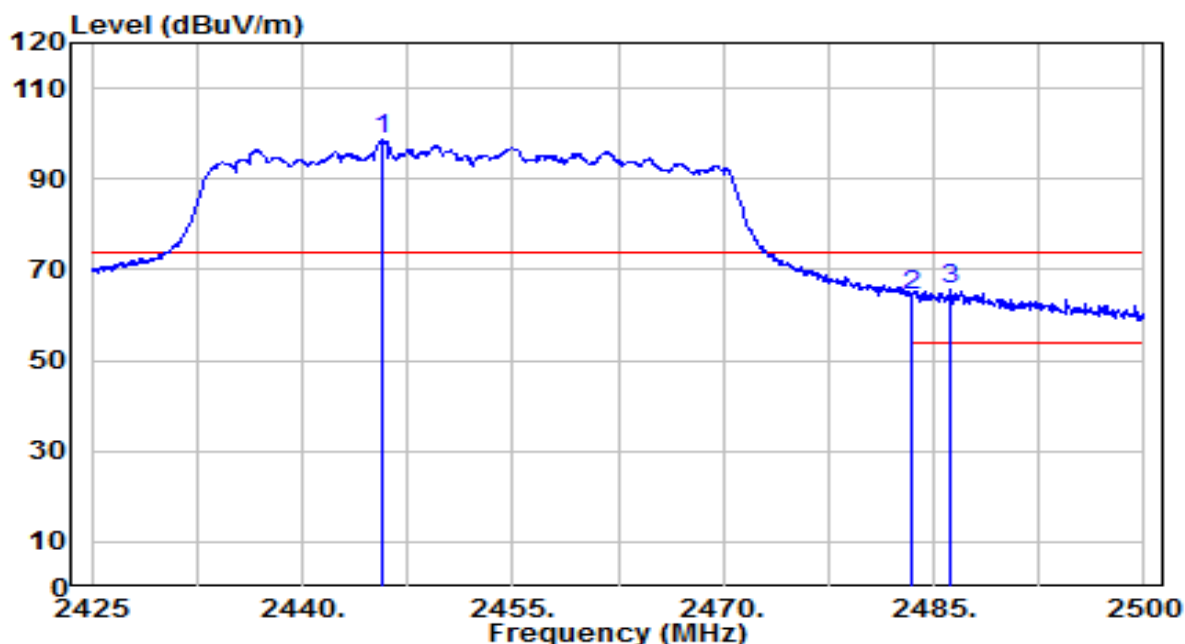


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.700	66.50	32.06	98.55	N/A	N/A	150	210	Peak
2	2483.500	32.32	32.20	64.52	-9.48	74.00	150	210	Peak
3	* 2486.125	33.29	32.21	65.50	-8.50	74.00	150	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-02
Factor	BBHA 9120D	Temp. / Humidity	21°C /61%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

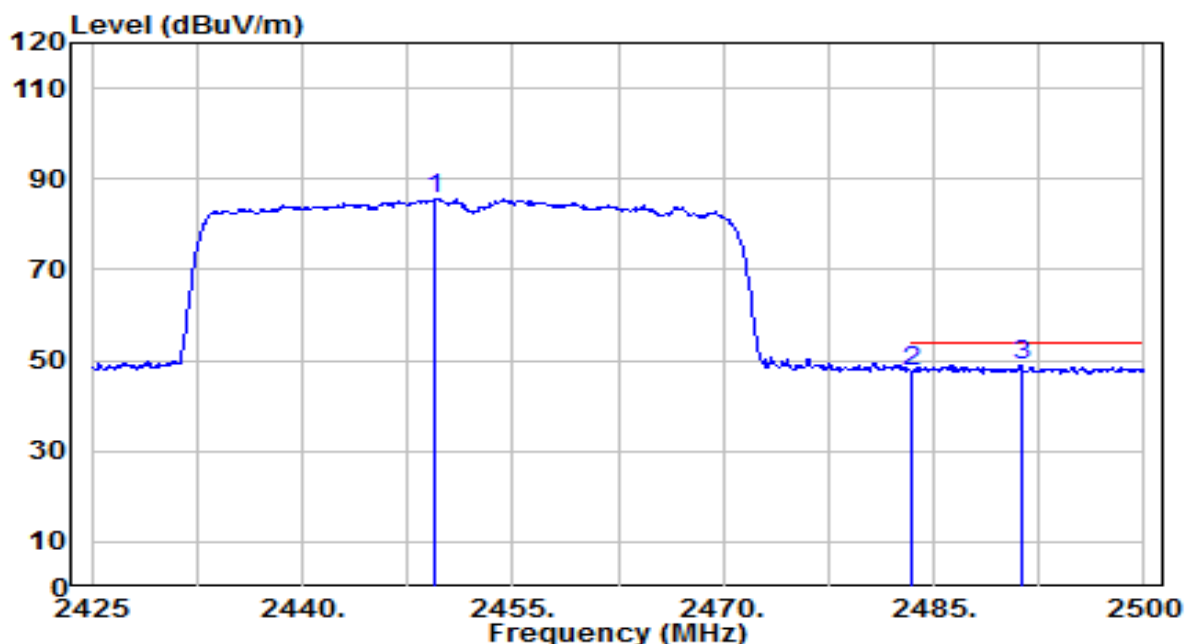

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.525	53.63	32.07	85.70	N/A	N/A	150	210	Average
2	2483.500	15.46	32.20	47.66	-6.34	54.00	150	210	Average
3	* 2491.225	16.66	32.23	48.89	-5.11	54.00	150	210	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

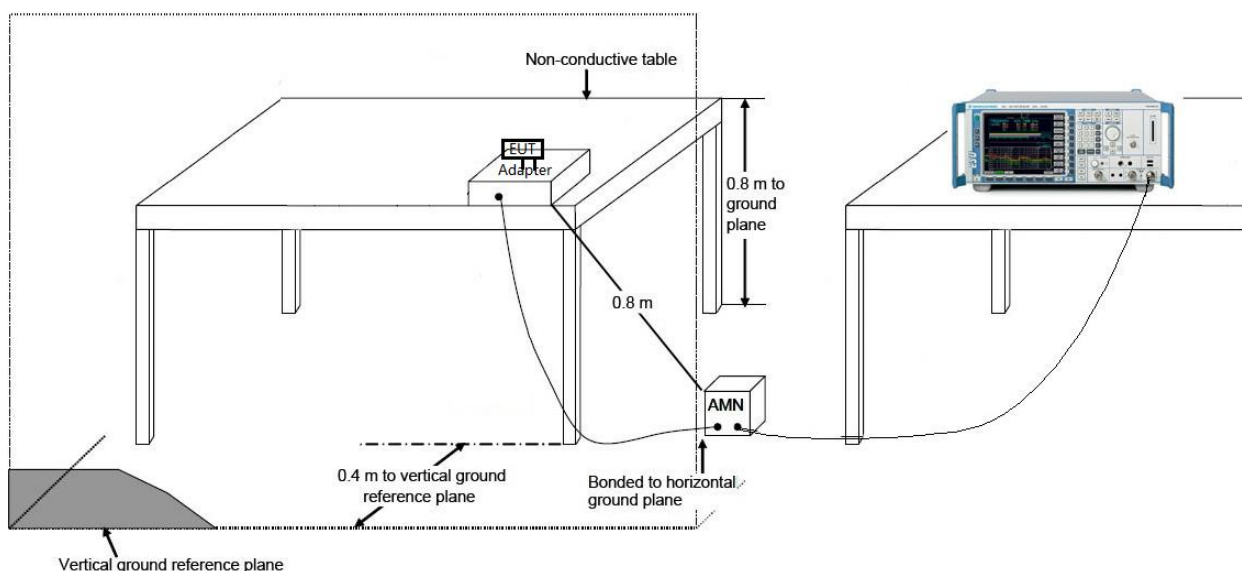

7.8.3. Test Result

EUT	Smart touch panel table	Date of Test	2025-02-25
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.0°C /58%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

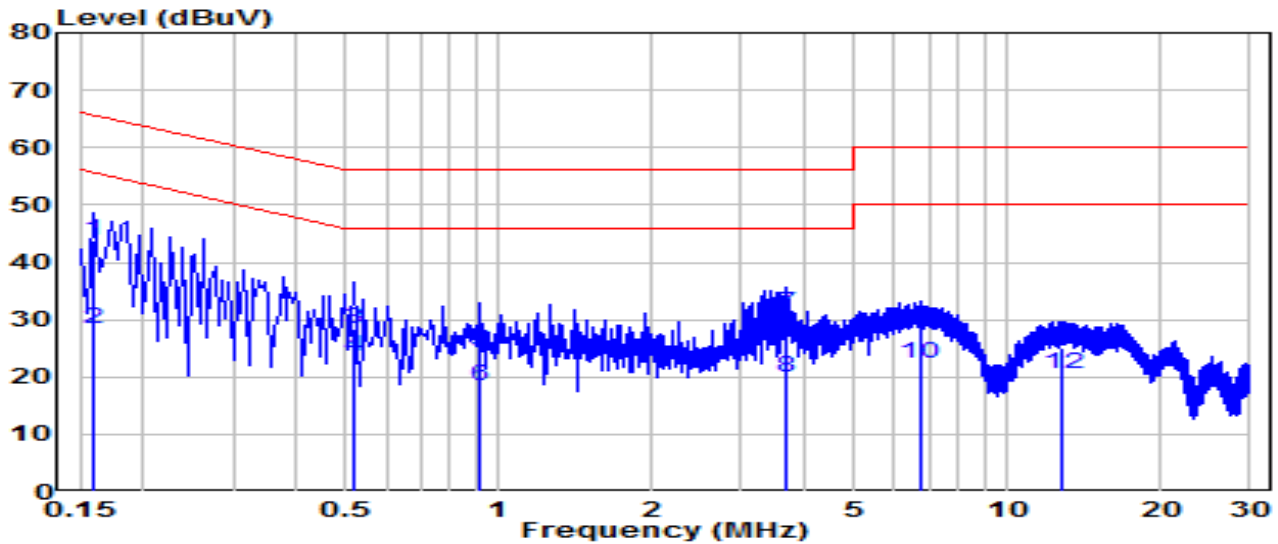


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.159	34.17	9.63	43.80	-21.72	65.52	QP
2	*	0.159	18.62	9.63	28.25	-27.26	55.52	Average
3		0.519	18.67	9.65	28.32	-27.68	56.00	QP
4		0.519	13.94	9.65	23.60	-22.40	46.00	Average
5		0.910	14.68	9.67	24.36	-31.64	56.00	QP
6		0.910	8.67	9.67	18.35	-27.65	46.00	Average
7		3.651	21.27	9.72	30.99	-25.01	56.00	QP
8		3.651	10.17	9.72	19.90	-26.10	46.00	Average
9		6.719	18.58	9.79	28.37	-31.63	60.00	QP
10		6.719	12.46	9.79	22.25	-27.75	50.00	Average
11		12.749	15.23	9.89	25.12	-34.88	60.00	QP
12		12.749	10.66	9.89	20.55	-29.45	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Smart touch panel table	Date of Test	2025-02-25
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.0°C /58%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

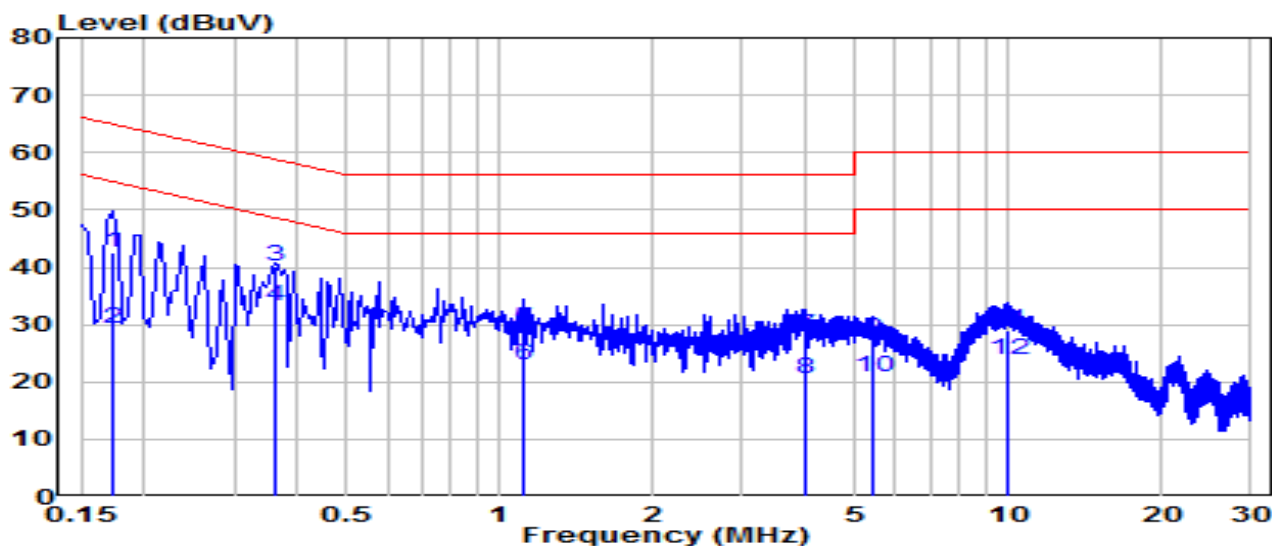

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.172	32.86	9.63	42.49	-22.34	64.84	QP
2		0.172	19.68	9.63	29.31	-25.53	54.84	Average
3	*	0.361	30.44	9.64	40.08	-18.61	58.69	QP
4	*	0.361	23.49	9.64	33.13	-15.57	48.69	Average
5		1.113	19.62	9.68	29.30	-26.70	56.00	QP
6		1.113	13.11	9.68	22.79	-23.21	46.00	Average
7		3.966	18.35	9.74	28.09	-27.91	56.00	QP
8		3.966	10.86	9.74	20.60	-25.40	46.00	Average
9		5.405	17.59	9.77	27.36	-32.64	60.00	QP
10		5.405	10.95	9.77	20.72	-29.28	50.00	Average
11		9.946	19.13	9.89	29.02	-30.98	60.00	QP
12		9.946	13.90	9.89	23.78	-26.22	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Smart touch panel tablet**, is in compliance with Part 15C of the FCC Rules.

Appendix A : Test Photograph

Refer to “2502TWN801-UT” file.

Appendix B : External Photograph

Refer to “2502TWN801-UE” file.

Appendix C : Internal Photograph

Refer to “2502TWN801-UI” file.

————— The End —————