


EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

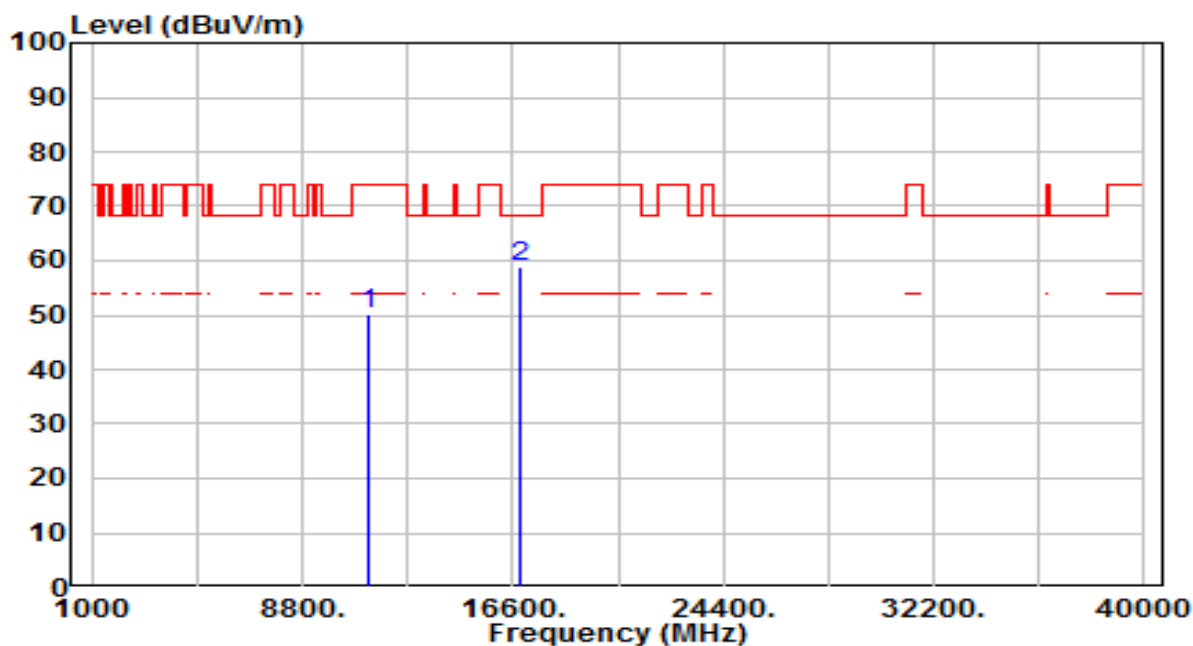


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	31.03	19.04	50.07	-23.93	74.00	100	306	Peak
2	* 16830.000	35.84	22.86	58.69	-9.51	68.20	100	81	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

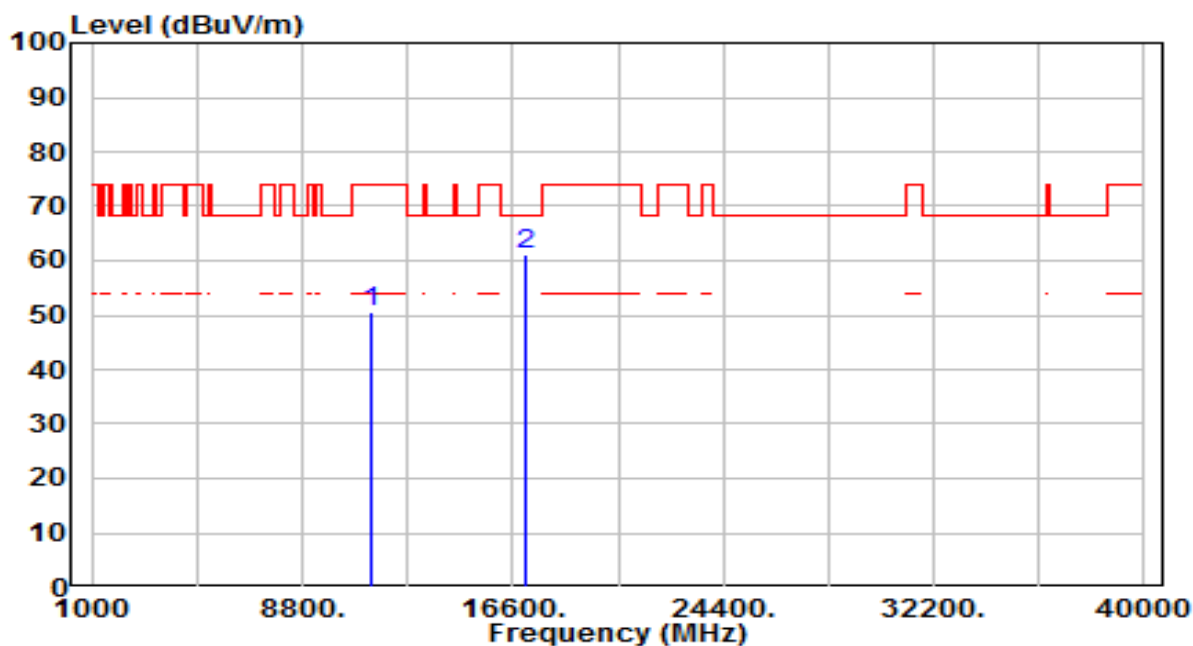


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	31.03	19.35	50.39	-23.61	74.00	100	280	Peak
2	* 17070.000	36.80	24.52	61.32	-6.88	68.20	100	306	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

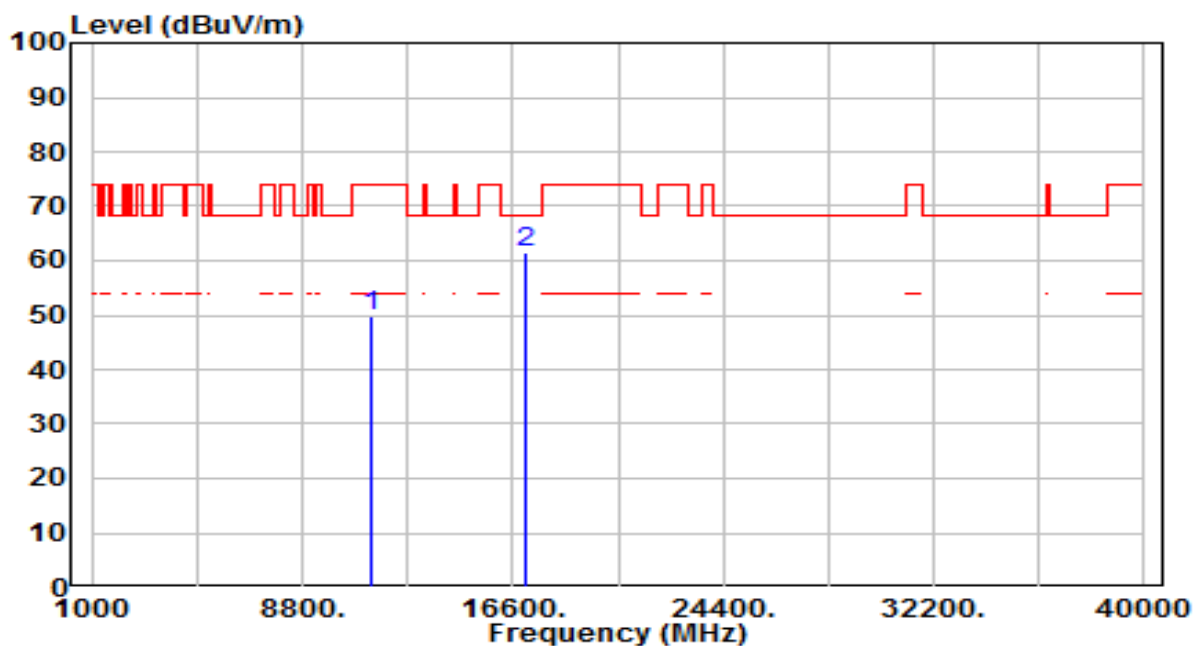


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	30.47	19.35	49.83	-24.17	74.00	100	59	Peak
2	* 17070.000	36.83	24.52	61.35	-6.85	68.20	100	49	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

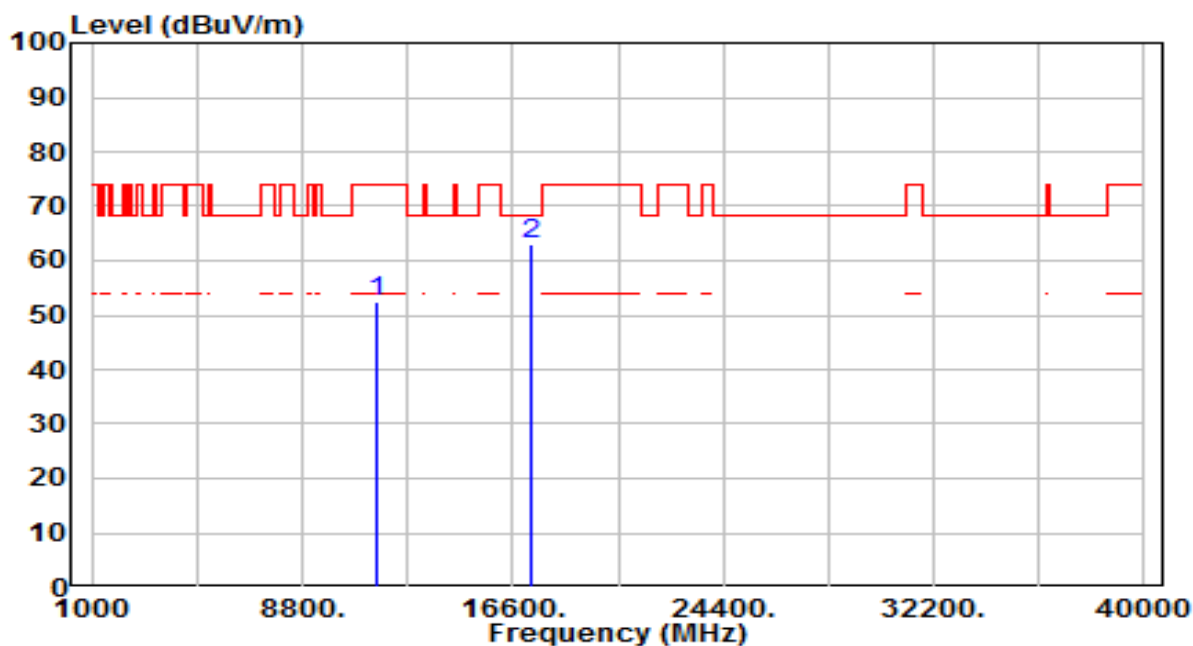


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	32.85	19.48	52.33	-21.67	74.00	100	337	Peak
2	* 17325.000	36.46	26.48	62.94	-5.26	68.20	100	188	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

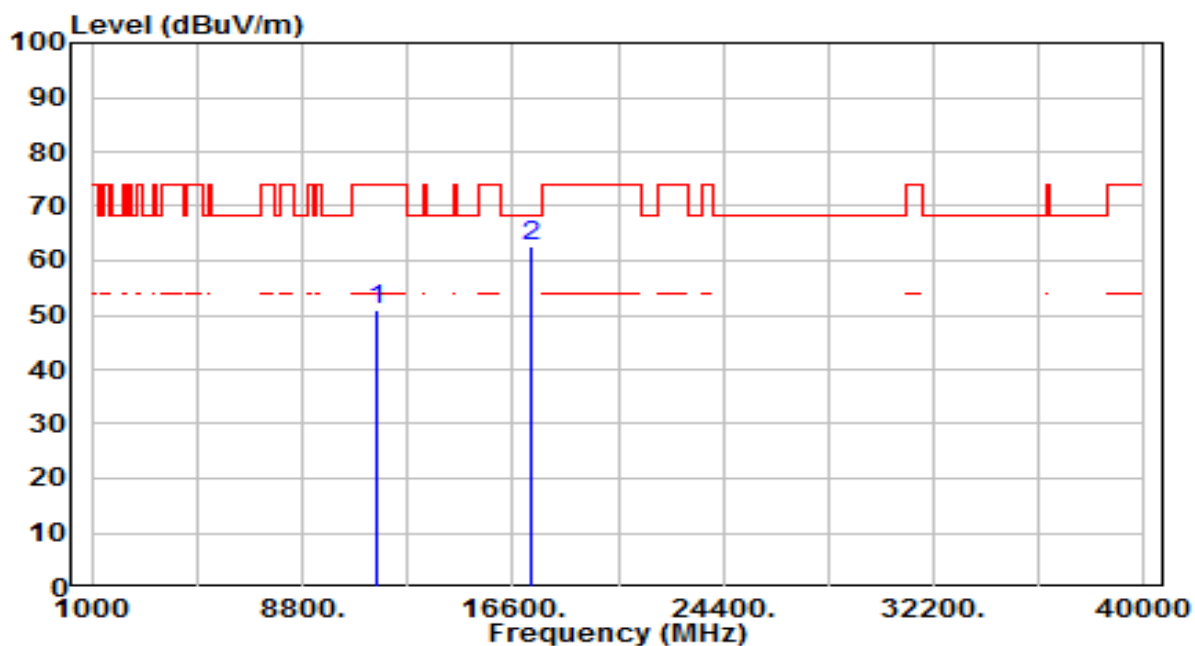


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	31.37	19.48	50.85	-23.15	74.00	100	300	Peak
2	* 17325.000	36.15	26.48	62.64	-5.56	68.20	100	331	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

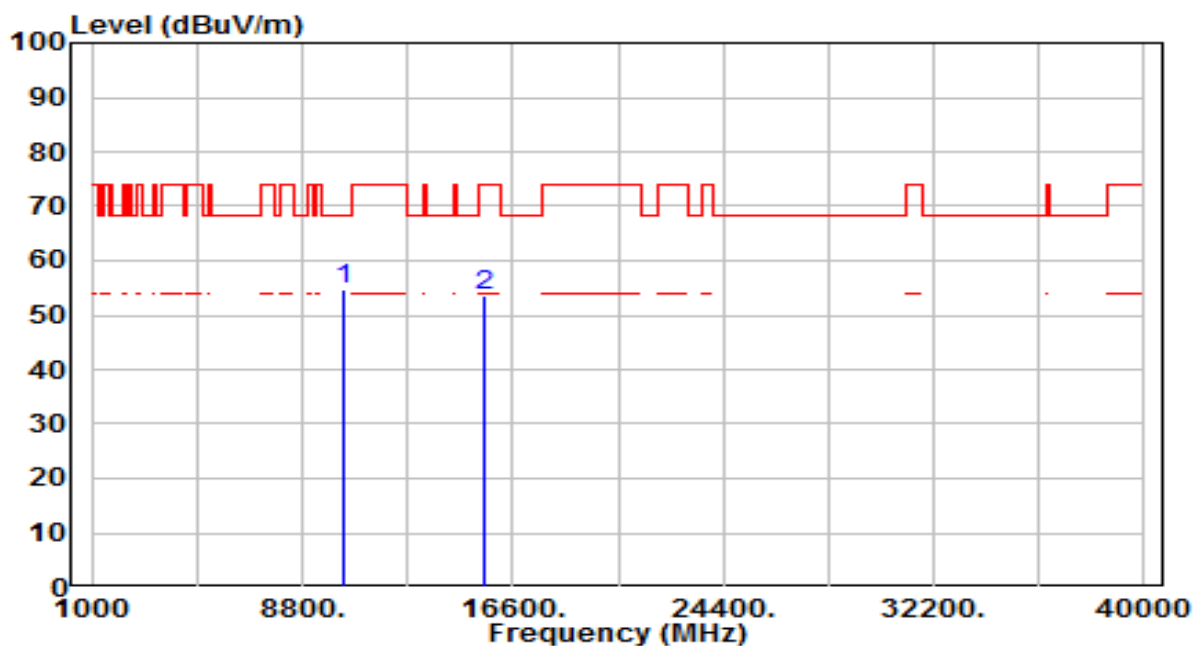


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	37.68	17.21	54.89	-13.31	68.20	100	308	Peak
2	15540.000	33.45	20.07	53.52	-20.48	74.00	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

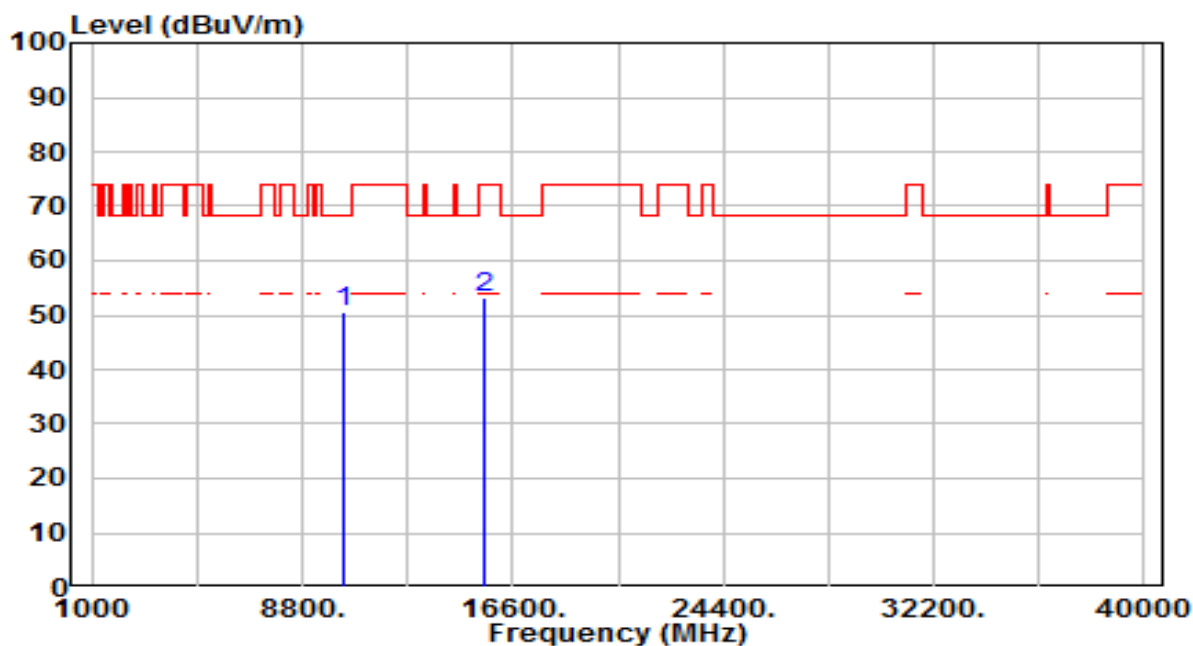


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	33.27	17.21	50.48	-17.72	68.20	100	290	Peak
2	15540.000	32.98	20.07	53.05	-20.95	74.00	100	102	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

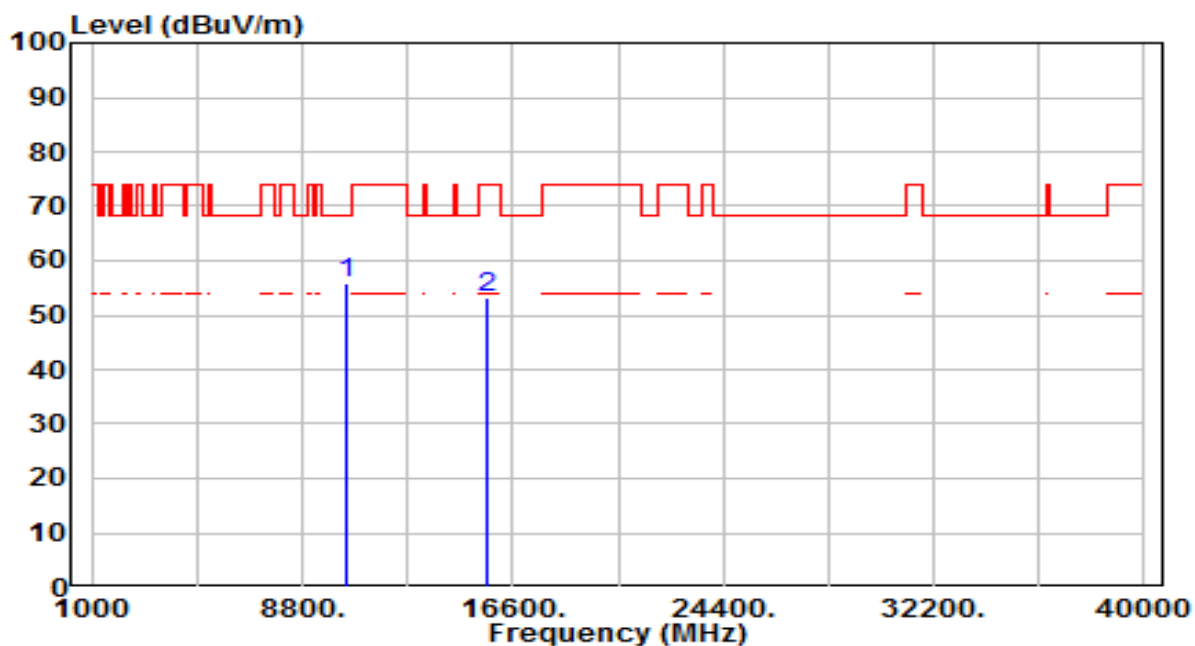


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	38.49	17.55	56.04	-12.16	68.20	100	302	Peak
2	15660.000	33.53	19.81	53.34	-20.66	74.00	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

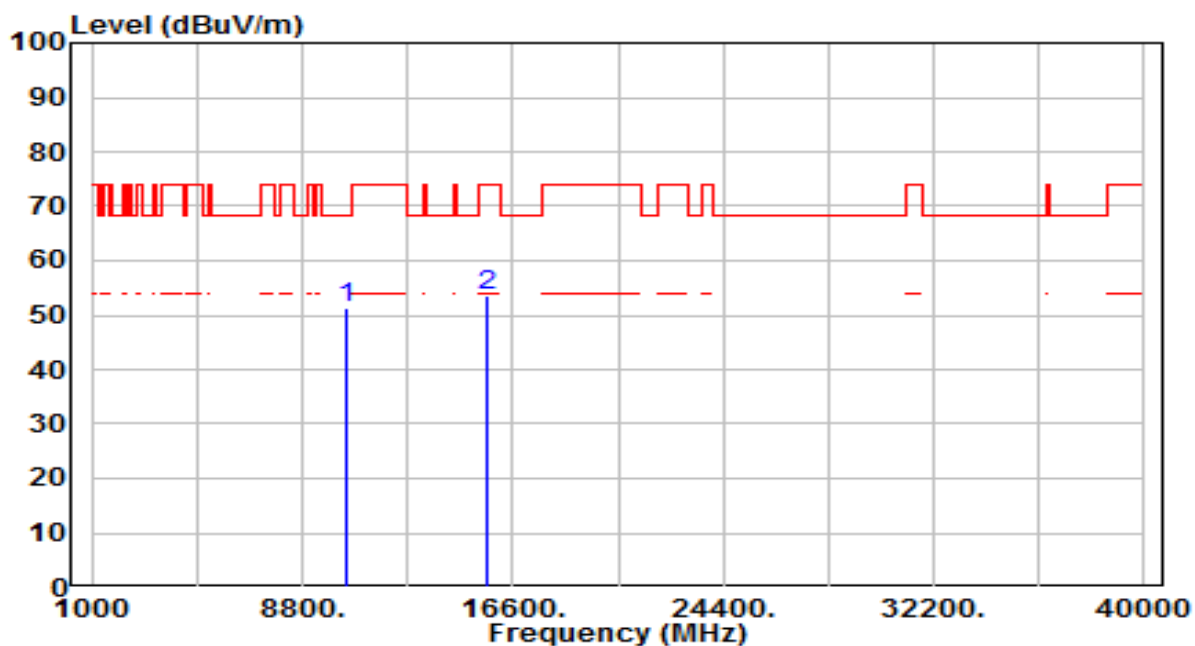


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	33.79	17.55	51.34	-16.86	68.20	100	253	Peak
2	15660.000	33.60	19.81	53.41	-20.59	74.00	100	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

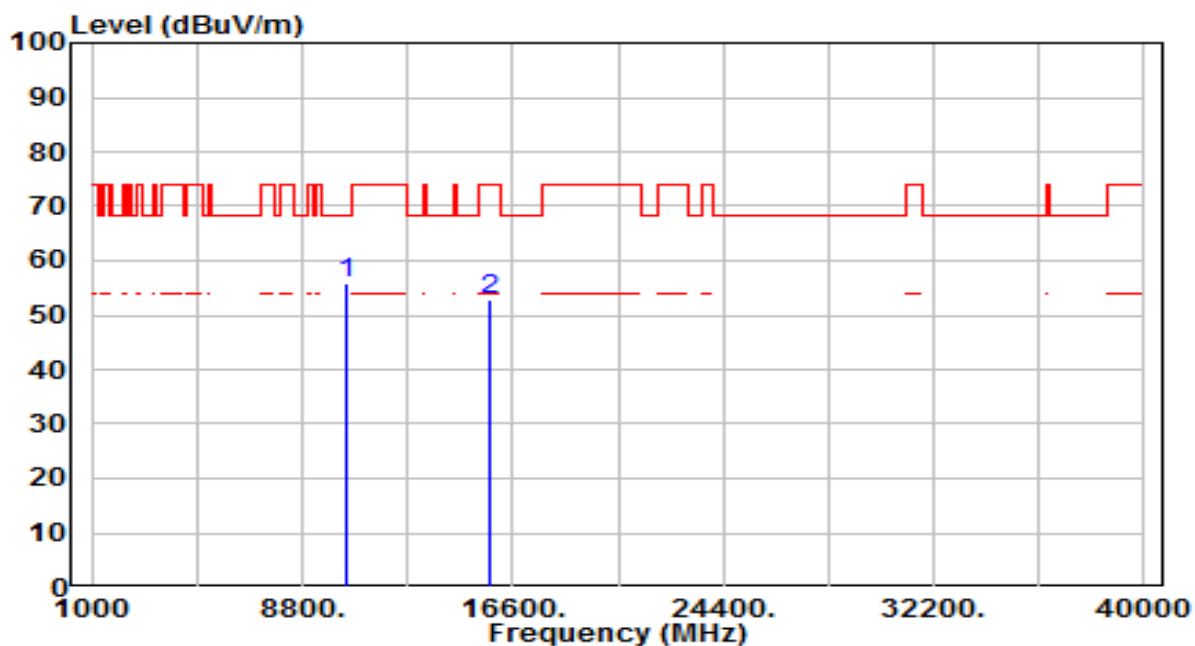


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	38.15	17.72	55.87	-12.33	68.20	100	318	Peak
2	15720.000	33.24	19.68	52.92	-21.08	74.00	100	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

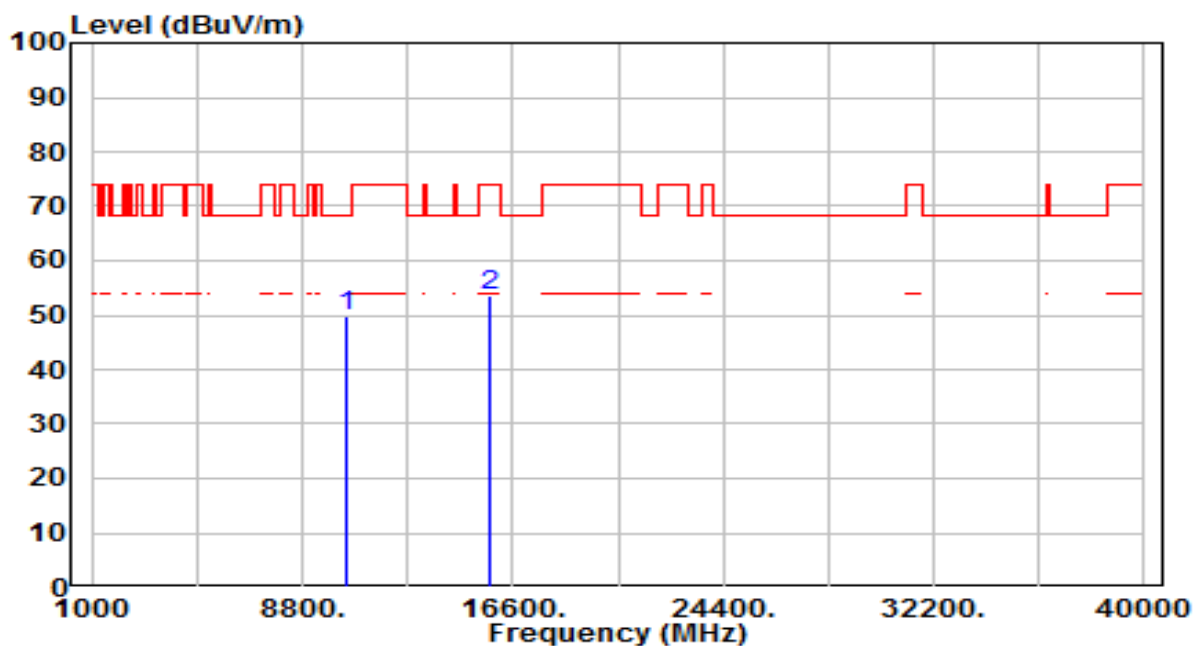


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	32.26	17.72	49.98	-18.22	68.20	100	254	Peak
2	15720.000	33.80	19.68	53.47	-20.53	74.00	100	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

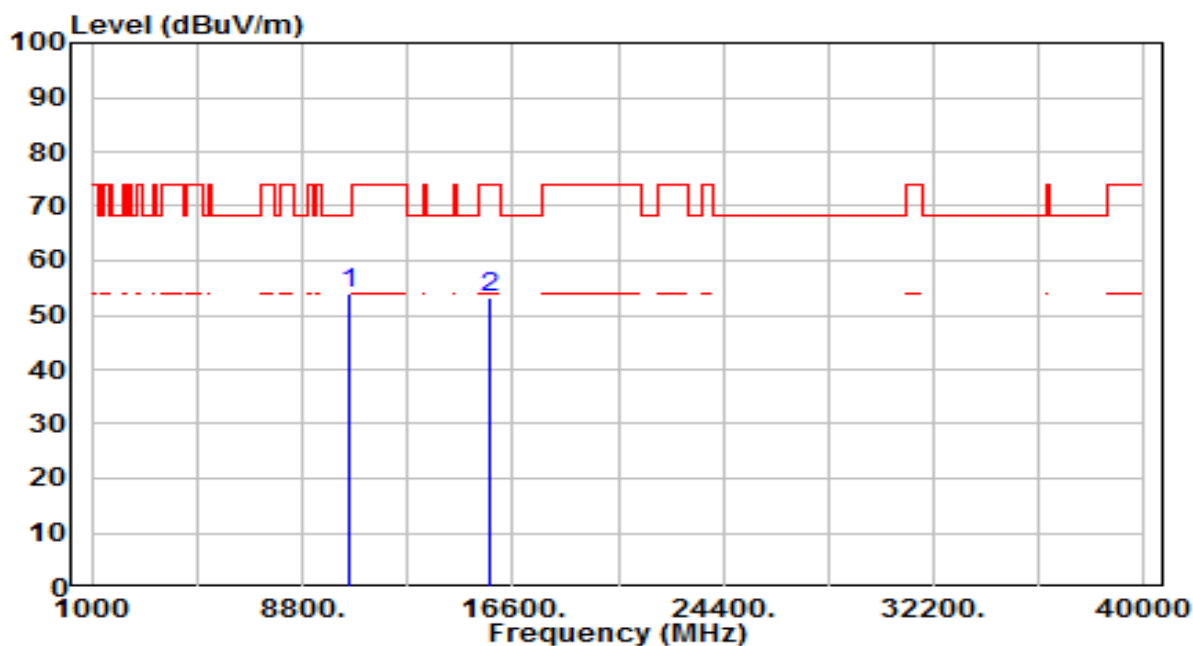


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	36.14	17.84	53.98	-14.22	68.20	100	302	Peak
2	15780.000	33.70	19.55	53.25	-20.75	74.00	100	286	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

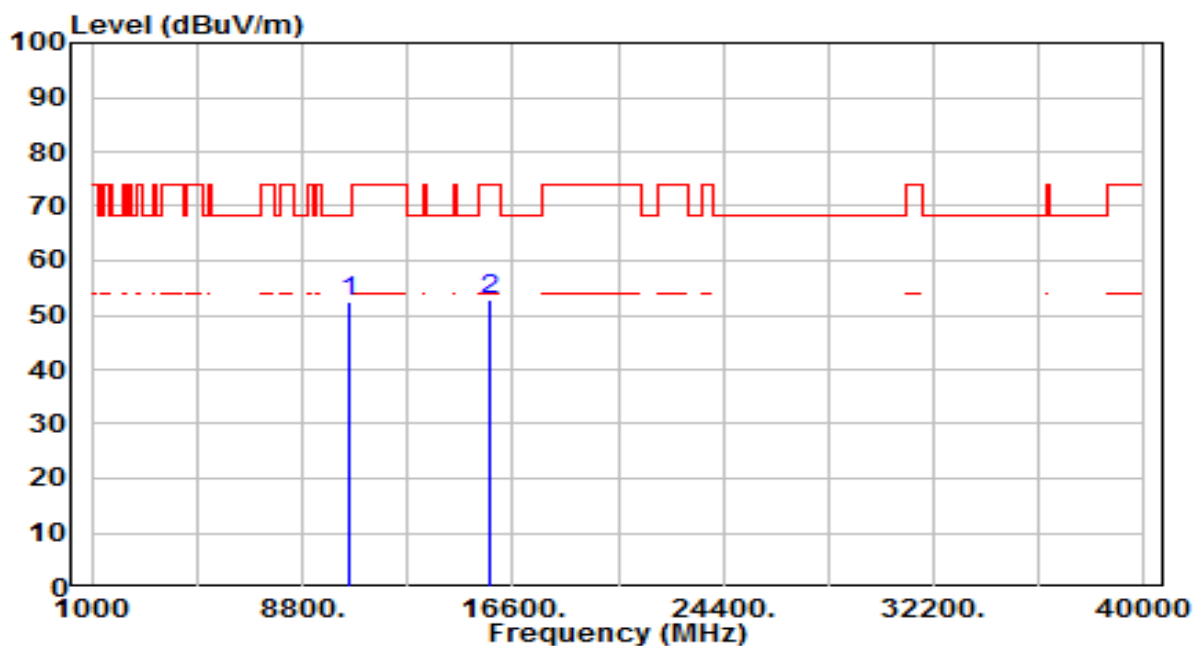


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	34.60	17.84	52.44	-15.76	68.20	100	254	Peak
2	15780.000	33.35	19.55	52.90	-21.10	74.00	100	76	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

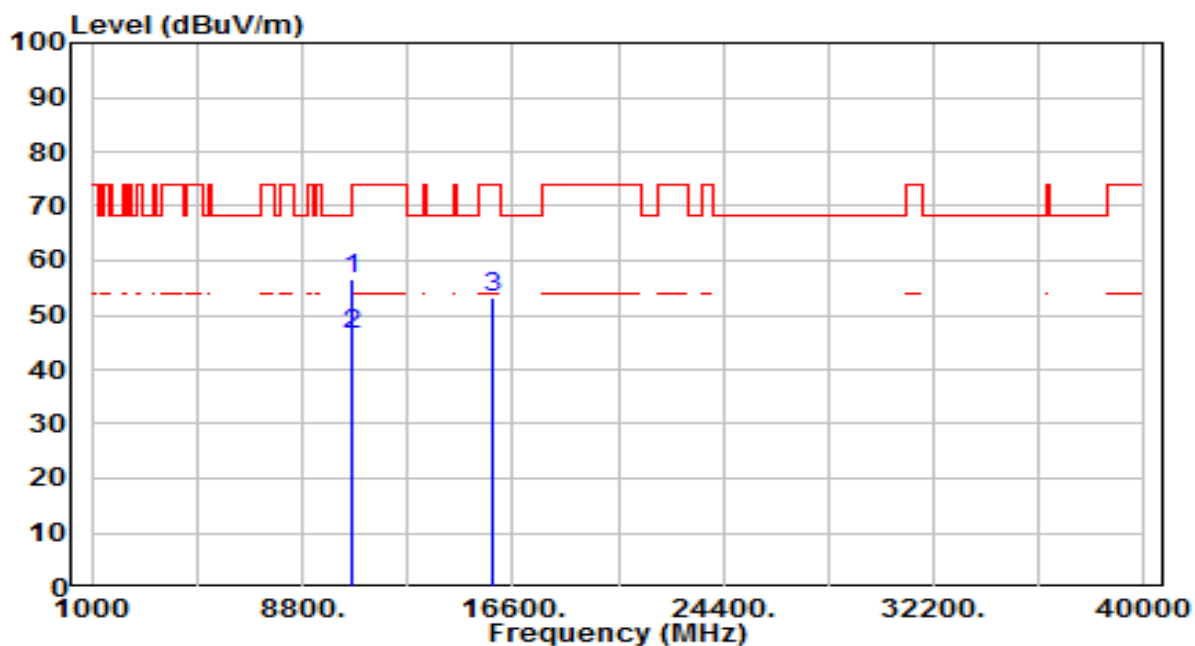


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	38.65	17.97	56.62	-11.58	68.20	100	317	Peak
2	*	10600.000	28.30	17.97	46.27	-7.73	54.00	100	317	Average
3		15900.000	34.06	19.29	53.35	-20.65	74.00	100	117	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

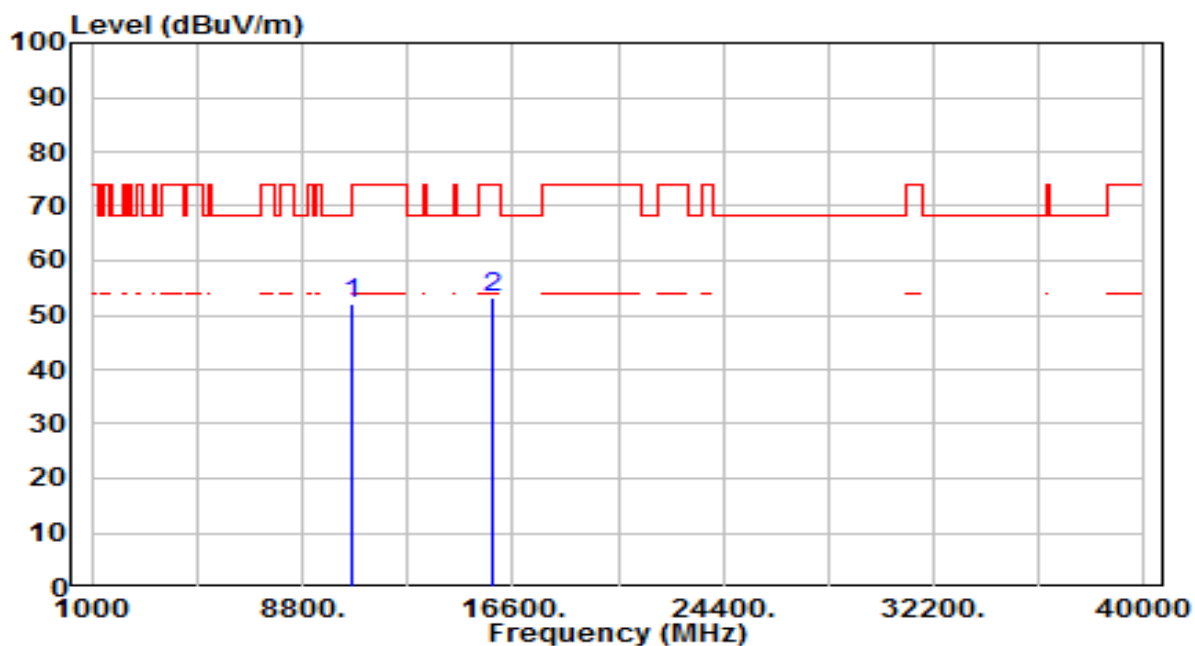


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	34.21	17.97	52.18	-16.02	68.20	100	274	Peak
2	15900.000	33.75	19.29	53.04	-20.96	74.00	100	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

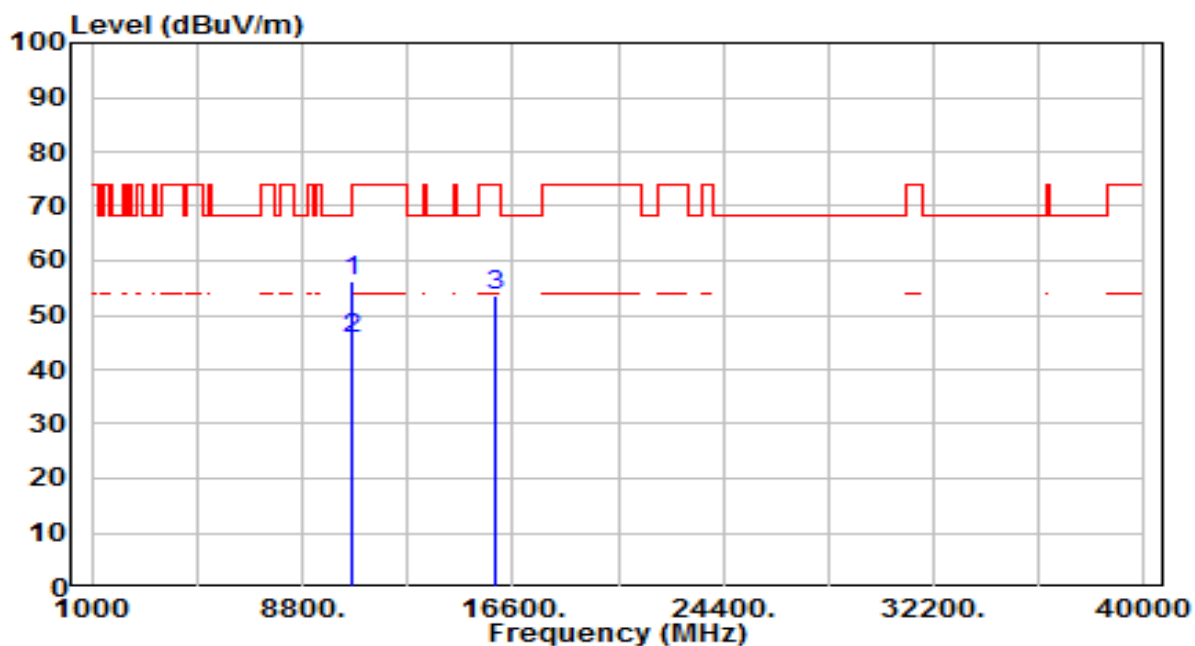


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10640.000	38.03	18.03	56.06	-17.94	74.00	100	316	Peak
2	*	10640.000	27.70	18.03	45.73	-8.27	54.00	100	316	Average
3		15960.000	34.26	19.16	53.42	-20.58	74.00	100	138	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

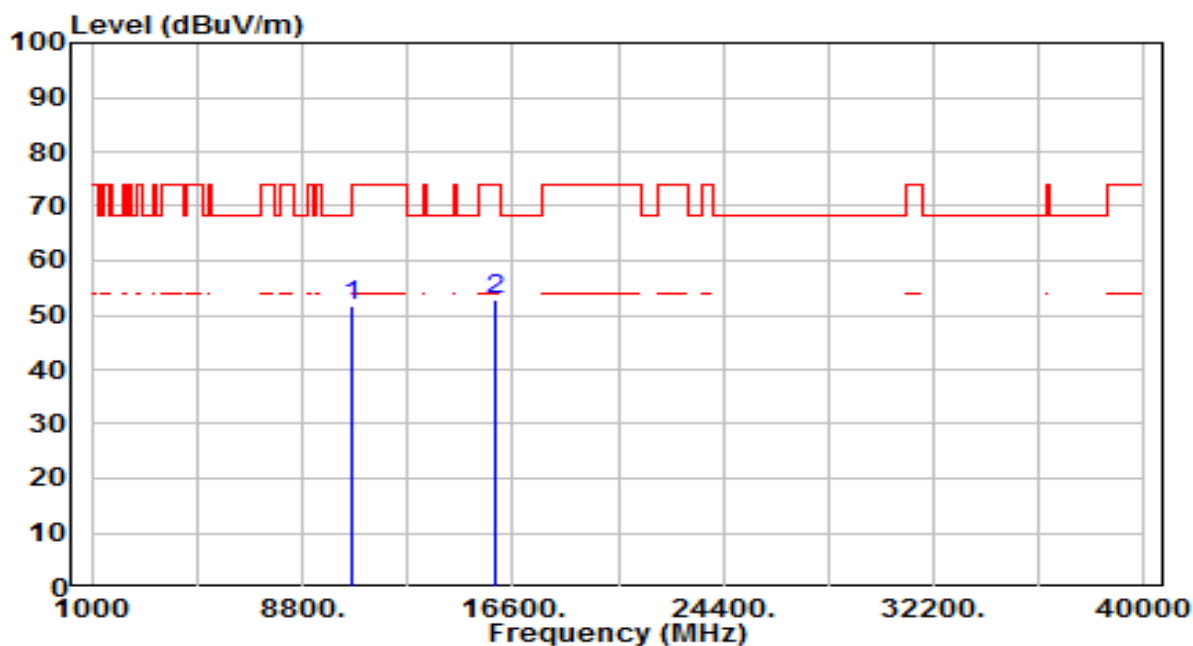


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	33.80	18.03	51.83	-22.17	74.00	100	311	Peak
2	* 15960.000	33.82	19.16	52.97	-21.03	74.00	100	122	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

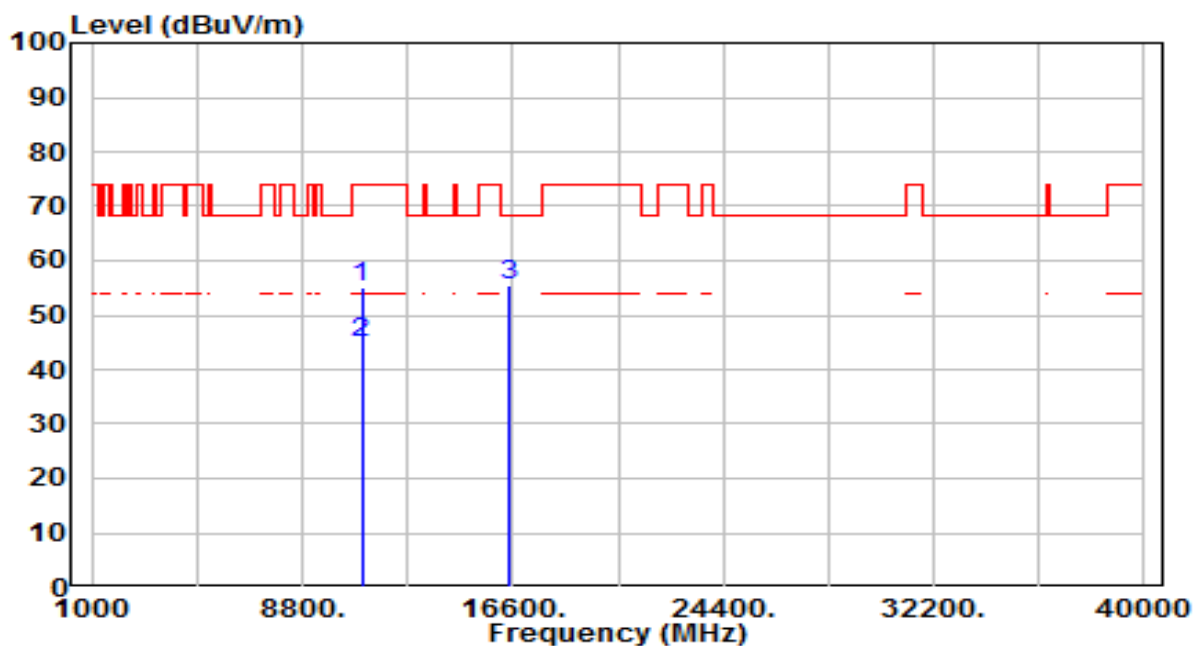


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	36.61	18.61	55.22	-18.78	74.00	100	5	Peak
2	* 11000.000	26.20	18.61	44.81	-9.19	54.00	100	5	Average
3	* 16500.000	34.94	20.68	55.62	-12.58	68.20	100	321	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

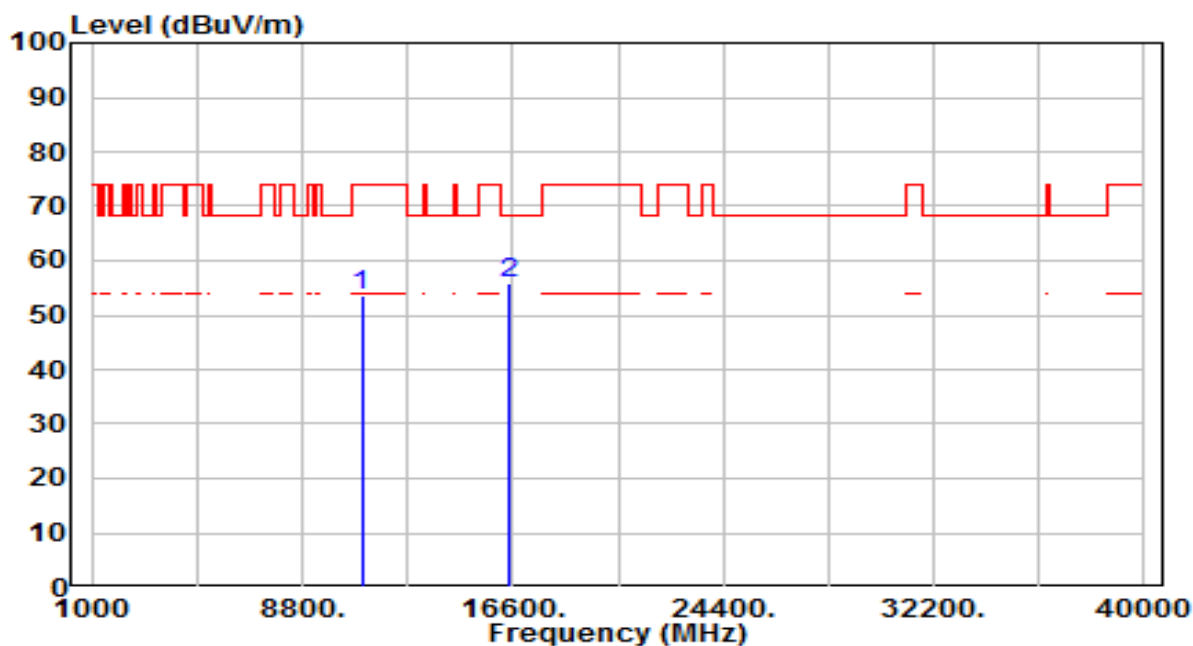


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	34.80	18.61	53.41	-20.59	74.00	100	321	Peak
2	* 16500.000	35.06	20.68	55.73	-12.47	68.20	100	169	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

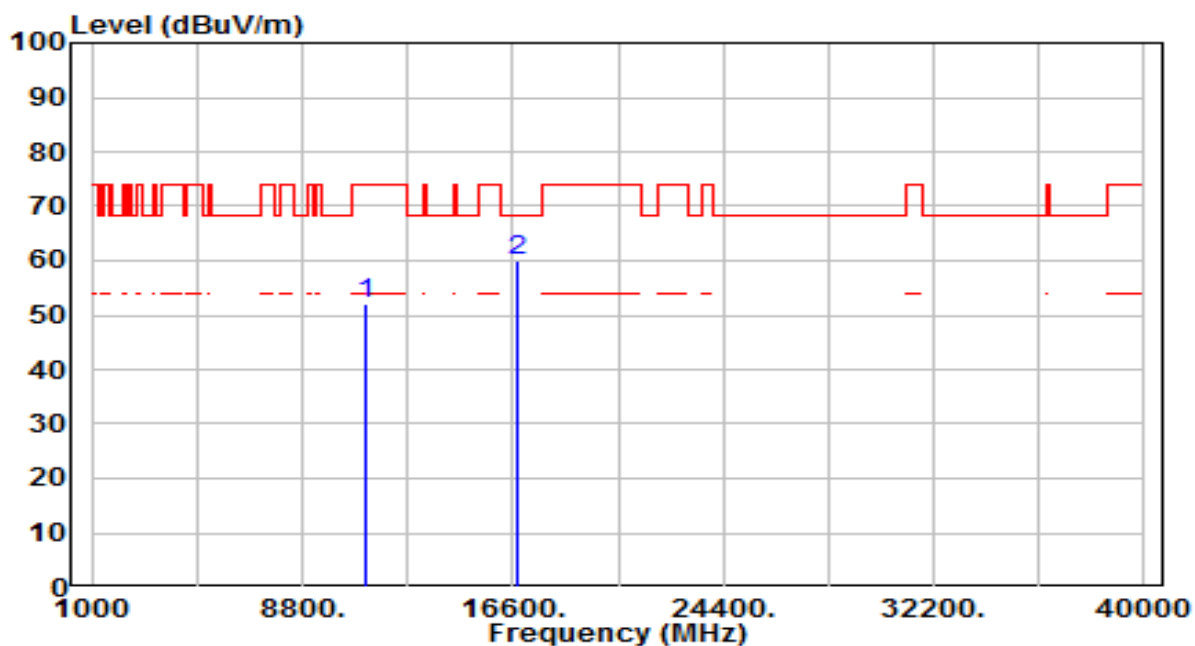


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	33.14	18.92	52.07	-21.93	74.00	100	3	Peak
2	* 16740.000	37.63	22.26	59.89	-8.31	68.20	100	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1	Test Voltage	AC 120V/60Hz

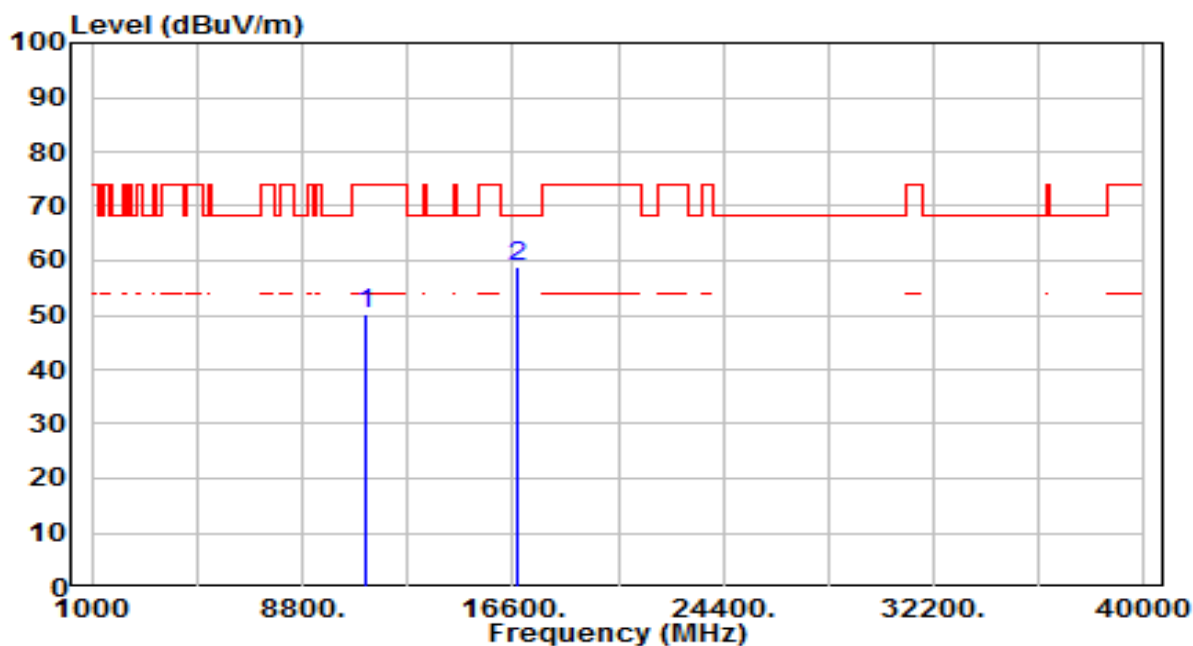


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	31.26	18.92	50.19	-23.81	74.00	100	322	Peak
2	* 16740.000	36.70	22.26	58.96	-9.24	68.20	100	206	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

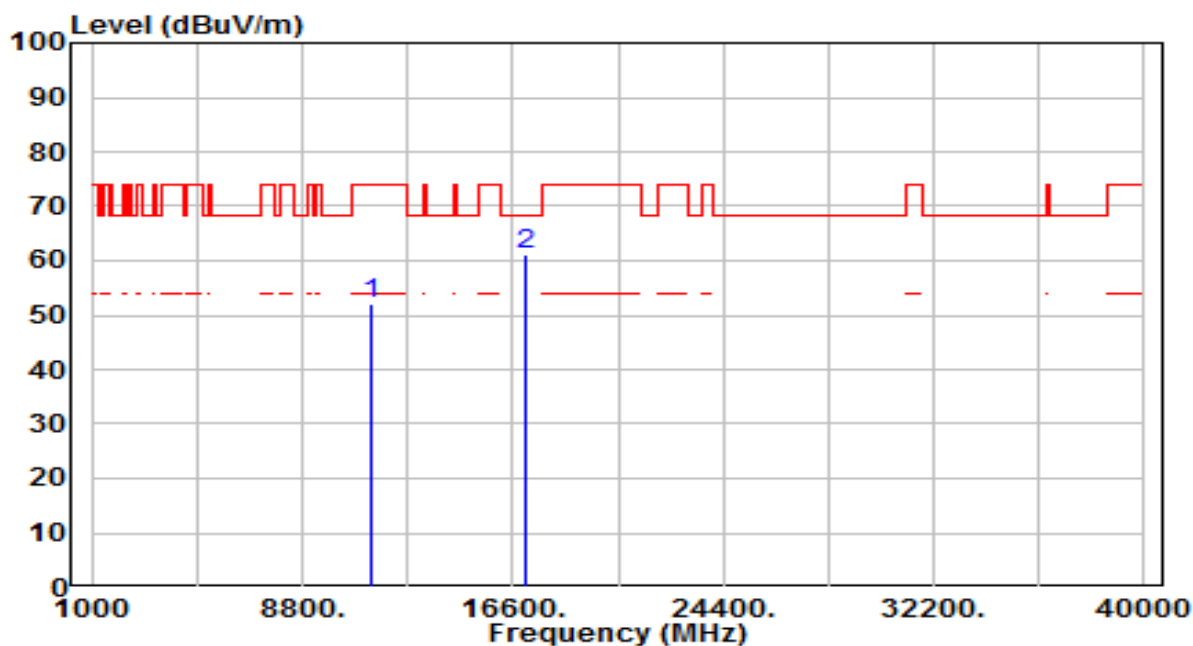


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	32.85	19.39	52.25	-21.75	74.00	100	354	Peak
2	* 17100.000	36.51	24.75	61.26	-6.94	68.20	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

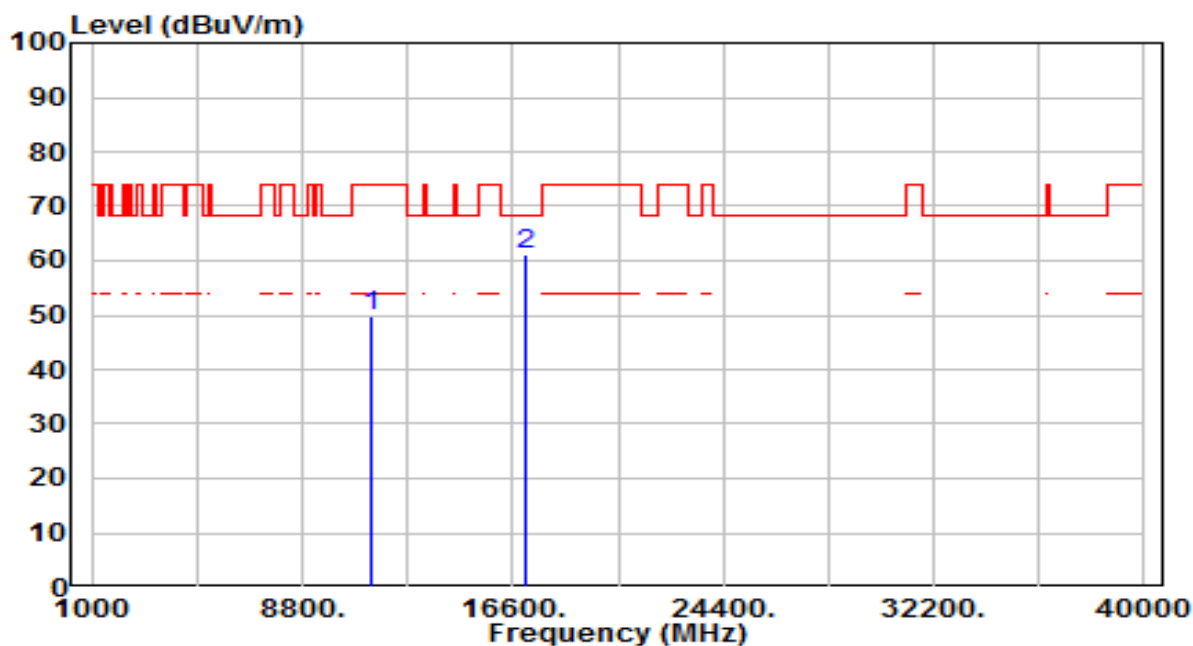


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	30.56	19.39	49.96	-24.04	74.00	100	59	Peak
2	* 17100.000	36.28	24.75	61.03	-7.17	68.20	100	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

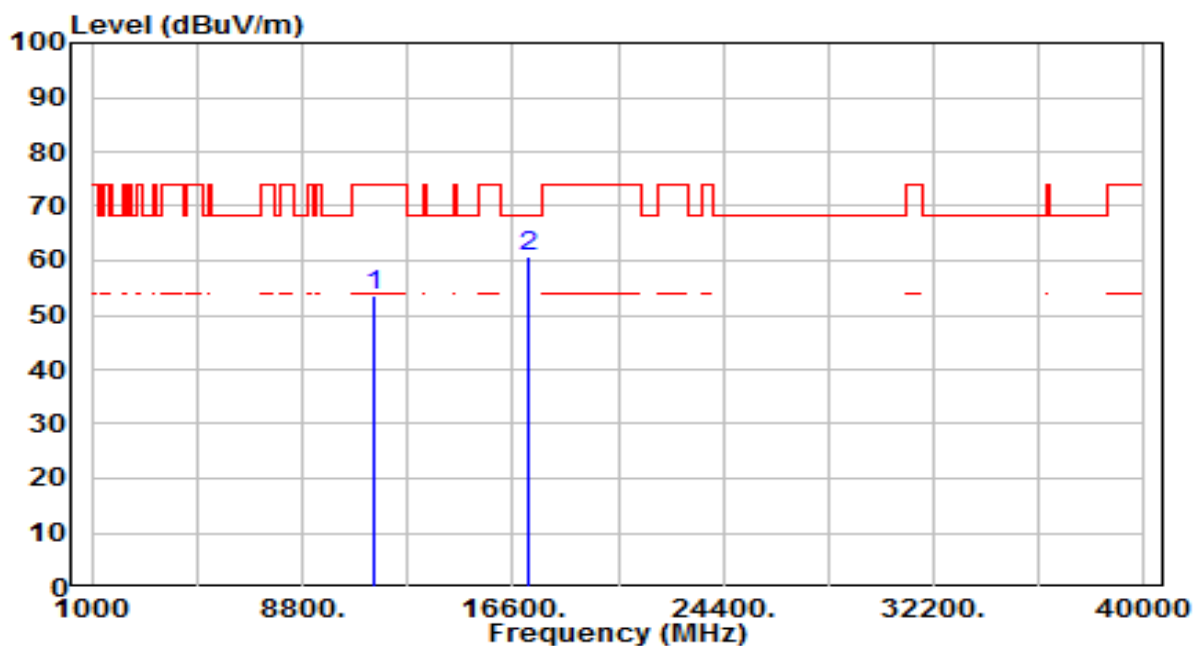


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	34.12	19.47	53.59	-20.41	74.00	100	318	Peak
2	* 17160.000	35.50	25.21	60.71	-7.49	68.20	100	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

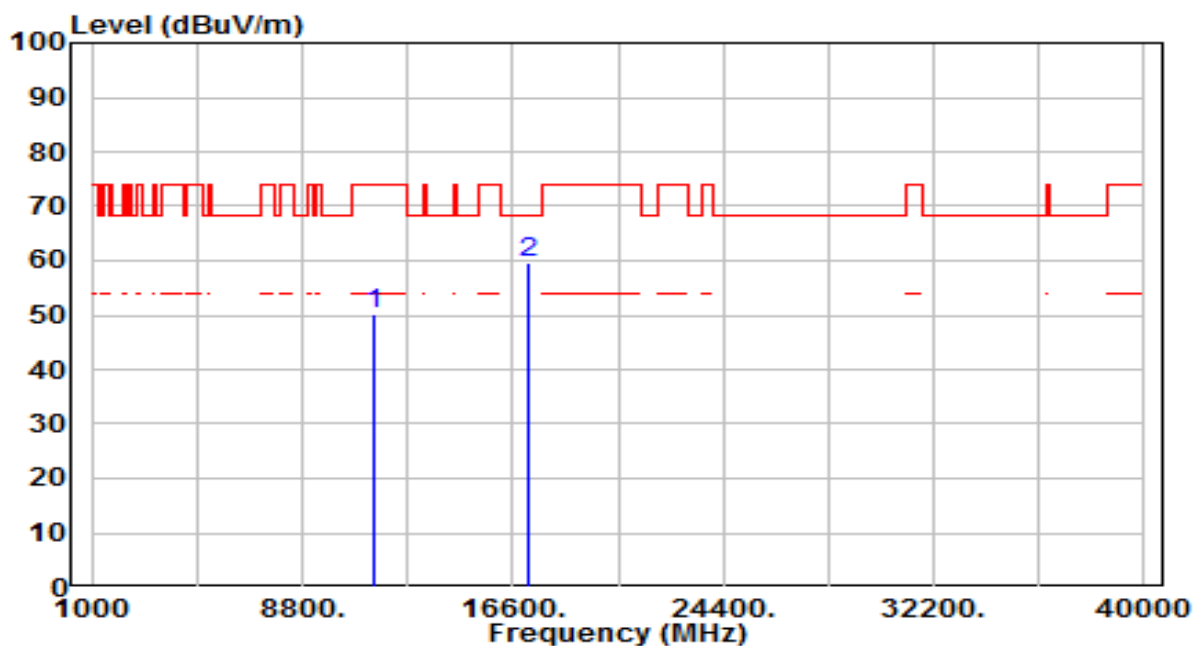


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	30.69	19.47	50.16	-23.84	74.00	100	23	Peak
2	* 17160.000	34.42	25.21	59.63	-8.57	68.20	100	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

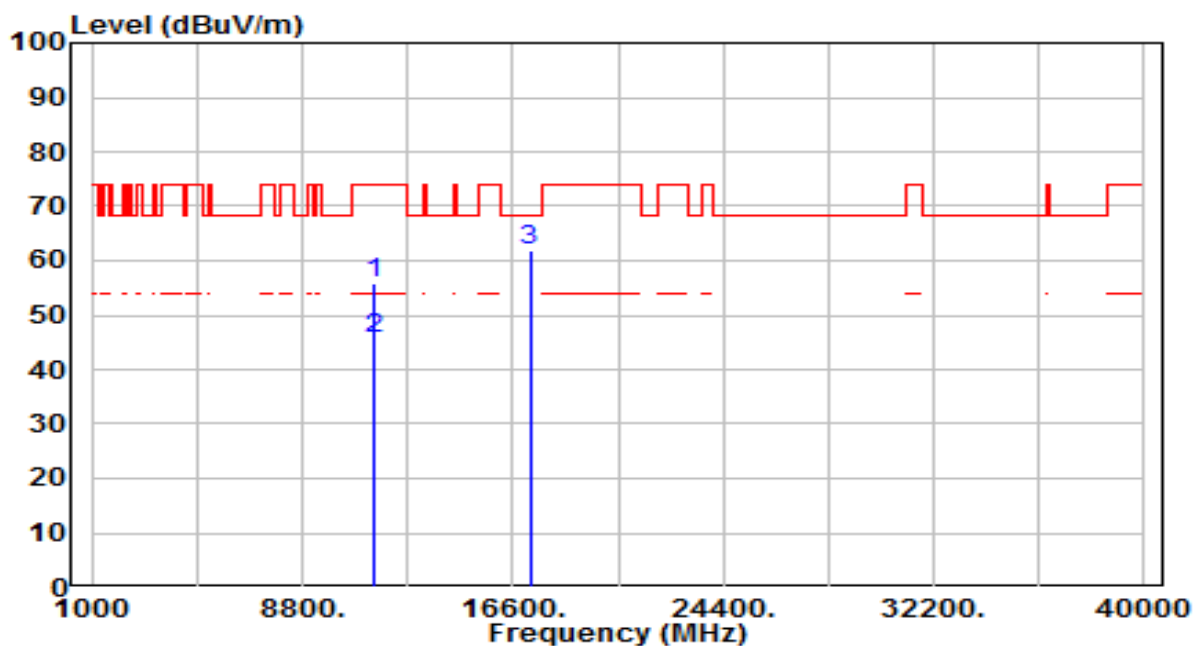


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	36.39	19.57	55.96	-18.04	74.00	100	290	Peak
2	* 11490.000	26.00	19.57	45.57	-8.43	54.00	100	290	Average
3	* 17235.000	36.18	25.79	61.97	-6.23	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

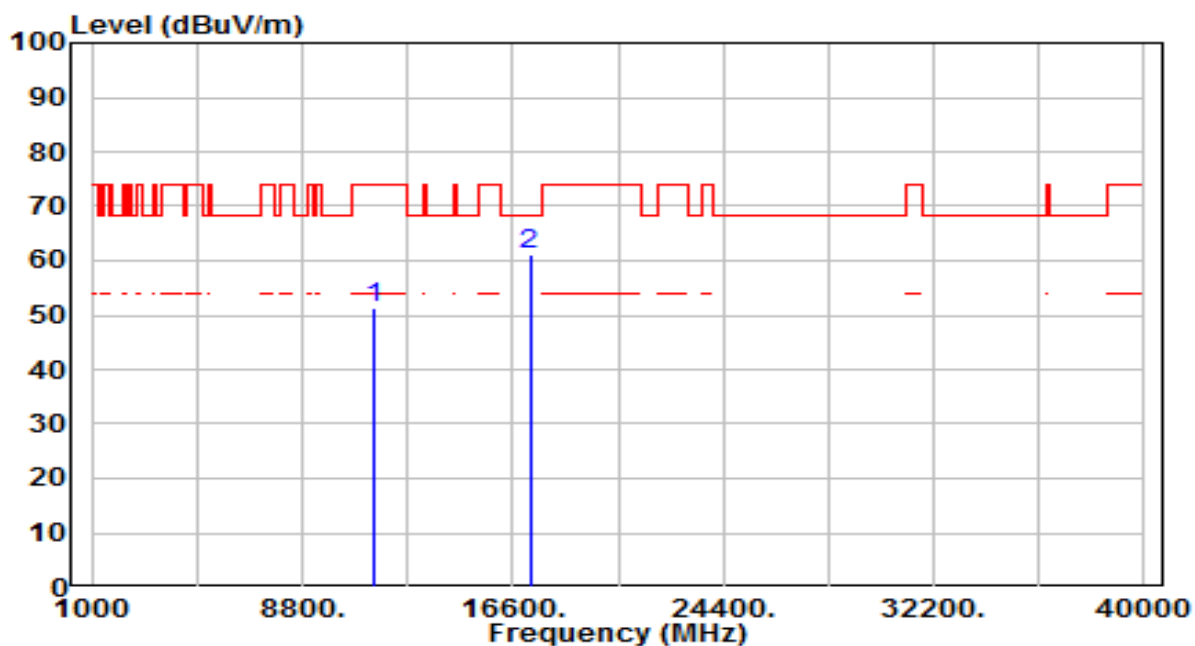


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	31.85	19.57	51.42	-22.58	74.00	100	128	Peak
2	* 17235.000	35.38	25.79	61.17	-7.03	68.20	100	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

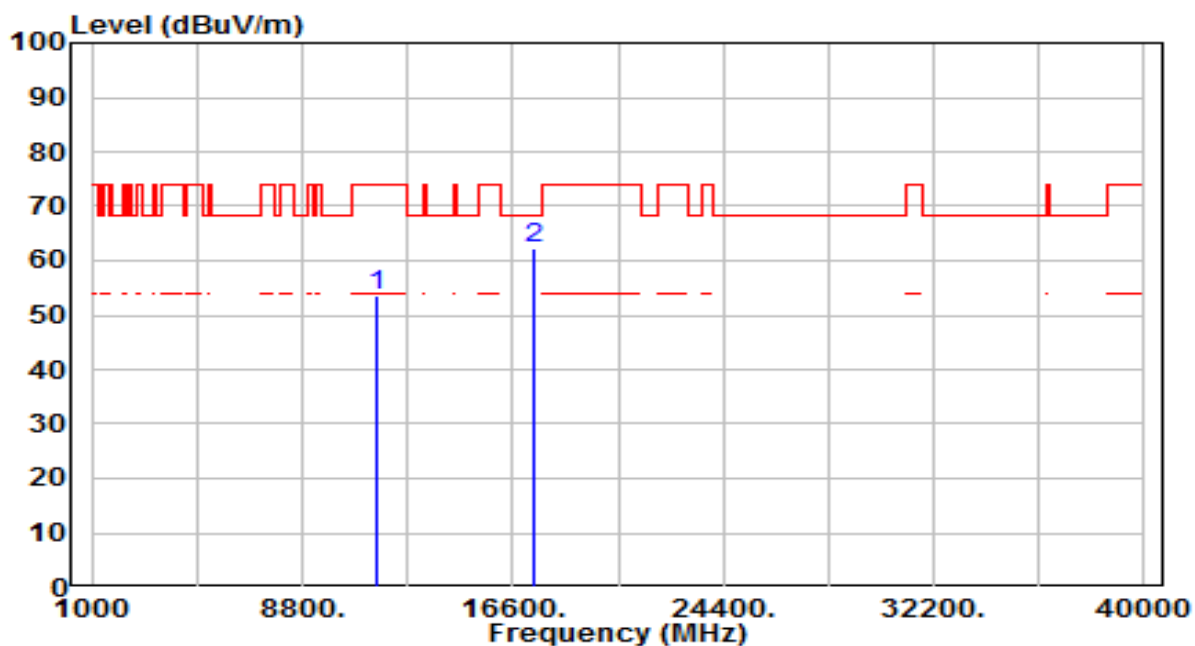


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	34.16	19.44	53.59	-20.41	74.00	100	333	Peak
2	* 17355.000	35.67	26.71	62.38	-5.82	68.20	100	211	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

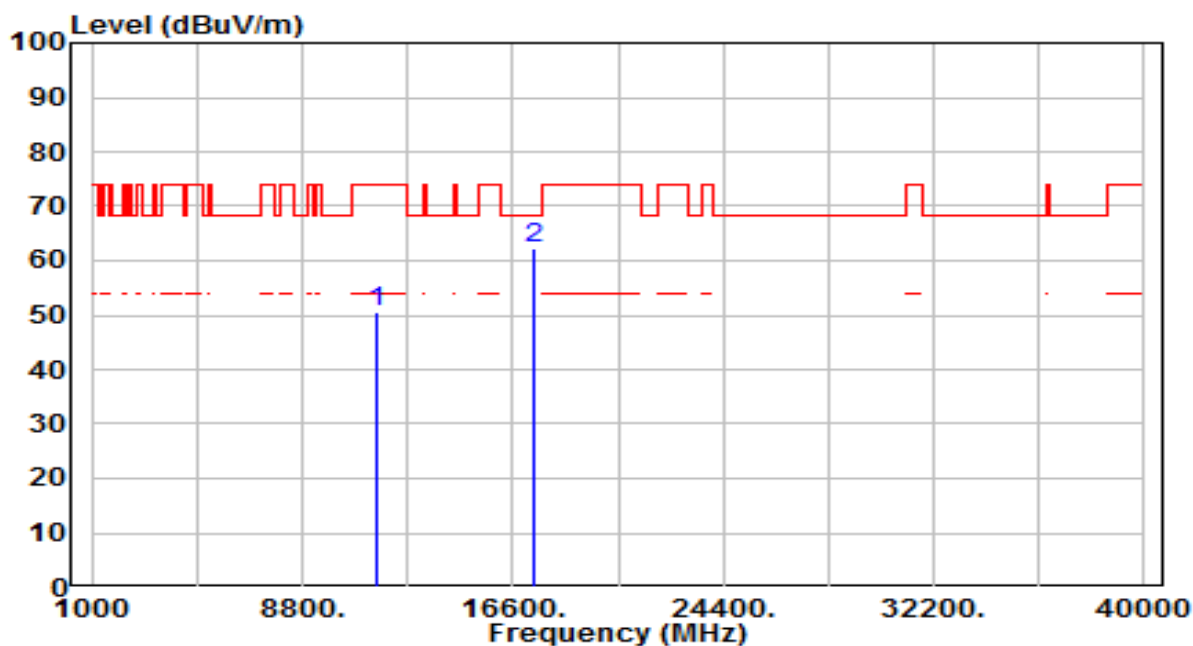


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	31.01	19.44	50.45	-23.55	74.00	100	280	Peak
2	* 17355.000	35.55	26.71	62.27	-5.93	68.20	100	101	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

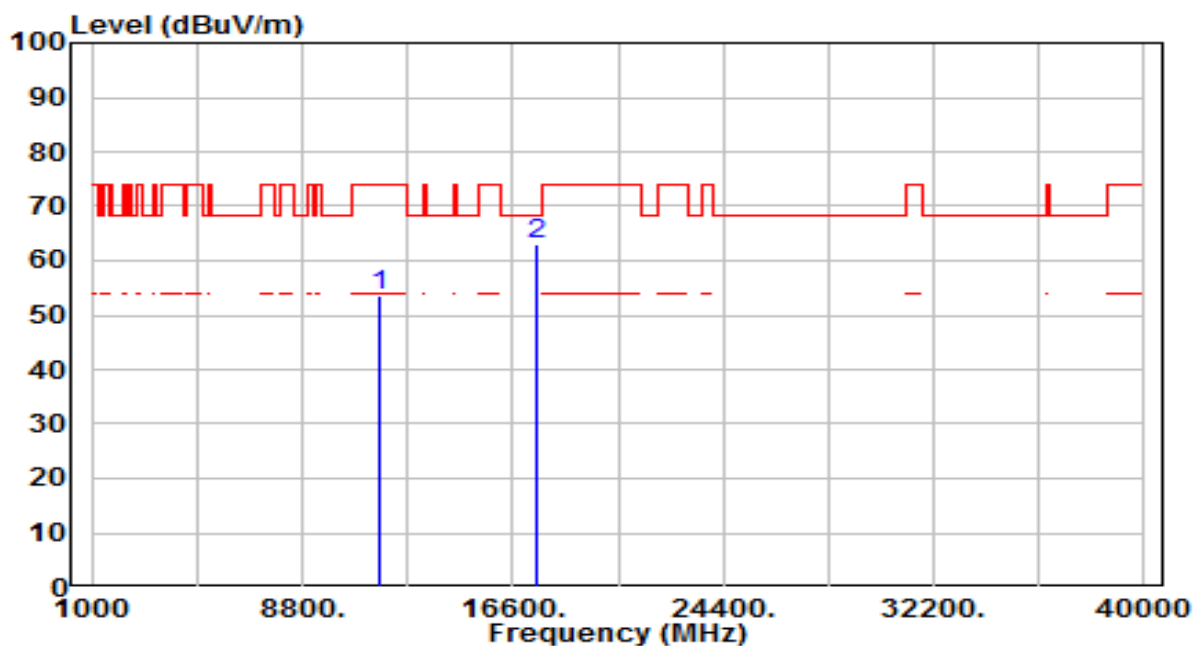


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	34.25	19.27	53.52	-20.48	74.00	100	302	Peak
2	* 17475.000	35.24	27.64	62.88	-5.32	68.20	100	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

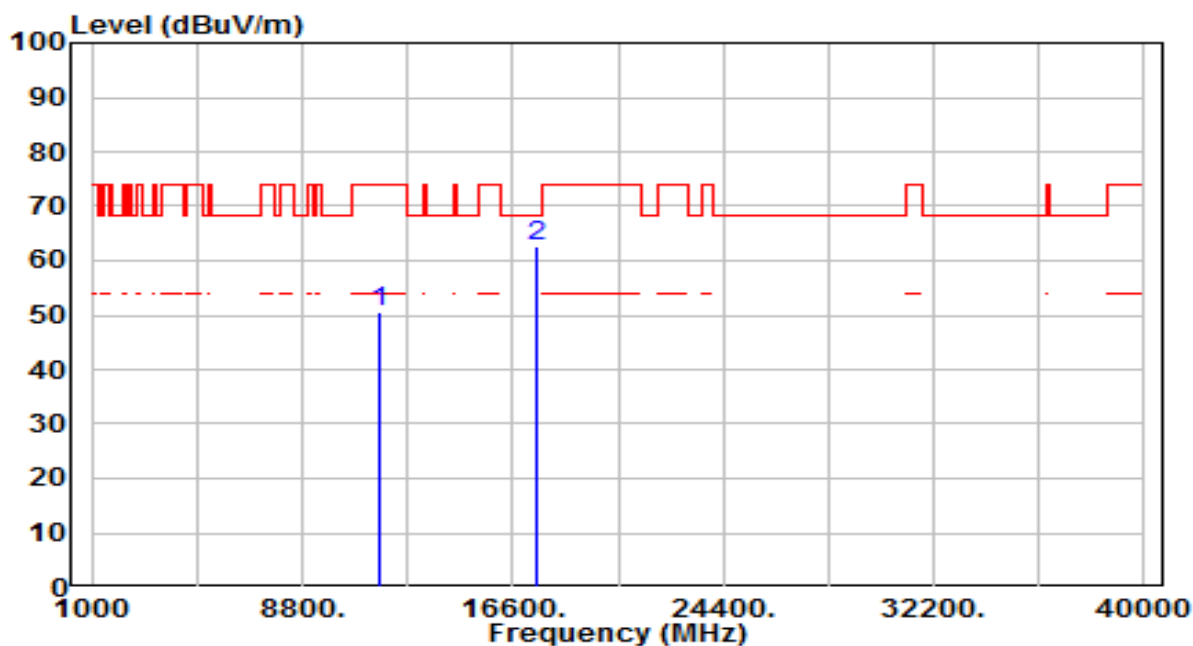


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	31.15	19.27	50.42	-23.58	74.00	100	117	Peak
2	* 17475.000	34.96	27.64	62.60	-5.60	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

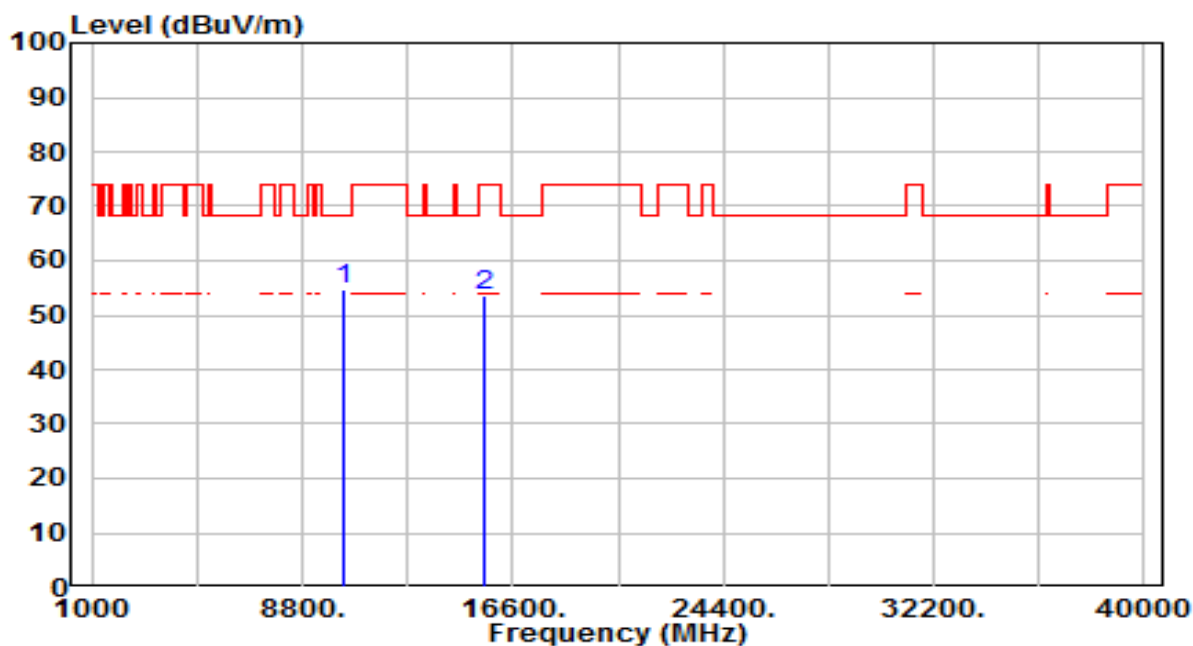


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	37.56	17.30	54.86	-13.34	68.20	100	306	Peak
2	15570.000	33.63	20.00	53.64	-20.36	74.00	100	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

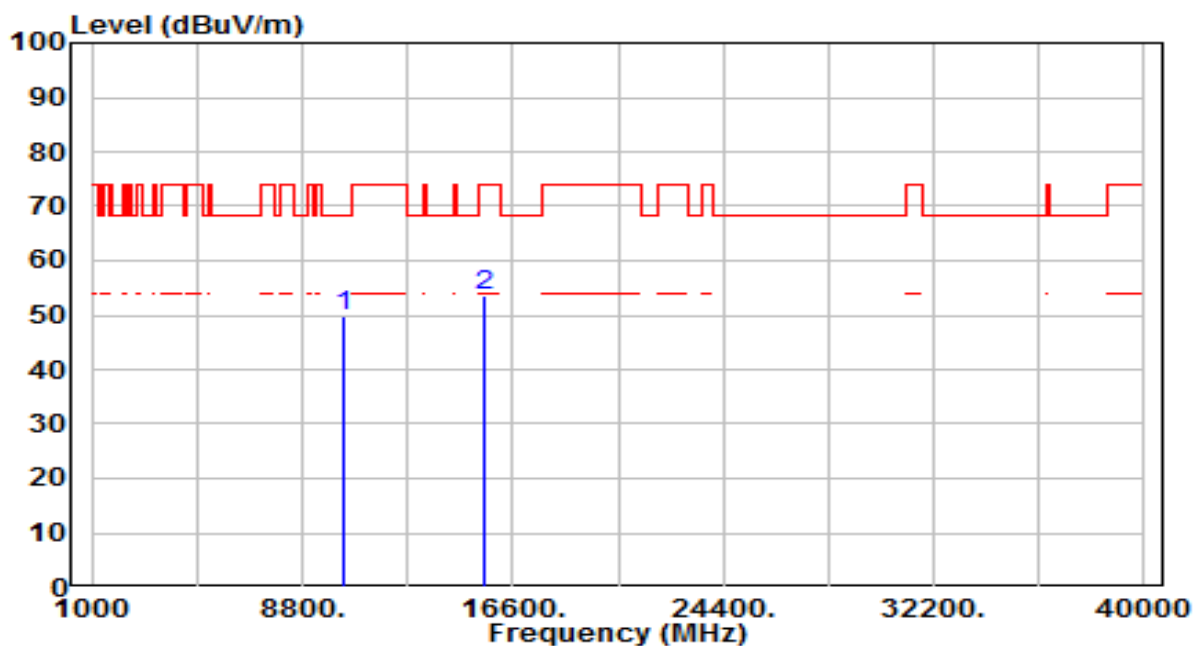


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	32.54	17.30	49.84	-18.36	68.20	100	258	Peak
2	15570.000	33.51	20.00	53.51	-20.49	74.00	100	12	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

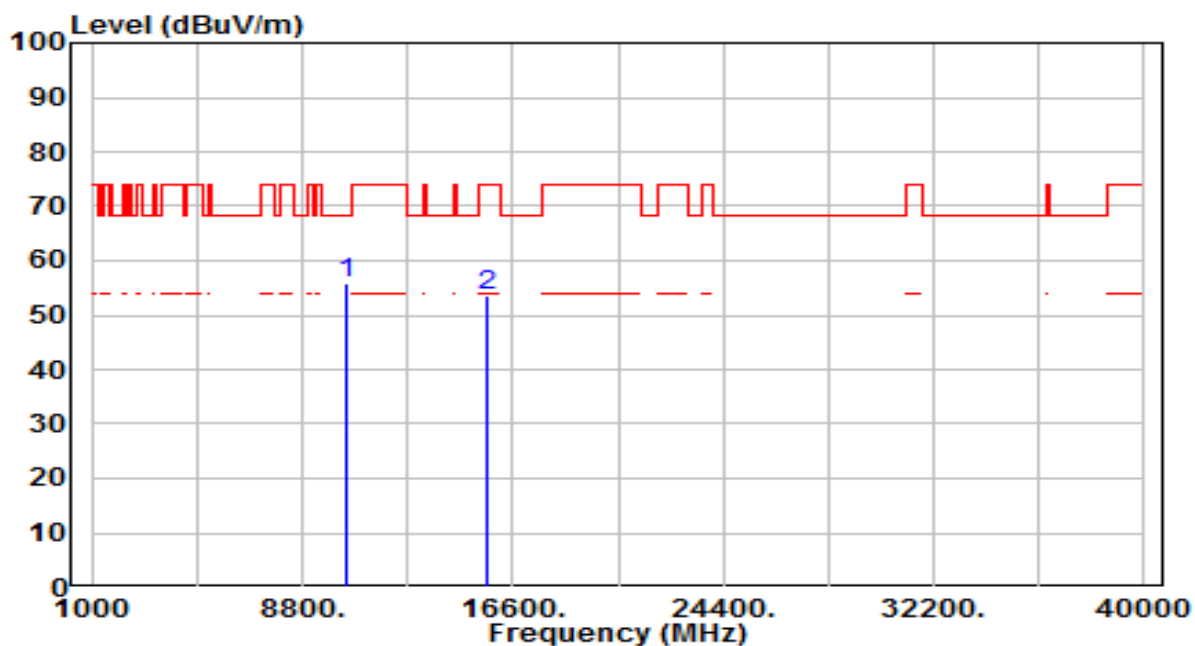


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	38.10	17.64	55.74	-12.46	68.20	100	317	Peak
2	15690.000	33.74	19.74	53.49	-20.51	74.00	100	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1	Test Voltage	AC 120V/60Hz

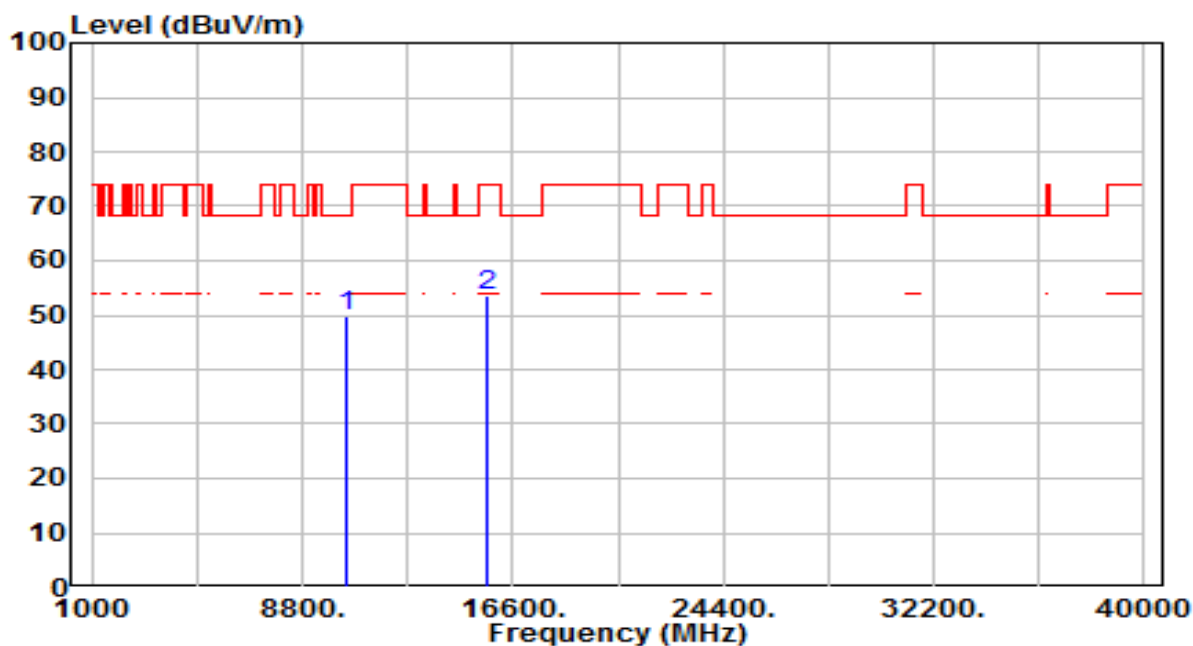


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	32.22	17.64	49.85	-18.35	68.20	100	264	Peak
2	15690.000	33.69	19.74	53.44	-20.56	74.00	100	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

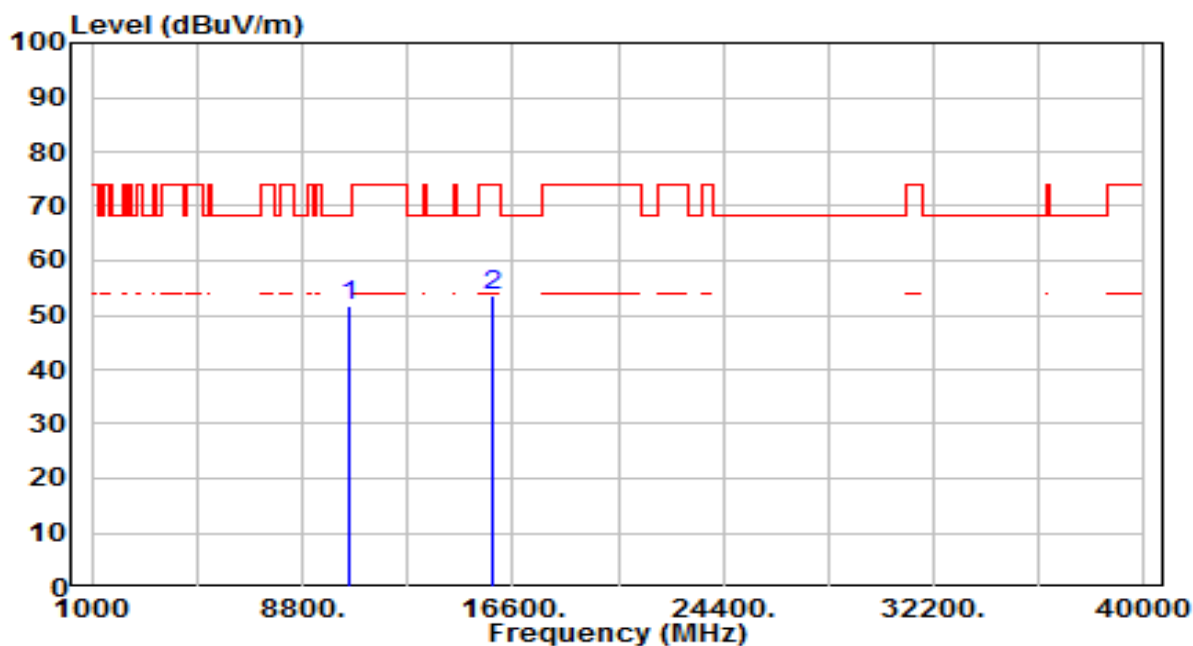


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	33.79	17.87	51.66	-16.54	68.20	100	301	Peak
2	15810.000	34.11	19.48	53.59	-20.41	74.00	100	43	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1	Test Voltage	AC 120V/60Hz

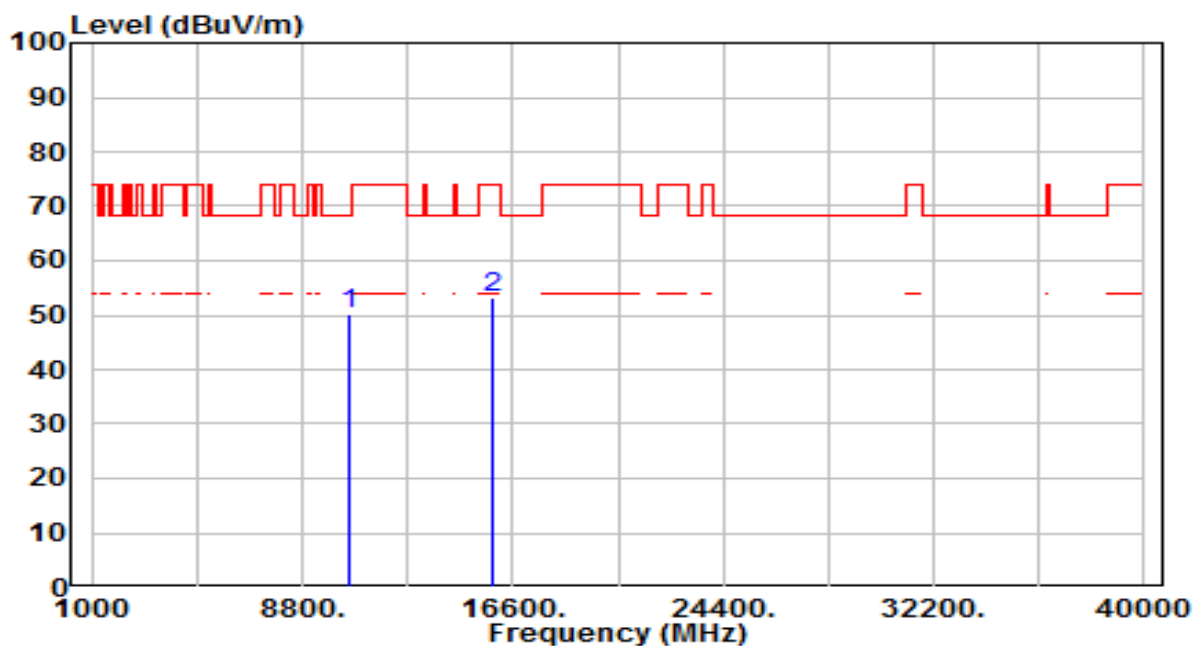


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	32.34	17.87	50.21	-17.99	68.20	100	279	Peak
2	15810.000	33.65	19.48	53.14	-20.86	74.00	100	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

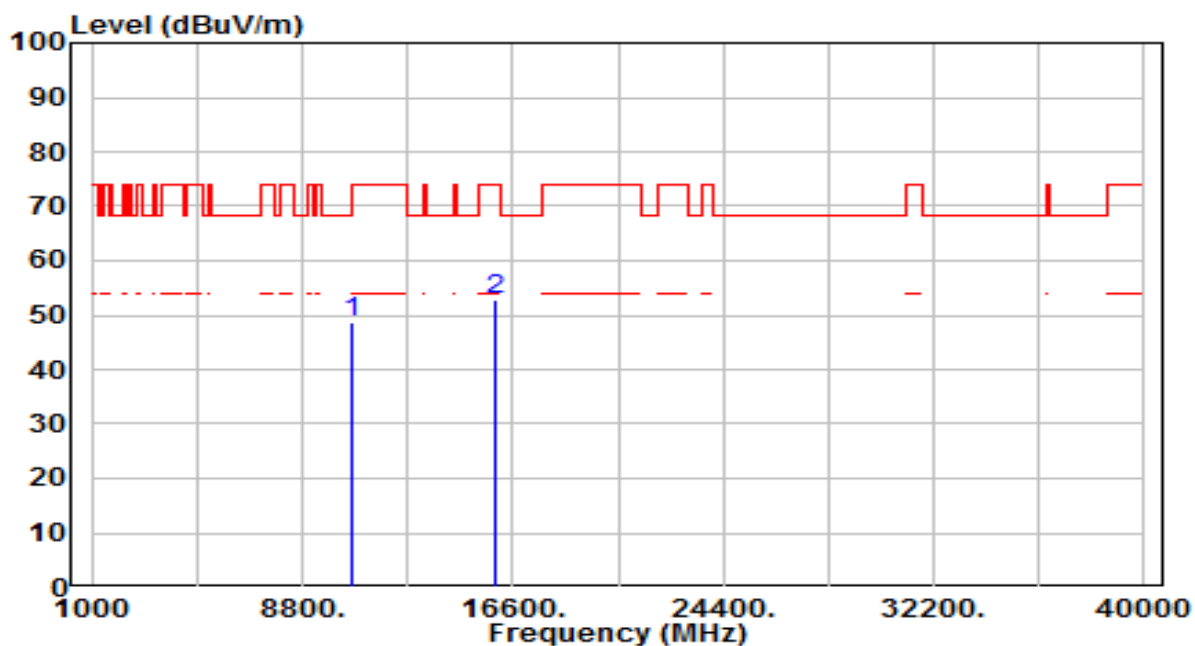


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	30.82	18.00	48.82	-25.18	74.00	100	49	Peak
2	* 15930.000	33.77	19.22	52.99	-21.01	74.00	100	107	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

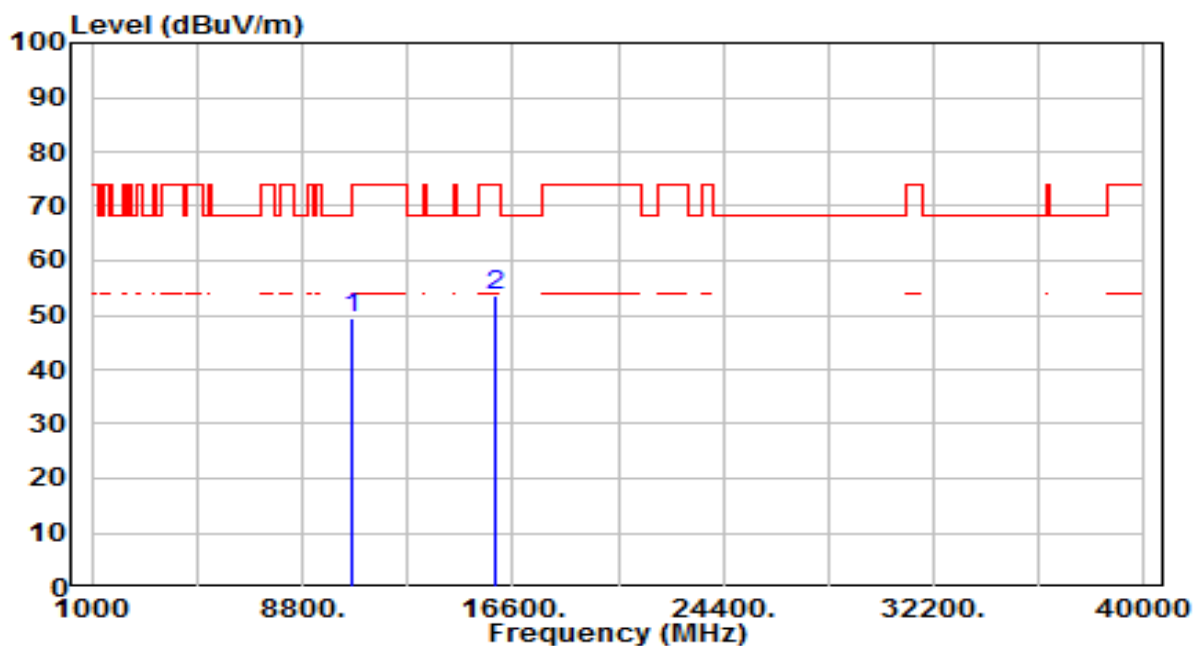


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	31.30	18.00	49.29	-24.71	74.00	100	133	Peak
2	* 15930.000	34.25	19.22	53.47	-20.53	74.00	100	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

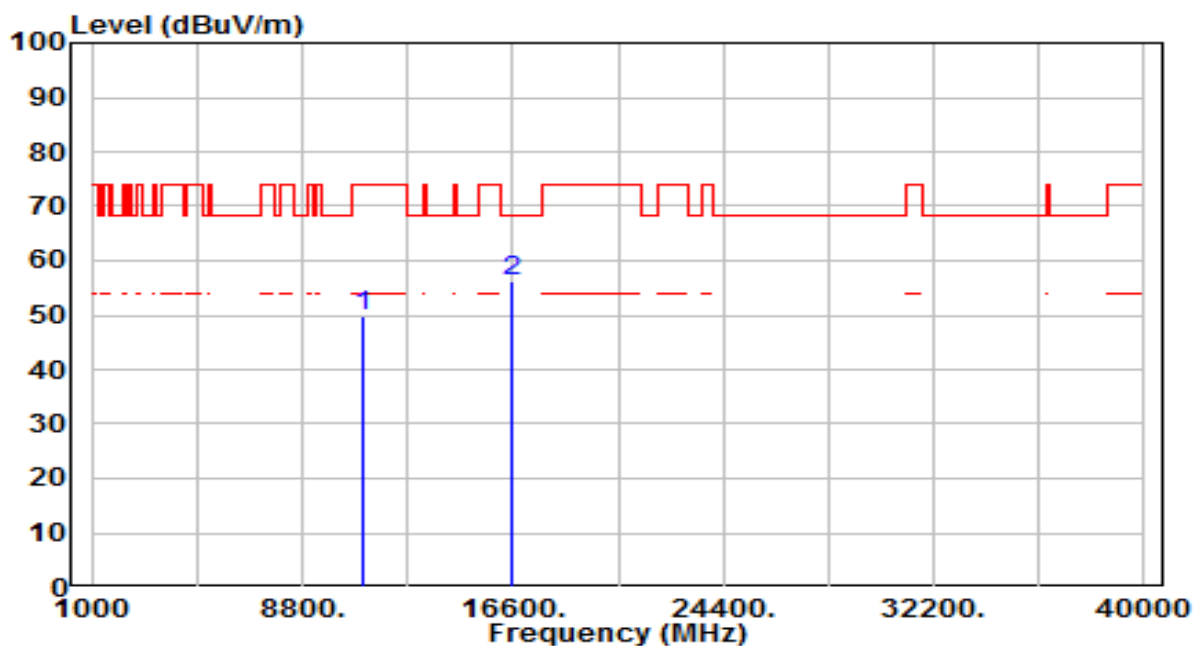


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	31.01	18.65	49.66	-24.34	74.00	100	180	Peak
2	* 16530.000	35.52	20.87	56.40	-11.80	68.20	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

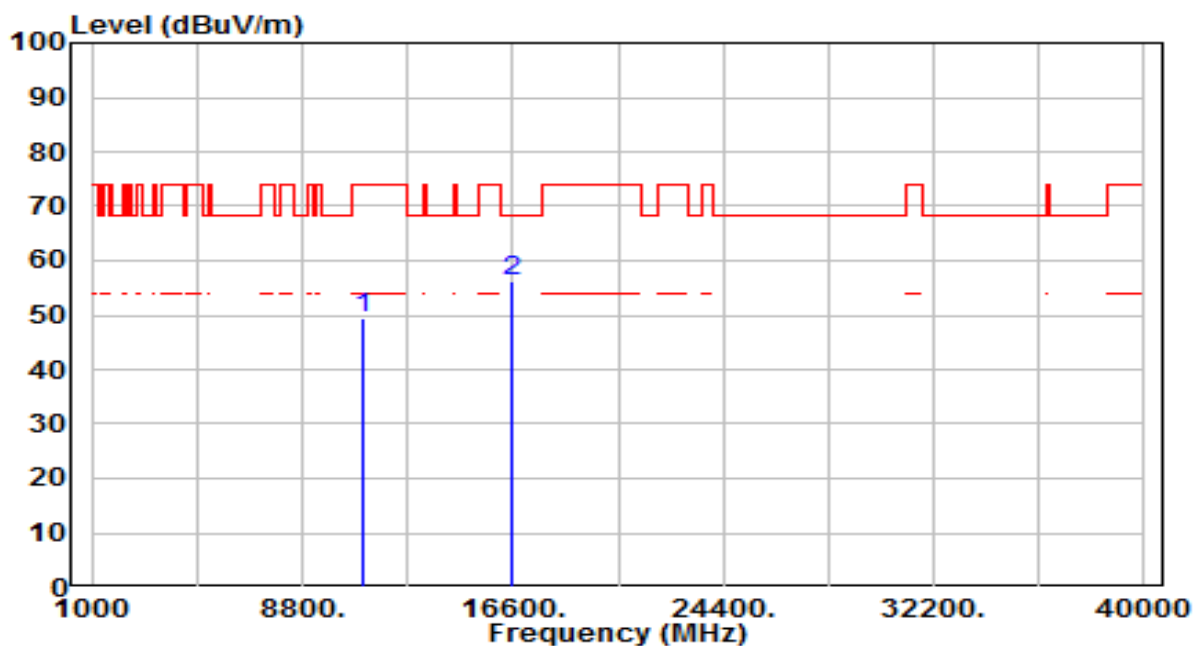


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	30.64	18.65	49.29	-24.71	74.00	100	322	Peak
2	* 16530.000	35.28	20.87	56.15	-12.05	68.20	100	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

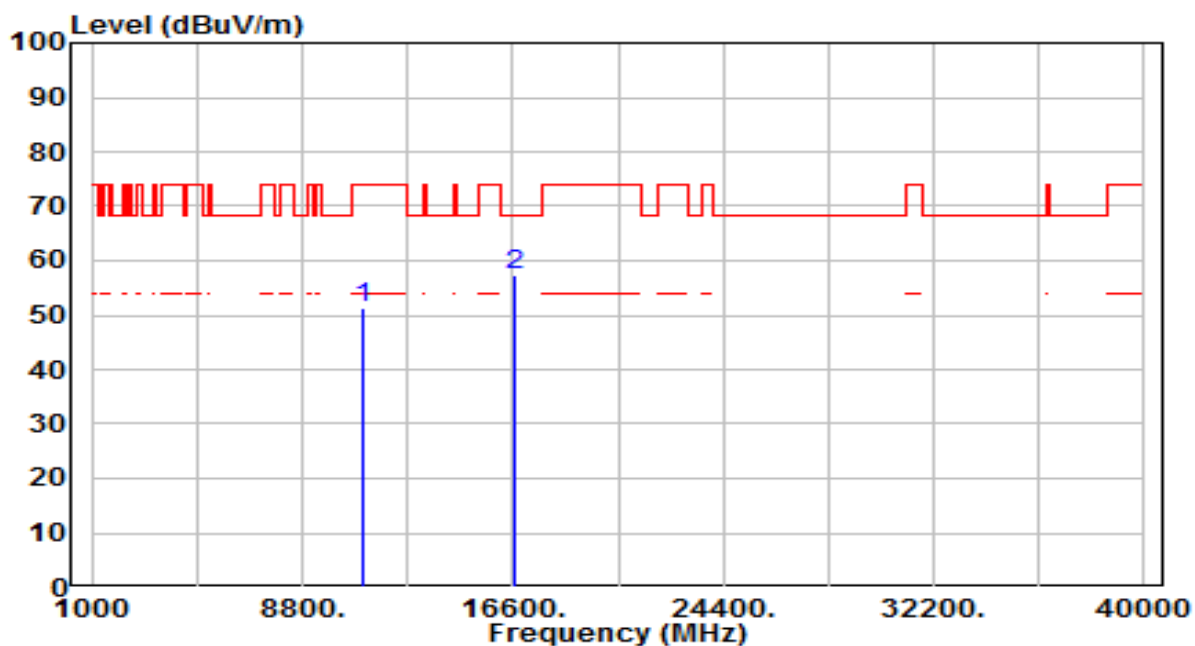


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	32.61	18.81	51.41	-22.59	74.00	100	280	Peak
2	* 16650.000	35.61	21.67	57.28	-10.92	68.20	100	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1	Test Voltage	AC 120V/60Hz

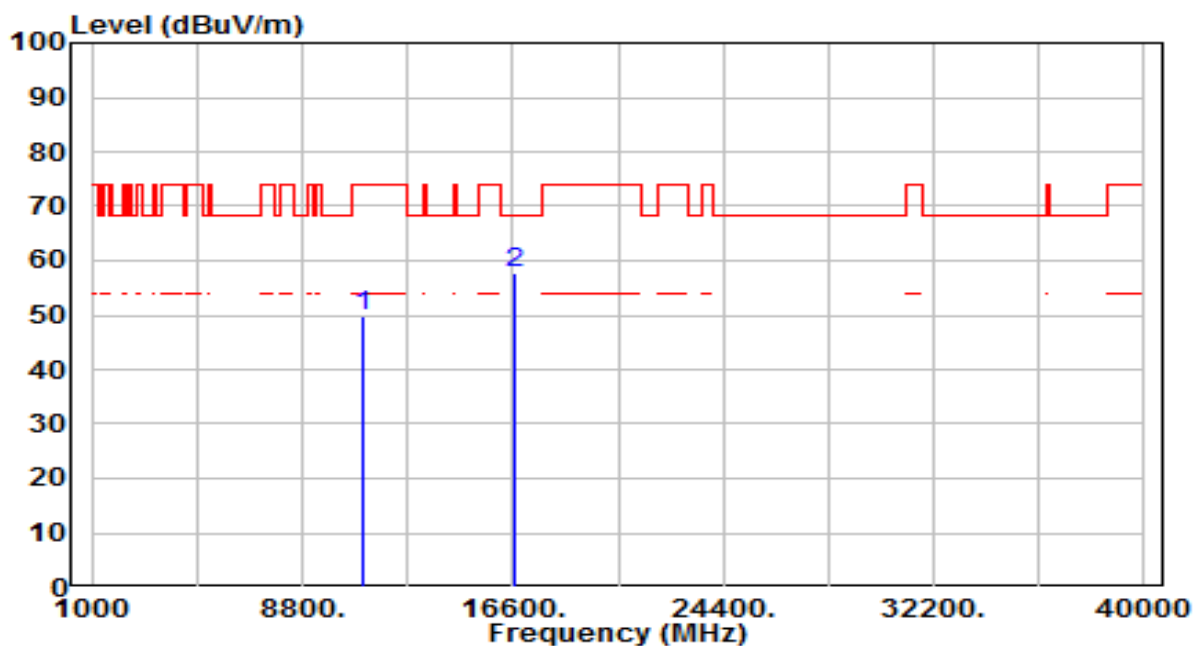


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	30.91	18.81	49.72	-24.28	74.00	100	18	Peak
2	* 16650.000	35.91	21.67	57.58	-10.62	68.20	100	44	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

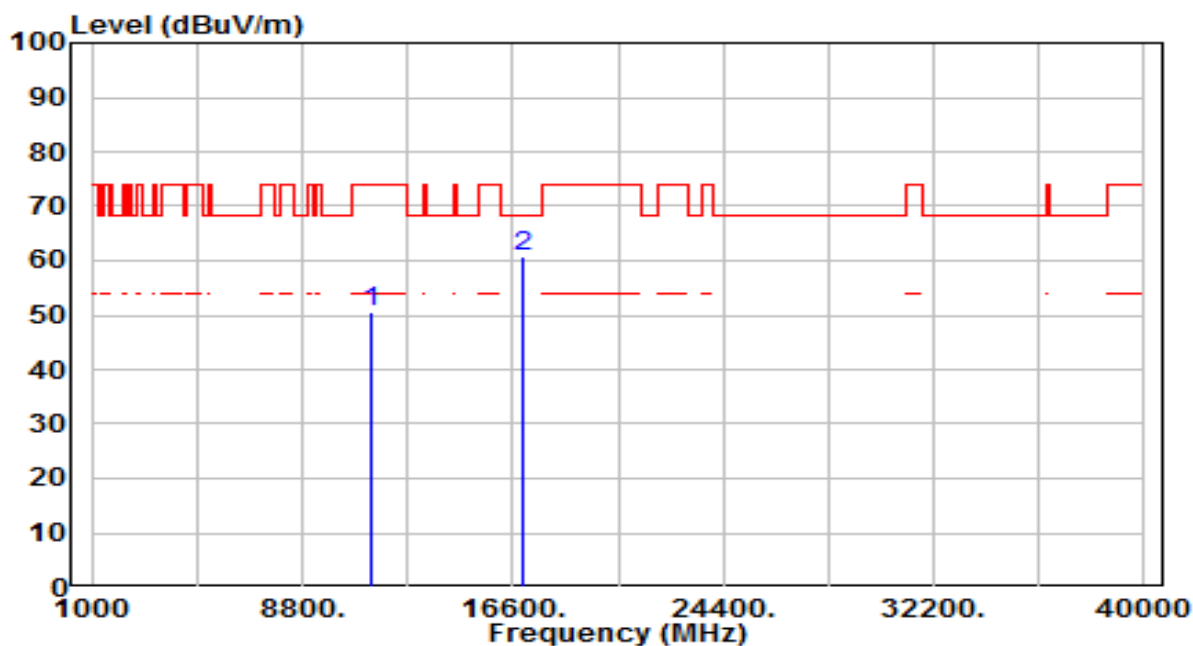


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	31.20	19.28	50.47	-23.53	74.00	100	291	Peak
2	* 17010.000	36.52	24.06	60.58	-7.62	68.20	100	106	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

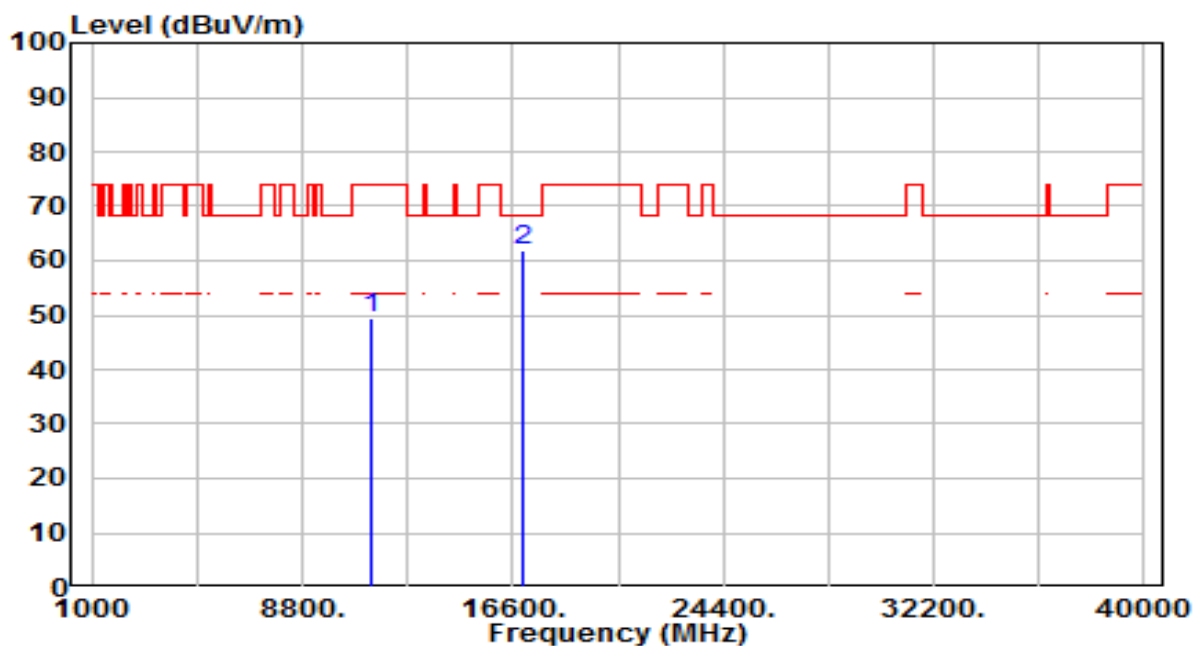


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	30.19	19.28	49.47	-24.53	74.00	100	263	Peak
2	* 17010.000	37.65	24.06	61.71	-6.49	68.20	100	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

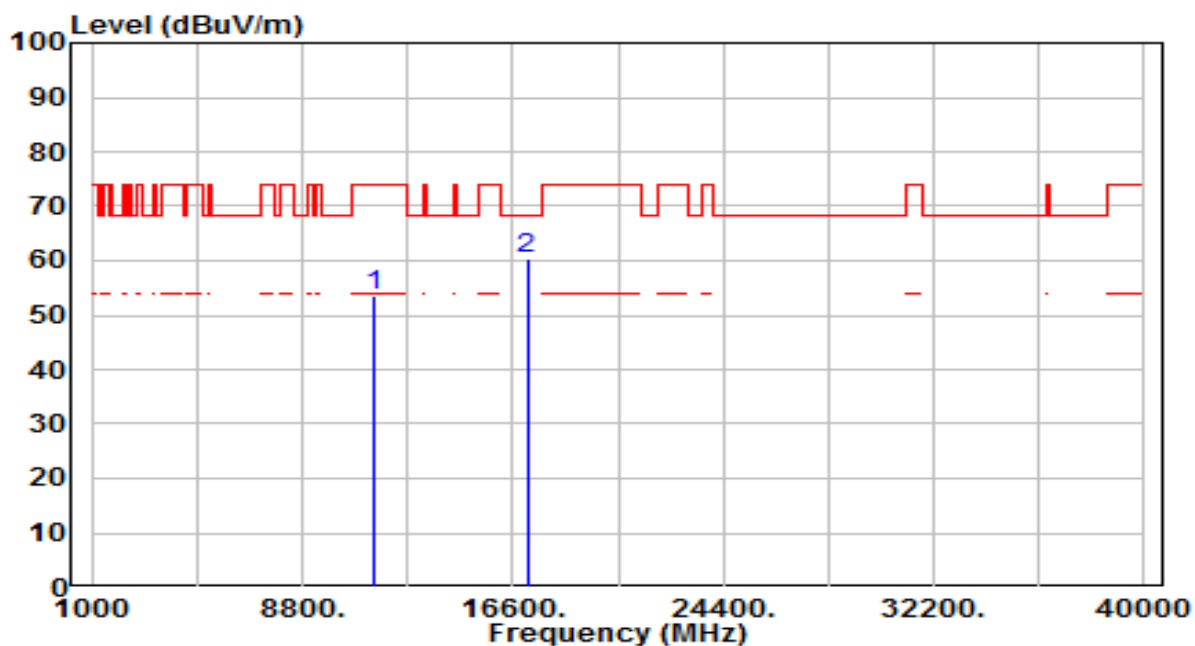


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	34.13	19.43	53.57	-20.43	74.00	100	324	Peak
2	* 17130.000	35.36	24.98	60.34	-7.86	68.20	100	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1	Test Voltage	AC 120V/60Hz

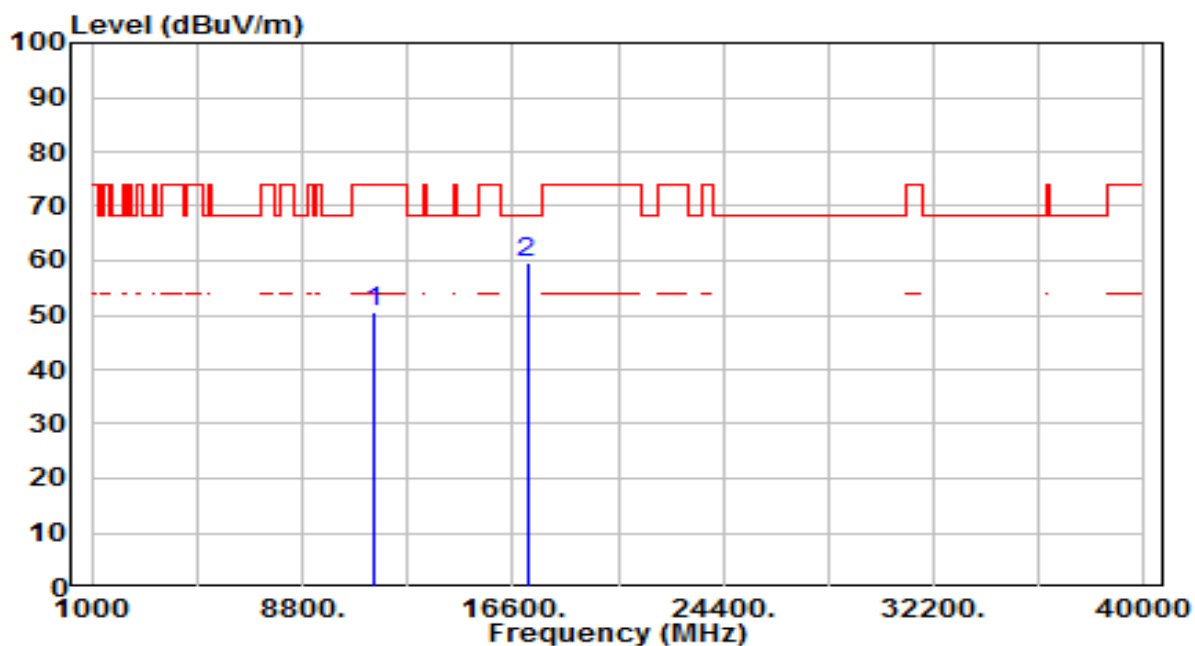


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	31.02	19.43	50.45	-23.55	74.00	100	322	Peak
2	* 17130.000	34.46	24.98	59.44	-8.76	68.20	100	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

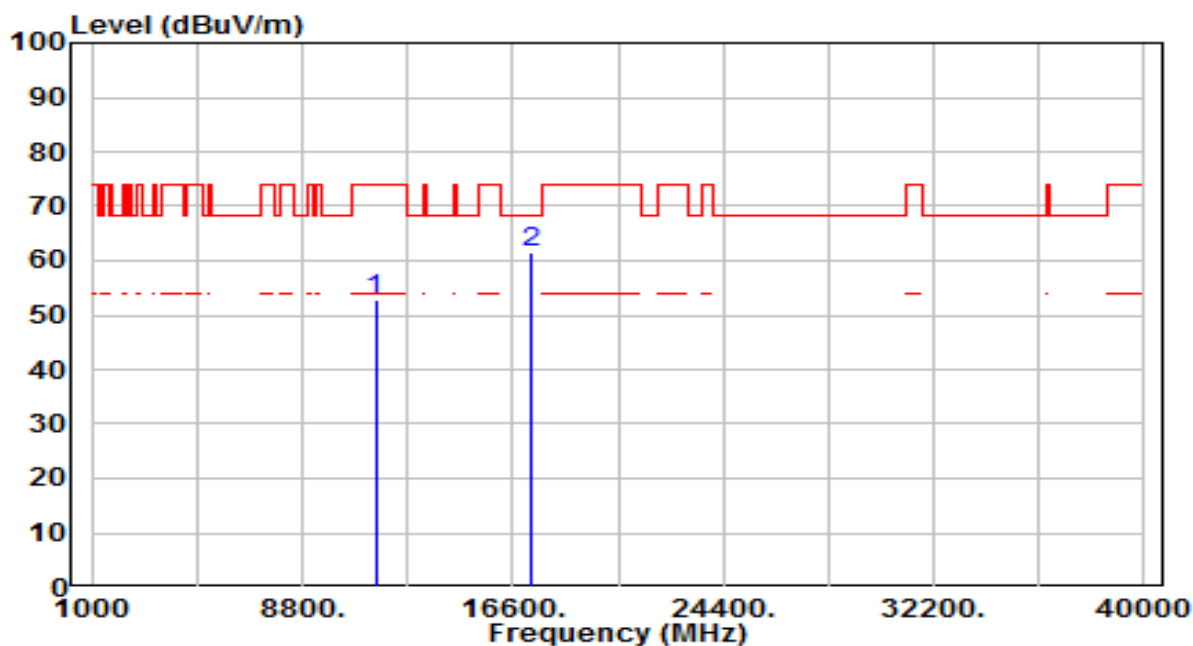


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	33.26	19.57	52.83	-21.17	74.00	100	324	Peak
2	* 17265.000	35.43	26.02	61.45	-6.75	68.20	100	257	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

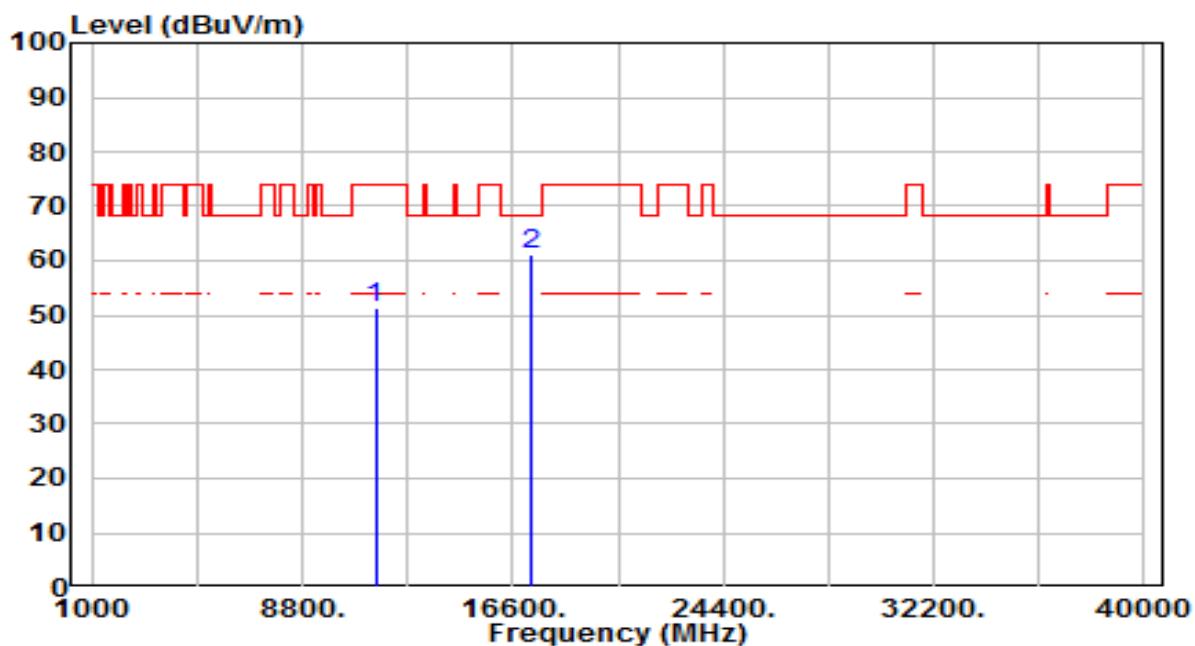


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	31.66	19.57	51.23	-22.77	74.00	100	276	Peak
2	* 17265.000	35.26	26.02	61.28	-6.92	68.20	100	327	Peak

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

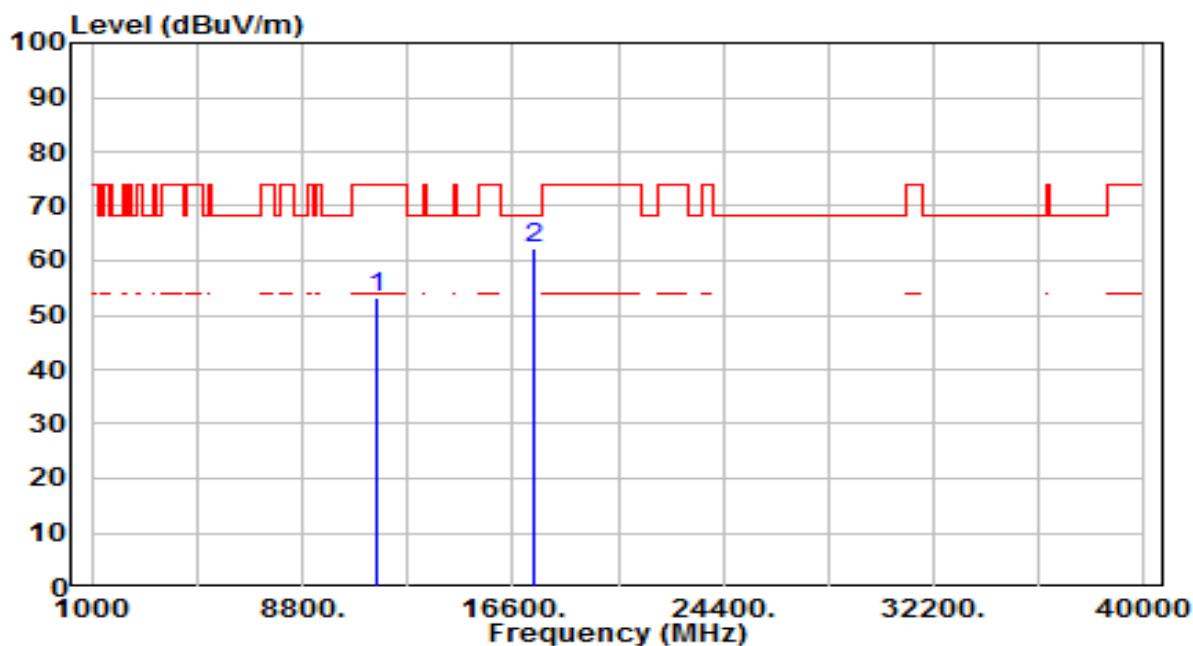


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	33.82	19.40	53.21	-20.79	74.00	100	352	Peak
2	* 17385.000	35.21	26.94	62.15	-6.05	68.20	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

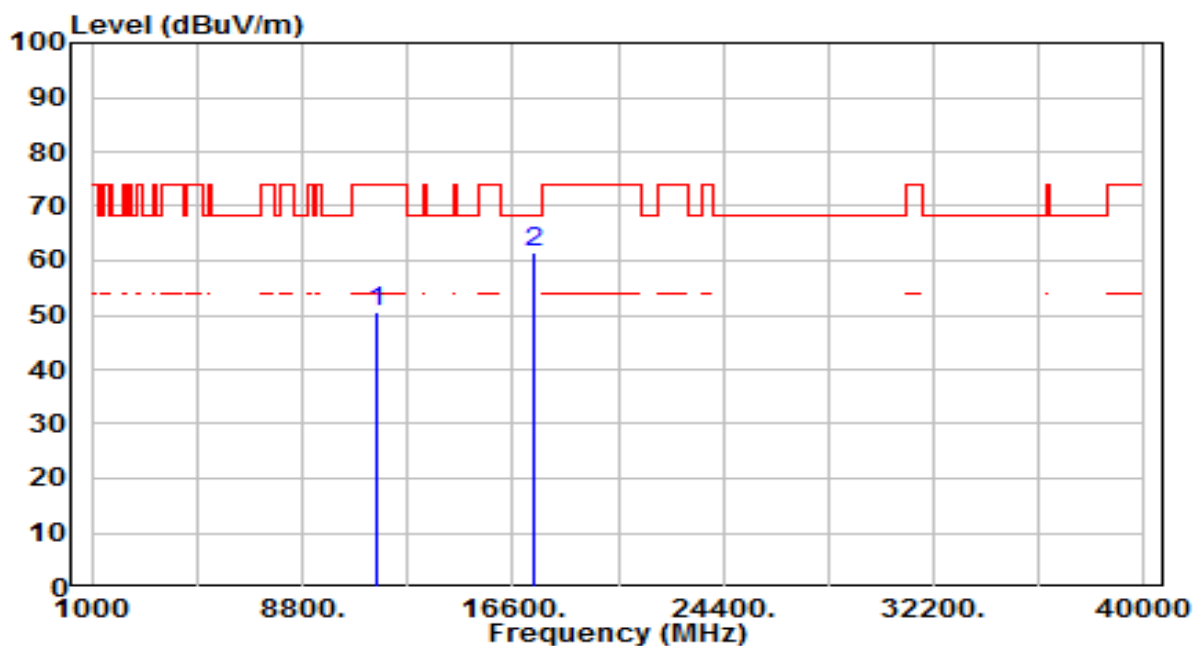


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	31.11	19.40	50.51	-23.49	74.00	100	88	Peak
2	* 17385.000	34.73	26.94	61.68	-6.52	68.20	100	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

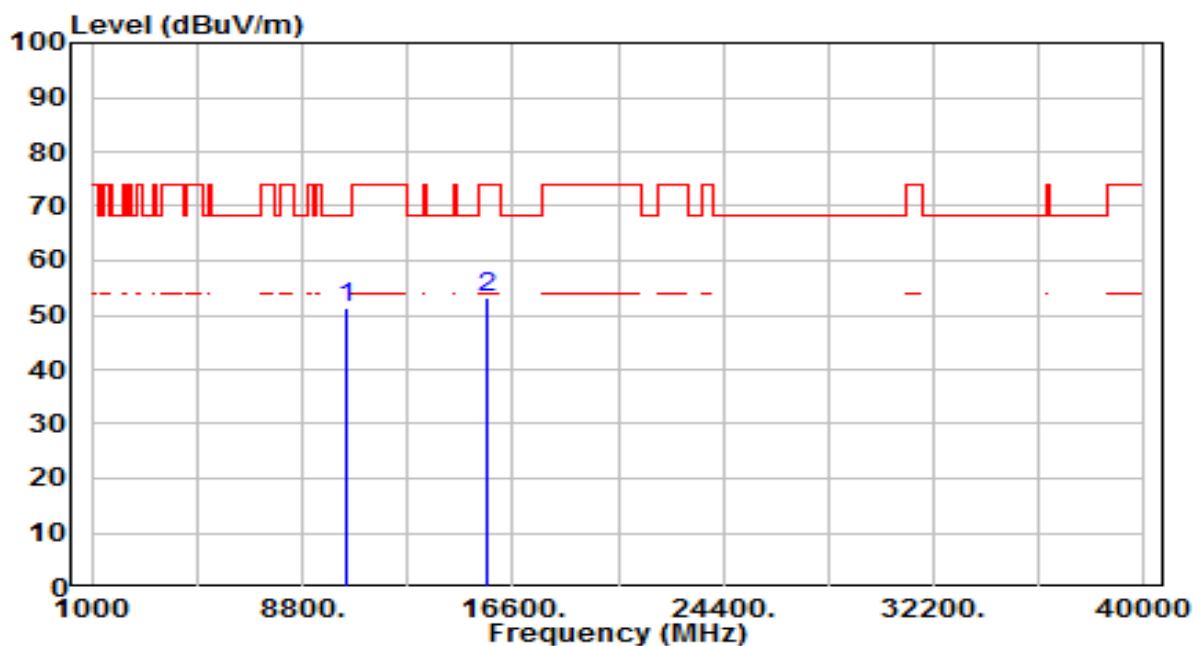


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	33.71	17.47	51.18	-17.02	68.20	100	290	Peak
2	15630.000	33.31	19.87	53.19	-20.81	74.00	100	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

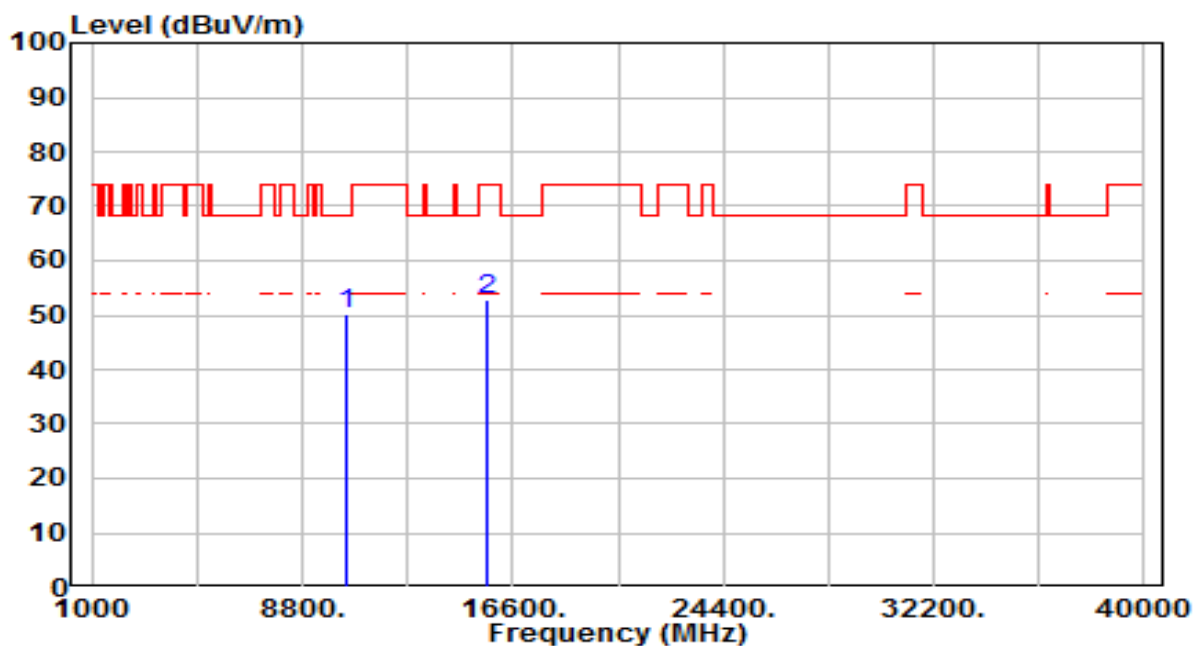


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	32.58	17.47	50.05	-18.15	68.20	100	297	Peak
2	15630.000	33.05	19.87	52.93	-21.08	74.00	100	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

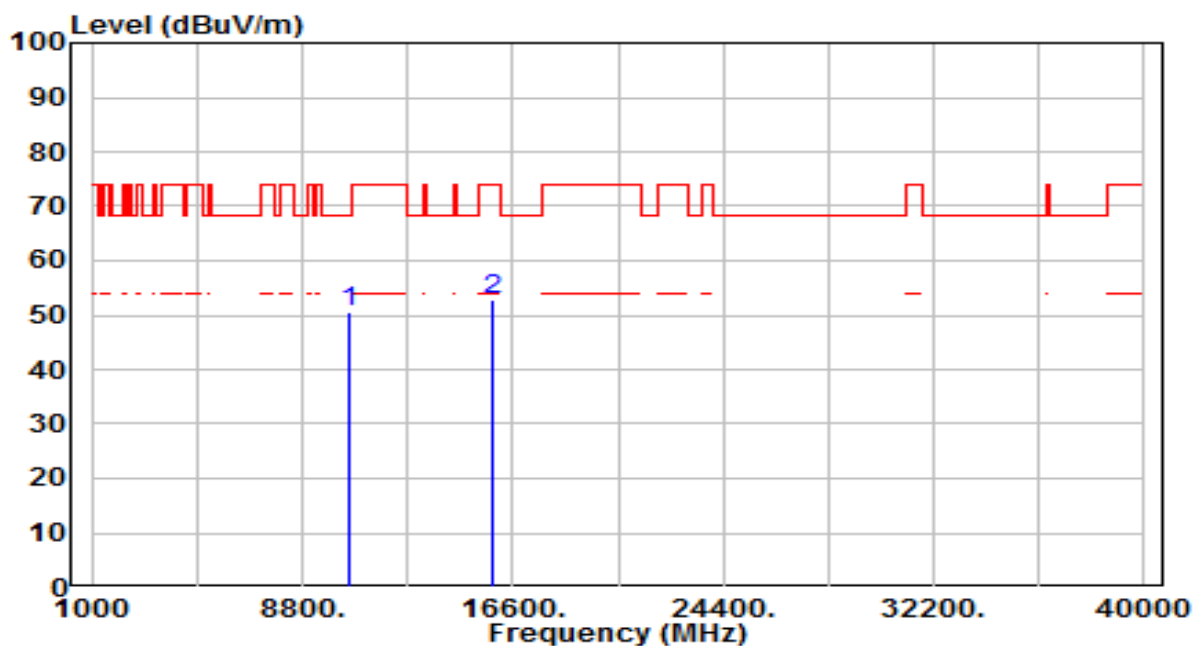


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	32.60	17.93	50.53	-17.67	68.20	100	336	Peak
2	15870.000	33.63	19.35	52.98	-21.02	74.00	100	203	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

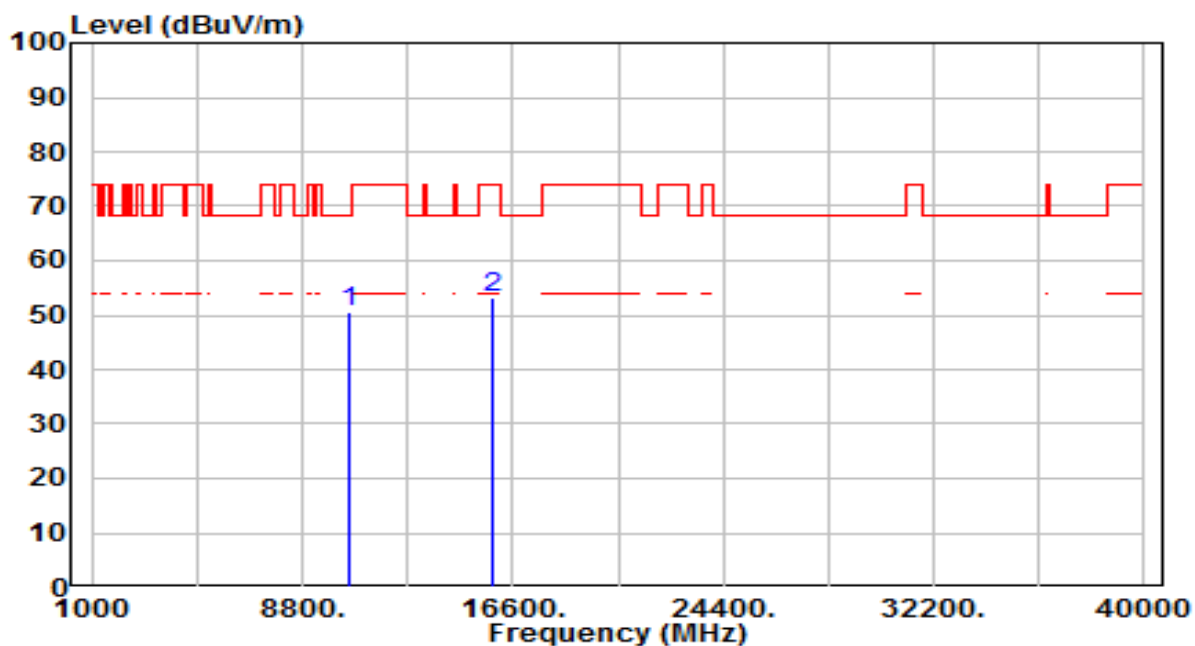


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	32.51	17.93	50.44	-17.76	68.20	100	267	Peak
2	15870.000	33.98	19.35	53.33	-20.67	74.00	100	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

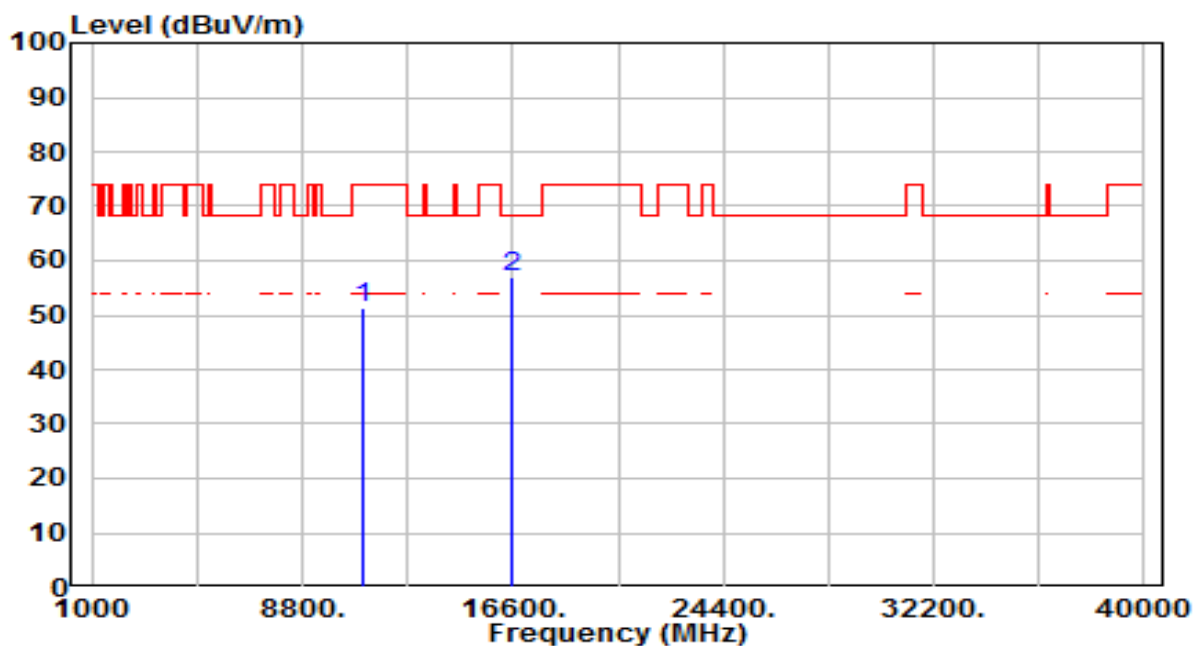


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	32.65	18.73	51.38	-22.62	74.00	100	294	Peak
2	* 16590.000	35.81	21.27	57.08	-11.12	68.20	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

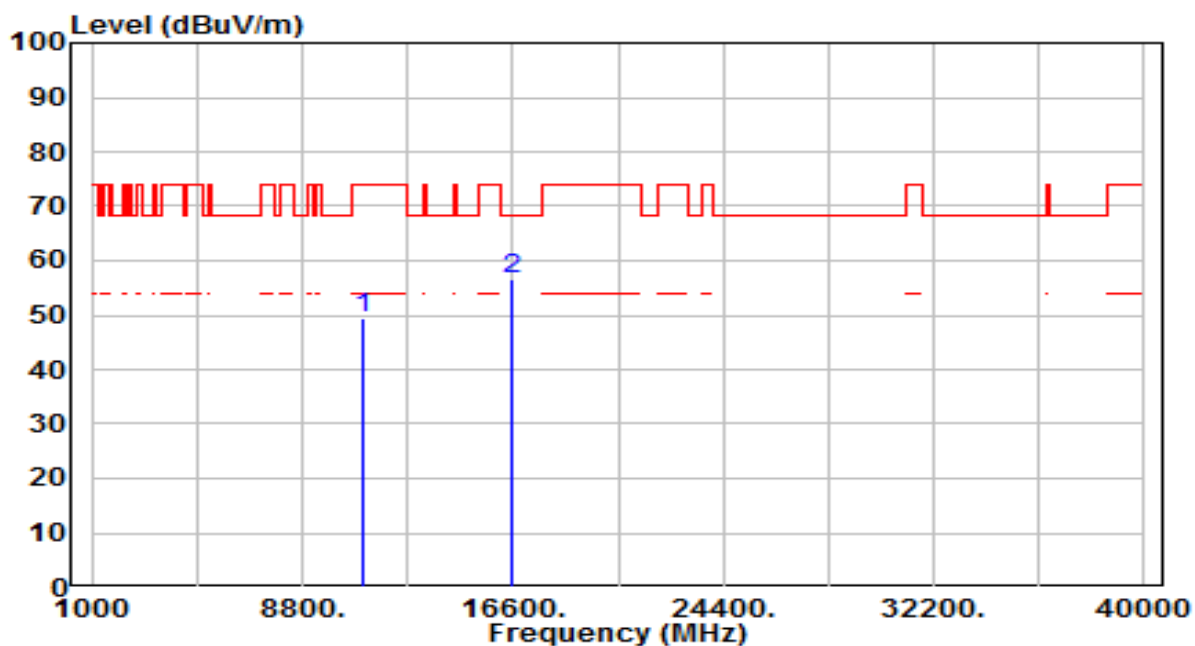


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	30.87	18.73	49.60	-24.40	74.00	100	294	Peak
2	* 16590.000	35.34	21.27	56.61	-11.59	68.20	100	12	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

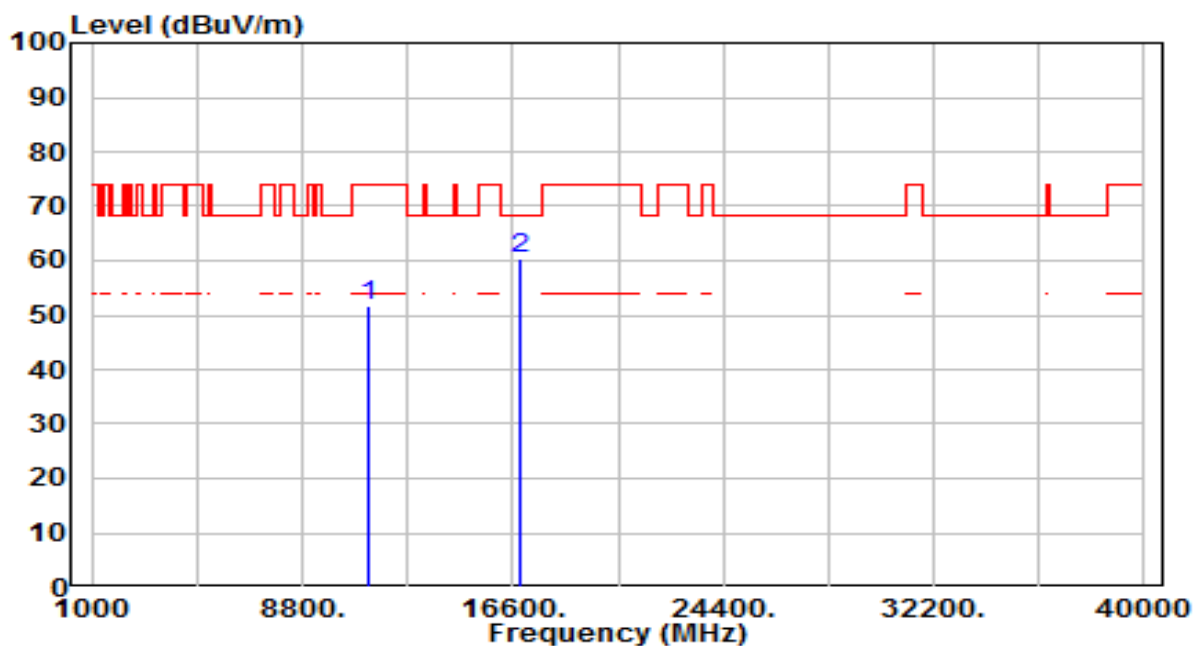


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	32.83	19.04	51.87	-22.13	74.00	100	360	Peak
2	* 16830.000	37.59	22.86	60.45	-7.75	68.20	100	66	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1	Test Voltage	AC 120V/60Hz

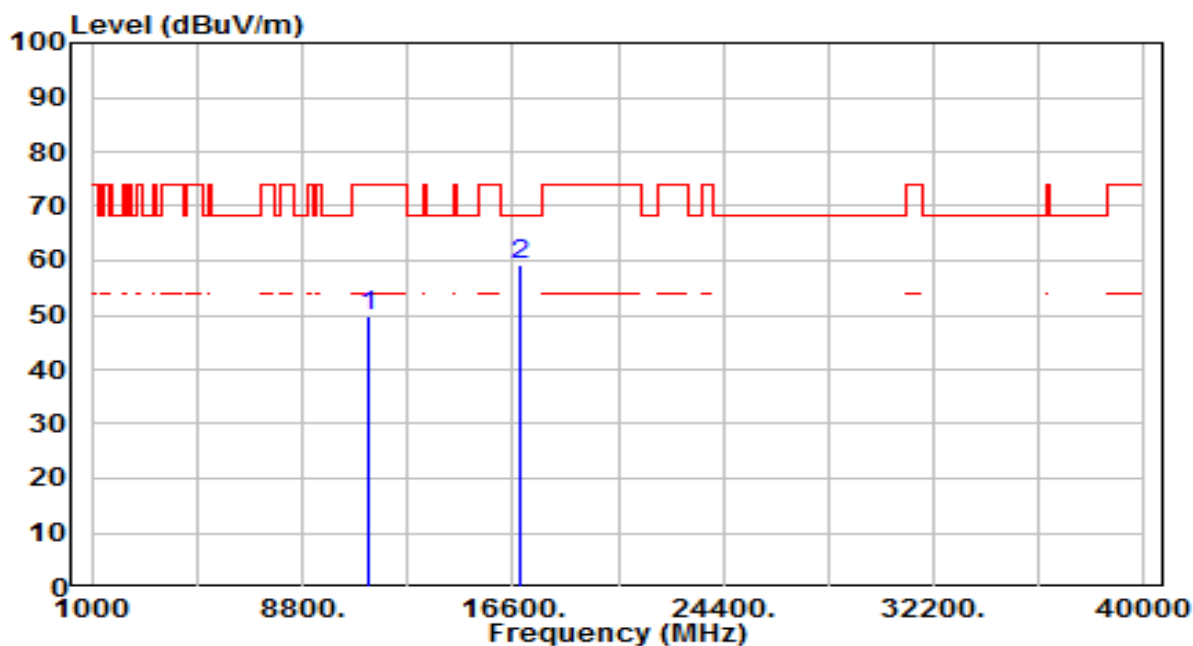


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	30.95	19.04	49.99	-24.01	74.00	100	311	Peak
2	* 16830.000	36.47	22.86	59.33	-8.87	68.20	100	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

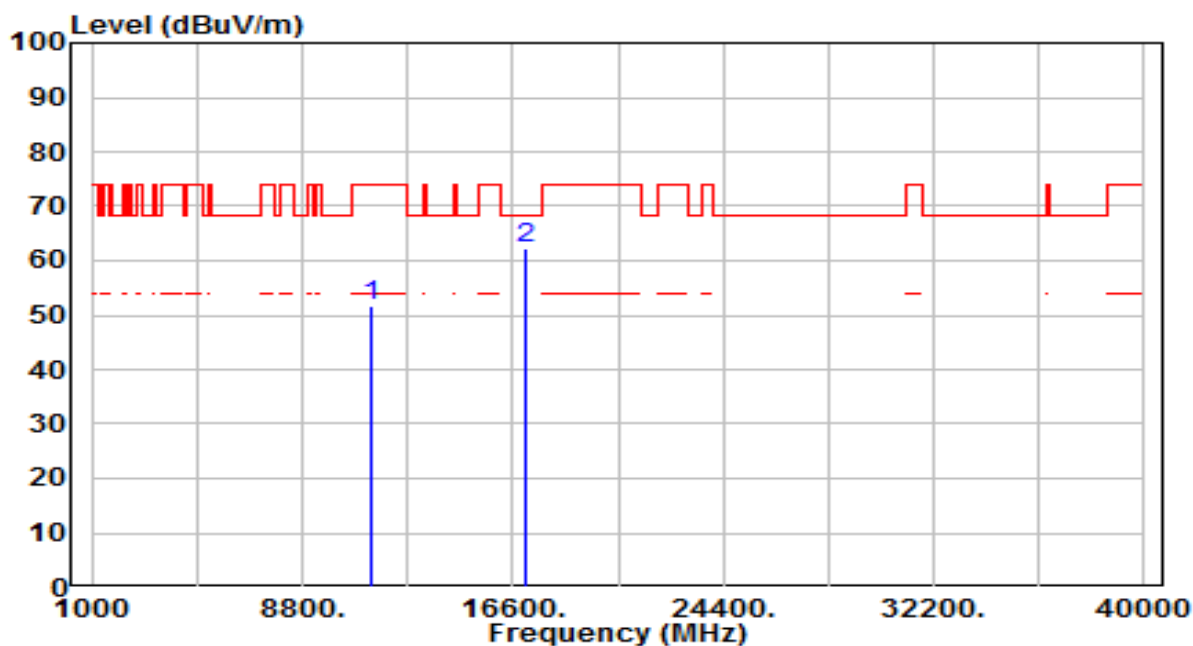


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	32.49	19.35	51.85	-22.15	74.00	100	314	Peak
2	* 17070.000	37.61	24.52	62.13	-6.07	68.20	100	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1	Test Voltage	AC 120V/60Hz

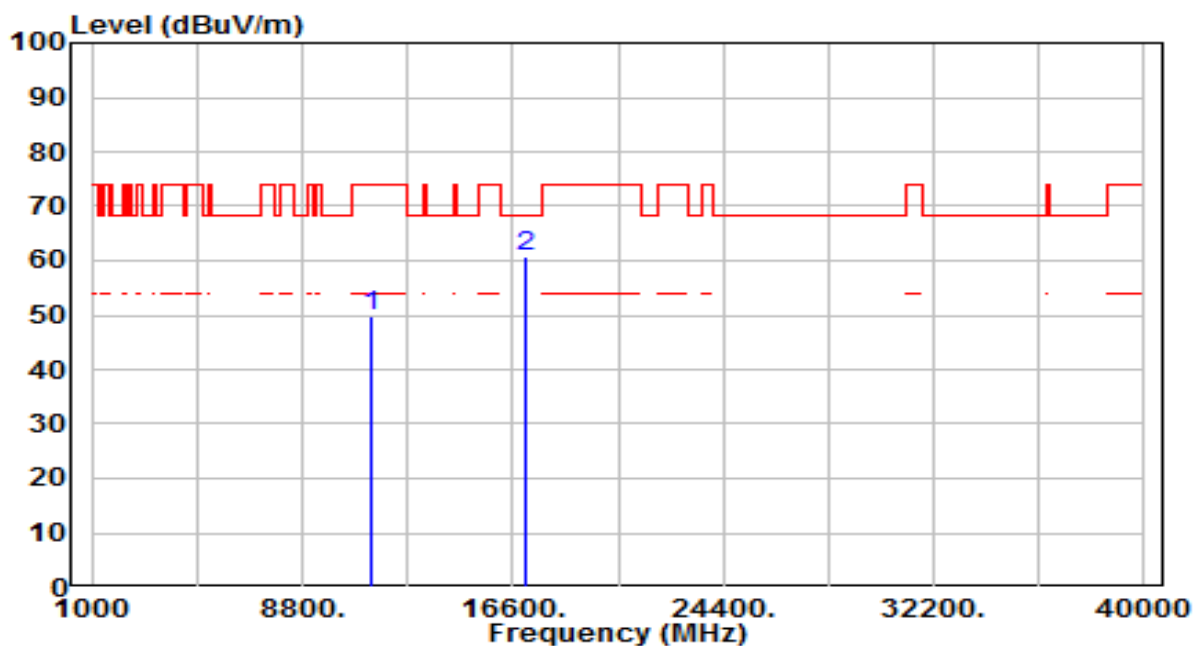


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	30.38	19.35	49.74	-24.26	74.00	100	257	Peak
2	* 17070.000	36.39	24.52	60.91	-7.29	68.20	100	342	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

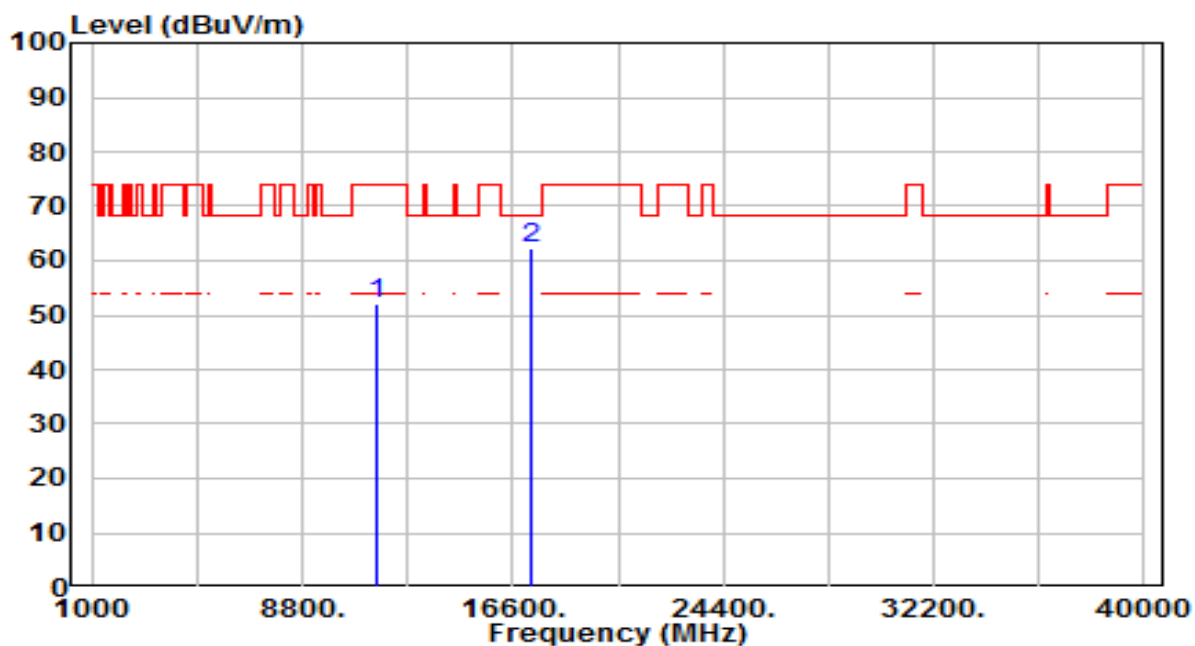


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	32.53	19.48	52.01	-21.99	74.00	100	290	Peak
2	* 17325.000	35.96	26.48	62.44	-5.76	68.20	100	18	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

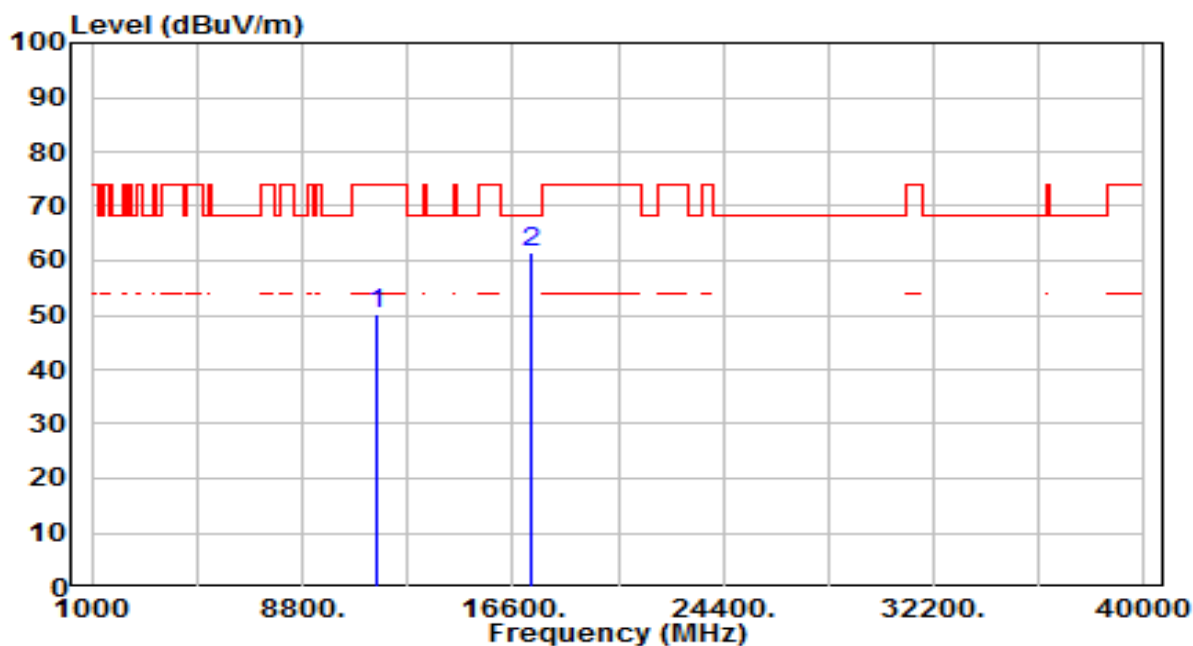

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	30.89	19.48	50.38	-23.62	74.00	100	273	Peak
2	* 17325.000	34.97	26.48	61.45	-6.75	68.20	100	51	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For FCC transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For IC transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC-Radiated emission limits; general requirements.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.8.2. Test Result

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

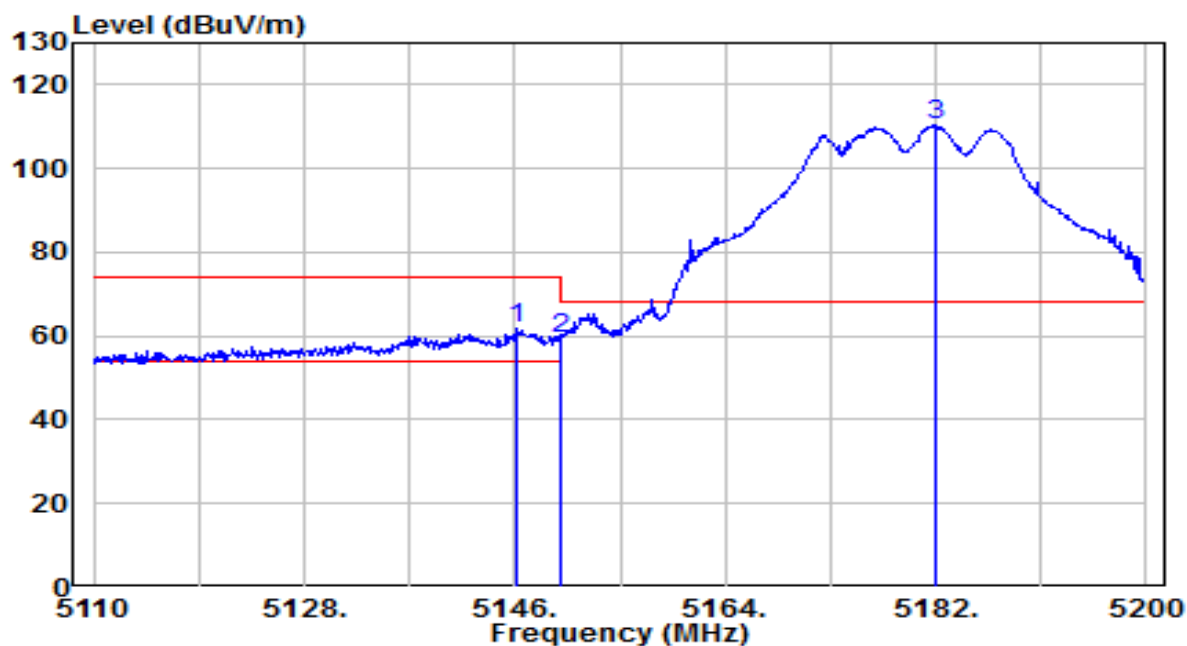


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.270	57.73	3.89	61.62	-12.38	74.00	120	35	Peak
2		5150.000	55.30	3.89	59.19	-14.81	74.00	120	35	Peak
3		5181.910	106.30	3.92	110.22	N/A	N/A	120	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

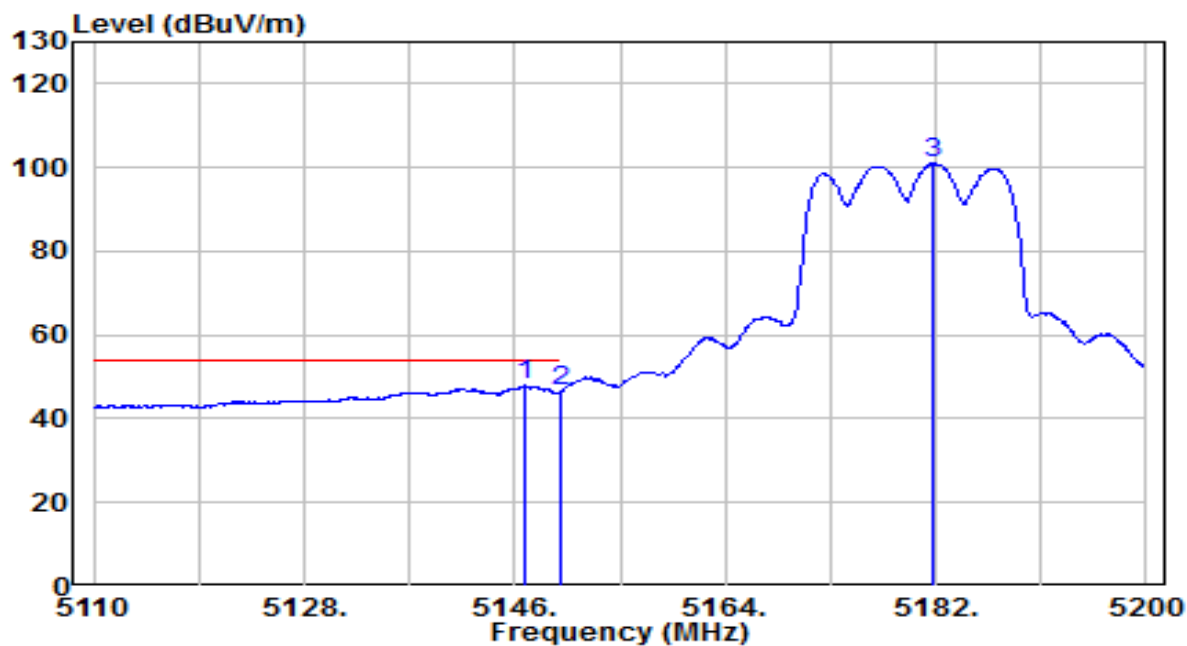


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	43.95	3.89	47.85	-6.15	54.00	120	35	Average
2		5150.000	42.58	3.89	46.47	-7.53	54.00	120	35	Average
3		5181.820	97.07	3.92	100.99	N/A	N/A	120	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

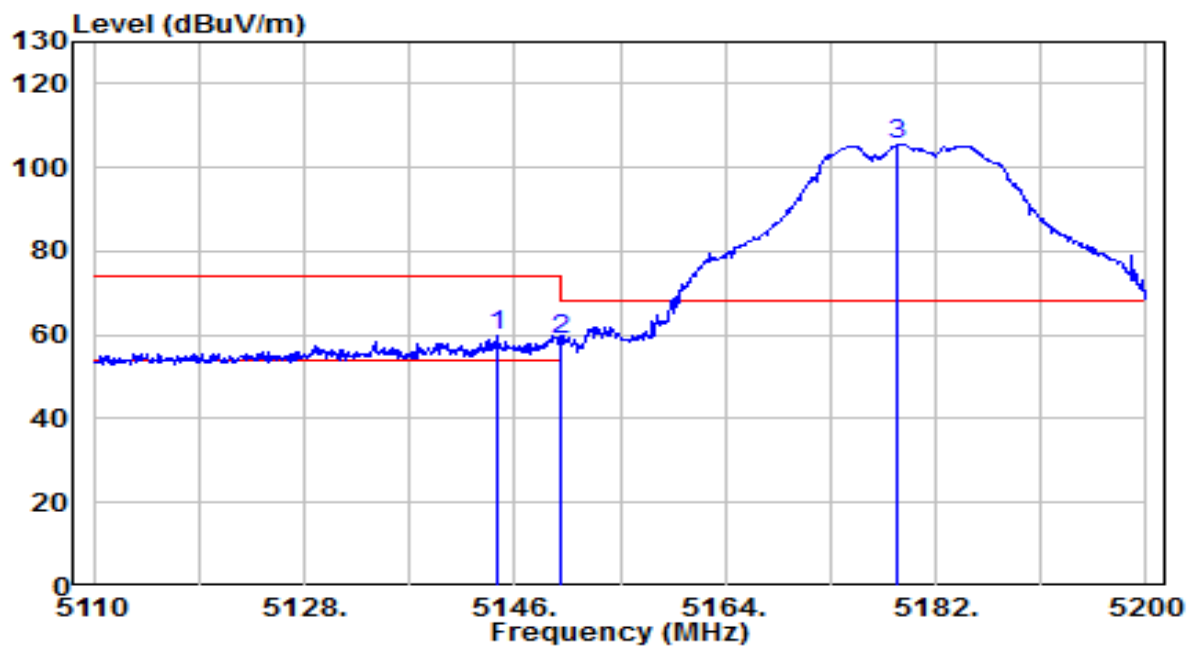


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.470	55.74	3.89	59.63	-14.37	74.00	220	320	Peak
2		5150.000	54.75	3.89	58.65	-15.35	74.00	220	320	Peak
3		5178.760	101.72	3.92	105.64	N/A	N/A	220	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

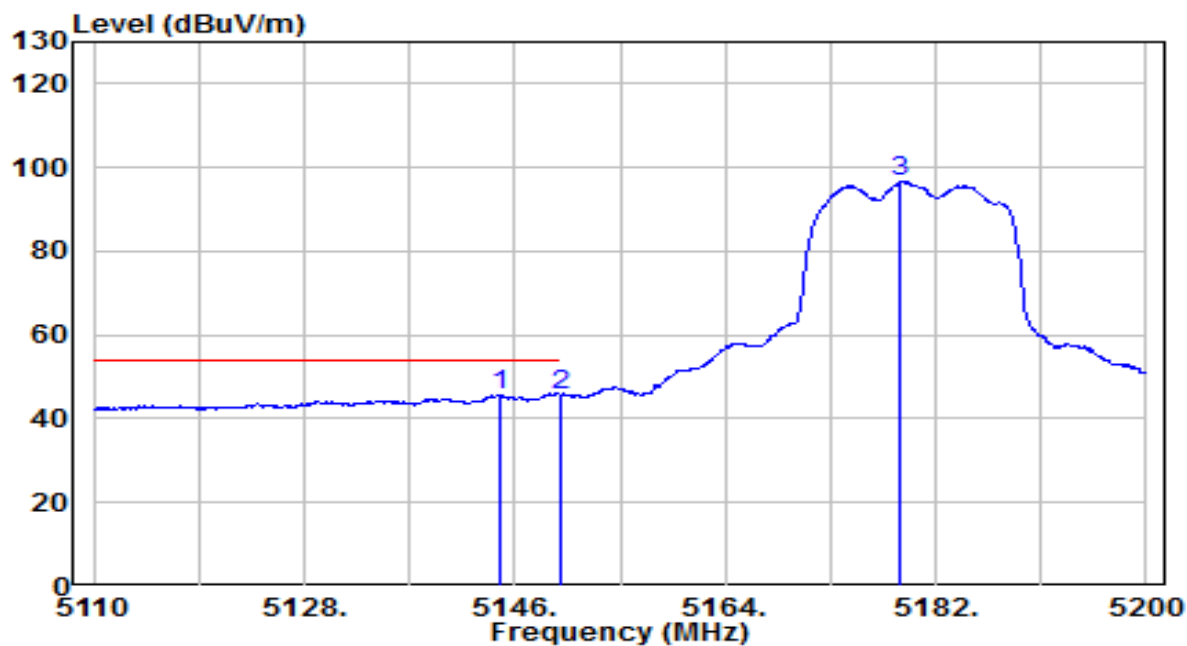


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.830	41.85	3.89	45.74	-8.26	54.00	220	320	Average
2		5150.000	41.68	3.89	45.58	-8.42	54.00	220	320	Average
3		5178.940	92.67	3.92	96.58	N/A	N/A	220	320	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

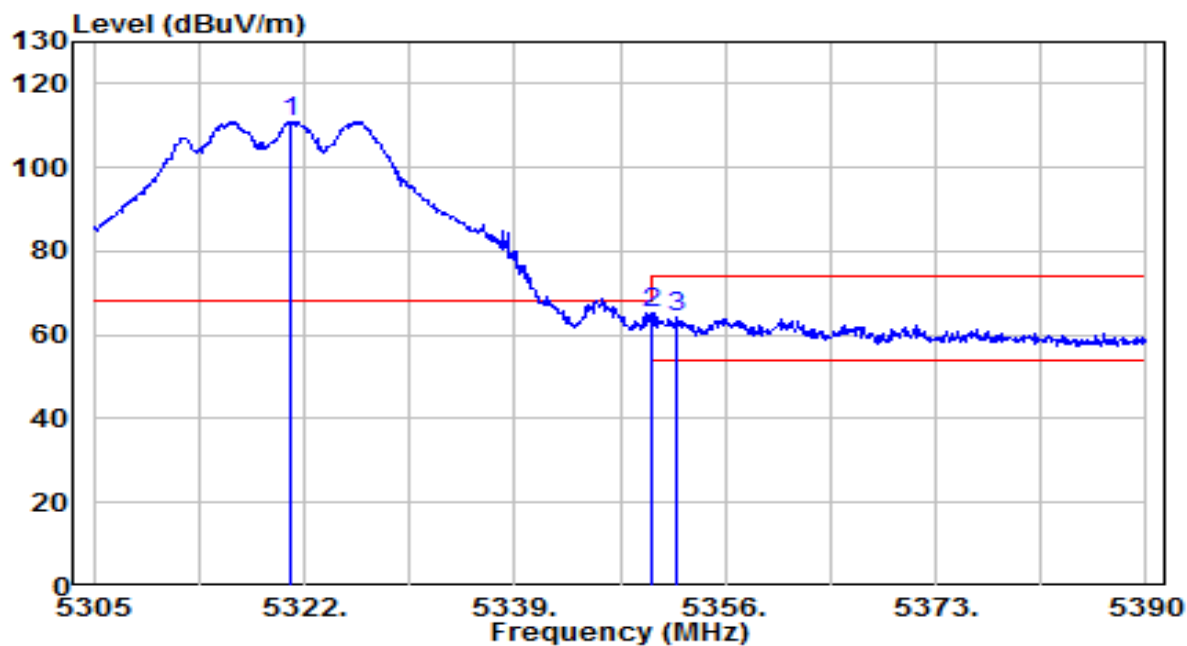


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.810	106.98	4.01	111.00	N/A	N/A	105	20	Peak
2	* 5350.000	61.09	4.03	65.13	-3.07	68.20	105	20	Peak
3	5352.090	60.09	4.04	64.13	-9.87	74.00	105	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

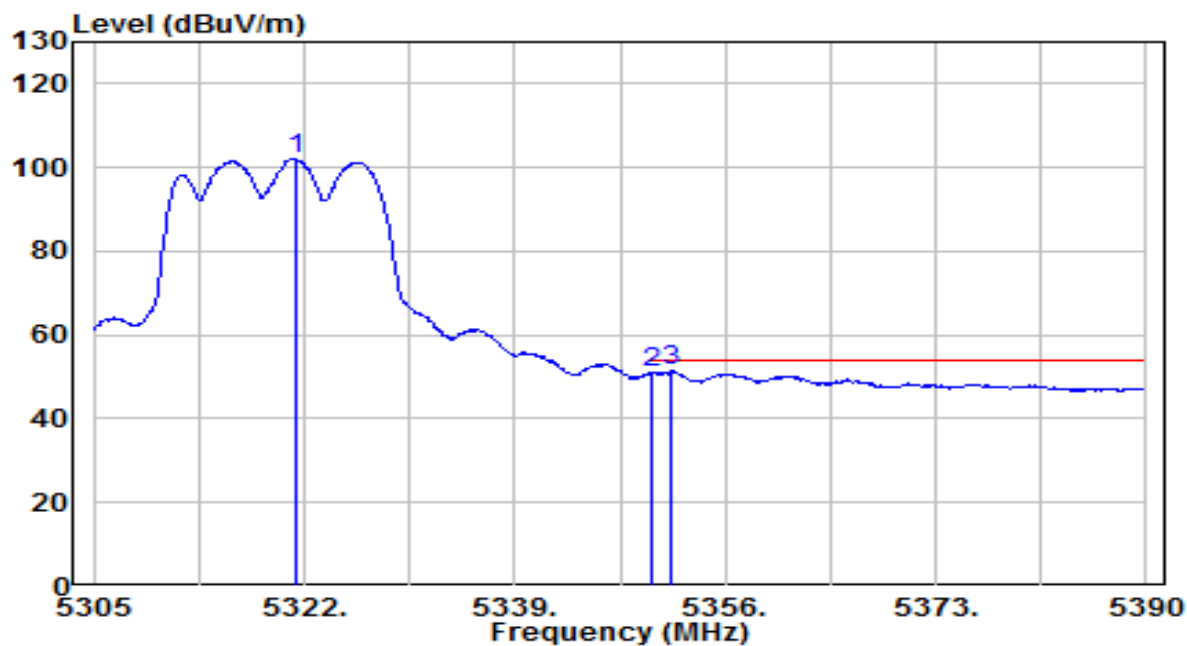


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.235	98.00	4.01	102.01	N/A	N/A	105	20	Average
2	5350.000	46.97	4.03	51.01	-2.99	54.00	105	20	Average
3	* 5351.665	47.29	4.04	51.33	-2.67	54.00	105	20	Average

Note:

1. " *" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

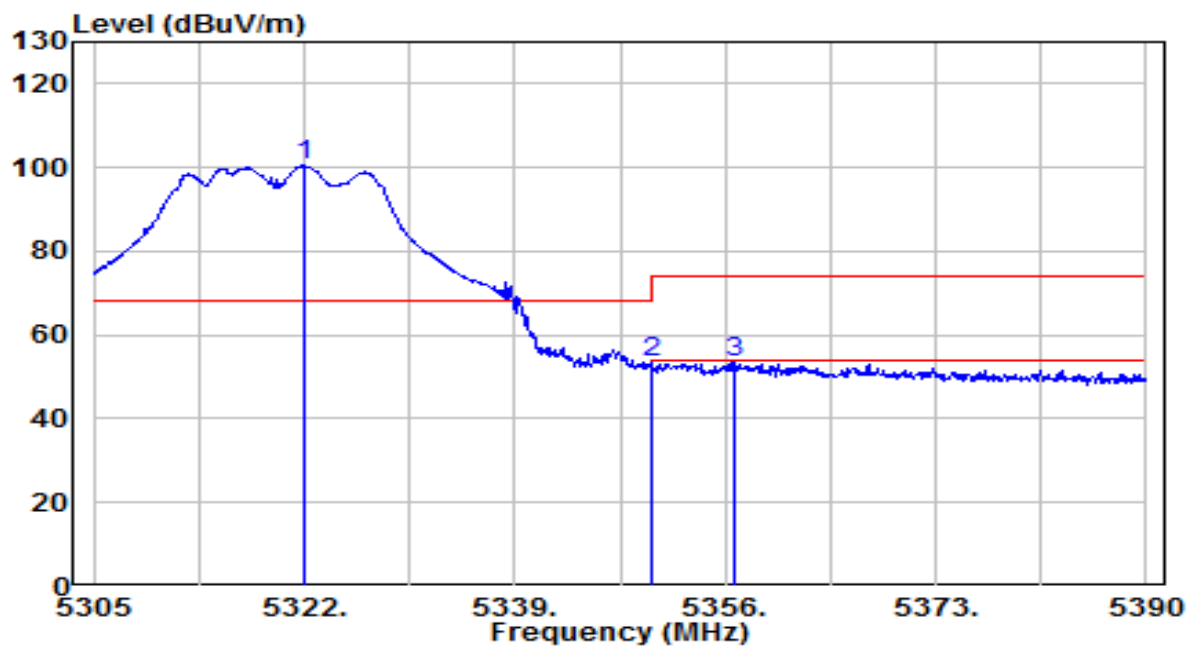


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.915	96.39	4.02	100.41	N/A	N/A	225	310	Peak
2	* 5350.000	49.41	4.03	53.45	-14.75	68.20	225	310	Peak
3	5356.850	49.44	4.04	53.48	-20.52	74.00	225	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

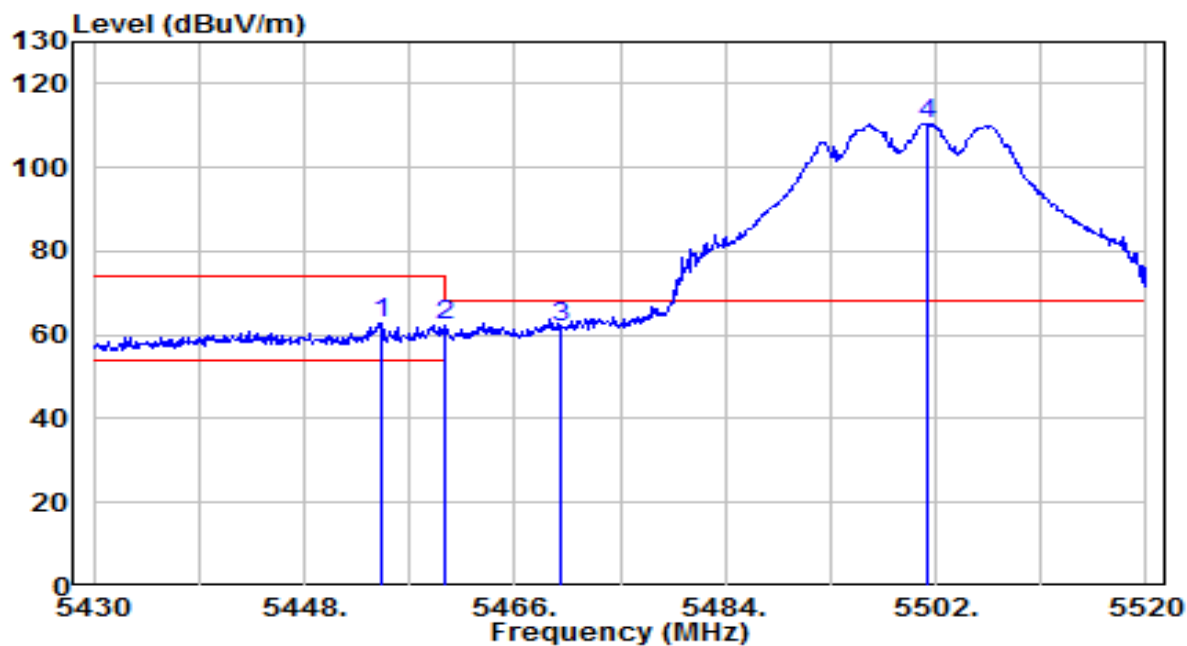


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.660	58.69	4.11	62.79	-11.21	74.00	160	355	Peak
2	* 5460.000	58.20	4.11	62.31	-5.89	68.20	160	355	Peak
3	5470.000	57.79	4.12	61.91	-6.29	68.20	160	355	Peak
4	5501.280	106.37	4.14	110.51	N/A	N/A	160	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

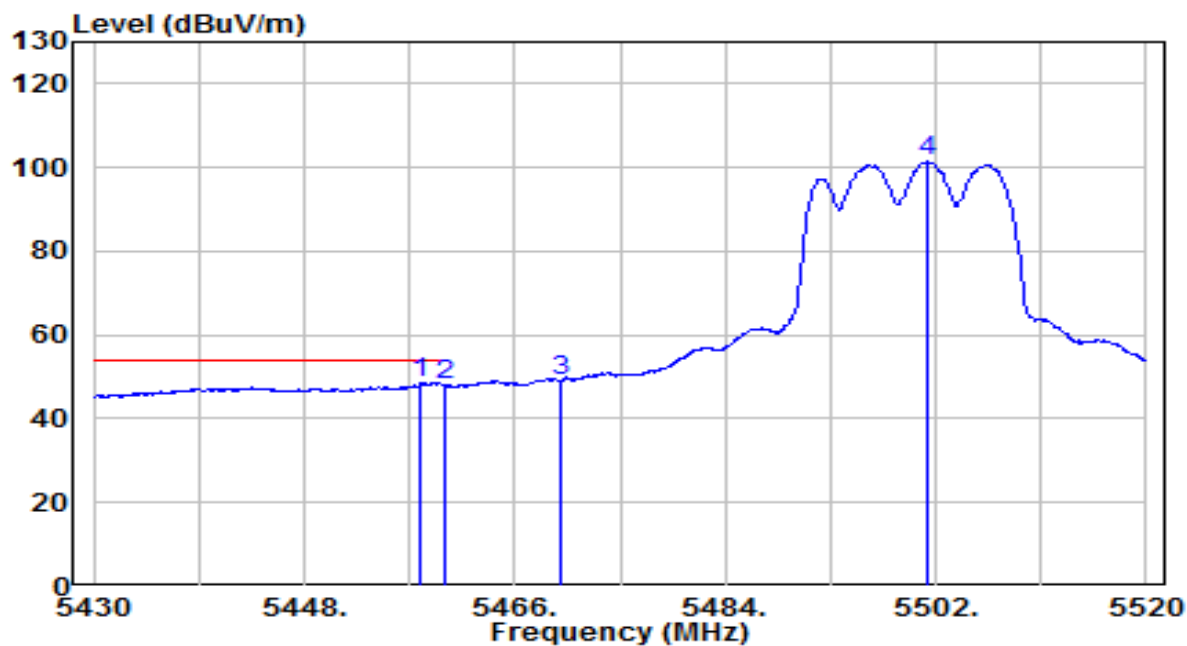


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.990	44.33	4.11	48.44	-5.56	54.00	160	355	Average
2		5460.000	43.82	4.11	47.93	-6.07	54.00	160	355	Average
3		5470.000	44.99	4.12	49.11	N/A	N/A	160	355	Average
4		5501.190	97.31	4.14	101.45	N/A	N/A	160	355	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

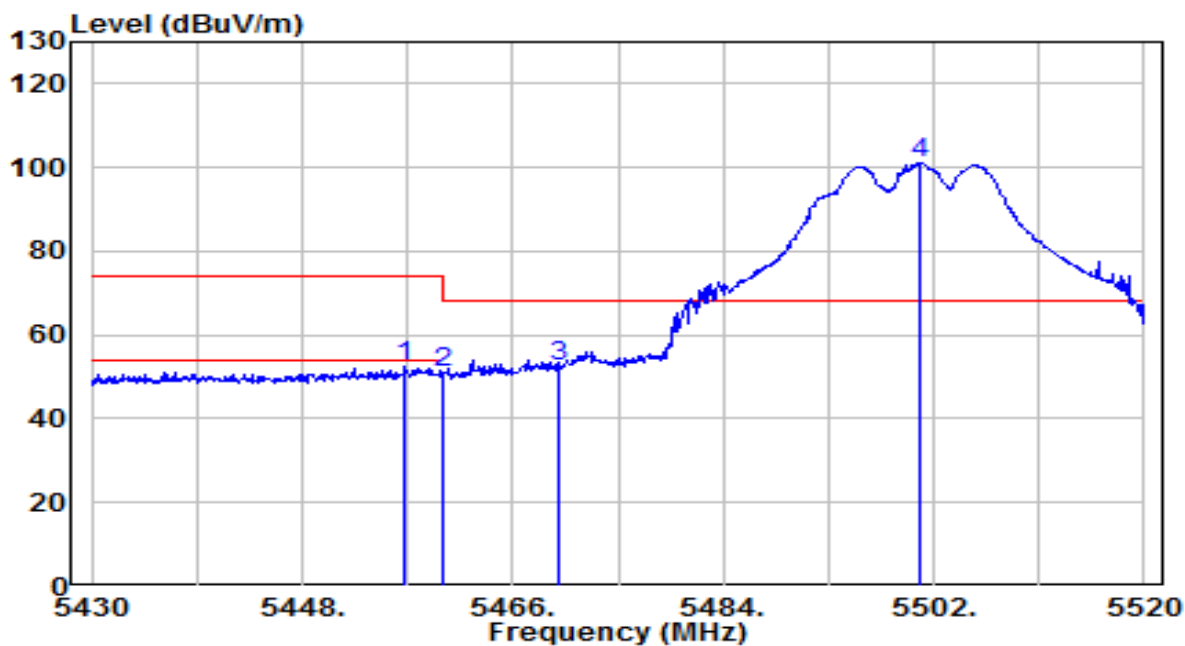


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.820	48.27	4.11	52.38	-21.62	74.00	250	305	Peak
2	5460.000	46.96	4.11	51.07	-17.13	68.20	250	305	Peak
3	* 5470.000	48.41	4.12	52.52	-15.68	68.20	250	305	Peak
4	5500.920	97.01	4.14	101.15	N/A	N/A	250	305	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

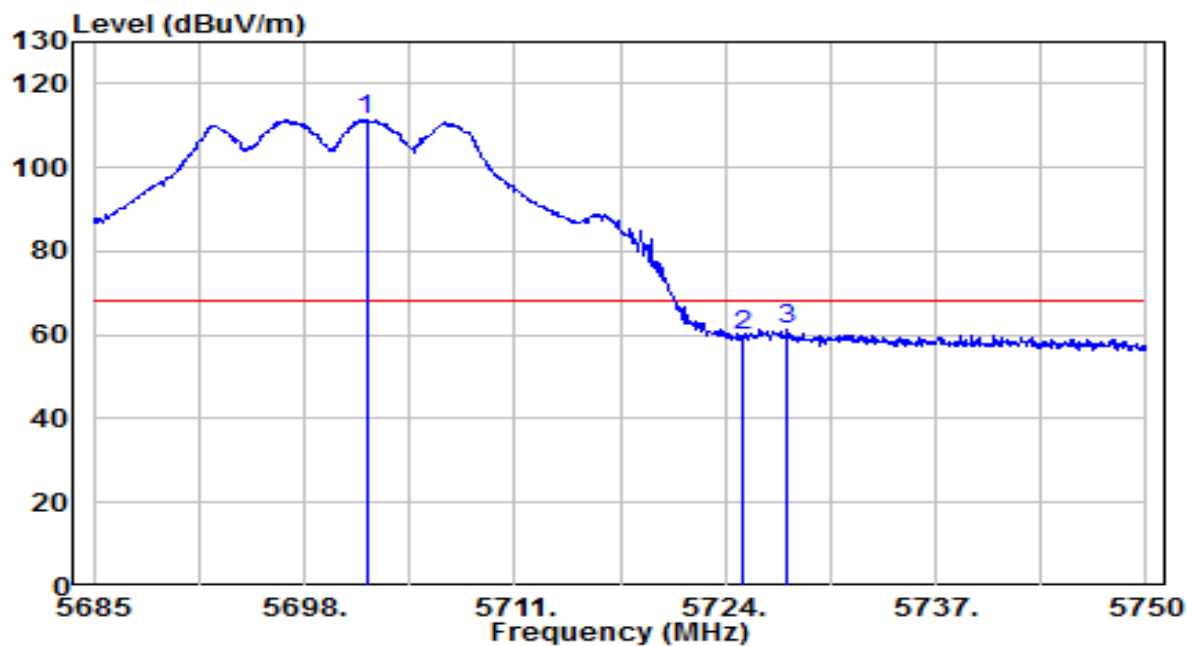


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.835	106.53	4.82	111.35	N/A	N/A	100	345	Peak
2	5725.000	54.77	4.90	59.66	-8.54	68.20	100	345	Peak
3	* 5727.835	56.47	4.91	61.38	-6.82	68.20	100	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

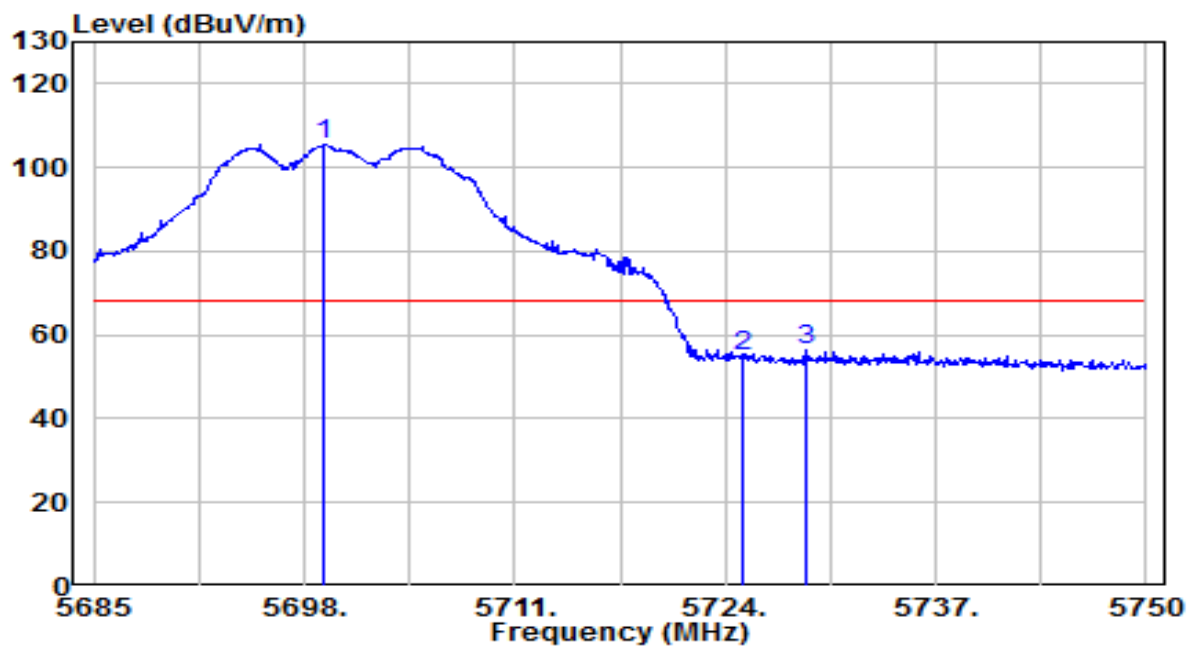


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.235	100.67	4.81	105.48	N/A	N/A	230	310	Peak
2	5725.000	50.08	4.90	54.97	-13.23	68.20	230	310	Peak
3	* 5728.940	51.40	4.91	56.31	-11.89	68.20	230	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

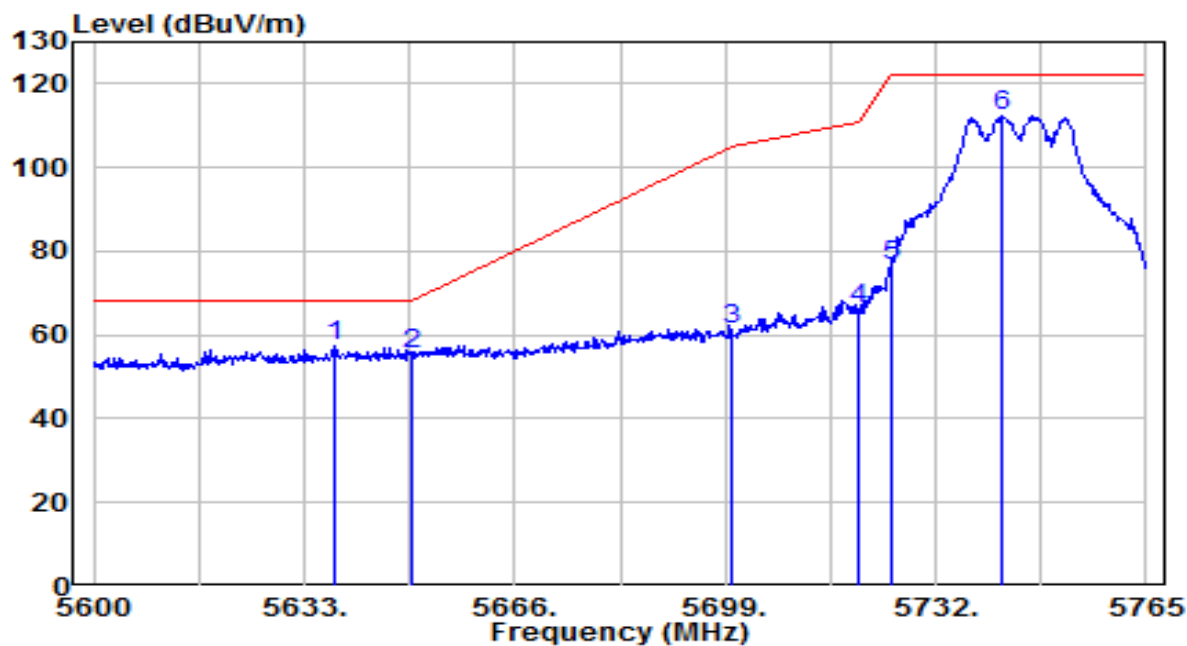


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.620	52.83	4.60	57.44	-10.76	68.20	110	320	Peak
2		5650.000	50.73	4.64	55.38	-12.82	68.20	110	320	Peak
3		5700.000	56.70	4.81	61.51	-43.69	105.20	110	320	Peak
4		5720.000	61.55	4.88	66.43	-44.37	110.80	110	320	Peak
5		5725.000	71.41	4.90	76.31	-45.89	122.20	110	320	Peak
6		5742.230	107.29	4.95	112.24	N/A	N/A	110	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

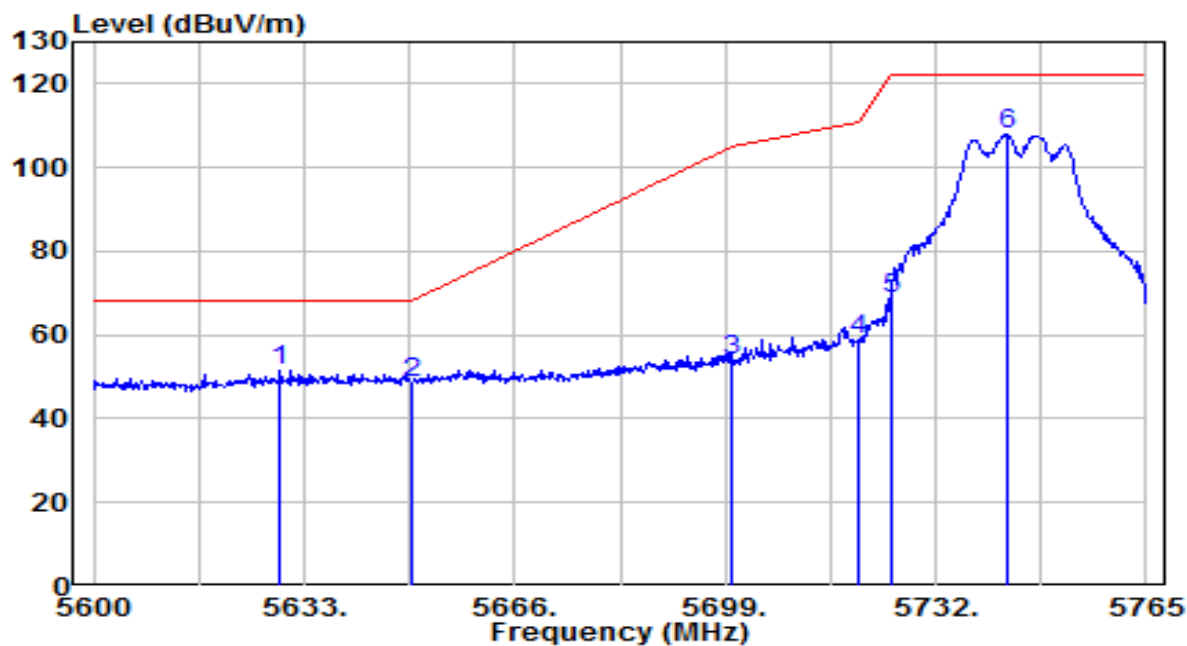


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5629.205	46.81	4.57	51.38	-16.82	68.20	230	310	Peak
2		5650.000	44.09	4.64	48.73	-19.47	68.20	230	310	Peak
3		5700.000	49.22	4.81	54.03	-51.17	105.20	230	310	Peak
4		5720.000	54.04	4.88	58.92	-51.88	110.80	230	310	Peak
5		5725.000	64.02	4.90	68.92	-53.28	122.20	230	310	Peak
6		5743.055	102.83	4.96	107.79	N/A	N/A	230	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

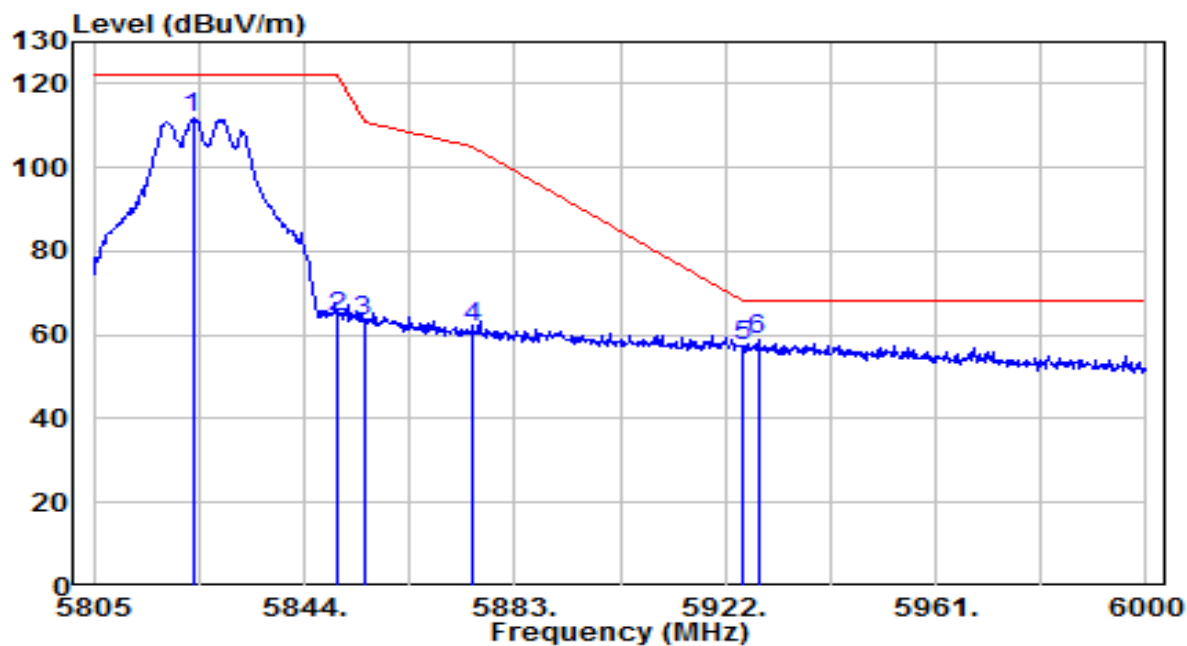


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.330	106.54	5.23	111.76	N/A	N/A	160	10	Peak
2	5850.000	59.12	5.32	64.44	-57.76	122.20	160	10	Peak
3	5855.000	58.10	5.33	63.43	-47.37	110.80	160	10	Peak
4	5875.000	56.19	5.40	61.59	-43.61	105.20	160	10	Peak
5	5925.000	51.59	5.57	57.16	-11.04	68.20	160	10	Peak
6	* 5928.045	53.28	5.58	58.86	-9.34	68.20	160	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

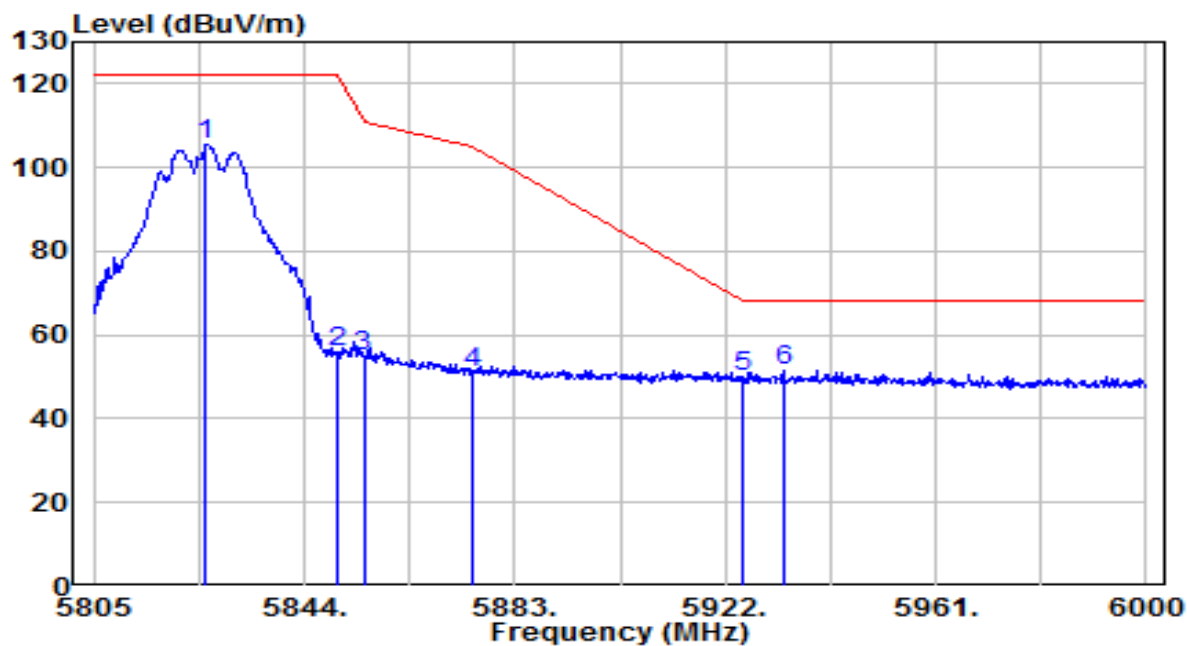


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.670	100.24	5.23	105.48	N/A	N/A	250	305	Peak
2	5850.000	50.44	5.32	55.76	-66.44	122.20	250	305	Peak
3	5855.000	49.45	5.33	54.78	-56.02	110.80	250	305	Peak
4	5875.000	45.83	5.40	51.23	-53.97	105.20	250	305	Peak
5	5925.000	44.33	5.57	49.90	-18.30	68.20	250	305	Peak
6	* 5932.725	45.98	5.59	51.58	-16.62	68.20	250	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

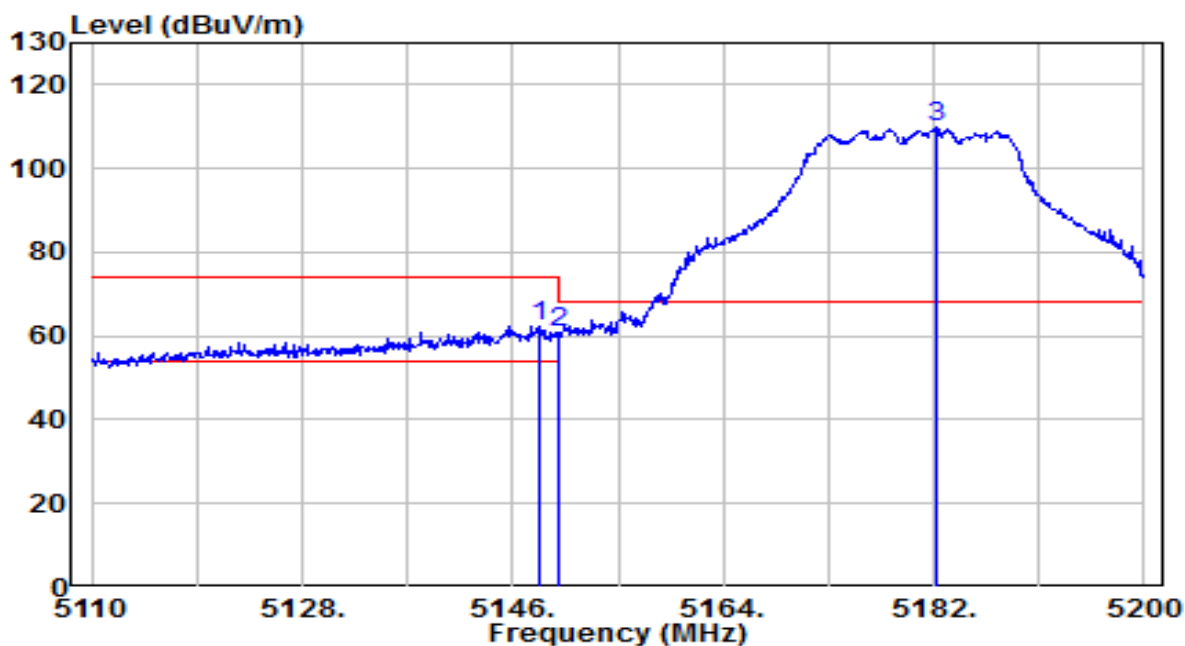


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.340	58.54	3.89	62.43	-11.57	74.00	280	20	Peak
2		5150.000	56.70	3.89	60.59	-13.41	74.00	280	20	Peak
3		5182.180	105.76	3.92	109.68	N/A	N/A	280	20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

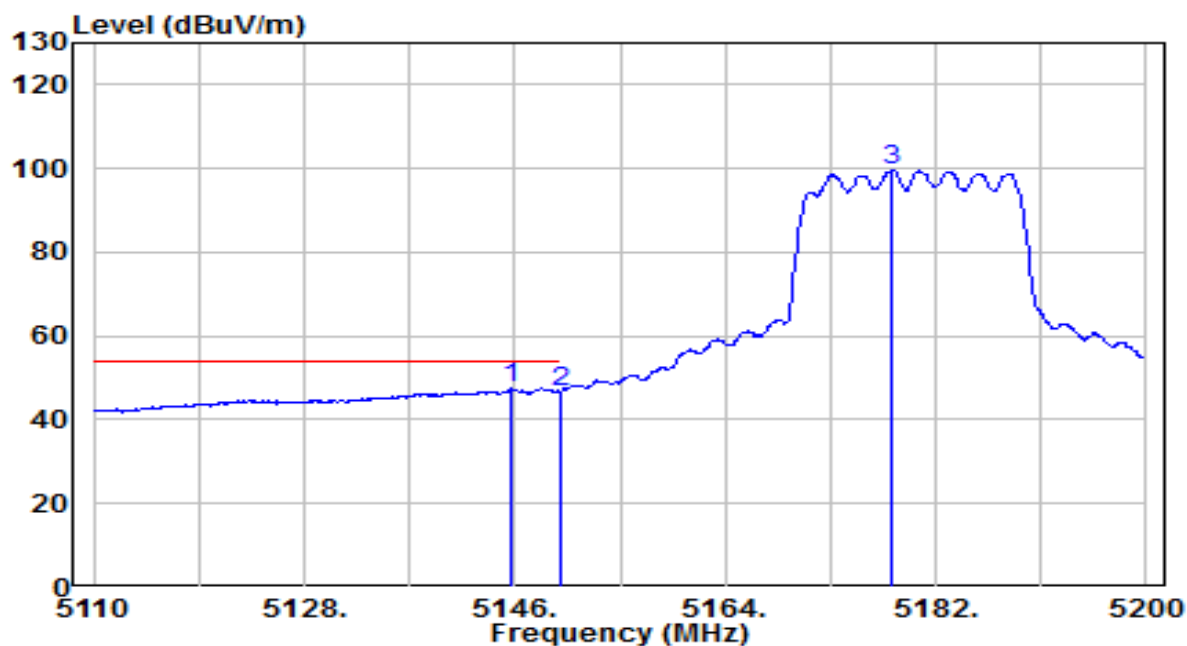


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.730	43.50	3.89	47.39	-6.61	54.00	280	20	Average
2		5150.000	42.88	3.89	46.78	-7.22	54.00	280	20	Average
3		5178.220	95.71	3.91	99.63	N/A	N/A	280	20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

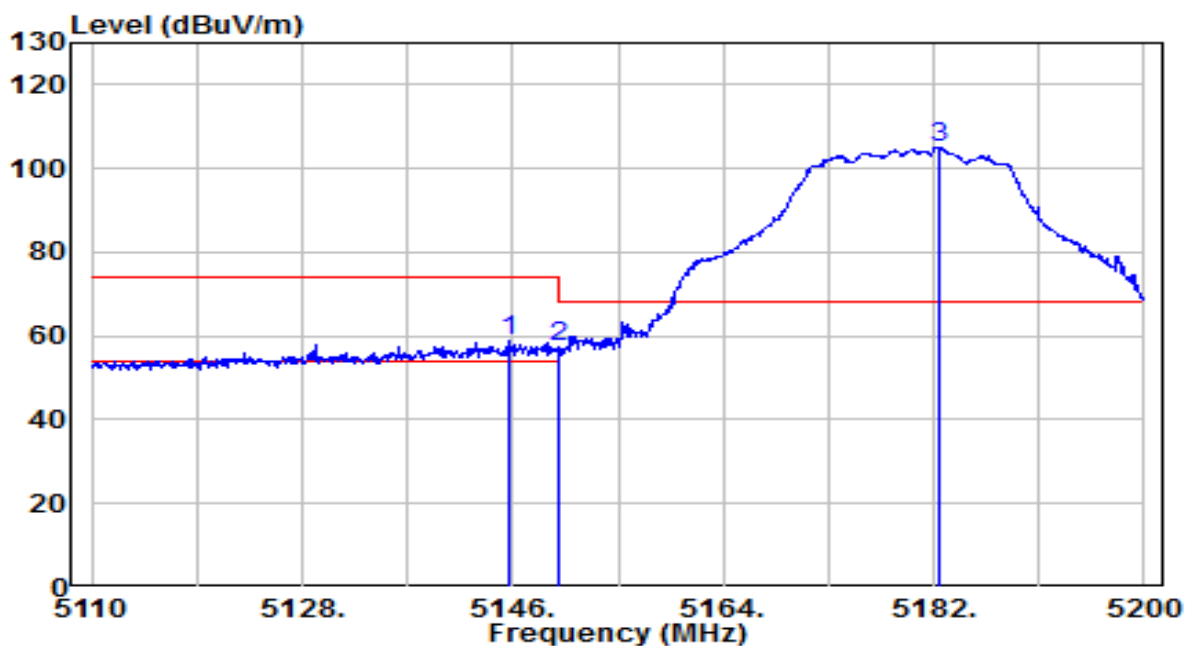


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.640	54.88	3.89	58.78	-15.22	74.00	230	315	Peak
2		5150.000	53.26	3.89	57.16	-16.84	74.00	230	315	Peak
3		5182.360	101.20	3.92	105.12	N/A	N/A	230	315	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

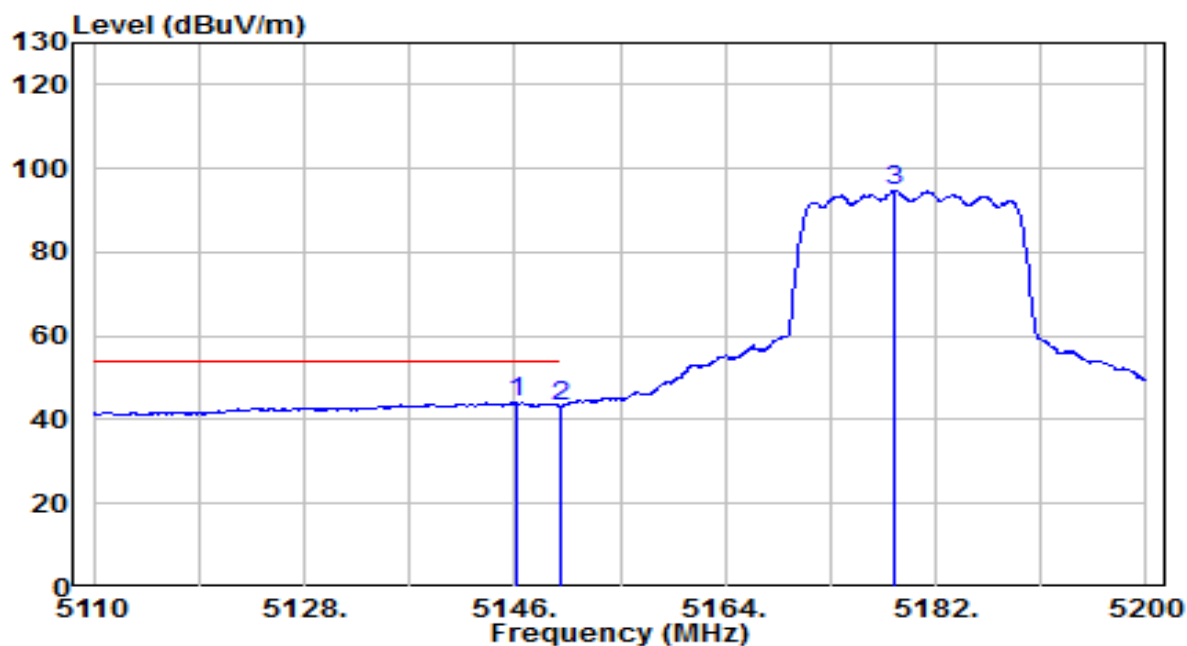


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.270	40.28	3.89	44.17	-9.83	54.00	230	315	Average
2		5150.000	39.47	3.89	43.36	-10.64	54.00	230	315	Average
3		5178.490	90.96	3.91	94.88	N/A	N/A	230	315	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

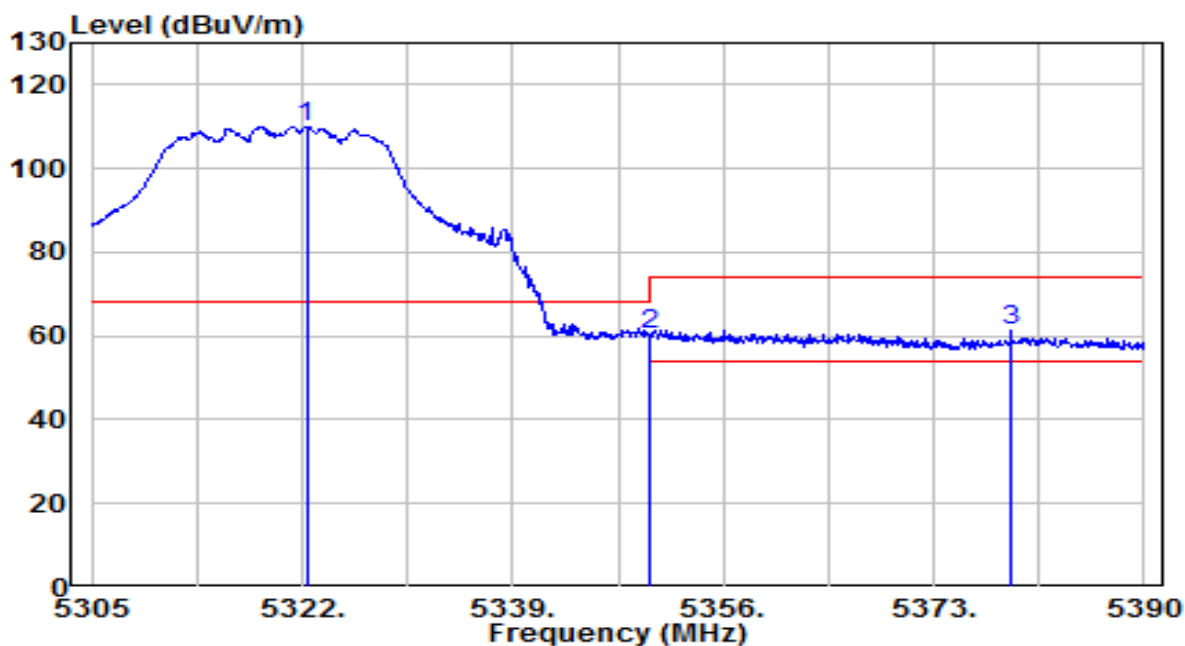


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.340	106.01	4.02	110.03	N/A	N/A	110	5	Peak
2	* 5350.000	56.52	4.03	60.55	-7.65	68.20	110	5	Peak
3	5379.205	57.45	4.06	61.51	-12.49	74.00	110	5	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

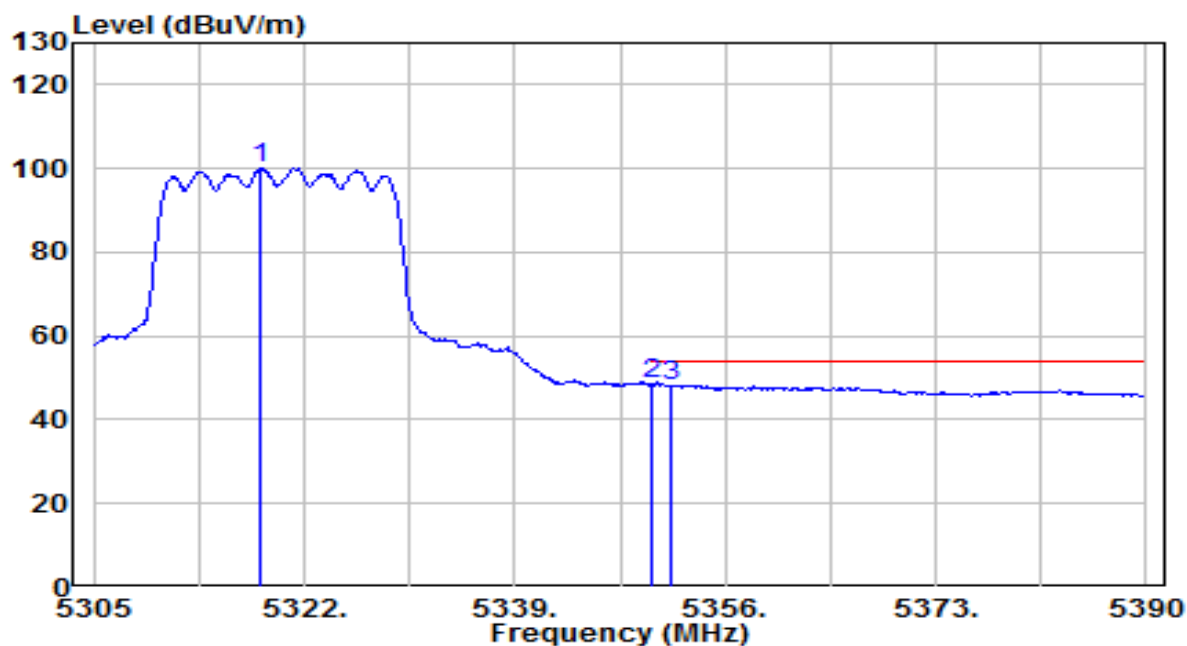


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.515	96.16	4.01	100.17	N/A	N/A	110	5	Average
2	* 5350.000	44.29	4.03	48.32	-5.68	54.00	110	5	Average
3	5351.665	44.25	4.04	48.28	-5.72	54.00	110	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

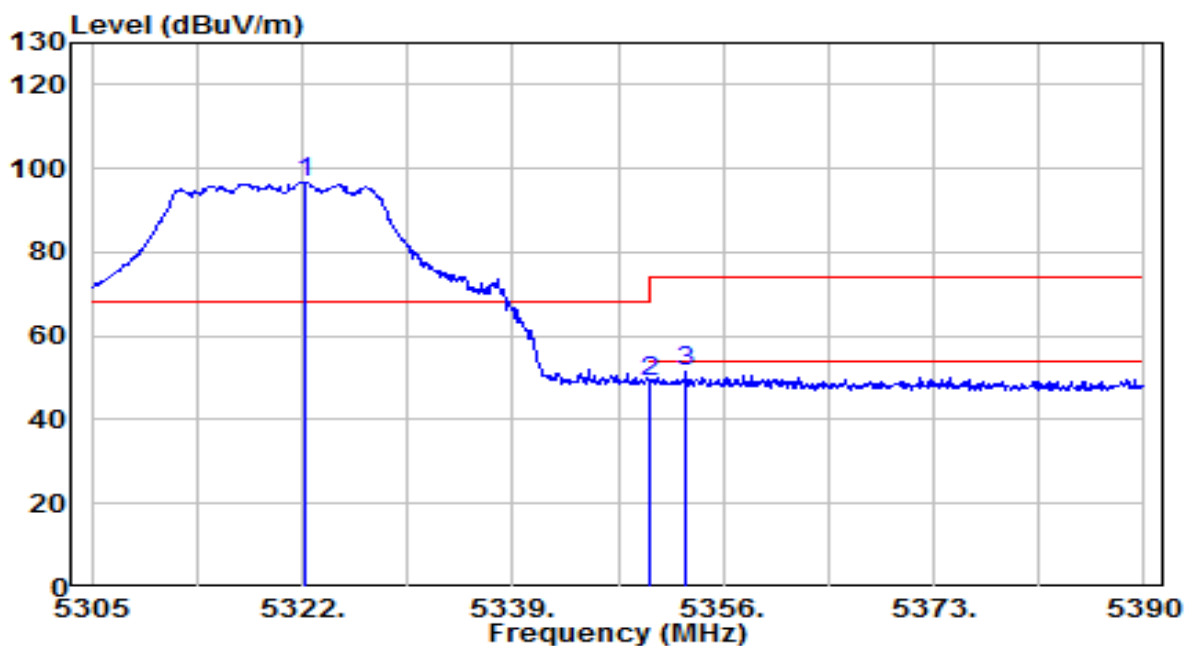


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.255	92.82	4.02	96.83	N/A	N/A	215	330	Peak
2	* 5350.000	45.03	4.03	49.07	-19.13	68.20	215	330	Peak
3	5353.025	47.62	4.04	51.66	-22.34	74.00	215	330	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

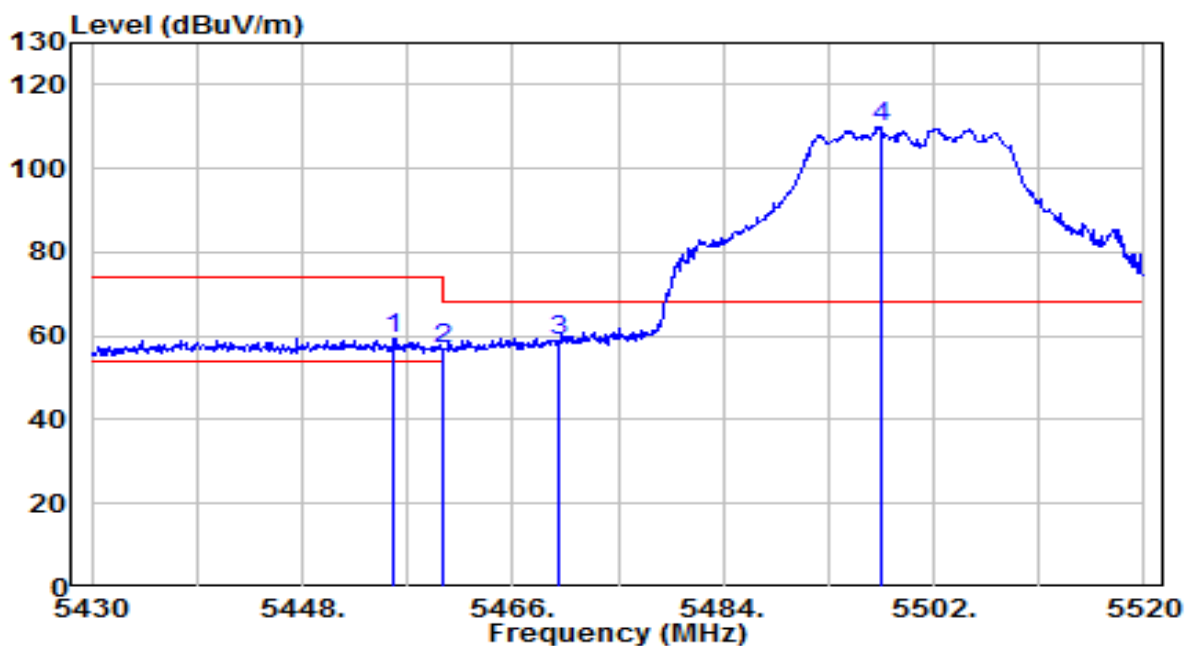


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.830	55.47	4.11	59.58	-14.42	74.00	150	350	Peak
2	5460.000	52.82	4.11	56.94	-11.26	68.20	150	350	Peak
3	* 5470.000	54.81	4.12	58.93	-9.27	68.20	150	350	Peak
4	5497.410	105.84	4.14	109.98	N/A	N/A	150	350	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

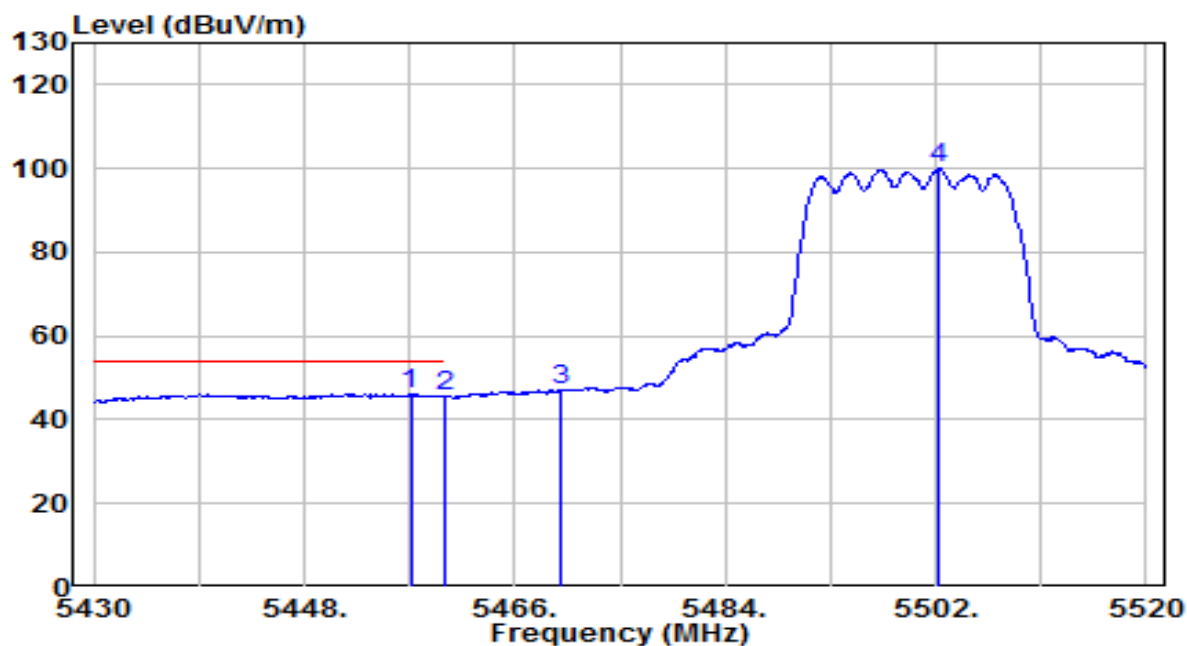


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.090	42.24	4.11	46.35	-7.65	54.00	150	350	Average
2		5460.000	41.72	4.11	45.83	-8.17	54.00	150	350	Average
3		5470.000	43.11	4.12	47.23	N/A	N/A	150	350	Average
4		5502.180	95.98	4.15	100.12	N/A	N/A	150	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

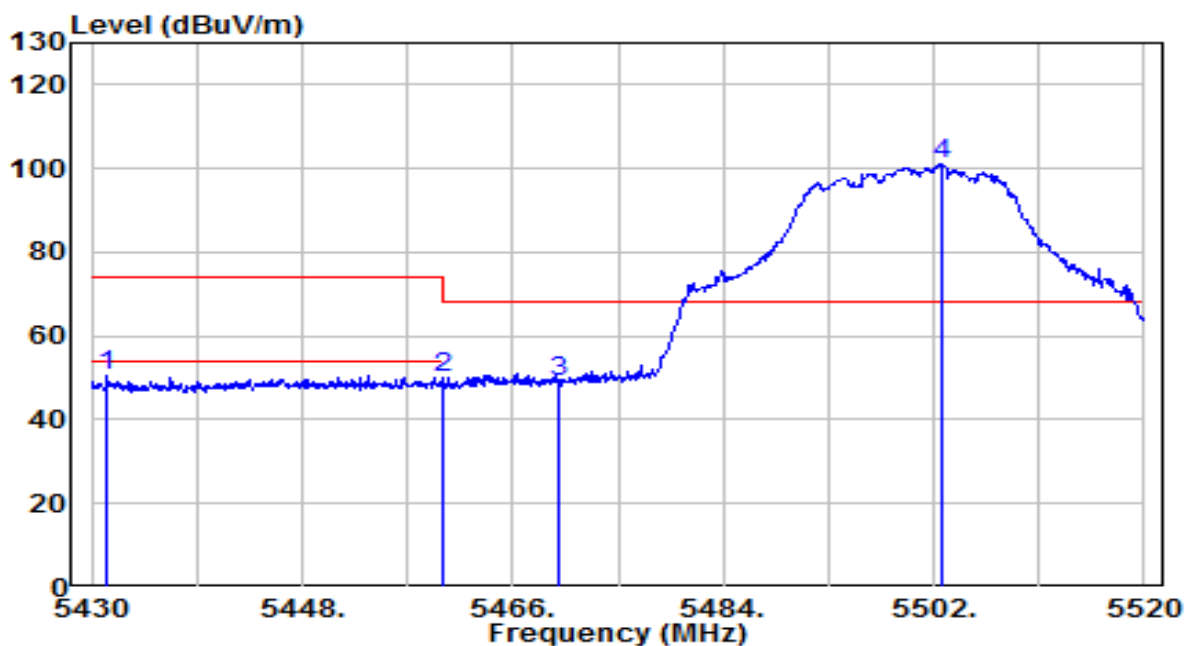


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5431.350	46.36	4.09	50.46	-23.54	74.00	250	305	Peak
2	* 5460.000	45.88	4.11	50.00	-18.20	68.20	250	305	Peak
3	5470.000	44.79	4.12	48.91	-19.29	68.20	250	305	Peak
4	5502.720	96.79	4.15	100.94	N/A	N/A	250	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

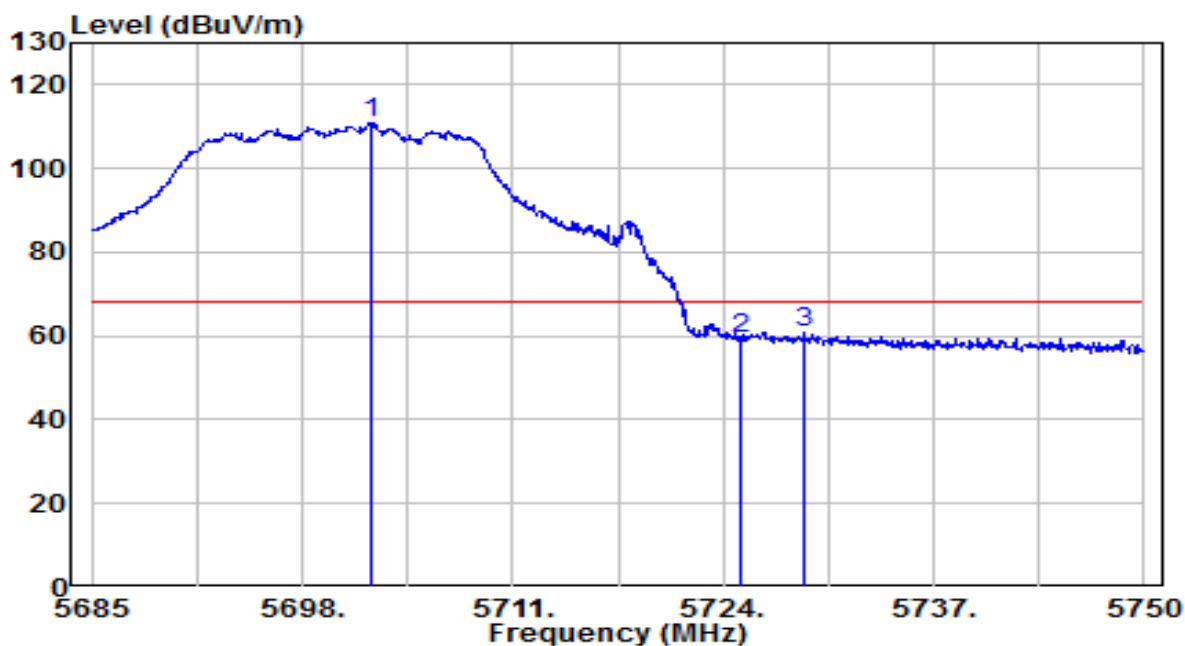


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.290	106.09	4.82	110.91	N/A	N/A	155	345	Peak
2	5725.000	54.57	4.90	59.46	-8.74	68.20	155	345	Peak
3	* 5729.005	55.77	4.91	60.68	-7.52	68.20	155	345	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

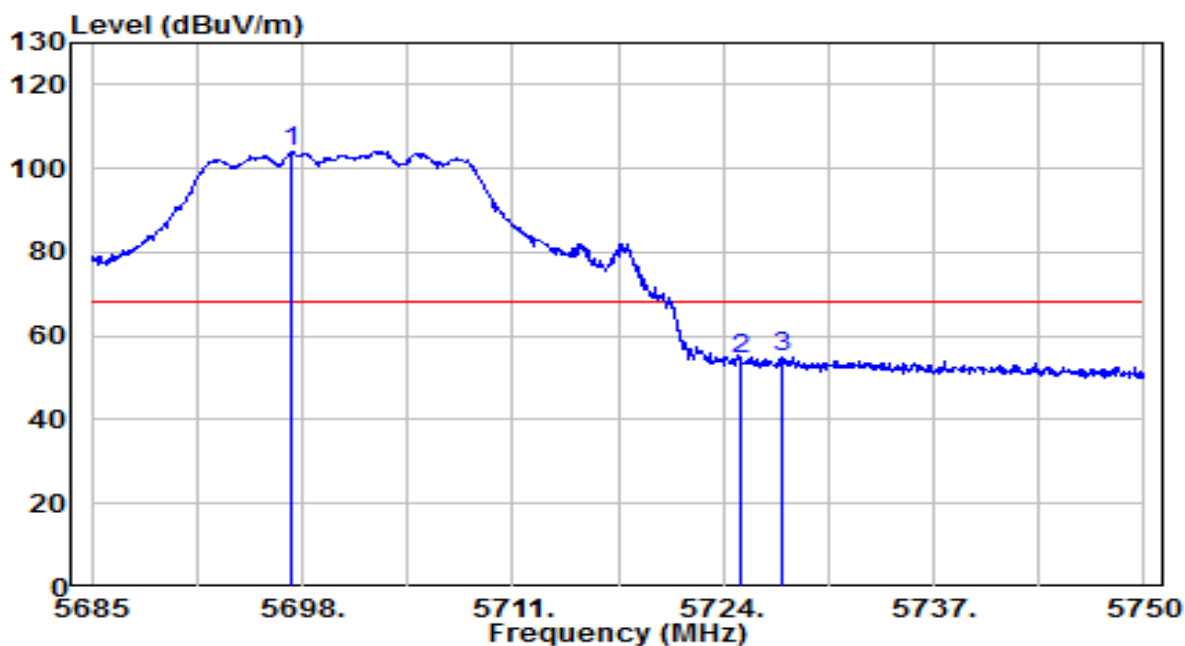


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.350	99.30	4.80	104.10	N/A	N/A	265	300	Peak
2	5725.000	49.63	4.90	54.52	-13.68	68.20	265	300	Peak
3	* 5727.575	50.11	4.90	55.02	-13.18	68.20	265	300	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

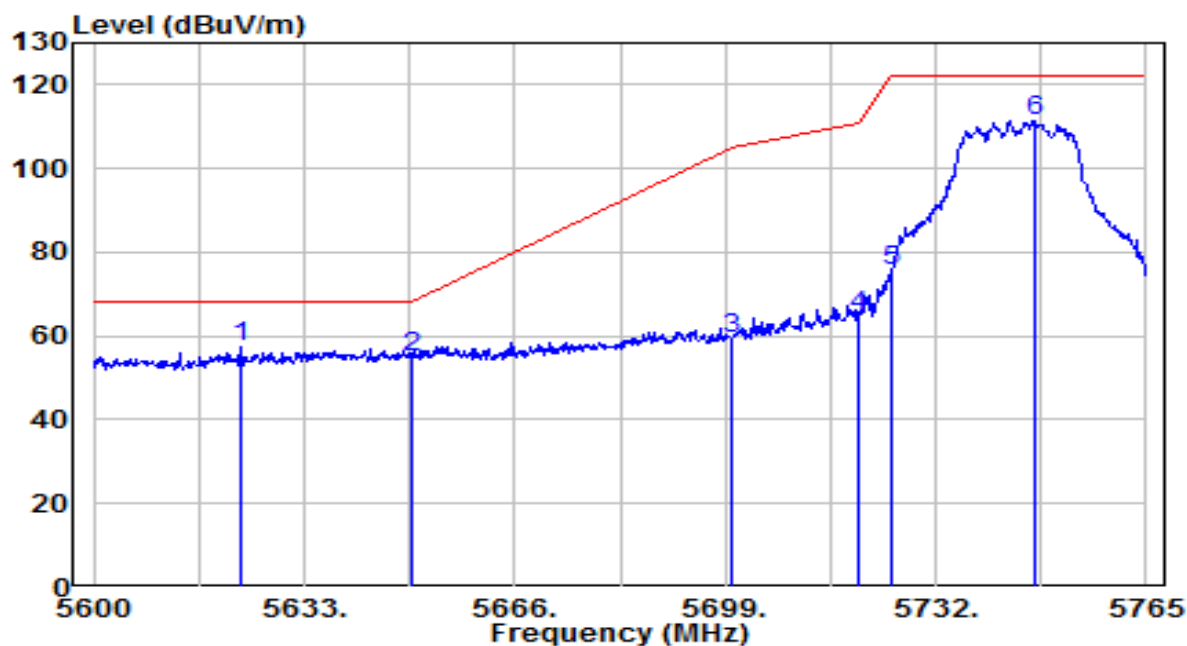


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5623.100	52.65	4.55	57.20	-11.00	68.20	115	325	Peak
2	5650.000	50.09	4.64	54.73	-13.47	68.20	115	325	Peak
3	5700.000	54.58	4.81	59.39	-45.81	105.20	115	325	Peak
4	5720.000	59.91	4.88	64.79	-46.01	110.80	115	325	Peak
5	5725.000	70.82	4.90	75.72	-46.48	122.20	115	325	Peak
6	5747.510	106.41	4.97	111.38	N/A	N/A	115	325	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

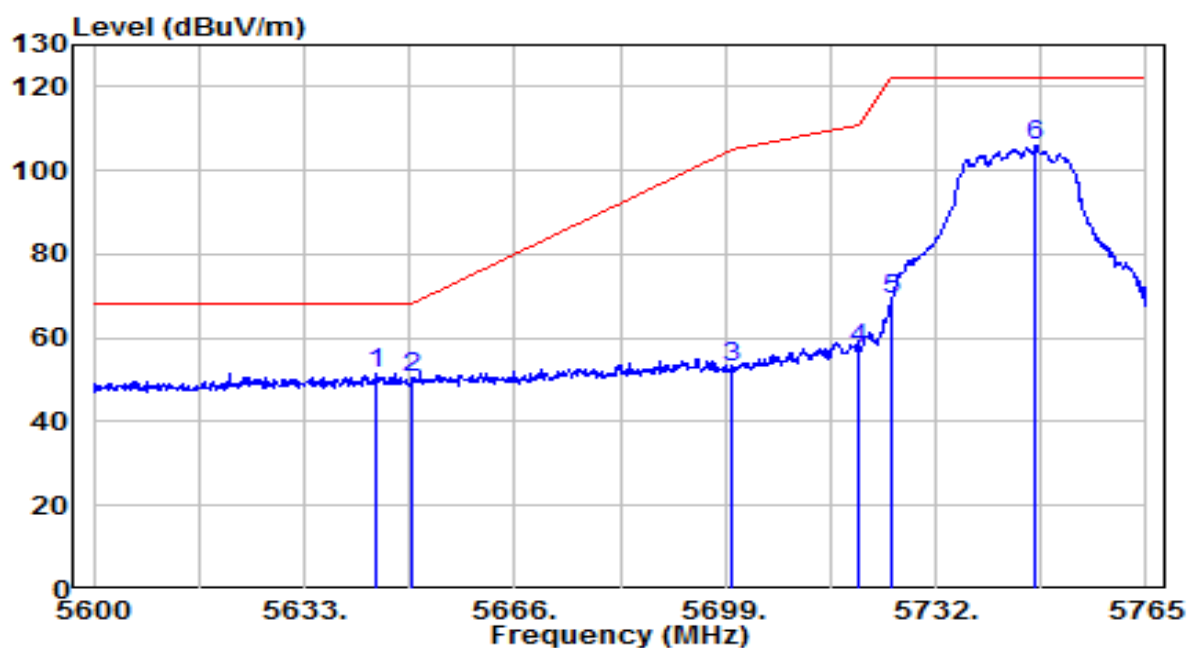


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.055	46.96	4.62	51.59	-16.61	68.20	235	305	Peak
2		5650.000	45.90	4.64	50.54	-17.66	68.20	235	305	Peak
3		5700.000	48.27	4.81	53.08	-52.12	105.20	235	305	Peak
4		5720.000	52.41	4.88	57.29	-53.51	110.80	235	305	Peak
5		5725.000	64.10	4.90	68.99	-53.21	122.20	235	305	Peak
6		5747.675	100.85	4.97	105.82	N/A	N/A	235	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

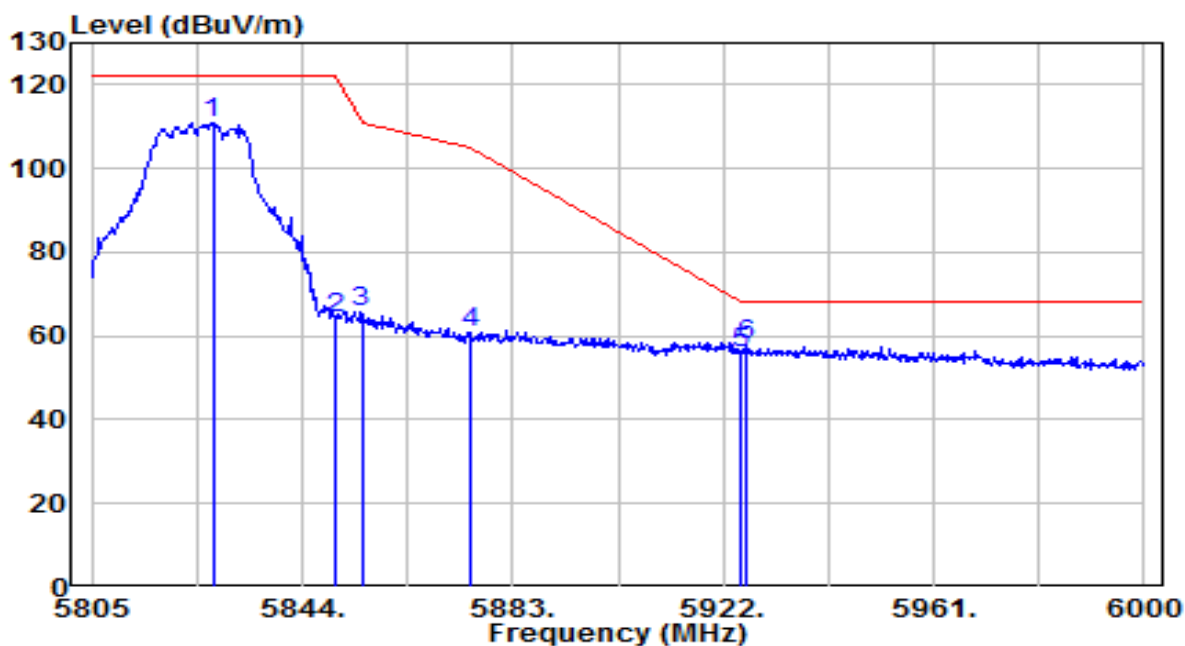


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5827.425	105.68	5.24	110.92	N/A	N/A	185	10	Peak
2	5850.000	59.15	5.32	64.47	-57.73	122.20	185	10	Peak
3	5855.000	60.47	5.33	65.81	-44.99	110.80	185	10	Peak
4	5875.000	55.25	5.40	60.65	-44.55	105.20	185	10	Peak
5	5925.000	50.33	5.57	55.90	-12.30	68.20	185	10	Peak
6	* 5926.485	52.09	5.57	57.67	-10.53	68.20	185	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

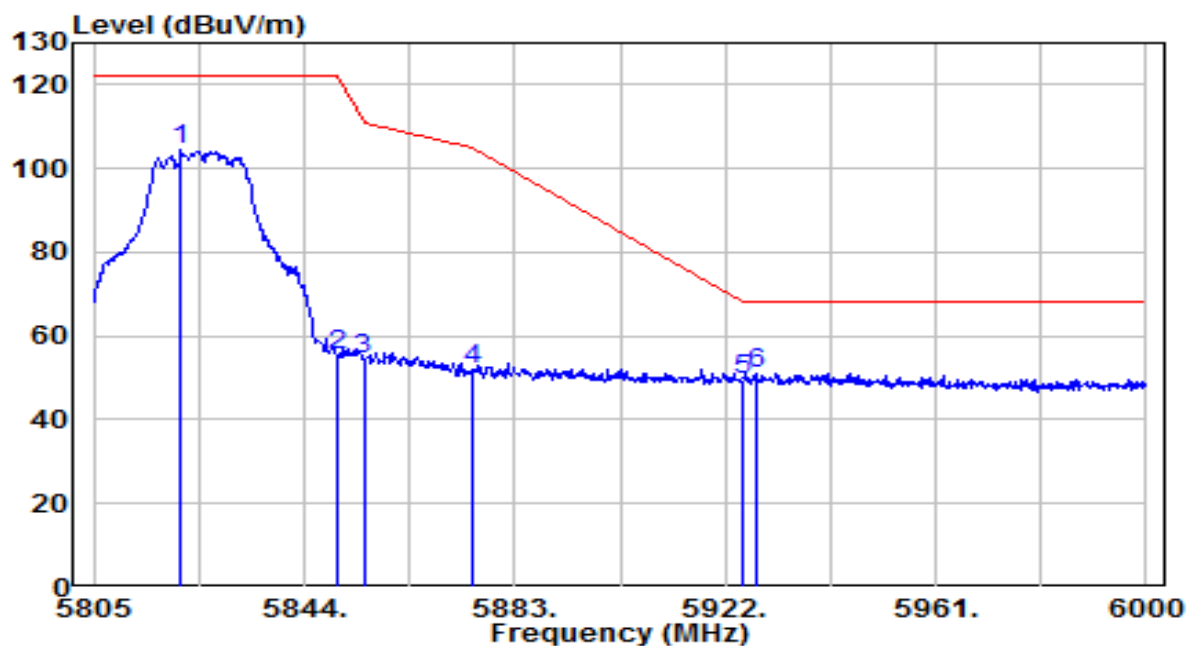


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.990	99.05	5.22	104.27	N/A	N/A	215	305	Peak
2	5850.000	50.07	5.32	55.39	-66.81	122.20	215	305	Peak
3	5855.000	49.29	5.33	54.62	-56.18	110.80	215	305	Peak
4	5875.000	46.53	5.40	51.93	-53.27	105.20	215	305	Peak
5	5925.000	44.22	5.57	49.79	-18.41	68.20	215	305	Peak
6	* 5927.655	45.33	5.58	50.91	-17.29	68.20	215	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

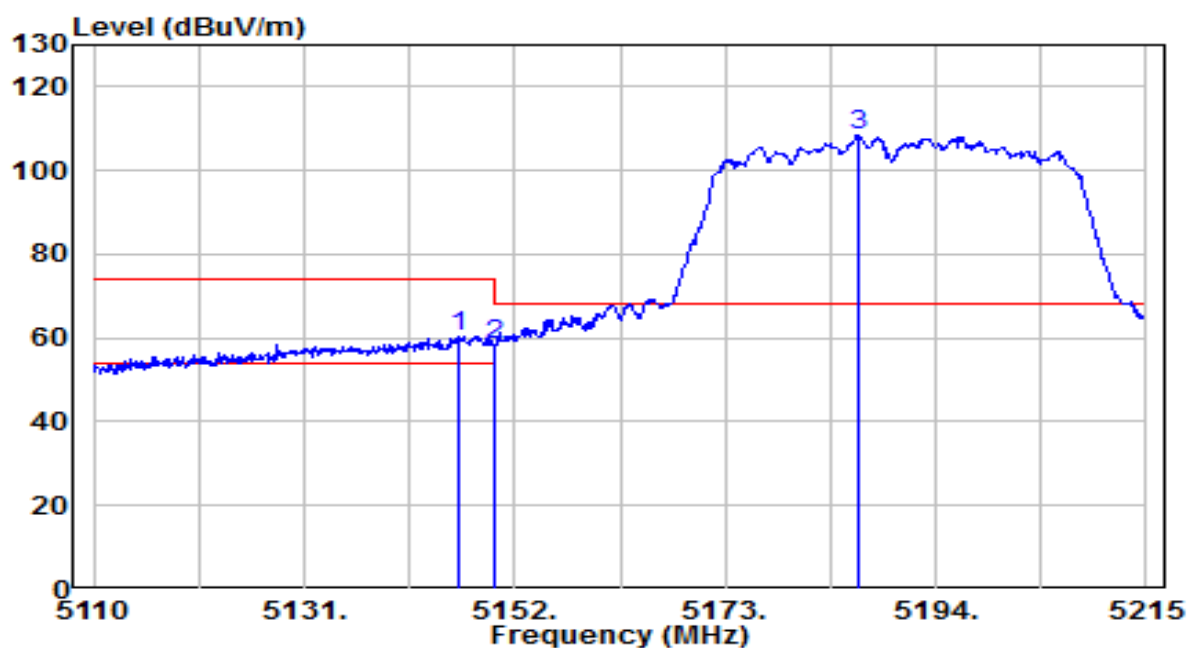


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.330	56.38	3.89	60.27	-13.73	74.00	280	20	Peak
2		5150.000	54.40	3.89	58.30	-15.70	74.00	280	20	Peak
3		5186.230	104.44	3.92	108.36	N/A	N/A	280	20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

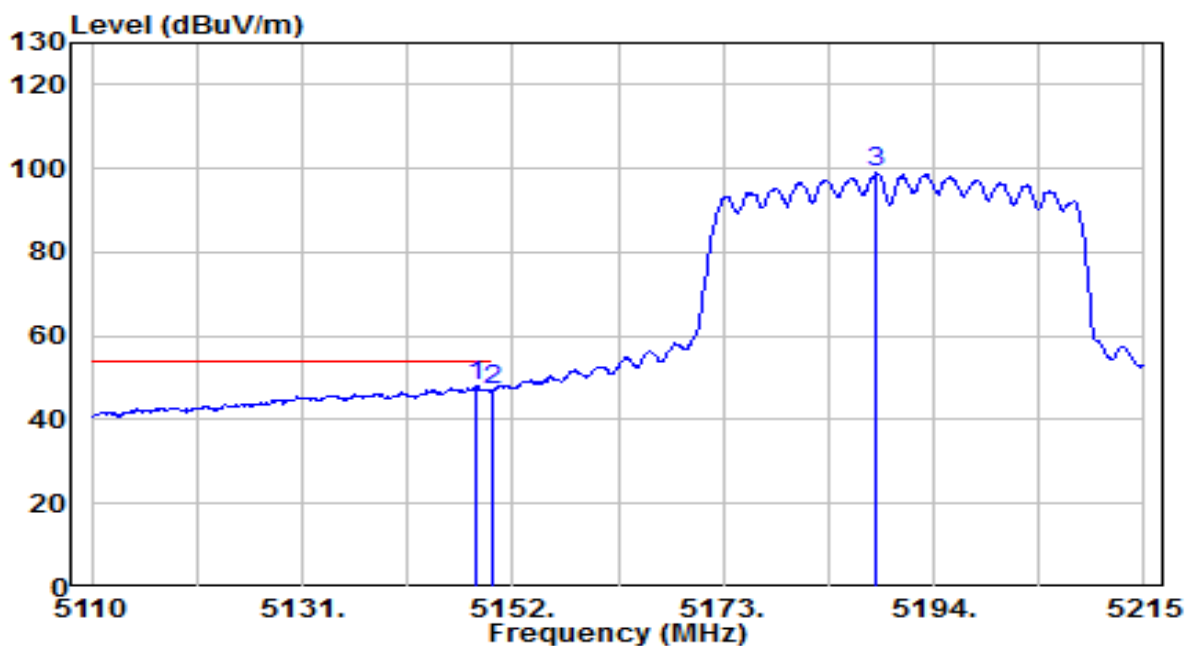


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.325	44.24	3.89	48.13	-5.87	54.00	280	20	Average
2		5150.000	43.19	3.89	47.09	-6.91	54.00	280	20	Average
3		5188.330	95.17	3.92	99.09	N/A	N/A	280	20	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

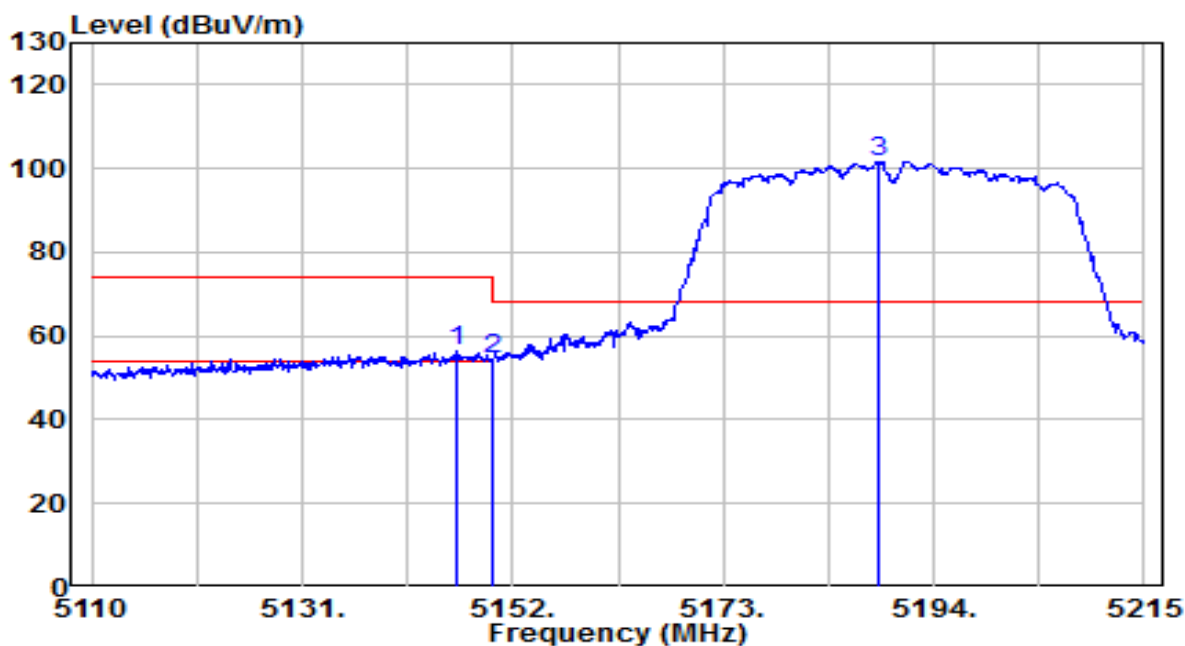


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.435	52.36	3.89	56.26	-17.74	74.00	230	315	Peak
2		5150.000	50.71	3.89	54.60	-19.40	74.00	230	315	Peak
3		5188.435	97.77	3.92	101.70	N/A	N/A	230	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

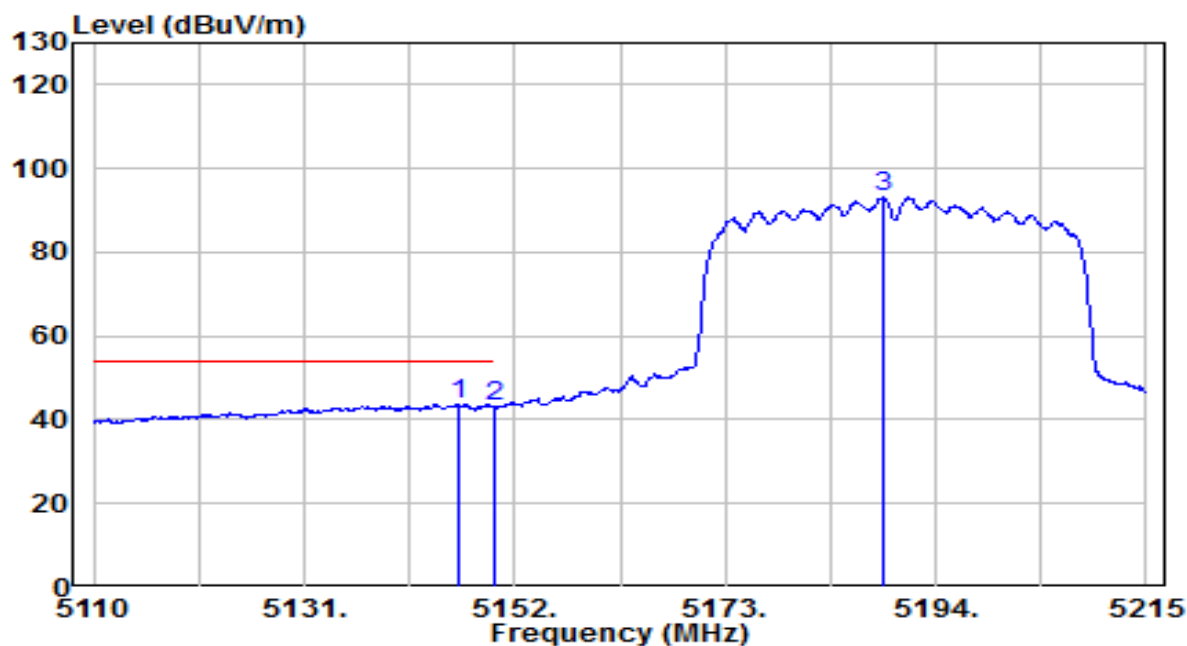


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.330	39.90	3.89	43.79	-10.21	54.00	230	315	Average
2		5150.000	39.11	3.89	43.01	-10.99	54.00	230	315	Average
3		5188.855	89.17	3.92	93.10	N/A	N/A	230	315	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

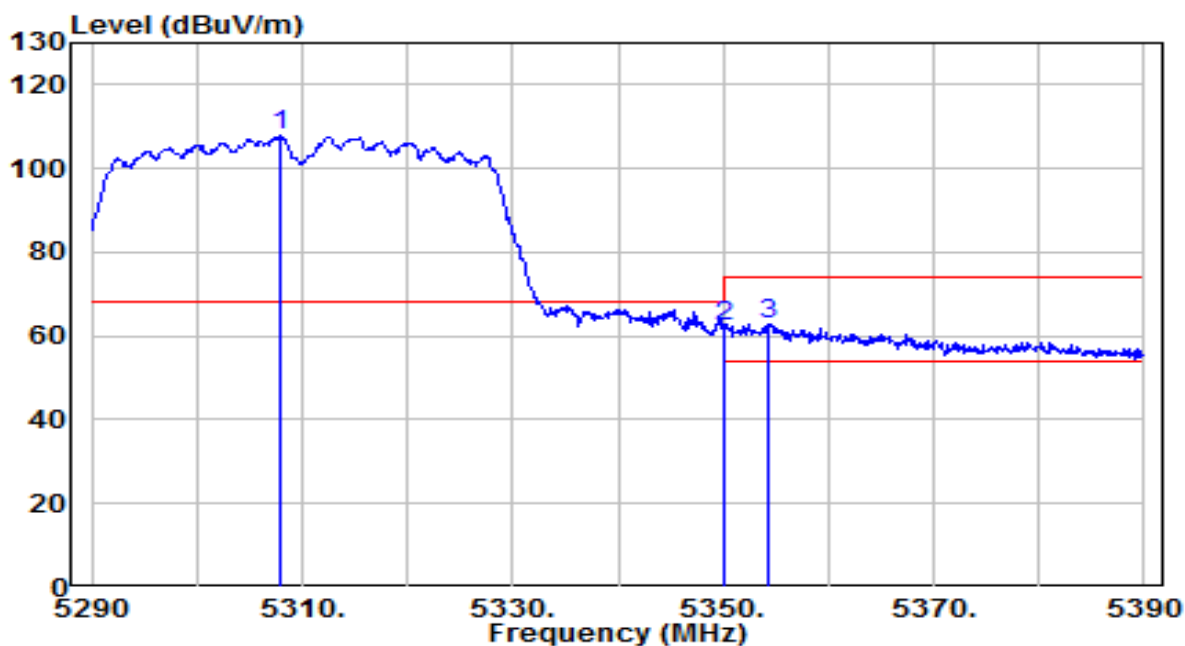


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.000	103.72	4.01	107.72	N/A	N/A	110	5	Peak
2	* 5350.000	58.24	4.03	62.27	-5.93	68.20	110	5	Peak
3	5354.300	58.72	4.04	62.76	-11.24	74.00	110	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

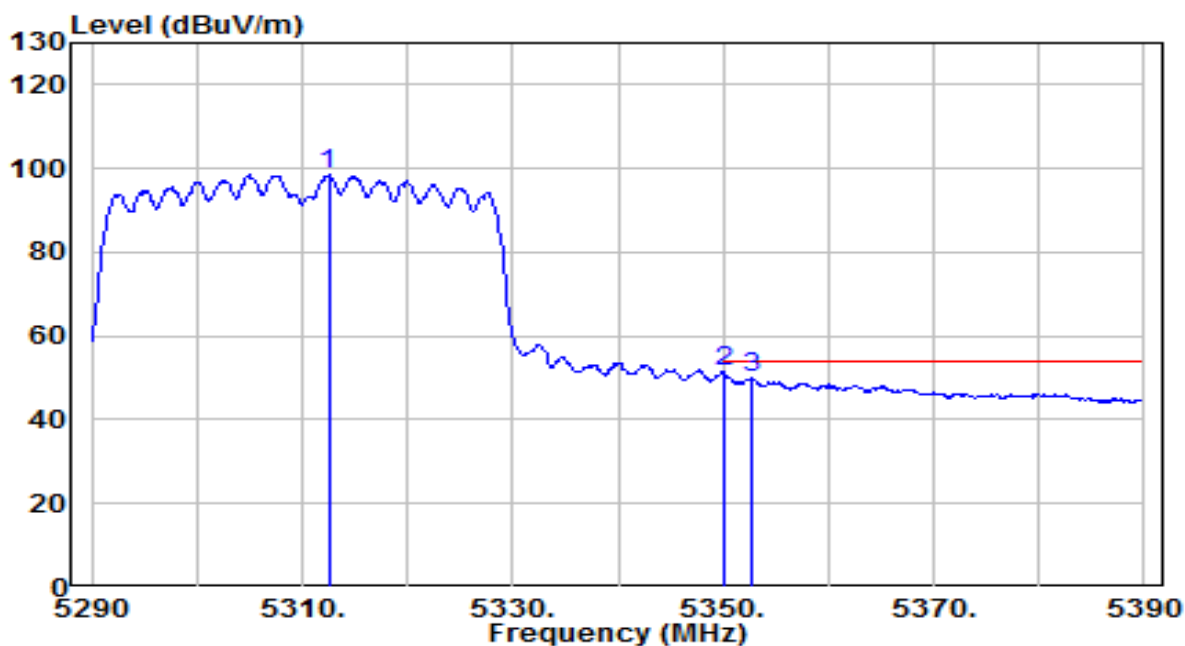


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.500	94.44	4.01	98.45	N/A	N/A	110	5	Average
2	* 5350.000	47.61	4.03	51.64	-2.36	54.00	110	5	Average
3	5352.600	45.83	4.04	49.86	-4.14	54.00	110	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

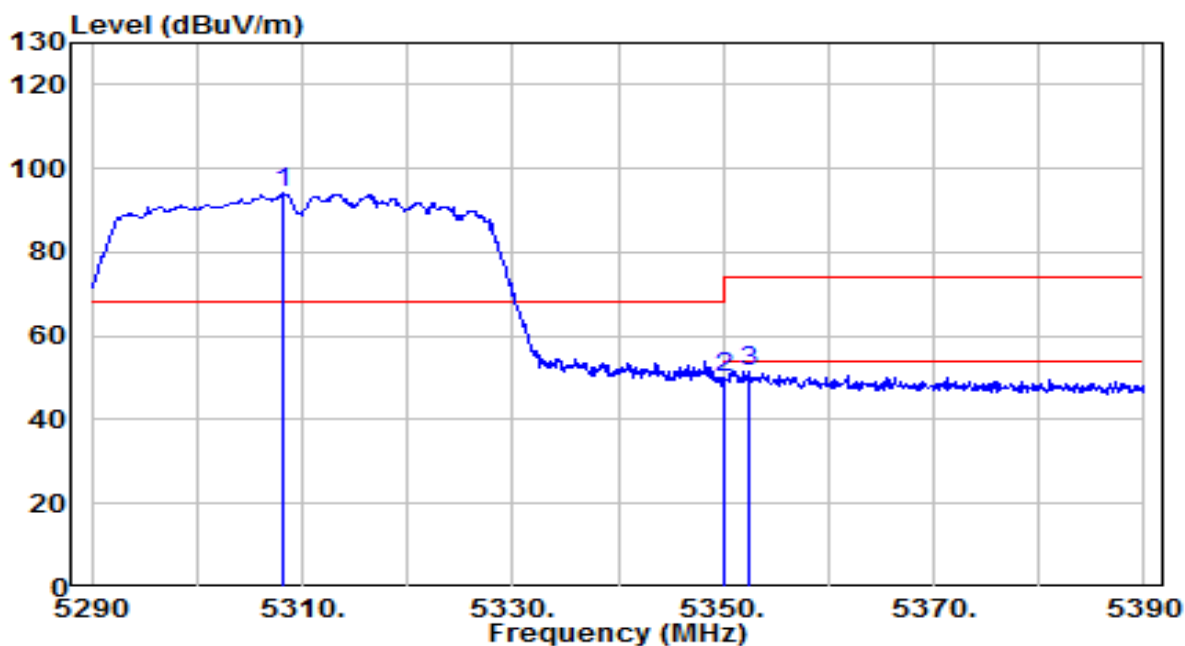


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.200	90.01	4.01	94.01	N/A	N/A	215	330	Peak
2	* 5350.000	46.01	4.03	50.05	-18.15	68.20	215	330	Peak
3	5352.500	47.49	4.04	51.53	-22.47	74.00	215	330	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

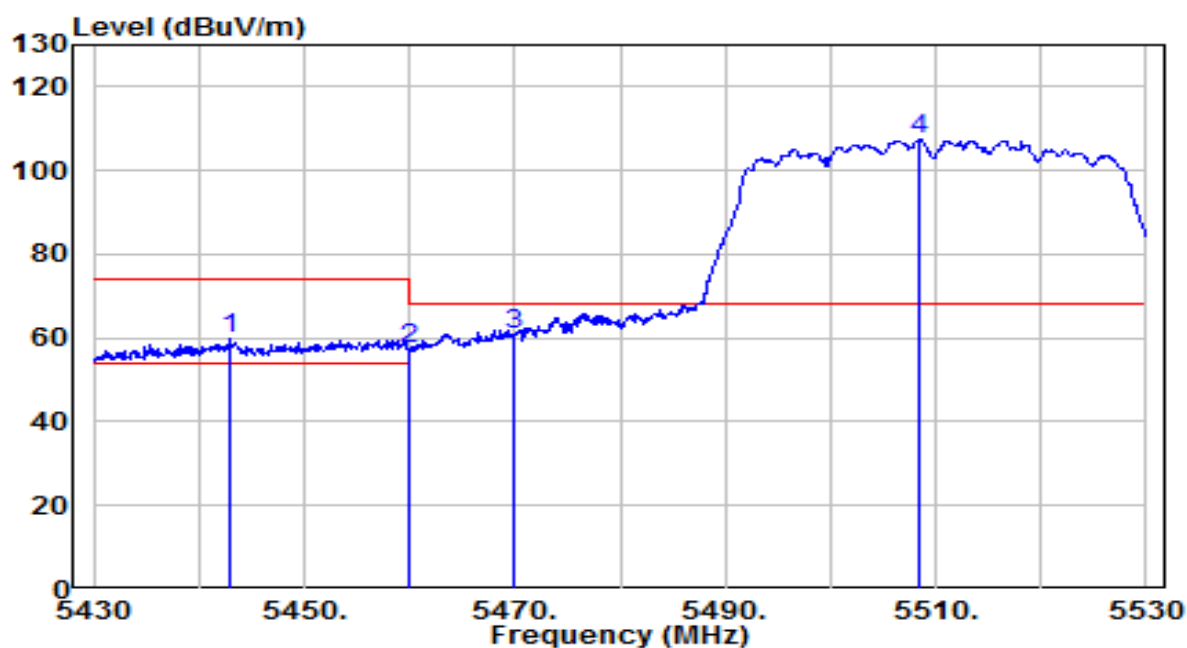


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5442.900	55.83	4.10	59.93	-14.07	74.00	150	350	Peak
2	5460.000	53.05	4.11	57.16	-11.04	68.20	150	350	Peak
3	* 5470.000	56.79	4.12	60.91	-7.29	68.20	150	350	Peak
4	5508.400	103.37	4.17	107.53	N/A	N/A	150	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

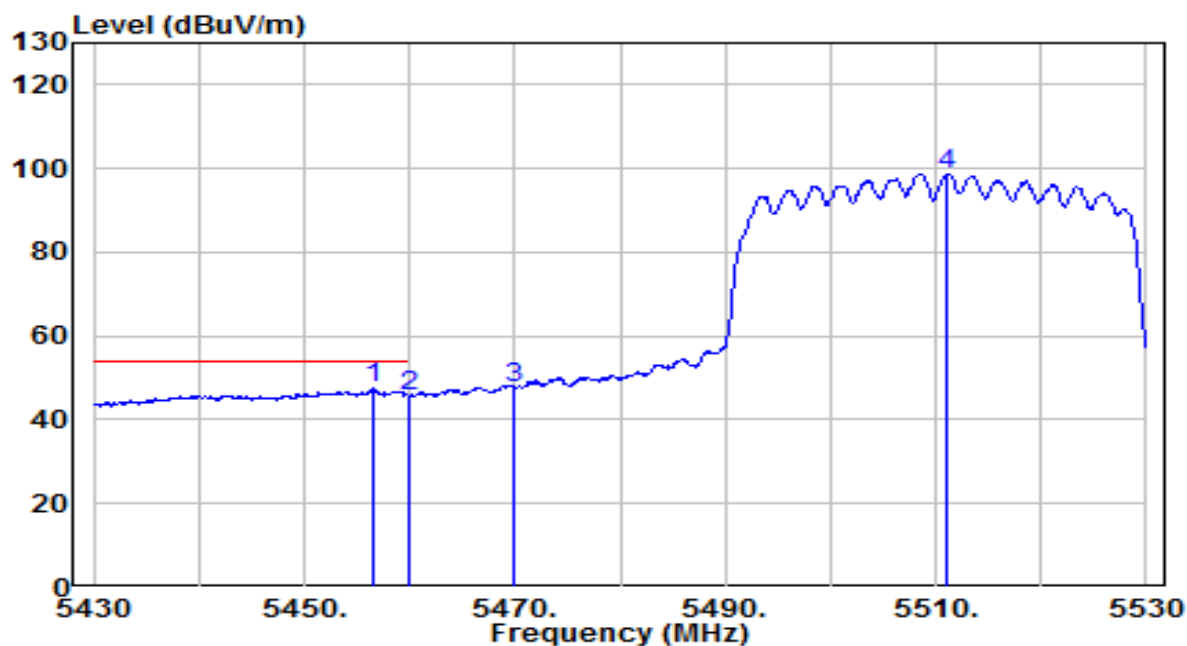


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.600	43.30	4.11	47.41	-6.59	54.00	150	350	Average
2		5460.000	41.72	4.11	45.83	-8.17	54.00	150	350	Average
3		5470.000	43.53	4.12	47.65	N/A	N/A	150	350	Average
4		5511.100	94.57	4.18	98.75	N/A	N/A	150	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

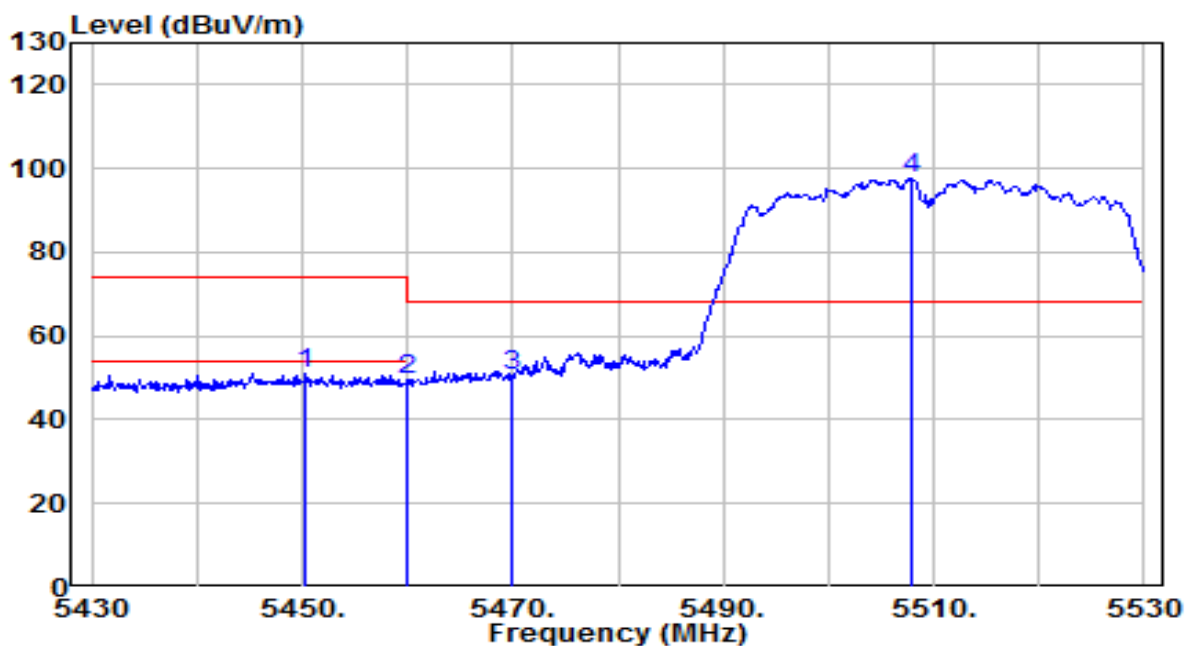


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.300	47.06	4.11	51.17	-22.83	74.00	250	305	Peak
2	5460.000	45.54	4.11	49.65	-18.55	68.20	250	305	Peak
3	* 5470.000	46.24	4.12	50.36	-17.84	68.20	250	305	Peak
4	5508.000	93.49	4.17	97.66	N/A	N/A	250	305	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

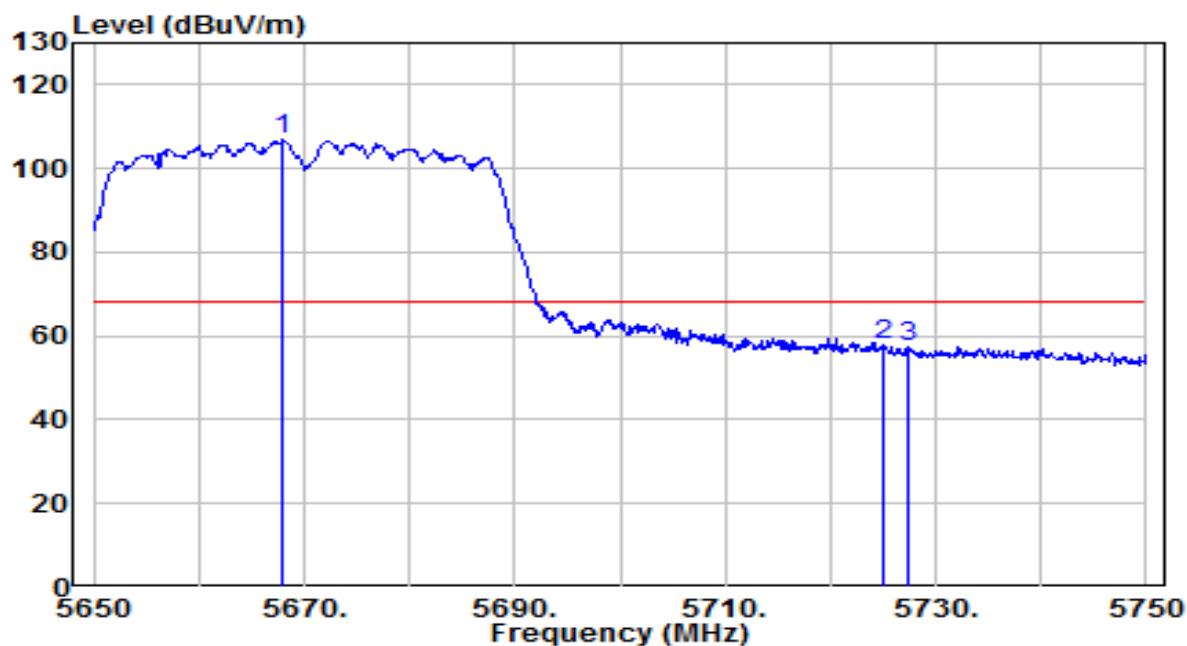


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.000	102.06	4.70	106.76	N/A	N/A	155	345	Peak
2	* 5725.000	52.89	4.90	57.79	-10.41	68.20	155	345	Peak
3	5727.300	52.56	4.90	57.46	-10.74	68.20	155	345	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

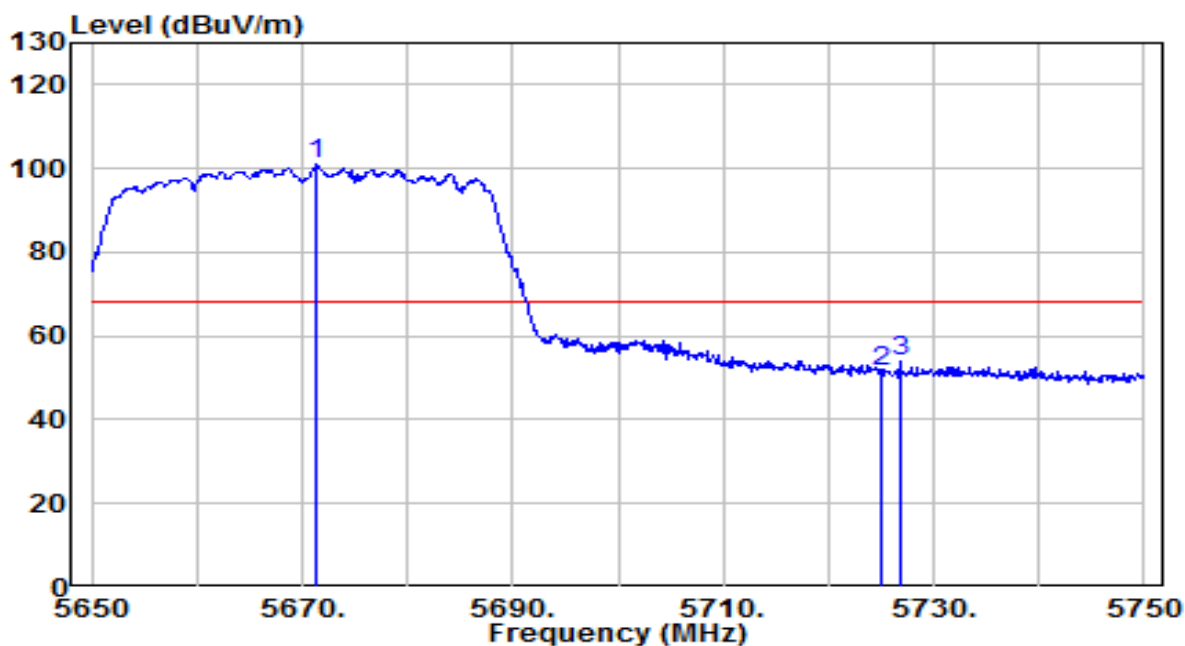


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.400	96.24	4.72	100.96	N/A	N/A	265	300	Peak
2	5725.000	46.39	4.90	51.28	-16.92	68.20	265	300	Peak
3	* 5726.800	48.83	4.90	53.73	-14.47	68.20	265	300	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

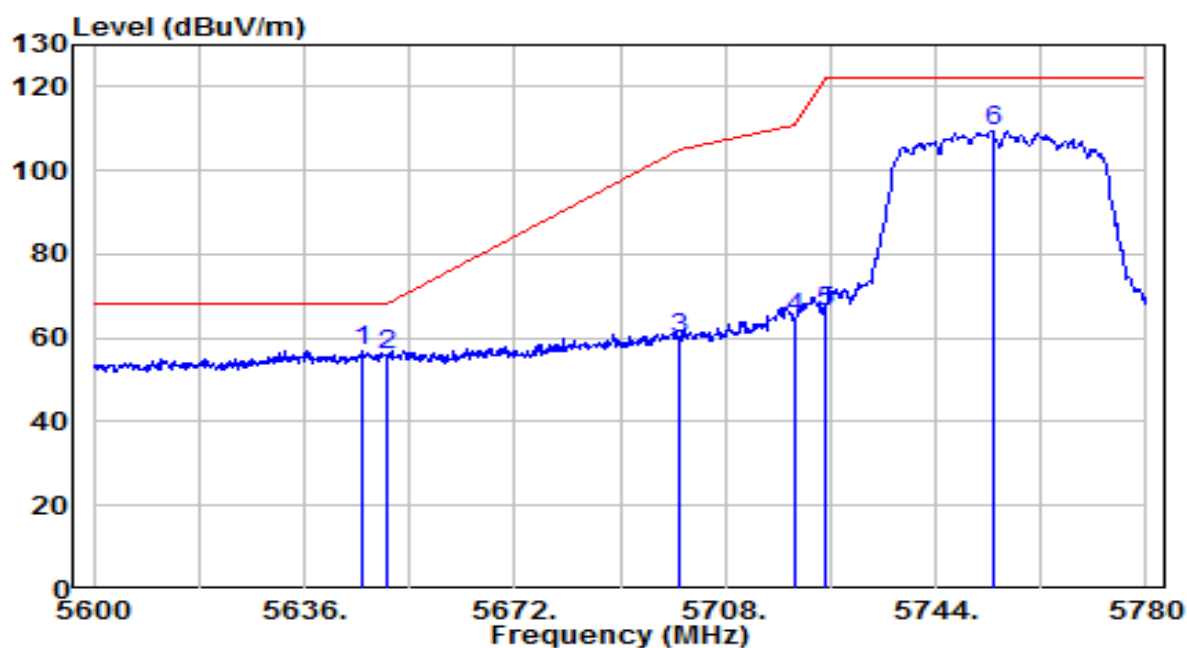


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.900	52.44	4.63	57.07	-11.13	68.20	115	325	Peak
2		5650.000	51.06	4.64	55.71	-12.49	68.20	115	325	Peak
3		5700.000	55.02	4.81	59.83	-45.37	105.20	115	325	Peak
4		5720.000	59.89	4.88	64.77	-46.03	110.80	115	325	Peak
5		5725.000	61.11	4.90	66.01	-56.19	122.20	115	325	Peak
6		5753.720	104.59	4.99	109.58	N/A	N/A	115	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

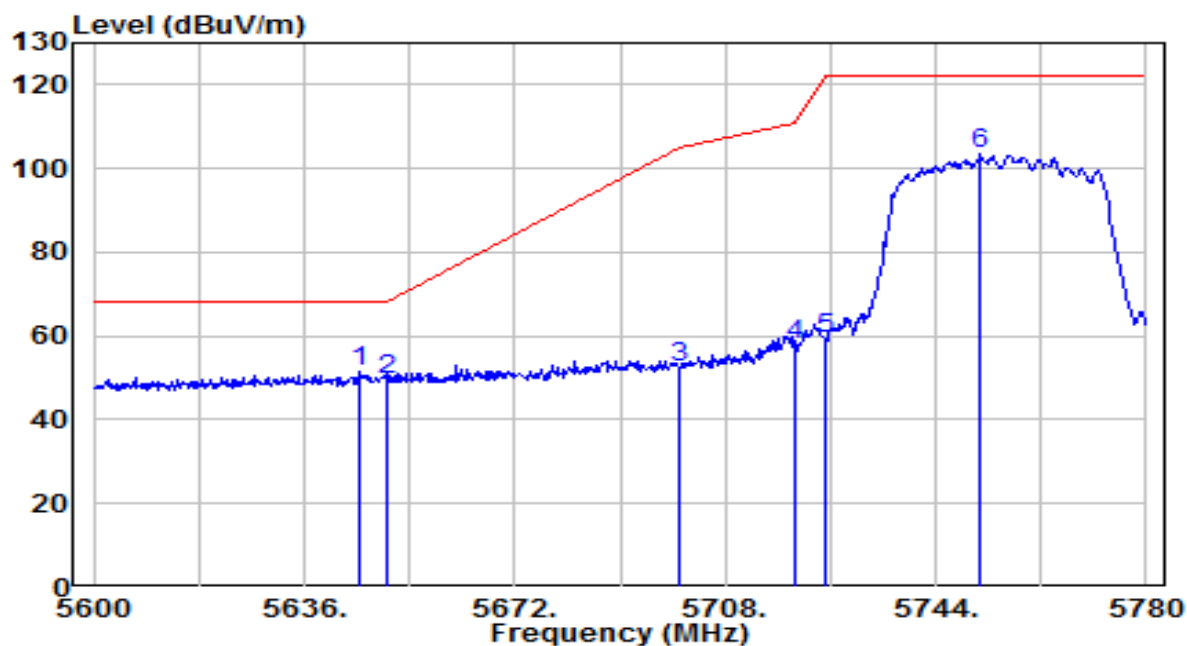


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.540	46.67	4.63	51.30	-16.90	68.20	235	305	Peak
2		5650.000	45.08	4.64	49.73	-18.47	68.20	235	305	Peak
3		5700.000	47.63	4.81	52.44	-52.76	105.20	235	305	Peak
4		5720.000	53.02	4.88	57.90	-52.90	110.80	235	305	Peak
5		5725.000	54.42	4.90	59.32	-62.88	122.20	235	305	Peak
6		5751.560	98.31	4.99	103.30	N/A	N/A	235	305	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

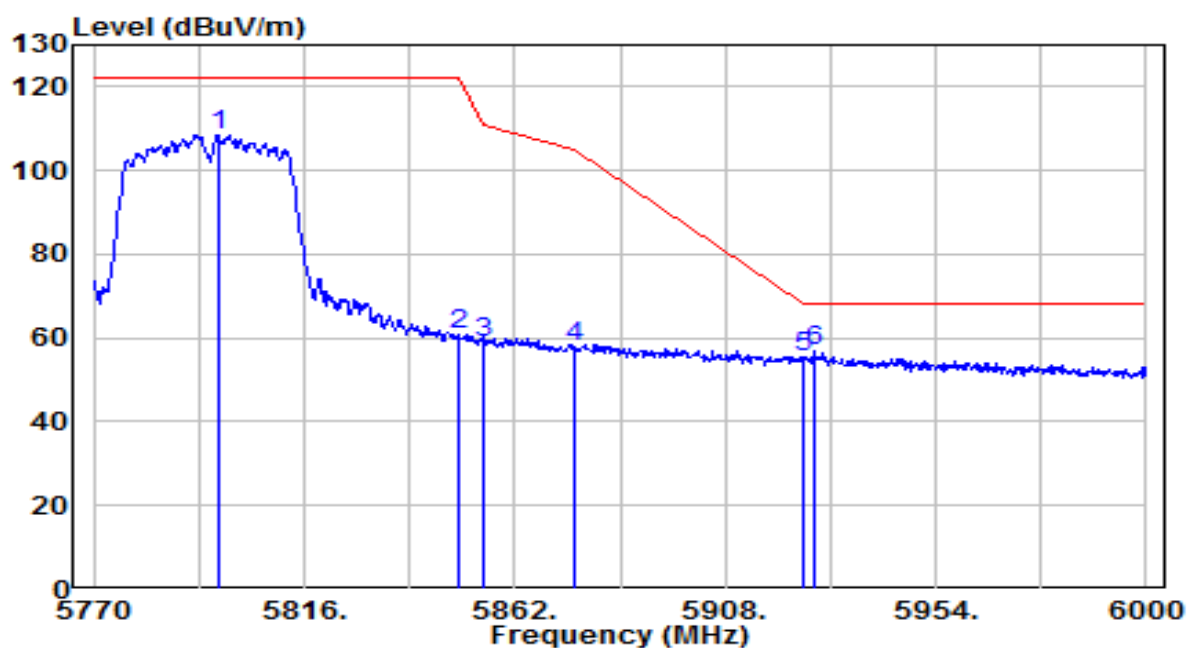


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5797.140	103.48	5.14	108.62	N/A	N/A	185	10	Peak
2	5850.000	55.39	5.32	60.71	-61.49	122.20	185	10	Peak
3	5855.000	53.40	5.33	58.73	-52.07	110.80	185	10	Peak
4	5875.000	52.41	5.40	57.81	-47.39	105.20	185	10	Peak
5	5925.000	49.75	5.57	55.32	-12.88	68.20	185	10	Peak
6	* 5927.550	51.14	5.58	56.72	-11.48	68.20	185	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

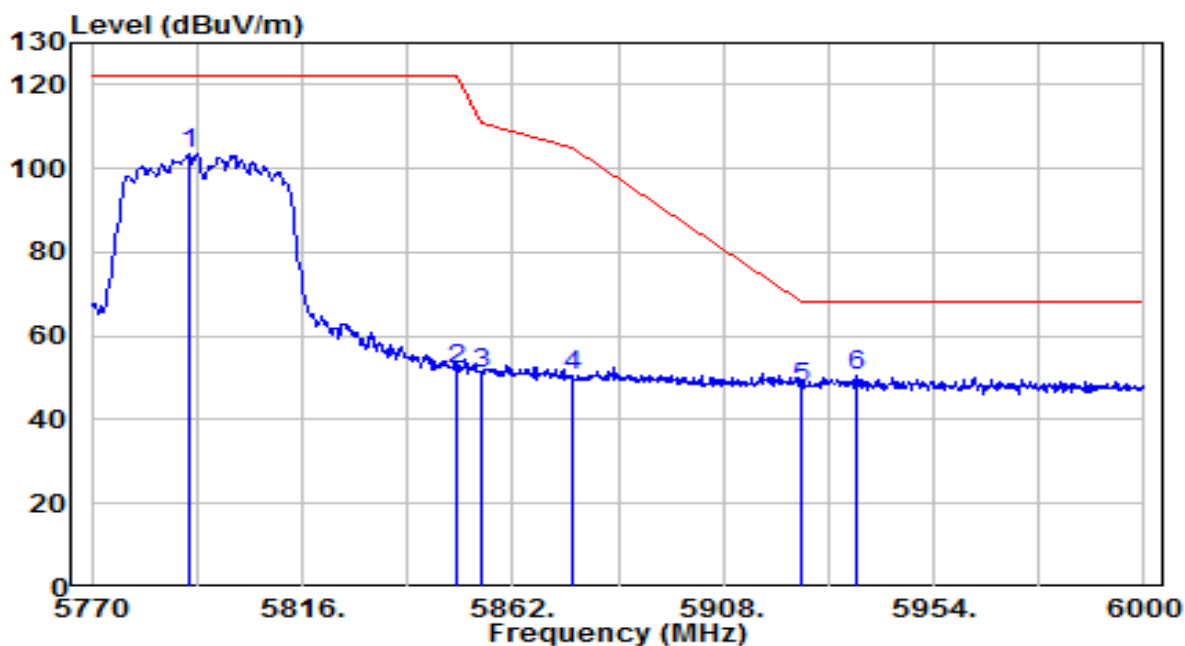


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5791.160	98.39	5.12	103.51	N/A	N/A	215	305	Peak
2	5850.000	46.51	5.32	51.82	-70.38	122.20	215	305	Peak
3	5855.000	45.72	5.33	51.06	-59.74	110.80	215	305	Peak
4	5875.000	45.07	5.40	50.47	-54.73	105.20	215	305	Peak
5	5925.000	42.04	5.57	47.61	-20.59	68.20	215	305	Peak
6	* 5936.980	44.98	5.61	50.58	-17.62	68.20	215	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

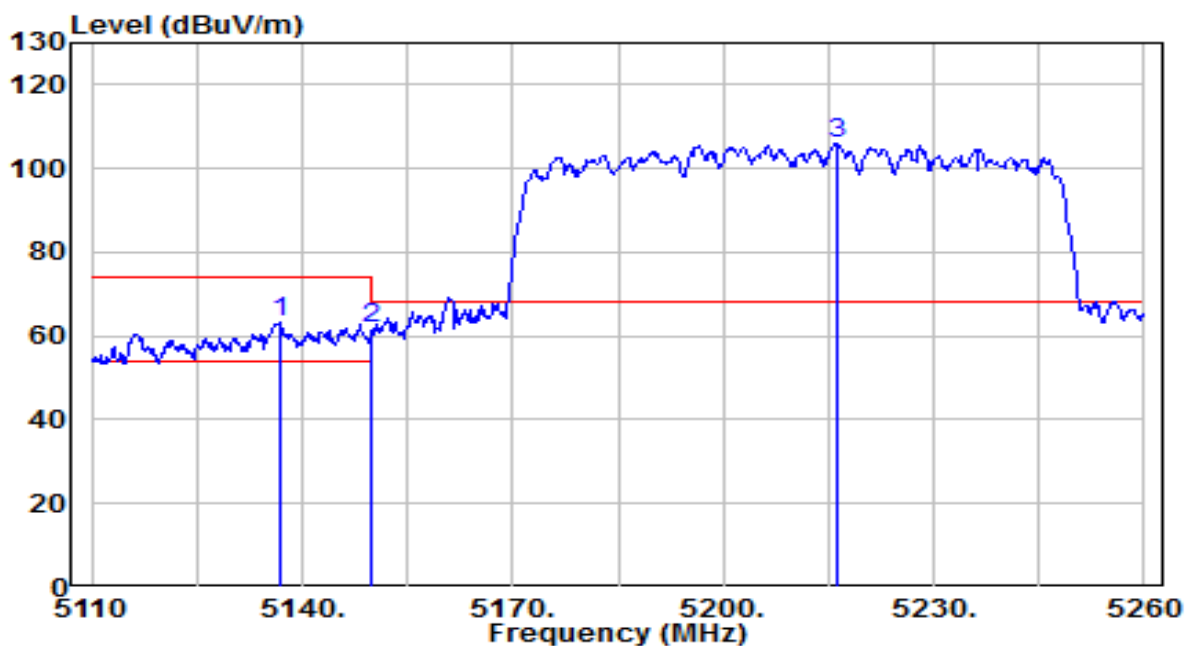


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5136.700	59.47	3.89	63.35	-10.65	74.00	280	20	Peak
2		5150.000	57.89	3.89	61.78	-12.22	74.00	280	20	Peak
3		5216.200	102.07	3.94	106.02	N/A	N/A	280	20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

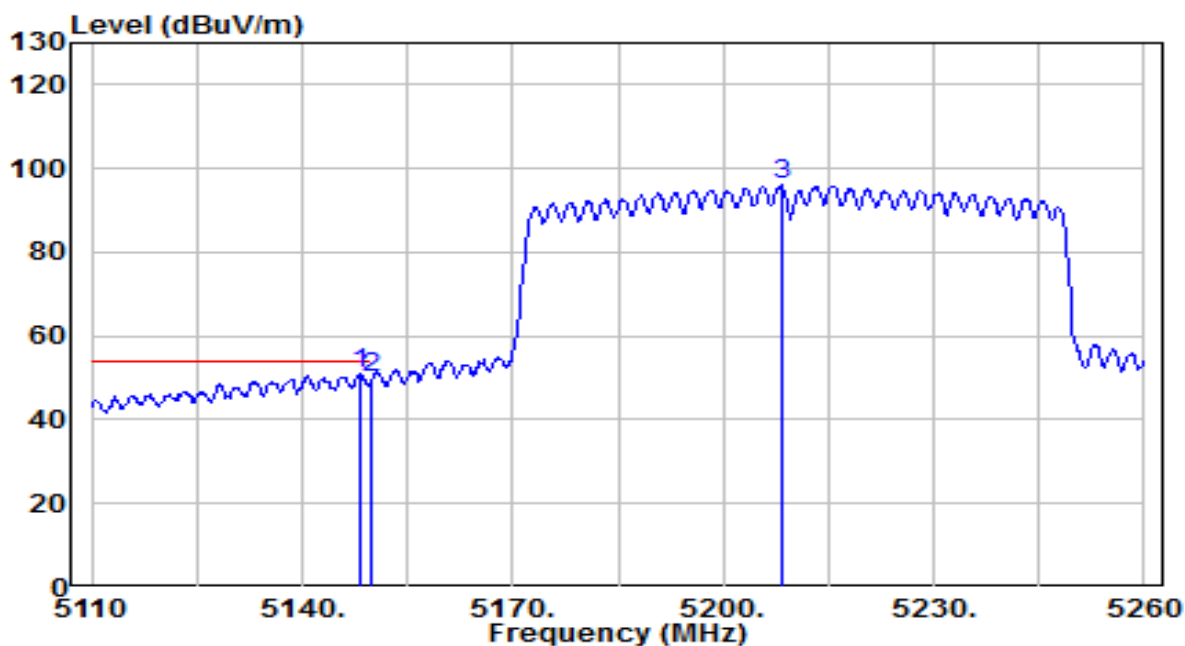


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.400	47.07	3.89	50.96	-3.04	54.00	280	20	Average
2	5150.000	46.26	3.89	50.15	-3.85	54.00	280	20	Average
3	5208.250	91.98	3.94	95.91	N/A	N/A	280	20	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

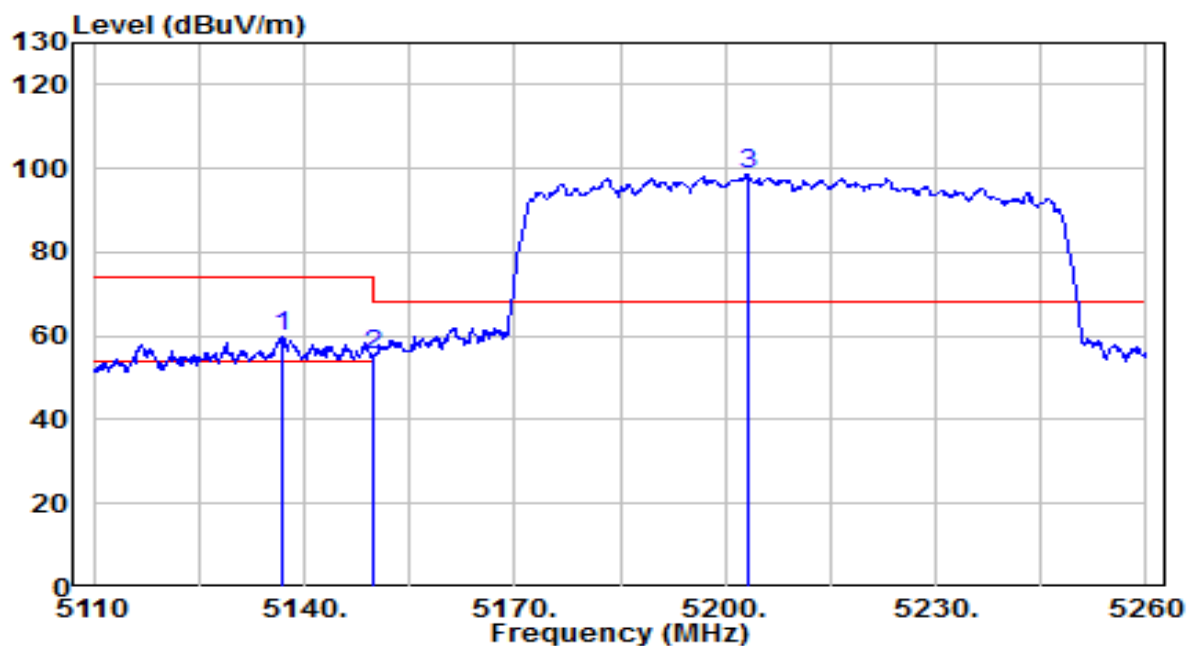


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5136.700	55.78	3.89	59.67	-14.33	74.00	230	315	Peak
2		5150.000	51.47	3.89	55.37	-18.63	74.00	230	315	Peak
3		5203.150	94.80	3.93	98.73	N/A	N/A	230	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

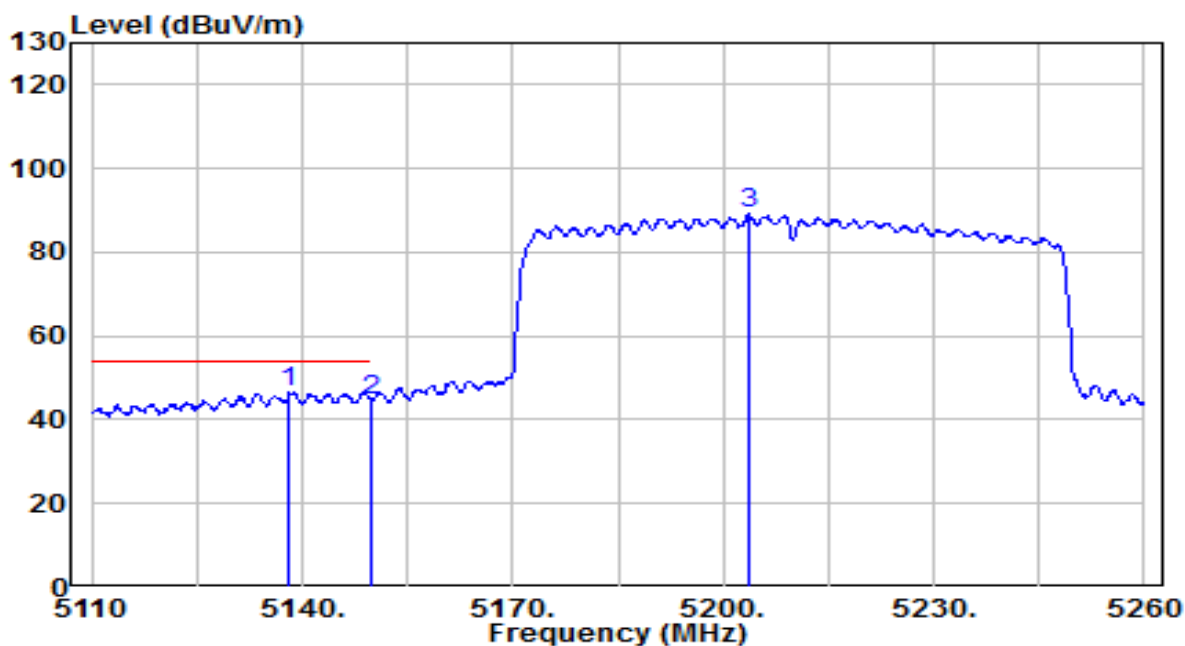


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.200	42.56	3.89	46.44	-7.56	54.00	230	315	Average
2		5150.000	40.85	3.89	44.75	-9.25	54.00	230	315	Average
3		5203.600	85.14	3.93	89.07	N/A	N/A	230	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

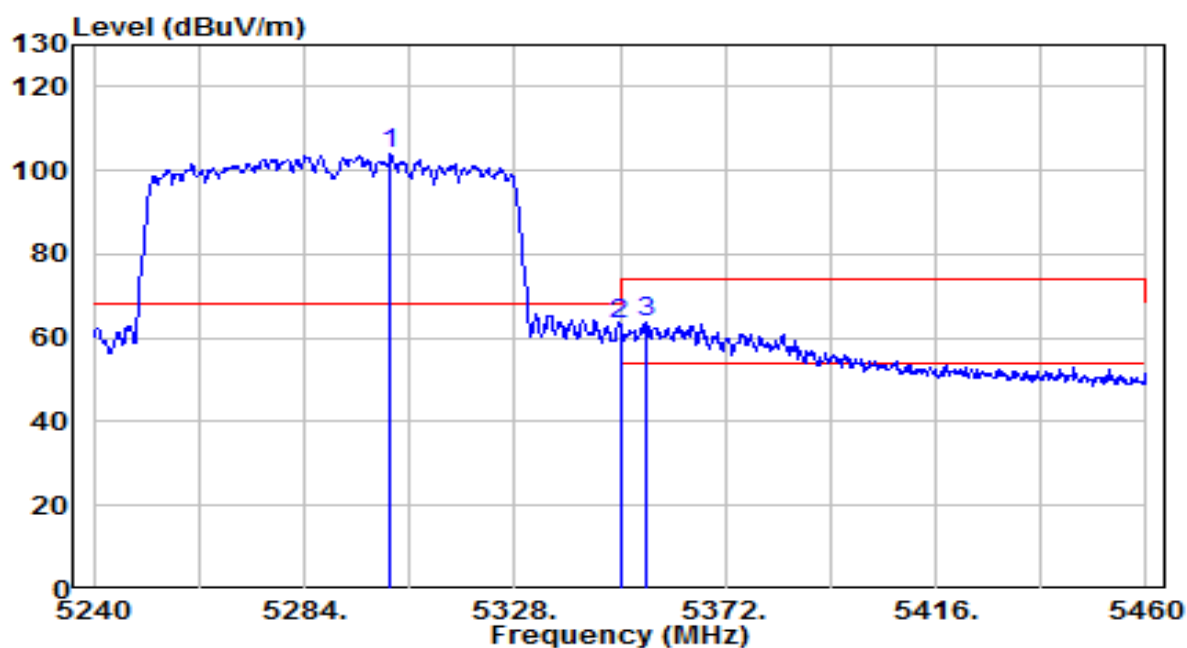


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5302.040	99.79	4.00	103.79	N/A	N/A	110	5	Peak
2	* 5350.000	59.10	4.03	63.13	-5.07	68.20	110	5	Peak
3	5355.720	59.78	4.04	63.82	-10.18	74.00	110	5	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

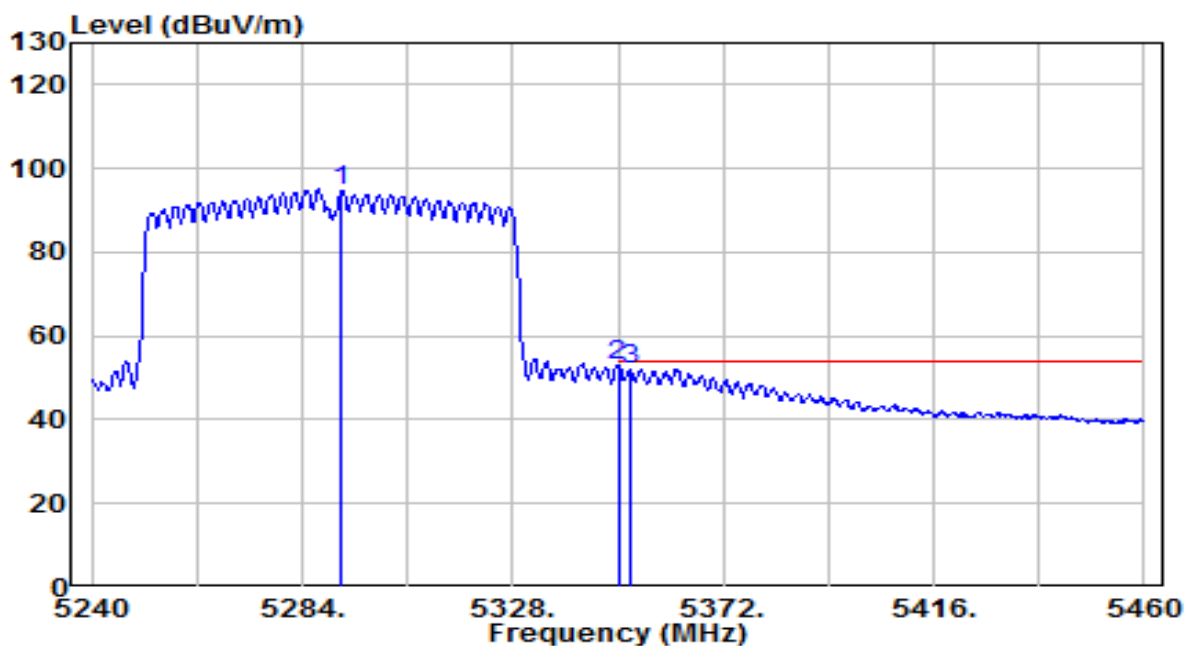


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.360	90.50	3.99	94.50	N/A	N/A	110	5	Average
2	* 5350.000	49.09	4.03	53.13	-0.87	54.00	110	5	Average
3	5352.420	47.89	4.04	51.93	-2.07	54.00	110	5	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

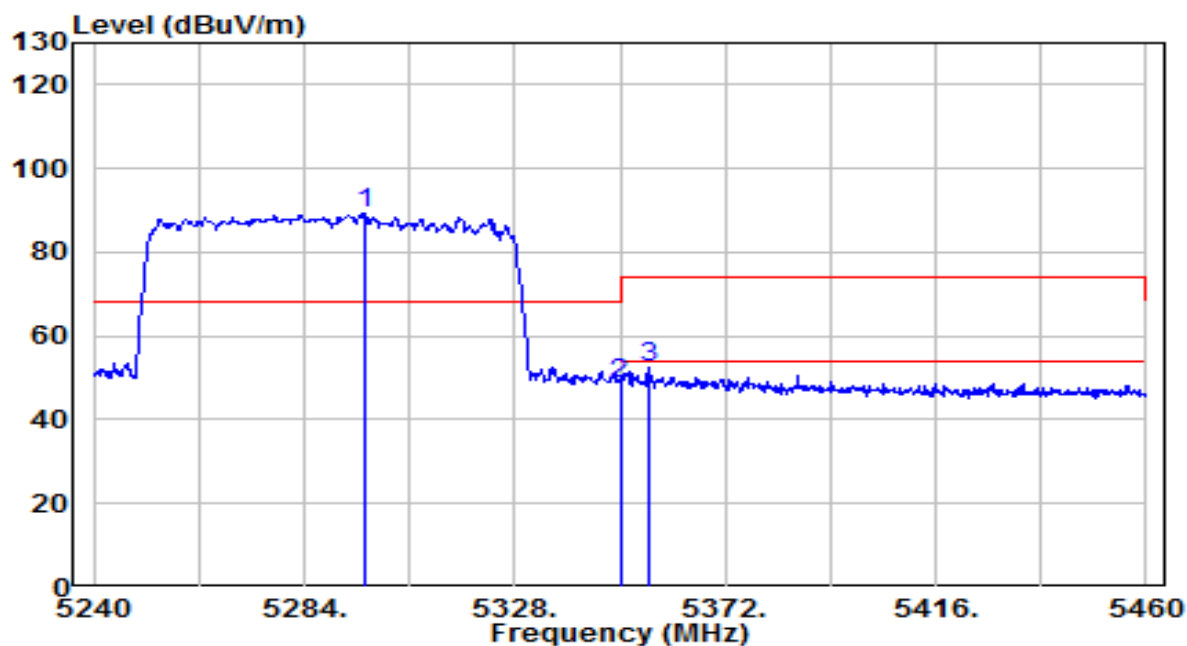


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.540	85.46	4.00	89.46	N/A	N/A	215	330	Peak
2	* 5350.000	44.51	4.03	48.54	-19.66	68.20	215	330	Peak
3	5356.160	48.27	4.04	52.31	-21.69	74.00	215	330	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

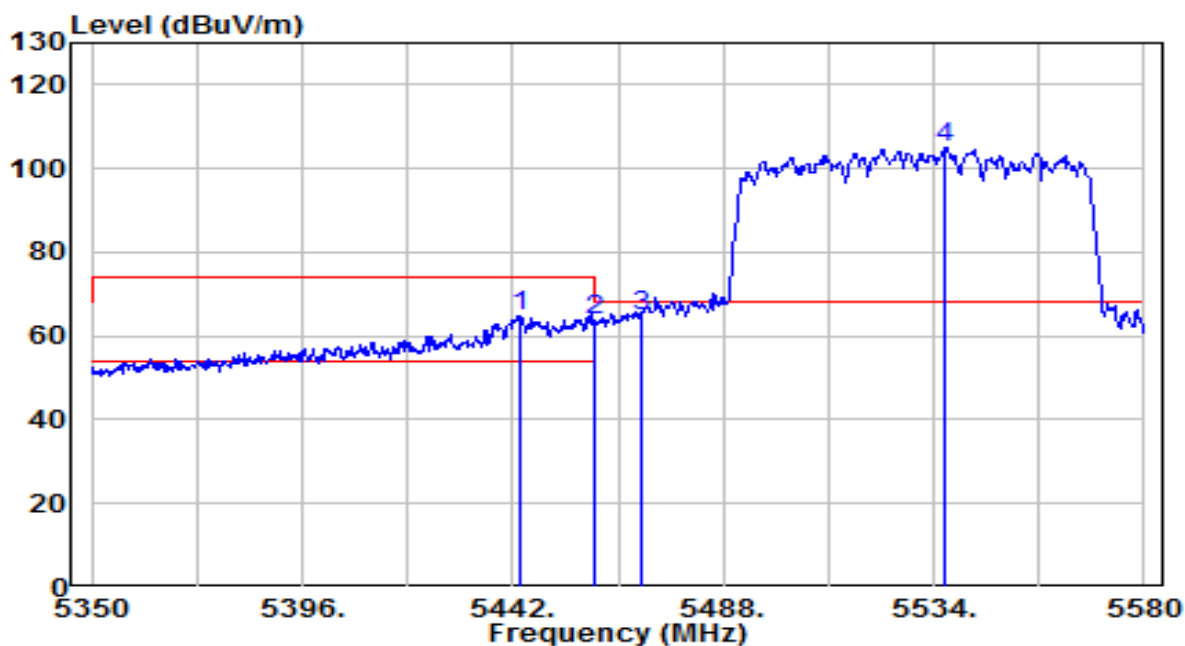


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5443.380	60.73	4.10	64.83	-9.17	74.00	150	350	Peak
2	5460.000	59.52	4.11	63.63	-4.57	68.20	150	350	Peak
3	* 5470.000	60.88	4.12	65.00	-3.20	68.20	150	350	Peak
4	5536.530	100.80	4.26	105.07	N/A	N/A	150	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

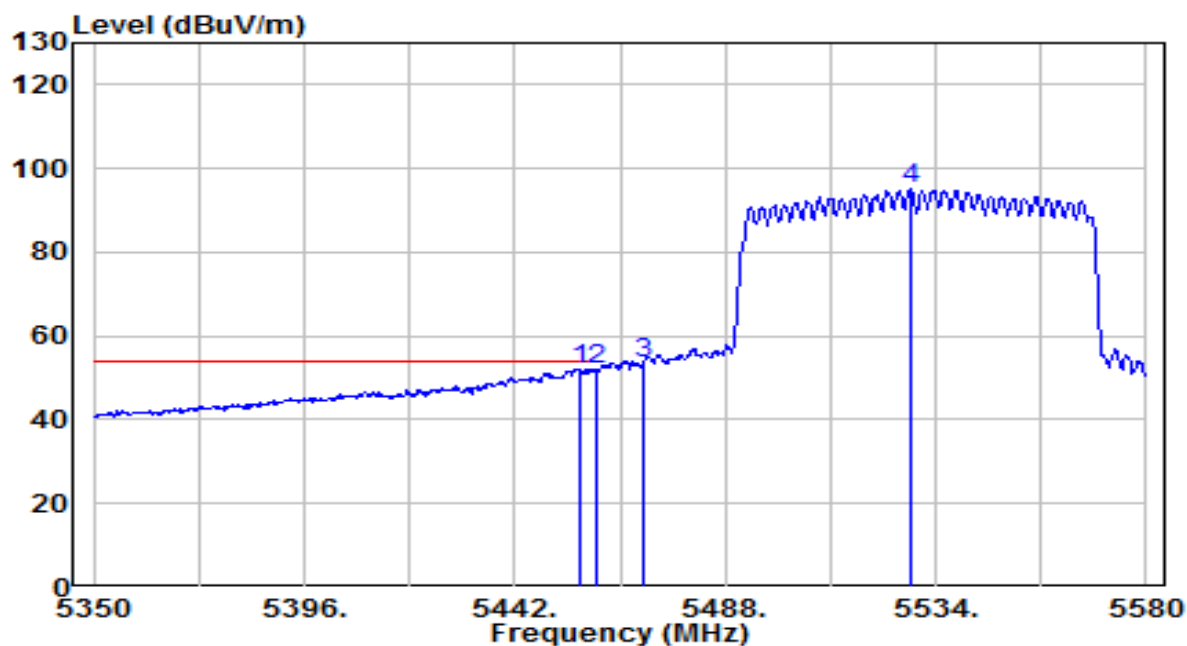


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.260	48.08	4.11	52.19	-1.81	54.00	150	350	Average
2		5460.000	47.75	4.11	51.86	-2.14	54.00	150	350	Average
3		5470.000	49.14	4.12	53.26	N/A	N/A	150	350	Average
4		5528.480	90.70	4.24	94.93	N/A	N/A	150	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

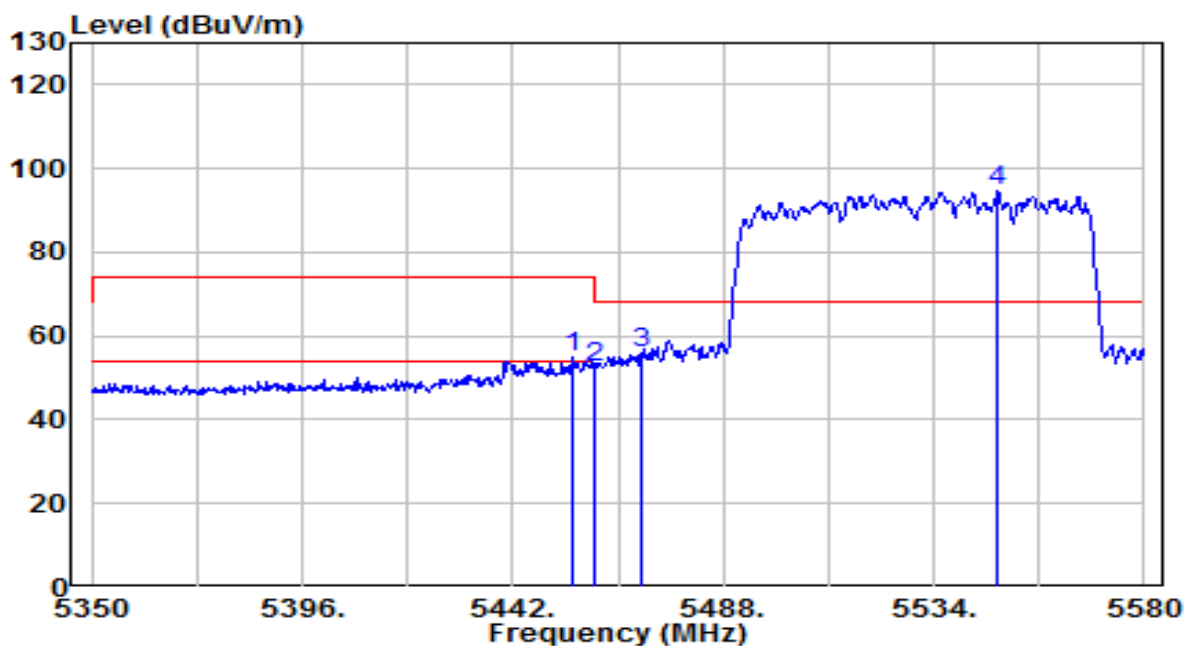


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.340	50.96	4.11	55.07	-18.93	74.00	250	305	Peak
2	5460.000	48.26	4.11	52.37	-15.83	68.20	250	305	Peak
3	* 5470.000	51.66	4.12	55.78	-12.42	68.20	250	305	Peak
4	5548.030	90.31	4.30	94.61	N/A	N/A	250	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

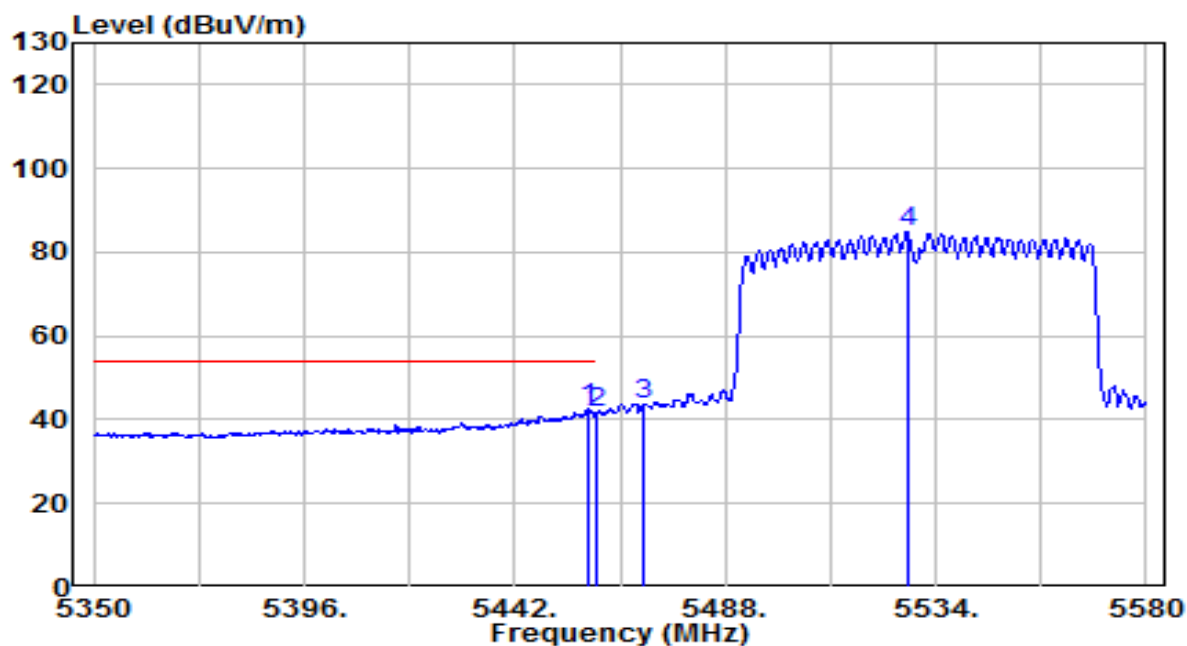


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.100	38.53	4.11	42.64	-11.36	54.00	250	305	Average
2		5460.000	37.59	4.11	41.70	-12.30	54.00	250	305	Average
3		5470.000	39.64	4.12	43.75	N/A	N/A	250	305	Average
4		5527.790	80.78	4.23	85.01	N/A	N/A	250	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

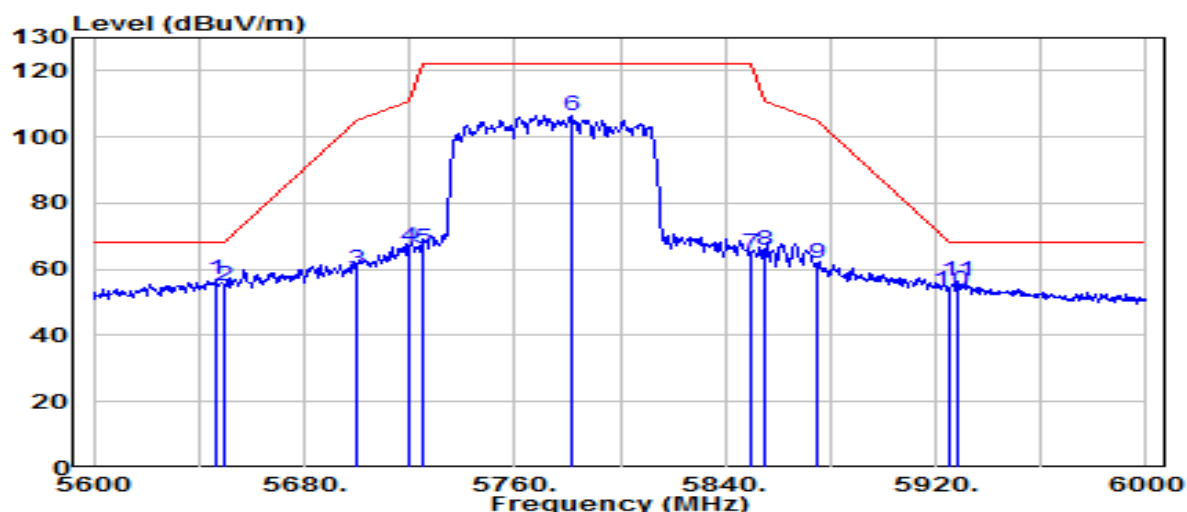


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.400	52.06	4.63	56.69	-11.51	68.20	200	10	Peak
2		5650.000	50.53	4.64	55.17	-13.03	68.20	200	10	Peak
3		5700.000	54.99	4.81	59.80	-45.40	105.20	200	10	Peak
4		5720.000	61.64	4.88	66.52	-44.28	110.80	200	10	Peak
5		5725.000	61.14	4.90	66.04	-56.16	122.20	200	10	Peak
6		5781.600	101.47	5.09	106.55	N/A	N/A	200	10	Peak
7		5850.000	59.36	5.32	64.67	-57.53	122.20	200	10	Peak
8		5855.000	60.47	5.33	65.80	-45.00	110.80	200	10	Peak
9		5875.000	56.39	5.40	61.79	-43.41	105.20	200	10	Peak
10		5925.000	48.13	5.57	53.70	-14.50	68.20	200	10	Peak
11		5928.000	50.75	5.58	56.33	-11.87	68.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

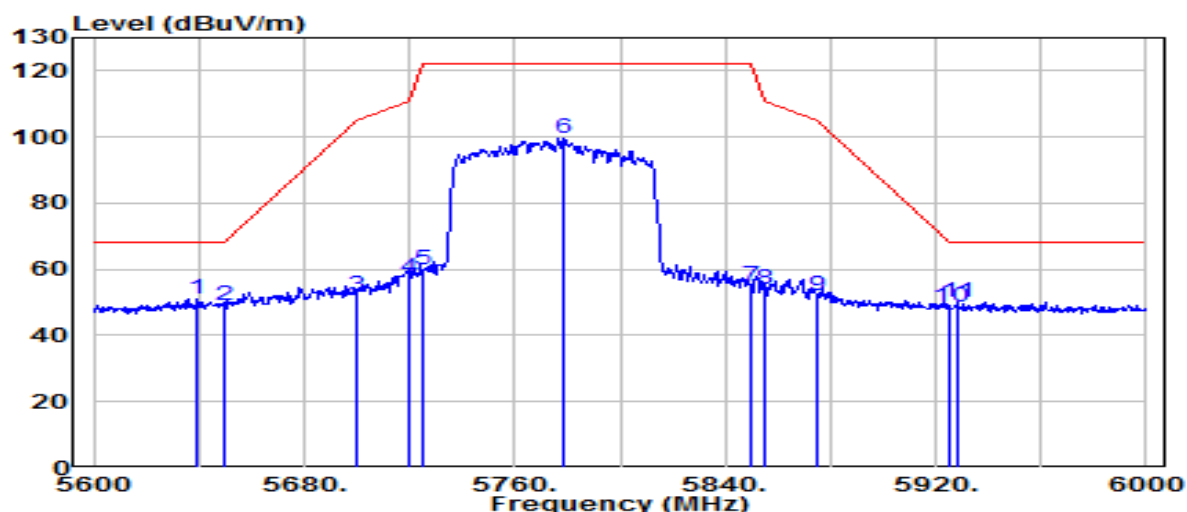


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5639.600	46.65	4.61	51.26	-16.94	68.20	255	305	Peak
2		5650.000	44.58	4.64	49.23	-18.97	68.20	255	305	Peak
3		5700.000	47.43	4.81	52.24	-52.96	105.20	255	305	Peak
4		5720.000	52.47	4.88	57.35	-53.45	110.80	255	305	Peak
5		5725.000	54.83	4.90	59.73	-62.47	122.20	255	305	Peak
6		5778.800	94.58	5.08	99.65	N/A	N/A	255	305	Peak
7		5850.000	49.38	5.32	54.70	-67.50	122.20	255	305	Peak
8		5855.000	48.85	5.33	54.19	-56.61	110.80	255	305	Peak
9		5875.000	46.66	5.40	52.06	-53.14	105.20	255	305	Peak
10		5925.000	43.03	5.57	48.60	-19.60	68.20	255	305	Peak
11		5928.400	44.33	5.58	49.91	-18.29	68.20	255	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

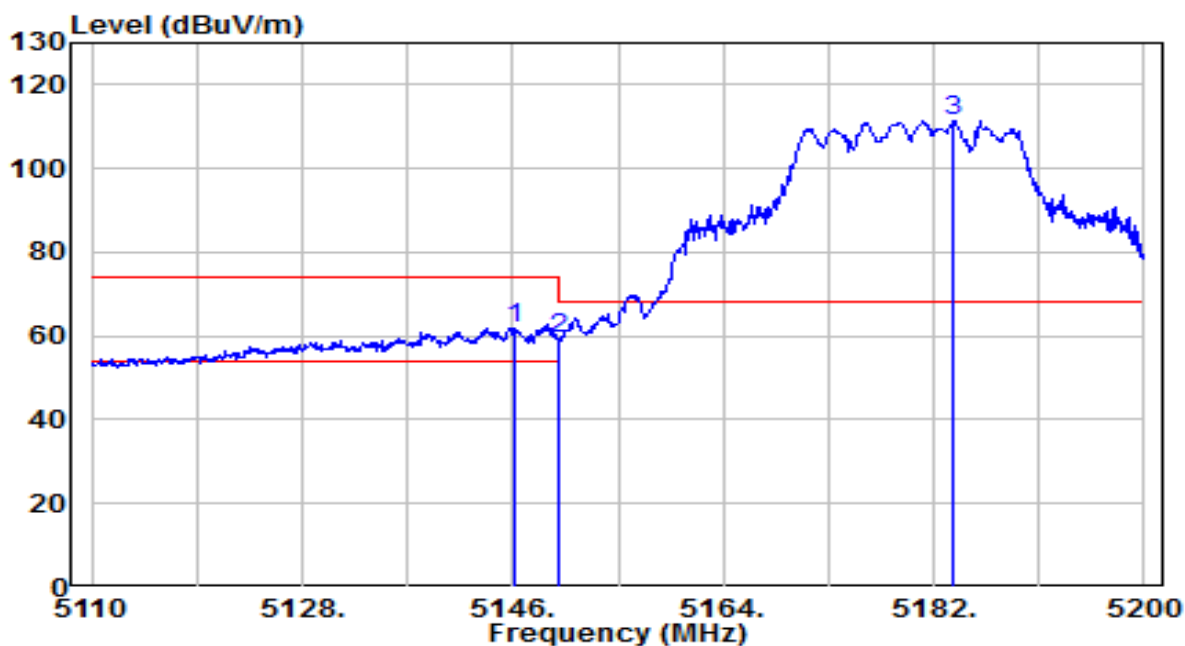


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.090	58.12	3.89	62.01	-11.99	74.00	225	5	Peak
2		5150.000	55.36	3.89	59.26	-14.74	74.00	225	5	Peak
3		5183.710	107.42	3.92	111.33	N/A	N/A	225	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

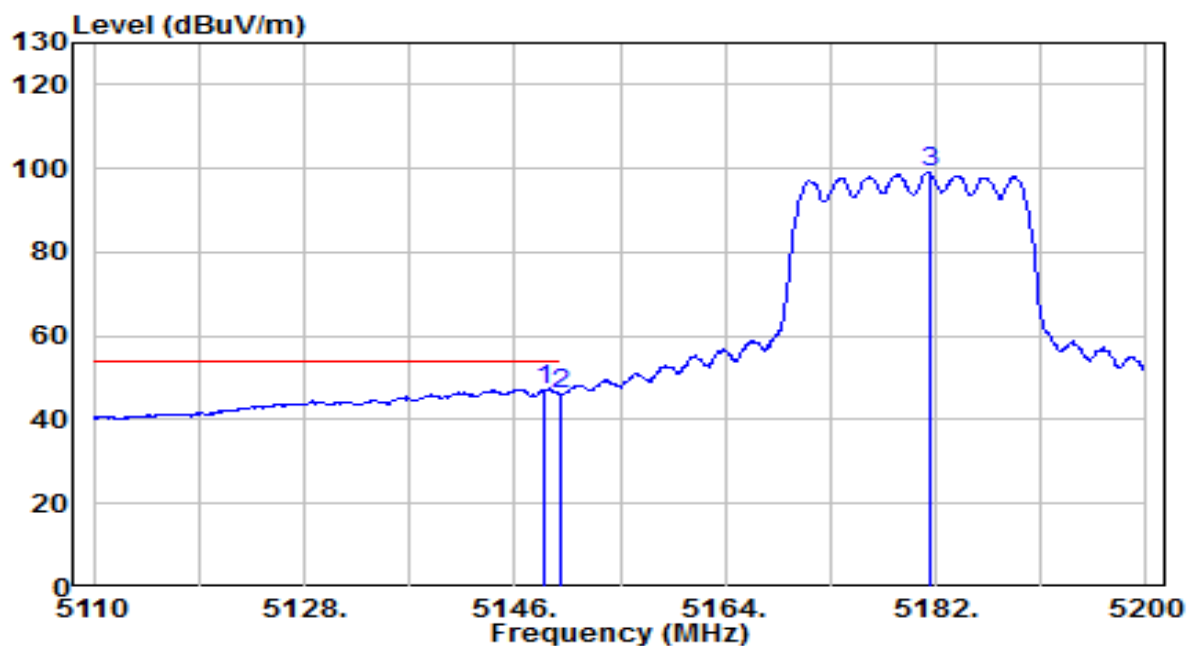


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.520	43.38	3.89	47.27	-6.73	54.00	225	5	Average
2	5150.000	42.25	3.89	46.14	-7.86	54.00	225	5	Average
3	5181.460	95.34	3.92	99.26	N/A	N/A	225	5	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

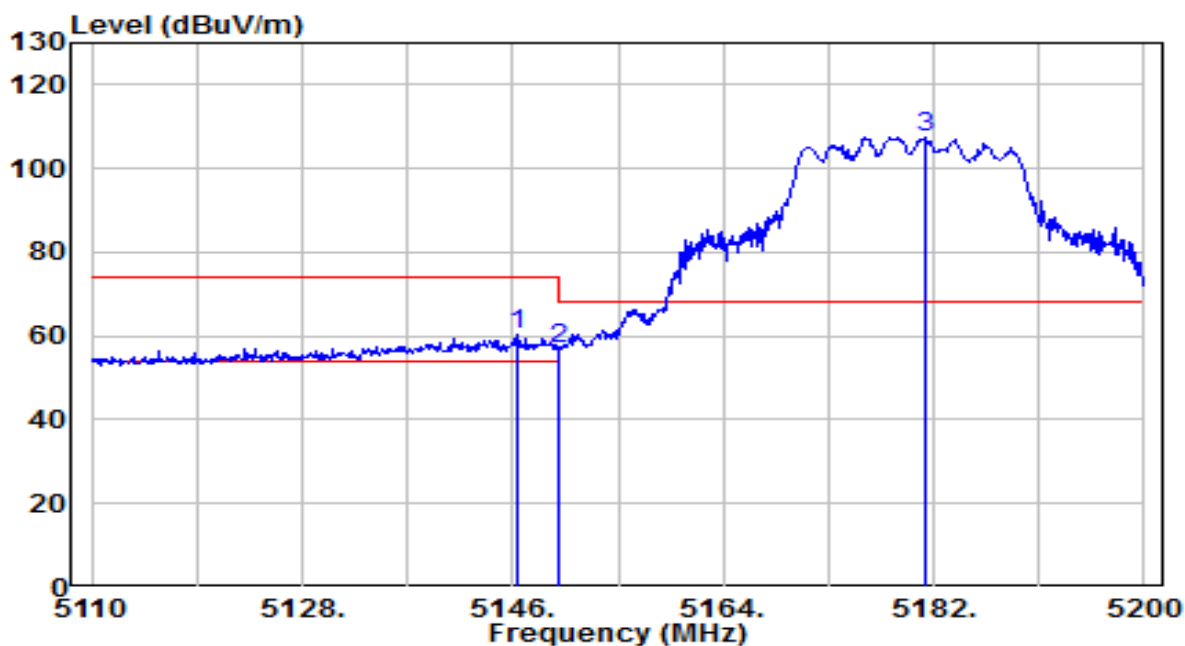

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.360	56.44	3.89	60.34	-13.66	74.00	230	315	Peak
2		5150.000	53.25	3.89	57.15	-16.85	74.00	230	315	Peak
3		5181.280	103.46	3.92	107.37	N/A	N/A	230	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.