


EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

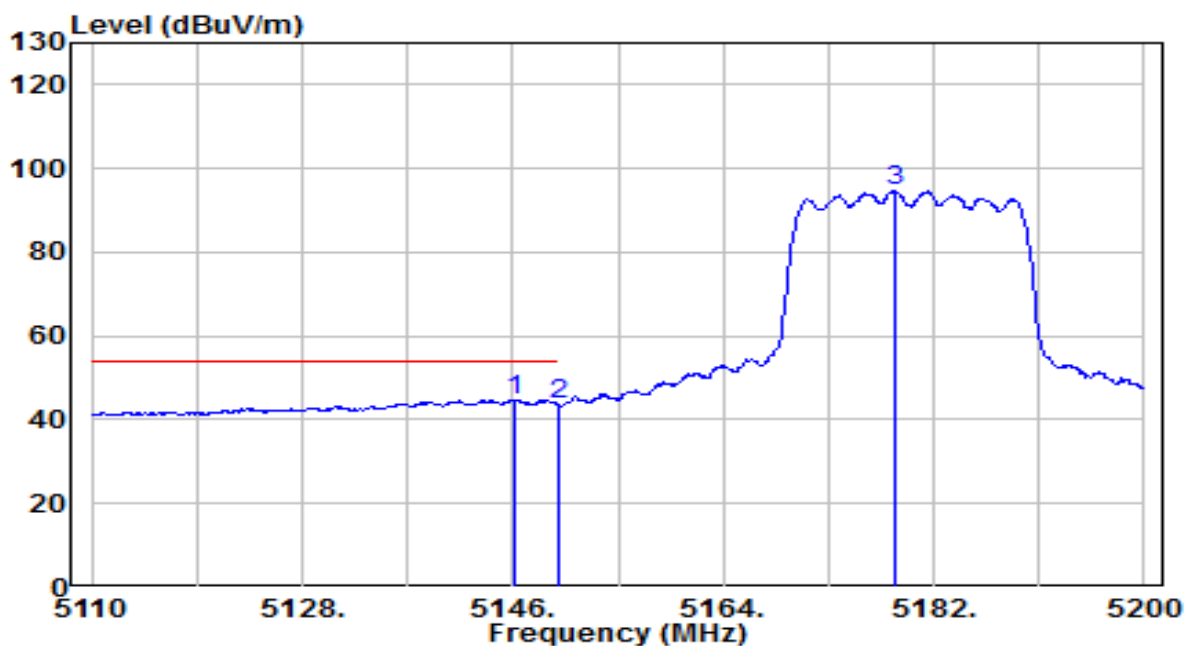


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.090	40.94	3.89	44.84	-9.16	54.00	230	315	Average
2		5150.000	39.58	3.89	43.48	-10.52	54.00	230	315	Average
3		5178.670	90.83	3.92	94.74	N/A	N/A	230	315	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

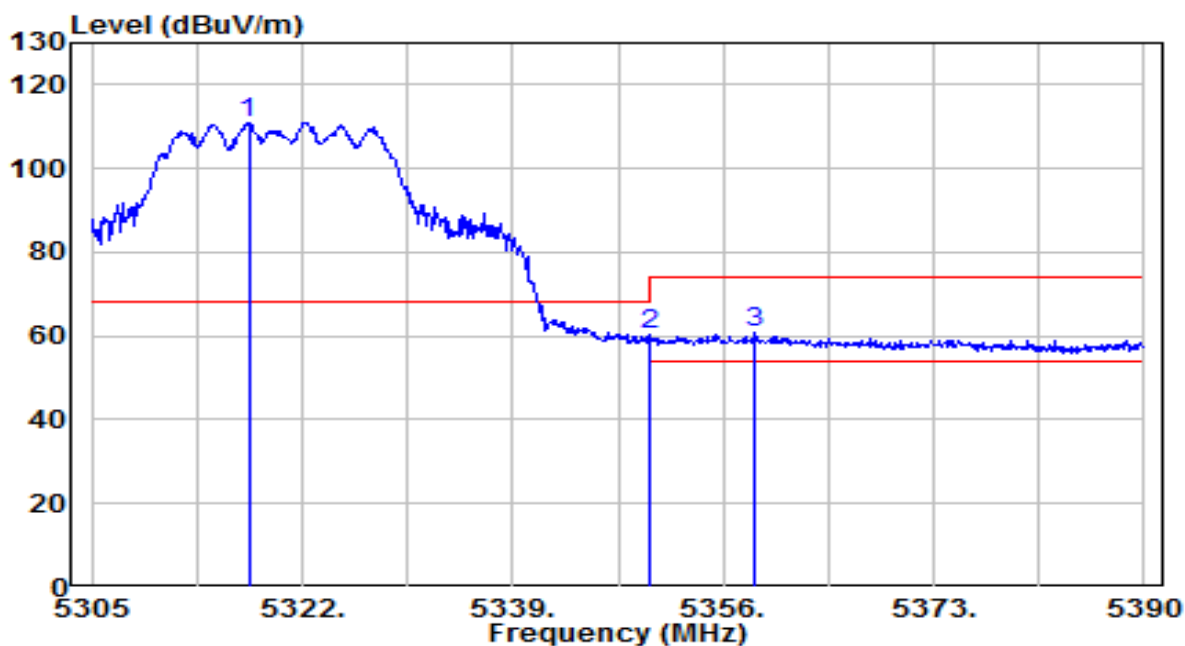


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.665	107.02	4.01	111.04	N/A	N/A	135	340	Peak
2	* 5350.000	56.23	4.03	60.27	-7.93	68.20	135	340	Peak
3	5358.550	57.03	4.04	61.07	-12.93	74.00	135	340	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

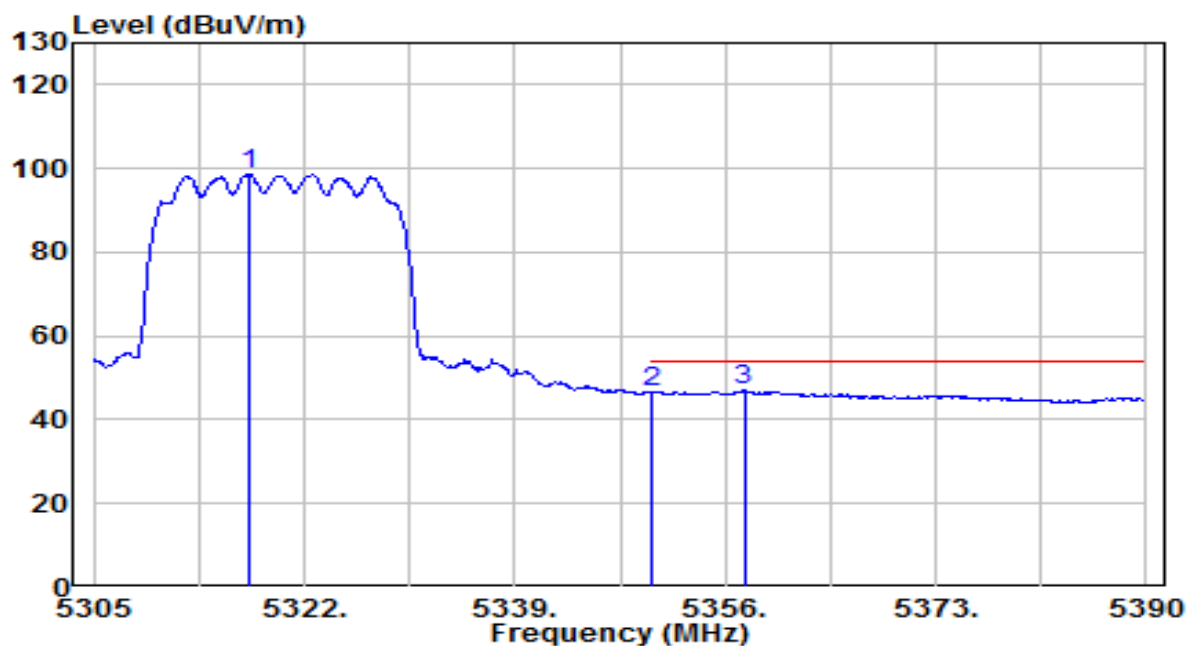


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.580	94.52	4.01	98.54	N/A	N/A	135	340	Average
2	5350.000	42.57	4.03	46.60	-7.40	54.00	135	340	Average
3	* 5357.530	42.84	4.04	46.88	-7.12	54.00	135	340	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

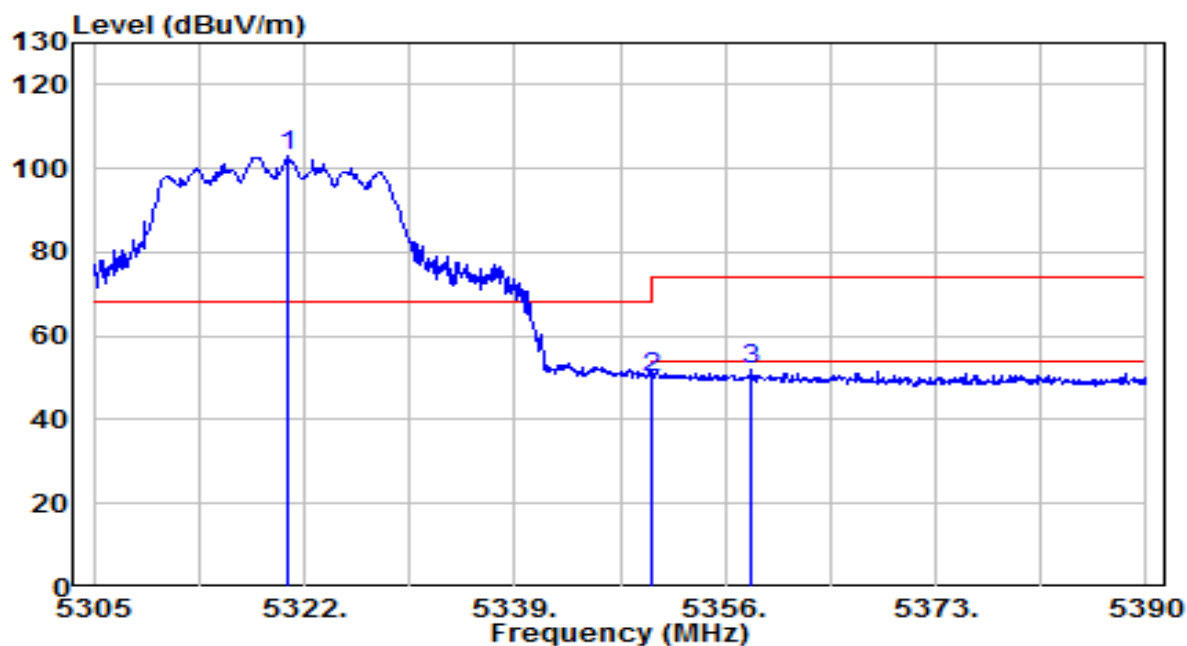


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.640	99.20	4.01	103.21	N/A	N/A	215	315	Peak
2	* 5350.000	46.24	4.03	50.28	-17.92	68.20	215	315	Peak
3	5358.125	47.79	4.04	51.83	-22.17	74.00	215	315	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

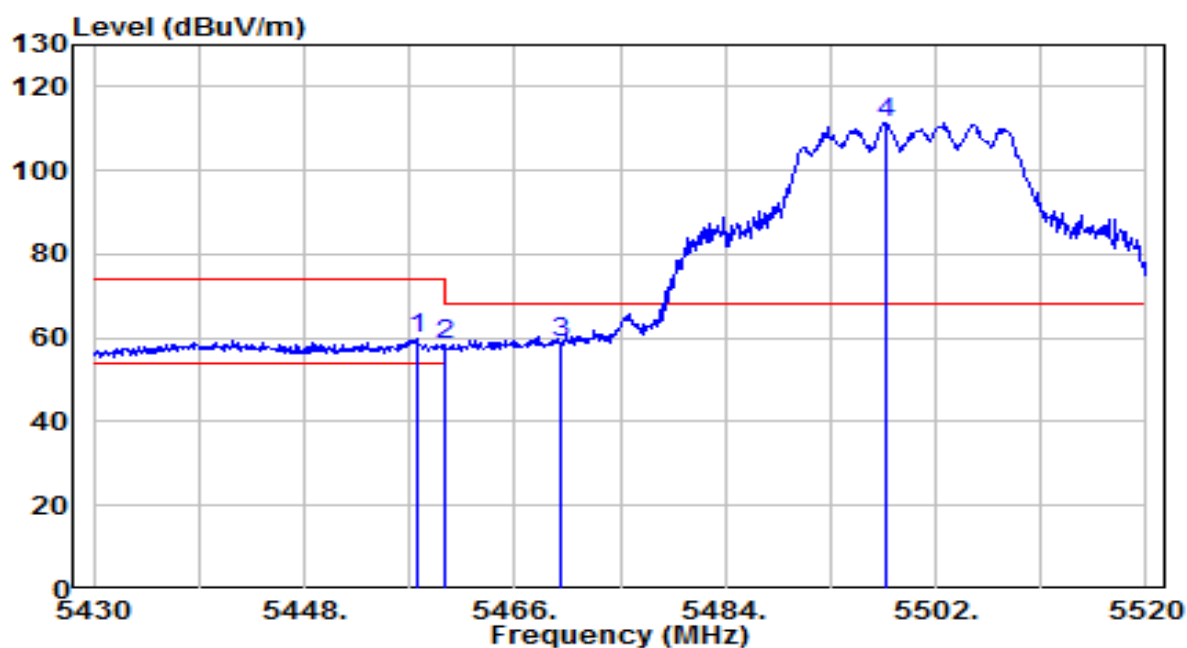


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.630	55.79	4.11	59.90	-14.10	74.00	160	340	Peak
2	5460.000	54.09	4.11	58.20	-10.00	68.20	160	340	Peak
3	* 5470.000	54.73	4.12	58.85	-9.35	68.20	160	340	Peak
4	5497.680	107.32	4.14	111.45	N/A	N/A	160	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

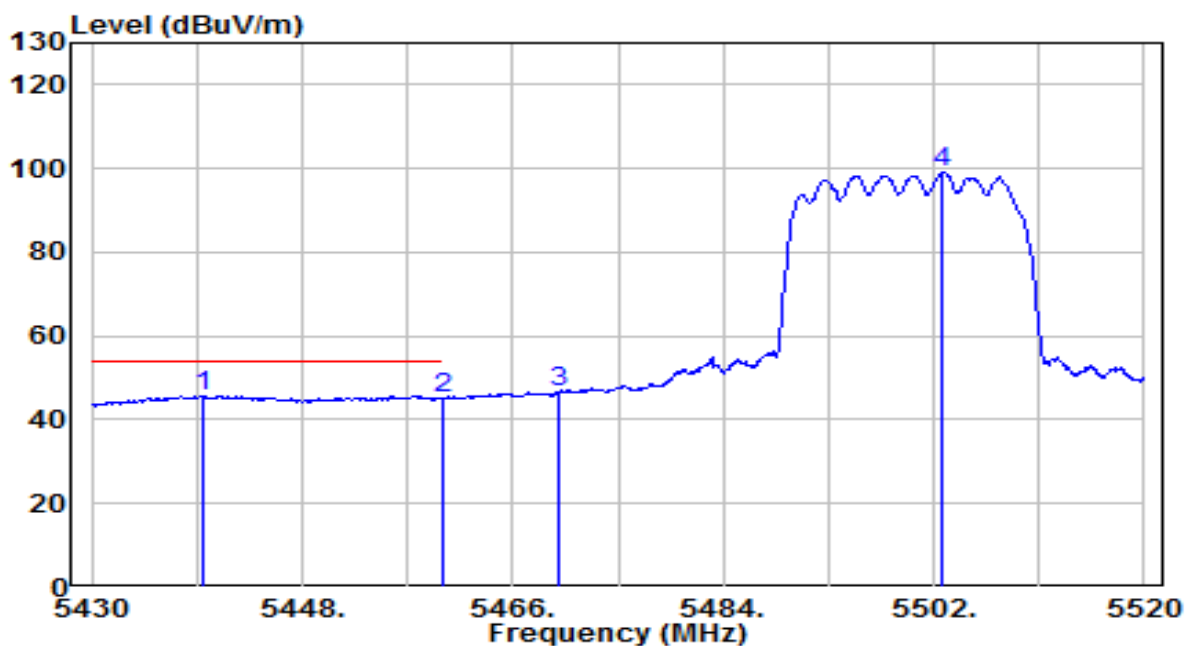


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5439.540	41.76	4.10	45.86	-8.14	54.00	160	340	Average
2		5460.000	41.23	4.11	45.34	-8.66	54.00	160	340	Average
3		5470.000	42.62	4.12	46.73	N/A	N/A	160	340	Average
4		5502.720	95.17	4.15	99.32	N/A	N/A	160	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

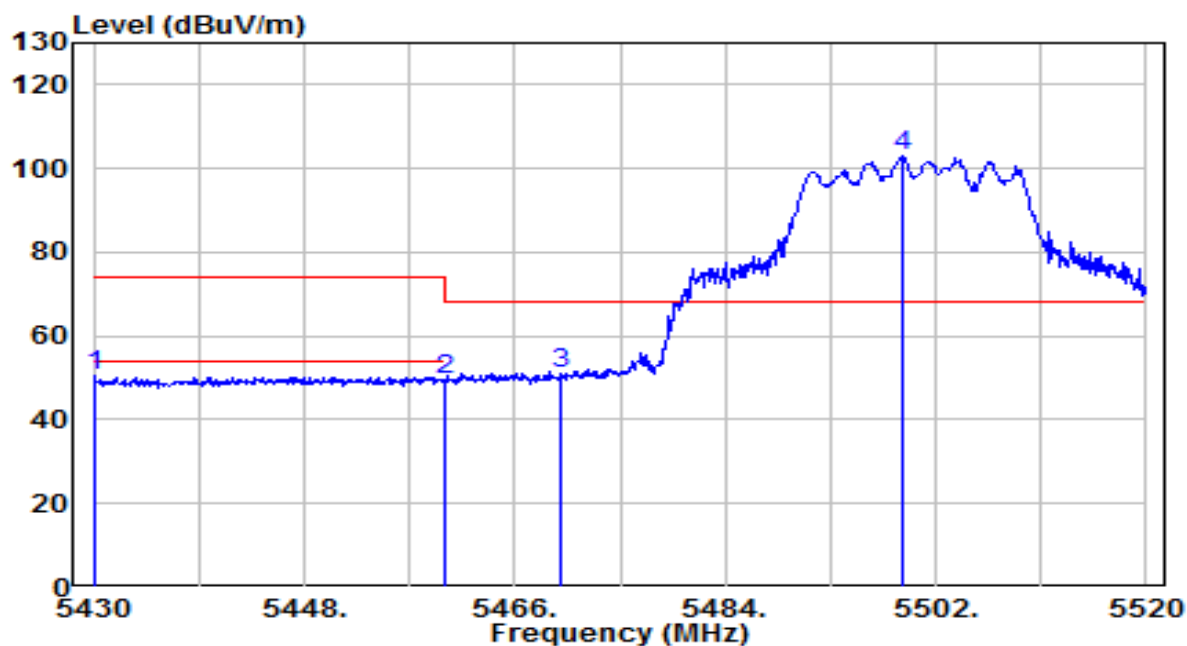


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5430.090	46.28	4.09	50.37	-23.63	74.00	250	305	Peak
2	5460.000	45.42	4.11	49.53	-18.67	68.20	250	305	Peak
3	* 5470.000	47.00	4.12	51.12	-17.08	68.20	250	305	Peak
4	5499.210	98.73	4.14	102.87	N/A	N/A	250	305	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

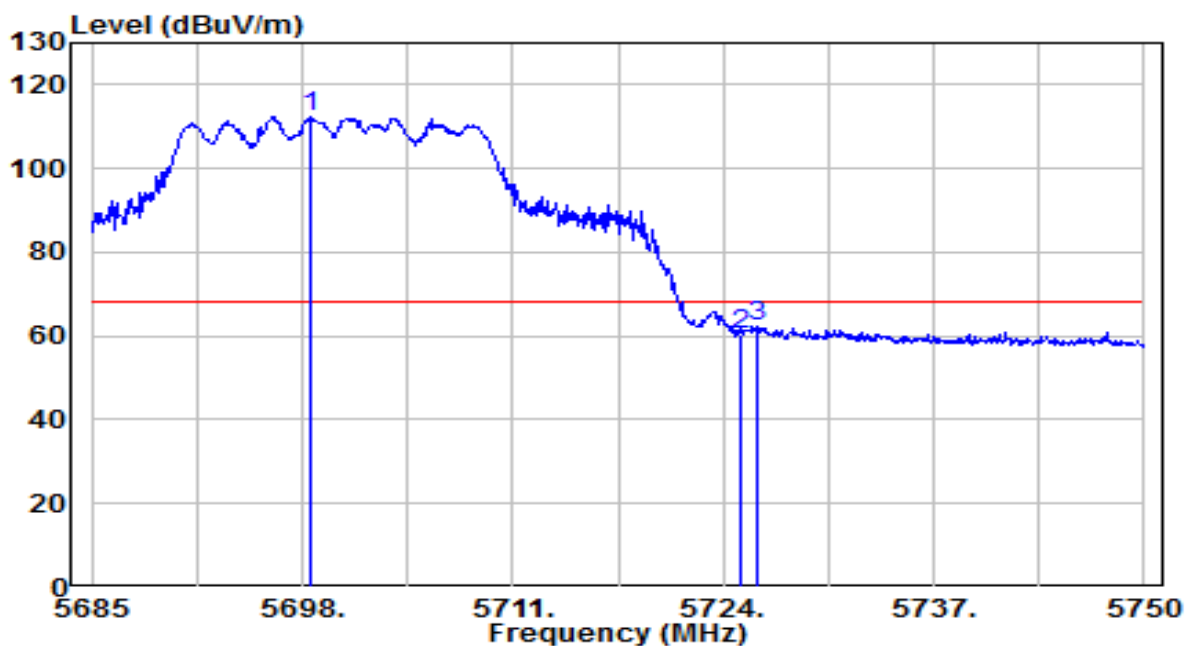


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.520	107.56	4.81	112.36	N/A	N/A	225	5	Peak
2	5725.000	55.68	4.90	60.57	-7.63	68.20	225	5	Peak
3	* 5726.145	57.64	4.90	62.54	-5.66	68.20	225	5	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

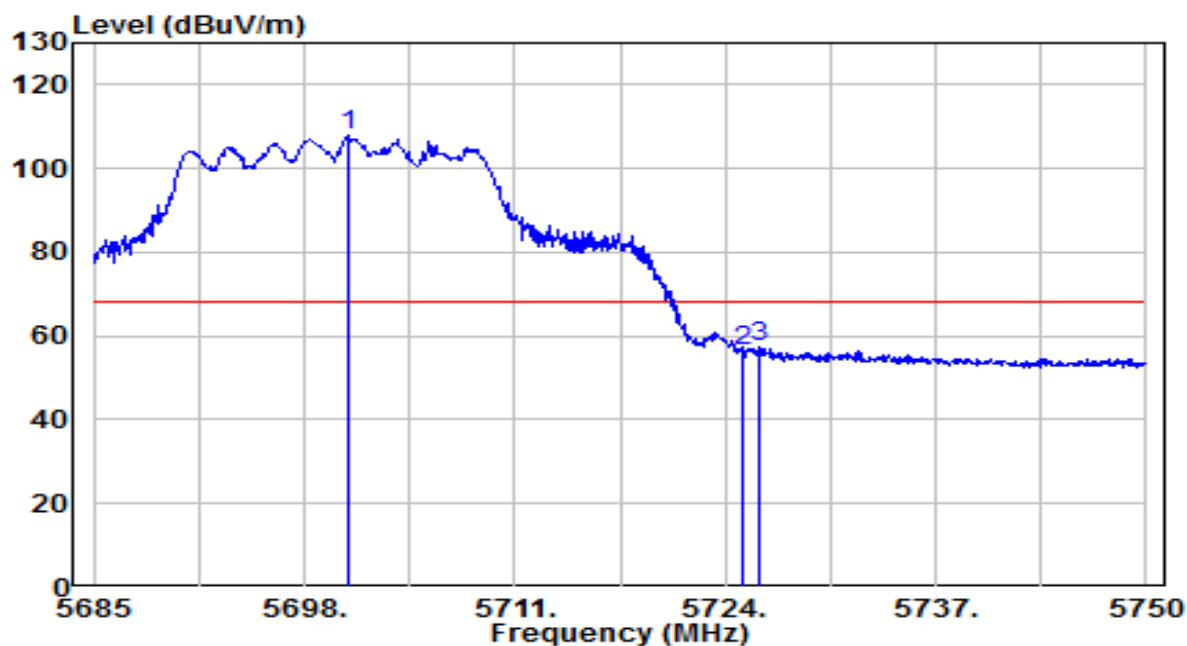


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.795	102.88	4.81	107.70	N/A	N/A	230	310	Peak
2	5725.000	51.44	4.90	56.34	-11.86	68.20	230	310	Peak
3	* 5726.145	52.42	4.90	57.32	-10.88	68.20	230	310	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

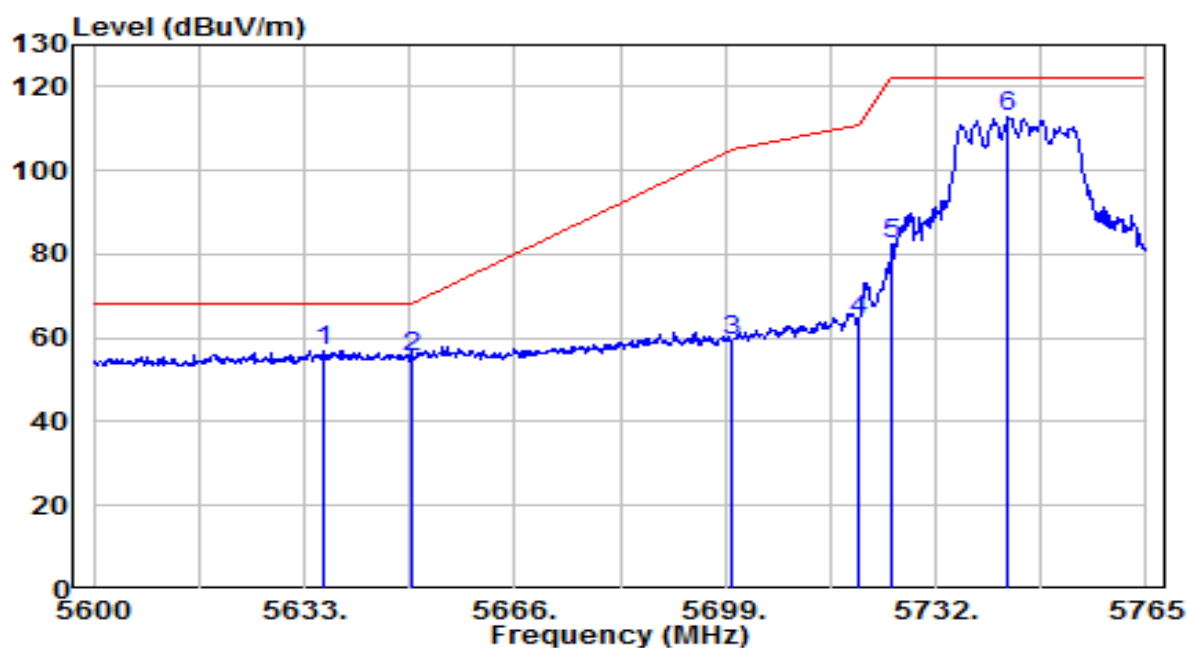


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.135	52.37	4.60	56.97	-11.23	68.20	225	345	Peak
2		5650.000	50.73	4.64	55.38	-12.82	68.20	225	345	Peak
3		5700.000	54.50	4.81	59.31	-45.89	105.20	225	345	Peak
4		5720.000	59.20	4.88	64.08	-46.72	110.80	225	345	Peak
5		5725.000	77.42	4.90	82.32	-39.88	122.20	225	345	Peak
6		5743.385	107.83	4.96	112.79	N/A	N/A	225	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

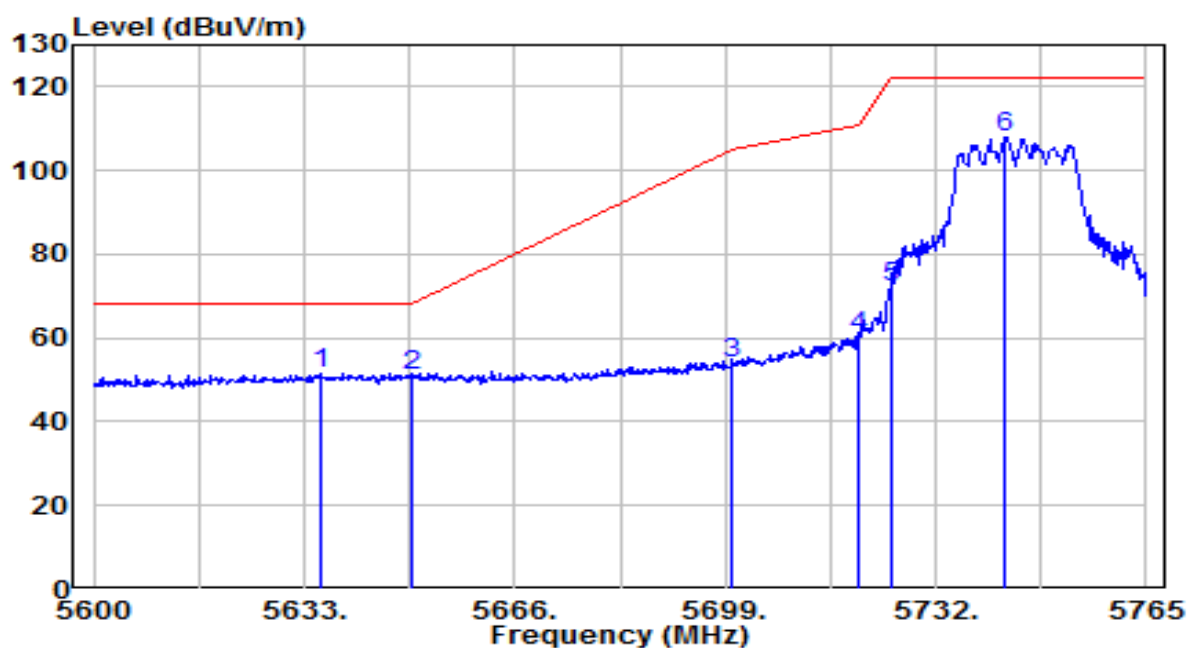


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.805	47.10	4.60	51.70	-16.50	68.20	270	295	Peak
2		5650.000	46.25	4.64	50.90	-17.30	68.20	270	295	Peak
3		5700.000	49.17	4.81	53.98	-51.22	105.20	270	295	Peak
4		5720.000	55.42	4.88	60.30	-50.50	110.80	270	295	Peak
5		5725.000	67.10	4.90	72.00	-50.20	122.20	270	295	Peak
6		5742.890	102.99	4.96	107.94	N/A	N/A	270	295	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

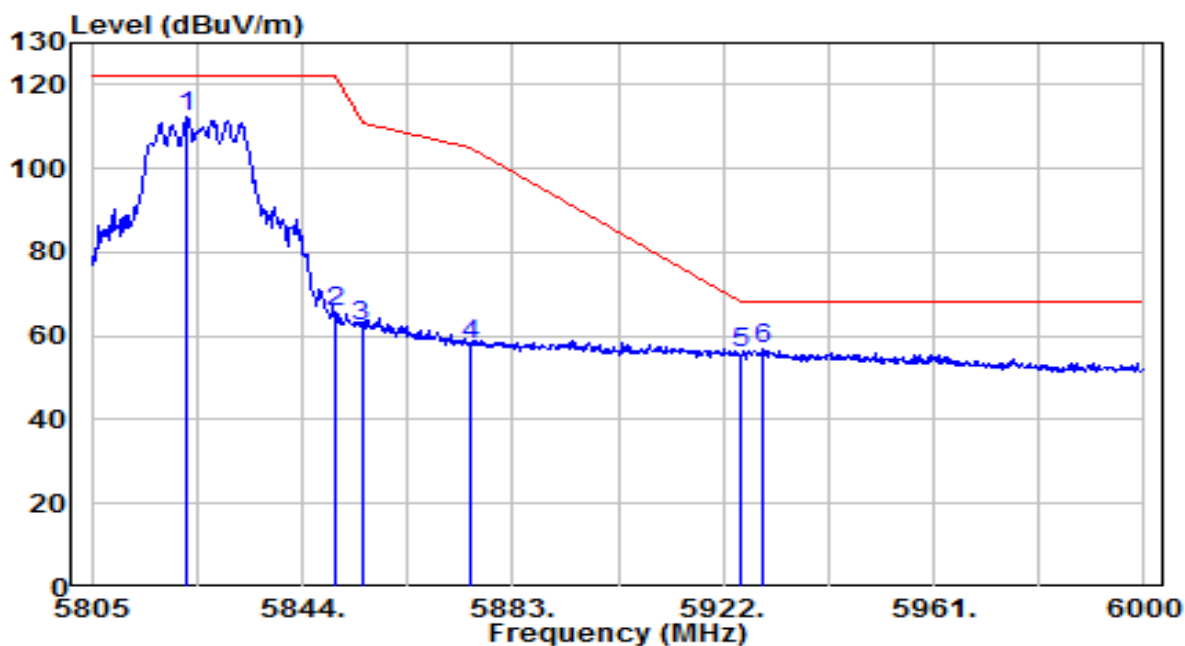


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.745	106.88	5.22	112.11	N/A	N/A	275	20	Peak
2	5850.000	60.64	5.32	65.96	-56.24	122.20	275	20	Peak
3	5855.000	56.90	5.33	62.23	-48.57	110.80	275	20	Peak
4	5875.000	52.51	5.40	57.91	-47.29	105.20	275	20	Peak
5	5925.000	50.13	5.57	55.70	-12.50	68.20	275	20	Peak
6	* 5929.410	51.28	5.58	56.87	-11.33	68.20	275	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

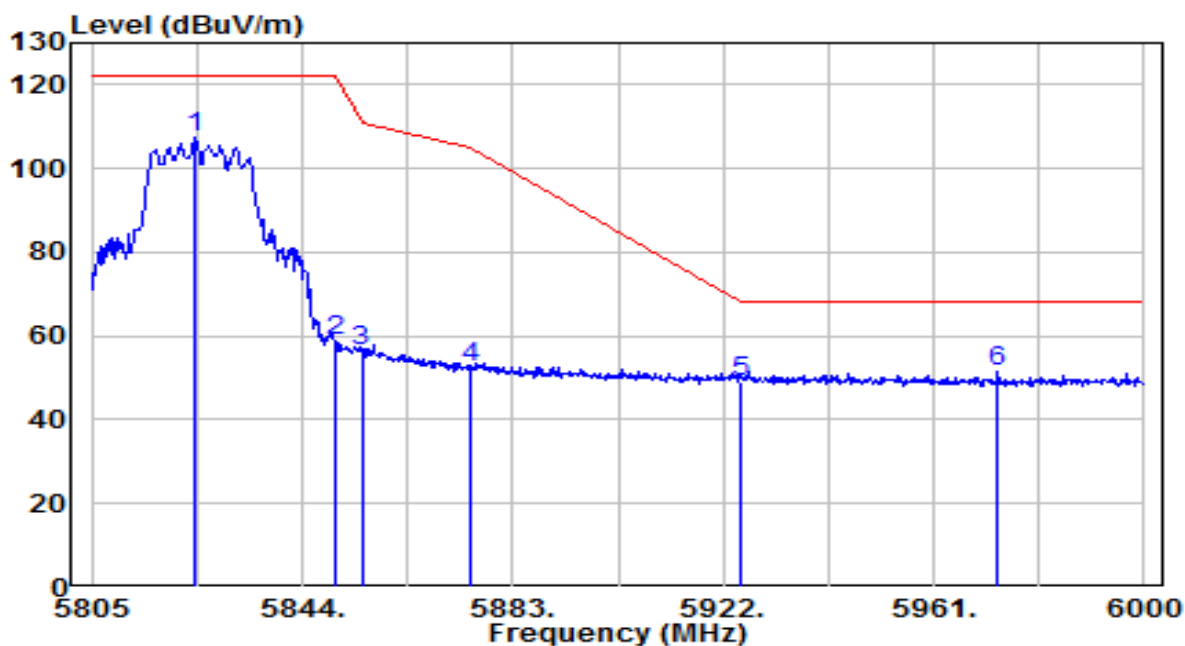


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.305	102.38	5.23	107.61	N/A	N/A	230	305	Peak
2	5850.000	53.50	5.32	58.82	-63.38	122.20	230	305	Peak
3	5855.000	51.13	5.33	56.47	-54.33	110.80	230	305	Peak
4	5875.000	47.21	5.40	52.61	-52.59	105.20	230	305	Peak
5	5925.000	43.50	5.57	49.07	-19.13	68.20	230	305	Peak
6	* 5972.895	45.67	5.73	51.40	-16.80	68.20	230	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

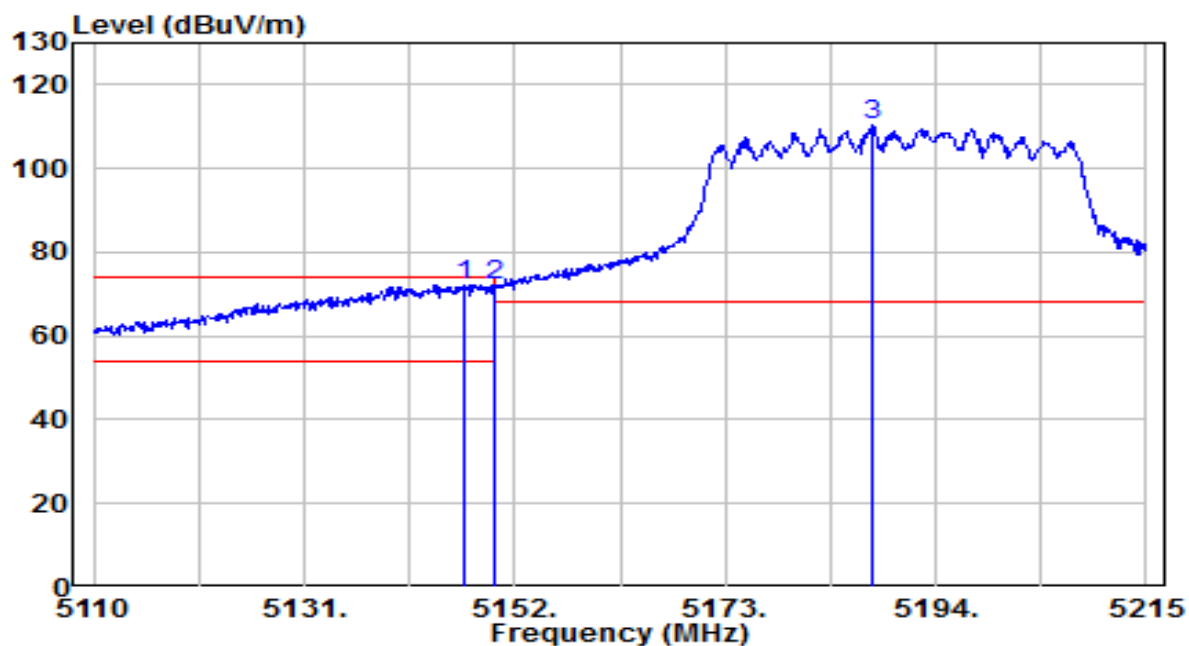


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.065	68.37	3.89	72.26	-1.74	74.00	225	5	Peak
2		5150.000	68.22	3.89	72.11	-1.89	74.00	225	5	Peak
3		5187.805	106.29	3.92	110.21	N/A	N/A	225	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

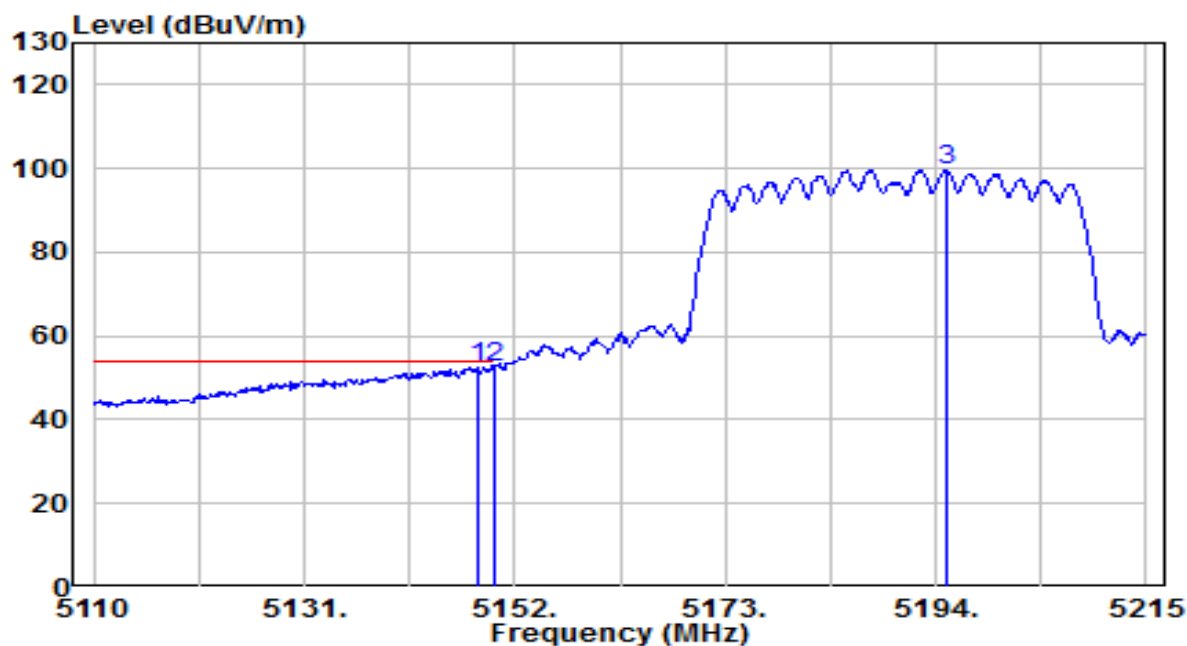


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.220	48.81	3.89	52.71	-1.29	54.00	225	5	Average
2	5150.000	48.63	3.89	52.53	-1.47	54.00	225	5	Average
3	5195.050	95.62	3.93	99.55	N/A	N/A	225	5	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

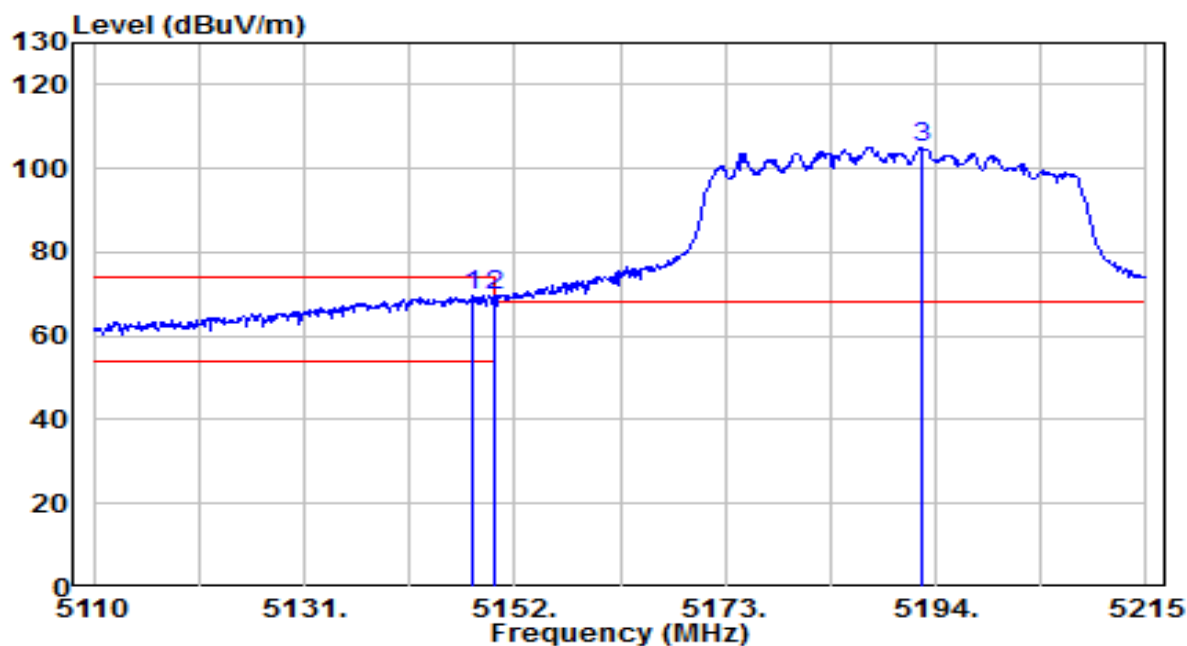


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.695	65.70	3.89	69.59	-4.41	74.00	230	315	Peak
2	* 5150.000	65.75	3.89	69.65	-4.35	74.00	230	315	Peak
3	5192.530	101.21	3.92	105.14	N/A	N/A	230	315	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

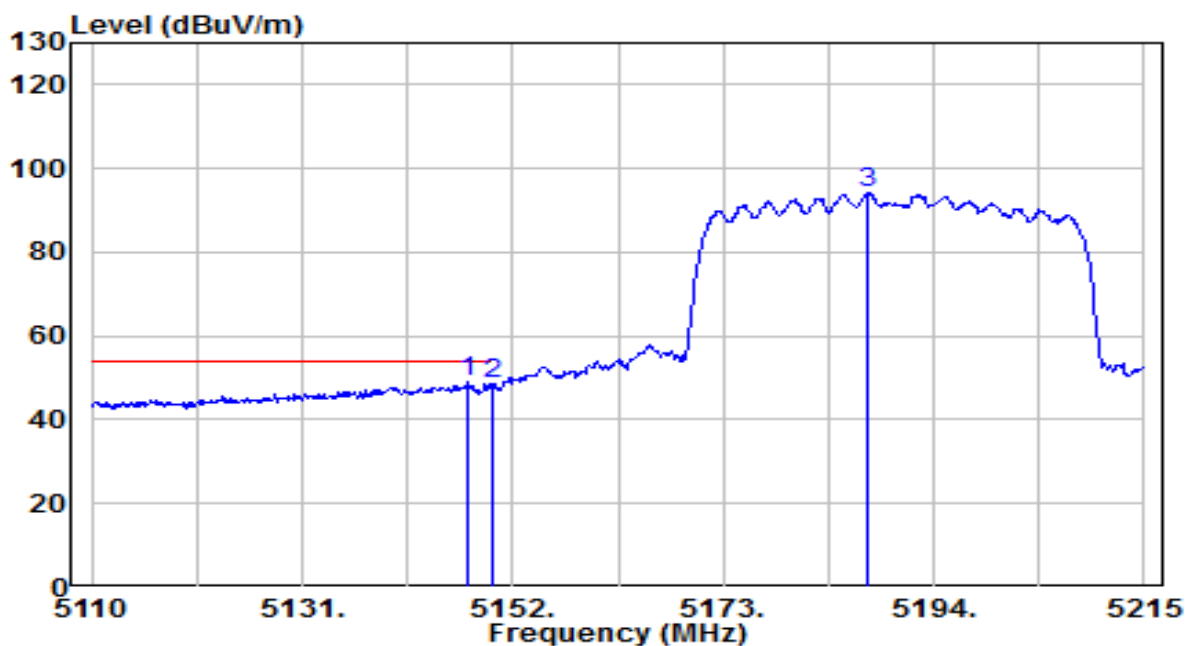


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.590	45.25	3.89	49.14	-4.86	54.00	230	315	Average
2		5150.000	44.43	3.89	48.33	-5.67	54.00	230	315	Average
3		5187.490	90.16	3.92	94.08	N/A	N/A	230	315	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

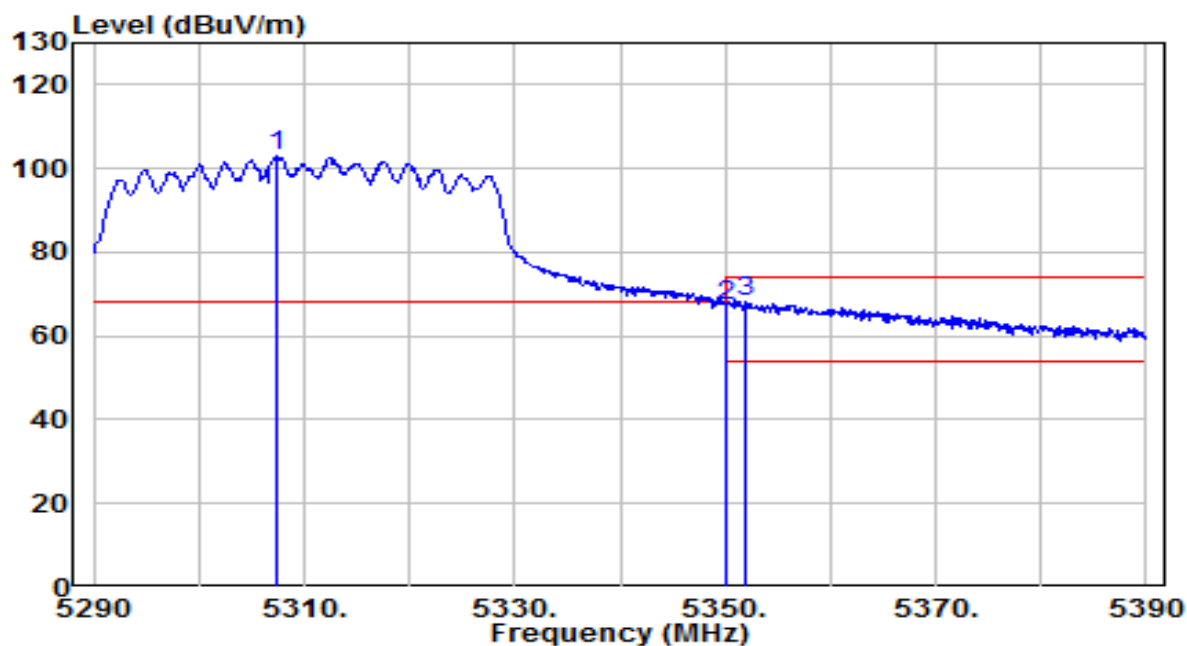


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.400	98.92	4.01	102.92	N/A	N/A	135	340	Peak
2	* 5350.000	63.32	4.03	67.35	-0.85	68.20	135	340	Peak
3	5351.800	64.30	4.04	68.34	-5.66	74.00	135	340	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

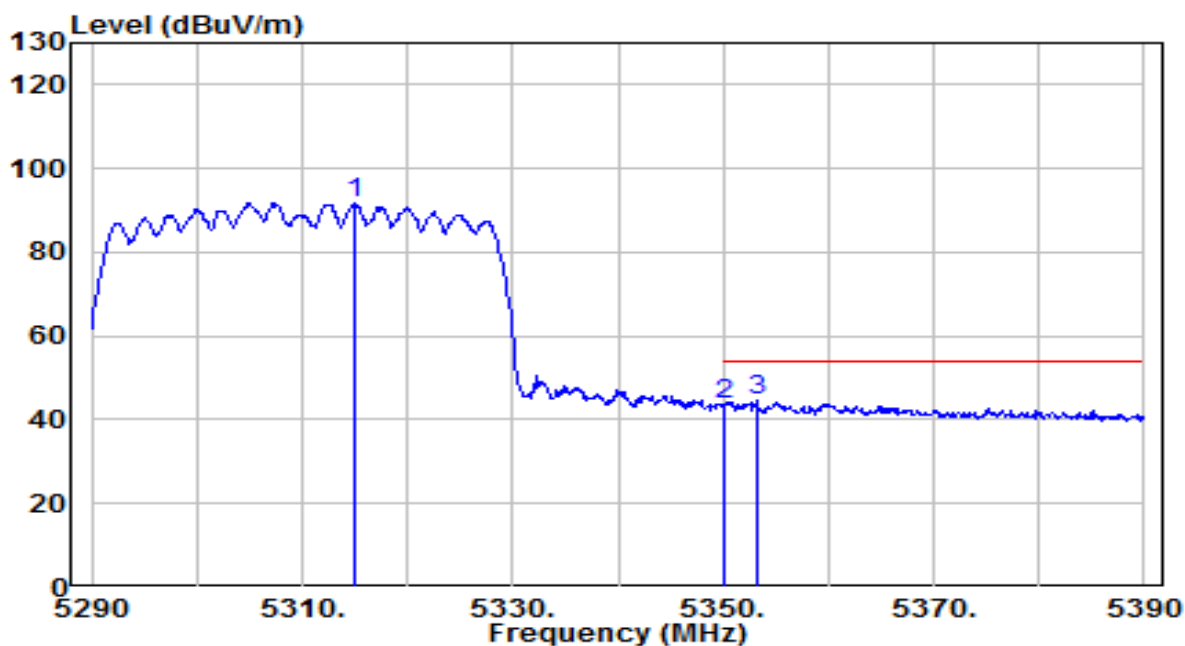


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.000	87.88	4.01	91.89	N/A	N/A	135	340	Average
2	5350.000	39.75	4.03	43.79	-10.21	54.00	135	340	Average
3	* 5353.200	40.45	4.04	44.49	-9.51	54.00	135	340	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

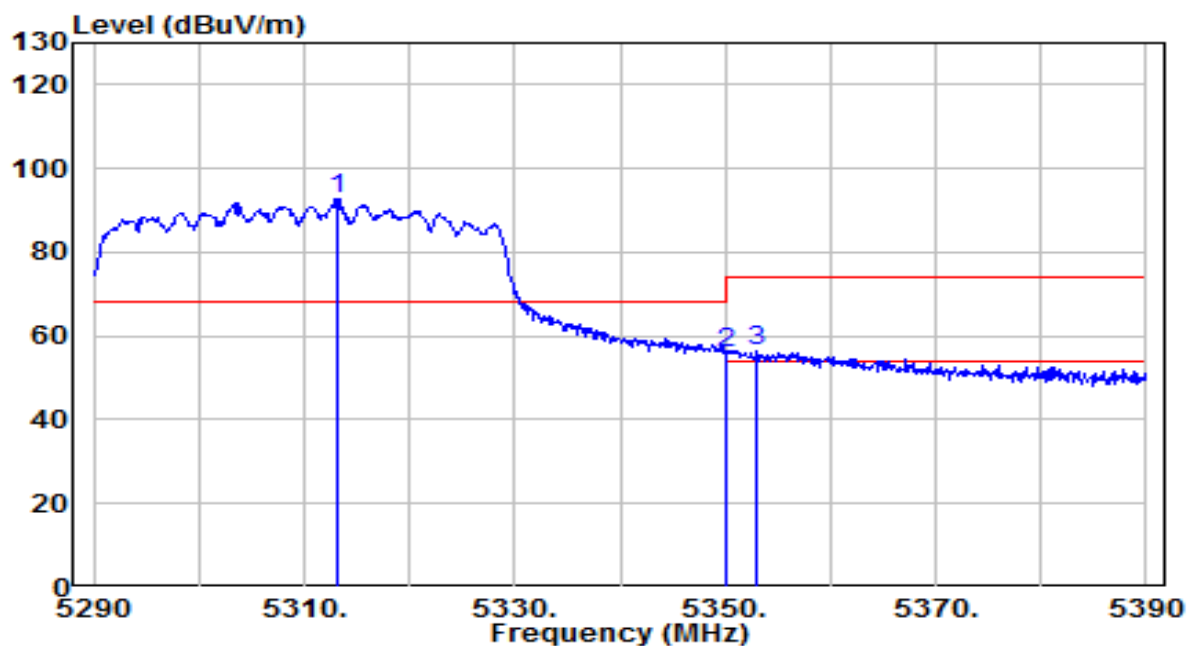


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.100	88.71	4.01	92.72	N/A	N/A	215	315	Peak
2	* 5350.000	51.74	4.03	55.77	-12.43	68.20	215	315	Peak
3	5353.000	52.16	4.04	56.20	-17.80	74.00	215	315	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

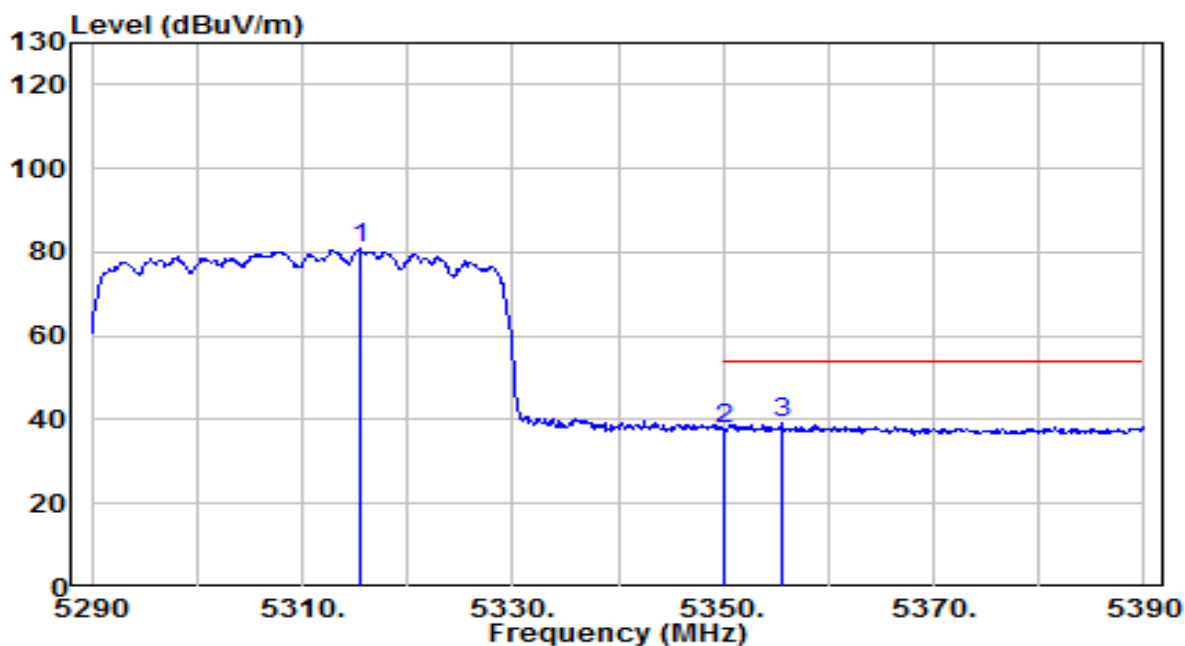


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.600	76.80	4.01	80.82	N/A	N/A	215	315	Average
2	5350.000	33.77	4.03	37.81	-16.19	54.00	215	315	Average
3	* 5355.600	35.03	4.04	39.07	-14.93	54.00	215	315	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

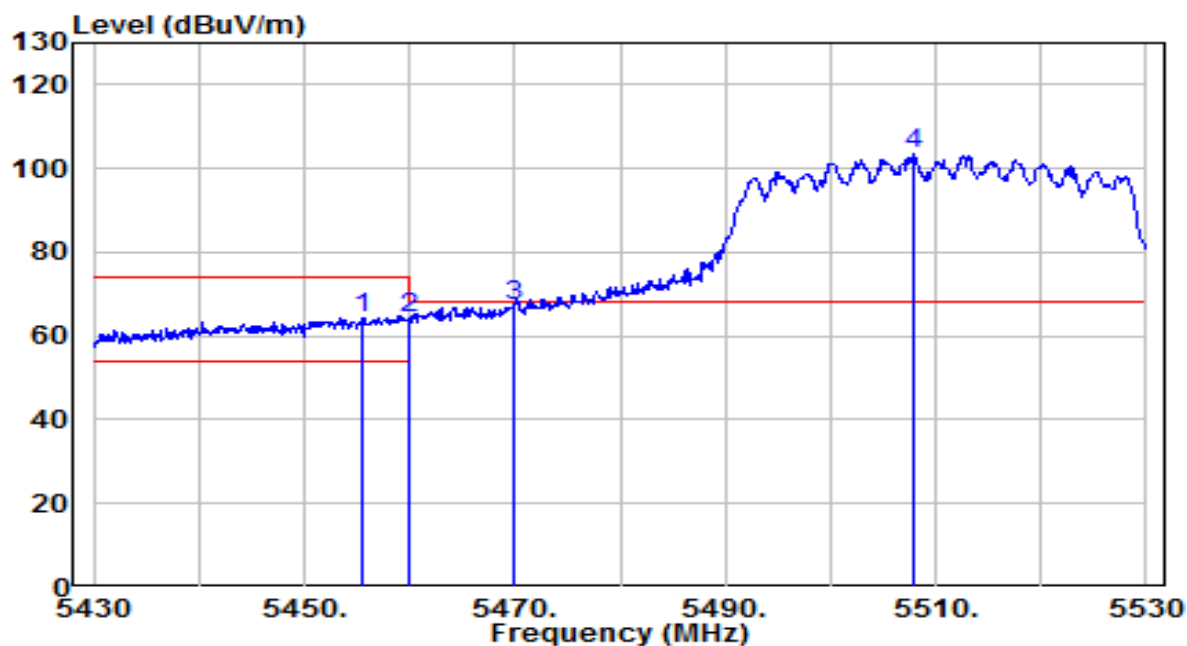


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.600	60.32	4.11	64.43	-9.57	74.00	160	340	Peak
2	5460.000	60.08	4.11	64.20	-4.00	68.20	160	340	Peak
3	* 5470.000	63.27	4.12	67.39	-0.81	68.20	160	340	Peak
4	5507.900	99.22	4.17	103.39	N/A	N/A	160	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

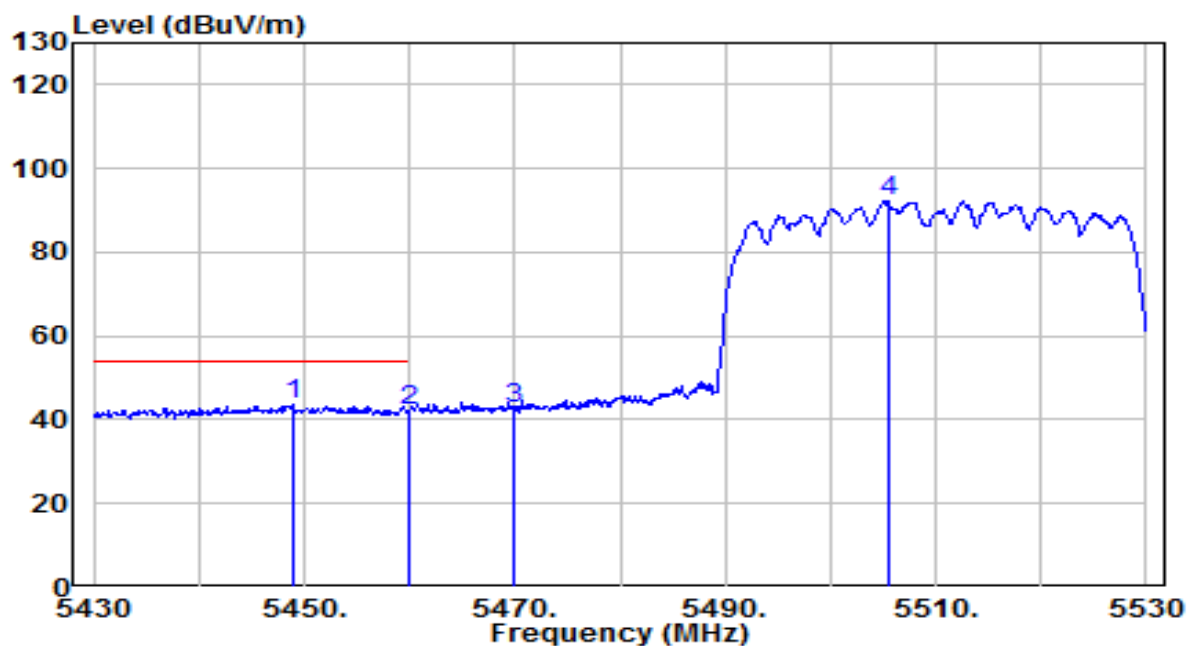


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5448.900	39.76	4.10	43.86	-10.14	54.00	160	340	Average
2	5460.000	37.97	4.11	42.08	-11.92	54.00	160	340	Average
3	5470.000	38.62	4.12	42.74	N/A	N/A	160	340	Average
4	5505.500	88.18	4.16	92.34	N/A	N/A	160	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

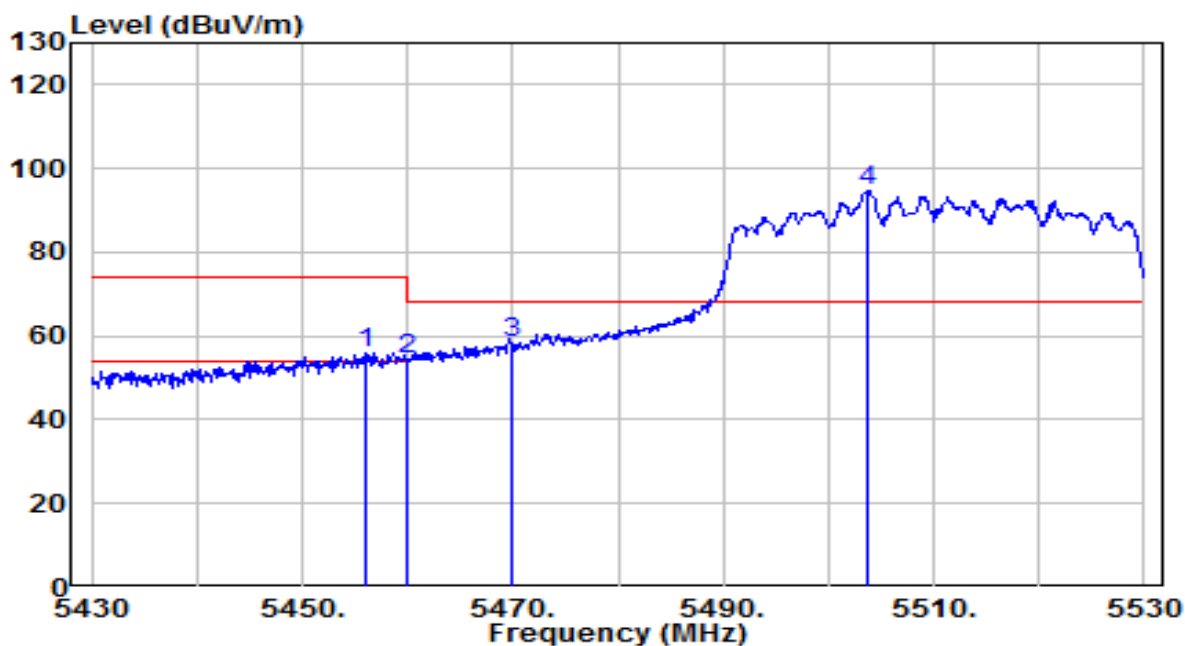


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.000	51.84	4.11	55.95	-18.05	74.00	250	305	Peak
2	5460.000	50.15	4.11	54.26	-13.94	68.20	250	305	Peak
3	* 5470.000	54.46	4.12	58.57	-9.63	68.20	250	305	Peak
4	5503.800	90.67	4.15	94.82	N/A	N/A	250	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

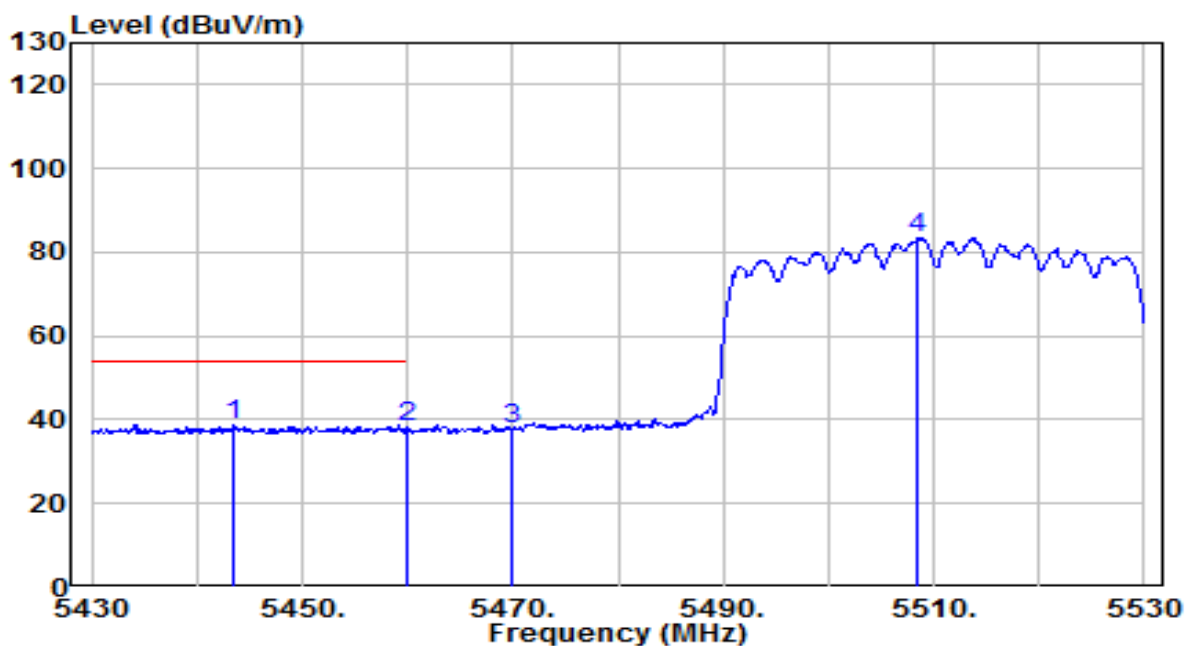


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5443.500	34.60	4.10	38.70	-15.30	54.00	250	305	Average
2		5460.000	34.03	4.11	38.15	-15.85	54.00	250	305	Average
3		5470.000	33.77	4.12	37.89	N/A	N/A	250	305	Average
4		5508.500	79.26	4.17	83.43	N/A	N/A	250	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

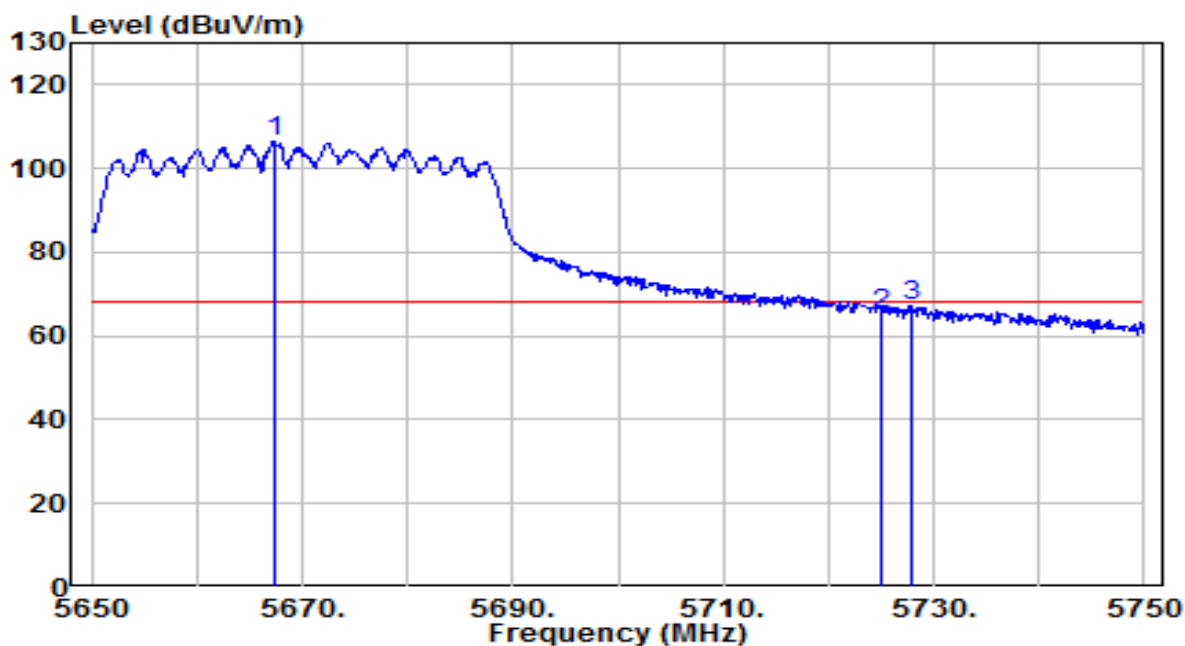


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5667.300	101.78	4.70	106.48	N/A	N/A	225	5	Peak
2	5725.000	60.38	4.90	65.28	-2.92	68.20	225	5	Peak
3	* 5727.900	62.49	4.91	67.40	-0.80	68.20	225	5	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

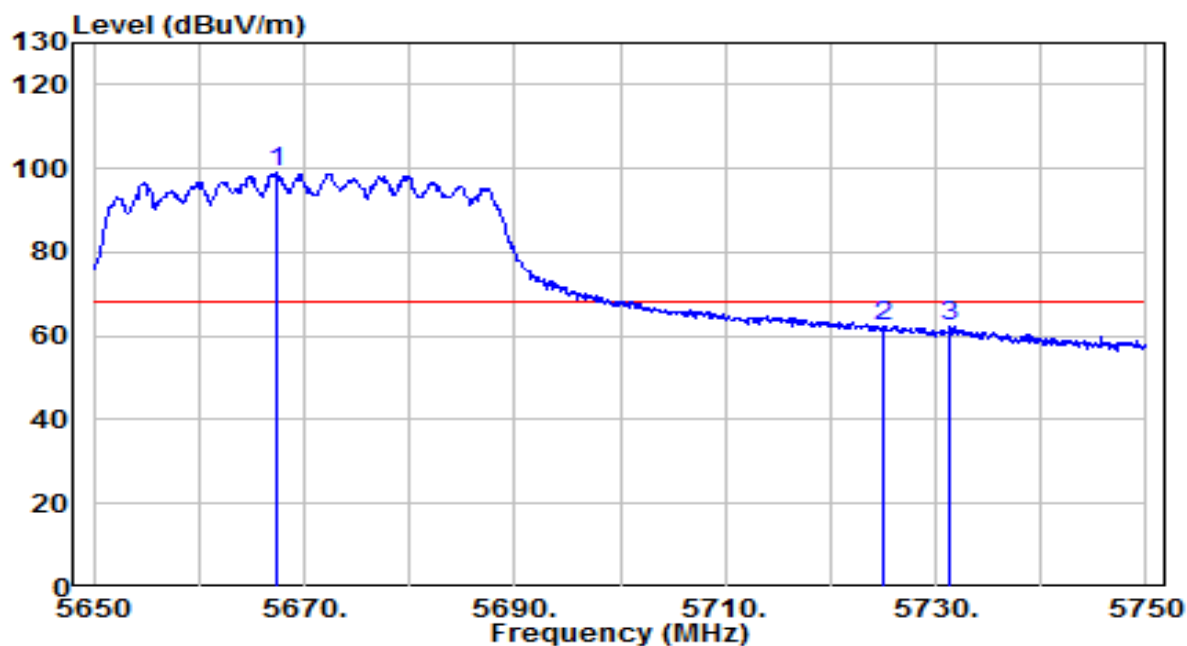


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5667.400	94.29	4.70	98.99	N/A	N/A	230	310	Peak
2	* 5725.000	57.30	4.90	62.20	-6.00	68.20	230	310	Peak
3	5731.400	57.25	4.92	62.16	-6.04	68.20	230	310	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

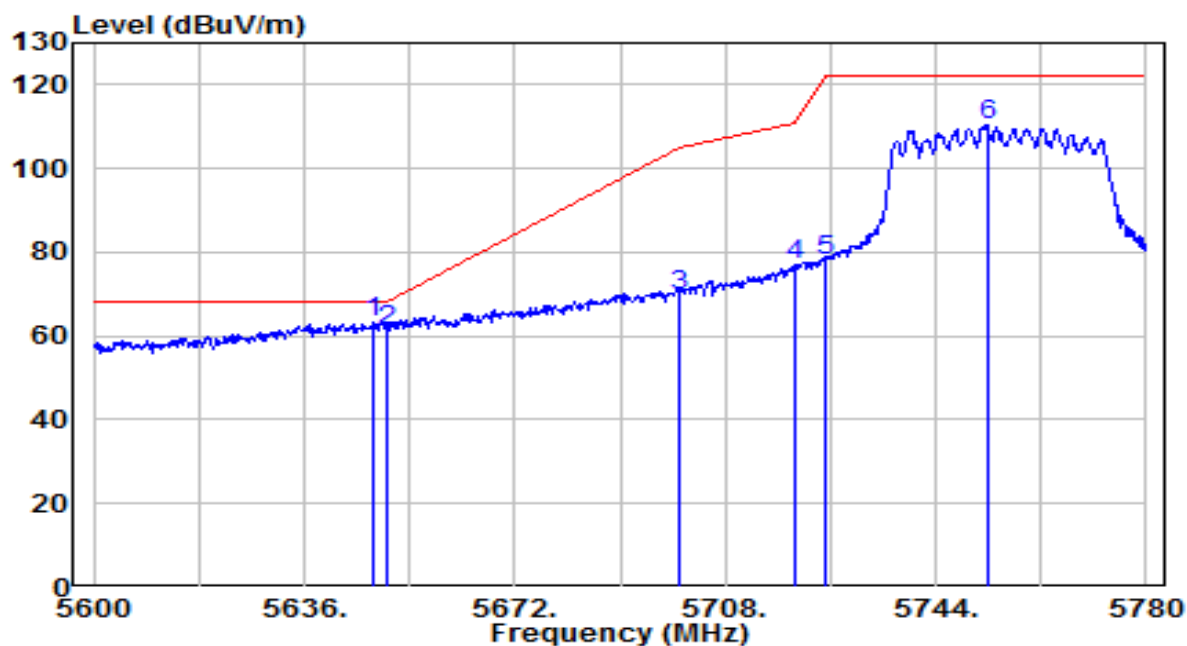


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.880	58.79	4.64	63.43	-4.77	68.20	225	345	Peak
2		5650.000	56.46	4.64	61.11	-7.09	68.20	225	345	Peak
3		5700.000	64.70	4.81	69.51	-35.69	105.20	225	345	Peak
4		5720.000	72.11	4.88	76.99	-33.81	110.80	225	345	Peak
5		5725.000	72.88	4.90	77.78	-44.42	122.20	225	345	Peak
6		5752.820	105.27	4.99	110.26	N/A	N/A	225	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

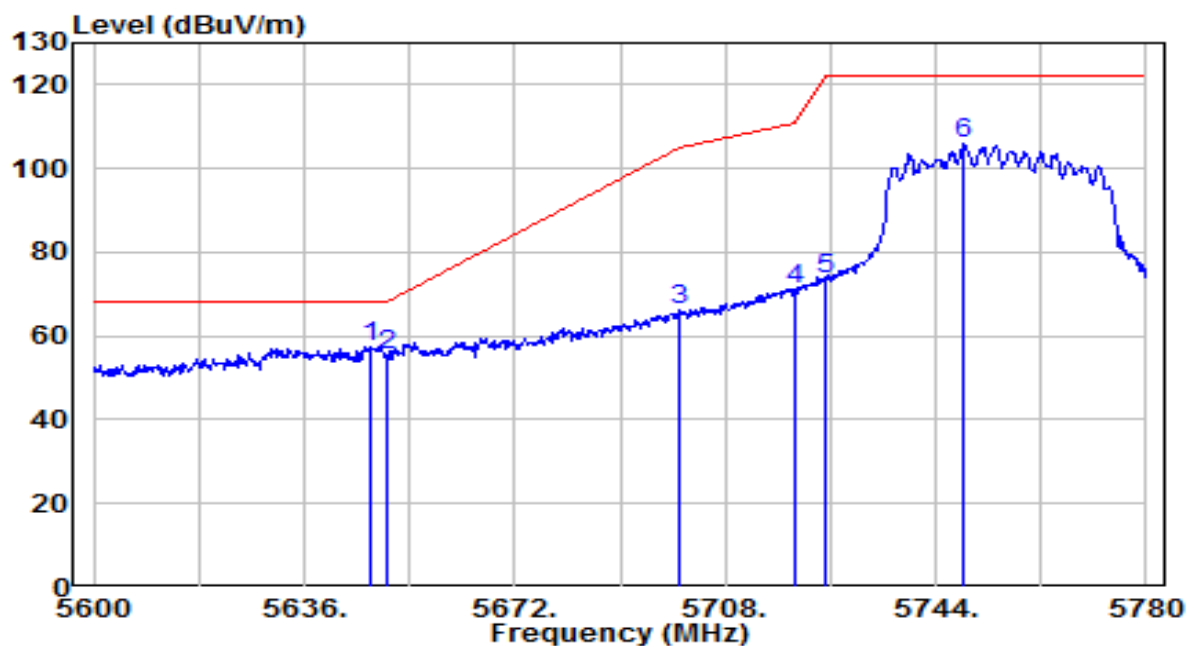


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.160	52.99	4.63	57.63	-10.57	68.20	270	295	Peak
2		5650.000	50.86	4.64	55.51	-12.69	68.20	270	295	Peak
3		5700.000	61.21	4.81	66.03	-39.17	105.20	270	295	Peak
4		5720.000	66.43	4.88	71.31	-39.49	110.80	270	295	Peak
5		5725.000	68.45	4.90	73.35	-48.85	122.20	270	295	Peak
6		5748.860	100.84	4.98	105.82	N/A	N/A	270	295	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

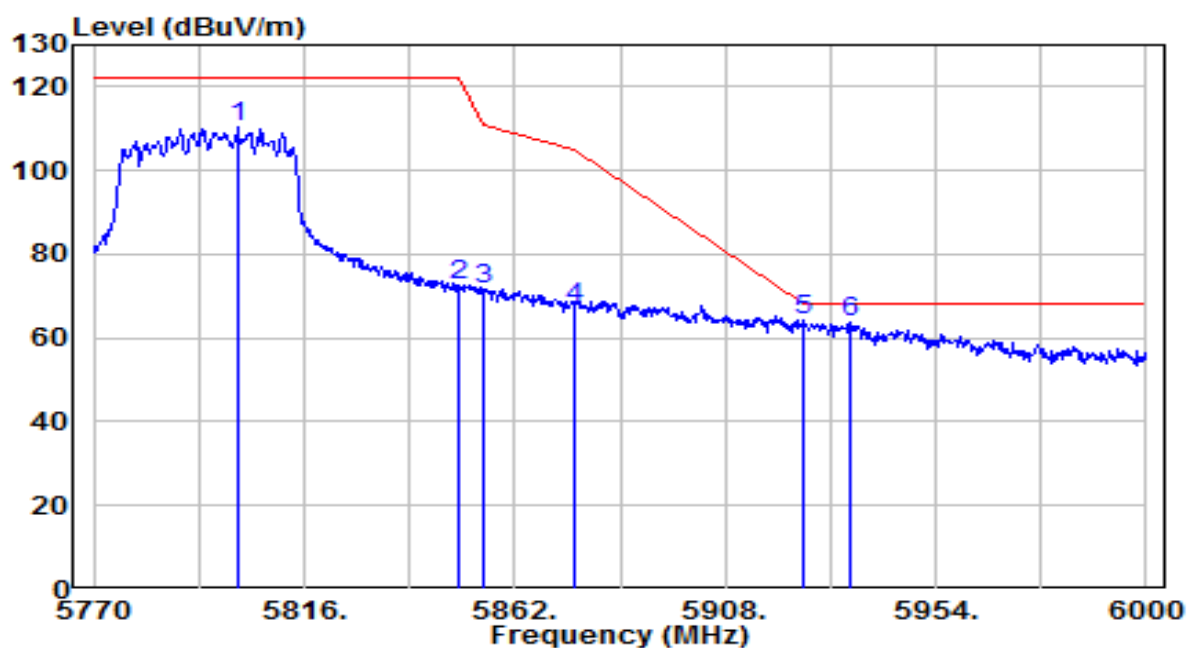


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5801.510	105.01	5.15	110.17	N/A	N/A	275	20	Peak
2	5850.000	67.40	5.32	72.72	-49.48	122.20	275	20	Peak
3	5855.000	66.27	5.33	71.61	-39.19	110.80	275	20	Peak
4	5875.000	61.57	5.40	66.97	-38.23	105.20	275	20	Peak
5	* 5925.000	58.67	5.57	64.24	-3.96	68.20	275	20	Peak
6	5935.370	57.99	5.60	63.60	-4.60	68.20	275	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

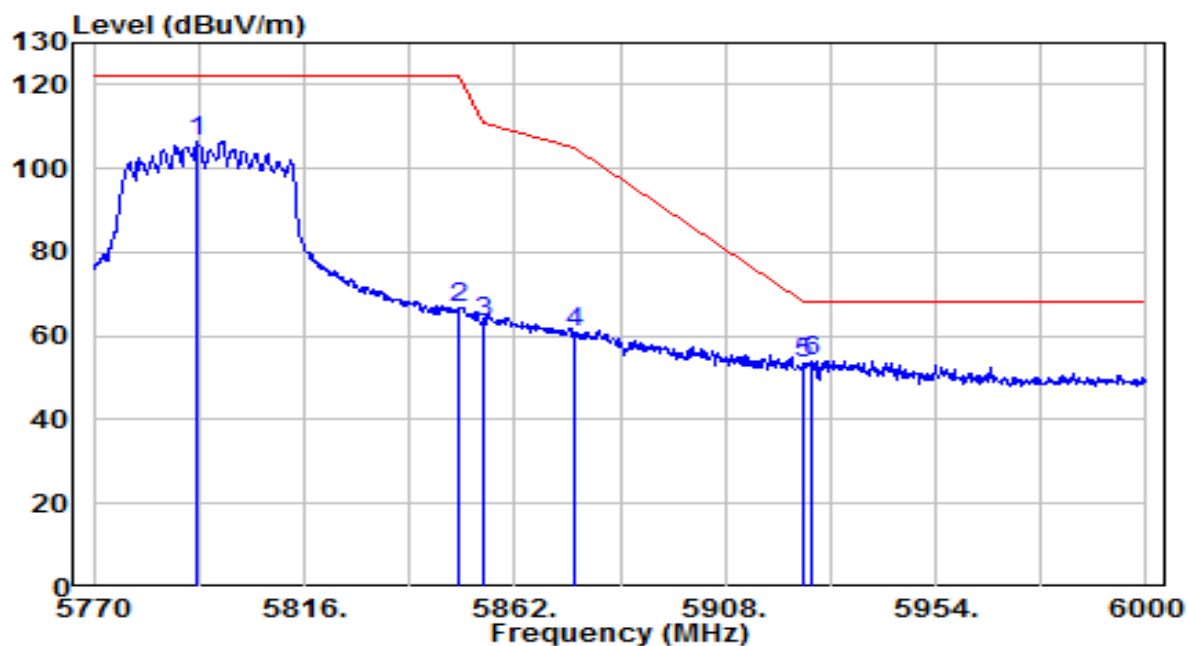


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5792.770	101.32	5.12	106.44	N/A	N/A	230	305	Peak
2	5850.000	61.48	5.32	66.80	-55.40	122.20	230	305	Peak
3	5855.000	58.13	5.33	63.46	-47.34	110.80	230	305	Peak
4	5875.000	55.46	5.40	60.86	-44.34	105.20	230	305	Peak
5	5925.000	47.67	5.57	53.24	-14.96	68.20	230	305	Peak
6	* 5926.630	48.61	5.57	54.19	-14.01	68.20	230	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

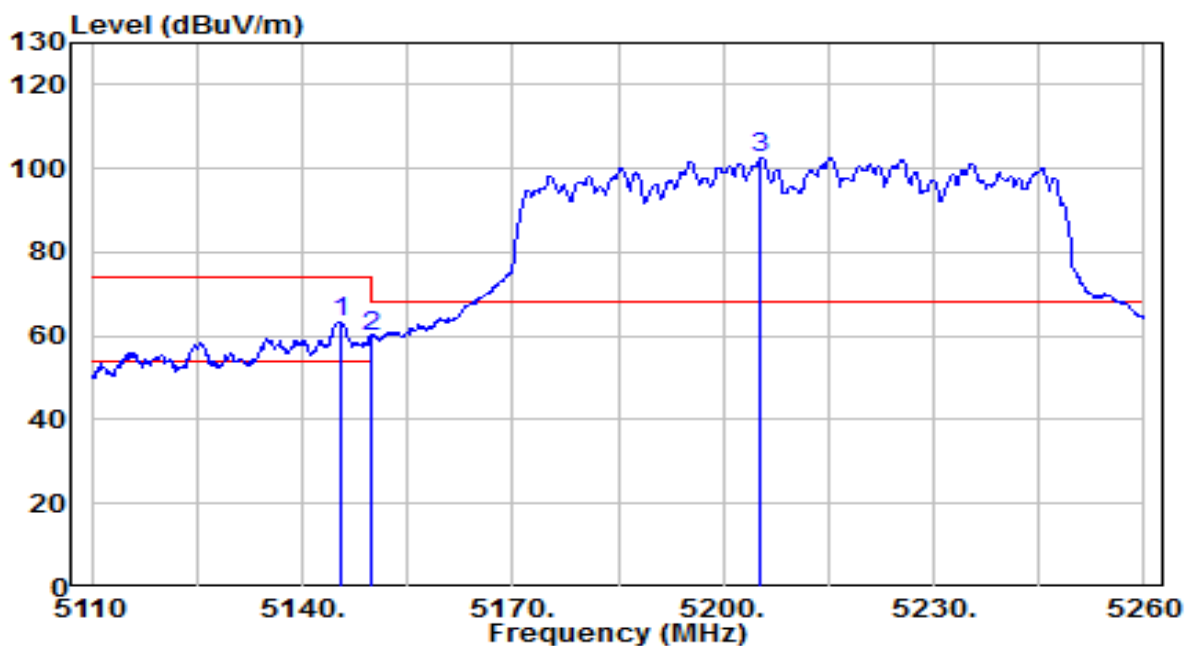


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.550	59.38	3.89	63.27	-10.73	74.00	225	5	Peak
2		5150.000	56.01	3.89	59.90	-14.10	74.00	225	5	Peak
3		5205.400	98.81	3.93	102.74	N/A	N/A	225	5	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

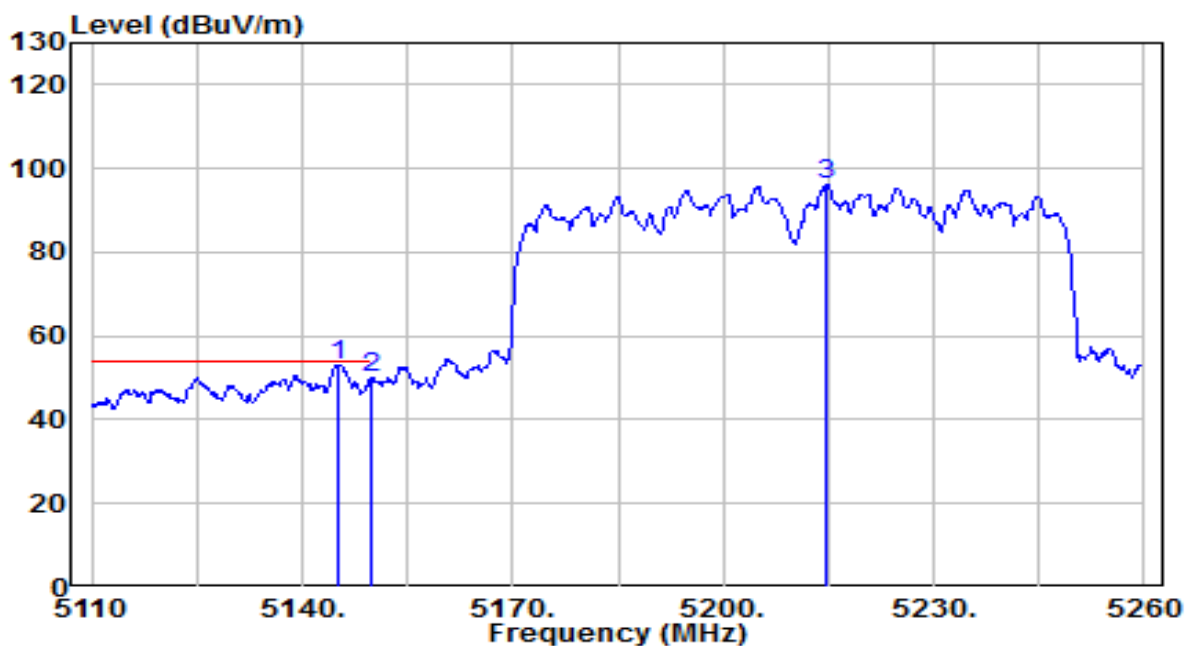


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.100	49.30	3.89	53.19	-0.81	54.00	225	5	Average
2		5150.000	46.32	3.89	50.22	-3.78	54.00	225	5	Average
3		5214.700	92.40	3.94	96.34	N/A	N/A	225	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

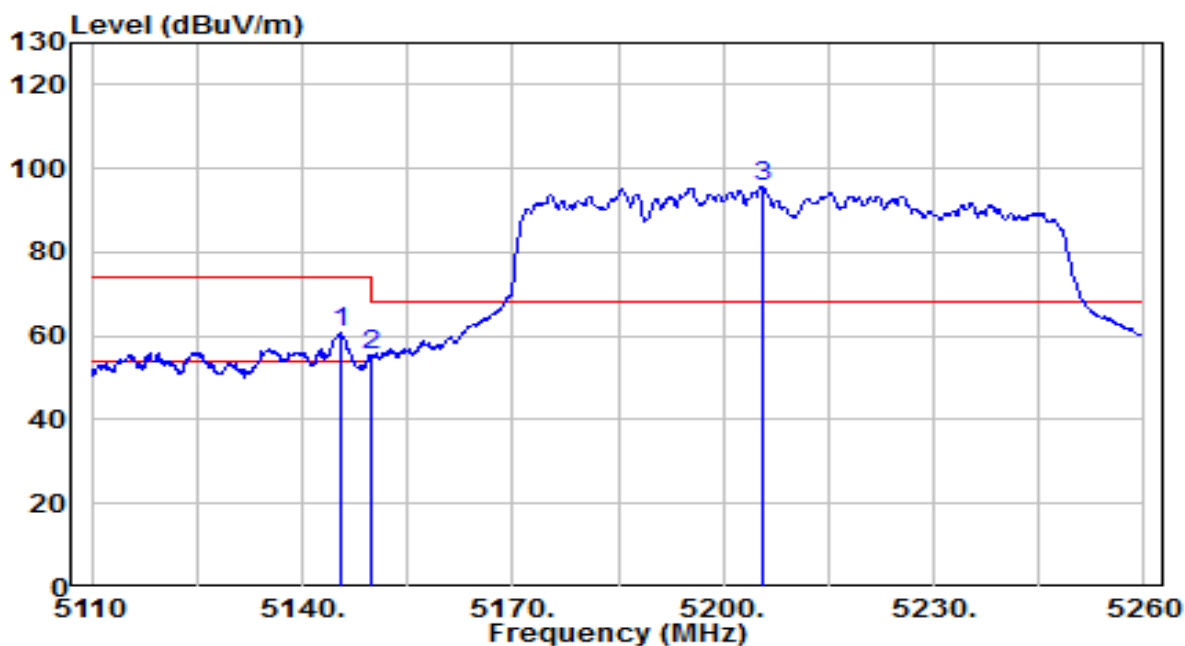


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.400	57.03	3.89	60.92	-13.08	74.00	230	315	Peak
2		5150.000	51.50	3.89	55.39	-18.61	74.00	230	315	Peak
3		5205.550	91.74	3.93	95.68	N/A	N/A	230	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

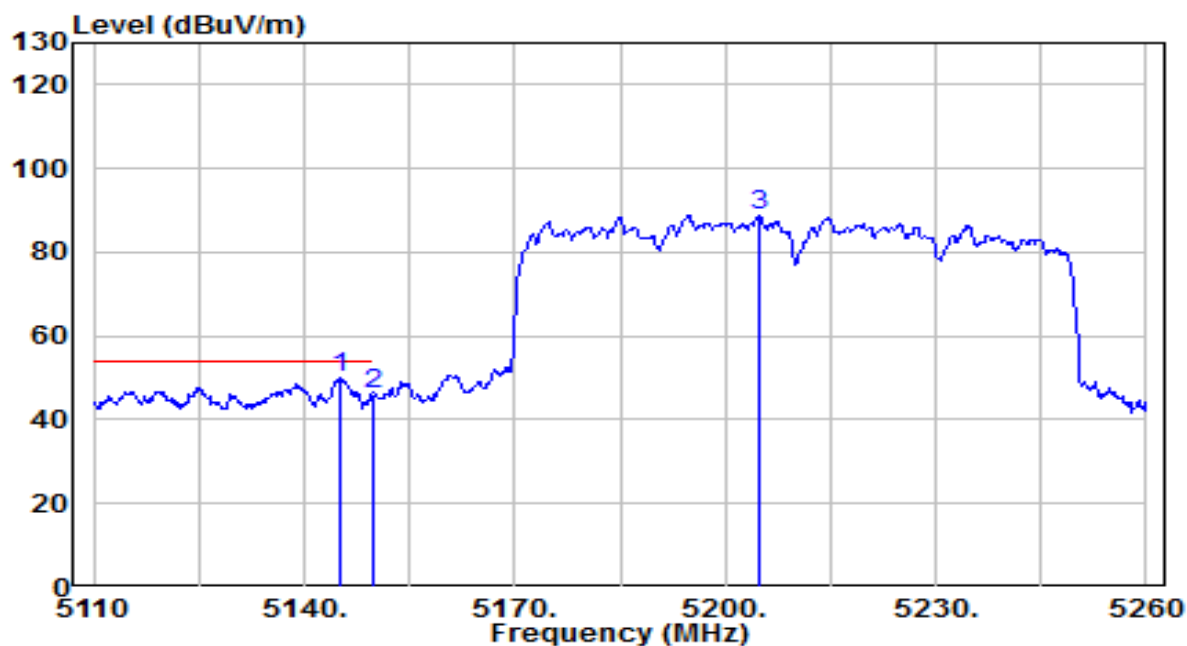


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.950	46.16	3.89	50.05	-3.95	54.00	230	315	Average
2		5150.000	42.13	3.89	46.02	-7.98	54.00	230	315	Average
3		5204.950	84.82	3.93	88.75	N/A	N/A	230	315	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

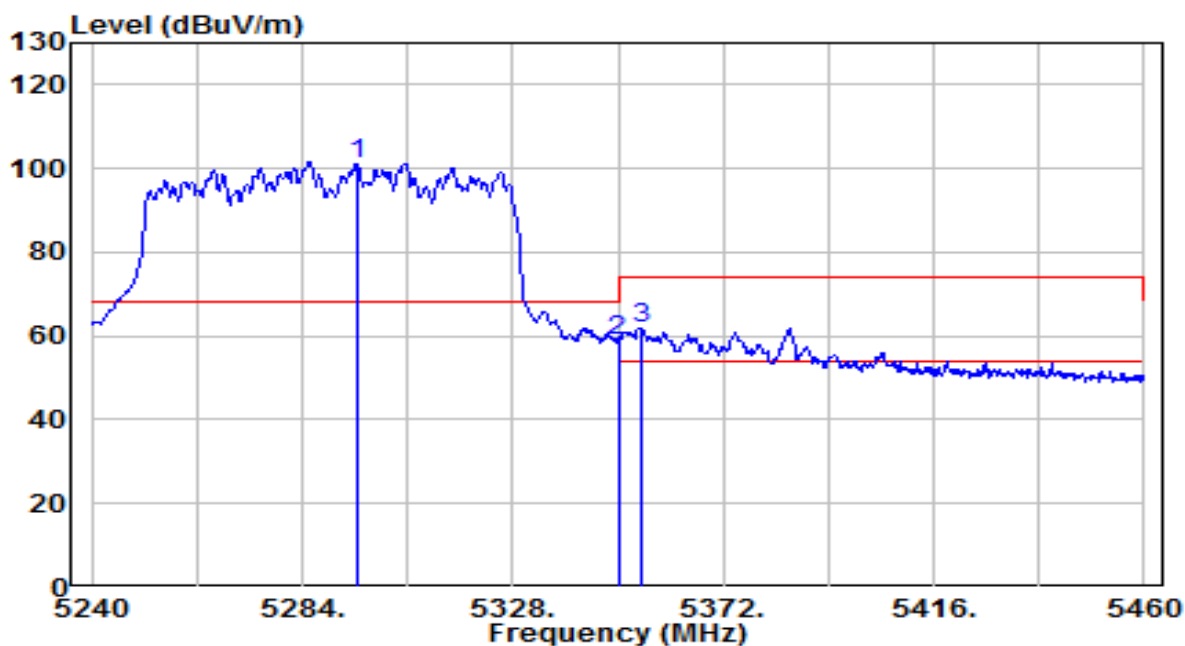


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.440	97.30	4.00	101.30	N/A	N/A	135	340	Peak
2	* 5350.000	55.00	4.03	59.04	-9.16	68.20	135	340	Peak
3	5354.840	57.98	4.04	62.02	-11.98	74.00	135	340	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

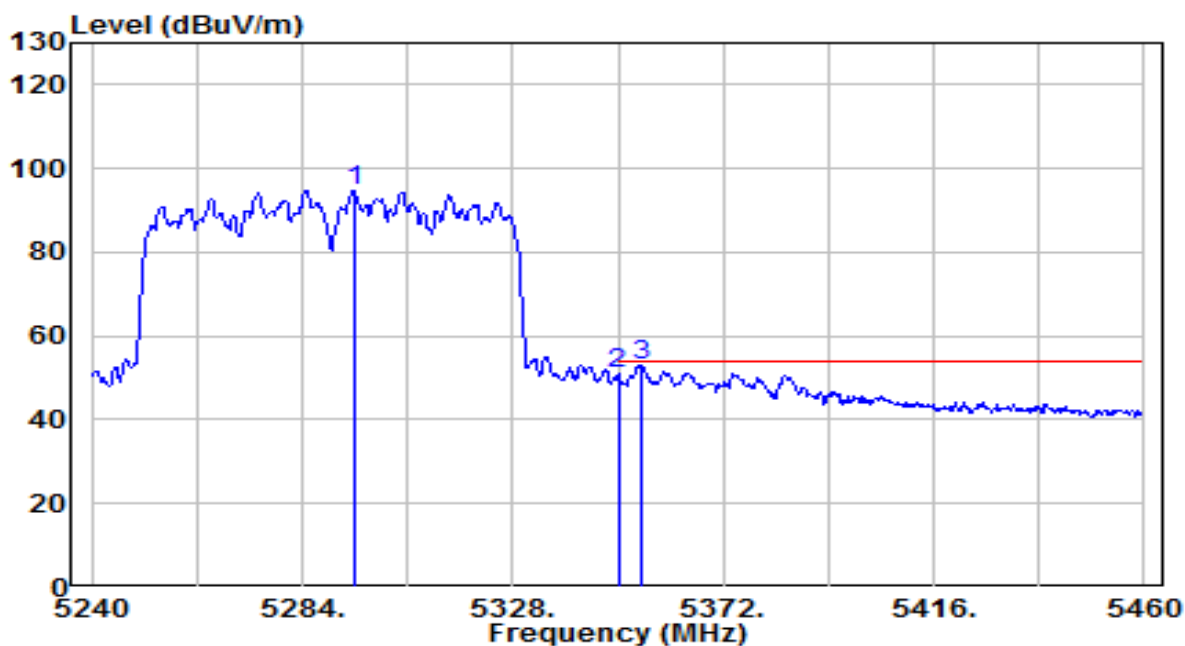


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.780	90.92	4.00	94.91	N/A	N/A	135	340	Average
2	5350.000	47.04	4.03	51.08	-2.92	54.00	135	340	Average
3	* 5354.840	49.09	4.04	53.13	-0.87	54.00	135	340	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

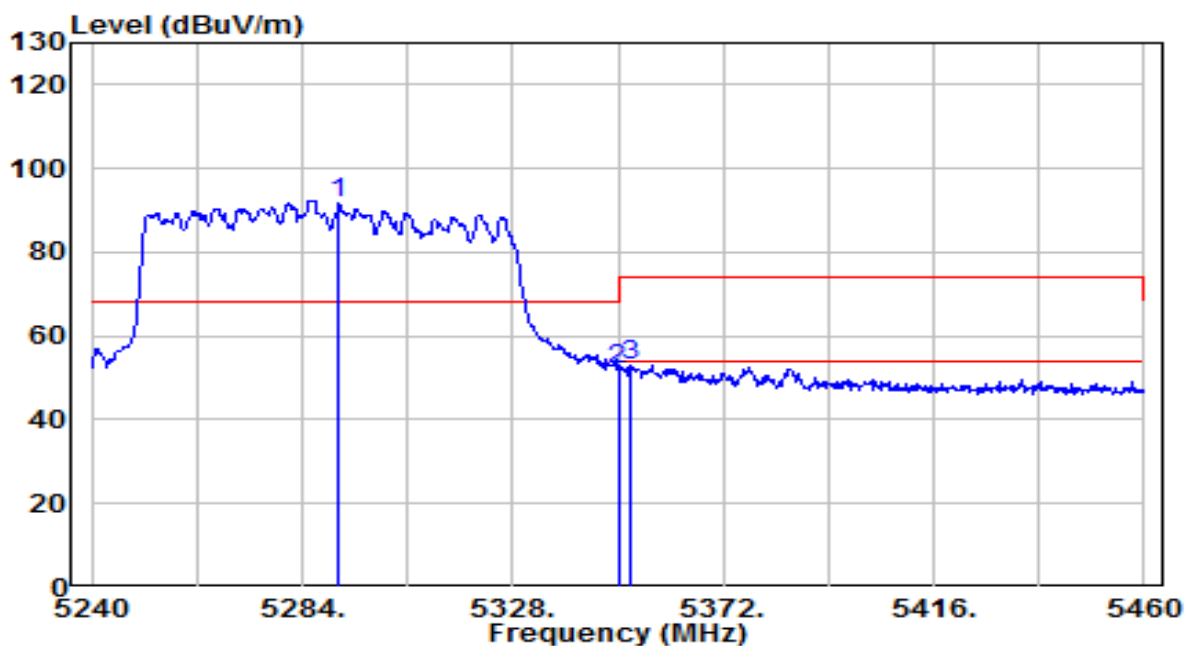


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.700	87.58	3.99	91.57	N/A	N/A	215	315	Peak
2	* 5350.000	47.92	4.03	51.95	-16.25	68.20	215	315	Peak
3	5352.420	48.77	4.04	52.81	-21.19	74.00	215	315	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

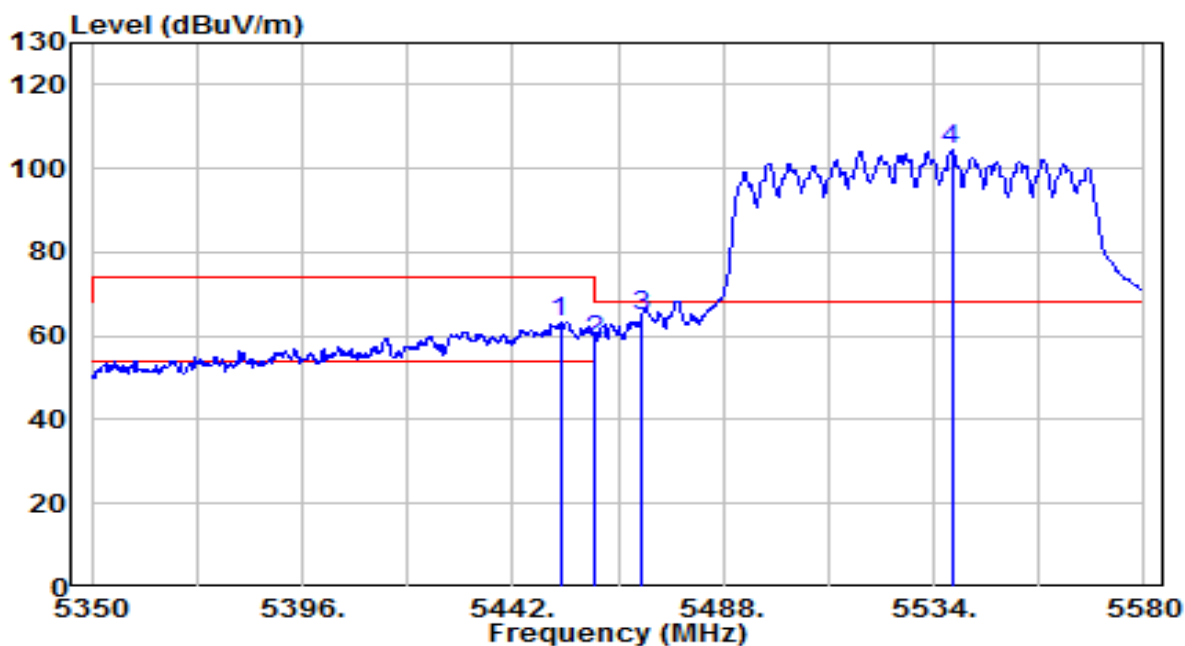


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.350	59.30	4.11	63.41	-10.59	74.00	160	340	Peak
2	5460.000	54.97	4.11	59.08	-9.12	68.20	160	340	Peak
3	* 5470.000	60.60	4.12	64.72	-3.48	68.20	160	340	Peak
4	5537.910	100.03	4.27	104.30	N/A	N/A	160	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

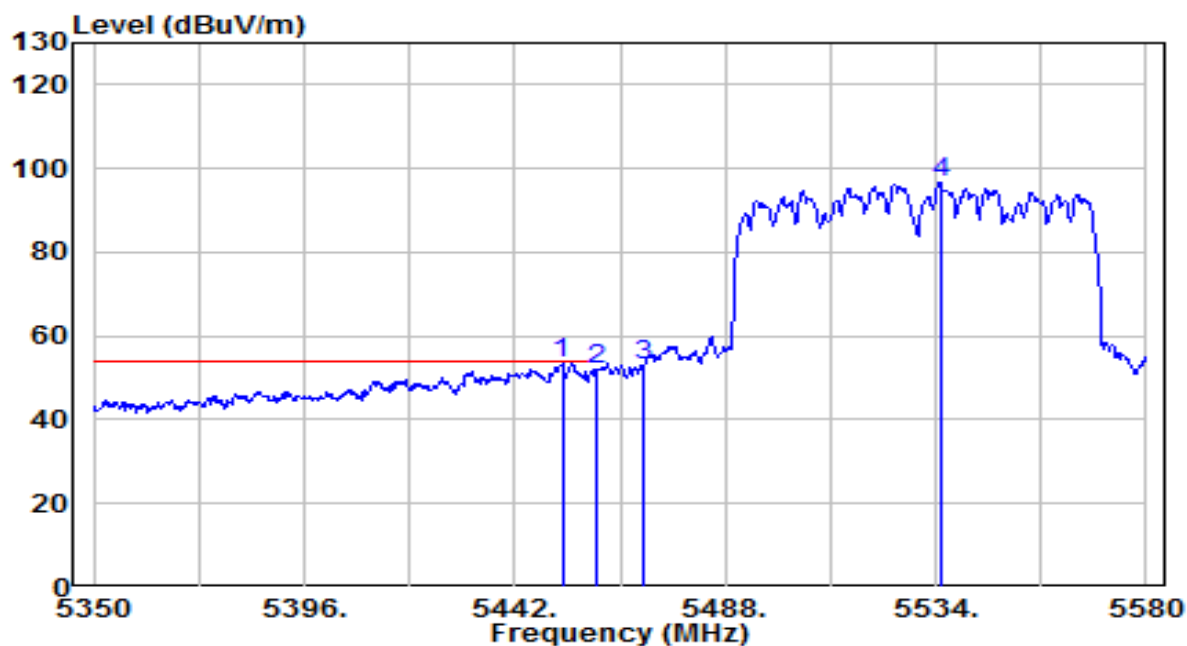


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.350	49.31	4.11	53.42	-0.58	54.00	160	340	Average
2		5460.000	47.75	4.11	51.86	-2.14	54.00	160	340	Average
3		5470.000	49.01	4.12	53.13	N/A	N/A	160	340	Average
4		5534.920	92.45	4.26	96.70	N/A	N/A	160	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

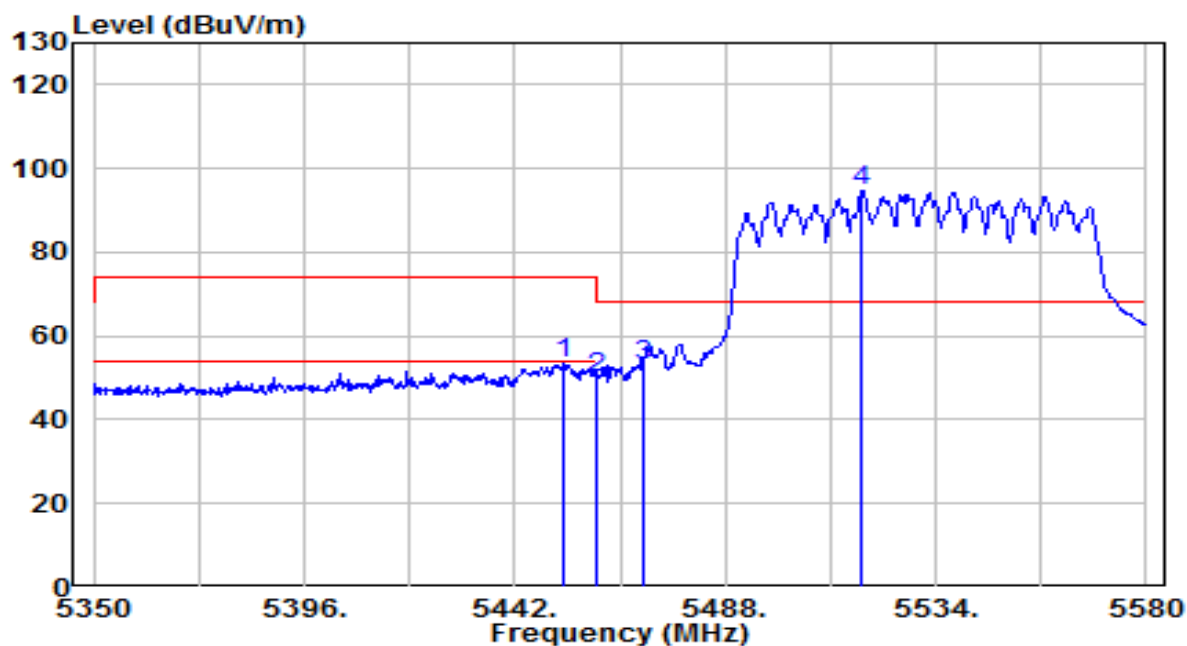


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.810	49.29	4.11	53.40	-20.60	74.00	250	305	Peak
2	5460.000	45.70	4.11	49.81	-18.39	68.20	250	305	Peak
3	* 5470.000	48.95	4.12	53.07	-15.13	68.20	250	305	Peak
4	5517.900	90.34	4.20	94.54	N/A	N/A	250	305	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

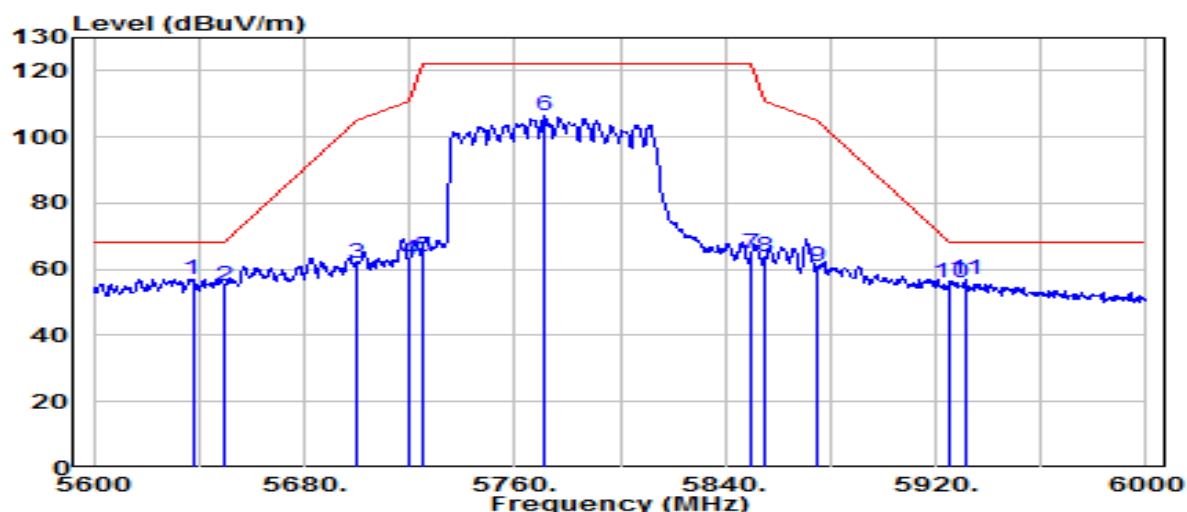


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5637.600	52.39	4.60	56.99	-11.21	68.20	200	10	Peak
2	5650.000	50.50	4.64	55.15	-13.05	68.20	200	10	Peak
3	5700.000	56.96	4.81	61.77	-43.43	105.20	200	10	Peak
4	5720.000	58.04	4.88	62.92	-47.88	110.80	200	10	Peak
5	5725.000	58.74	4.90	63.64	-58.56	122.20	200	10	Peak
6	5771.600	101.47	5.05	106.53	N/A	N/A	200	10	Peak
7	5850.000	59.41	5.32	64.73	-57.47	122.20	200	10	Peak
8	5855.000	58.53	5.33	63.86	-46.94	110.80	200	10	Peak
9	5875.000	55.64	5.40	61.04	-44.16	105.20	200	10	Peak
10	5925.000	50.18	5.57	55.75	-12.45	68.20	200	10	Peak
11	5931.600	51.13	5.59	56.72	-11.48	68.20	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Smart touch panel tablet	Date of Test	2025-04-09
Factor	BBHA 9120D	Temp. / Humidity	22°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

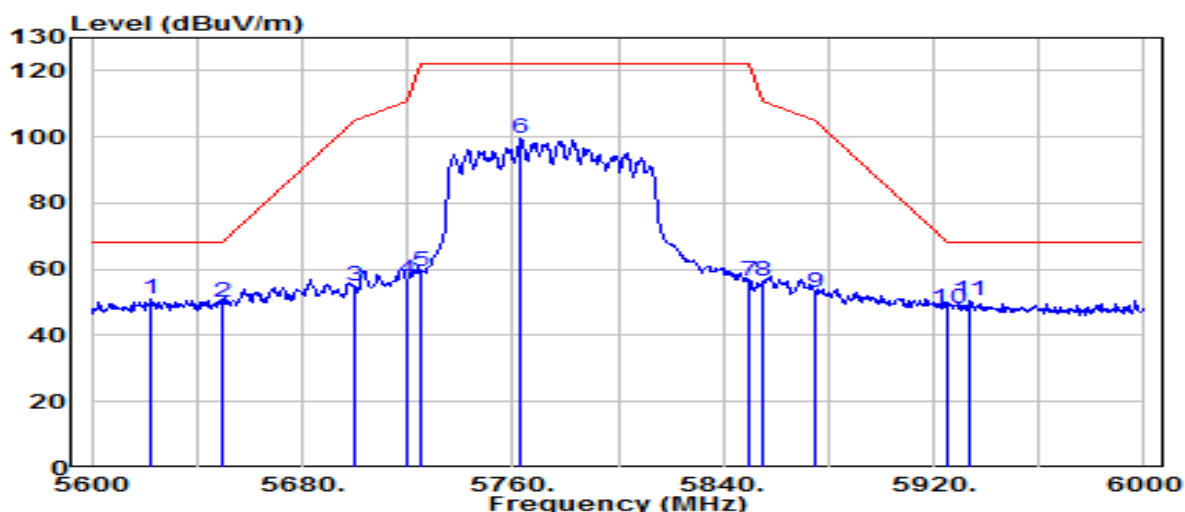

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5622.800	46.41	4.55	50.96	-17.24	68.20	255	305	Peak
2		5650.000	45.50	4.64	50.15	-18.05	68.20	255	305	Peak
3		5700.000	50.25	4.81	55.07	-50.13	105.20	255	305	Peak
4		5720.000	52.12	4.88	56.99	-53.81	110.80	255	305	Peak
5		5725.000	54.54	4.90	59.44	-62.76	122.20	255	305	Peak
6		5763.200	94.56	5.02	99.58	N/A	N/A	255	305	Peak
7		5850.000	51.22	5.32	56.53	-65.67	122.20	255	305	Peak
8		5855.000	51.21	5.33	56.54	-54.26	110.80	255	305	Peak
9		5875.000	47.66	5.40	53.06	-52.14	105.20	255	305	Peak
10		5925.000	42.58	5.57	48.15	-20.05	68.20	255	305	Peak
11		5933.200	44.76	5.60	50.35	-17.85	68.20	255	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.9.3. Test Setup

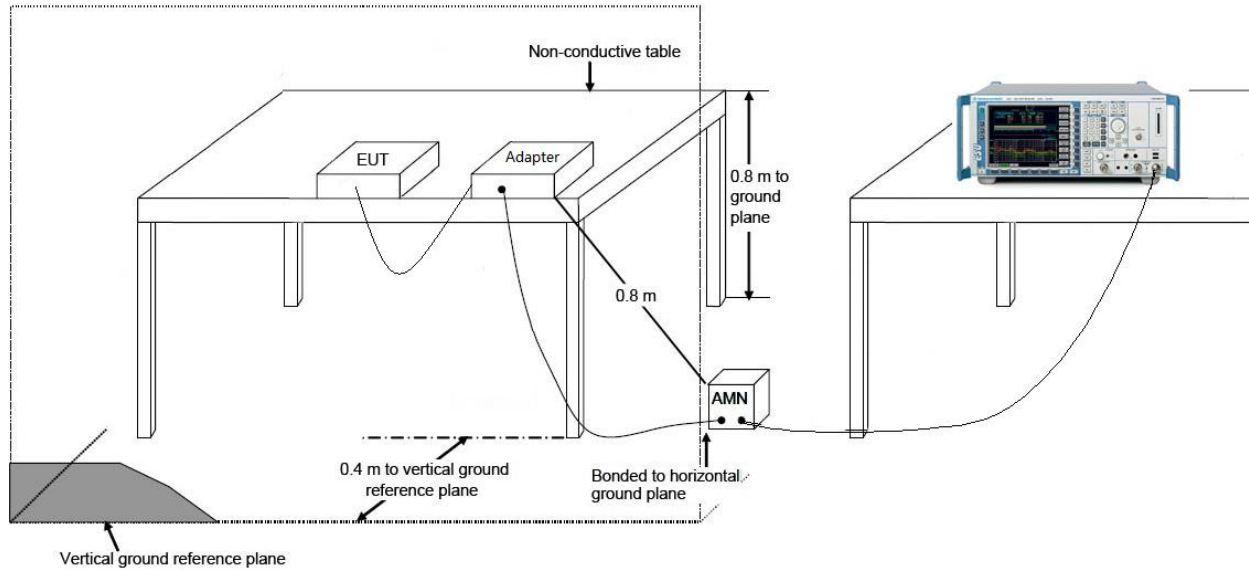

7.9.4. Test Result

EUT	Smart touch panel table	Date of Test	2025-02-25
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.0°C /58%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

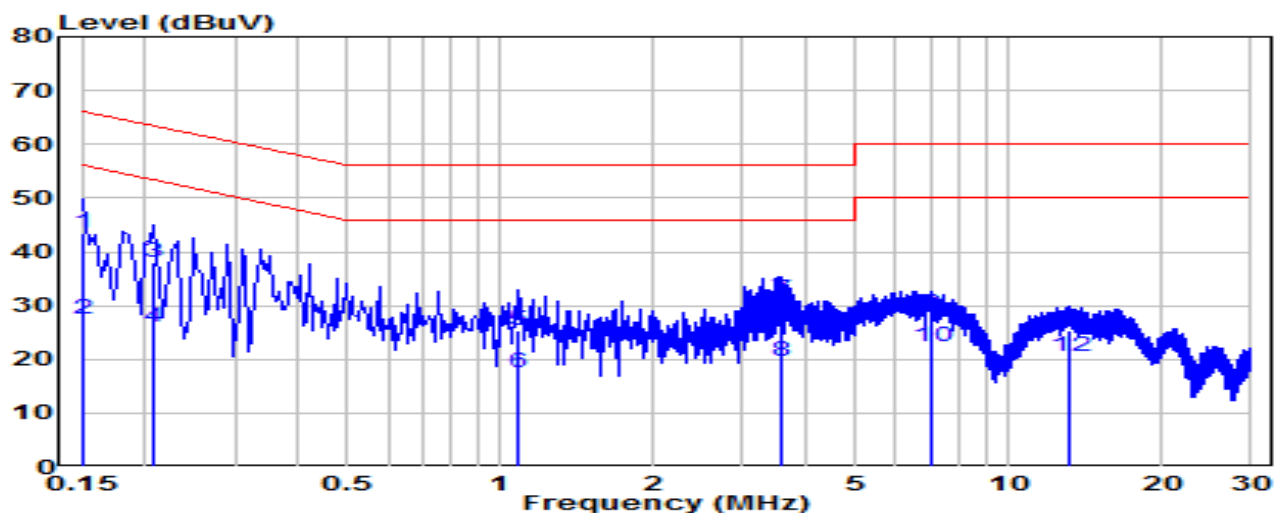


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.150	33.91	9.63	43.54	-22.46	66.00	QP
2	*	0.150	17.80	9.63	27.43	-28.57	56.00	Average
3		0.208	28.55	9.63	38.18	-25.09	63.27	QP
4		0.208	16.36	9.63	25.99	-27.27	53.27	Average
5		1.081	15.72	9.68	25.41	-30.59	56.00	QP
6		1.081	7.70	9.68	17.38	-28.62	46.00	Average
7		3.574	21.30	9.72	31.03	-24.97	56.00	QP
8		3.574	9.98	9.72	19.70	-26.30	46.00	Average
9		7.030	18.49	9.80	28.28	-31.72	60.00	QP
10		7.030	12.50	9.80	22.30	-27.70	50.00	Average
11		13.154	15.42	9.89	25.31	-34.69	60.00	QP
12		13.154	10.77	9.89	20.66	-29.34	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Smart touch panel table	Date of Test	2025-02-25
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.0°C /58%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

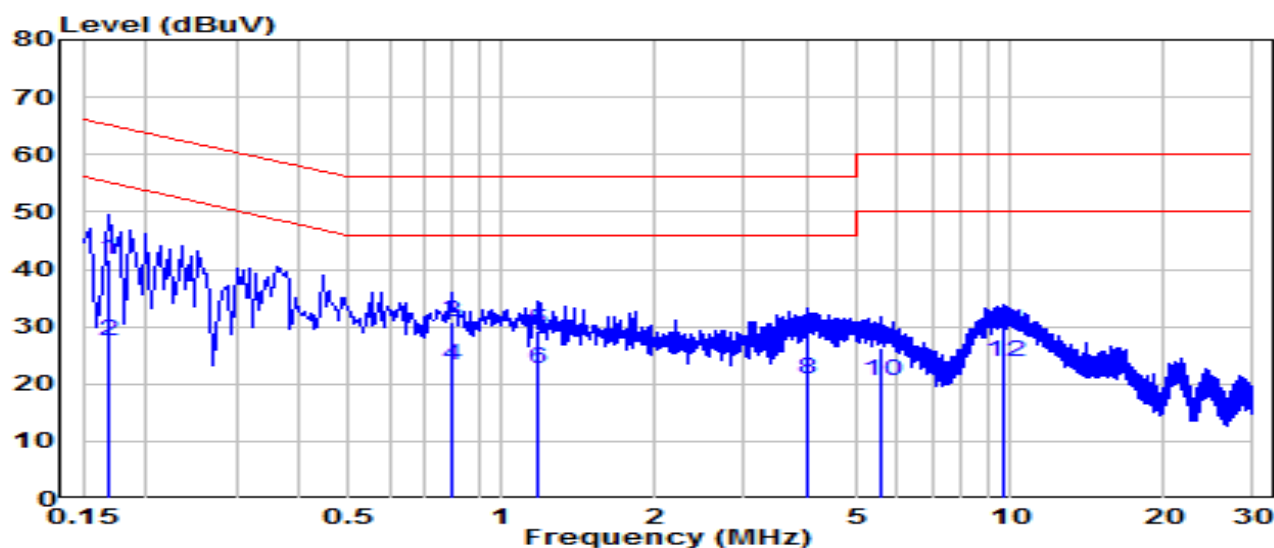

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.168	31.91	9.63	41.54	-23.52	65.06	QP
2		0.168	17.92	9.63	27.55	-27.51	55.06	Average
3	*	0.798	21.19	9.67	30.86	-25.14	56.00	QP
4	*	0.798	13.51	9.67	23.18	-22.82	46.00	Average
5		1.180	19.55	9.69	29.24	-26.76	56.00	QP
6		1.180	12.99	9.69	22.68	-23.32	46.00	Average
7		3.966	18.44	9.74	28.18	-27.82	56.00	QP
8		3.966	11.04	9.74	20.78	-25.22	46.00	Average
9		5.567	16.56	9.77	26.33	-33.67	60.00	QP
10		5.567	10.64	9.77	20.41	-29.59	50.00	Average
11		9.721	19.34	9.88	29.23	-30.77	60.00	QP
12		9.721	13.92	9.88	23.80	-26.20	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Smart touch panel tablet**, is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Photograph

Refer to “2502TWN801-UT” file.

Appendix B : External Photograph

Refer to “2502TWN801-UE” file.

Appendix C : Internal Photograph

Refer to “2502TWN801-UI” file.

_____ The End _____