

FCC TEST REPORT FCC ID: 2AF85-BS-201

Product	:	Bluetooth speaker
Model Name	:	BS-201, BS-200
Brand	:	N/A
Report No.	:	PTCDQ09171210501E-FC02
		Prepared for
	MA	AGIT TECHNOLOGY LIMITED
Room B420B, Ming	you center,	No.168 of Baoyuan Road, Bao'an district, Shenzhen, China
		Prepared by
	Dongguan	Precise Testing & Certification Corp., Ltd.
Building D, Baoding		Park, Guangming Road 2, Guangming Community, Dongcheng rict, Dongguan, Guangdong, China



1 TEST RESULT CERTIFICATION

Applicant's name : MAGIT TECHNOLOGY LIMITED

Address : Room B420B, Mingyou center, No.168 of Baoyuan Road, Bao'an

district, Shenzhen, China

Manufacture's name : MAGIT TECHNOLOGY LIMITED

Address : Room B420B, Mingyou center, No.168 of Baoyuan Road, Bao'an

district, Shenzhen, China

Product name : Bluetooth speaker

Model name : BS-201, BS-200

Standards : FCC CFR47 Part 15 Section 15.247: 2017

Test procedure : ANSI C63.10:2013

Test Date : December 15, 2017 to December 28, 2017

Date of Issue : December 28, 2017

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Leo Yang / Engineer

Technical Manager:

Chris Du / Manager



Contents

			Page
1	TEST RESULT CER	TIFICATION	2
2	TEST SUMMARY		5
	2.1	TEST SITE	6
3	GENERAL INFORM	ATION	7
	3.1	GENERAL DESCRIPTION OF E.U.T	7
	3.2	CHANNEL LIST	8
4	EQUIPMENT DURIN	G TEST	9
	4.1	EQUIPMENTS LIST	9
	4.2	Measurement Uncertainty	11
	4.3	DESCRIPTION OF SUPPORT UNITS	12
5	CONDUCTED EMISS	SION	13
	5.1	E.U.T. OPERATION	13
	5.2	EUT SETUP	13
	5.3	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
	5.4	MEASUREMENT PROCEDURE	14
	5.5	CONDUCTED EMISSION LIMIT	14
	5.6	MEASUREMENT DESCRIPTION	14
	5.7	CONDUCTED EMISSION TEST RESULT	14
6	RADIATED SPURIO	US EMISSIONS	17
	6.1	EUT OPERATION	17
	6.2	TEST SETUP	18
	6.3	SPECTRUM ANALYZER SETUP	19
	6.4	Test Procedure	20
	6.5	SUMMARY OF TEST RESULTS	21
7	CONDUCTED SPUR	IOUS EMISSION & BAND EDGE MEASUREMENT	26
	7.1	Test Procedure	26
	7.2	Test Result	27



8	6DB BANDWIDTH MEA	SUREMENT	30
	8.1	Test Procedure	30
	8.2	TEST RESULT	30
9	MAXIMUM PEAK OUTP	PUT POWER	33
	9.1	Test Procedure	33
	9.2	TEST RESULT	33
10	POWER SPECTRAL DE	ENSITY	36
	10.1	Test Procedure	36
	10.2	TEST RESULT	36
11	ANTENNA APPLICATIO	NC	39
	11.1	ANTENNA REQUIREMENT	39
	11.2	RESULT	39
12	TEST SETUP		40
13	FUT PHOTOS		42



2 **Test Summary**

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS
Remark:		•

N/A: Not Applicable



2.1 Test Site

Dongguan Precise Testing & Certification Corp., Ltd.

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong,

China

FCC Registration Number: 790290 A2LA Certificate No.: 4408.01 IC Registration Number: 12191A-1

Test Lab: Shenzhen BCTC Technology Co., Ltd.

Address: No. 101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registered No.: 187086

Test items: Radiated Spurious Emission(18GHz to 25GHz)



3 General Information

3.1 General Description of E.U.T.

	1	
Product Name	:	Bluetooth speaker
Model Name		BS-201, BS-200
Operating frequency		2402-2080MHz
Number of Channels		40
Type of Modulation		GFSK
Antenna installation		PCB Print Antenna
Antenna Gain	:	0 dBi
Power supply		DC 3.7V, 4000mAh Battery
Hardware Version	:	V1.1
Software Version	:	V4.2



3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

Note:

1. Test of channel was included the lowest 2402MHz, middle 2440MHz and highest frequency 2480MHz in highest data rate and to perform the test, then record on this report.

4 Equipment During Test

4.1 Equipments List

RF Conducted Test

IXI Conducted rest				
Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	MY56070279	Apr 7,18
MIMO4TX-1	/	MIMO4TX	TW5451101	Apr 7,18
MXG Vector Signal Generator	Agilent	N5182A	MY50143410	Apr 7,18
MXG Analog Signal Generator	KEYSIGHT	N5181B	MY53050432	Apr 7,18

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions(Test Frequency from 30MHz-18GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Sep. 03, 2018
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	Aug 31, 2018
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	Sep. 03, 2018
Spectrum Analyzer	Agilent	E4407B	MY45109572	Oct. 13, 2018
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	Aug. 31, 2018
LOW NOISE AMPLIFIER	ZHINAN	ZN3380C	15002	Sep 03, 2018



Radiated Emission (Test Frequency from 18GHz-25GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
Spectrum Analyzer	Agilent	E4407B	MY45109572	2018.08.25
Test Receiver	R&S	ESPI	101396	2018.08.27
Horn Antenna	SCHWARZBECK	9120D	9120D-1275	2018.08.27
Horn Ant	SCHWARZBECK	BBHA 9170	9170-181	2018.08.27
LOW NOISE AMPLIFIER	SCHWARZBECK	BBV9718	9718-270	2018.08.27
LOW NOISE AMPLIFIER	SCHWARZBECK	BBV9743	9743-119	2018.08.27

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Sep. 03, 2018
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	Sep. 03, 2018
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	Sep. 03, 2018



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark: The coverage Factor (k=2), and measurement L	Incertainty for a level of Confidence of 95%



4.3 Description of Support Units

Equipment	Model No.	Series
		No.
Adapter	Model: PS65B150Y3000S	N/A
	Input: AC100-240V, 50/60Hz, 1.5A	
	Output: DC 5V, 3000mA	

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207

Test Method: ; ANSI C63.10: 2013

Test Result: : PASS

Frequency Range: : 150kHz to 30MHz

Class/Severity: : Class B

5.1 E.U.T. Operation

Operating Environment:


Temperature: : 25.5 °C

Humidity: : 51 % RH


Atmospheric Pressure: : 101.2kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

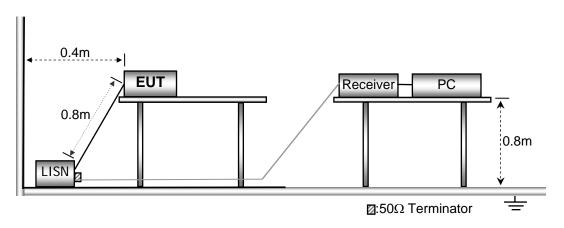

5.3 Test SET-UP (Block Diagram of Configuration)



5.4 Measurement Procedure

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result


Pass.

Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:




Line-AC 120V/60Hz

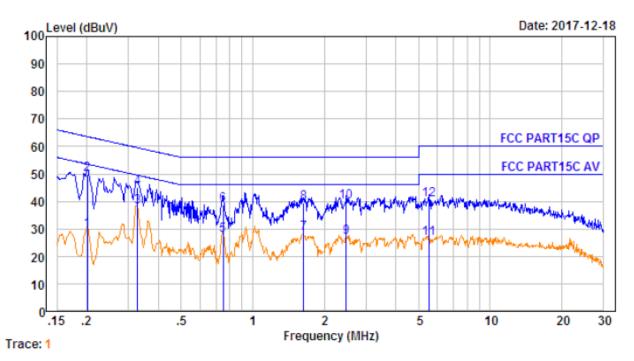

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBu√	O∨er Limit dB	Remark
1.	0.202	0.28	9.59	19.83	29.70	53.54	-23.84	Average
2.	0.202	0.28	9.59	39.83	49.70	63.54	-13.84	QP
3.	0.327	0.38	9.69	27.86	37.93	49.53	-11.60	Average
4.	0.327	0.38	9.69	34.86	44.93	59.53	-14.60	QP
5.	0.751	0.44	9.80	17.60	27.84	46.00	-18.16	Average
6.	0.751	0.44	9.80	28.60	38.84	56.00	-17.16	QP
7.	1.636	0.47	9.84	18.04	28.35	46.00	-17.65	Average
8.	1.636	0.47	9.84	29.04	39.35	56.00	-16.65	QP
9.	2.474	0.47	9.86	16.57	26.90	46.00	-19.10	Average
10.	2.474	0.47	9.86	29.57	39.90	56.00	-16.10	QP
11.	5.505	0.52	9.93	16.14	26.59	50.00	-23.41	Average
12.	5.505	0.52	9.93	30.14	40.59	60.00	-19.41	QP



Neutral-AC 120V/60Hz

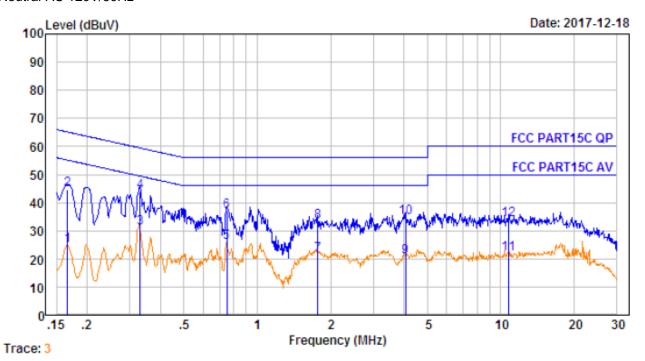

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBu∨	Over Limit dB	Remark
1.	0.166	0.23	9.56	14.85	24.64	55.16	-30.52	Average
2.	0.166	0.23	9.56	34.85	44.64	65.16	-20.52	QP
3.	0.330	0.38	9.72	20.73	30.83	49.44	-18.61	Average
4.	0.330	0.38	9.72	33.73	43.83	59.44	-15.61	QP _
5.	0.751	0.44	9.83	15.48	25.75	46.00	-20.25	Average
6.	0.751	0.44	9.83	26.48	36.75	56.00	-19.25	QP -
7.	1.772	0.47	9.87	10.99	21.33	46.00	-24.67	Average
8.	1.772	0.47	9.87	22.99	33.33	56.00	-22.67	QP
9.	4.070	0.47	9.94	10.10	20.51	46.00	-25.49	Average
10.	4.070	0.47	9.94	24.10	34.51	56.00	-21.49	QP -
11.	10.733	0.56	10.01	11.27	21.84	50.00	-28.16	Average
12.	10.733	0.56	10.01	23.27	33.84	60.00	-26.16	QP -



6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: : ANSI C63.10:2013

Test Result: : PASS
Measurement Distance: : 3m

Limit: : See the follow table

	Field Stren	ıgth	Field Strength Limit at 3m Measurement Dist			
Frequency (MHz)	uV/m Distance (m)		uV/m	dBuV/m		
0.009 ~ 0.490	2400/F(kHz)	300 10000 * 2400/F(kHz)		20log ^{(2400/F(kHz))} + 80		
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40		
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40		
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾		
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾		
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾		
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾		

6.1 EUT Operation

Operating Environment:

Temperature: : $23.5 \, ^{\circ}\text{C}$ Humidity: : $51.1 \, ^{\circ}\text{RH}$


Atmospheric Pressure: 101.2kPa




6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site

The test setup for emission measurement below 30MHz

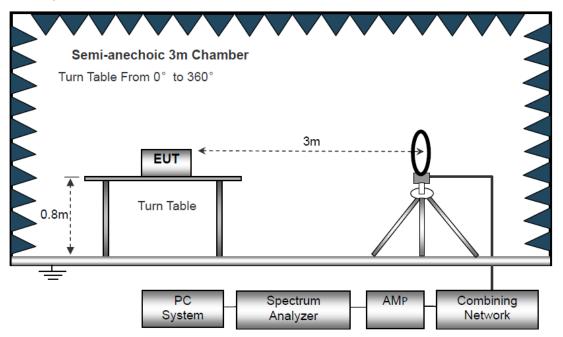


The test setup for emission measurement from 30 MHz to 1 GHz.

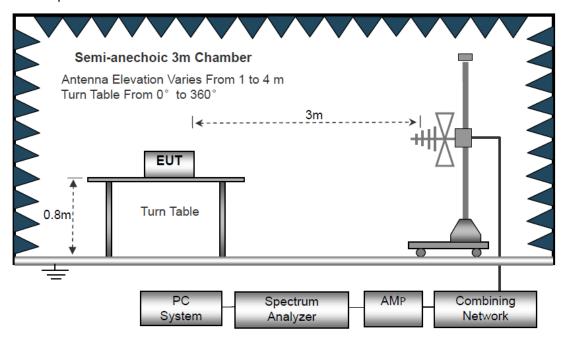



The test setup for emission measurement above 1 GHz

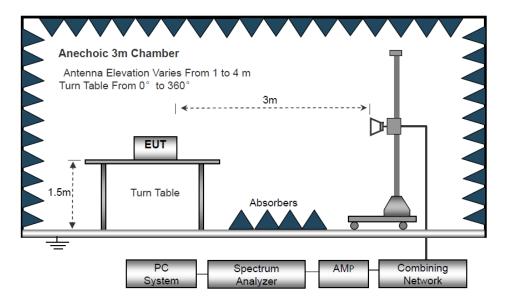

6.3 Spectrum Analyzer Setup

Below 30MHz								
IF Bandwidth	:	10kHz						
Resolution Bandwidth	:	10kHz	10kHz					
Video Bandwidth	:	10kHz						
30MHz ~ 1GHz								
Detector	:	PK	QP					
Resolution Bandwidth	:	100kHz	120kHz					
Video Bandwidth		300kHz	300kHz					
Above 1GHz								
Detector	:	PK	AV					
Resolution Bandwidth	:	1MHz	1MHz					
Video Bandwidth	:	3MHz	10Hz					



6.4 Test Procedure

- 1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
- 2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
- 3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- 5. Set to the maximum power setting and enable the EUT transmit continuously.
- 6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
- 7. Test Procedure of measurement (For Above 1GHz):
- 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarization and repeat 1) with vertical polarization.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear/Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
- 7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq.	Ant.Pol.	Emission Level	Limit 3m	Over
(MHz)	H/V	(dBuV/m)	(dBuV/m)	(dB)
				>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz


Pass.

Radiated emission at both 120V & 240V is assessed, and emission at 120V represents the worst case.

Please refer to the following test plots:



Antenna Polarization: Horizontal

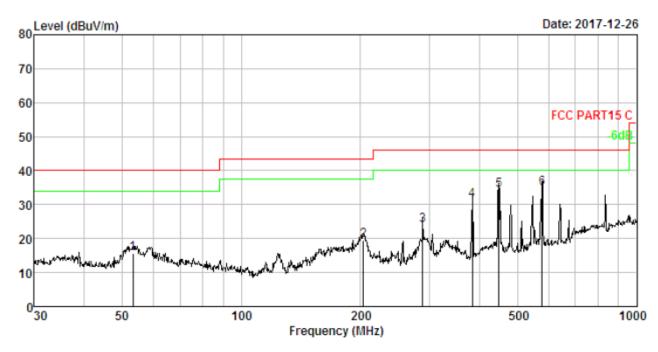


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emissior Level dBuV/m	n Limit dBuV/m	Over Limit dB	Remark
1.	53.318	1.58	12.02	32.35	30.17	15.78	40.00	-24.22	QP
2.	203.523	2.79	10.45	36.89	30.64	19.49	43.50	-24.01	QP
3.	287.990	3.10	12.96	38.70	30.76	24.00	46.00	-22.00	QP
4.	383.932	3.36	14.97	43.70	30.86	31.17	46.00	-14.83	QP
5.	447.982	3.50	16.33	45.45	30.91	34.37	46.00	-11.63	QP
6.	576.644	3.73	18.55	43.62	31.00	34.90	46.00	-11.10	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Antenna Polarization: Vertical

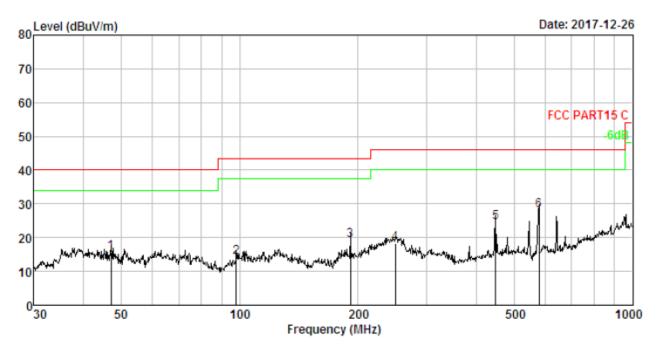

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emissior Level dBuV/m	n Limit dBuV/m	O∨er Limit dB	Remark
1.	47.160	1.46	12.81	31.43	30.13	15.57	40.00	-24.43	QP
2.	98.142	2.13	10.06	32.33	30.38	14.14	43.50	-29.36	QP
3.	191.745	2.73	10.97	36.04	30.62	19.12	43.50	-24.38	QP
4.	249.425	2.97	11.91	34.17	30.71	18.34	46.00	-27.66	QP
5.	447.982	3.50	16.33	35.56	30.91	24.48	46.00	-21.52	QP
6.	578.670	3.73	18.59	36.63	31.00	27.95	46.00	-18.05	QP

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Test Frequency 1GHz-18GHz:

Low Channel (2402MHz)

		_			· · · ·				
Frequency	S.A	Detector	Polarity	Ant.	Cable	Pre-	Emission	Limit	Margin
(MHz)	Reading	(PK/AV)	(H/V)	Factor	Loss	Amp.	Level	(dBuV/m)	(dB)
` '	(dBuV)	, ,	, ,	(dB/m)	(dB)	Gain	(dBuV/m)	,	, ,
	()			(/	(-)	(dB)	(, , , ,		
4804	30.14	AV	V	28.04	8.04	24.13	42.09	54	-11.91
4804	28.05	AV	Н	28.04	8.04	24.13	40	54	-14
4804	31.18	PK	V	28.04	8.04	24.13	43.13	74	-30.87
4804	32.06	PK	Н	28.04	8.04	24.13	44.01	74	-29.99
16574	29.48	AV	V	26.38	10.15	27.09	38.92	54	-15.08
16574	32.06	AV	Н	26.38	10.15	27.09	41.5	54	-12.5
16574	27.46	PK	V	26.38	10.15	27.09	36.9	74	-37.1
16574	29.08	PK	Н	26.38	10.15	27.09	38.52	74	-35.48

Middle Channel (2440MHz)

Frequency	S.A	Detector	Polarity	Ant.	Cable	Pre-	Emission	Limit	Margin
(MHz)	Reading	(PK/AV)	(H/V)	Factor	Loss	Amp.	Level	(dBuV/m)	(dB)
, ,	(dBuV)	,	, ,	(dB/m)	(dB)	Gain	(dBuV/m)	,	, ,
					, ,	(dB)			
4880	30.22	AV	V	27.55	9.14	20.3	46.61	54	-7.39
4880	29.18	AV	Н	27.55	9.14	20.3	45.57	54	-8.43
4880	28.74	PK	V	27.55	9.14	20.3	45.13	74	-28.87
4880	31.09	PK	Η	27.55	9.14	20.3	47.48	74	-26.52
16428	28.42	AV	V	20.13	12.12	26.07	34.6	54	-19.4
16428	32.95	AV	Н	20.13	12.12	26.07	39.13	54	-14.87
16428	31.42	PK	V	20.13	12.12	26.07	37.6	74	-36.4
16428	32.25	PK	Н	20.13	12.12	26.07	38.43	74	-35.57

High Channel (2480MHz)

Frequency	S.A	Detector	Polarity	Ant.	Cable	Pre-	Emission	Limit	Margin
(MHz)	Reading	(PK/AV)	(H/V)	Factor	Loss	Amp.	Level	(dBuV/m)	(dB)
, ,	(dBuV)	,	, ,	(dB/m)	(dB)	Gain	(dBuV/m)	, ,	, ,
						(dB)			
4960	30.15	AV	V	19.86	7.69	22.48	35.22	54	-18.78
4960	29.05	AV	Н	19.86	7.69	22.48	34.12	54	-19.88
4960	32.42	PK	V	19.86	7.69	22.48	37.49	74	-36.51
4960	27.45	PK	Н	19.86	7.69	22.48	32.52	74	-41.48
17415	28.13	AV	V	21.43	19.05	24.56	44.05	54	-9.95
17415	31.08	AV	Н	21.43	19.05	24.56	47	54	-7
17415	32.22	PK	V	21.43	19.05	24.56	48.14	74	-25.86
17415	27.46	PK	Н	21.43	19.05	24.56	43.38	74	-30.62

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

- 2. All other emissions more than 30dB below the limit.
- Factor = Antenna Factor + Cable Loss Pre-amplifier.
 Emission Level = Reading + Factor
 Margin=Emission Level-Limit



Test Frequency: From 18GHz to 25GHz

The measurements were more than 20dB below the limit and not reported.



7 Conducted Spurious Emission & Band Edge Measurement

Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the

restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section

15.205(c)).

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the

frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated

measurement, provided the transmitter demonstrates compliance with the

peak conducted power limits. If the transmitter complies with the

conducted power limits based on the use of RMS averaging over a time

interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission

limits specified in §15.209(a) (see §15.205(c)).

Test Mode : Refer to section 3.3

7.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;


2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto Detector function = peak, Trace = max hold




7.2 Test Result

Conducted Spurious Emission:

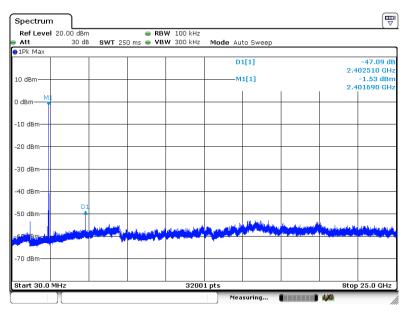

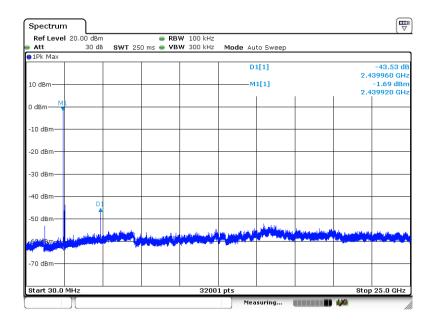





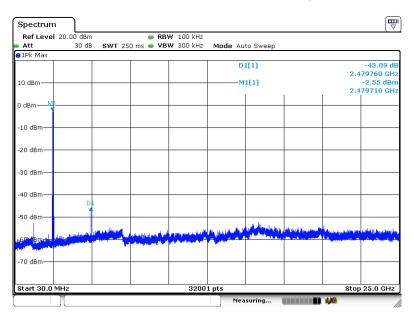



Band Edge:

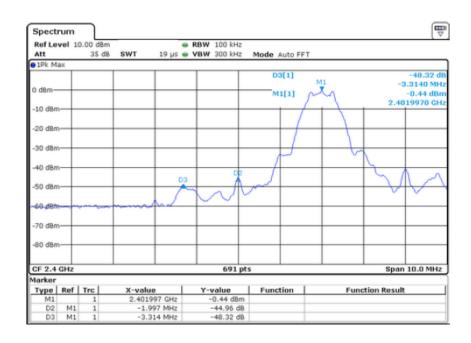

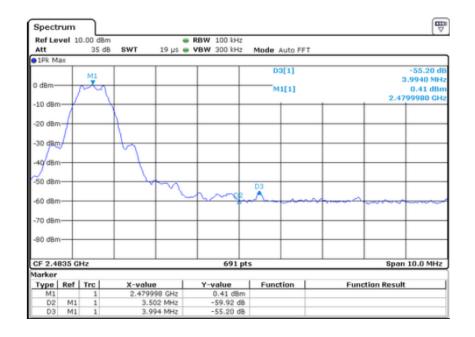



Test Limit

Report No.: PTCDQ09171210501E-FC02

8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Systems using digital modulation techniques may operate in the 902-928

MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB

bandwidth shall be at least 500 kHz.

Test Mode : Refer to section 3.3

8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;


2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

8.2 Test Result


Channel number	Channel frequency (MHz)	Measurement level	Required Limit
	(**** :=)	(KHz)	(KHz)
00	2402	700	>500
19	2440	695	>500
39	2480	689	>500



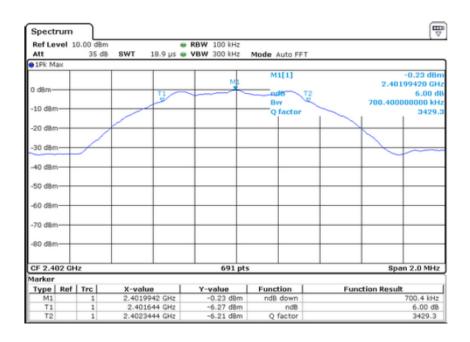

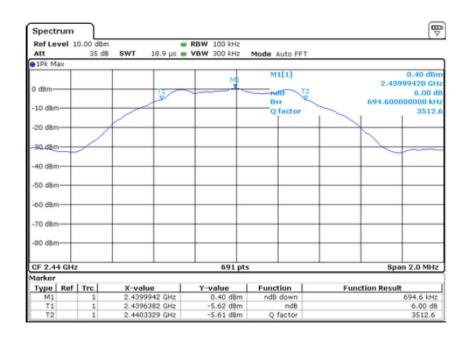



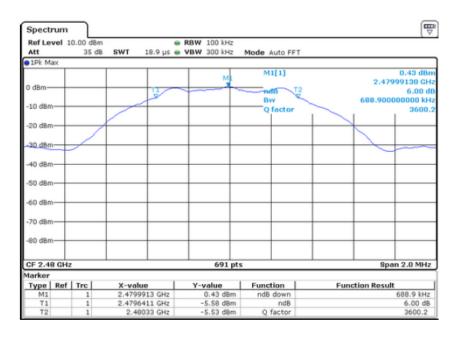



9 Maximum Peak Output Power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-

928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output

power.

Test Mode : Refer to section 3.3


9.1 Test Procedure


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

9.2 Test Result


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(W)	Pass/Fail
0	2402	-0.13	0.971	1W(30dBm)	PASS
19	2440	0.42	1.102	1W(30dBm)	PASS
39	2480	0.49	1.119	1W(30dBm)	PASS



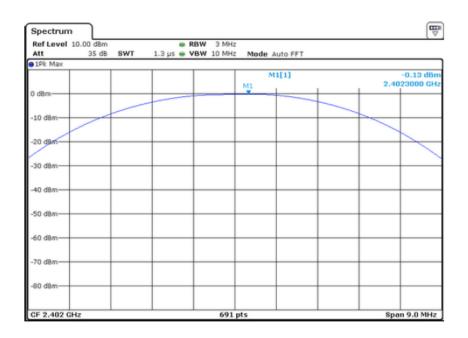

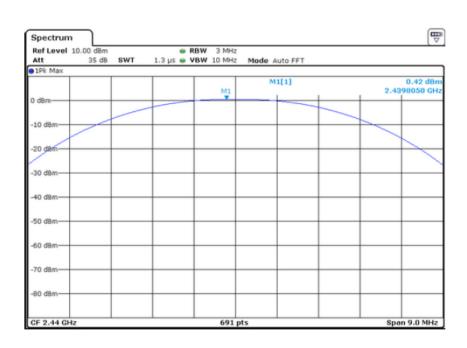



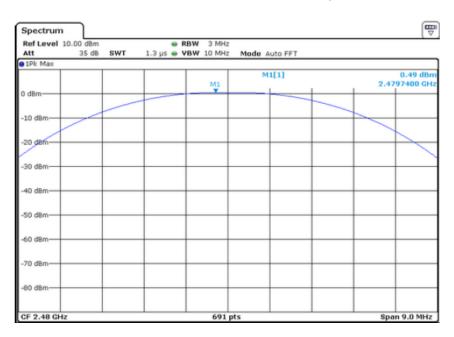



10 Power Spectral density

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247(f) The power spectral density conducted from the

intentional radiator to the antenna due to the digital modulation

operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during

any time interval of continuous transmission.

Test Mode : Refer to section 3.3

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

- 2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


10.2 Test Result


Channel number	Channel frequency (MHz)	Power density (dBm/3kHz)	Required Limit (dBm/3kHz)	Pass/Fail
00	2402	-16.12	8	PASS
19	2440	-15.17	8	PASS
39	2480	-15.14	8	PASS

Note:


1. Measured power density(dBm) has offset with cable loss.



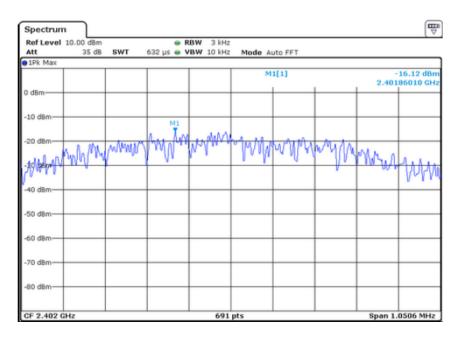

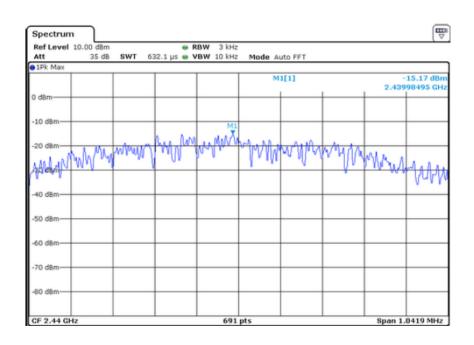



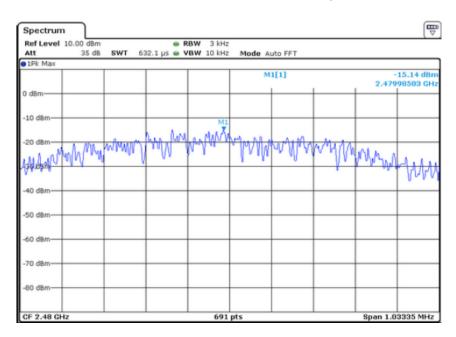



Report No.: PTCDQ09171210501E-FC02

11 Antenna Application

11.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2 Result

The EUT'S antenna, permanent attached antenna, is internal antenna. The antenna's gain is 1.85dBi and meets the requirement.



12 Test Setup







Radiated Spurious Emissions Test Frequency From 30MHz-1000MHz





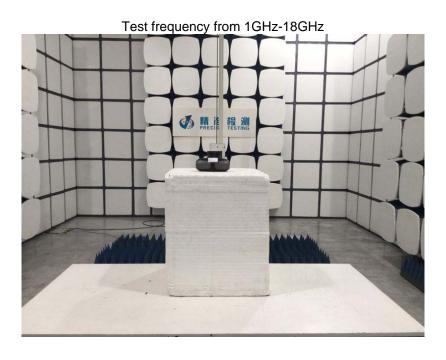

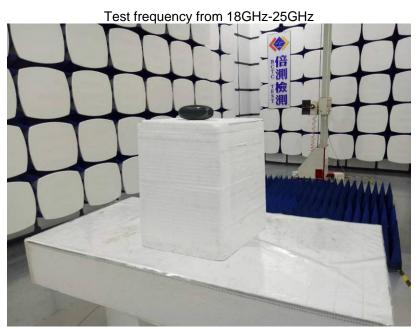


























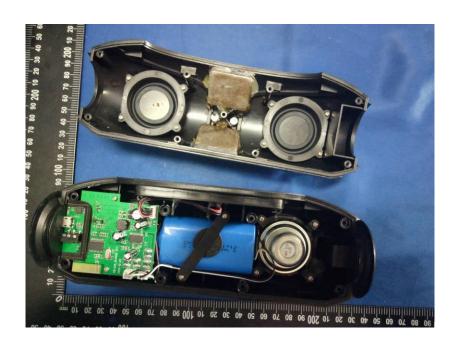



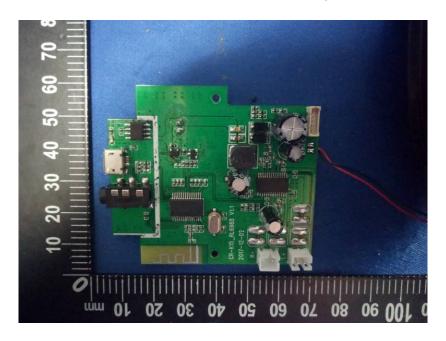

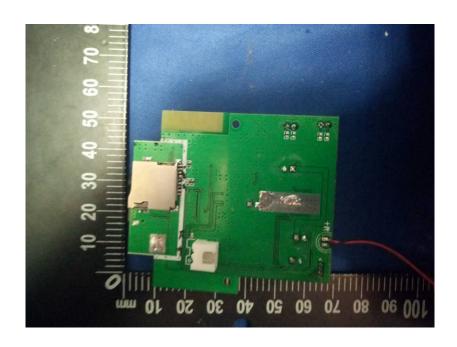










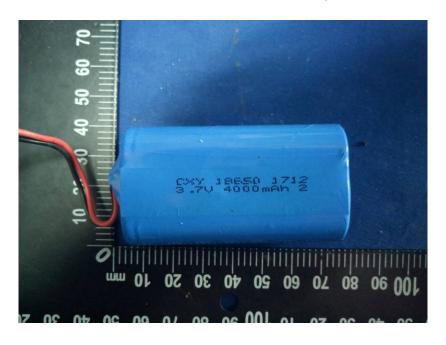



*****THE END REPORT*****