


Antenna Specifications

Main technical specifications

Frequency (MHz)	2400/2450/2500
Impedance (Ω)	50±10
Gain(dBi)	max 0.11
VSWR	<1.0
Admitted power	1mW
Polarization	Linear, Vertical
Radiation	Omni-directional
Connector Type	SMA

Physical properties

Antenna base	PCB
Operating temp	-20℃ ~ +60℃
Storage temp	-20℃ ~ +70℃

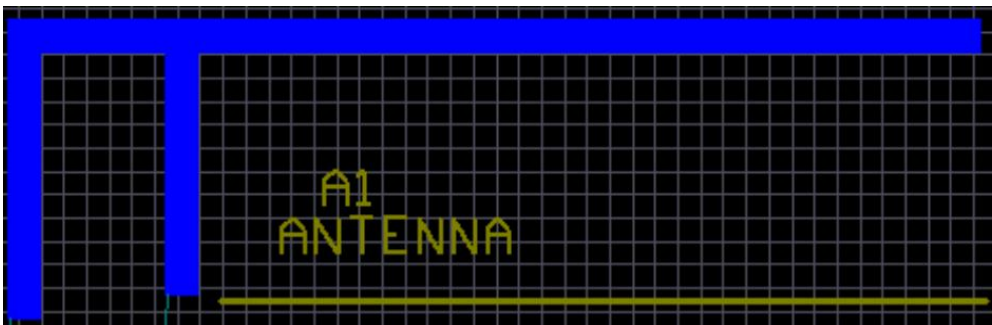



Neutron Engineering Inc.


Test Result (Gain)

Frequency (MHz)	Max Gain (dBi)	
	Vertical	Horizontal
2400	-8.12	0.11
2450	-7.50	-0.49
2500	-6.89	-0.78



Neutron Engineering Inc.

Antenna Pattern-Vertical

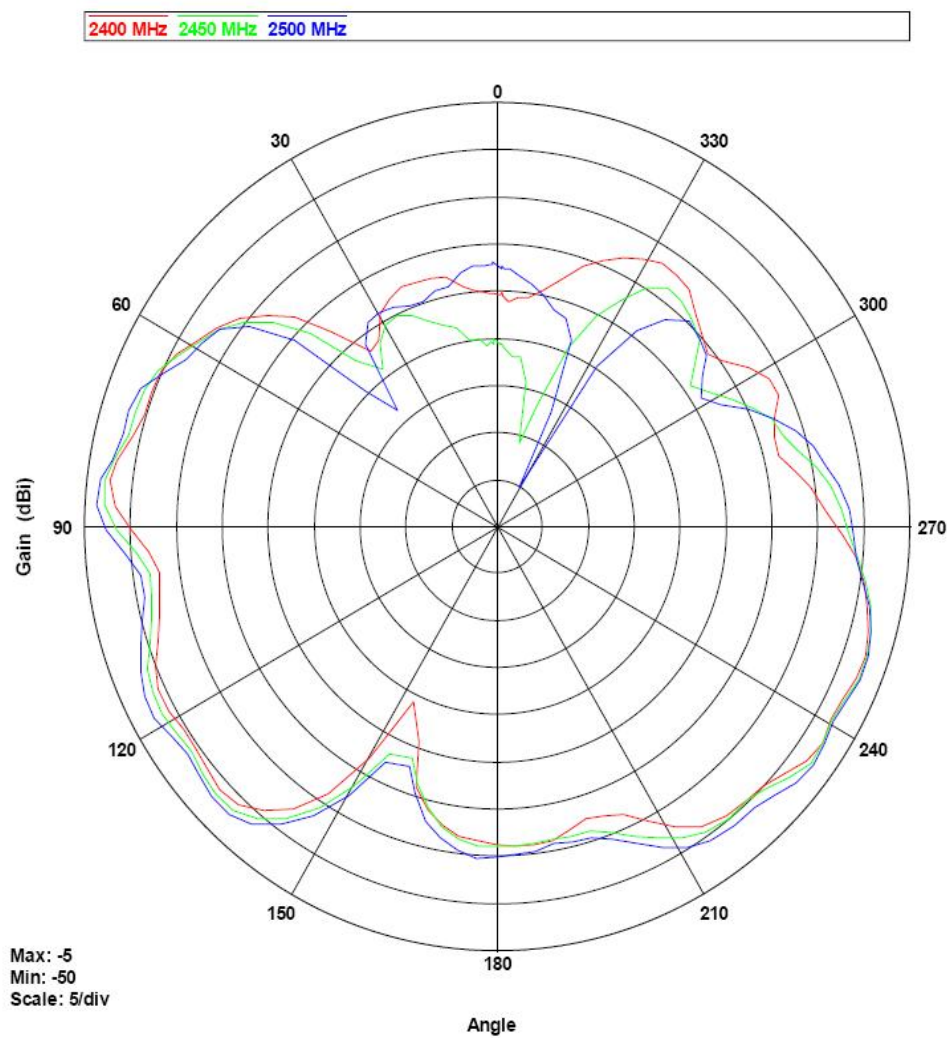

NEUTRON ENGINEERING INC.


No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792





Neutron Engineering Inc.

Antenna Pattern-Horizontal

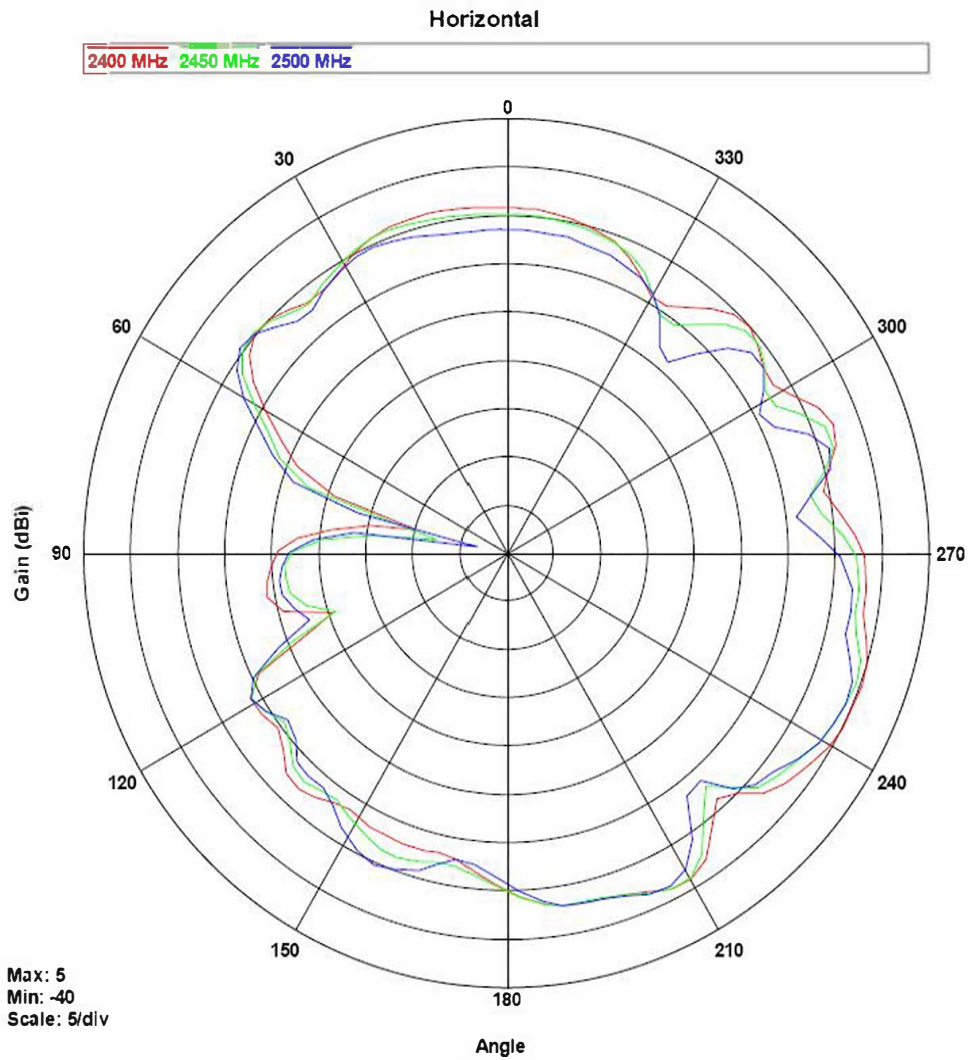

NEUTRON ENGINEERING INC.

No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792