

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640 Fax: +86-755-26648637 Website: www.cga-cert.com

Report Template Revision Date: Mar.1st, 2017

Report Template Version: V03

FCC Test Report

Report No.: CQASZ20180500101E-02

Applicant: 1MORE INC.

Address of Applicant: Tianliao Building F14 East Block (New Materials Industrial Park), Xueyuan Road,

Nanshan District, Shenzhen, China

Manufacturer: 1MORE Shen Zhen Acoustic Technology Co., Ltd.

Address of Tianliao Building 1403-1411, Zone A Tianliao Industrial Park, Taoyuan Street,

Manufacturer: Nanshan District, Shenzhen, P.R. China

Equipment Under Test (EUT):

Product: 1MORE Stylish Dual-dynamic Driver BT In-Ear Headphones

Model No.: E1024BT Brand Name: 1MORE

FCC ID: 2AF8ZE1024BT

 Standards:
 47 CFR Part 15, Subpart C

 Date of Test:
 2018-05-25 to 2018-07-16

Date of Issue: 2018-07-16
Test Result: PASS*

Tested By:

(Aaron Ma)

Reviewed By: Wen Zhou

Owen Zhou)

Approved By:



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

^{*} In the configuration tested, the EUT complied with the standards specified above.





2 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20180500101E-02	Rev.01	Initial report	2018-07-16



3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	N/A
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

N/A: Not Applicable

Note: When the EUT charging, BLE will not work.



4 Contents

			Page
1	C	OVER PAGE	1
2	VI	ERSION	
3		EST SUMMARY	
4	C	ONTENTS	4
5	G	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	STATEMENT OF THE MEASUREMENT UNCERTAINTY	
	5.6	TEST LOCATION	
	5.7	TEST FACILITY	
	5.8	DEVIATION FROM STANDARDS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TE	EST RESULTS AND MEASUREMENT DATA	10
	6.1	Antenna Requirement	10
	6.2	CONDUCTED PEAK OUTPUT POWER	11
	6.3	6DB OCCUPY BANDWIDTH	14
	6.4	POWER SPECTRAL DENSITY	
	6.5	BAND-EDGE FOR RF CONDUCTED EMISSIONS	20
	6.6	SPURIOUS RF CONDUCTED EMISSIONS	
	6.7	RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	
	6.	7.1 Spurious Emissions	28
7	Pl	HOTOGRAPHS - EUT TEST SETUP	34
	7.1	RADIATED SPURIOUS EMISSION	34
8	Pl	HOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	36



Report No.: CQASZ20180500101E-02

5 General Information

5.1 Client Information

Applicant:	1MORE Shen Zhen Acoustic Technology Co., Ltd.
Address of Applicant:	Tianliao Building F14 East Block (New Materials Industrial Park), Xueyuan Road, Nanshan District, Shenzhen, P.R. China
Manufacturer:	Tiinlab Acoustic Technology (Shenzhen) Co., Ltd.
Address of Manufacturer:	Tianliao Building 1407, Tianliao Industrial Area A, Taoyuan Street, Nanshan District, Shenzhen, China

5.2 General Description of EUT

•	
Product Name:	1MORE Stylish Dual-dynamic Driver BT In-Ear Headphones
Model No.:	E1024BT
Trade Mark:	1MORE
Hardware Version:	FW_E1024_BM20L_V0.7
Software Version:	PCB-EM022-V0.3(2018-05-10)
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.1
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Portable production
Test Software of EUT:	Non Signaling Test Tool (manufacturer declare)
Antenna Type:	Wired antenna
Antenna Gain:	-0.73dBi
EUT Power Supply:	lithium battery:DC3.7V, Charge by DC5.0V



Report No.: CQASZ20180500101E-02

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Note

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz





5.3 Test Environment

Operating Environment	Operating Environment:			
Temperature:	25.0 °C			
Humidity:	53 % RH			
Atmospheric Pressure:	1010mbar			
Test Mode:	Use test software (Non Signaling Test Tool) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.			
	Note: In the process of transmitting of EUT, the duty cycle $>$ 98%.			

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
PC	Lenovo	ThinkPad E450c	Provide by lab	ID

5.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** guality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	±5.12dB	(1)
Radiated Emission	Above 1GHz	±4.60dB	(1)
Conducted Disturbance	0.15~30MHz	±3.34dB	(1)

⁽¹⁾This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.6 Test Location

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China



Report No.: CQASZ20180500101E-02

5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: IC Registration No.: 22984-1

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L5785)

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 4742.01)

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• FCC Registration No.: 522263

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.8 Deviation from Standards

None.

5.9 Other Information Requested by the Customer

None.





5.10Equipment List

Item	Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Due Date
1	EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/24
2	Spectrum analyzer	R&S	FSU26	CQA-038	2018/9/24
3	Preamplifier	MITEQ	AFS4- 00010300-18- 10P-4	CQA-035	2018/9/24
4	Preamplifier	MITEQ	AMF-6D- 02001800-29- 20P	CQA-036	2018/9/24
5	Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2019/3/21
6	Bilog Antenna	R&S	HL562	CQA-011	2018/9/24
7	Horn Antenna	R&S	HF906	CQA-012	2018/9/24
8	Horn Antenna	R&S	BBHA 9170	CQA-088	2018/9/24
9	Coax cable (9KHz~40GHz)	CQA	RE-low-01	CQA-077	2018/9/24
10	Coax cable (9KHz~40GHz)	CQA	RE-high-02	CQA-078	2018/9/24
11	Antenna Connector	CQA	RFC-01	CQA-080	2018/9/24
12	Power divider	CQA	PWD-2533- 02-SMA-79	CQA-067	2018/9/29
13	RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/24

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



6 Test results and Measurement Data

6.1 Antenna Requirement

Standard 47 requirement:

47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:


The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

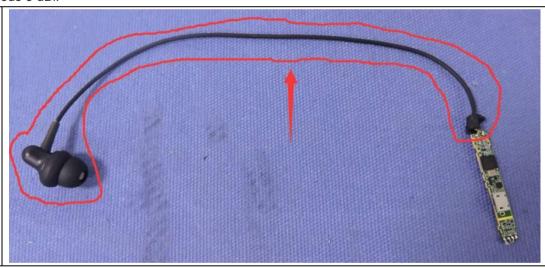

The antenna is Wired antenna shared with the earphone wires. The best case gain of the antenna is -0.73 dBi.

6.2 Conducted Peak Output Power

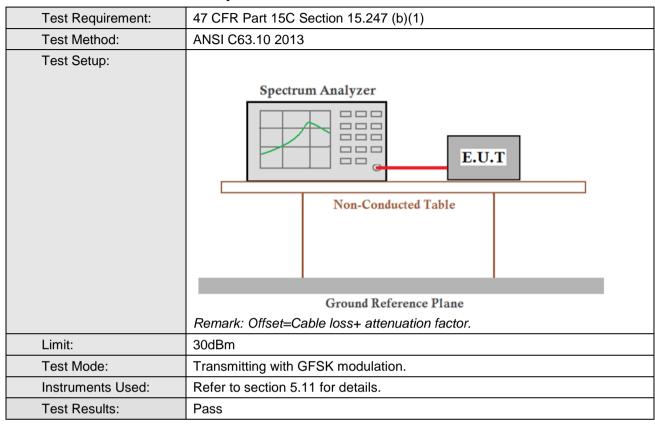


Measurement Data

GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	-5.6	30.00	Pass	
Middle	-5.81	30.00	Pass	
Highest	-5.41	30.00	Pass	




Test plot as follows:

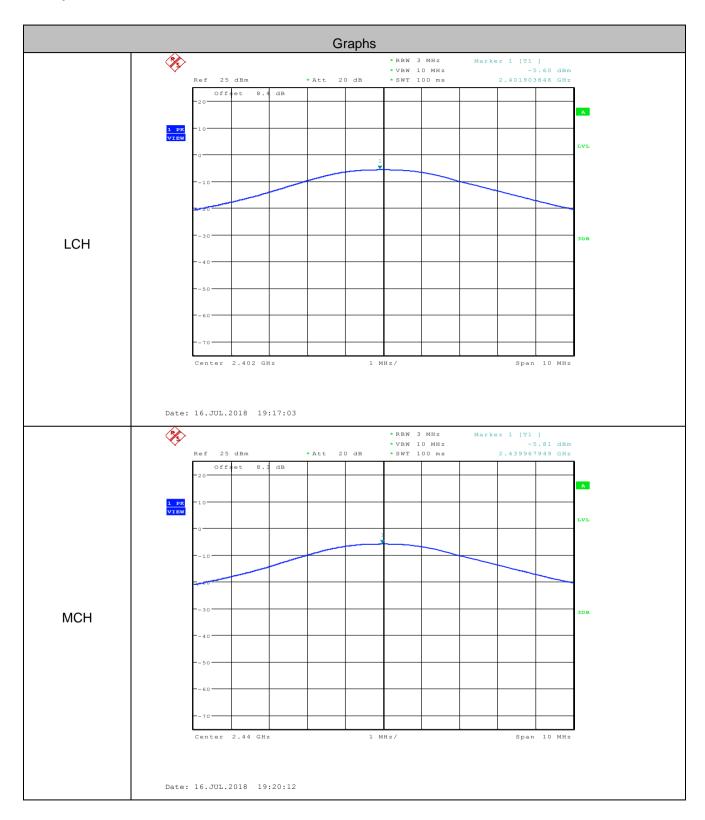





6.3 6dB Occupy Bandwidth

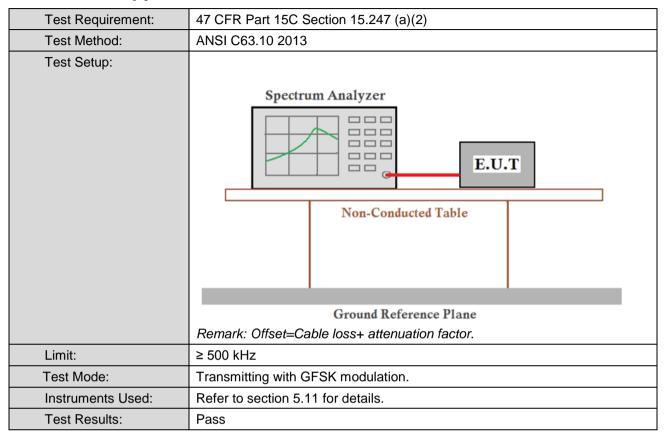


Measurement Data


	GFSK mode								
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result						
Lowest	0.724	≥500	Pass						
Middle	0.705	≥500	Pass						
Highest	0.718	≥500	Pass						



Test plot as follows:

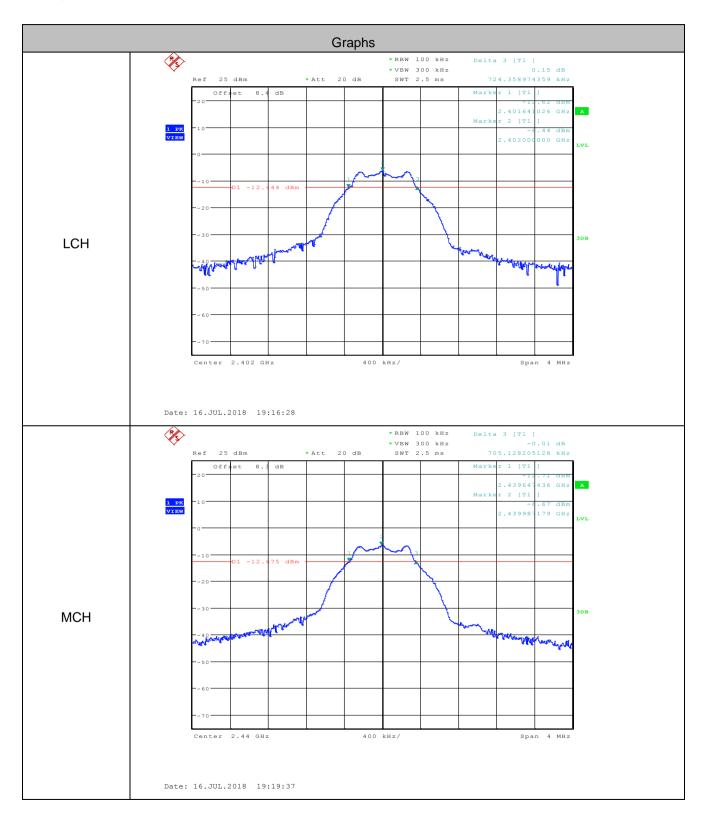




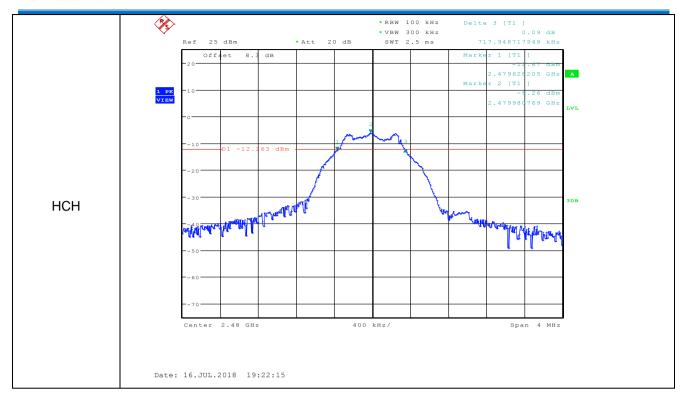



6.4 Power Spectral Density

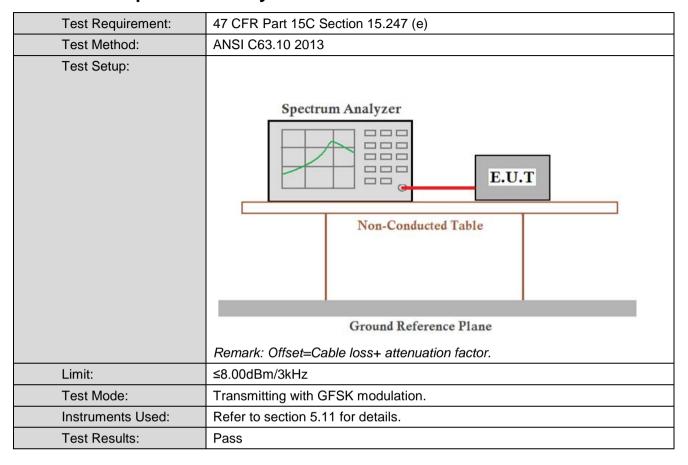


Measurement Data


modean ormanic Bata									
	GFSK mode								
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result						
Lowest	-20.560	≤8.00	Pass						
Middle	-20.760	≤8.00	Pass						
Highest	-20.260	≤8.00	Pass						



Test plot as follows:

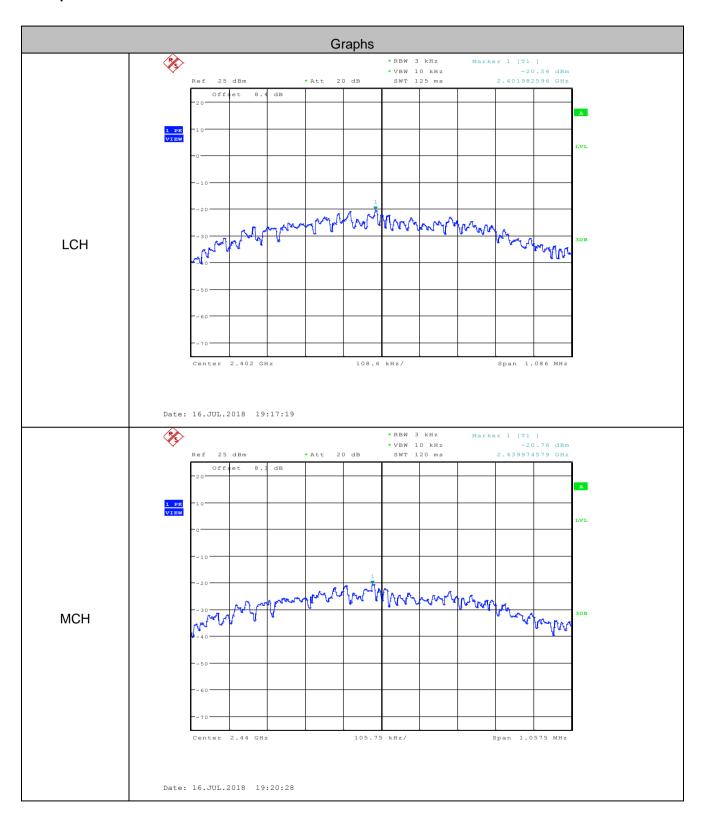




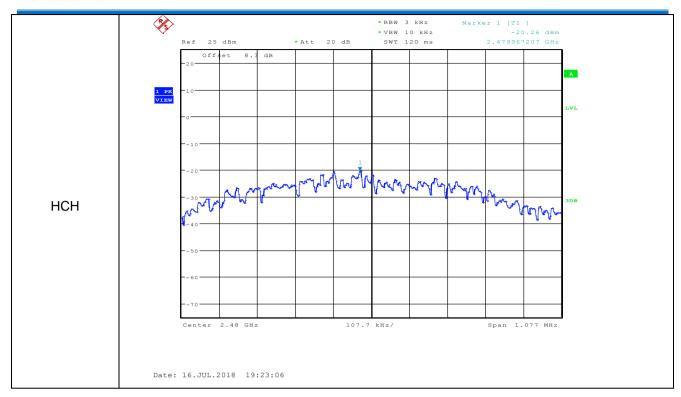






6.5 Band-edge for RF Conducted Emissions

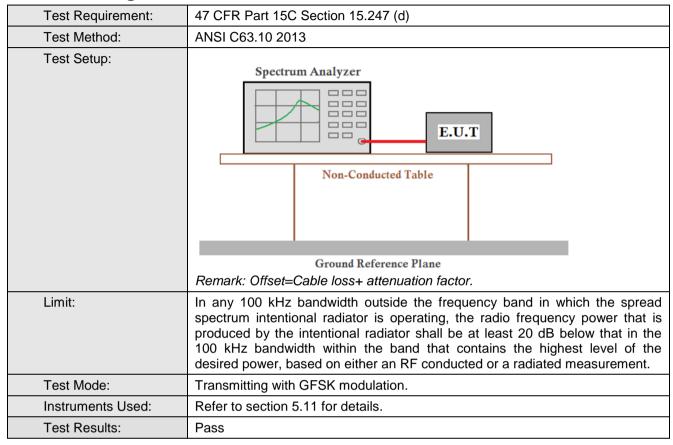

GFSK mode									
Test									
channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result					
Lowest	2400	-41.630	-26.29	Pass					
Highest	2483.5	-48.980	-26.12	Pass					




Test plot as follows:

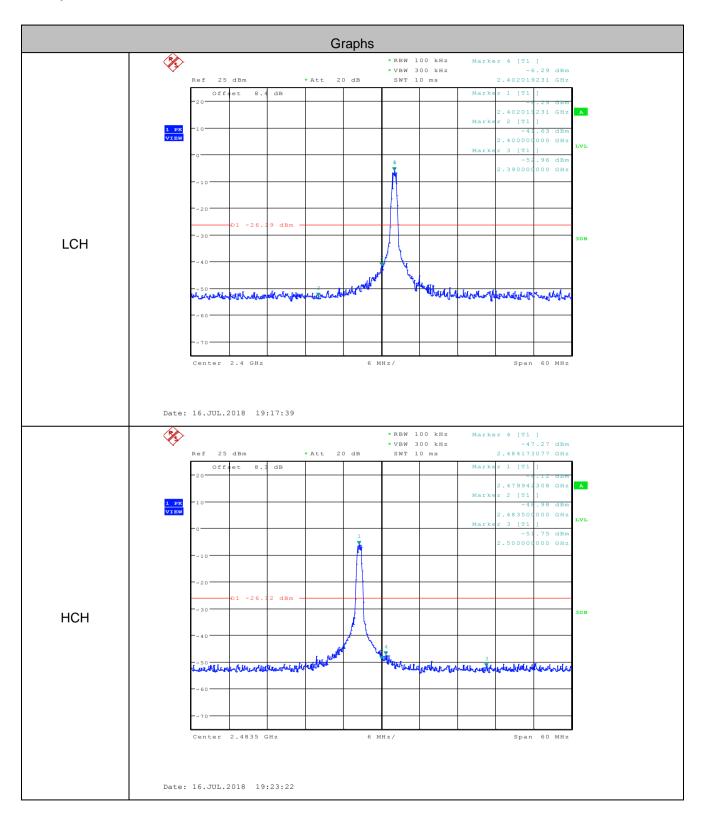






6.6 Spurious RF Conducted Emissions

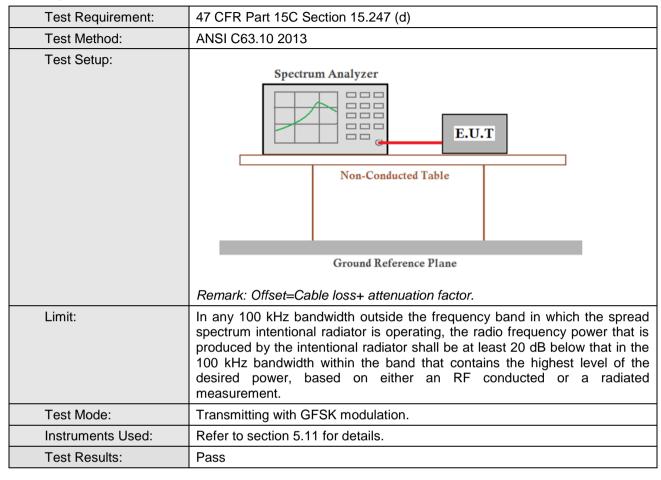





Test plot as follows:

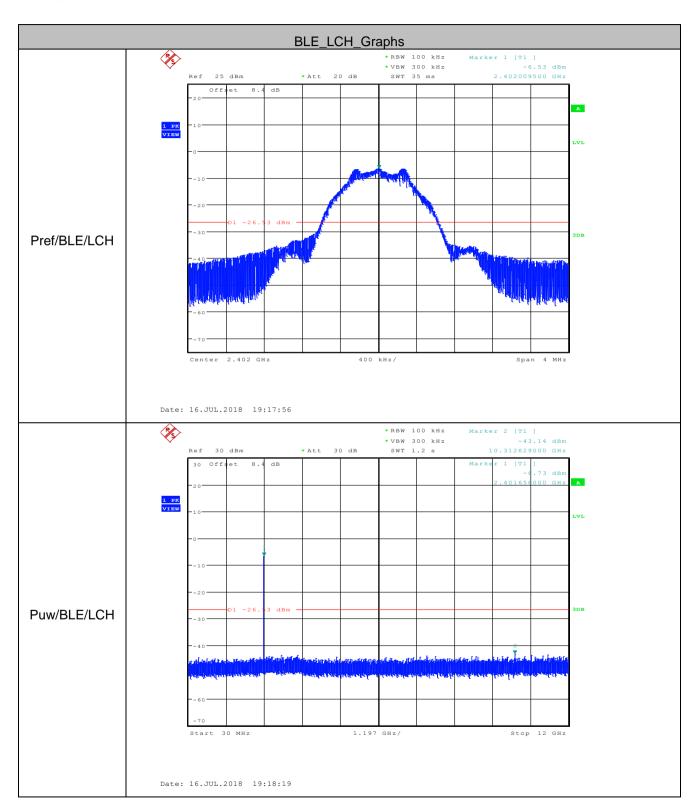




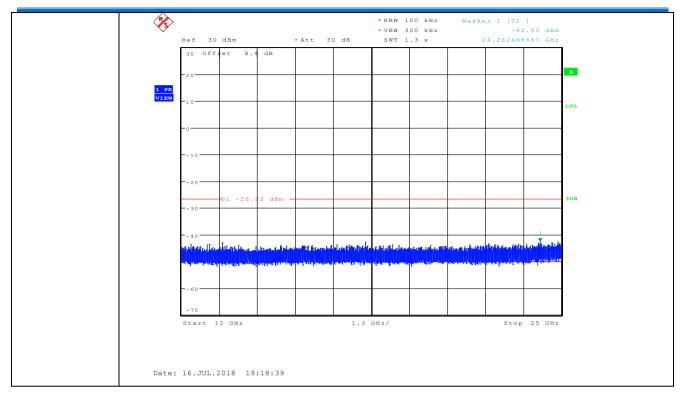


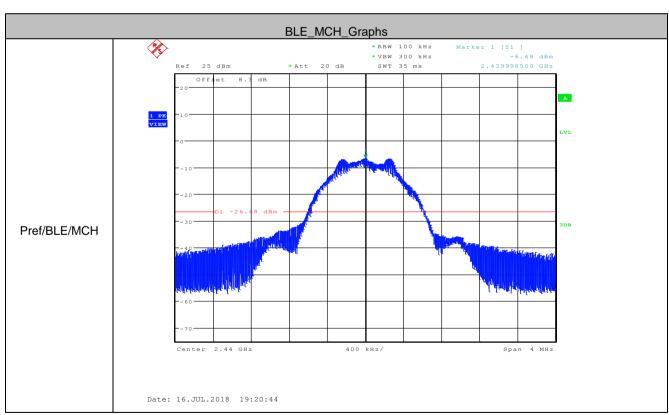



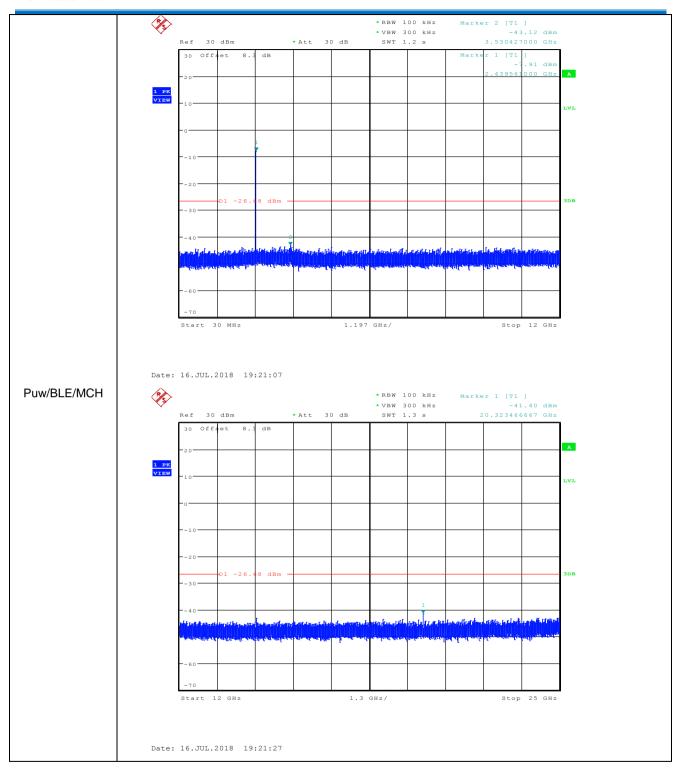




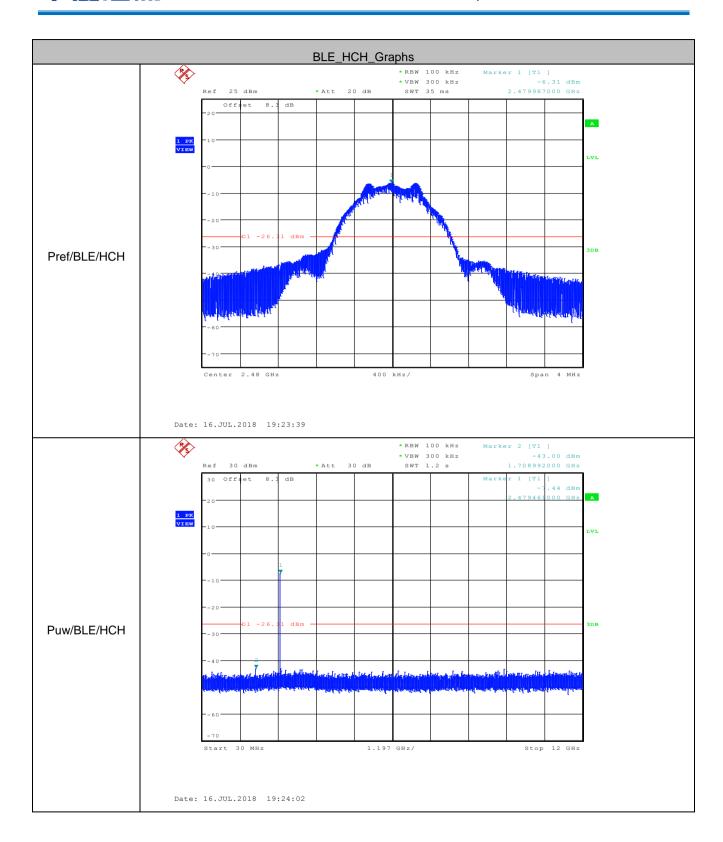



Report No.: CQASZ20180500101E-02

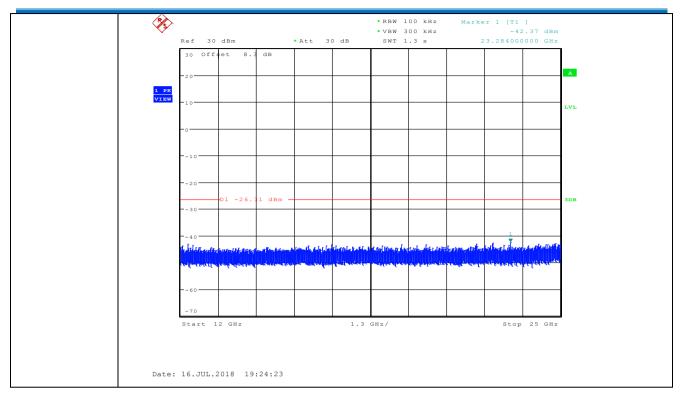

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.







6.7 Radiated Spurious Emission & Restricted bands

6.7.1 Spurious Emissions								
Test Requirement:	47 CFR Part 15C Secti	on 1	5.209 and 15	.205				
Test Method:	ANSI C63.10 2013							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz		Peak	10kHz	30kHz	Peak		
	0.009MHz-0.090MH	z	Average	10kHz	30kHz	Average		
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	30kHz	Quasi-peak		
	0.110MHz-0.490MH	z	Peak	10kHz	30kHz	Peak		
	0.110MHz-0.490MH	z	Average	10kHz	30kHz	Average		
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	30MHz-1GHz	Quasi-peak	100 kH	z 300kHz	Quasi-peak			
	Above 1GHz		Peak	1MHz	3MHz	Peak		
	Above IGHZ		Peak	1MHz	10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measuremer distance (m		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30		
	1.705MHz-30MHz		30	-	-	30		
	30MHz-88MHz		100	40.0	Quasi-peak	3		
	88MHz-216MHz		150	43.5	Quasi-peak	3		
	216MHz-960MHz		200	46.0	Quasi-peak	3		
	960MHz-1GHz 500		500	54.0	Quasi-peak	3		
	Above 1GHz 500			54.0	Average	3		
	Note: 15.35(b), frequency emissions is limit applicable to the epeak emission level race	20c quip	dB above the oment under t	maximum est. This p	permitted ave	erage emission	١	



Report No.: CQASZ20180500101E-02

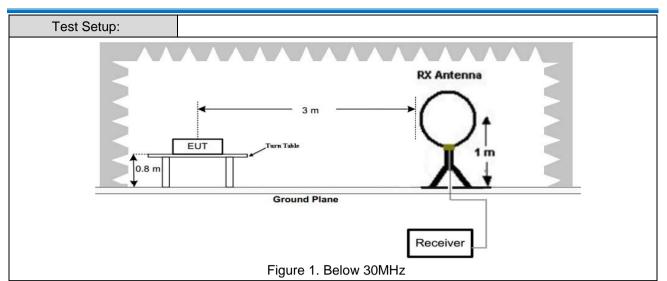






Figure 2. 30MHz to 1GHz

Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

Note: For the radiated emission test above 1GHz:


Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the



	measurement.
	 d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation.
	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case.
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.
Leafe we stall I	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.11 for details.
Test Results:	Pass






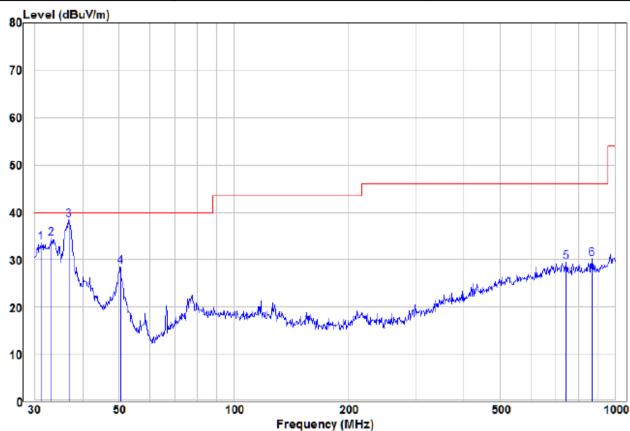

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
-	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	31.07	15.12	18.51	33.63	40.00	-6.37	Peak	VERTICAL
2	33.18	16.08	18.35	34.43	40.00	-5.57	Peak	VERTICAL
3 pp	36.82	21.50	16.92	38.42	40.00	-1.58	Peak	VERTICAL
4	50.31	19.58	8.97	28.55	40.00	-11.45	Peak	VERTICAL
5	744.66	10.70	18.75	29.45	46.00	-16.55	Peak	VERTICAL
6	870.44	11.32	18.90	30.22	46.00	-15.78	Peak	VERTICAL





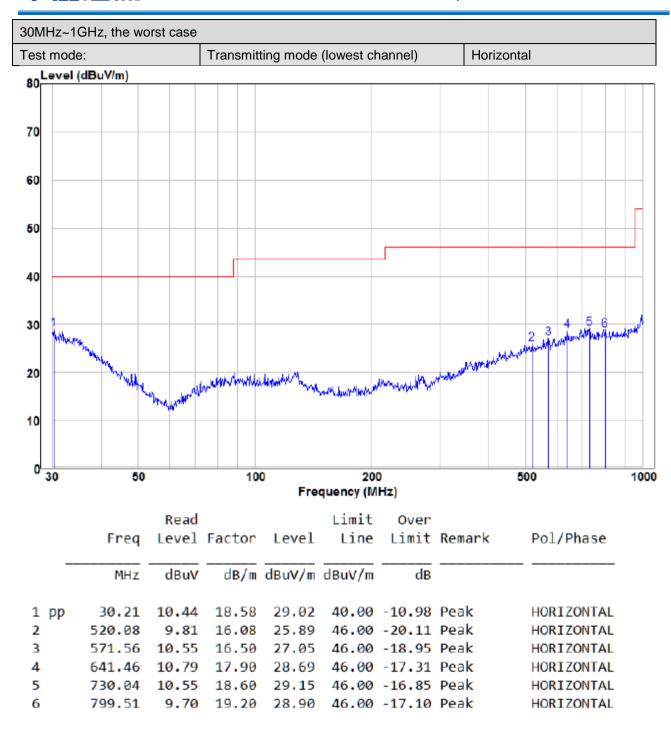



Report No.: CQASZ20180500101E-02

Transmitter Emission above 1GHz

Worse case m	ode:	GFSK		Test channel: Lowe		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
2390	53.69	-9.2	44.49	74	-29.51	Peak	Н
2400	56.27	-9.39	46.88	74	-27.12	Peak	Н
4804	53.48	-4.33	49.15	74	-24.85	Peak	Н
7206	50.86	1.01	51.87	74	-22.13	Peak	Н
2390	54.65	-9.2	45.45	74	-28.55	Peak	V
2400	51.32	-9.39	41.93	74	-32.07	Peak	V
4804	54.65	-4.33	50.32	74	-23.68	Peak	V
7206	48.83	1.01	49.84	74	-24.16	Peak	V

Worse case m	rse case mode:		GFSK		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V	
4880	52.76	-4.11	48.65	74	-25.35	peak	Н	
7320	49.97	1.51	51.48	74	-22.52	peak	Н	
4880	51.80	-4.11	47.69	74	-26.31	peak	V	
7320	48.29	1.51	49.80	74	-24.20	peak	V	

Worse case m	ode:	GFSK		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
2483.5	54.49	-9.29	45.20	74	-28.80	Peak	Н
4960	52.91	-4.04	48.87	74	-25.13	Peak	Н
7440	48.65	1.57	50.22	74	-23.78	Peak	Н
2483.5	56.15	-9.29	46.86	74	-27.14	Peak	V
4960	50.68	-4.04	46.64	74	-27.36	Peak	V
7440	50.01	1.57	51.58	74	-22.42	Peak	V

Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


7 Photographs - EUT Test Setup

7.1 Radiated Spurious Emission

9KHz~30MHz:






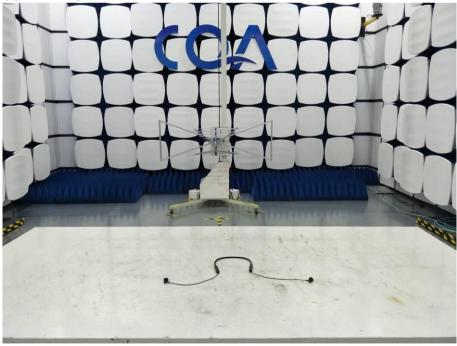





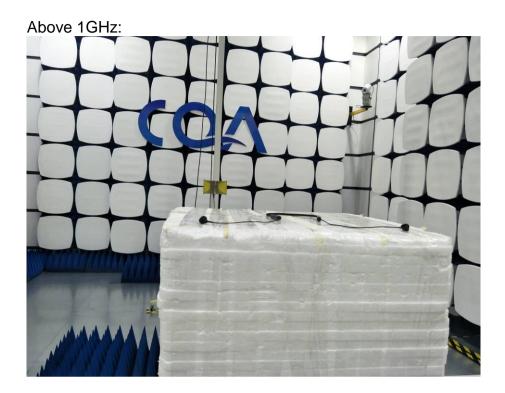



8 Photographs - EUT Constructional Details


















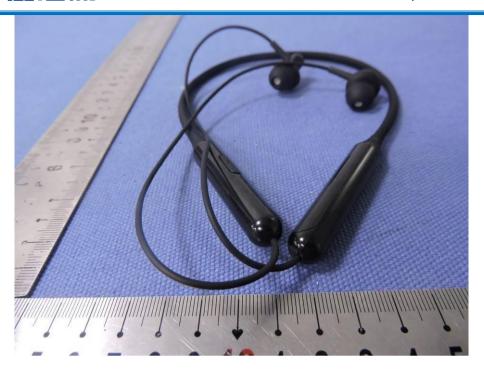

















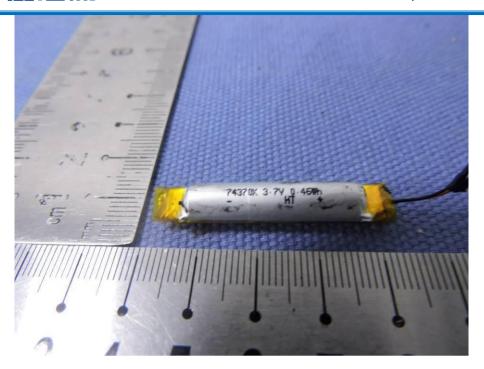

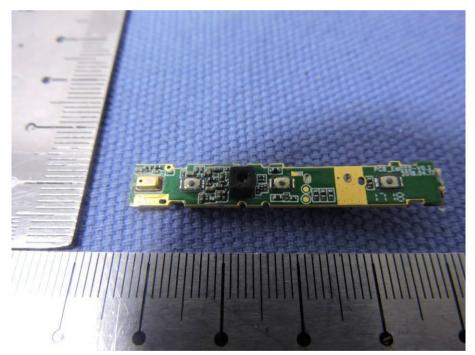









END OF THE REPORT