

RF TEST REPORT



Report No.: 15070892-FCC-R3

Supersede Report No.: N/A

Applicant	SENMAX INC.	
Product Name	LTE Phone	
Model No.	Carbon	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	October 10 to October 31, 2015	
Issue Date	October 31, 2015	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Winnie.Zhang	David Huang	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	15070892-FCC-R3
Page	3 of 54

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
6.1 ANTENNA REQUIREMENT.....	10
6.2 DTS (6 DB&20 DB) CHANNEL BANDWIDTH.....	11
6.3 MAXIMUM OUTPUT POWER	17
6.4 POWER SPECTRAL DENSITY.....	21
6.5 BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS.....	25
6.6 AC POWER LINE CONDUCTED EMISSIONS.....	31
6.7 RADIATED EMISSIONS	37
ANNEX A. TEST INSTRUMENT.....	42
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	43
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	49
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	53
ANNEX E. DECLARATION OF SIMILARITY	54

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15070892-FCC-R3	NONE	Original	October 31, 2015

2. Customer information

Applicant Name	SENMAX INC.
Applicant Add	2300 GRAYSON DR # 1611 GRAPEVINE, TX 76051
Manufacturer	SENMAX INC.
Manufacturer Add	2300 GRAYSON DR # 1611 GRAPEVINE, TX 76051

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Report No.	15070892-FCC-R3
Page	6 of 54

4. Equipment under Test (EUT) Information

Description of EUT:	LTE Phone
Main Model:	Carbon
Serial Model:	N/A
Date EUT received:	October 09, 2015
Test Date(s):	October 10 to October 31, 2015
Equipment Category :	DTS
Antenna Gain:	GSM850: -7.22 dBi PCS1900: -2.93 dBi UMTS-FDD Band V: -7.22 dBi UMTS-FDD Band IV: -2.55 dBi UMTS-FDD Band II:-2.93 dBi Bluetooth/BLE:-2.94 dBi WIFI:-2.94 dBi LTE Band 2: -3.96 dBi LTE Band 4: -2.33 dBi LTE Band 7: -2.54 dBi LTE Band 17: -8.25 dBi GPS:-3.56 dBi
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK, 8PSK UMTS-FDD: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK LTE Band: QPSK, 16QAM GPS:BPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz

Test Report No.	15070892-FCC-R3
Page	7 of 54

UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz;
 UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;
 RX: 1932.4 ~ 1987.6 MHz
 WIFI:802.11b/g/n(20M): 2412-2462 MHz
 WIFI:802.11n(40M): 2422-2452 MHz
 Bluetooth& BLE: 2402-2480 MHz
 LTE Band 2 TX: 1852.5 ~ 1907.5 MHz; RX : 1932.5 ~ 1987.5 MHz
 LTE Band 4 TX: 1712.5 ~ 1752.5 MHz; RX : 2112.5 ~ 2152.5 MHz
 LTE Band 7 TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz
 LTE Band 17 TX: 706.5 ~ 713.5 MHz; RX : 736.5 ~ 743.5 MHz
 GPS RX:1575.42 MHz

Max. Output Power:
 802.11b:8.25dBm
 802.11g:8.44dBm
 802.11n(20M):8.69dBm
 802.11n(40M):8.37dBm

Number of Channels:
 GSM 850: 124CH
 PCS1900: 299CH
 UMTS-FDD Band V : 102CH
 UMTS-FDD Band IV: 202CH
 UMTS-FDD Band II : 277CH
 WIFI :802.11b/g/n(20M): 11CH
 WIFI :802.11n(40M): 7CH
 Bluetooth: 79CH
 BLE: 40CH
 GPS:1CH

Input Power:
 Battery:
 Spec:3.8V,2850mAh
 Adapter:
 Model:TPA-955100UU
 Input: 100-240V; 50/60Hz; 150mA
 Output: DC 5.0V,1000mA

Port: Power Port, Earphone Port, USB Port

Test Report No.	15070892-FCC-R3
Page	8 of 54

Trade Name :

Ojji

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: 2AF99CARBON

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 4 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI, the gain is -2.94dBi.

A permanently attached PIFA antenna for GSM and UMTS, the gain is -7.22dBi for GSM850, -2.93dBi for PCS1900, -7.22dBi for UMTS-FDD Band V, -2.55dBi for UMTS-FDD Band IV, -2.93dBi for UMTS-FDD Band II.

A permanently attached PIFA antenna for LTE, the gain is -3.96dBi LTE Band 2, the gain is -2.33dBi LTE Band 4, the gain is -2.54dBi LTE Band 7, the gain is -8.25dBi LTE Band 17.


A permanently attached PIFA antenna for GPS, the gain is -3.56dBi for GPS,

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	October 15, 2015
Tested By :	Winnie Zhang

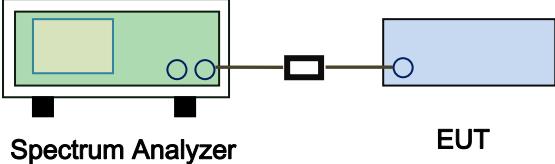Spec	Item	Requirement	Applicable
§ 15.247(a)(2)	a)	6dB BW \geq 500kHz; 20dB BW \geq 500kHz;	<input checked="" type="checkbox"/>
	b)	99% BW: For FCC reference only; required by IC.	<input checked="" type="checkbox"/>
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r02, 8.1 DTS bandwidth</p> <p><u>6dB bandwidth</u></p> <ol style="list-style-type: none"> Set RBW = 100 kHz. Set the video bandwidth (VBW) \geq 3 \times RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. <p><u>20dB bandwidth</u></p> <p>C63.10 Occupied Bandwidth (OBW=20dB bandwidth)</p> <ol style="list-style-type: none"> Set RBW = 1%-5% OBW. Set the video bandwidth (VBW) \geq 3 x RBW. Set the span range between 2 times and 5 times of the OBW. Sweep time=Auto, Detector=PK, Trace=Max hold. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst- 		

	case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB levels with respect to the reference level.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Measurement result


Test mode	CH	Freq (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	9.064	14.18	≥ 0.5
	Mid	2437	9.543	14.24	≥ 0.5
	High	2462	9.024	14.11	≥ 0.5
802.11g	Low	2412	15.12	18.58	≥ 0.5
	Mid	2437	15.13	18.66	≥ 0.5
	High	2462	15.11	18.20	≥ 0.5
802.11n (20M)	Low	2412	15.11	19.02	≥ 0.5
	Mid	2437	15.67	19.24	≥ 0.5
	High	2462	15.09	18.95	≥ 0.5
802.11n (40M)	Low	2422	36.38	38.25	≥ 0.5
	Mid	2437	35.71	37.98	≥ 0.5
	High	2452	35.70	38.15	≥ 0.5

Test Plots




6dB Bandwidth measurement result

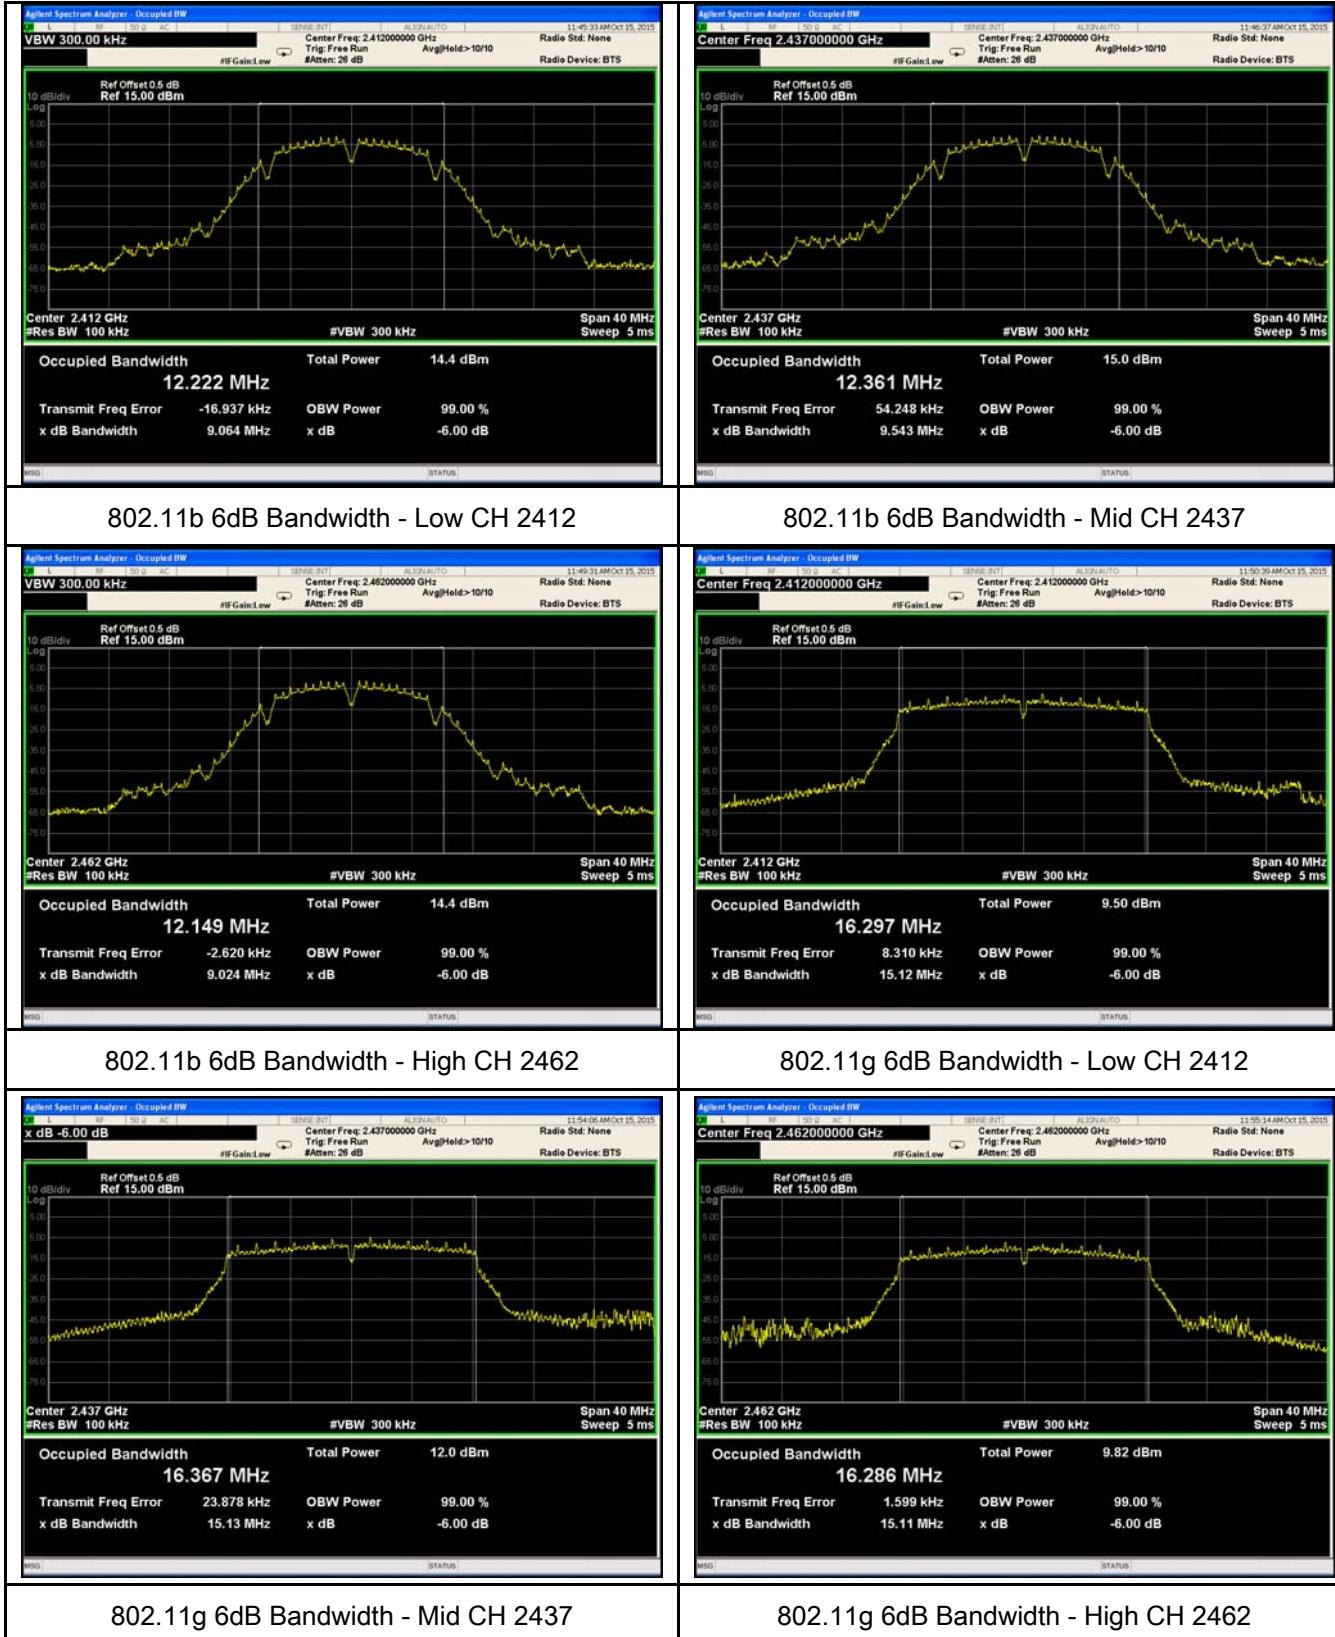



Test Report No.	15070892-FCC-R3
Page	14 of 54

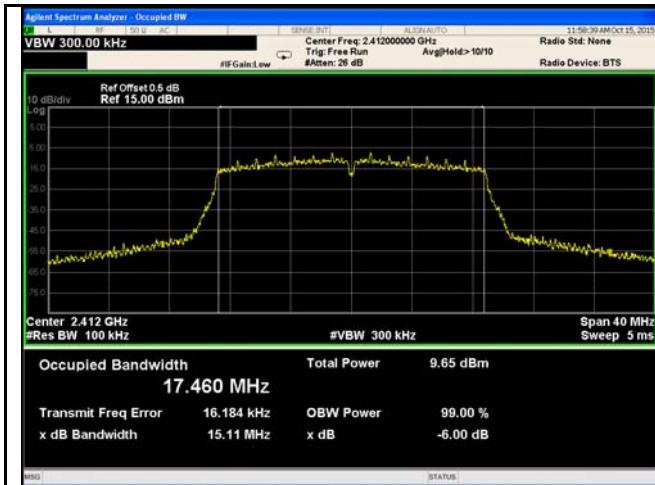

20 dB Bandwidth measurement result

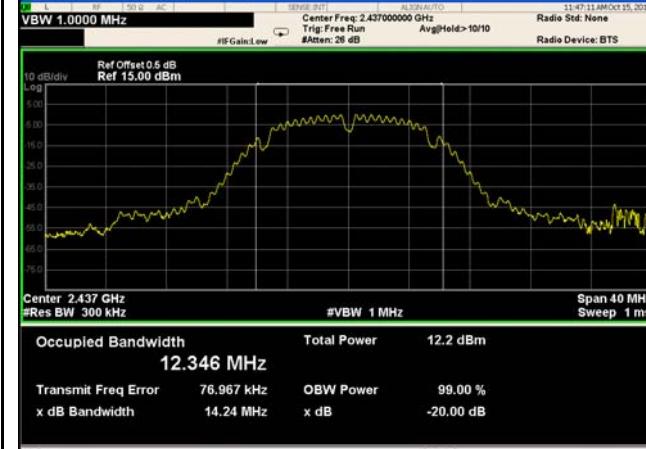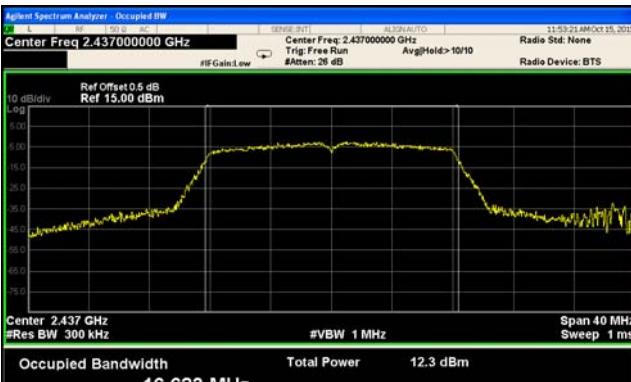
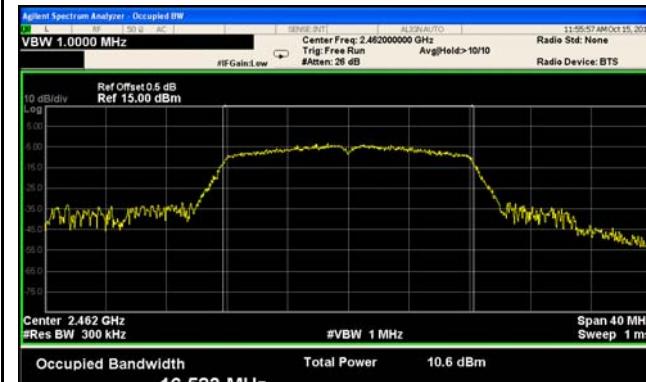
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>VBW 1.0000 MHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 26 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>5.00 15.00 25.00 35.00 45.00 55.00 65.00 75.00</p> <p>Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 12.220 MHz</p> <p>Total Power 11.6 dBm</p> <p>Transmit Freq Error 991 Hz</p> <p>x dB Bandwidth 14.18 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -20.00 dB</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>VBW 1.0000 MHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 26 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>5.00 15.00 25.00 35.00 45.00 55.00 65.00 75.00</p> <p>Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 12.346 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error 76.967 kHz</p> <p>x dB Bandwidth 14.24 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -20.00 dB</p>
<p>802.11b 20dB Bandwidth - Low CH 2412</p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 26 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>5.00 15.00 25.00 35.00 45.00 55.00 65.00 75.00</p> <p>Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 12.145 MHz</p> <p>Total Power 11.3 dBm</p> <p>Transmit Freq Error 20.589 kHz</p> <p>x dB Bandwidth 14.11 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -20.00 dB</p>	<p>802.11b 20dB Bandwidth - Mid CH 2437</p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>VBW 1.0000 MHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 26 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>5.00 15.00 25.00 35.00 45.00 55.00 65.00 75.00</p> <p>Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 16.469 MHz</p> <p>Total Power 10.4 dBm</p> <p>Transmit Freq Error 26.780 kHz</p> <p>x dB Bandwidth 18.58 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -20.00 dB</p>
<p>802.11b 20dB Bandwidth - High CH 2462</p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 26 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>5.00 15.00 25.00 35.00 45.00 55.00 65.00 75.00</p> <p>Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 16.623 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error 54.288 kHz</p> <p>x dB Bandwidth 18.66 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -20.00 dB</p>	<p>802.11g 20dB Bandwidth - Low CH 2412</p>  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>VBW 1.0000 MHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 26 dB</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 0.5 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>5.00 15.00 25.00 35.00 45.00 55.00 65.00 75.00</p> <p>Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms</p> <p>Occupied Bandwidth 16.523 MHz</p> <p>Total Power 10.6 dBm</p> <p>Transmit Freq Error -19.843 kHz</p> <p>x dB Bandwidth 18.20 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -20.00 dB</p>
<p>802.11g 20dB Bandwidth - Mid CH 2437</p>	<p>802.11g 20dB Bandwidth - High CH 2462</p>

Test Report No.	15070892-FCC-R3
Page	16 of 54

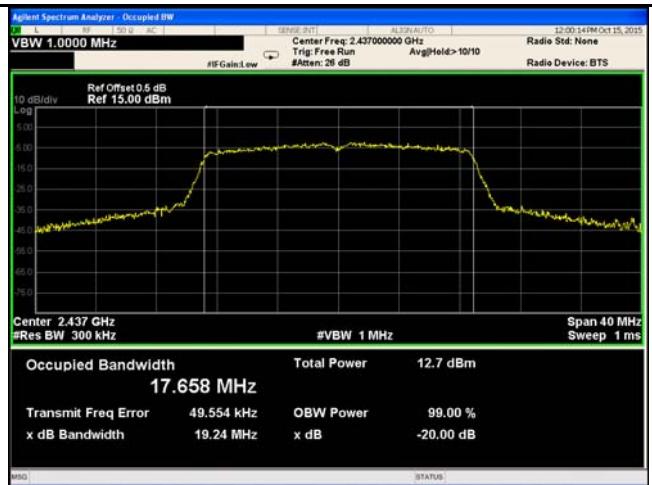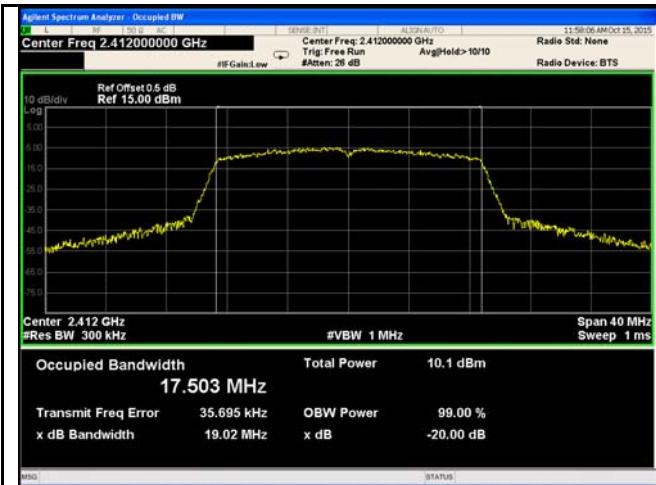


802.11n20 20dB Bandwidth - Low CH 2412

802.11n20 20dB Bandwidth - Mid CH 2437

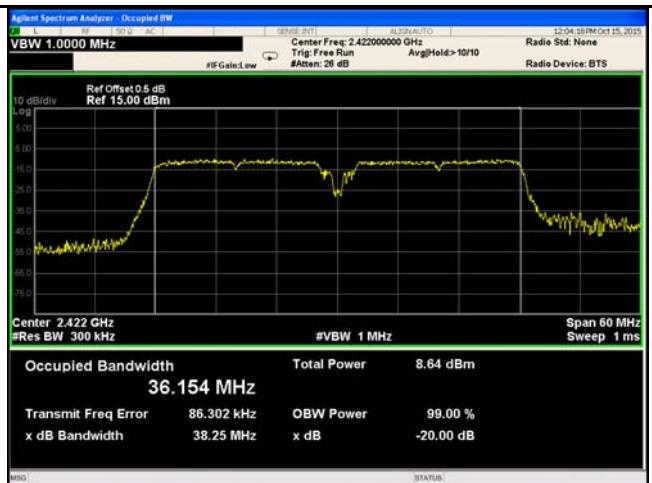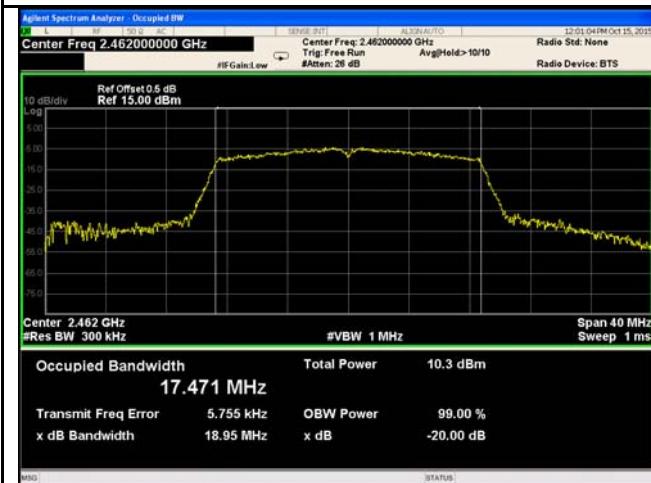

802.11n20 20dB Bandwidth - High CH 2462

802.11n40 20dB Bandwidth - Low CH 2422

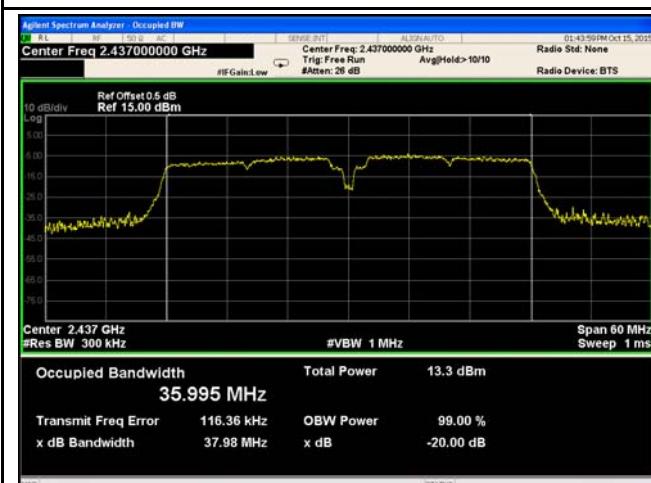


802.11n40 20dB Bandwidth - Mid CH 2437

802.11n40 20dB Bandwidth - High CH 2452

6.3 Maximum Output Power

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	October 15, 2015
Tested By :	Winnie Zhang

Requirement(s):

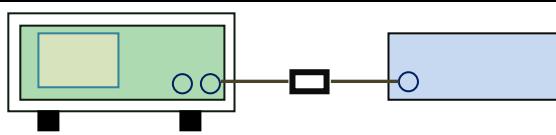Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & < 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: \leq 1 Watt	<input checked="" type="checkbox"/>
Test Setup		 Spectrum Analyzer EUT	
Test Procedure		<p>558074 D01 DTS MEAS Guidance v03r02, 9.1.2 Integrated band power method</p> <p>Maximum output power measurement procedure</p> <ul style="list-style-type: none"> - a) Set span to at least 1.5 times the OBW. - b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz. - c) Set VBW \geq 3 x RBW. - d) Number of points in sweep \geq 2 \times span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.) - e) Sweep time = auto. - f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. - g) If transmit duty cycle $<$ 98 %, use a sweep trigger with the level set to enable 	

	<p>triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “ free run” .</p> <ul style="list-style-type: none"> - h) Trace average at least 100 traces in power averaging (i.e., RMS) mode. - i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Output Power measurement result

Type	Test mode	CH	Freq (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output power	802.11b	Low	2412	7.31	30	Pass
		Mid	2437	8.25	30	Pass
		High	2462	7.69	30	Pass
	802.11g	Low	2412	7.94	30	Pass
		Mid	2437	8.37	30	Pass
		High	2462	8.44	30	Pass
	802.11n (20M)	Low	2412	8.24	30	Pass
		Mid	2437	8.69	30	Pass
		High	2462	8.61	30	Pass
	802.11n (40M)	Low	2422	7.72	30	Pass
		Mid	2437	8.37	30	Pass
		High	2452	8.24	30	Pass

Test Report No.	15070892-FCC-R3
Page	19 of 54


Test Plots

The Average Power

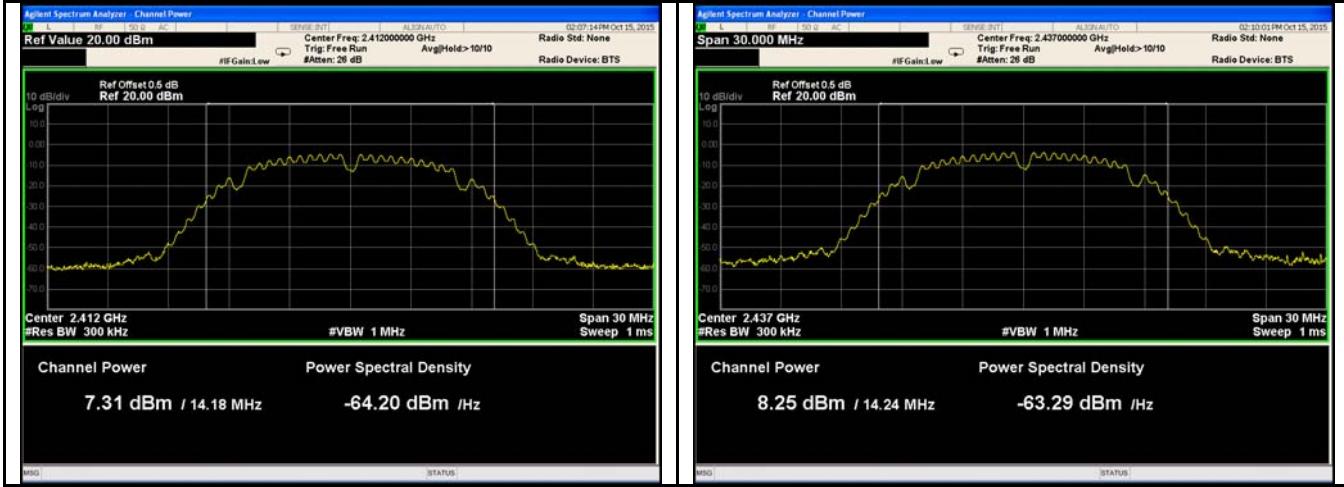


802.11b - AV Output power - Low CH 2412

802.11b - AV Output power - Mid CH 2437

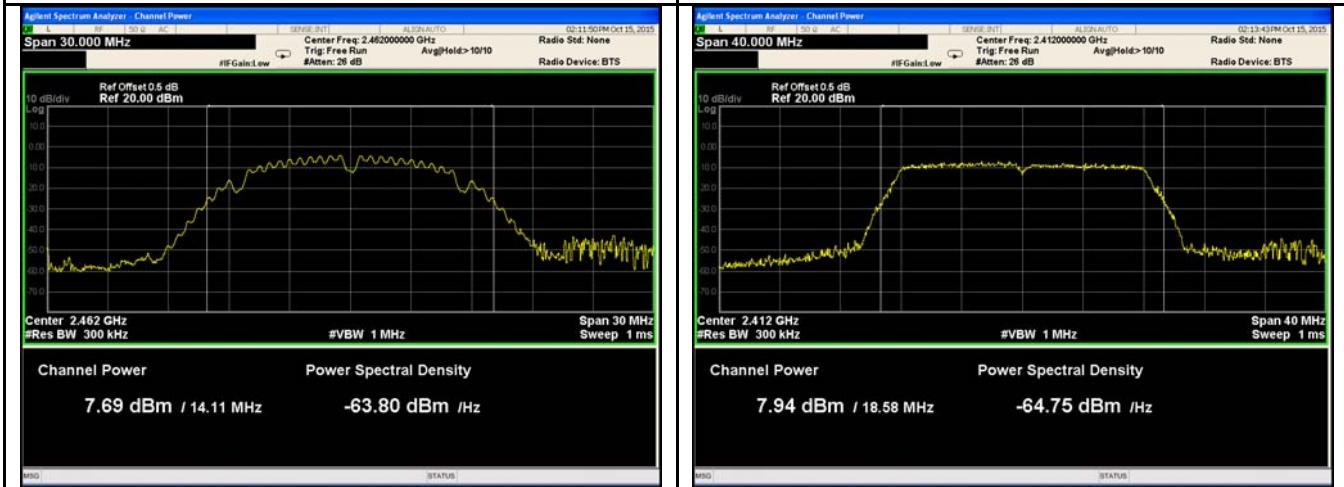


802.11b - AV Output power - High CH 2462


802.11g - AV Output power - Low CH 2412

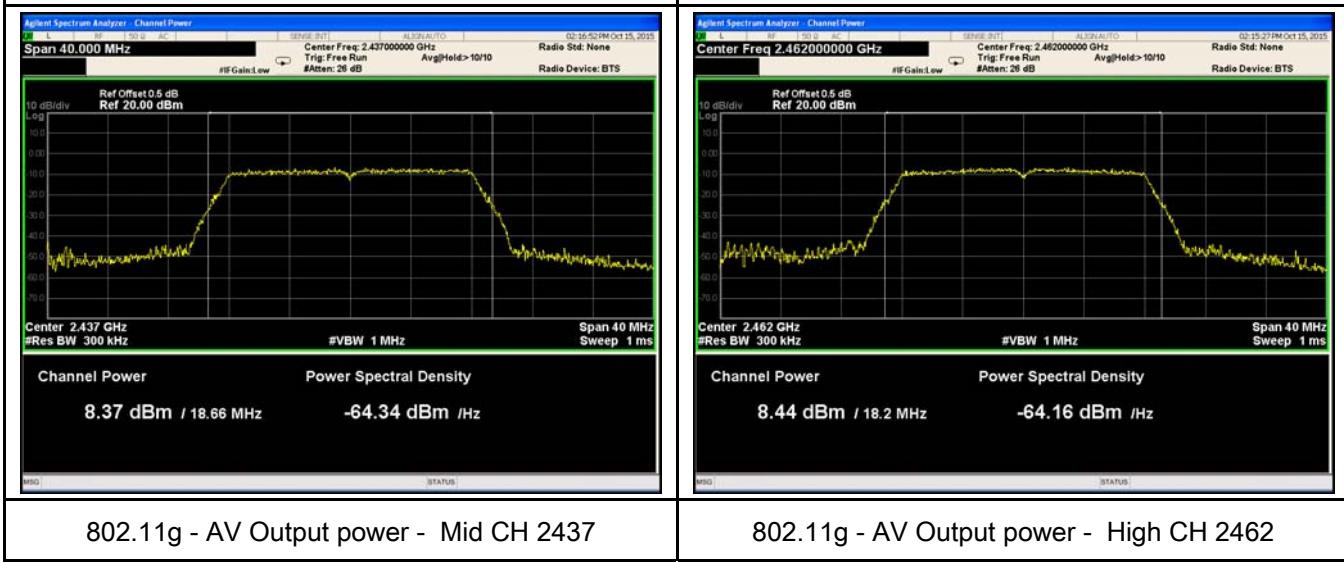

Test Report No.	15070892-FCC-R3
Page	20 of 54

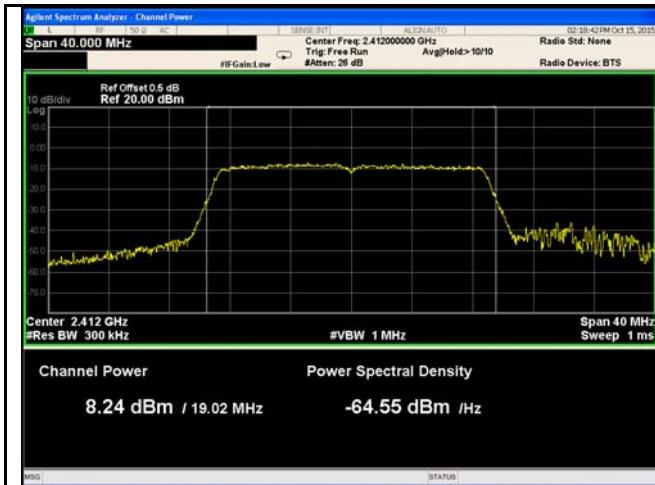

802.11n20 - AV Output power - Low CH 2412

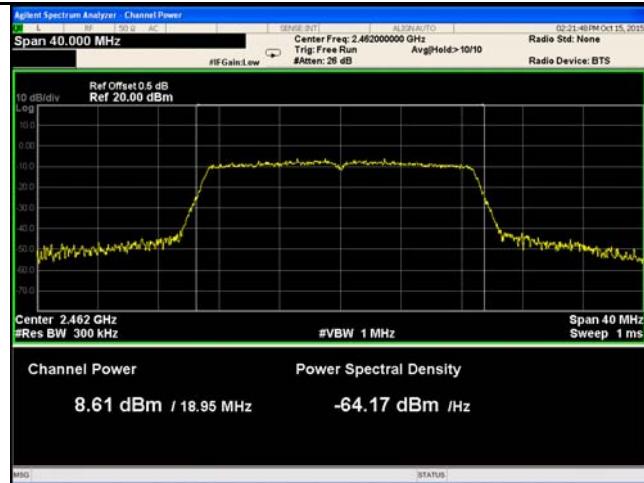

802.11n20 - AV Output power - Mid CH 2437



802.11n20 - AV Output power - High CH 2462



802.11n40 - AV Output power - Low CH 2422




802.11n40 - AV Output power - Mid CH 2437

802.11n40 - AV Output power - High CH 2452

6.4 Power Spectral Density

Temperature	24°C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	October 15, 2015
Tested By :	Winnie Zhang

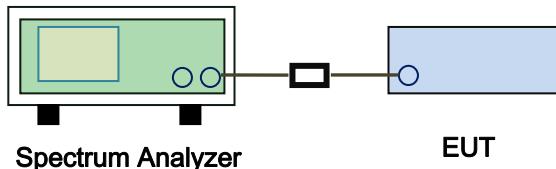Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r02, 10.2 power spectral density method power spectral density measurement procedure</p> <ul style="list-style-type: none"> - a) Set analyzer center frequency to DTS channel center frequency. - b) Set the span to 1.5 times the DTS bandwidth. - c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. - d) Set the VBW $\geq 3 \times \text{RBW}$. - e) Detector = peak. - f) Sweep time = auto couple. - g) Trace mode = max hold. - h) Allow trace to fully stabilize. - i) Use the peak marker function to determine the maximum amplitude level within the RBW. - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A


Power Spectral Density measurement result

Type	Test mode	CH	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
PSD	802.11b	Low	2412	-1.165	8	Pass
		Mid	2437	-0.493	8	Pass
		High	2462	-0.500	8	Pass
	802.11g	Low	2412	-11.467	8	Pass
		Mid	2437	-8.427	8	Pass
		High	2462	-9.627	8	Pass
	802.11n (20M)	Low	2412	-10.336	8	Pass
		Mid	2437	-8.350	8	Pass
		High	2462	-9.509	8	Pass
	802.11n (40M)	Low	2422	-11.834	8	Pass
		Mid	2437	-8.595	8	Pass
		High	2452	-10.705	8	Pass

Test Plots

Power Spectral Density measurement result

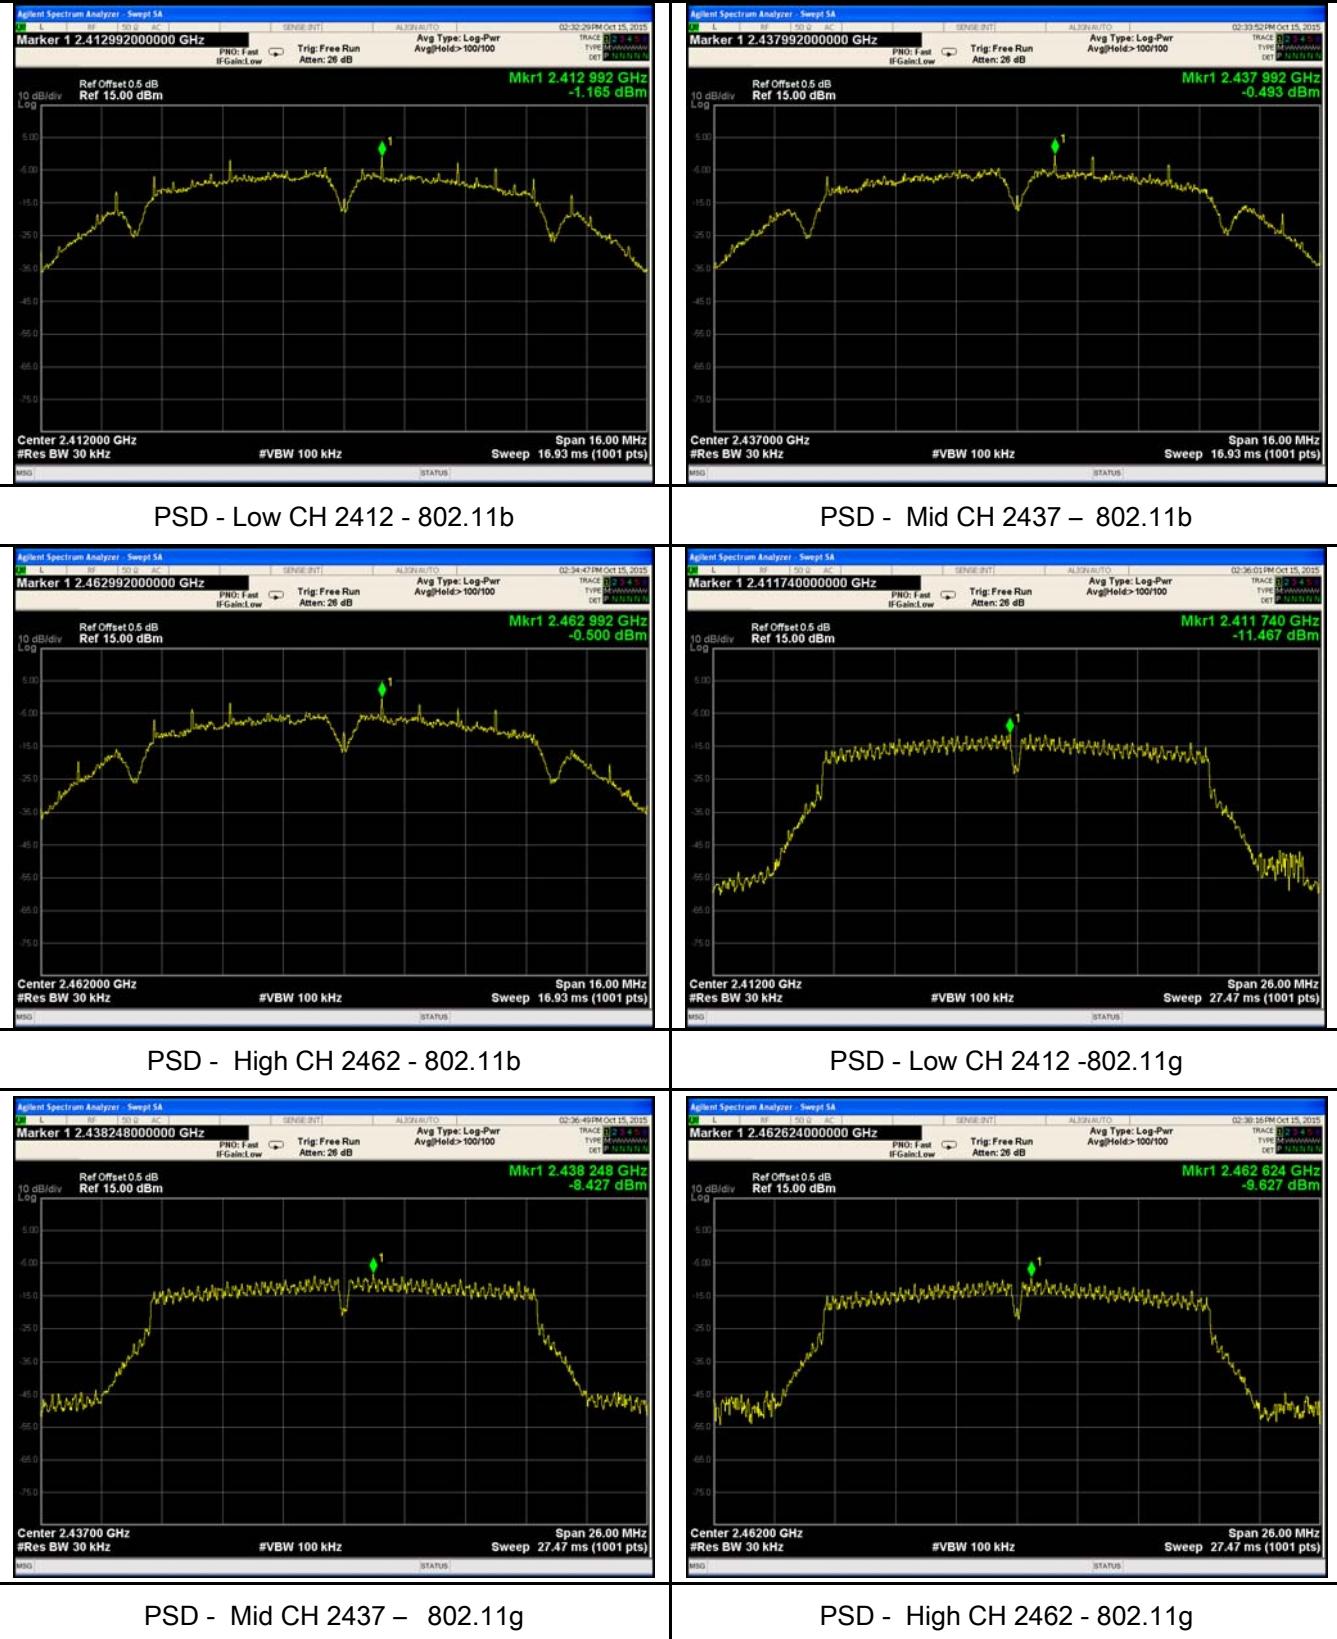


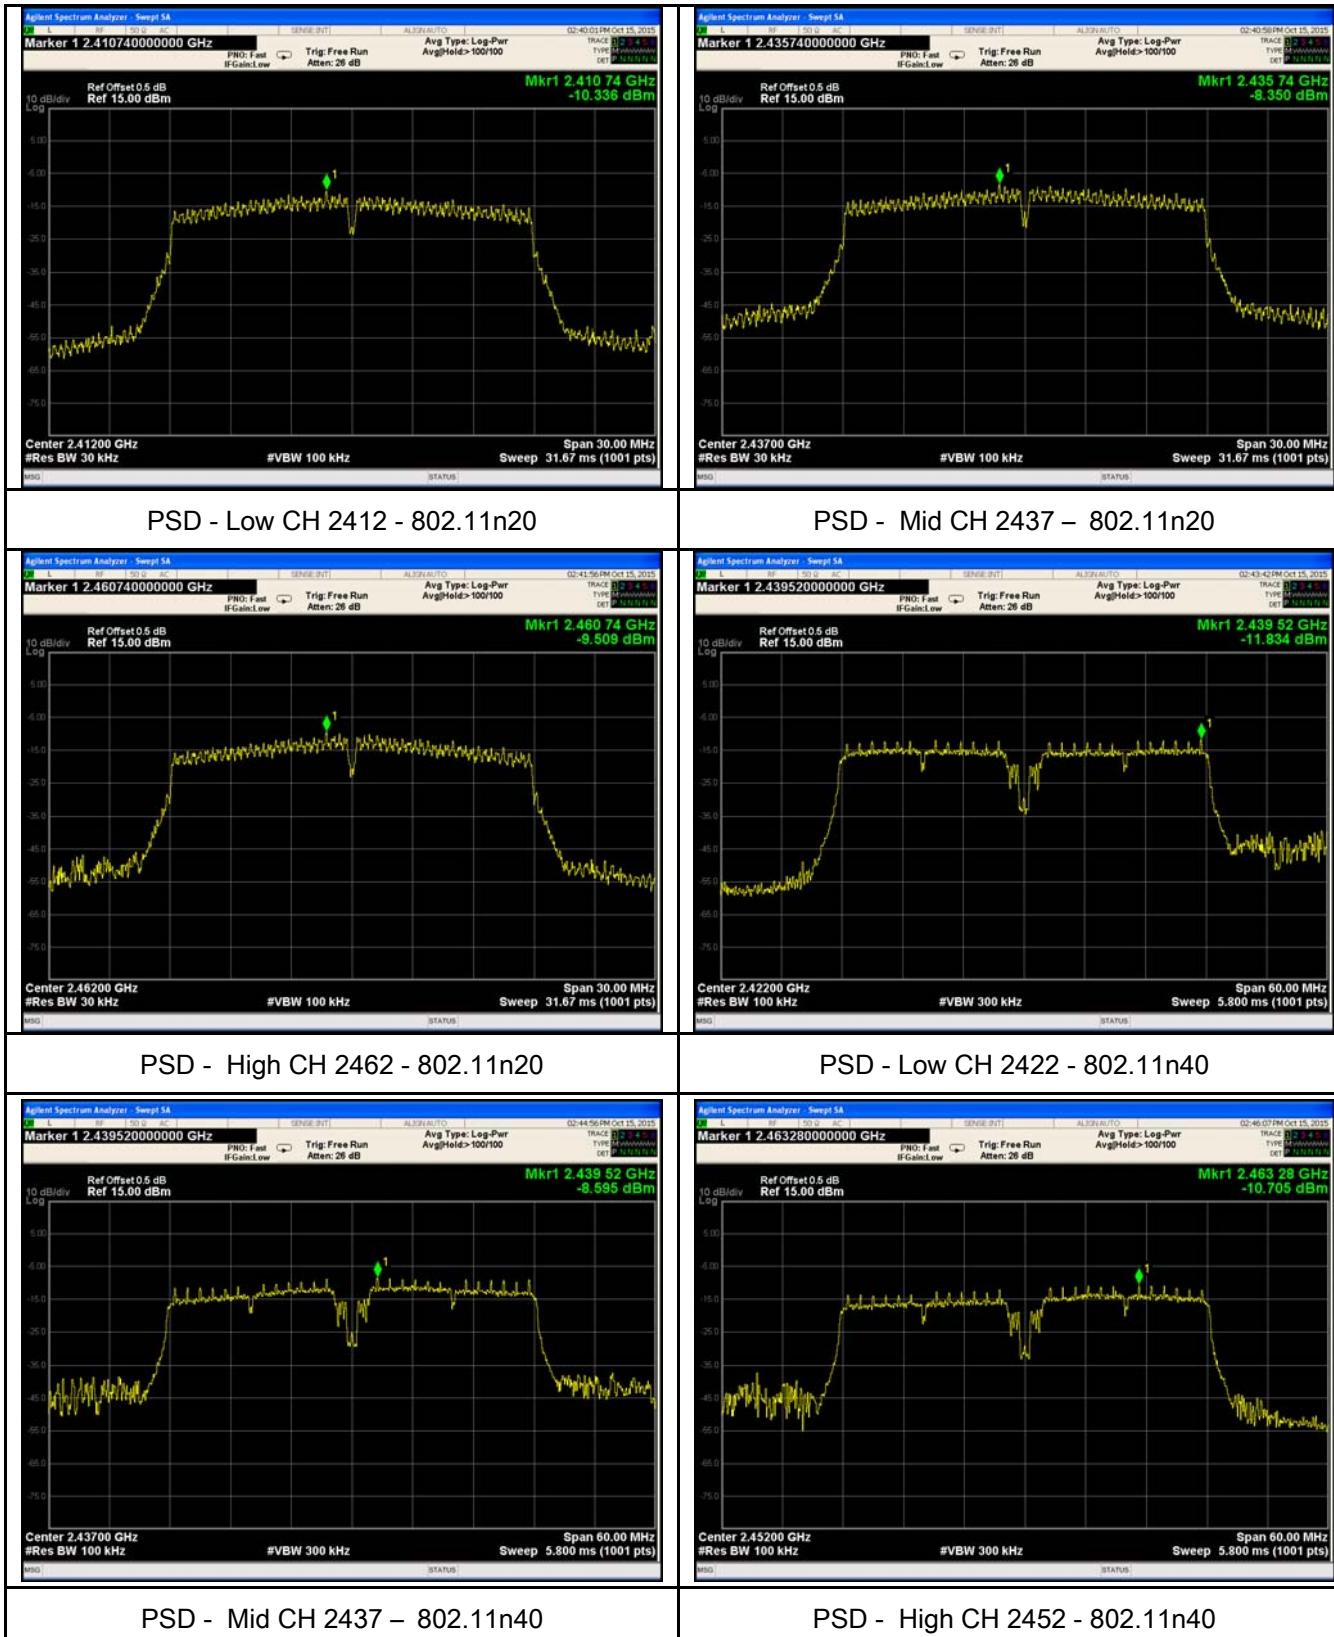

6.5 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

Temperature	24°C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	October 23, 2015
Tested By :	Winnie Zhang

Requirement(s):

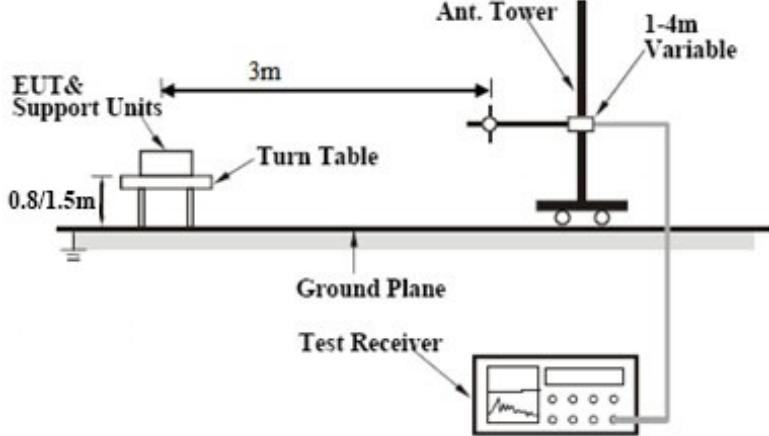Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An 'EUT & Support Units' is positioned on a 'Turn Table' at a height of '0.8/1.5m' above a 'Ground Plane'. The turn table is connected to a 'Test Receiver' which displays a spectrum. A '3m' horizontal distance is marked between the EUT and a '1-4m Variable' 'Ant. Tower' standing on the ground plane. The tower is connected to the turn table.</p>		
Test Procedure	<p>Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, 		


	<p>check the emission of EUT, if pass then set Spectrum Analyzer as below:</p> <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail



Test Data Yes N/A



Test Plot Yes (See below) N/A




Test Plots

Band Edge measurement result

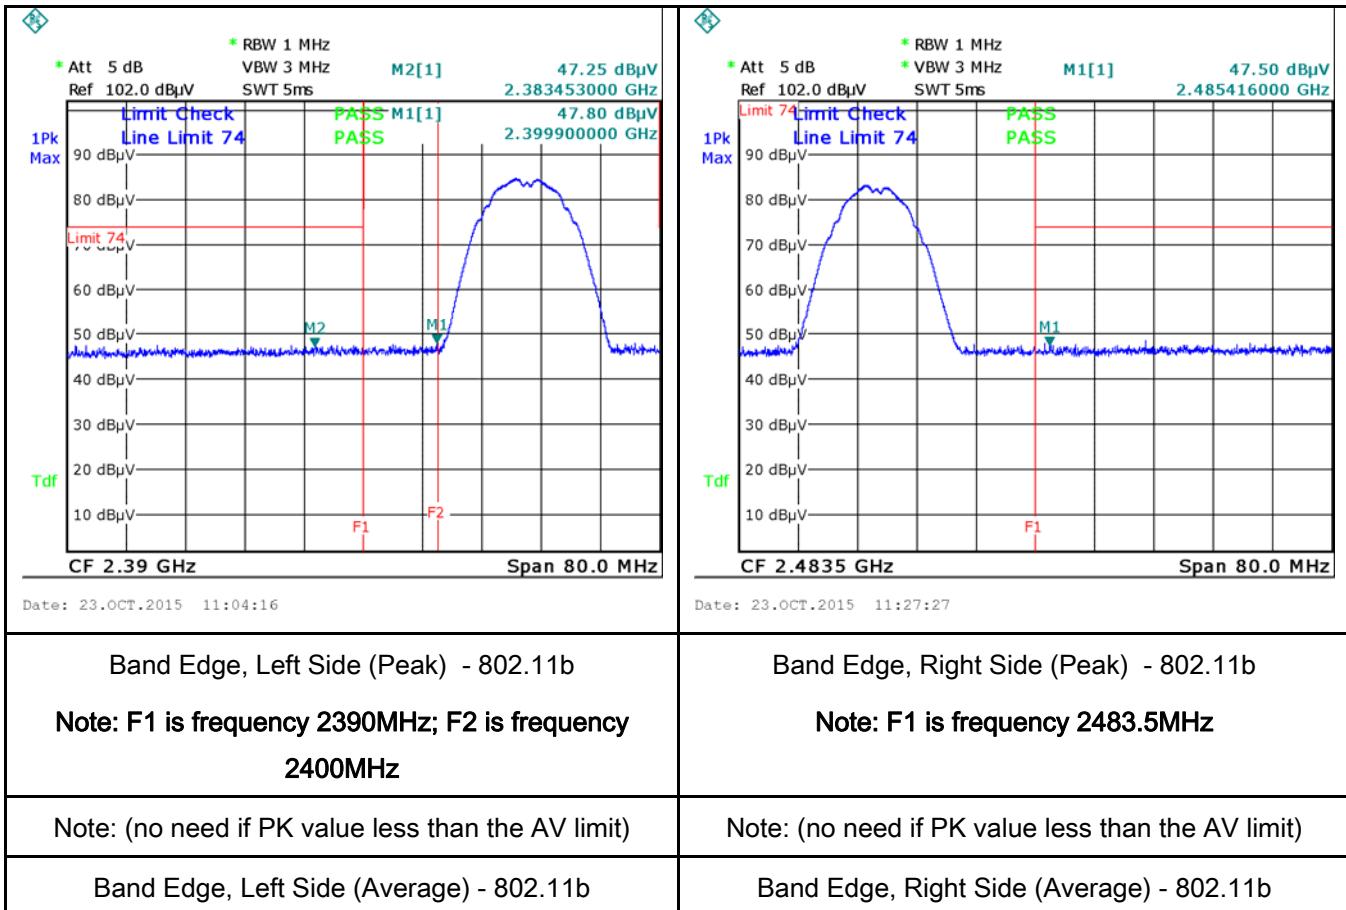

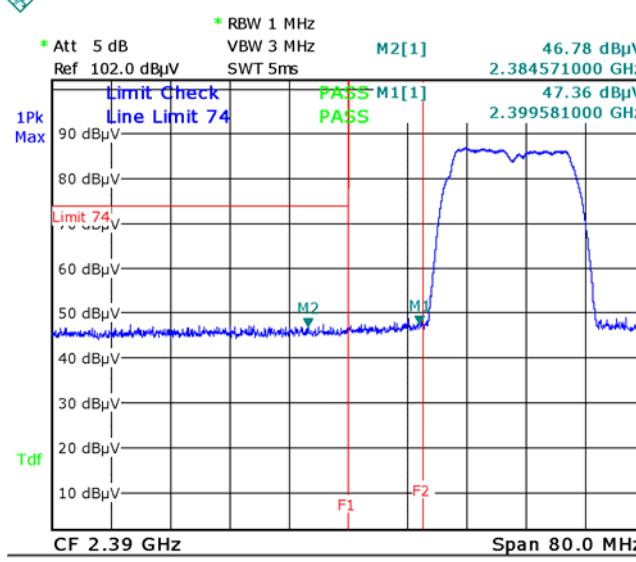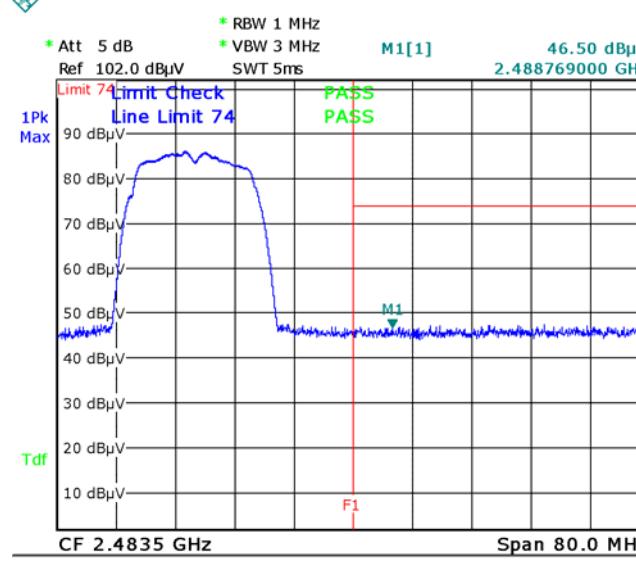 <p>M2[1] 46.78 dBμV 2.384571000 GHz</p> <p>M1[1] 47.36 dBμV 2.399581000 GHz</p> <p>1Pk Max</p> <p>Tdf</p> <p>CF 2.39 GHz Span 80.0 MHz</p> <p>1Pb</p> <p>Att 5 dB RBW 1 MHz VBW 3 MHz SWT 5ms</p> <p>Ref 102.0 dBμV</p> <p>Limit Check Line Limit 74 PASS M1[1] PASS</p> <p>Limit 74</p> <p>F1 F2</p>	 <p>M1[1] 46.50 dBμV 2.488769000 GHz</p> <p>1Pk Max</p> <p>Tdf</p> <p>CF 2.4835 GHz Span 80.0 MHz</p> <p>1Pb</p> <p>Att 5 dB RBW 1 MHz VBW 3 MHz SWT 5ms</p> <p>Ref 102.0 dBμV</p> <p>Limit 74 Limit Check Line Limit 74 PASS M1[1] PASS</p> <p>F1</p>
<p>Date: 23.OCT.2015 11:10:20</p> <p>Band Edge, Left Side (Peak) - 802.11g</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 23.OCT.2015 11:29:08</p> <p>Band Edge, Right Side (Peak) - 802.11g</p> <p>Note: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p> <p>Band Edge, Left Side (Average) - 802.11g</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Note: (no need if PK value less than the AV limit)</p> <p>Band Edge, Right Side (Average) - 802.11g</p> <p>Note: F1 is frequency 2483.5MHz</p>

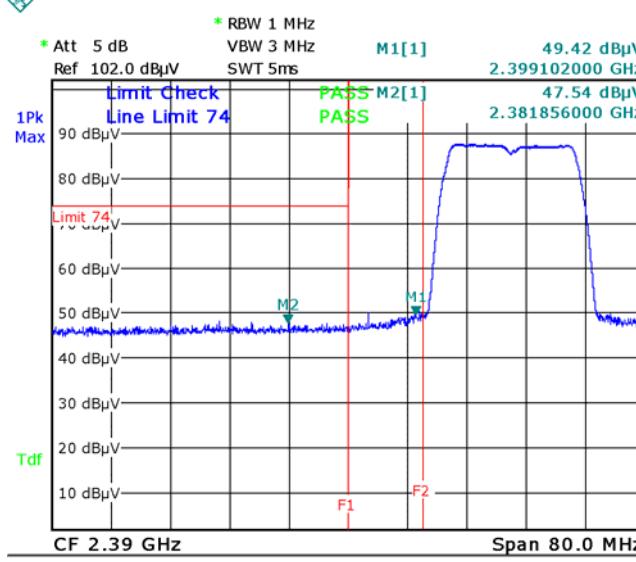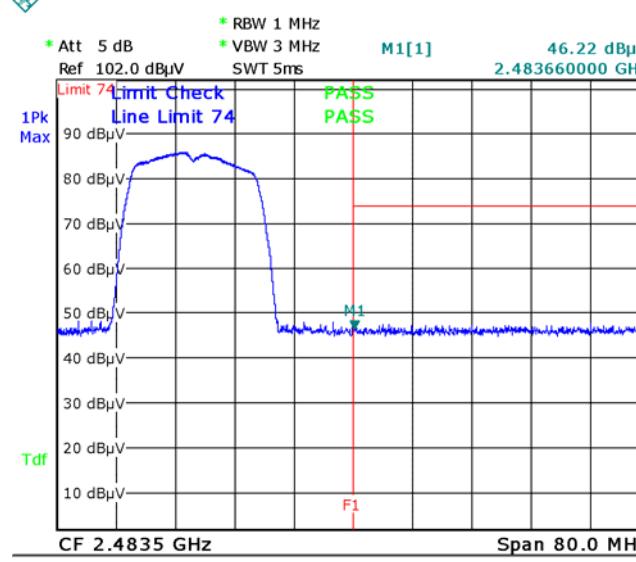
 <p>Test Report No. 15070892-FCC-R3</p> <p>Test Parameters:</p> <ul style="list-style-type: none"> * Att 5 dB * RBW 1 MHz Ref 102.0 dBμV VBW 3 MHz SWT 5ms <p>Results:</p> <ul style="list-style-type: none"> 1Pk Max: 49.42 dBμV at 2.399102000 GHz Line Limit 74: PASS Limit 74: PASS 1Df: 47.54 dBμV at 2.381856000 GHz CF: 2.39 GHz, Span: 80.0 MHz <p>Date: 23.OCT.2015 11:08:34</p>	 <p>Test Report No. 15070892-FCC-R3</p> <p>Test Parameters:</p> <ul style="list-style-type: none"> * Att 5 dB * RBW 1 MHz Ref 102.0 dBμV VBW 3 MHz SWT 5ms <p>Results:</p> <ul style="list-style-type: none"> 1Pk Max: 46.22 dBμV at 2.483660000 GHz Line Limit 74: PASS Limit 74: PASS 1Df: 46.22 dBμV at 2.4835 GHz CF: 2.4835 GHz, Span: 80.0 MHz <p>Date: 23.OCT.2015 11:31:07</p>
<p>Band Edge, Left Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>Band Edge, Left Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>

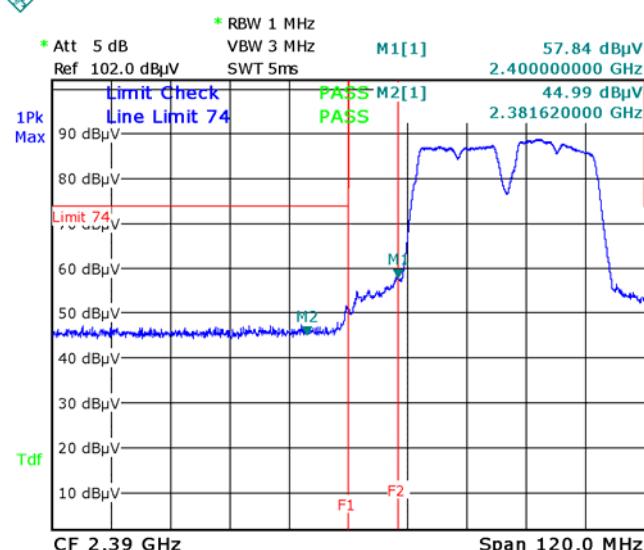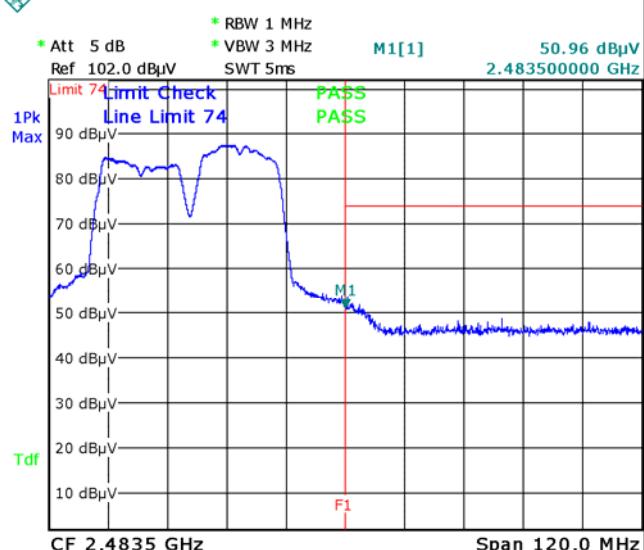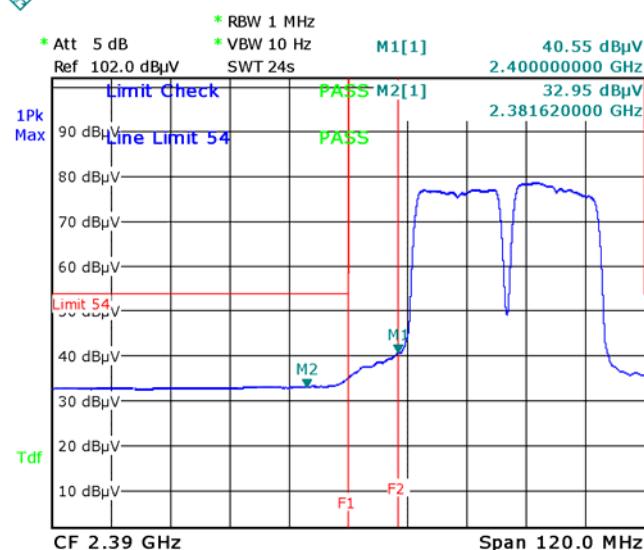 <p>* RBW 1 MHz * Att 5 dB Ref 102.0 dBμV VBW 3 MHz SWT 5ms M1[1] 57.84 dBμV 2.400000000 GHz</p> <p>1Pk Max 90 dBμV 80 dBμV Limit 74 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV M2 F1 F2</p> <p>Tdf CF 2.39 GHz Span 120.0 MHz</p> <p>Date: 23.OCT.2015 11:16:12</p>	 <p>* RBW 1 MHz * Att 5 dB Ref 102.0 dBμV VBW 3 MHz SWT 5ms M1[1] 50.96 dBμV 2.483500000 GHz</p> <p>1Pk Max 90 dBμV 80 dBμV Limit 74 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV M1 F1</p> <p>Tdf CF 2.4835 GHz Span 120.0 MHz</p> <p>Date: 23.OCT.2015 11:19:57</p>
<p>Band Edge, Left Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>* RBW 1 MHz * Att 5 dB Ref 102.0 dBμV VBW 10 Hz SWT 24s M1[1] 40.55 dBμV 2.400000000 GHz</p> <p>1Pk Max 90 dBμV 80 dBμV Line Limit 54 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV M2 F1 F2</p> <p>Tdf CF 2.39 GHz Span 120.0 MHz</p> <p>Date: 23.OCT.2015 11:17:11</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>Band Edge, Left Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>

6.6 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	October 23, 2015
Tested By :	Winnie Zhang

Requirement(s):

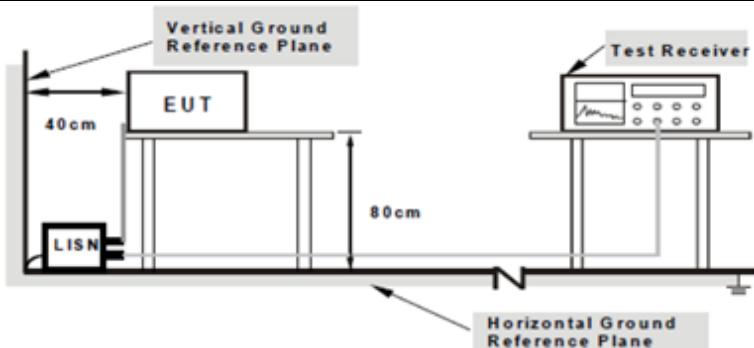
Spec	Item	Requirement	Applicable																				
47CFR§15.207,	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th colspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th colspan="2"></th> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> <td></td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> <td></td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> <td></td> </tr> </tbody> </table>	Frequency ranges (MHz)		Limit (dB μ V)				QP	Average	0.15 ~ 0.5	66 – 56	56 – 46		0.5 ~ 5	56	46		5 ~ 30	60	50		<input checked="" type="checkbox"/>
Frequency ranges (MHz)		Limit (dB μ V)																					
		QP	Average																				
0.15 ~ 0.5	66 – 56	56 – 46																					
0.5 ~ 5	56	46																					
5 ~ 30	60	50																					
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																						
Procedure	<ol style="list-style-type: none"> 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. 2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 																						

	5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Test Mode:	Transmitting Mode
------------	-------------------

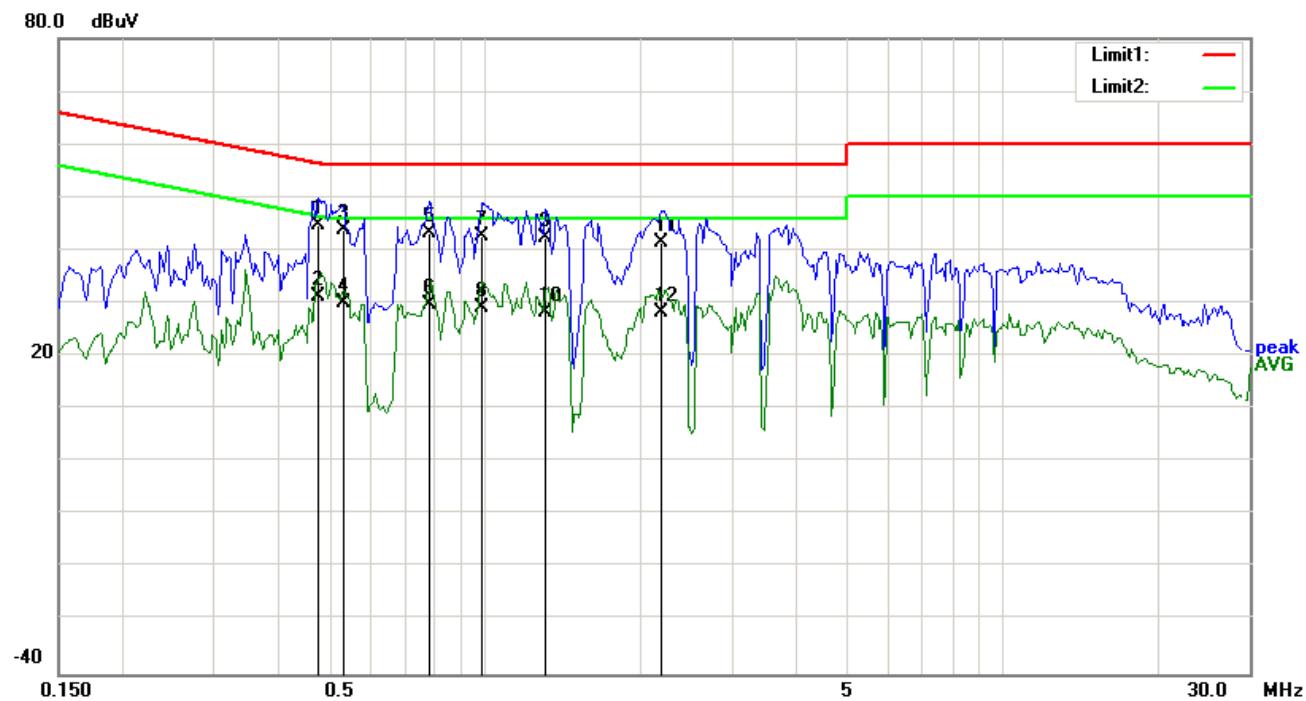


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	L1	0.4776	34.77	QP	10.03	44.80	56.38	-11.58
2	L1	0.4776	21.07	AVG	10.03	31.10	46.38	-15.28
3	L1	0.5322	33.72	QP	10.03	43.75	56.00	-12.25
4	L1	0.5322	20.15	AVG	10.03	30.18	46.00	-15.82
5	L1	0.7818	33.12	QP	10.03	43.15	56.00	-12.85
6	L1	0.7818	19.84	AVG	10.03	29.87	46.00	-16.13
7	L1	0.9885	32.74	QP	10.03	42.77	56.00	-13.23
8	L1	0.9885	19.22	AVG	10.03	29.25	46.00	-16.75
9	L1	1.3083	32.19	QP	10.03	42.22	56.00	-13.78
10	L1	1.3083	18.35	AVG	10.03	28.38	46.00	-17.62
11	L1	2.2014	31.54	QP	10.05	41.59	56.00	-14.41
12	L1	2.2014	18.26	AVG	10.05	28.31	46.00	-17.69

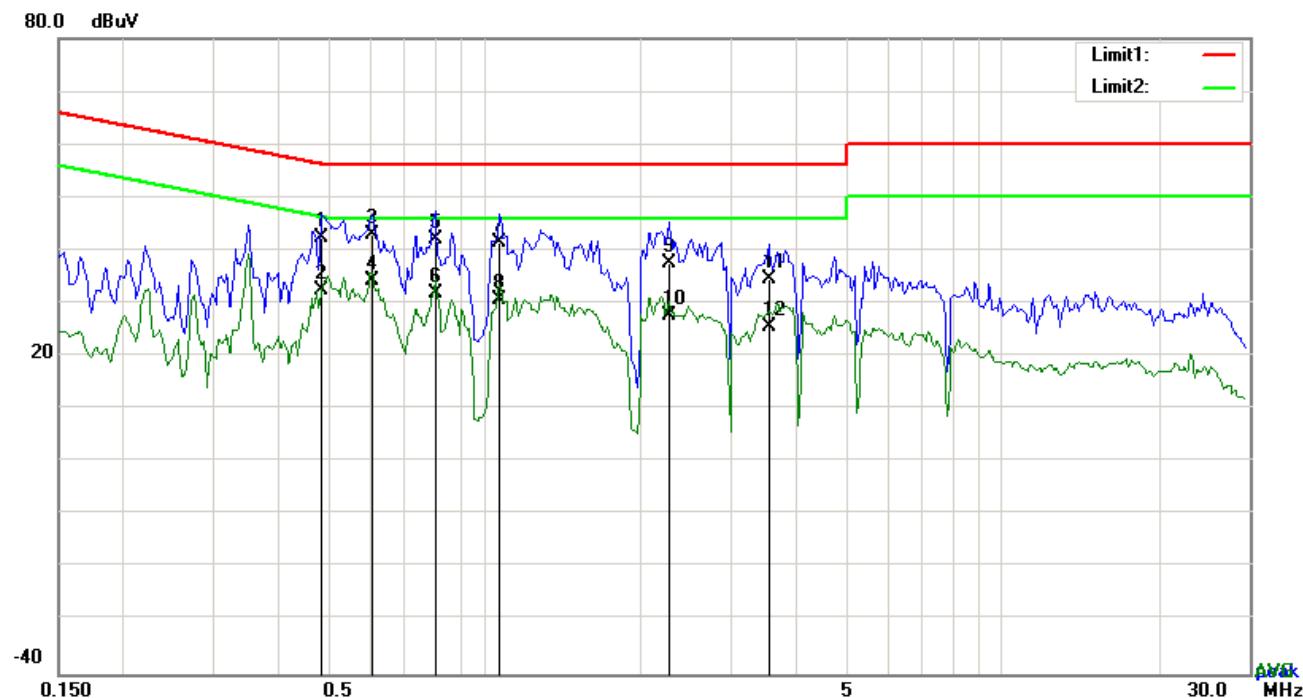Test Mode:
Transmitting Mode

Test Data
Phase Neutral Plot at 120Vac, 60Hz

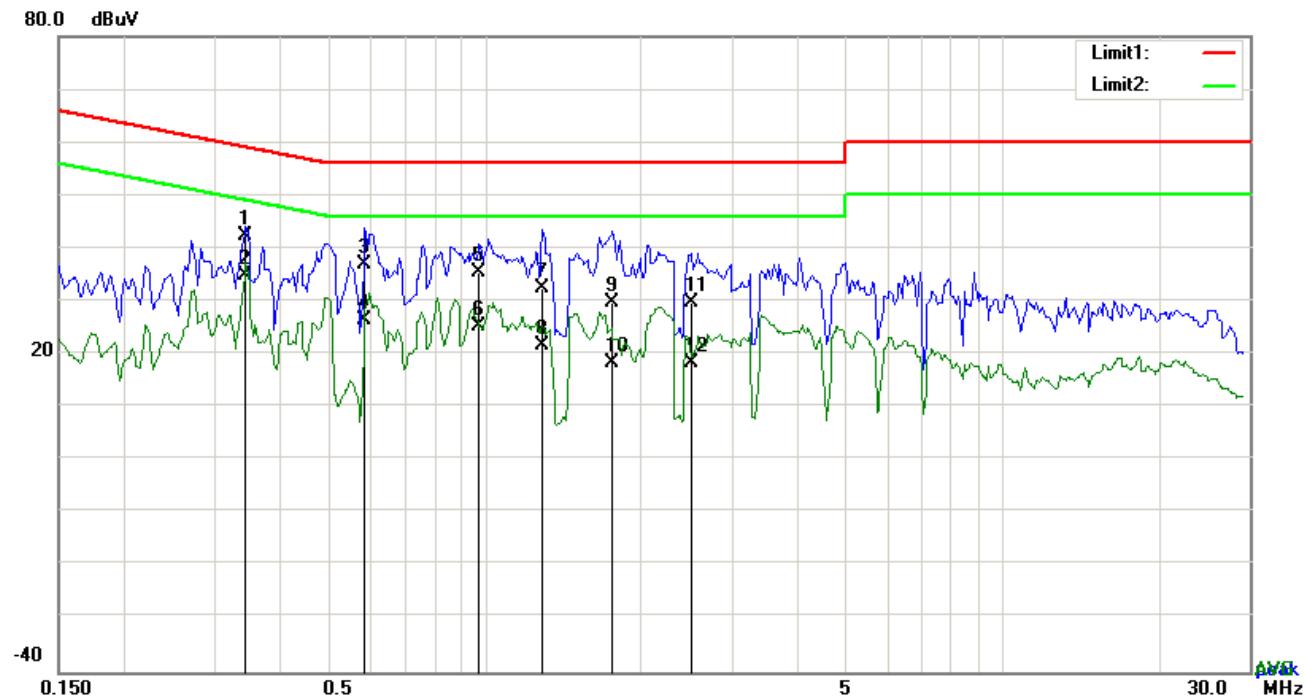No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	N	0.4815	32.26	QP	10.02	42.28	56.31	-14.03
2	N	0.4815	22.31	AVG	10.02	32.33	46.31	-13.98
3	N	0.6063	32.95	QP	10.02	42.97	56.00	-13.03
4	N	0.6063	24.32	AVG	10.02	34.34	46.00	-11.66
5	N	0.8013	32.06	QP	10.03	42.09	56.00	-13.91
6	N	0.8013	21.73	AVG	10.03	31.76	46.00	-14.24
7	N	1.0665	31.54	QP	10.03	41.57	56.00	-14.43
8	N	1.0665	20.59	AVG	10.03	30.62	46.00	-15.38
9	N	2.2677	27.41	QP	10.04	37.45	56.00	-18.55
10	N	2.2677	17.62	AVG	10.04	27.66	46.00	-18.34
11	N	3.5343	24.57	QP	10.06	34.63	56.00	-21.37
12	N	3.5343	15.47	AVG	10.06	25.53	46.00	-20.47


Test Mode:
Transmitting Mode


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	L1	0.3450	32.27	QP	10.03	42.30	59.08	-16.78
2	L1	0.3450	24.90	AVG	10.03	34.93	49.08	-14.15
3	L1	0.5868	26.80	QP	10.03	36.83	56.00	-19.17
4	L1	0.5868	16.43	AVG	10.03	26.46	46.00	-19.54
5	L1	0.9768	25.32	QP	10.03	35.35	56.00	-20.65
6	L1	0.9768	15.29	AVG	10.03	25.32	46.00	-20.68
7	L1	1.2927	22.45	QP	10.03	32.48	56.00	-23.52
8	L1	1.2927	11.54	AVG	10.03	21.57	46.00	-24.43
9	L1	1.7685	19.63	QP	10.04	29.67	56.00	-26.33
10	L1	1.7685	8.39	AVG	10.04	18.43	46.00	-27.57
11	L1	2.5095	19.61	QP	10.05	29.66	56.00	-26.34
12	L1	2.5095	8.32	AVG	10.05	18.37	46.00	-27.63

Test Mode:	Transmitting Mode
------------	-------------------

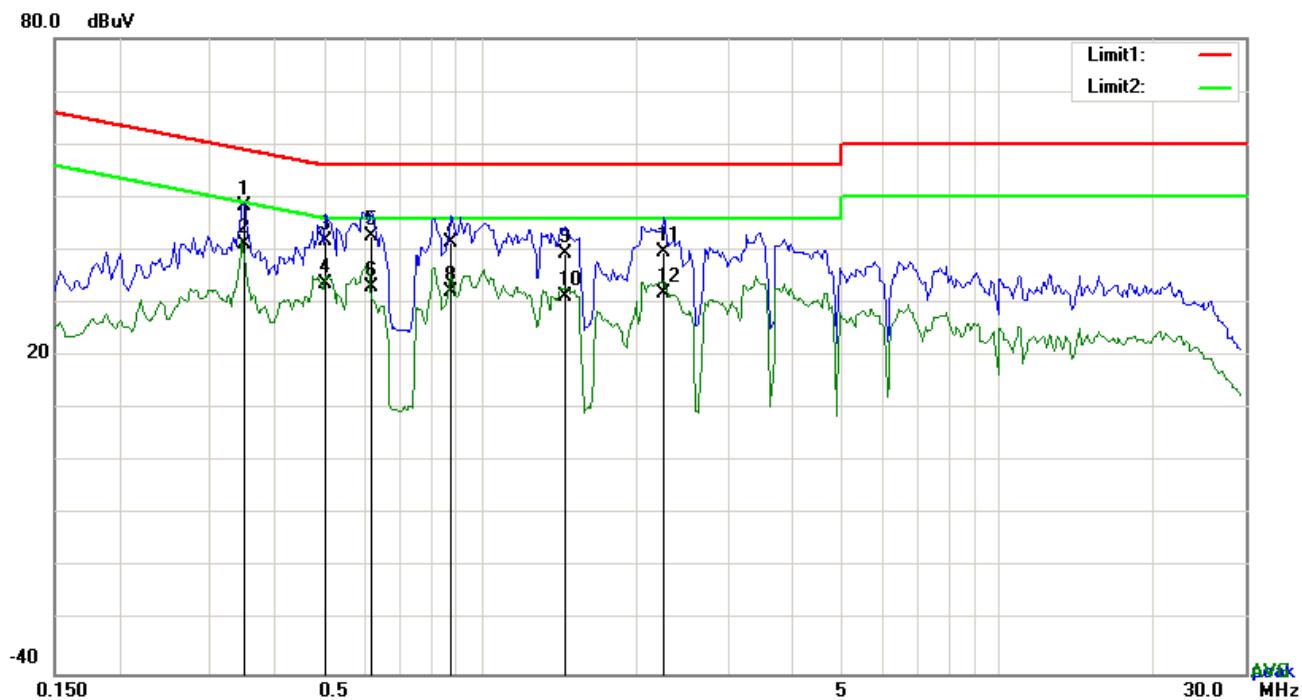

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	N	0.3489	38.34	QP	10.02	48.36	58.99	-10.63
2	N	0.3489	31.05	AVG	10.02	41.07	48.99	-7.92
3	N	0.5010	31.77	QP	10.02	41.79	56.00	-14.21
4	N	0.5010	23.67	AVG	10.02	33.69	46.00	-12.31
5	N	0.6141	32.65	QP	10.02	42.67	56.00	-13.33
6	N	0.6141	23.12	AVG	10.02	33.14	46.00	-12.86
7	N	0.8793	31.37	QP	10.03	41.40	56.00	-14.60
8	N	0.8793	22.16	AVG	10.03	32.19	46.00	-13.81
9	N	1.4487	29.20	QP	10.03	39.23	56.00	-16.77
10	N	1.4487	21.15	AVG	10.03	31.18	46.00	-14.82
11	N	2.2521	29.70	QP	10.04	39.74	56.00	-16.26
12	N	2.2521	21.92	AVG	10.04	31.96	46.00	-14.04

6.7 Radiated Emissions

Temperature	24°C
Relative Humidity	56%
Atmospheric Pressure	1023mbar
Test date :	October 23, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15. 247(d),	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
b)	<p>For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required</p> <p><input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down</p>	<input checked="" type="checkbox"/>											
c)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>											

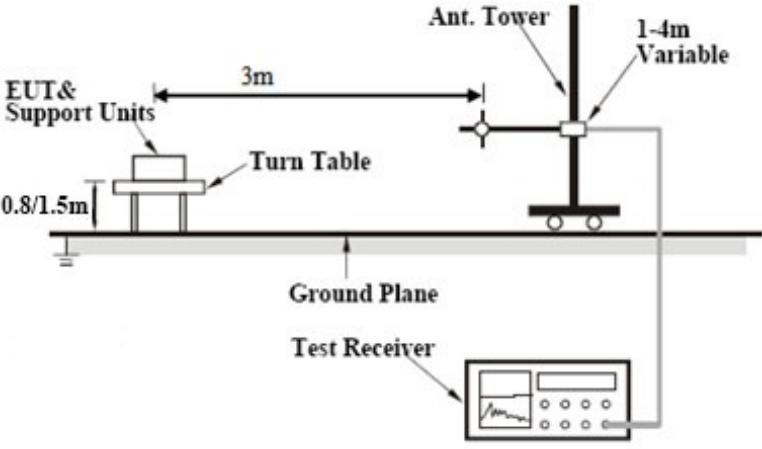
Test Setup	 <p>The diagram illustrates the test setup. An EUT & Support Units assembly is mounted on a Turn Table, which is positioned on a Ground Plane. The Turn Table is 0.8/1.5m from the ground plane. A vertical Ant. Tower is connected to the turn table via a horizontal crossbar. The tower has a height adjustment labeled '1-4m Variable'. A Test Receiver is connected to the turn table, and its signal is processed by a spectrum analyzer.</p>
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	<p>Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n – HT20-2437MHz mode.</p>
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Transmitting Mode

(Below 1GHz)

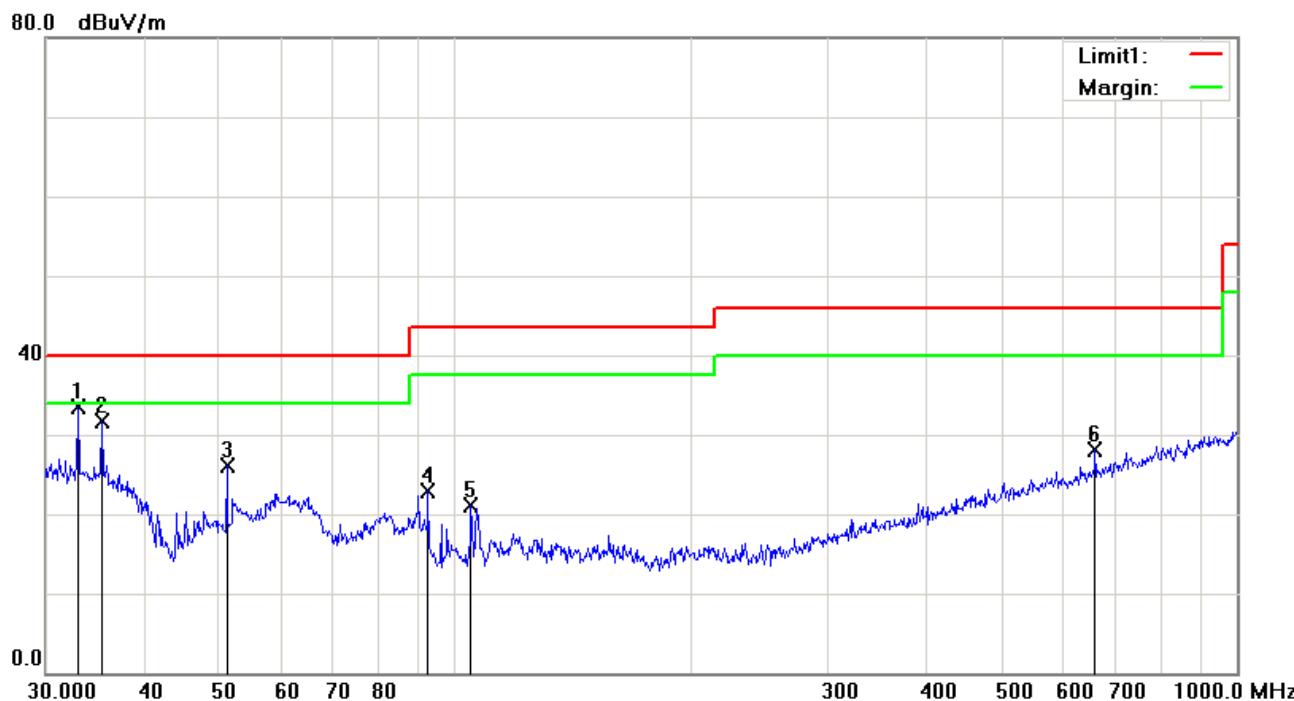


Test Data

Vertical Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Height	Degree
1	V	32.9791	36.00	peak	-2.45	33.55	40.00	-6.45	100	205
2	V	35.3750	35.83	peak	-4.21	31.62	40.00	-8.38	100	179
3	V	51.1209	39.41	peak	-13.30	26.11	40.00	-13.89	100	179
4	V	92.4624	35.58	peak	-12.76	22.82	43.50	-20.68	100	220
5	V	104.9033	30.96	peak	-9.93	21.03	43.50	-22.47	100	137
6	V	658.8362	27.26	peak	0.91	28.17	46.00	-17.83	100	104

(Below 1GHz)

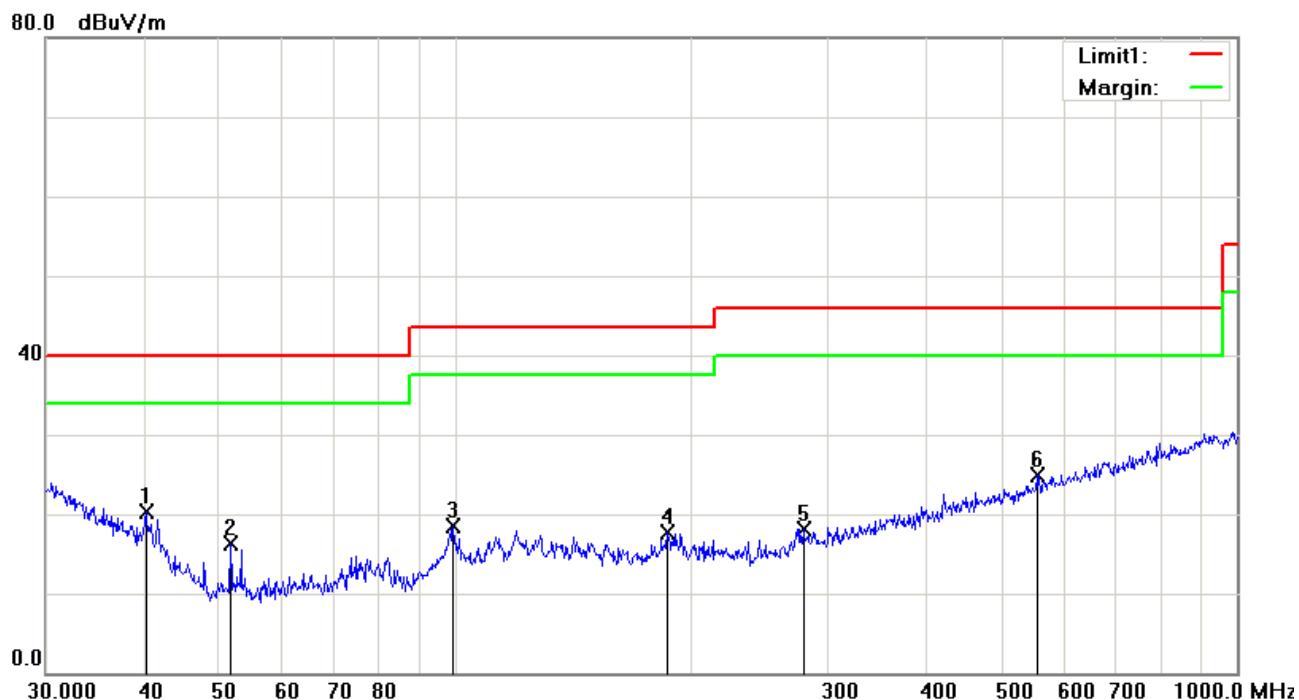

Test Data

Horizontal Polarity Plot @3m

No	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Height	Degree
1	H	40.2757	28.06	peak	-7.77	20.29	40.00	-19.71	100	75
2	H	51.6616	29.67	peak	-13.37	16.30	40.00	-23.70	100	173
3	H	99.5281	29.49	peak	-10.92	18.57	43.50	-24.93	100	270
4	H	187.0958	27.10	peak	-9.42	17.68	43.50	-25.82	100	113
5	H	279.0436	26.02	peak	-7.86	18.16	46.00	-27.84	100	75
6	H	554.8254	25.63	peak	-0.73	24.90	46.00	-21.10	100	120

Test Mode:
Transmitting Mode
Low Channel (2412 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4824	38.56	AV	V	34	6.86	31.72	47.7	54	-6.3
4824	38.12	AV	H	33.8	6.86	31.72	47.06	54	-6.94
4824	46.59	PK	V	34	6.86	31.72	55.73	74	-18.27
4824	46.05	PK	H	33.8	6.86	31.72	54.99	74	-19.01

Middle Channel (2437 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4874	38.63	AV	V	33.6	6.82	31.82	47.23	54	-6.77
4874	38.07	AV	H	33.8	6.82	31.82	46.87	54	-7.13
4874	46.65	PK	V	33.6	6.82	31.82	55.25	74	-18.75
4874	46.22	PK	H	33.8	6.82	31.82	55.02	74	-18.98

High Channel (2462 MHz)


Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4924	38.49	AV	V	34.6	6.76	31.92	47.93	54	-6.07
4924	38.15	AV	H	34.7	6.76	31.92	47.69	54	-6.31
4924	46.31	PK	V	34.6	6.76	31.92	55.75	74	-18.25
4924	46.18	PK	H	34.7	6.76	31.92	55.72	74	-18.28


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/23/2016	<input checked="" type="checkbox"/>


Annex B. EUT and Test Setup Photographs


Annex B.i. Photograph: EUT External Photo

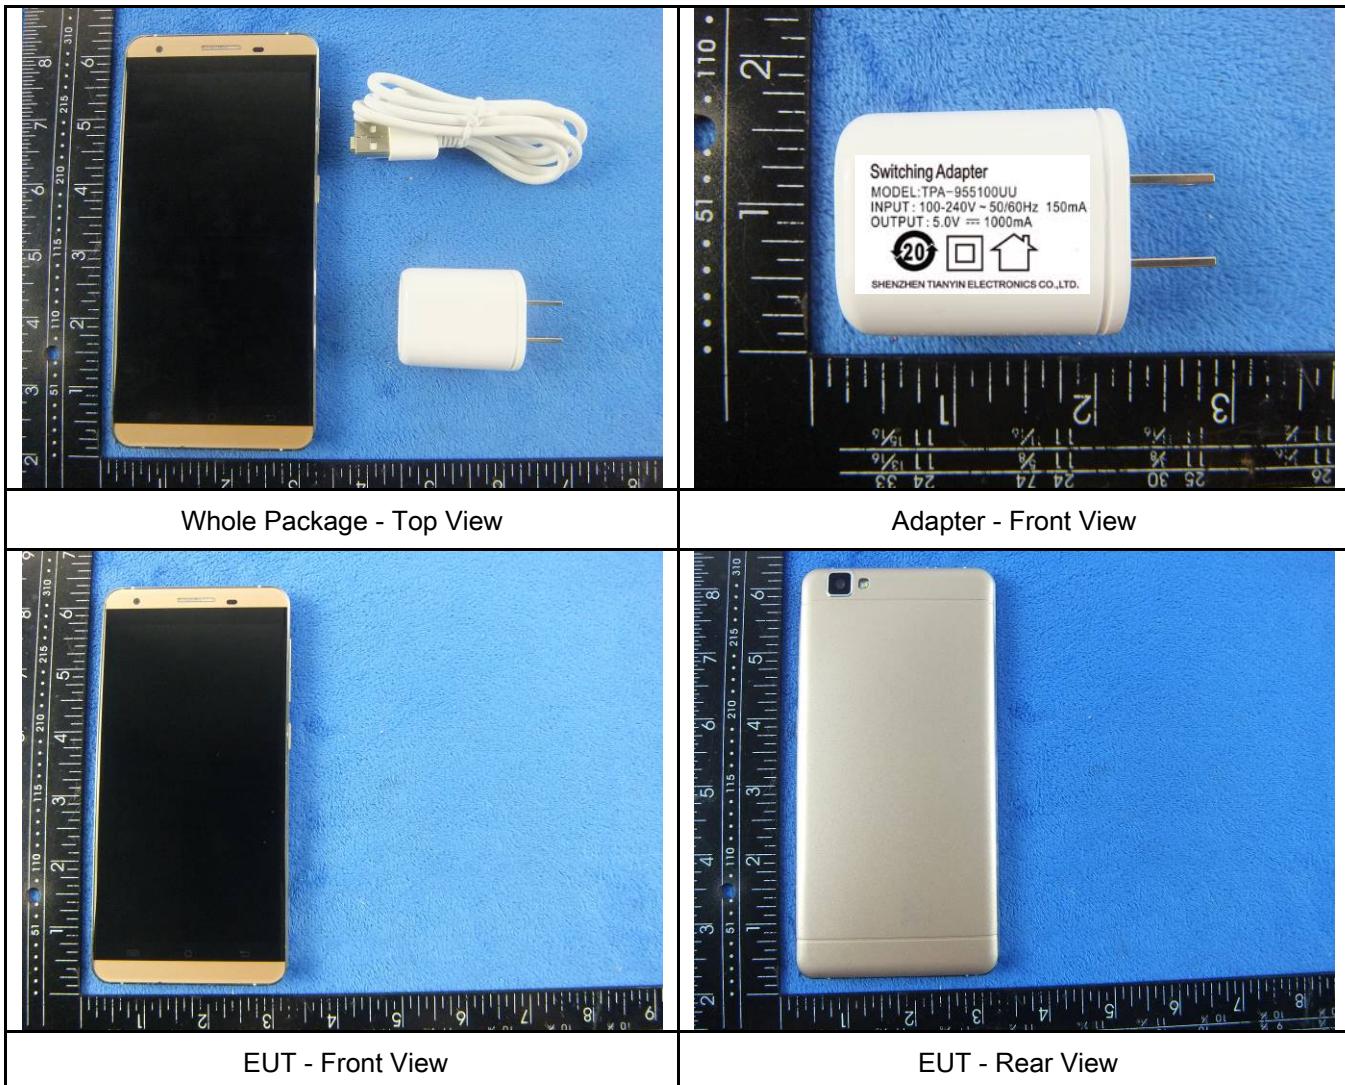

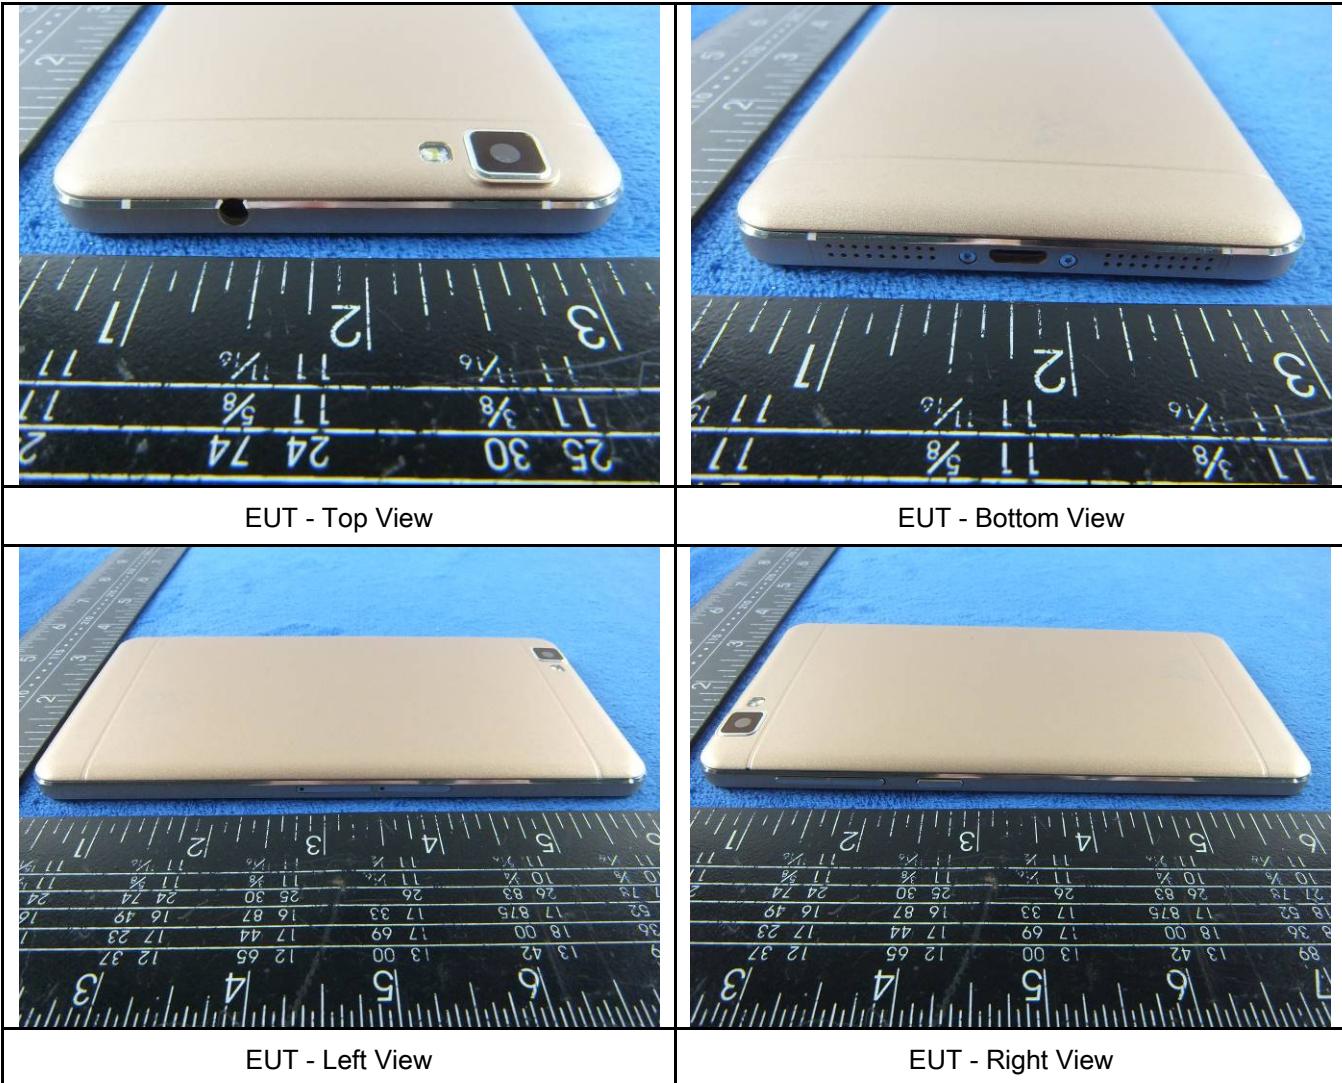


Annex B.ii. Photograph: EUT Internal Photo

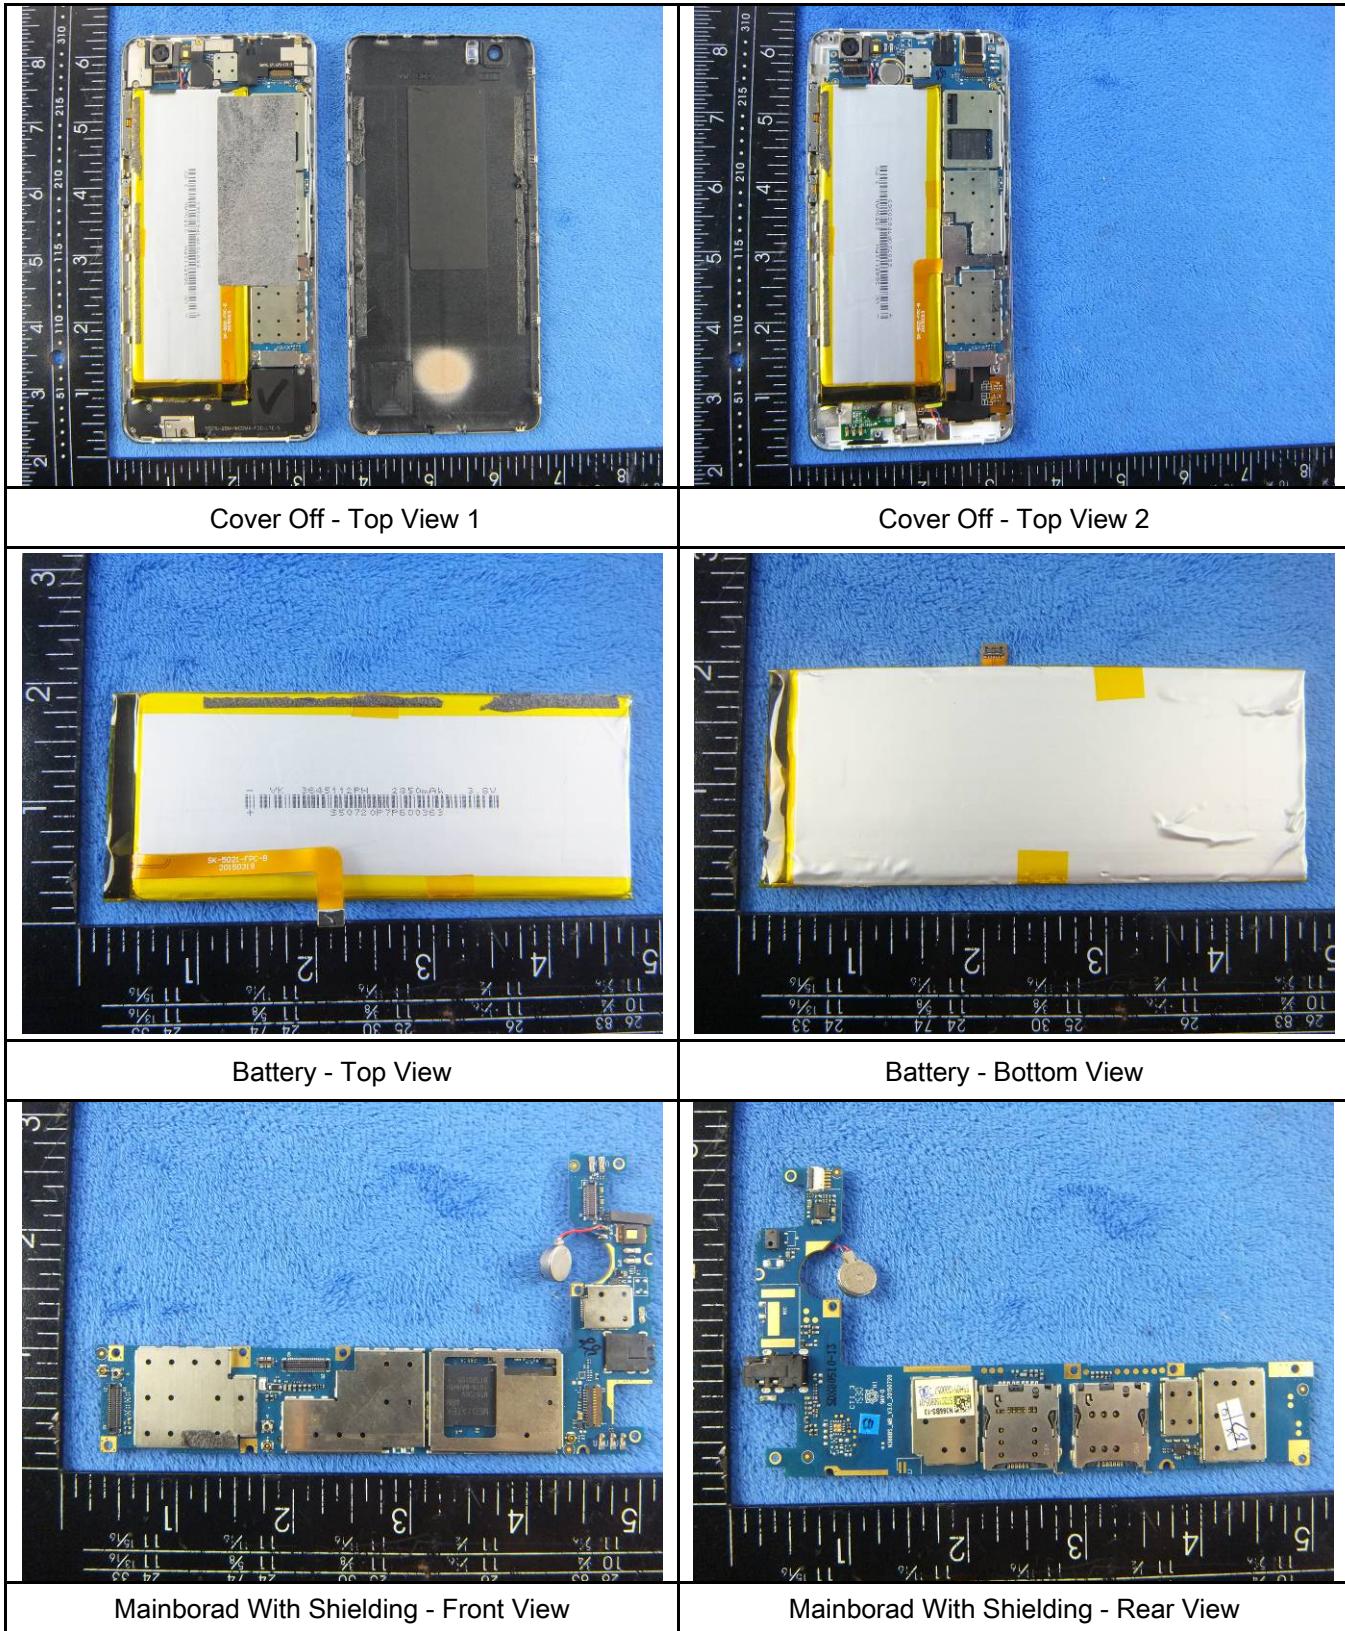

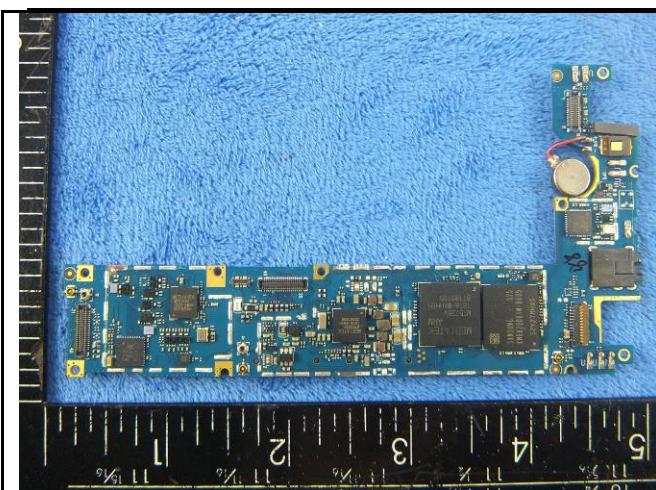

Mainborad Without Shielding - Front View

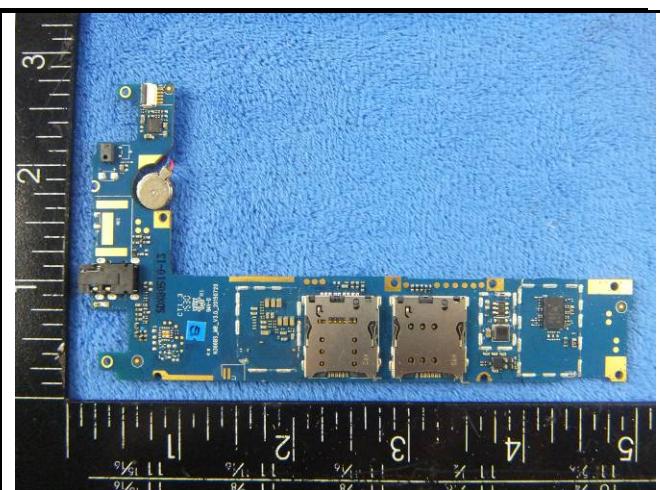

Mainborad Without Shielding - Rear View



LCD – Front View



LCD – Rear View



GSM/PCS/UMTS-FDD Antenna View





WIFI/BT/BLE - Antenna View

Test Report No.	15070892-FCC-R3
Page	47 of 54



GPS/LTE - Antenna View


Annex B.iii. Photograph: Test Setup Photo

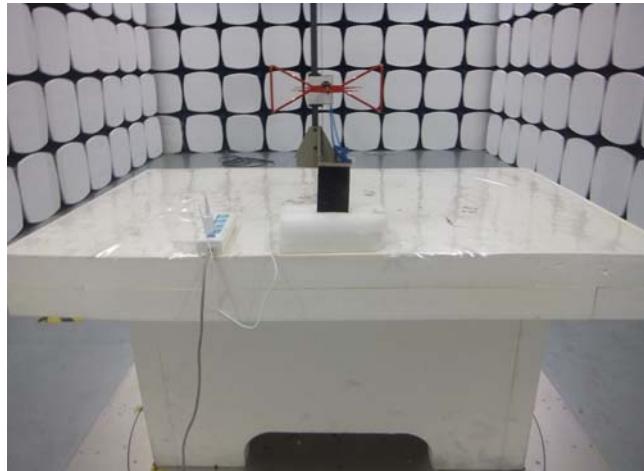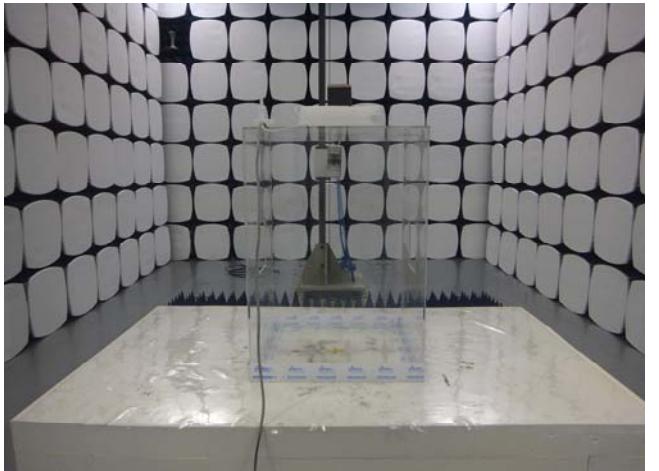 A photograph showing a wooden table in a test chamber. On the table is a white rectangular device, likely a smartphone, and a power strip with multiple outlets. A black power cord is connected to the device and the power strip. The background shows the interior of a test chamber with a metal frame and some equipment on the floor.	 A photograph showing a side view of the test setup. A power strip is on a wooden table, connected to a white rectangular device. A black power cord is visible. The background shows the side of the test chamber.
Conducted Emissions Test Setup Front View	Conducted Emissions Test Setup Side View
 A photograph of a test setup in a large anechoic chamber. The device is mounted on a black rectangular board, which is placed on a white rectangular platform. The platform is covered with a reflective material. The background is the interior of the chamber, which is lined with a grid of white and black panels.	 A photograph of a test setup in a large anechoic chamber. The device is mounted on a black rectangular board, which is placed on a white rectangular platform. The platform is covered with a reflective material. The background is the interior of the chamber, which is lined with a grid of white and black panels.
Radiated Spurious Emissions Test Setup Below 1GHz	Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

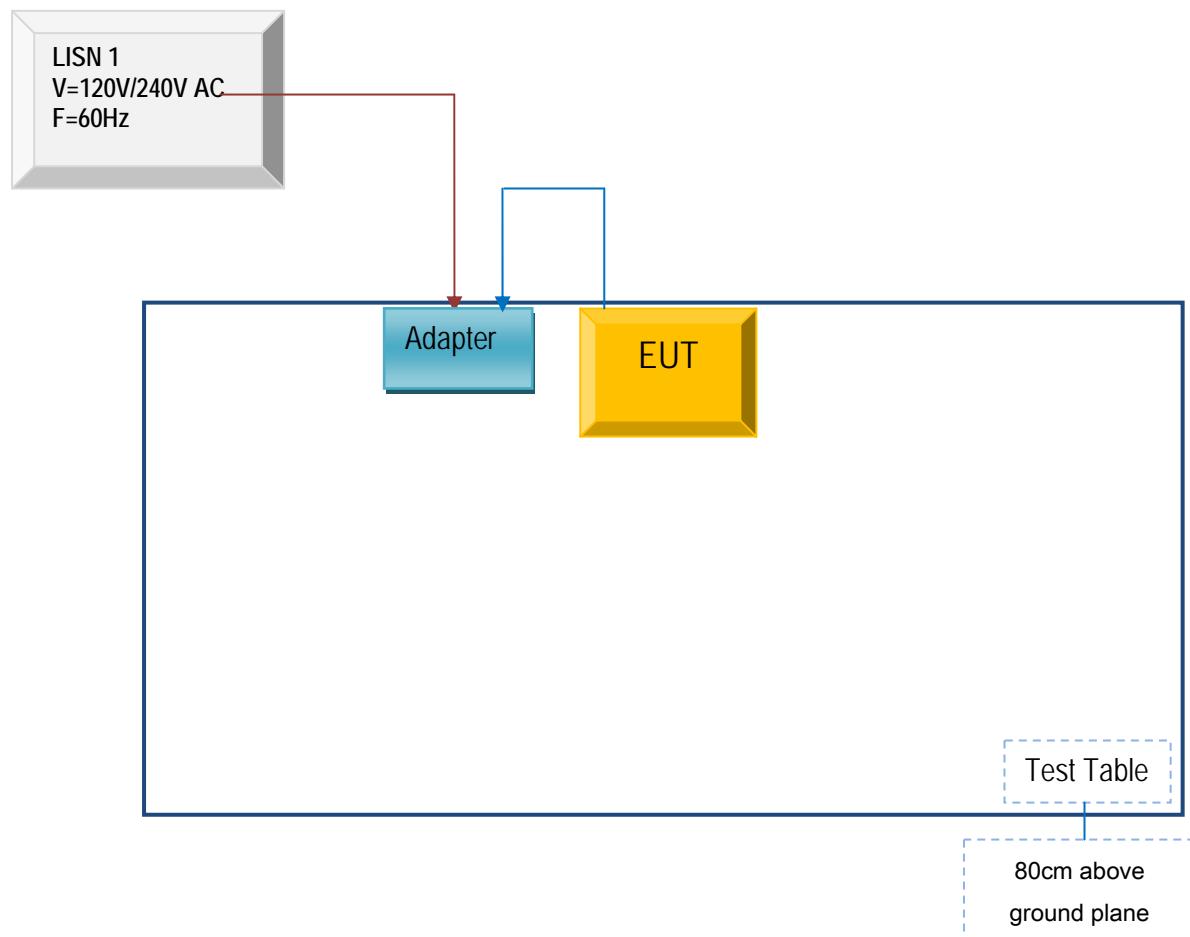

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

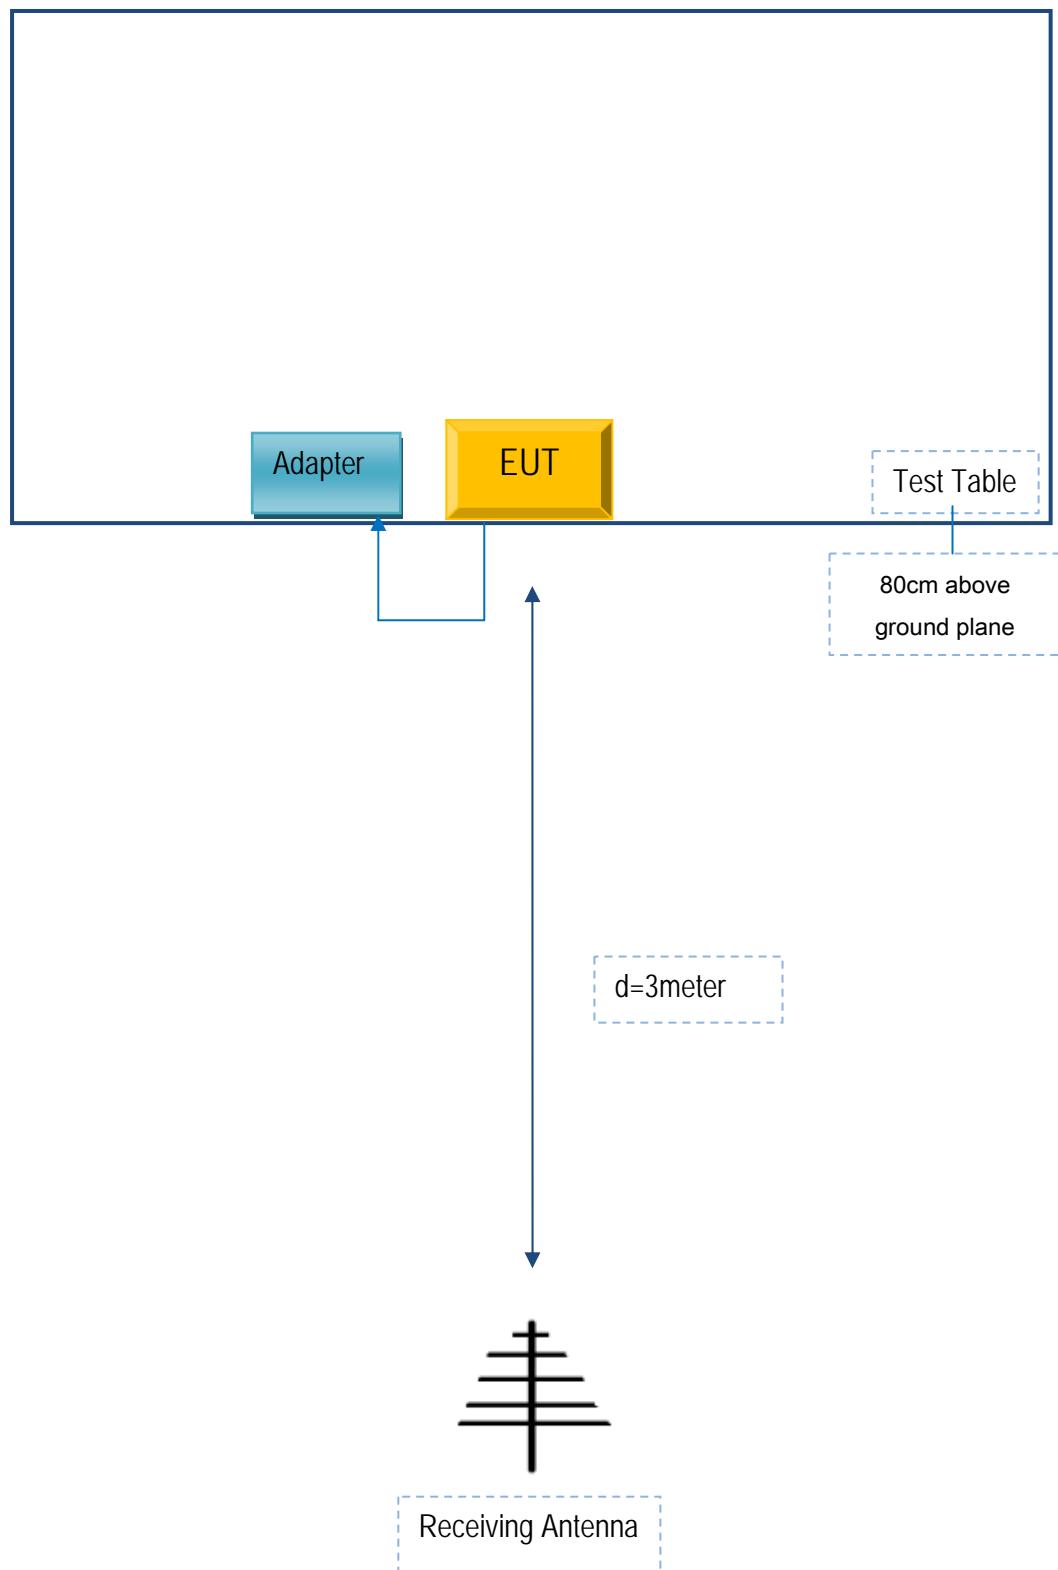

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

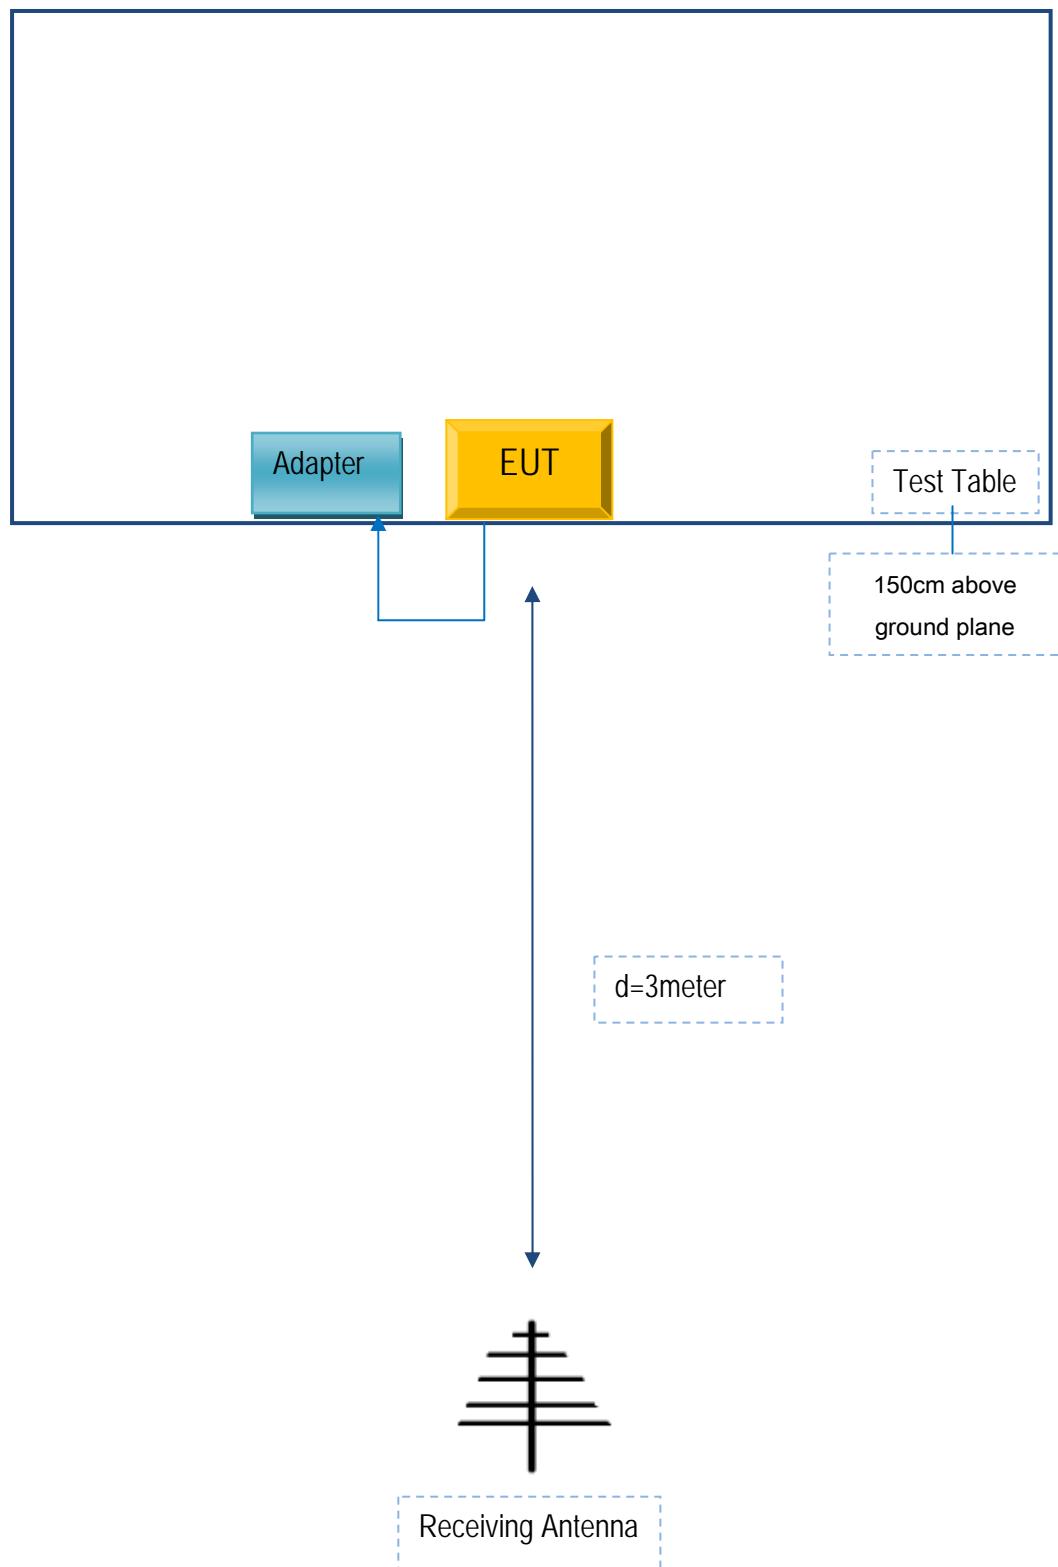

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Test Report No.	15070892-FCC-R3
Page	53 of 54

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report No.	15070892-FCC-R3
Page	54 of 54

Annex E. DECLARATION OF SIMILARITY

N/A