

TEST REPORT

Applicant: GuangZhou Chicken Run Network Technology Co.,Ltd.

Address of Applicant: 301A-1,NO.68,Huacui Street,Jianye Road,Tianhe District,GuangZhou

Manufacturer/Factory: ShenZhen MYGT Co.,Ltd

Address of Manufacturer/Factory: D3 Tongfuyu Industrial Area Community of Shajing Town ,Baoan,ShenZhen,China

Equipment Under Test (EUT)

Product Name: GameSir G4 pro Dongle

Model No.: GameSir G4 pro, GameSir G4 pro Lite, GameSir G4 pro2

Applicable standards: FCC CFR Title 47 Part 15 Subpart B

Date of sample receipt: Sep. 23, 2020

Date of Test: Sep. 23, 2020 ~ Oct. 15, 2020

Date of report issued: Oct. 29, 2020

Test Result : Pass *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular blue stamp with the text "GLOBAL UNITED TECHNOLOGY SERVICES" around the perimeter and "GTS" in the center. Overlaid on the stamp is a handwritten signature in black ink.

Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	Oct. 29, 2020	Original

Prepared by:



Date:

Oct. 29, 2020

Project Engineer

Reviewed by:



Date:

Oct. 29, 2020

Reviewer

3 Contents

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION.....	5
5.1	GENERAL DESCRIPTION OF EUT	5
5.2	TEST MODE AND TEST VOLTAGE	5
5.3	DESCRIPTION OF SUPPORT UNITS	5
5.4	DEVIATION FROM STANDARDS	5
5.5	ABNORMALITIES FROM STANDARD CONDITIONS.....	5
5.6	TEST FACILITY	5
5.7	TEST LOCATION.....	6
6	TEST INSTRUMENTS LIST	7
7	TEST RESULTS AND MEASUREMENT DATA.....	9
7.1	RADIATED EMISSION	9
7.2	CONDUCTED EMISSIONS	12
8	TEST SETUP PHOTO	15
9	EUT CONSTRUCTIONAL DETAILS	17

4 Test Summary

Test Item	Test Requirement	Test Method	Class / Severity	Result
Conducted Emission	FCC Part15.107	ANSI C63.4	Class B	PASS
Radiated Emissions #	FCC Part15.109	ANSI C63.4	Class B	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. # Refer to FCC Part 15.33 (b)(1) conditional testing procedure :

The highest frequency generated or used in the EUT	Test frequency range of Radiated emission
<108MHz	30MHz ~ 1GHz
108MHz ~ 500MHz	30MHz ~ 2GHz
500MHz ~ 1GHz	30MHz ~ 5GHz
>1GHz	30MHz ~ 5th harmonic of the highest frequency or 40 GHz, whichever is lower.

The highest frequency of the internal sources of the EUT is less than 108MHz.

5 General Information

5.1 General Description of EUT

Product Name:	GameSir G4 pro Dongle
Model No.:	GameSir G4 pro, GameSir G4 pro Lite, GameSir G4 pro2
Power Supply:	N/A

5.2 Test mode and Test voltage

Test mode: GameSir G4 pro	
On mode	Keep the EUT in continuously transmitting mode.
Test voltage:	
DC 5.0V	

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
N/A	N/A	N/A	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383. ● IC —Registration No.: 9079A The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A. ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0.

5.7 Test Location

Tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test Results and Measurement Data


7.1 Radiated Emission

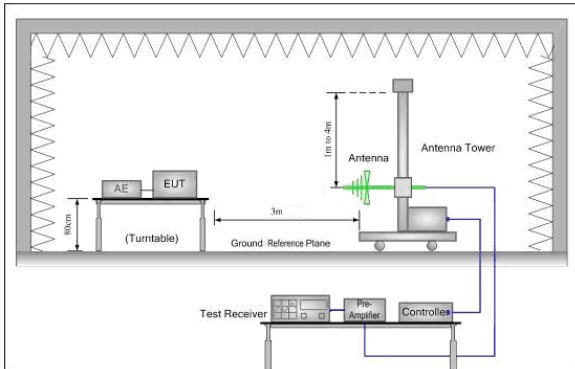Test Requirement:	FCC Part15 B Section 15.109																		
Test Method:	ANSI C63.4:2014																		
Test Frequency Range:	30MHz to 1GHz																		
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																		
Receiver setup:	<table><tr><th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Value</th></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120kHz</td><td>300kHz</td><td>Quasi-peak</td></tr></table>				Frequency	Detector	RBW	VBW	Value	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak					
Frequency	Detector	RBW	VBW	Value															
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak															
Limit:	<table><tr><th>Frequency</th><th>Limit (dBμV/m @3m)</th><th>Value</th></tr><tr><td>30MHz-88MHz</td><td>40.00</td><td>Quasi-peak</td></tr><tr><td>88MHz-216MHz</td><td>43.50</td><td>Quasi-peak</td></tr><tr><td>216MHz-960MHz</td><td>46.00</td><td>Quasi-peak</td></tr><tr><td>960MHz-1GHz</td><td>54.00</td><td>Quasi-peak</td></tr></table>				Frequency	Limit (dBμV/m @3m)	Value	30MHz-88MHz	40.00	Quasi-peak	88MHz-216MHz	43.50	Quasi-peak	216MHz-960MHz	46.00	Quasi-peak	960MHz-1GHz	54.00	Quasi-peak
Frequency	Limit (dBμV/m @3m)	Value																	
30MHz-88MHz	40.00	Quasi-peak																	
88MHz-216MHz	43.50	Quasi-peak																	
216MHz-960MHz	46.00	Quasi-peak																	
960MHz-1GHz	54.00	Quasi-peak																	
Test setup:																			
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than																		

	the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 012mbar
Measurement Record:	Uncertainty: 3.8039dB (30MHz-200MHz) 3.9679dB (200MHz-1GHz)
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test mode:	On mode	Antenna Polarity:	Horizontal
------------	---------	-------------------	------------

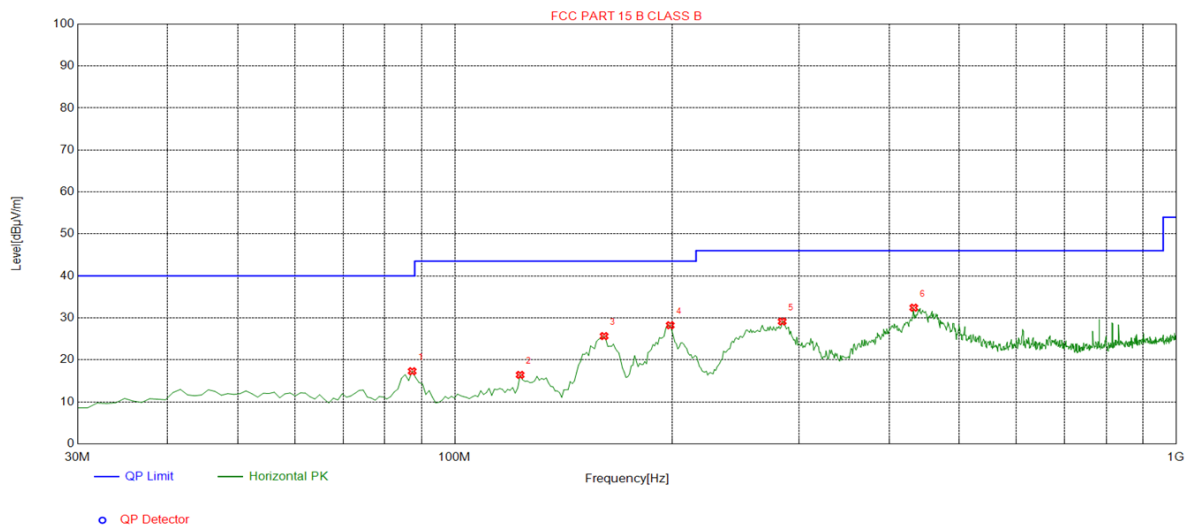

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	87.2873	-17.72	35.01	17.29	40.00	22.71	100	188	Horizontal
2	123.2132	-17.57	33.99	16.42	43.50	27.08	100	84	Horizontal
3	161.0811	-18.12	43.78	25.66	43.50	17.84	100	48	Horizontal
4	198.9489	-15.16	43.40	28.24	43.50	15.26	100	260	Horizontal
5	284.3944	-13.07	42.21	29.14	46.00	16.86	100	263	Horizontal
6	432.9530	-9.72	42.15	32.43	46.00	13.57	100	165	Horizontal

Test mode:	On mode	Antenna Polarity:	Vertical
------------	---------	-------------------	----------

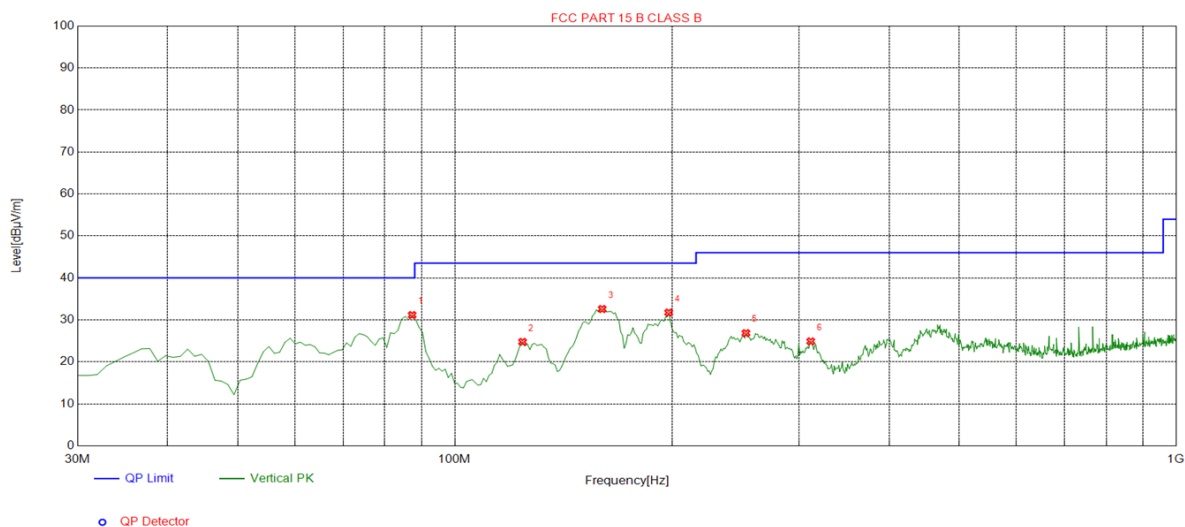

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	87.2873	-17.72	48.87	31.15	40.00	8.85	100	51	Vertical
2	124.1842	-17.72	42.48	24.76	43.50	18.74	100	168	Vertical
3	160.1101	-18.21	50.80	32.59	43.50	10.91	100	142	Vertical
4	197.9780	-15.25	46.99	31.74	43.50	11.76	100	126	Vertical
5	253.3233	-13.43	40.27	26.84	46.00	19.16	100	149	Vertical
6	311.5816	-12.53	37.40	24.87	46.00	21.13	100	334	Vertical

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

7.2 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107																			
Test Method:	ANSI C63.4:2014																			
Test Frequency Range:	150kHz to 30MHz																			
Class / Severity:	Class B																			
Receiver setup:	RBW=9kHz, VBW=30kHz																			
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>0.5-30</td><td>60</td><td>50</td></tr></table>						Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	0.5-30	60	50
Frequency range (MHz)	Limit (dBμV)																			
	Quasi-peak	Average																		
0.15-0.5	66 to 56*	56 to 46*																		
0.5-5	56	46																		
0.5-30	60	50																		
Test setup:	Reference Plane <i>Remark:</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i>																			
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2009 on conducted measurement.																			
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1 012mbar														
Measurement Record:	Uncertainty: 3.44dB																			
Test Instruments:	Refer to section 6 for details																			
Test mode:	Refer to section 5.2 for details																			
Test results:	Pass																			

Measurement Data


Test mode:	On mode	Phase Polarity:	Line
------------	---------	-----------------	------

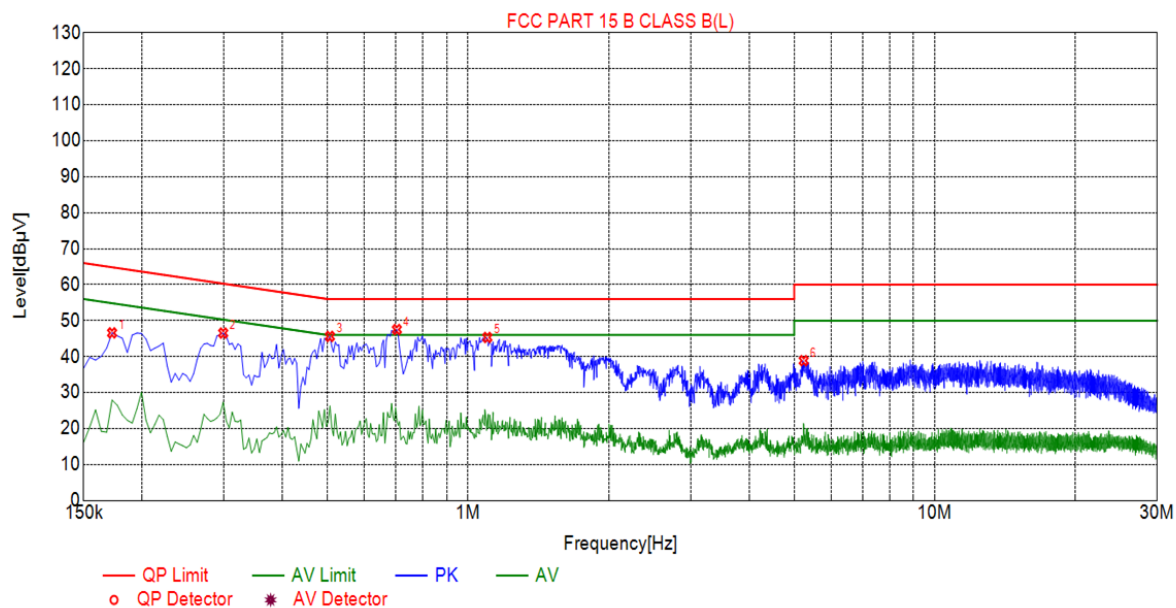

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1725	46.59	20.04	64.84	18.25	26.55	PK	L
2	0.2985	46.54	20.04	60.28	13.74	26.50	PK	L
3	0.5055	45.61	20.04	56.00	10.39	25.57	PK	L
4	0.7035	47.53	20.05	56.00	8.47	27.48	PK	L
5	1.0995	45.32	20.07	56.00	10.68	25.25	PK	L
6	5.2395	38.87	20.26	60.00	21.13	18.61	PK	L

Test mode:	On mode(Max)	Phase Polarity:	Neutral
------------	--------------	-----------------	---------

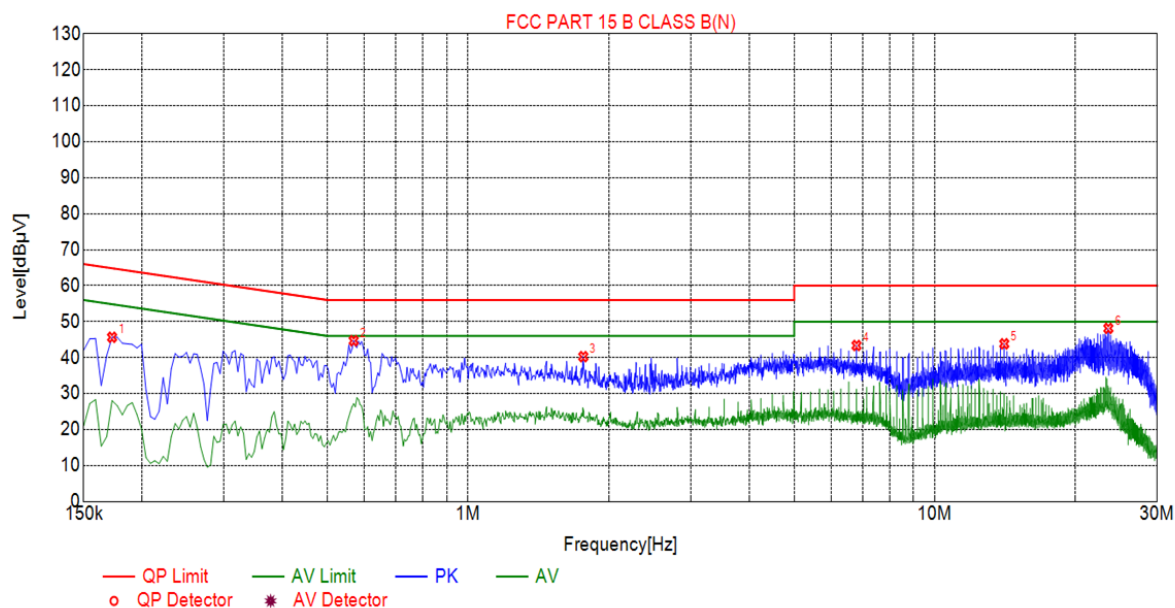

Suspected List


NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1725	45.65	20.04	64.84	19.19	25.61	PK	N
2	0.5685	44.69	20.05	56.00	11.31	24.64	PK	N
3	1.7655	40.27	20.14	56.00	15.73	20.13	PK	N
4	6.8010	43.36	20.21	60.00	16.64	23.15	PK	N
5	14.1000	43.83	19.96	60.00	16.17	23.87	PK	N
6	23.5680	48.13	20.21	60.00	11.87	27.92	PK	N

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

8 Test Setup Photo

Radiated Emission

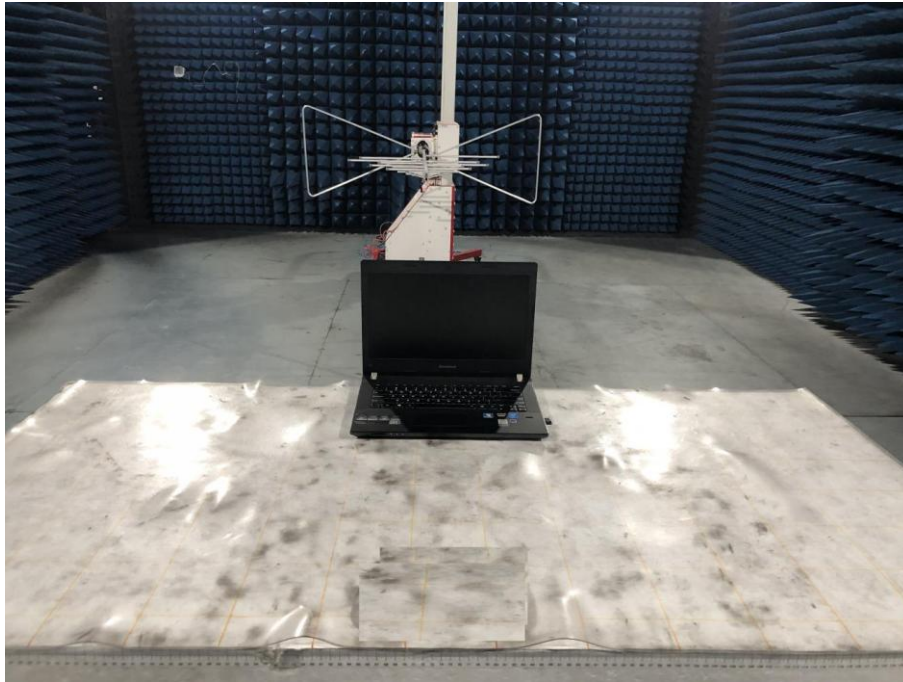

Conducted Emission



9 EUT Constructional Details

Photo 1



Photo 2



Photo 3

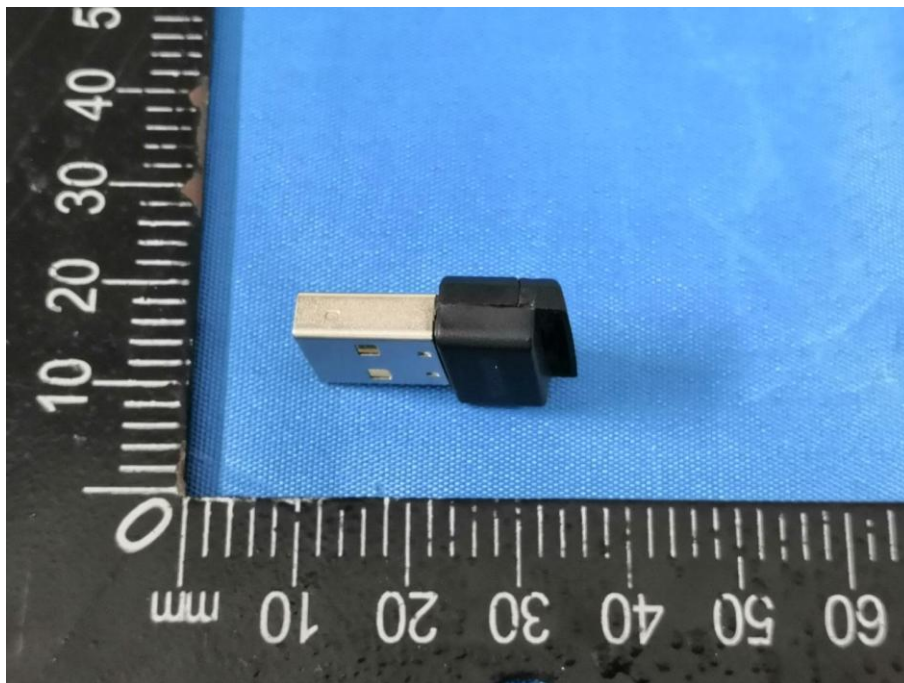


Photo 4

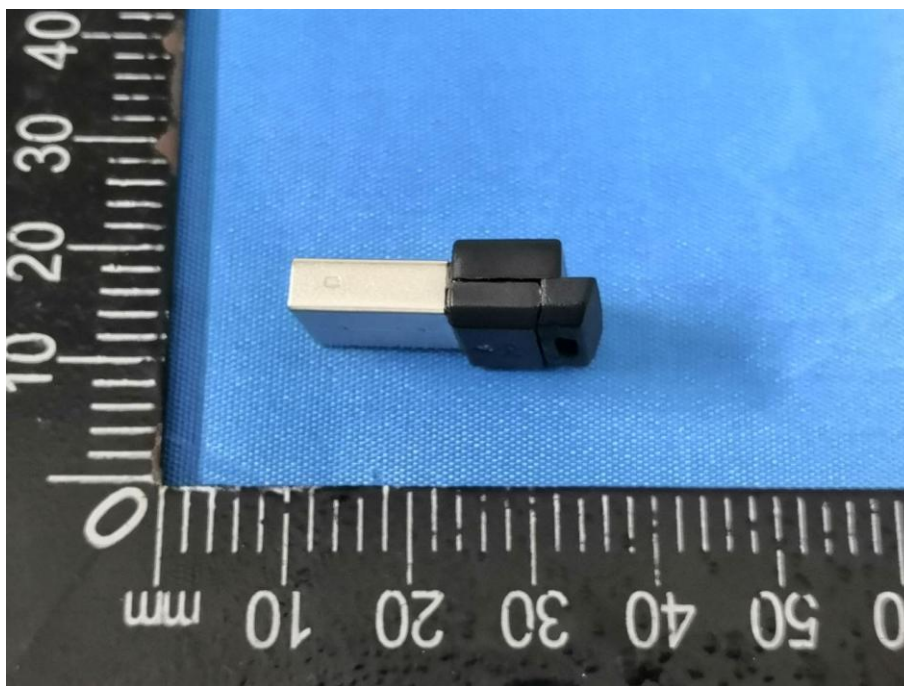


Photo 5

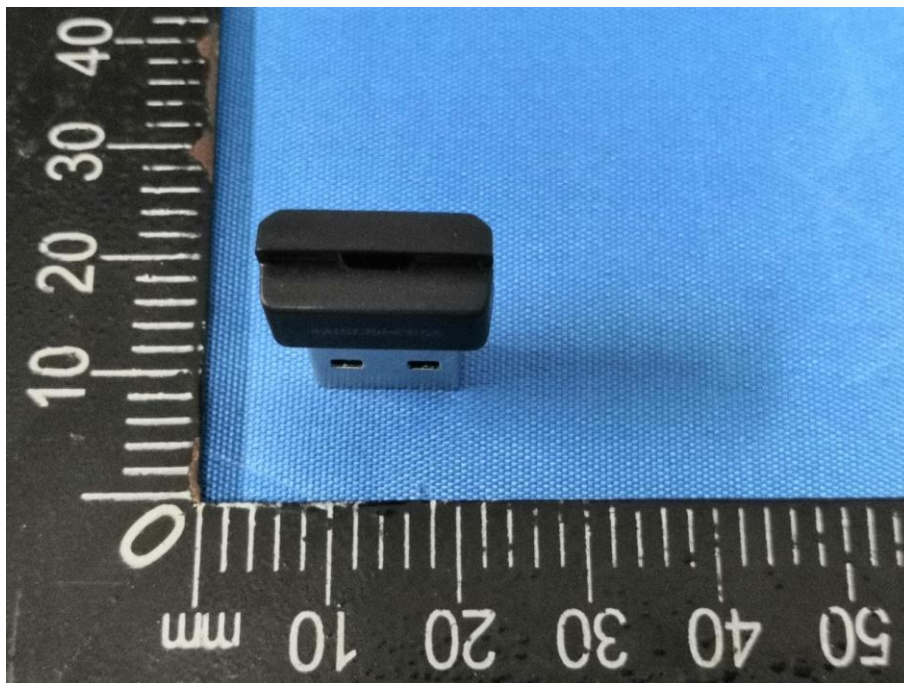


Photo 6

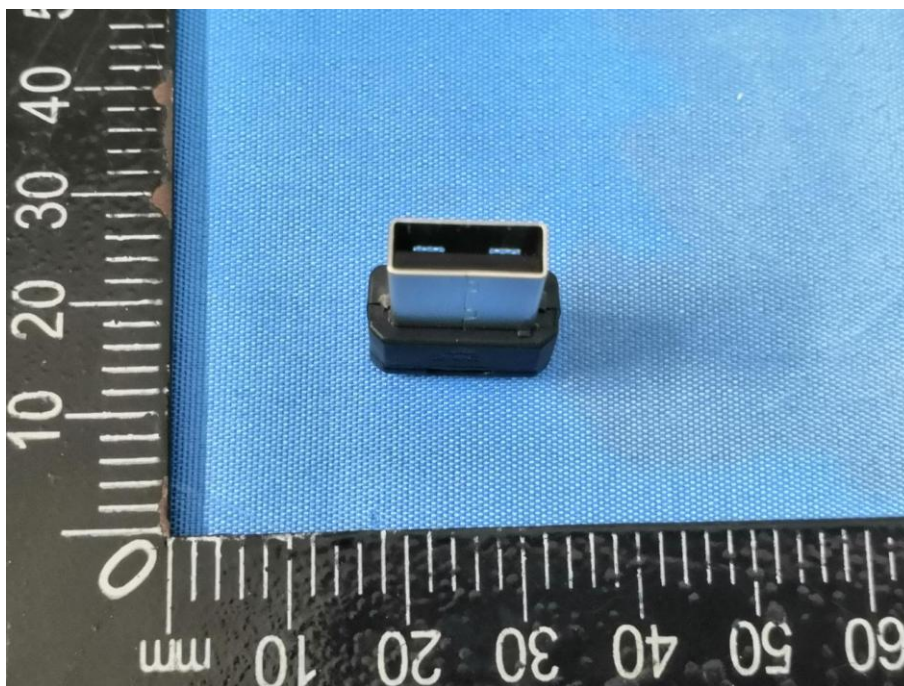


Photo 7

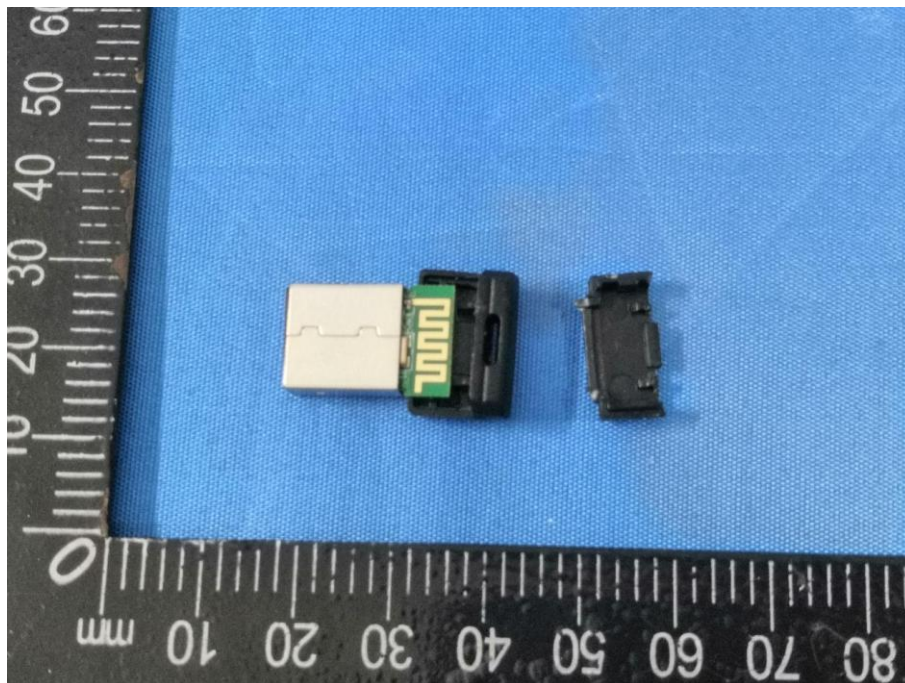


Photo 8

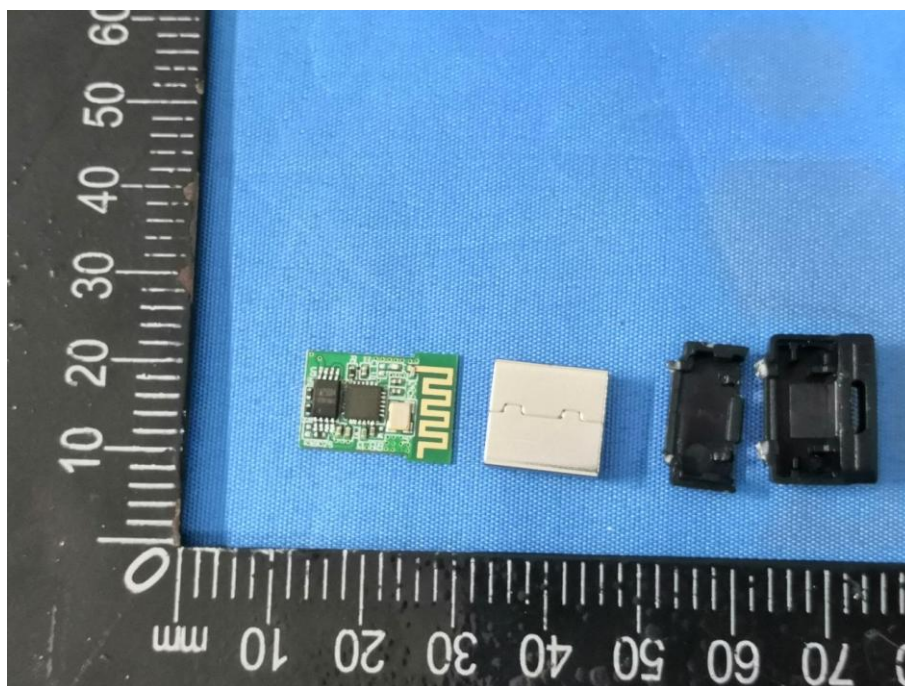


Photo 9


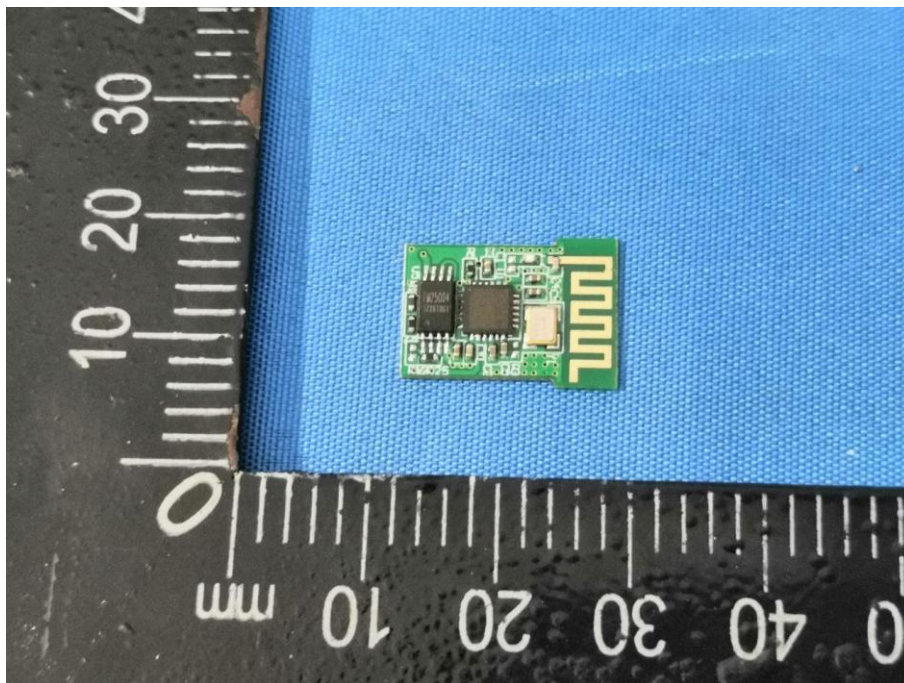


Photo 10

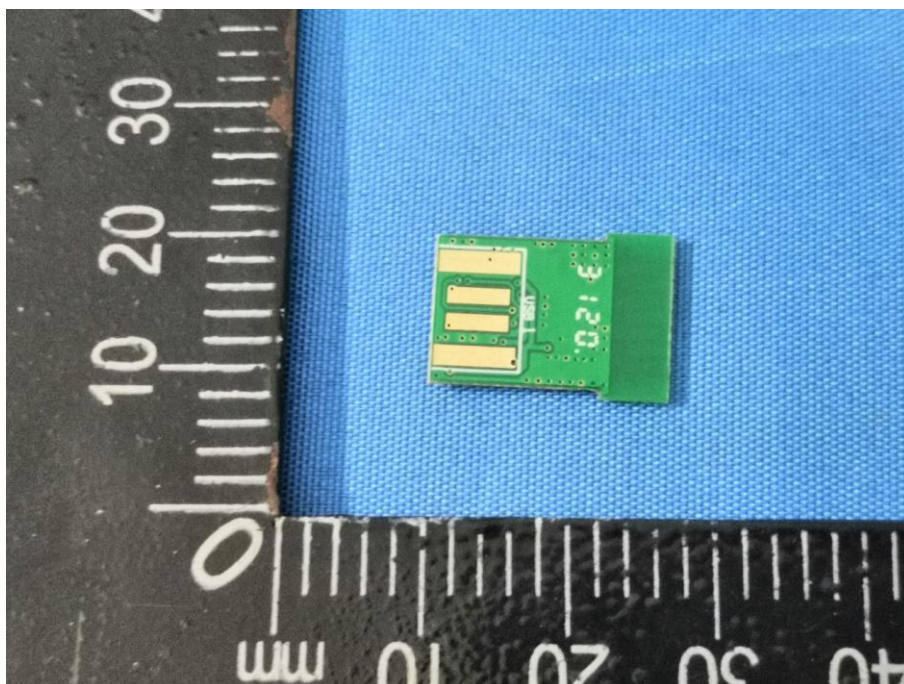

-----End-----