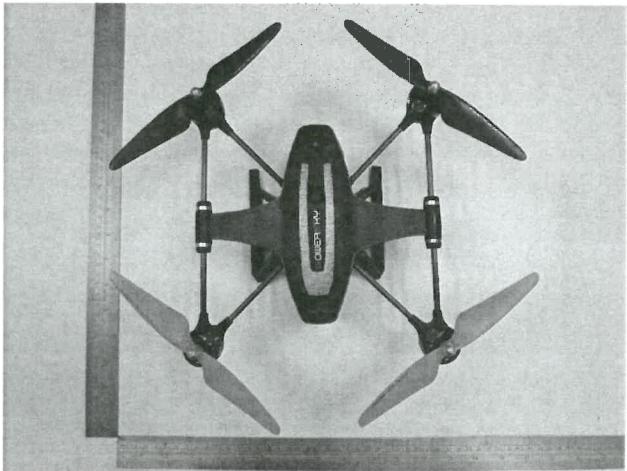


Prüfbericht-Nr.: <i>Test Report No.:</i>	50157575 001	Auftrags-Nr.: <i>Order No.:</i>	144187872	Seite 1 von 15 <i>Page 1 of 15</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	20.06.2018	
Auftraggeber: <i>Client:</i>	HK TECH SCIENCE & TECHNOLOGY CO.,LTD Xiehe Industrial B Zone, Laimei Road, Chenghai District, 515800, Shantou, Guangdong, China			
Prüfgegenstand: <i>Test item:</i>	Short Range Device - Radio Controlled Toy Quadcopter (2.4GHz)			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	FX-22C			
Auftrags-Inhalt: <i>Order content:</i>	FCC Certification			
Prüfgrundlage: <i>Test specification:</i>	FCC Part 15 Subpart C ANSI C63.10-2013			
Wareneingangsdatum: <i>Date of receipt:</i>	08.02.2018			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000696486-001			
Prüfzeitraum: <i>Testing period:</i>	25.04.2018			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland Hong Kong Ltd			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Hong Kong Ltd			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:	 05.07.2018 Kevin Wong / Project Manager			
kontrolliert von / reviewed by:				
 05.07.2018 Mika Chan / Project Manager				
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other: FCC ID: 2AFDJHKFX8GW				
This report covers partial test requirement under CFR47 FCC Part 15: Subpart C Section 15.247. This report should be read in conjunction with report number 171027003RFC-1.				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(fail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(fail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

## Table of Content

	Page
<b>Cover Page .....</b>	<b>1</b>
<b>Table of Content .....</b>	<b>2</b>
<b>Product information.....</b>	<b>4</b>
Manufacturers declarations .....	4
Product function and intended use.....	4
Submitted documents.....	5
Independent Operation Modes .....	5
Related Submittal(s) Grants .....	5
Remark .....	5
<b>Test Set-up and Operation Mode.....</b>	<b>6</b>
Principle of Configuration Selection .....	6
Test Operation and Test Software.....	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
<b>Test Methodology .....</b>	<b>7</b>
Radiated Emission .....	7
Field Strength Calculation.....	7
<b>Test Setup Diagram .....</b>	<b>8</b>
<b>Test Facility .....</b>	<b>10</b>
Test Laboratory Information .....	10
<b>List of Test and Measurement Instruments.....</b>	<b>11</b>
<b>Measurement Uncertainty .....</b>	<b>12</b>
<b>Results FCC Part 15 – Subpart C .....</b>	<b>13</b>
FCC 15.203 – Antenna Requirement 1.....	Pass..... 13
FCC 15.204 – Antenna Requirement 2.....	N/A..... 13
FCC 15.207 – Conducted Emission on AC Mains .....	Pass..... 13
FCC 15.247 (a)(2) – 6dB Bandwidth Measurement .....	Pass..... 14
FCC 15.247(b)(3) – Maximum Peak Coudcted Output Power .....	Pass..... 14
FCC 15.247(e) – Power Spectral Density.....	Pass..... 15
FCC 15.247(d) – Spurious Conducted Emissions.....	Pass..... 15

<b>Appendix 1 – Test protocols .....</b>	<b>15 pages</b>
<b>Appendix 2 – EUT External Photos .....</b>	<b>3 pages</b>
<b>Appendix 3 – EUT Internal Photos .....</b>	<b>2 pages</b>
<b>Appendix 4 – RF exposure information .....</b>	<b>2 pages</b>

## Product information

### Manufacturers declarations

	Transceiver
Operating frequency range	2412MHz
Type of modulation	802.11b: DSSS (CCK, DQPSK, DBPSK)
Number of channels	1
Type of antenna	Internal Antenna
Antenna gain (dBi)	2.5 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	No
Nominal voltage	V <sub>nor</sub> : 3.7VDC
Independent Operation Modes	Transmitting

### Product function and intended use

The submitted sample FX-22C is radio controlled toy helicopter embedded with WiFi camera. It is intended to use in following electromagnetic environment: residential and urban outdoors.

FCC ID: 2AFDJHKFX8GW

Models	Product description
FX-22C, FX-2, FX-3, FX-3V, FX-4, FX-4VCI, FX-4V, FX-5, FX-5W, FX-6, FX-6C, FX-6CI, FX-7, FX-7C, FX-7CI, FX-7S, FX-8A, FX-8E, FX-8C, FX-8G, FX-9A, FX-9E, FX-9C, FX-11, FX-12V, FX-12, FX-13, FX-14, FX-15, FX-15C, FX-15CI, FX-16, FX-16C, FX-16CI, FX-17, FX-18, FX-19, FX-20, FX-21, FX-22A, FX-22E, FX-23, FX-24, FX-25, FX-25CI, FX-26, FX-26CI, FX-27A, FX-27E, FX-27C, FX-28, FX-29, FX-29CI, FX-29A, FX-29E, FX-30, FX-31, FX-32, FX-33, FX-34, FX-35A, FX-35E, FX-35C, FX-36, FX-37, D2, D3, D3V, D4, D4VCI, D4V, D5, D5W, D6, D6C, D6CI, D7, D7C, D7CI, D7S, D8A, D8E, D8C, D8G, D9A, D9E, D9C, D11, D12V, D12, D13, D14, D15, D15C, D15CI, D16, D16C, D16CI, D17, D18, D19, D20, D21, D22A, D22E, D22C, D23, D24, D25, D25CI, D26, D27A, D27E, D27C, D28, D29, D29CI, D29A, D29E, D30, D31, D32, D33, D34, D35A, D35E, D35C, D36, D37	Short Range Device - Radio Controlled Toy Quadcopter (2.4GHz)

## Submitted documents

Circuit Diagram  
Block Diagram  
Technical Description  
User manual  
Label

## Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

## Related Submittal(s) Grants

- none

## Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

## Test Set-up and Operation Mode

### Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

### Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- Personal Computer (Provided by TÜV Rheinland Hong Kong Ltd)  
Manufacturer: Lenovo  
Model: 80Q6.  
S/N: PF0BEWWR

### Countermeasures to achieve EMC Compliance

- none

## Test Methodology

### Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

### Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.


FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


## Test Setup Diagram


Diagram of Measurement Configuration for Radiation Test

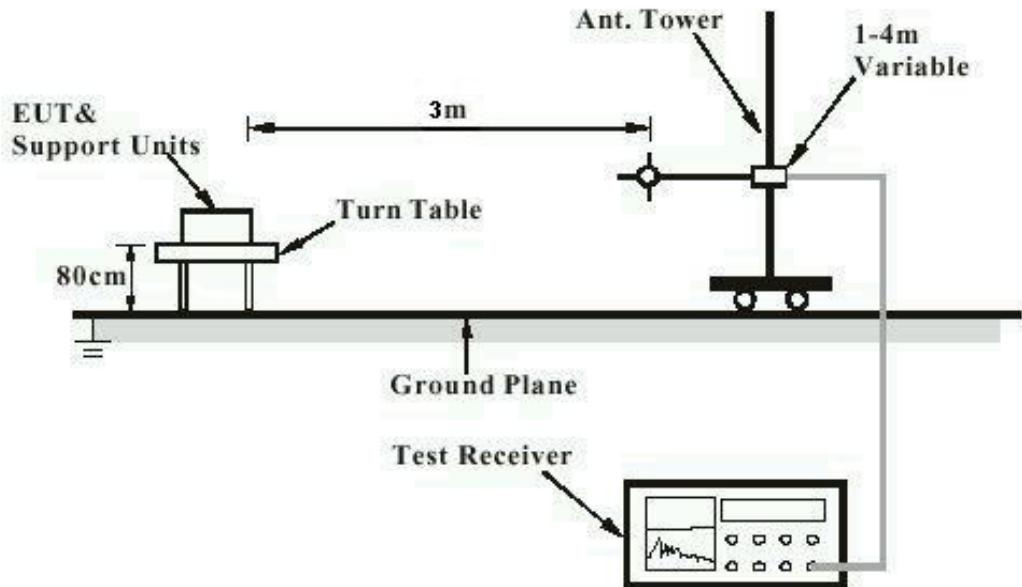

**Note:** Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

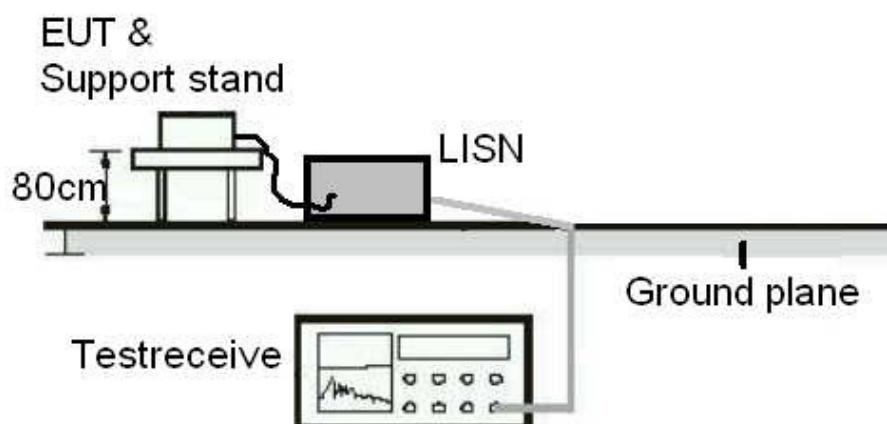

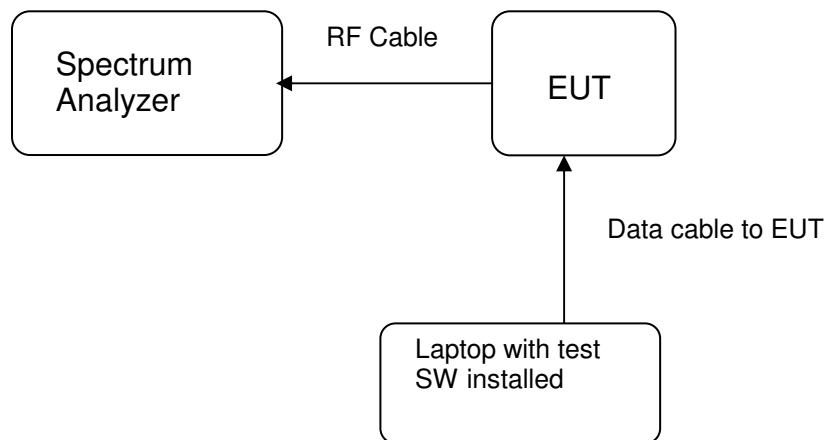**Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)**

## Test Facility

### Test Laboratory Information

TÜV Rheinland Hong Kong Ltd.

Address: 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong

Tel.: +852 2192 1000

Fax: +852 2192 1001

Email [service-gc@tuv.com](mailto:service-gc@tuv.com)

Web: [www.tuv.com](http://www.tuv.com)

The test facility is recognized or accredited by the following organizations:

#### FCC

Type	: Accredited Test Firm
Designation Number	: HK0013
Test Firm Registration Number	: 371735
Scope	: Intentional Radiators

## List of Test and Measurement Instruments

**TÜV Rheinland Hong Kong Ltd**

### Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	28-Sep-17	28-Sep-18

## Measurement Uncertainty

The estimated combined standard uncertainty for antenna conducted emission is  $\pm 2.1\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for the level of confidence is approximately 95%.

## Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass
<b>FCC Requirement:</b> No antenna other than that furnished by the responsible party shall be used with the device		
<b>Results:</b>	a) Antenna type: b) Manufacturer and model no: c) Peak Gain:	Integral PCB antenna N/A 2.5 dBi
<b>Verdict:</b>	Pass	

FCC 15.204 – Antenna Requirement 2		N/A
<b>FCC Requirement:</b> An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
<b>Results:</b>	Only one integral antenna can be used.	
<b>Verdict:</b>	N/A	

FCC 15.207 – Conducted Emission on AC Mains		Pass
There is no AC power input or output ports on the EUT.		

<b>FCC 15.247 (a)(2) – 6dB Bandwidth Measurement</b>		<b>Pass</b>	
<b>FCC Requirement:</b> Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.			
Test Specification : ANSI C63.10 – 2013 Test date : 25.04.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 3.7VDC Temperature : 23°C Humidity : 50%			
<b>Results:</b> For test protocols please refer to Appendix 1			
Channel frequency (MHz)	6 dB left (MHz)	6 dB right (MHz)	6dB bandwidth (MHz)
2412	2406.960	2416.960	10.00

<b>FCC 15.247(b)(3) – Maximum Conducted (Average) Output Power</b>		<b>Pass</b>		
<b>FCC Requirement:</b> For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)				
Test Specification : ANSI C63.10 – 2013 Test date : 25.04.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 3.7VDC Temperature : 23°C Humidity : 50%				
<b>Results:</b> For test protocols please refer to Appendix 1				
802.11b	Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict
	2412	17.89	1 / 30.0	Pass

FCC 15.247(e) – Power Spectral Density		Pass	
<b>FCC Requirement:</b> For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.			
Test Specification : ANSI C63.10 – 2013 Test date : 25.04.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 3.7VDC Temperature : 23°C Humidity : 50%			
<b>Results:</b> For test protocols please refer to Appendix 1.			
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict
2412	3.04	8.0	Pass


FCC 15.247(d) – Spurious Conducted Emissions		Pass			
Test Specification : ANSI C63.10 – 2013 Test date : 25.04.2018 Mode of operation : Tx mode Port of testing : Temporary antenna port Supply voltage : 3.7VDC Temperature : 23°C Humidity : 50%					
<b>FCC Requirement:</b> In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
<b>Results:</b> Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.  Only the worst cases is shown below. For test protocols refer to Appendix 1					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2412	No peak found	---	3.04	---	Pass

## **Appendix 1**

## **Test protocols**


## 6 dB Bandwidth Measurement

TX frequency: 2412MHz

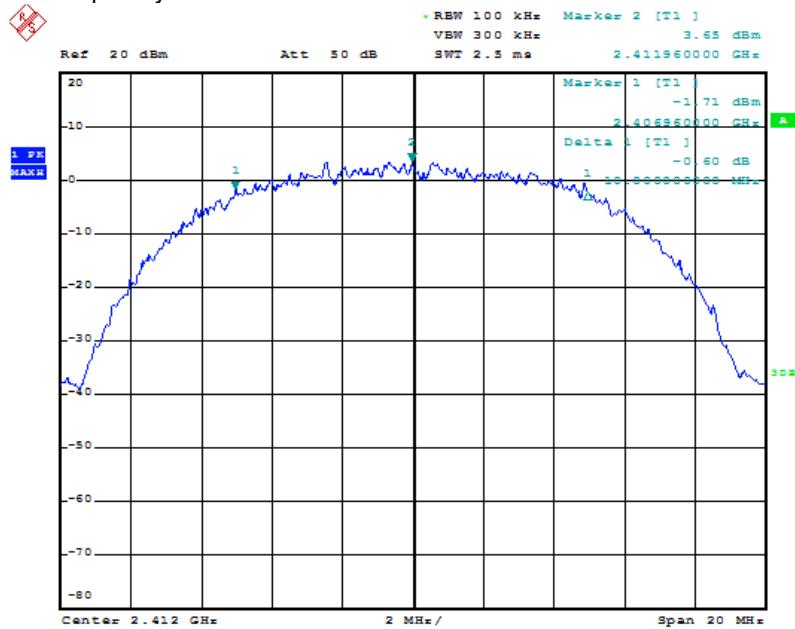


### **Maximum Conducted (Average) Output power**

TX frequency: 2412MHz

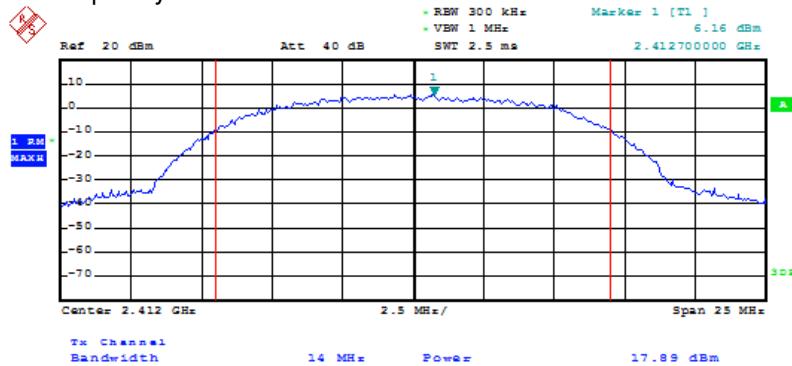



## Power Spectral Density



TX frequency: 2412MHz


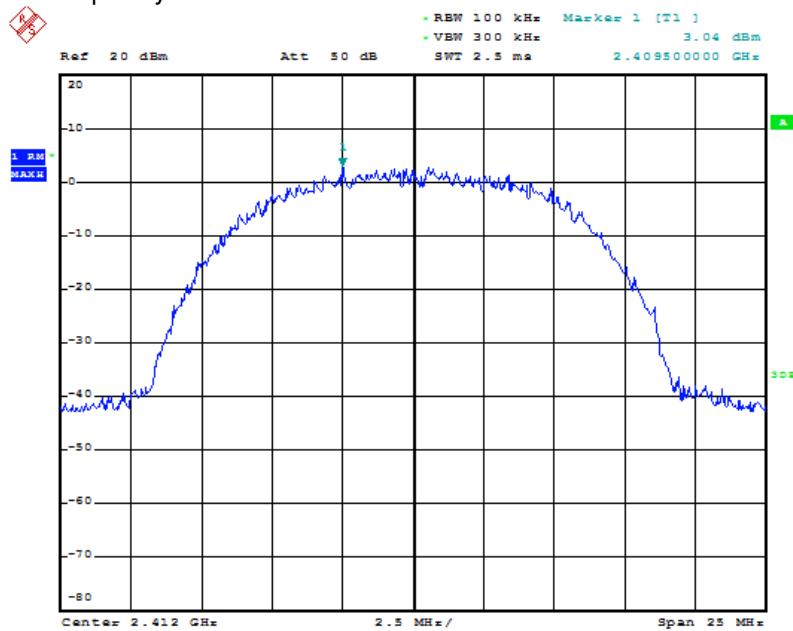


## Spurious Conducted Emissions

TX frequency: 2412MHz

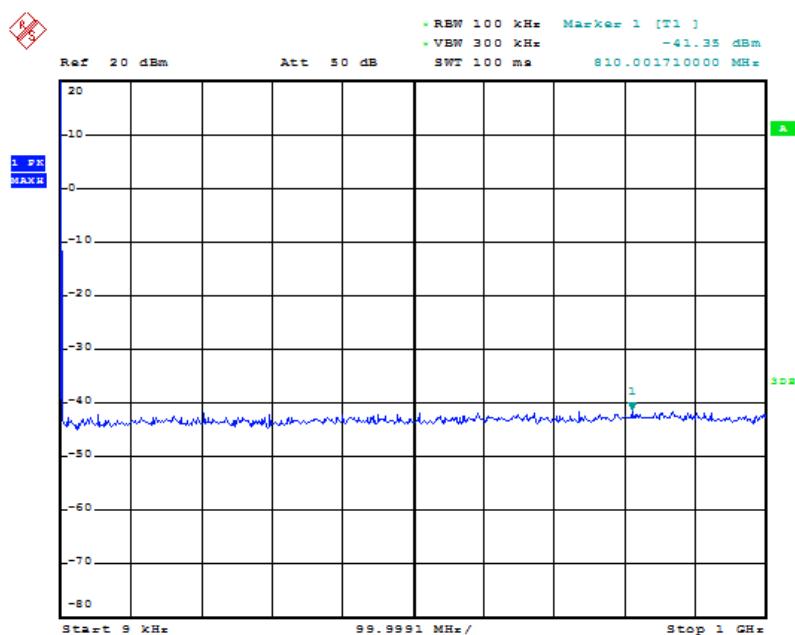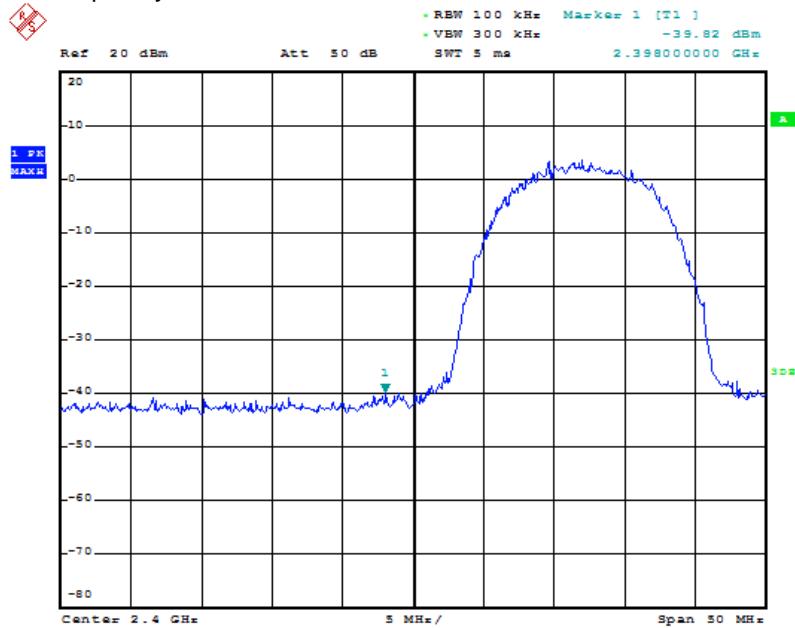

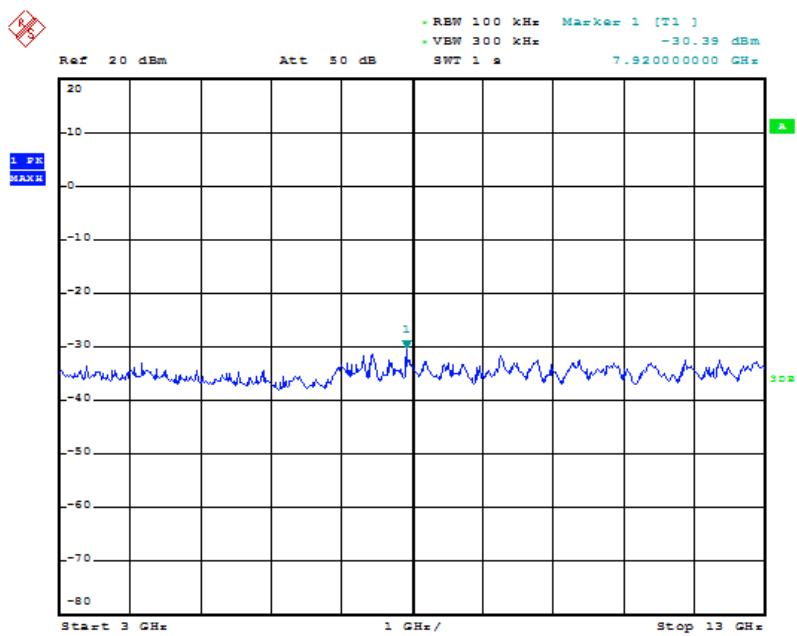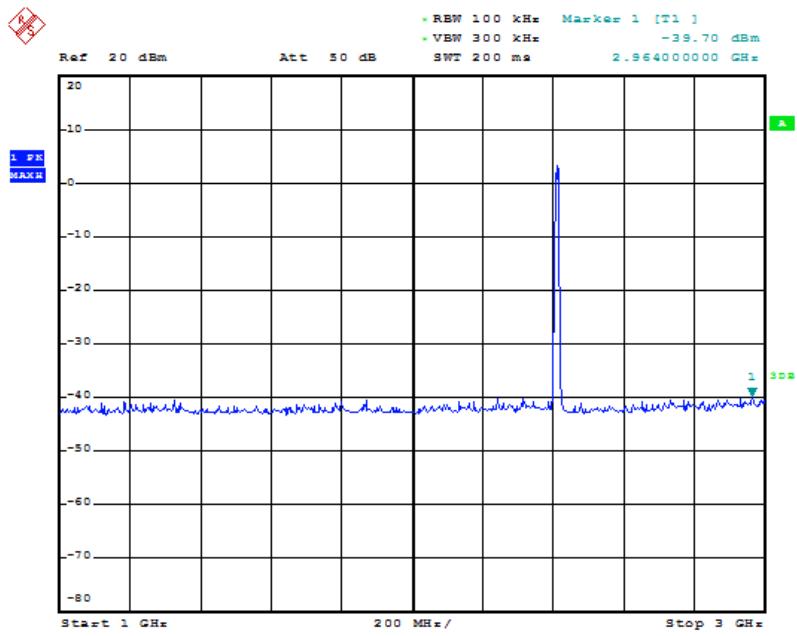

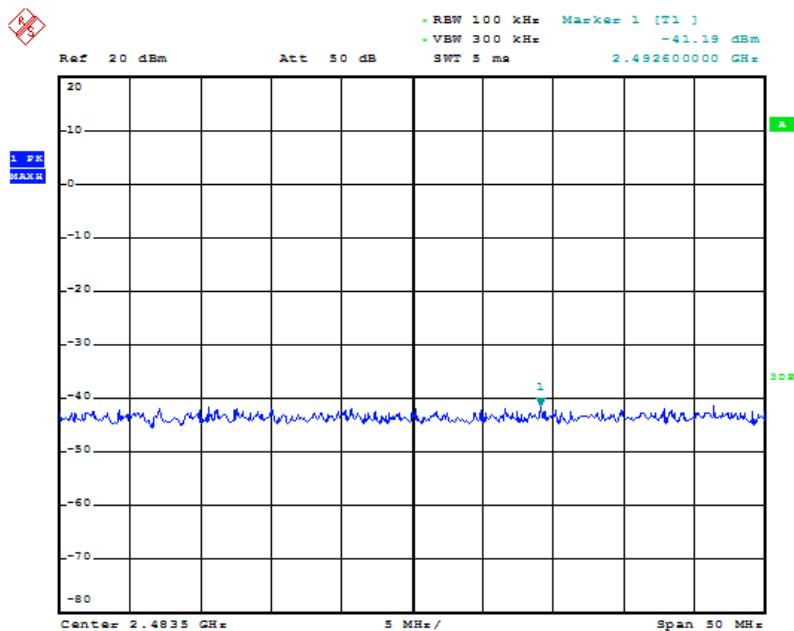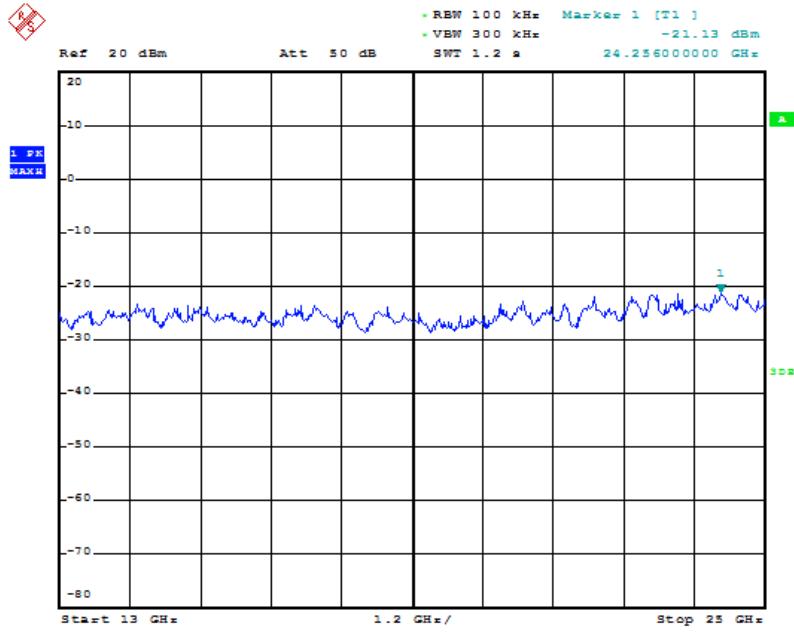

## Appendix 2

### EUT External Photos




External View



External View

## Appendix 3


### EUT Internal Photos

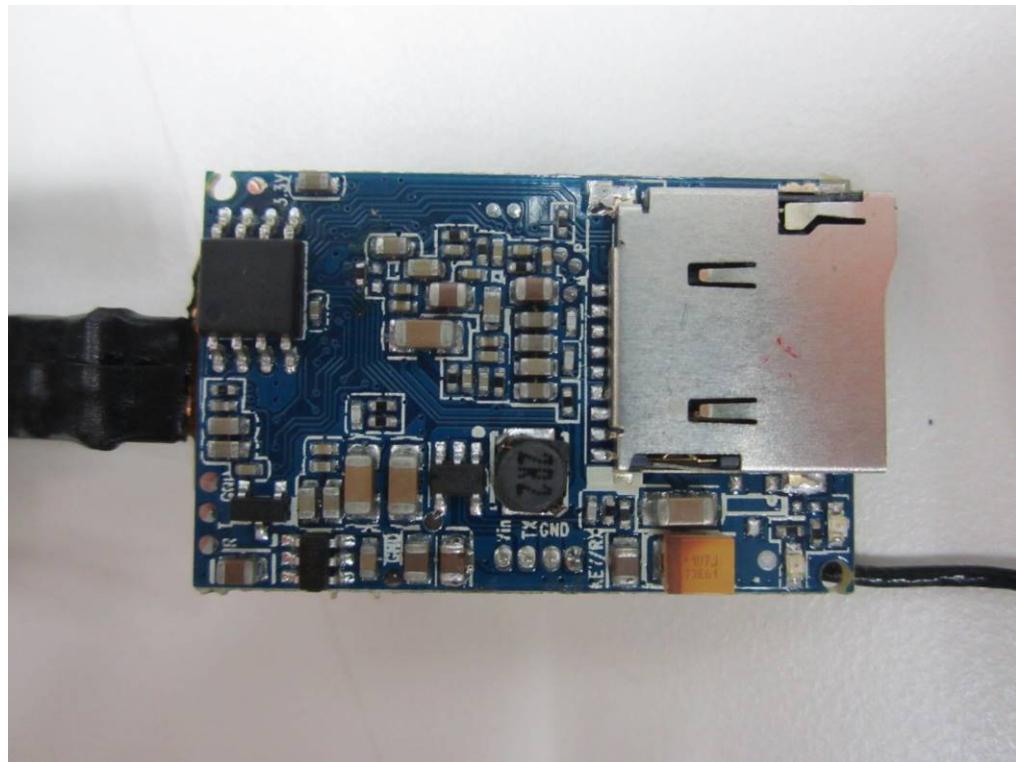

Internal View




Internal View

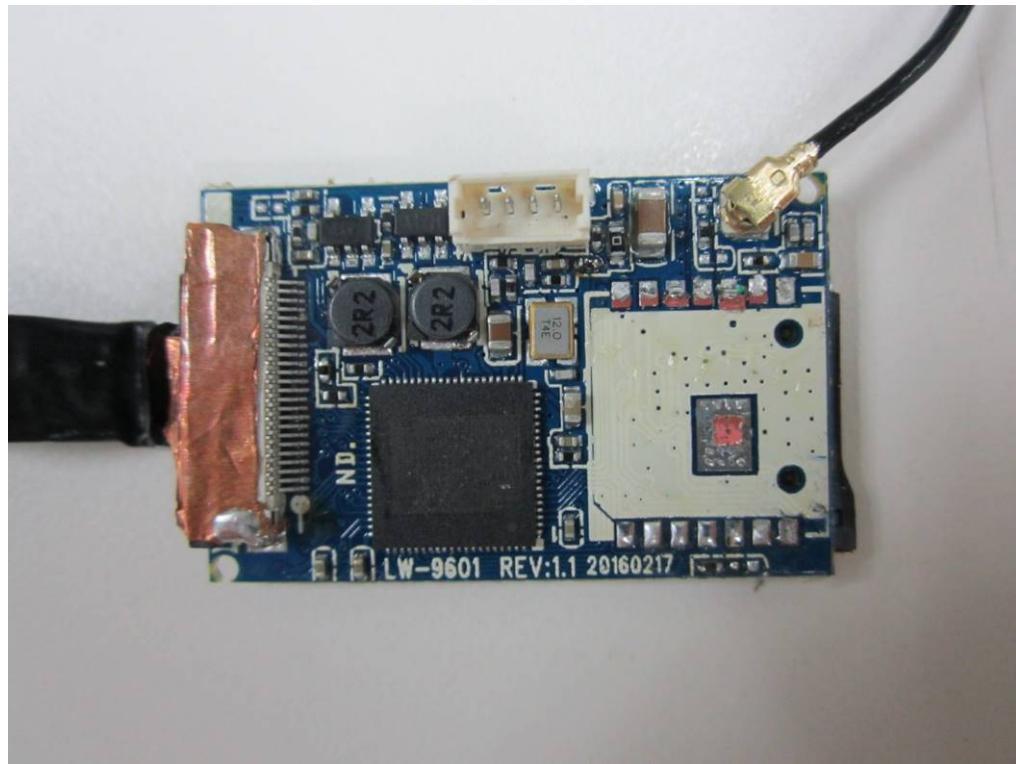

Internal View



Internal View

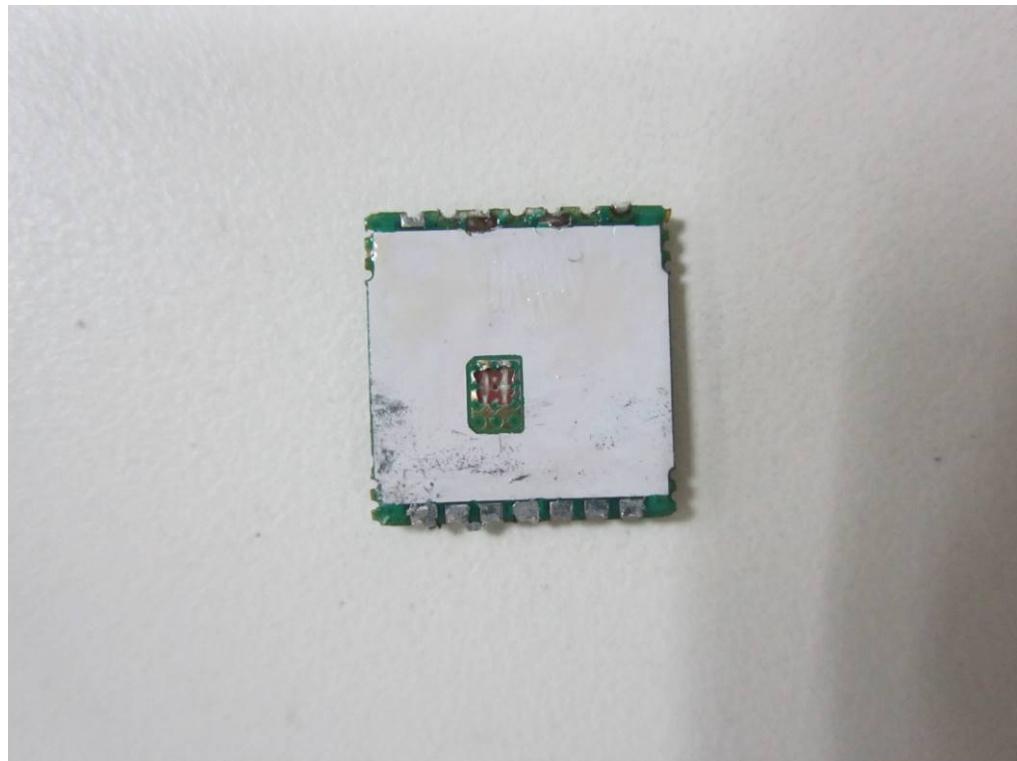

Internal View



Internal View

## Appendix 4

### RF Exposure Information

**Maximum transmitter power:**

Frequency (MHz)	Maximum peak output power (dBm)	Output power(mW)
2412	17.89	61.52

According to the manufacturer's installation instruction, the EUT operating in standalone mobile exposure conditions which minimum test separation distance is 20cm between the antenna and radiating structures of the device and nearby persons.

For Maximum Permissible Exposure (MPE) evaluation, the maximum power density at 20 cm from this mobile transmitter shall be less than the General Population / Uncontrolled MPE limit in OET Bulletin 65 and meet the requirement listed in KDB447498.

**Evaluation:**

The maximum conducted output power of WIFI is 61.52mW,

$$\text{The power density at 20cm} = (61.52\text{mW} \times 1) / 4\pi R^2 \\ = 0.0122 \text{ mWcm}^{-2}$$

**Conclusion:**

In the frequency range of 1,500 - 100,000MHz, the MPE limit is 1.0 mWcm<sup>-2</sup> for general population and uncontrolled exposure. As the measured power density at 20cm from the transmitter is lower than the MPE limit, the compliance to the MPE limit can be ensured by indicating the minimum 20cm separation between the transmitter's radiating structures and body of the user or nearby persons.