



中国认可
国际互认
检测
TESTING
CNAS L645



FCC AND ISCED CERTIFICATION TEST REPORT

Applicant	:	XGIMI Technology Co., Ltd.
Address of Applicant	:	Building No.4, Zone A, No.1129, Shijicheng Road, Chengdu High-tech Zone, Sichuan Pilot Free Trade Zone, China.
Manufacturer	:	XGIMI Technology Co., Ltd.
Address of Manufacturer	:	Building No.4, Zone A, No.1129, Shijicheng Road, Chengdu High-tech Zone, Sichuan Pilot Free Trade Zone, China.
Equipment under Test	:	Projector
Model No.	:	WK03K
FCC ID	:	2AFENWK03K
IC	:	27045-WK03K
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE25011610-1E03
Issue Date	:	2025/03/31
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	8
2.	General Test Information.....	9
2.1.	Description of EUT	9
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test	10
2.4.	Decision of final test mode	10
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	11
2.7.	Test laboratory	11
2.8.	Measurement uncertainty	12
3.	Equipment Used During Conductive Test	13
4.	6dB Bandwidth	14
4.1.	Block diagram of test setup	14
4.2.	Limits.....	14
4.3.	Test procedure	14
4.4.	Test result	15
4.5.	Test graphs	16
5.	99% Bandwidth	24
5.1.	Block diagram of test setup	24
5.2.	Limits.....	24
5.3.	Test procedure	24
5.4.	Test result	25
5.5.	Test graphs	26
6.	Conducted Output Power	34
6.1.	Block diagram of test setup	34
6.2.	Limits.....	34
6.3.	Test procedure	34
6.4.	Test result average.....	35
7.	Power Spectral Density	36
7.1.	Block diagram of test setup	36
7.2.	Limits.....	36
7.3.	Test procedure	36
7.4.	Test result	37
7.5.	Test graphs	38
8.	Band Edge Compliance (Conducted Method)	46
8.1.	Block diagram of test setup	46

8.2.	Limits.....	46
8.3.	Test procedure	46
8.4.	Test result	47
8.5.	Test graphs	48
9.	RF Conducted Spurious Emissions.....	54
9.1.	Block diagram of test setup	54
9.2.	Limits.....	54
9.3.	Test procedure	54
9.4.	Test result	55
9.5.	Test graphs	56
10.	Duty Cycle.....	80
10.1.	Block diagram of test setup	80
10.2.	Limit.....	80
10.3.	Test procedure	80
10.4.	Test result	81
10.5.	Test graphs	82
11.	Antenna Requirements.....	90
11.1.	Limit.....	90
11.2.	Result	90
12.	Radiated Emission	91
12.1.	Test equipment.....	91
12.2.	Block diagram of test setup	92
12.3.	Limits.....	93
12.4.	Assistant equipment used for test	95
12.5.	Test procedure	95
12.6.	Test result	96
12.7.	Test data	97
13.	Band Edge Compliance.....	105
13.1.	Test equipment.....	105
13.2.	Block diagram of test setup	106
13.3.	Limits.....	106
13.4.	Assistant equipment used for test	106
13.5.	Test procedure	106
13.6.	Test result	106
13.7.	Test data	107
14.	Power Line Conducted Emissions.....	119
14.1.	Test equipment.....	119
14.2.	Block diagram of test setup	119

14.3. Limits.....119

14.4. Assistant equipment used for test119

14.5. Test procedure120

14.6. Test result120

14.7. Test data121

15. Test Setup Photograph123

16. Photos of the EUT125

Test Report Declare

Applicant	:	XGIMI Technology Co., Ltd.
Address of Applicant	:	Building No.4, Zone A, No.1129, Shijicheng Road, Chengdu High-tech Zone, Sichuan Pilot Free Trade Zone, China.
Equipment under Test	:	Projector
Model No.	:	WK03K
Manufacturer	:	XGIMI Technology Co., Ltd.
Address of Manufacturer	:	Building No.4, Zone A, No.1129, Shijicheng Road, Chengdu High-tech Zone, Sichuan Pilot Free Trade Zone, China.
Factory 1	:	Yibin XGIMI Optoelectronic Co., Ltd.
Address of Factory 1	:	No.2, West Section 4, Changjiang North Road, Lingang Economic Development Zone, YiBin, Sichuan Province
Factory 2	:	XGIMI VIETNAM TECHNOLOGY COMPANY LIMITED
Address of Factory 22	:	Lot CN 4-1, My Thuan Industrial Zone, My Thuan Commune, Nam Dinh City, Nam Dinh Province, Vietnam

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
RSS-247 Issue 3 August 2023,
ANSI C63.10:2013,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25011610-1E03		
Date of Receipt:	2025/03/11	Date of Test:	2025/03/11 - 2025/03/31

Created: Chen Ziqin	Reviewed: Ella Gong	Approved: Damon Hu
		

2025/03/31	2025/03/31	2025/03/31
------------	------------	------------

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
---	Initial issue	2025/03/31	Damon Hu

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2), RSS-247 Issue 3 clause 5.2(a), RSS-Gen Issue 5 clause 6.7	/	Pass
2	Peak Output Power	FCC Part 15: 15.247(b)(3), RSS-247 Issue 3 clause 5.4(d)	/	Pass
3	Power Spectral Density	FCC Part 15:15.247(e), RSS-247 Issue 3 clause 5.2(b)	/	Pass
4	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
5	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
6	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
7	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
8	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	:	Projector
Model Number	:	WK03K
Difference of model number	:	/
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	DC 20V is powered by an external adapter or a built-in 14.4V battery.
Hardware Version	:	251-02289-012
Software Version	:	1.0.33
Antenna Type	:	FPC Antenna
Max Antenna Gain(dBi)	:	Ant1: -0.22dBi Ant2: 0.89dBi

Radio Technology	:	IEEE 802.11b/g/n
Operation frequency	:	IEEE 802.11b: 2412MHz to 2462MHz IEEE 802.11g: 2412MHz to 2462MHz IEEE 802.11n HT20: 2412MHz to 2462MHz IEEE 802.11n HT40: 2422MHz to 2452MHz
Modulation	:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☒” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
Remote control	/	B993C	/
Remote control	/	/	/
SWITCHING POWER SUPPLY	Huizhou Golden Lake Industrial Co., Ltd.	S065ARU20003 25	INPUT: 100-240V~50/60Hz 1.8A Max OUTPUT: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: QATool_Dbg.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency					
Tested mode	Tx Power Setting		Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11b	22	22	1	LCH: CH1	2412
	22	22	1	MCH: CH6	2437
	22	22	1	HCH: CH11	2462
IEEE 802.11g	20	20	6	LCH: CH1	2412
	20	20	6	MCH: CH6	2437
	20	20	6	HCH: CH11	2462
IEEE 802.11n HT20	20	20	MCS 8	LCH: CH1	2412
	20	20	MCS 8	MCH: CH6	2437
	20	20	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	1E	1E	MCS 8	LCH: CH3	2422
	1E	1E	MCS 8	MCH: CH6	2437
	1E	1E	MCS 8	HCH: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.					

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 3#)				
SIGNAL ANALYZER	R&S	FSV40	101407	2025/07/08
Wideband Radio Communication Tester	R&S	CMW500	117491	2025/03/31
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY62153058	2025/07/08
MXG Vector Signal Generator	Agilent	N5182A	MY48180912	2025/03/31
RF Control Unit	Tonscend	JS0806-2	20C8060230	2025/03/31
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

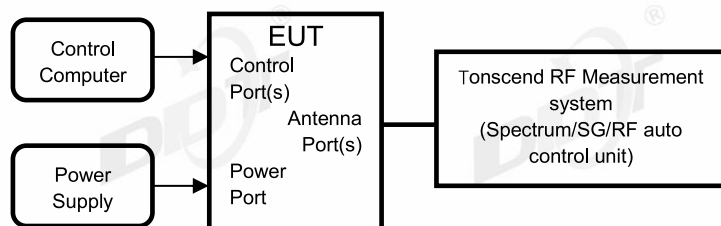

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report


4.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,32.6%RH	Test Date:	2025.03.19
Test Power Supply:	AC 120V	Sample Number:	S25011610-003


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.04	2407.48	2416.52	0.5	PASS
	Ant2	2412	8.56	2407.48	2416.04	0.5	PASS
	Ant1	2437	8.56	2432.48	2441.04	0.5	PASS
	Ant2	2437	8.56	2432.48	2441.04	0.5	PASS
	Ant1	2462	8.56	2457.48	2466.04	0.5	PASS
	Ant2	2462	9.04	2457.48	2466.52	0.5	PASS
11G	Ant1	2412	15.12	2404.44	2419.56	0.5	PASS
	Ant2	2412	15.12	2404.44	2419.56	0.5	PASS
	Ant1	2437	15.12	2429.44	2444.56	0.5	PASS
	Ant2	2437	15.12	2429.44	2444.56	0.5	PASS
	Ant1	2462	15.12	2454.44	2469.56	0.5	PASS
	Ant2	2462	15.12	2454.44	2469.56	0.5	PASS
11N20MIMO	Ant1	2412	15.08	2404.48	2419.56	0.5	PASS
	Ant2	2412	15.72	2404.44	2420.16	0.5	PASS
	Ant1	2437	15.12	2429.44	2444.56	0.5	PASS
	Ant2	2437	15.12	2429.44	2444.56	0.5	PASS
	Ant1	2462	15.04	2454.52	2469.56	0.5	PASS
	Ant2	2462	15.68	2454.44	2470.12	0.5	PASS
11N40MIMO	Ant1	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant2	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant1	2437	35.04	2419.48	2454.52	0.5	PASS
	Ant2	2437	35.04	2419.48	2454.52	0.5	PASS
	Ant1	2452	35.12	2434.48	2469.60	0.5	PASS
	Ant2	2452	35.12	2434.48	2469.60	0.5	PASS

4.5. Test graphs

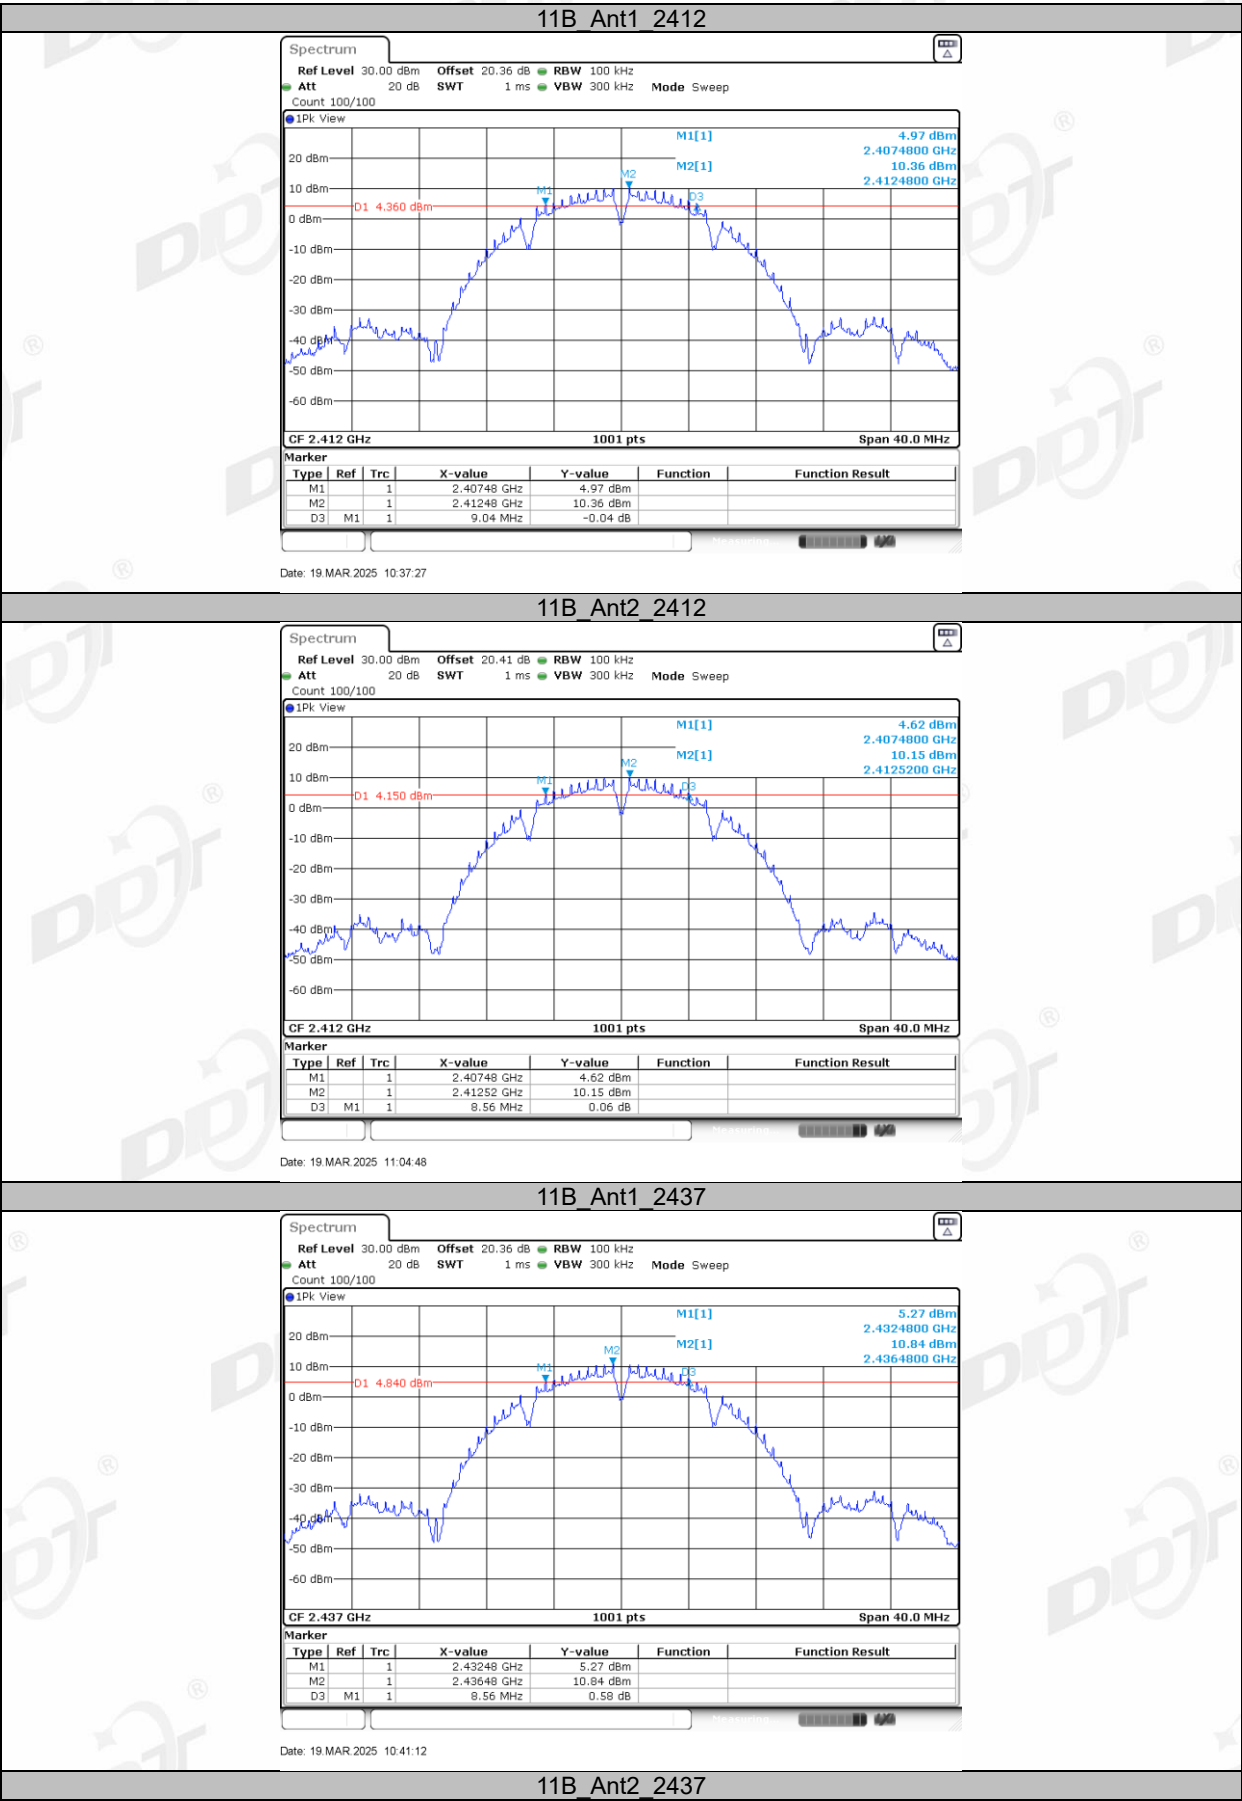


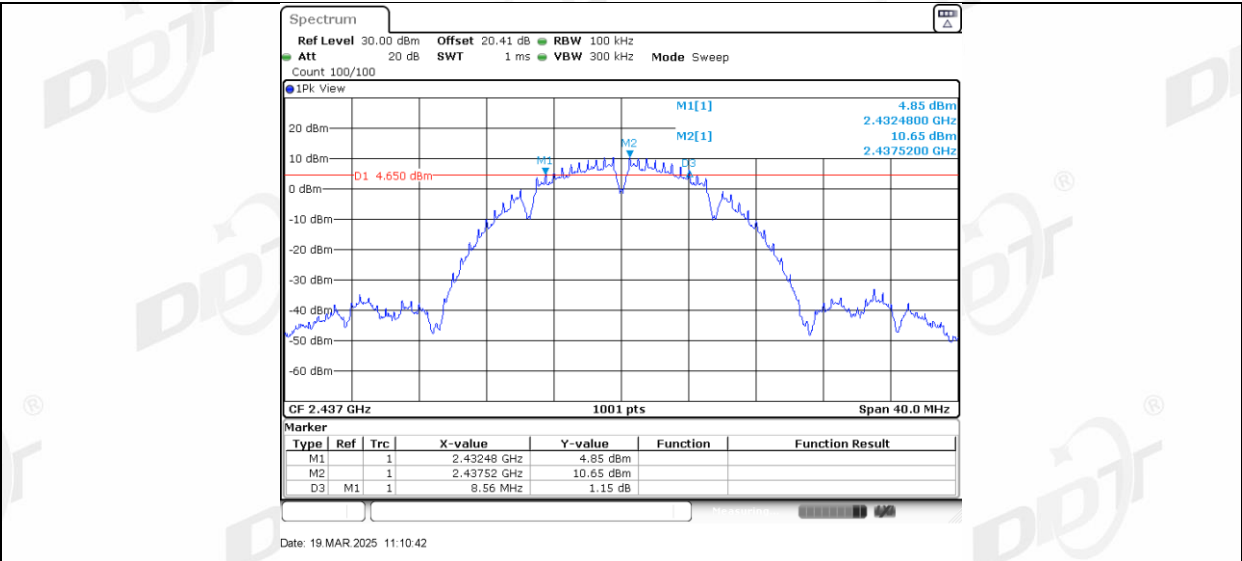


11B_Ant1_2462

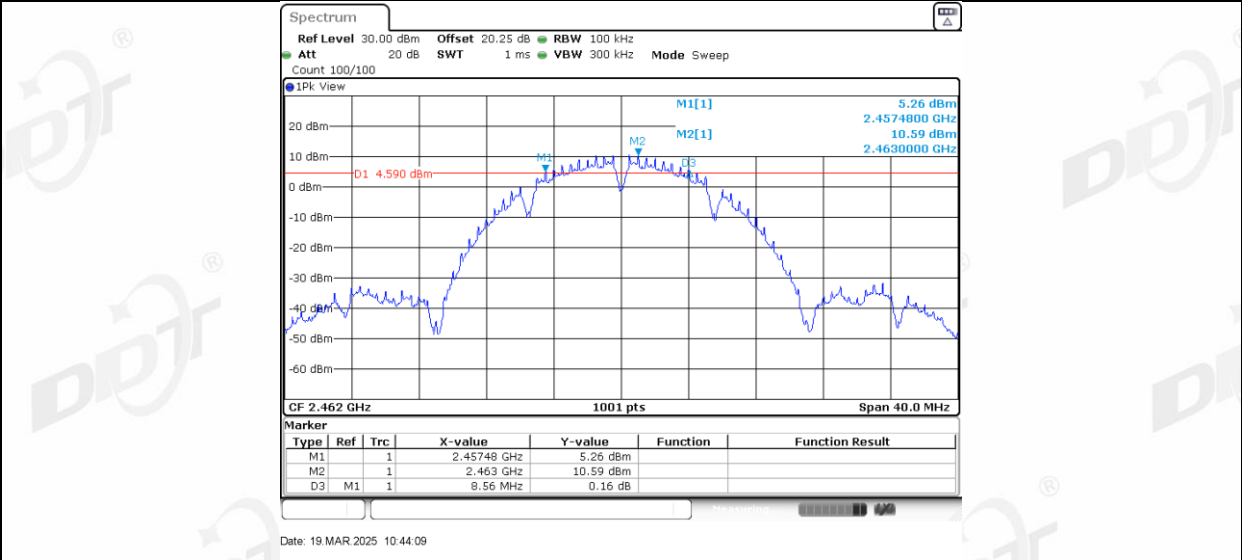


11B_Ant2_2462

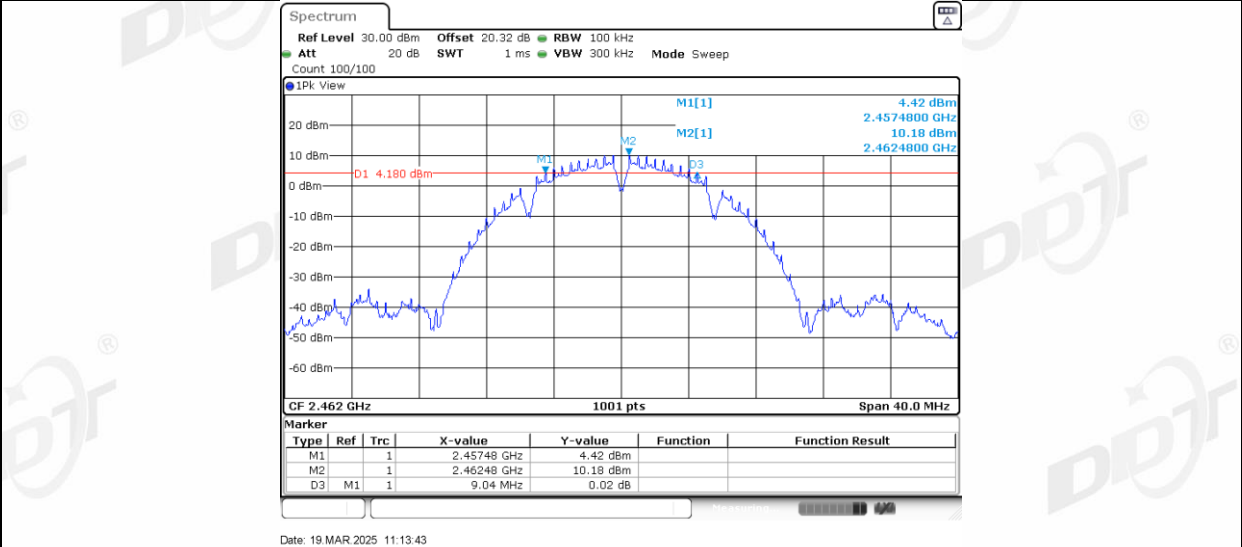


11G_Ant1_2412

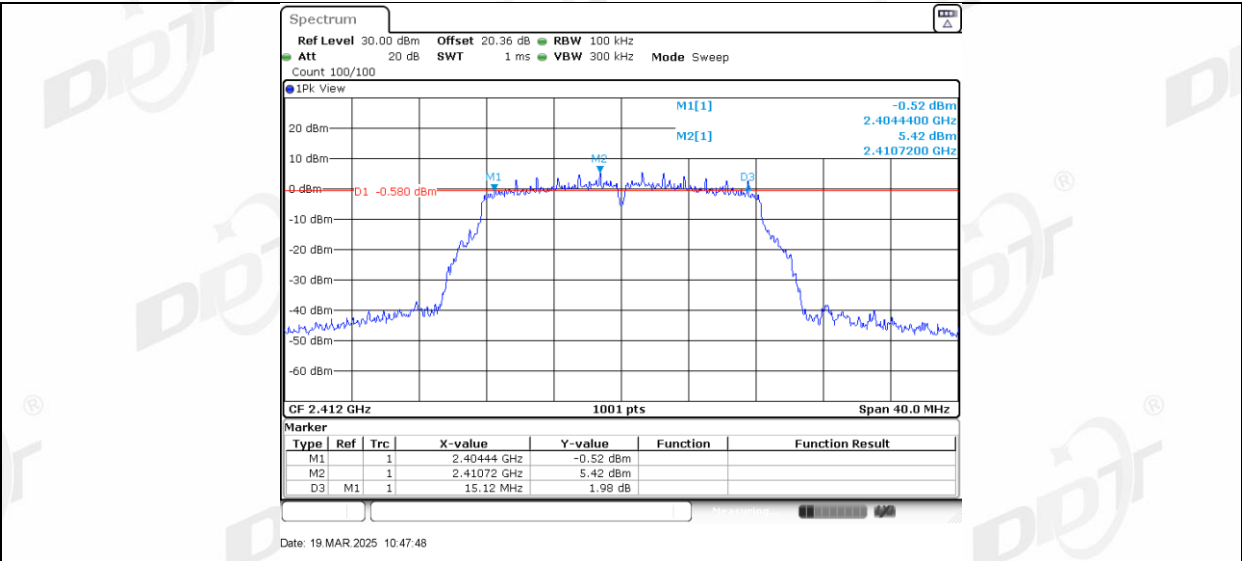


11G_Ant2_2412

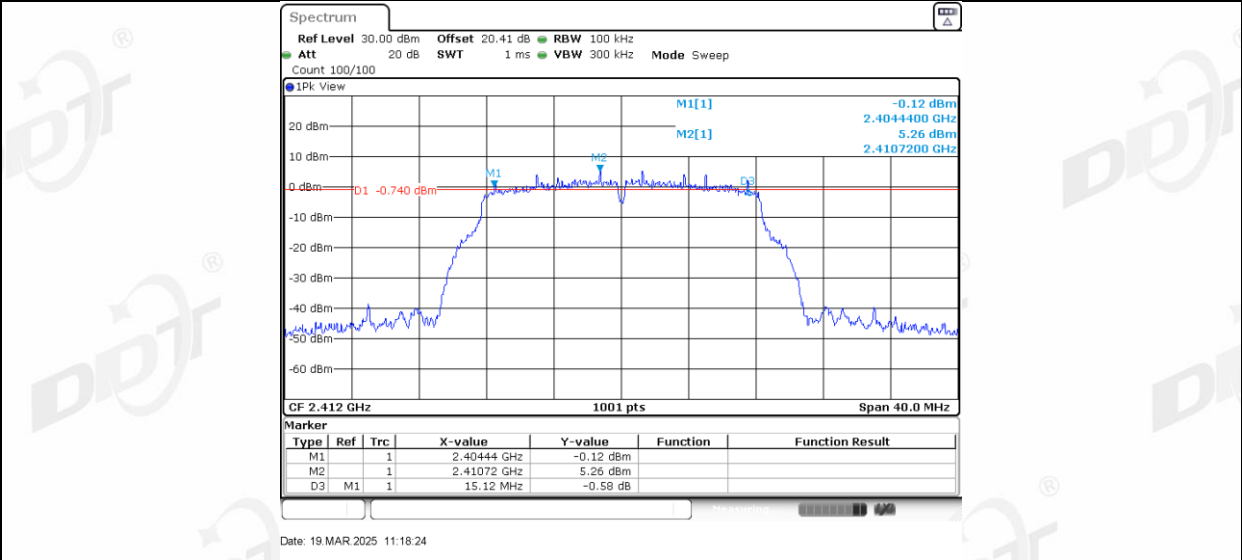


11G_Ant1_2437

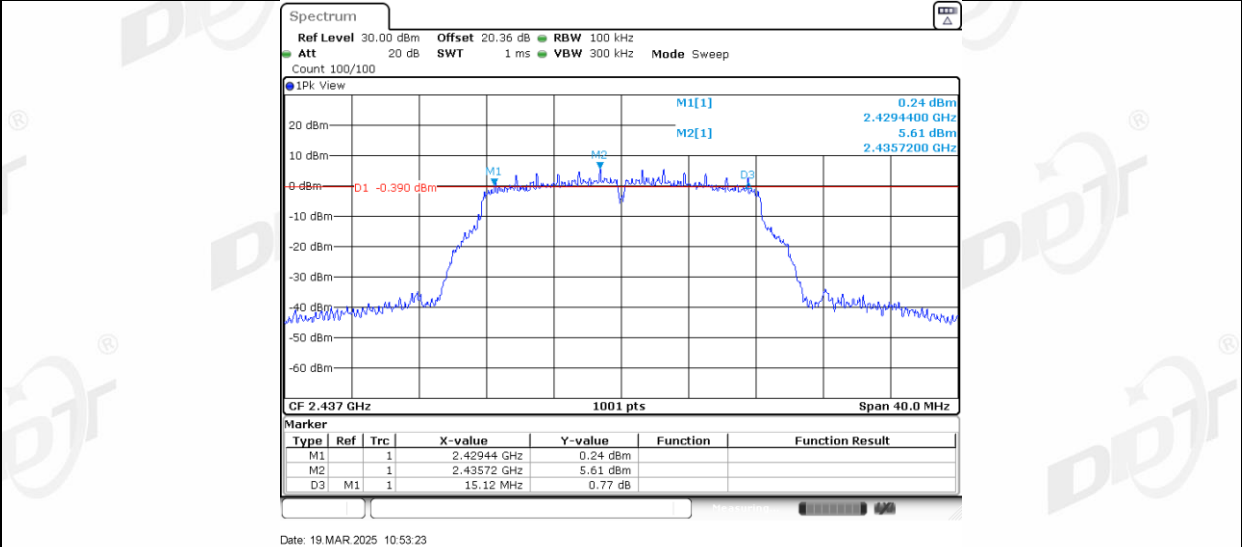


11G_Ant2_2437

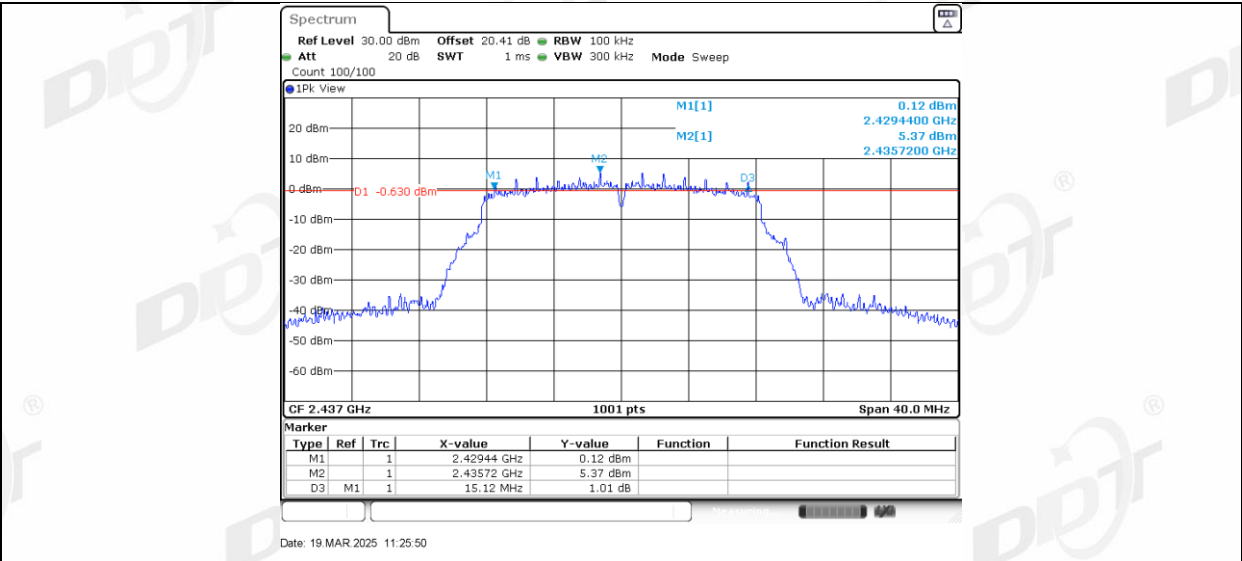


11G Ant1_2462

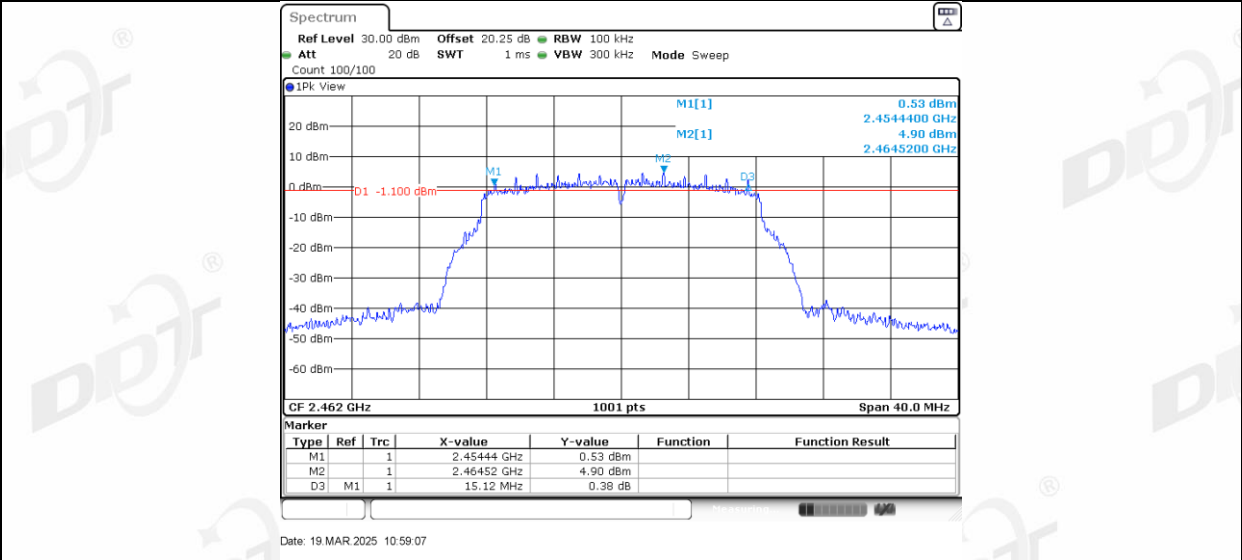


11G Ant2_2462

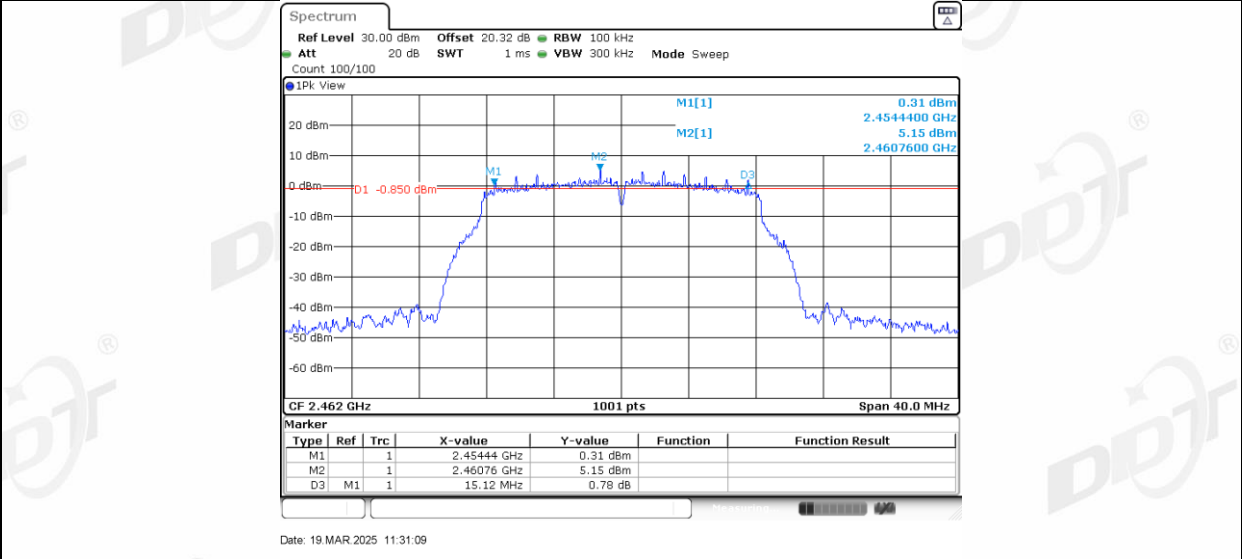


11N20MIMO_Ant1_2412

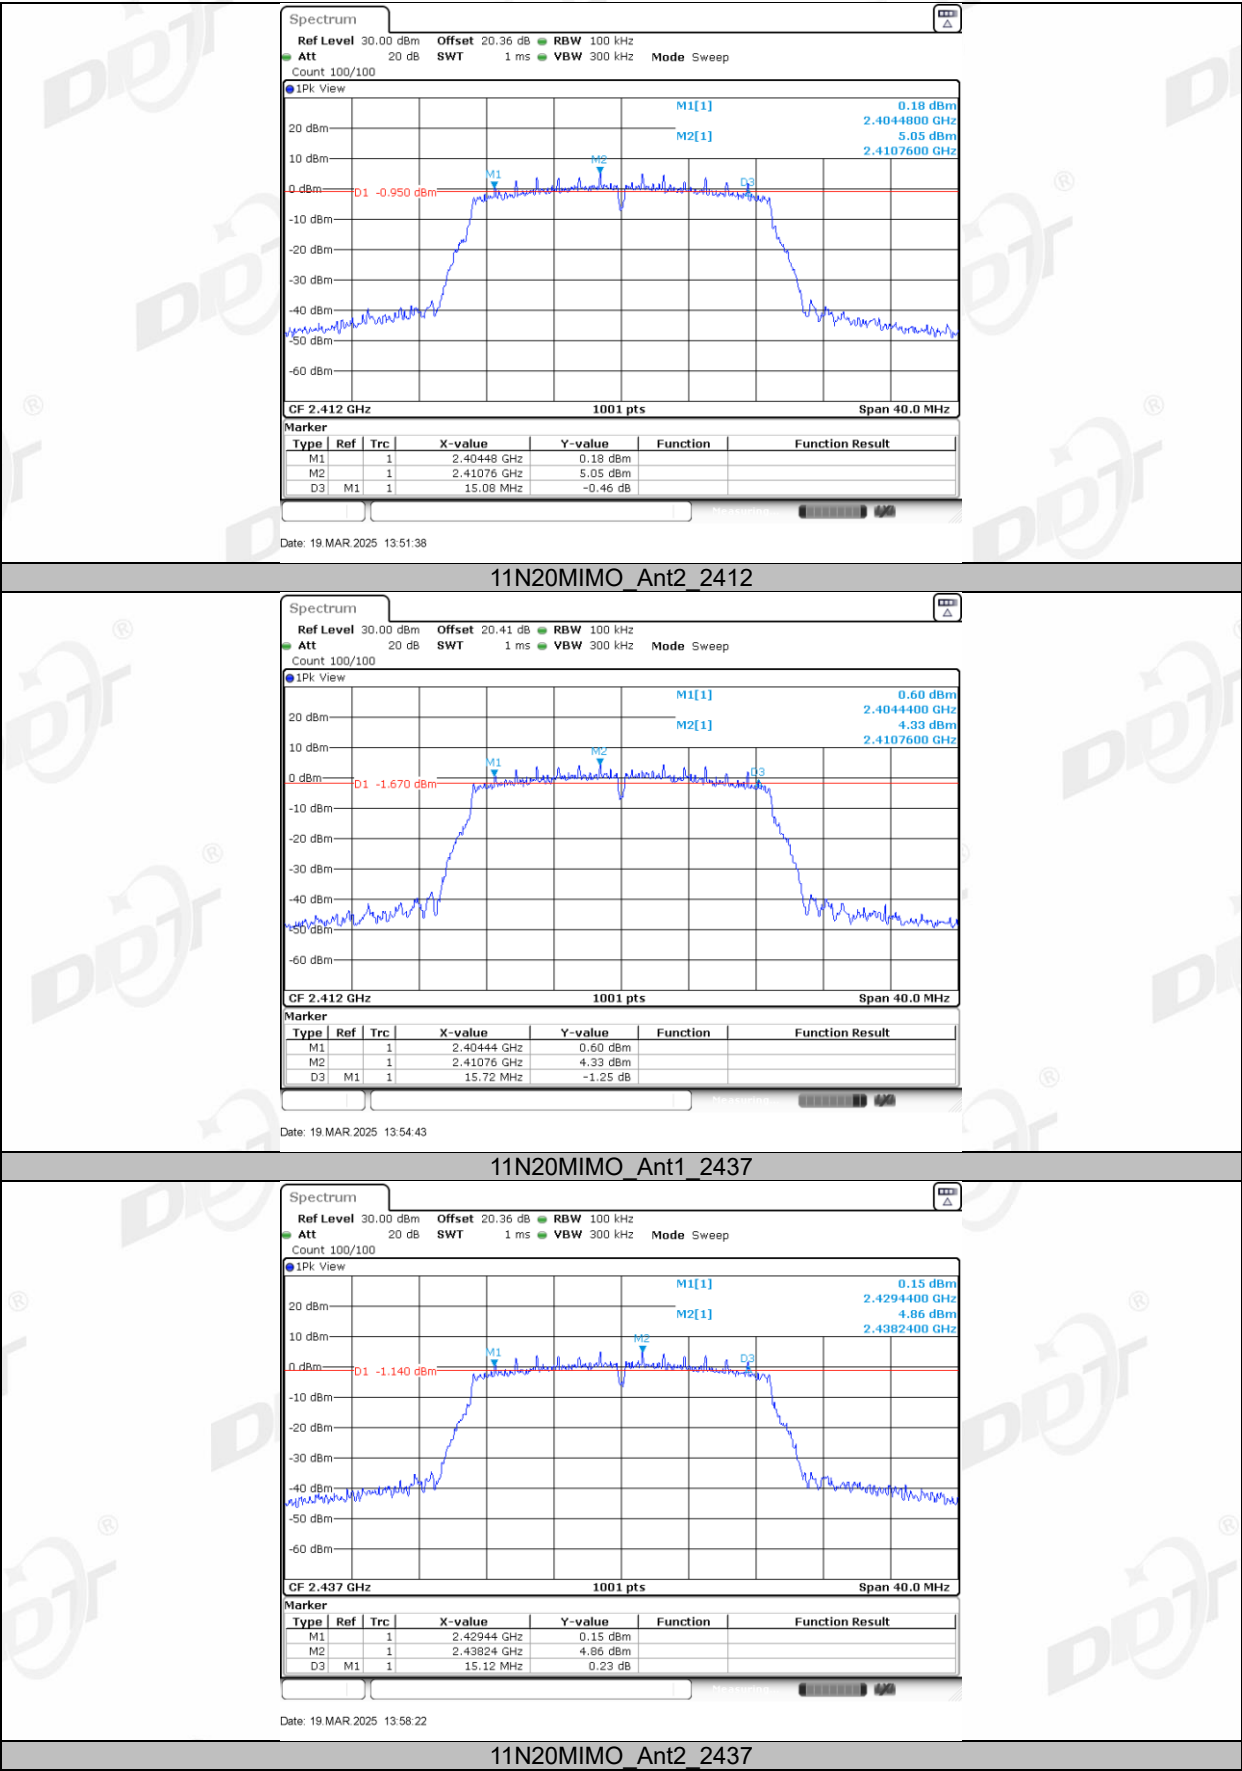


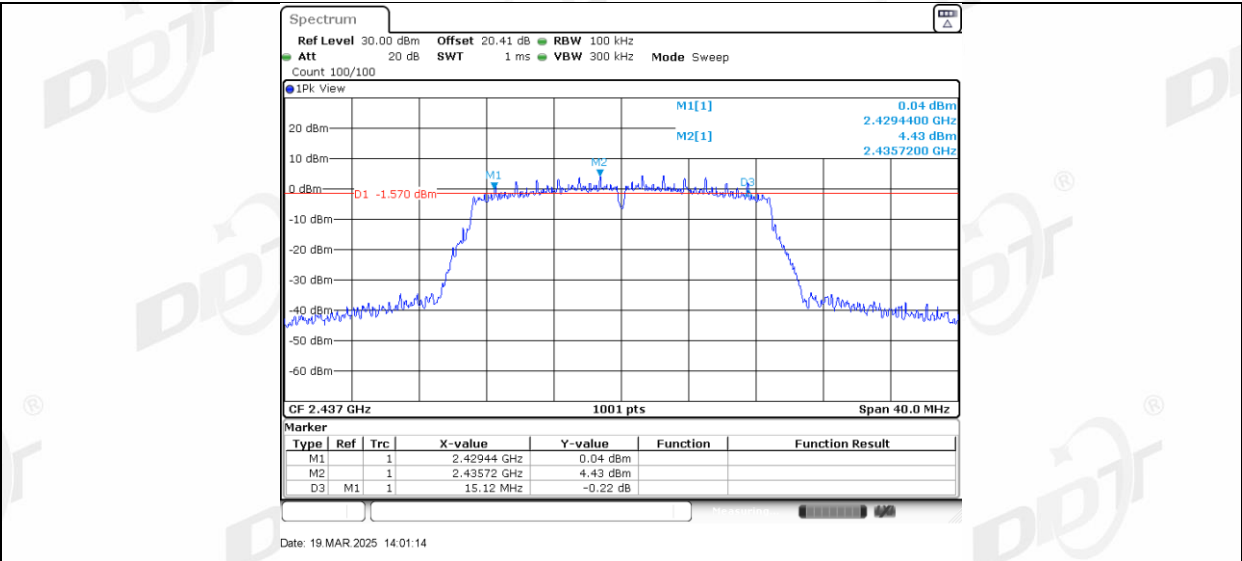


11N20MIMO_Ant1_2462

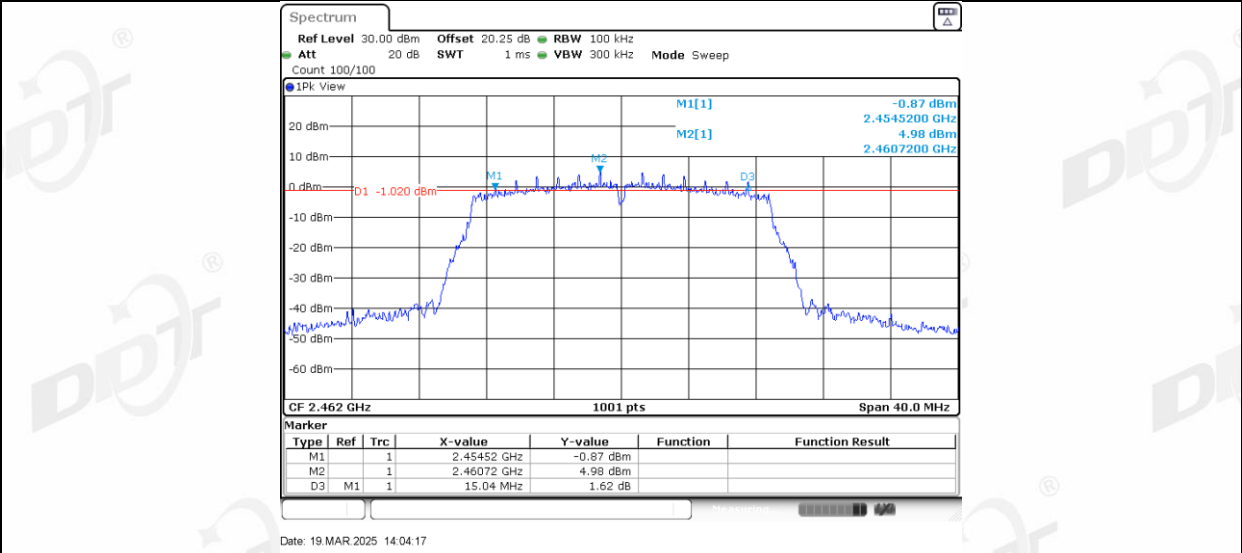


11N20MIMO_Ant2_2462

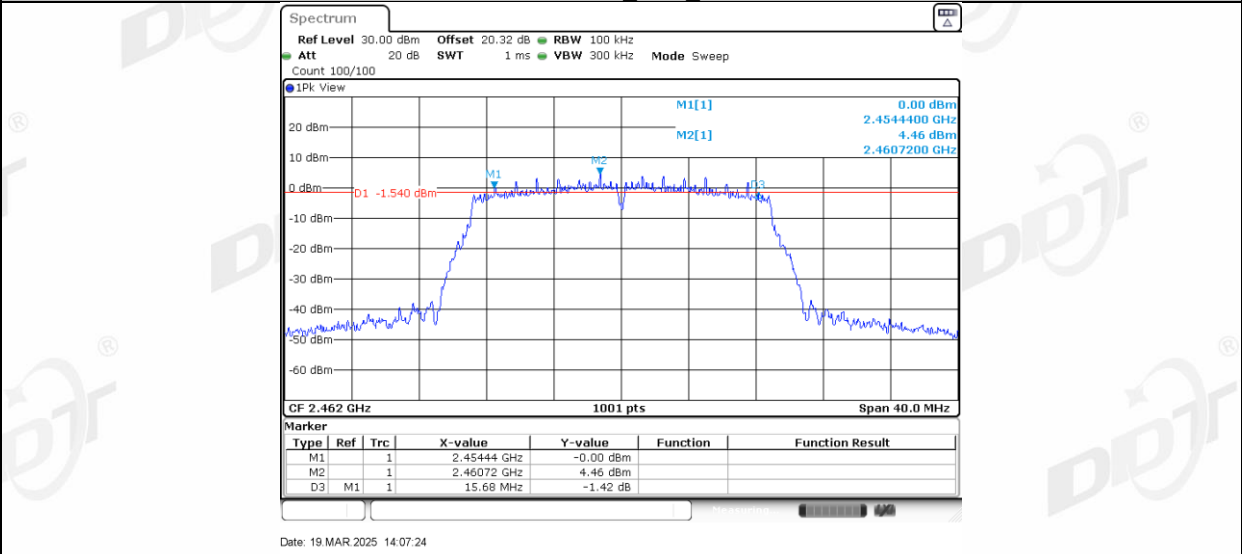


11N40MIMO_Ant1_2422

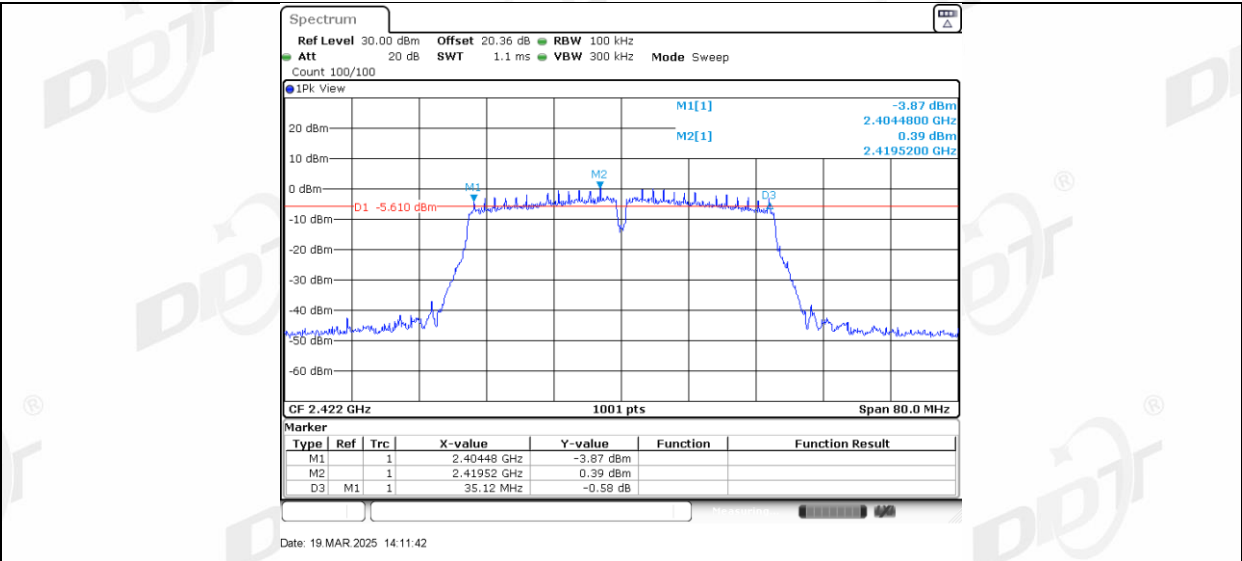


11N40MIMO_Ant2_2422

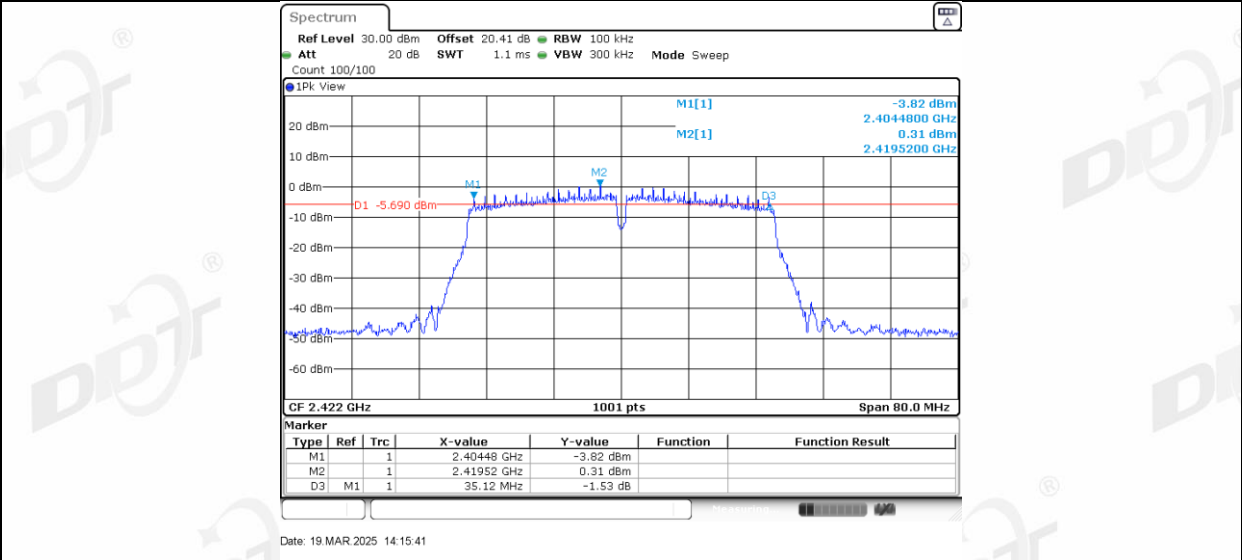


11N40MIMO_Ant1_2437

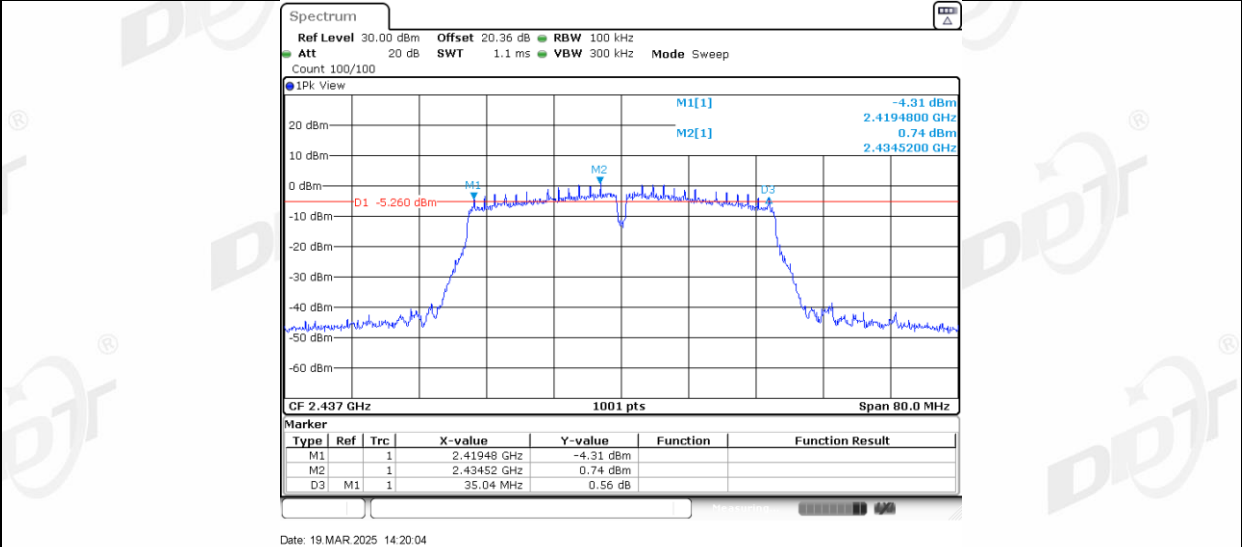


11N40MIMO_Ant2_2437

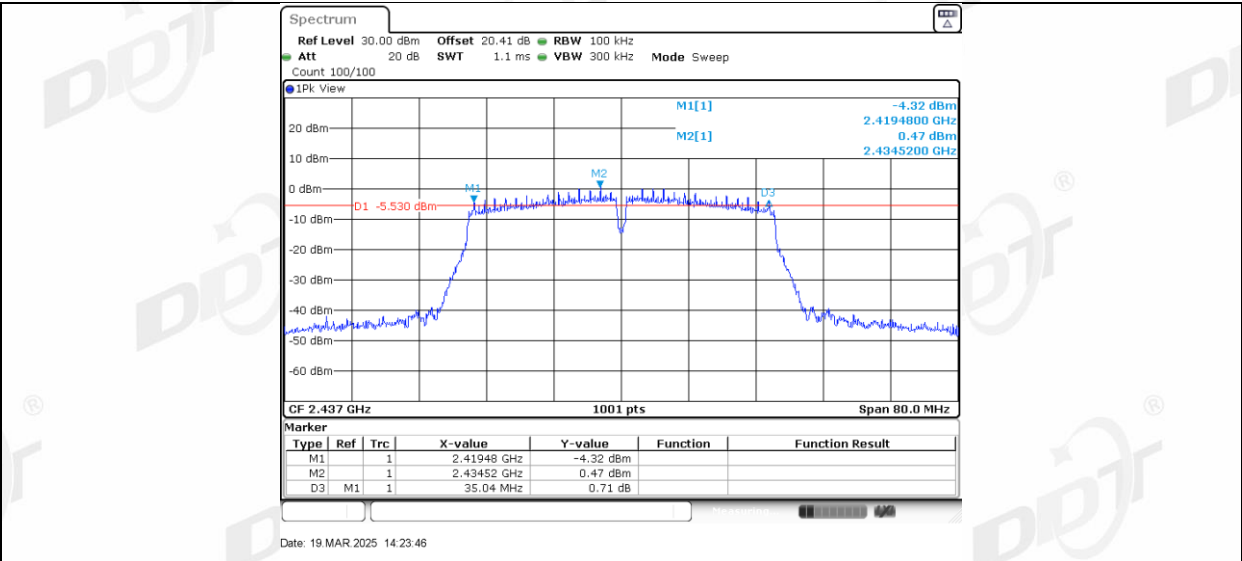

11N40MIMO_Ant1_2452

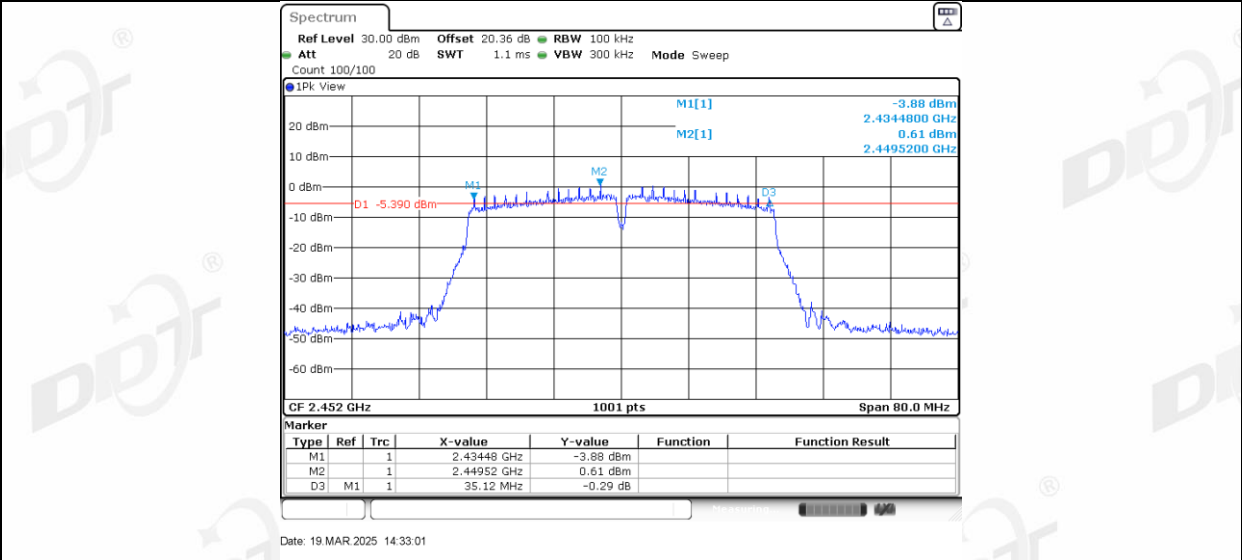


11N40MIMO_Ant2_2452

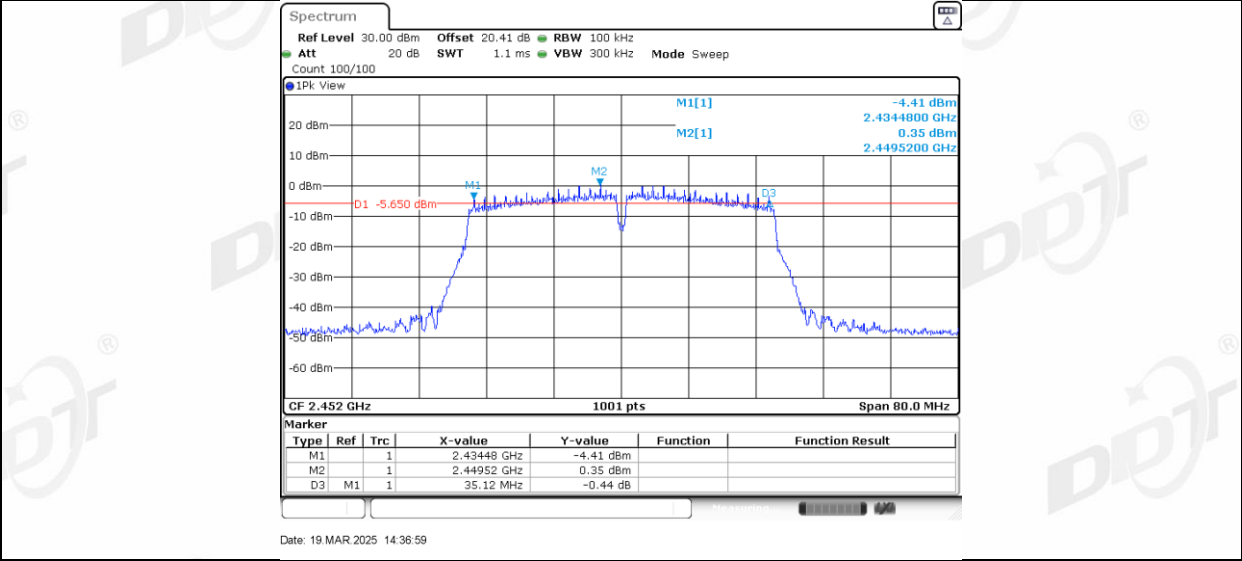

5. 99% Bandwidth

5.1. Block diagram of test setup

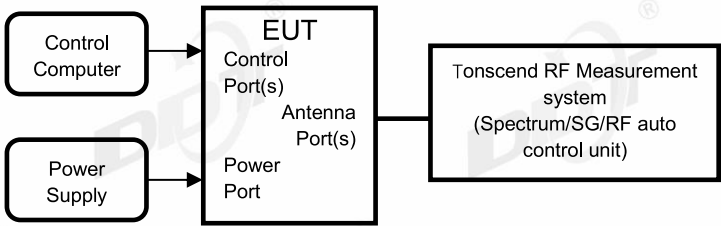

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold

Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


5.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,32.6%RH	Test Date:	2025.03.19
Test Power Supply:	AC 120V	Sample Number:	S25011610-003


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.626	2405.1668	2418.7932	---	---
	Ant2	2412	13.387	2405.2867	2418.6733	---	---
	Ant1	2437	13.666	2430.1668	2443.8332	---	---
	Ant2	2437	13.467	2430.2468	2443.7133	---	---
	Ant1	2462	13.506	2455.1668	2468.6733	---	---
	Ant2	2462	13.427	2455.2468	2468.6733	---	---
11G	Ant1	2412	17.143	2403.4086	2420.5514	---	---
	Ant2	2412	17.143	2403.4486	2420.5914	---	---
	Ant1	2437	17.143	2428.4086	2445.5514	---	---
	Ant2	2437	17.183	2428.4086	2445.5914	---	---
	Ant1	2462	17.143	2453.4086	2470.5514	---	---
	Ant2	2462	17.103	2453.4486	2470.5514	---	---
11N20MIMO	Ant1	2412	18.022	2402.9690	2420.9910	---	---
	Ant2	2412	17.782	2403.0889	2420.8711	---	---
	Ant1	2437	18.062	2427.9690	2446.0310	---	---
	Ant2	2437	17.742	2428.1289	2445.8711	---	---
	Ant1	2462	17.942	2453.0090	2470.9510	---	---
	Ant2	2462	17.782	2453.0889	2470.8711	---	---
11N40MIMO	Ant1	2422	36.444	2403.7782	2440.2218	---	---
	Ant2	2422	36.364	2403.7782	2440.1419	---	---
	Ant1	2437	36.204	2418.9381	2455.1419	---	---
	Ant2	2437	36.284	2418.8581	2455.1419	---	---
	Ant1	2452	36.364	2433.7782	2470.1419	---	---
	Ant2	2452	36.284	2433.8581	2470.1419	---	---

5.5. Test graphs




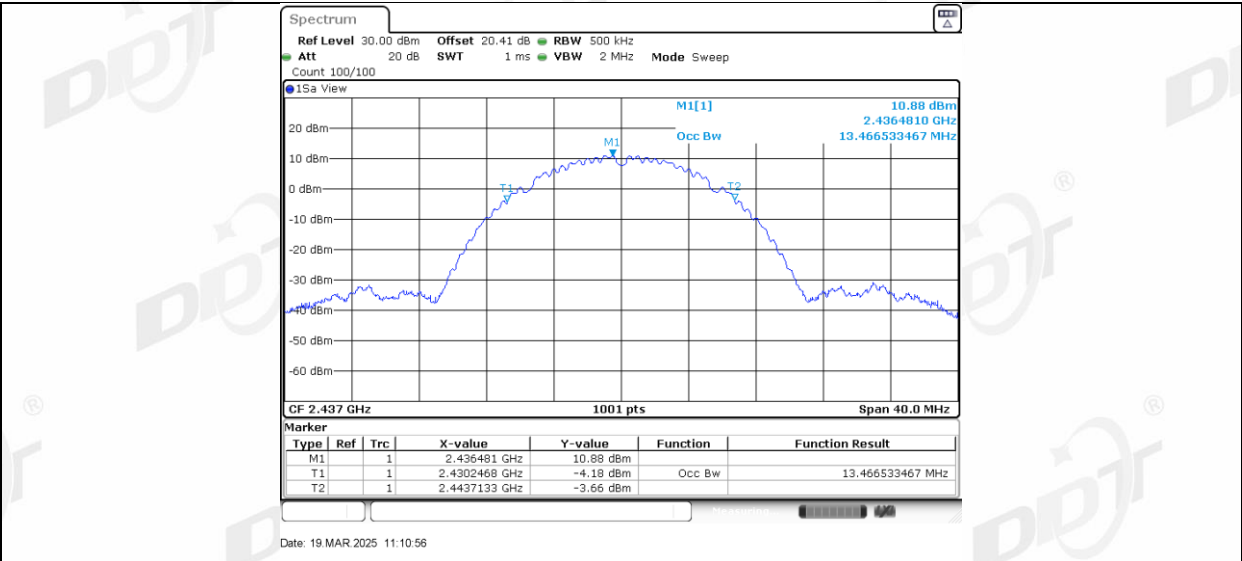


11B_Ant1_2462

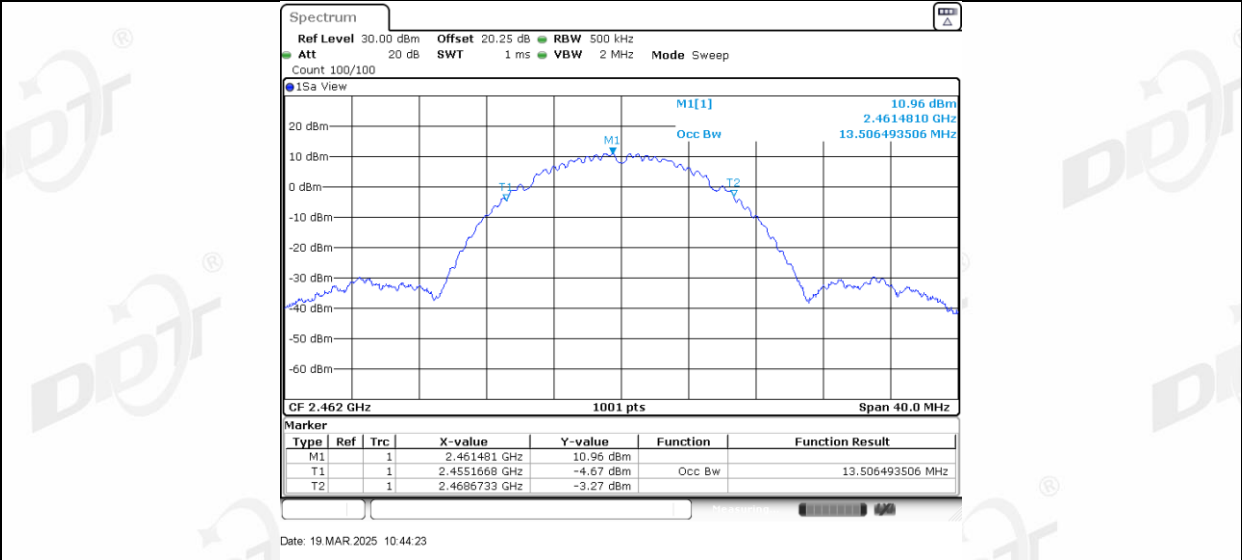


11B_Ant2_2462

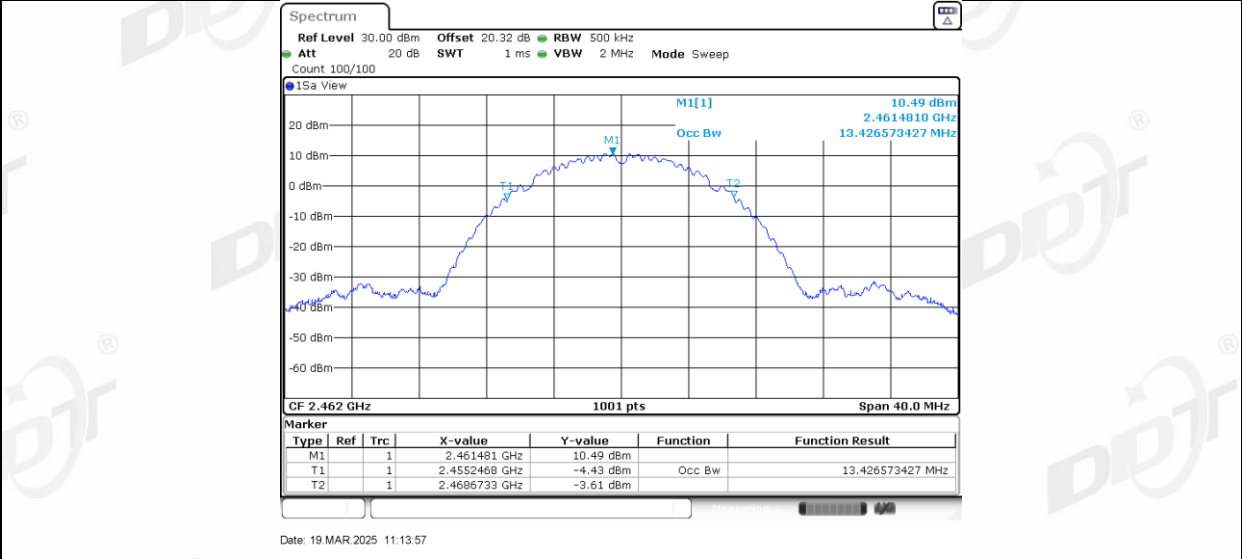


11G_Ant1_2412

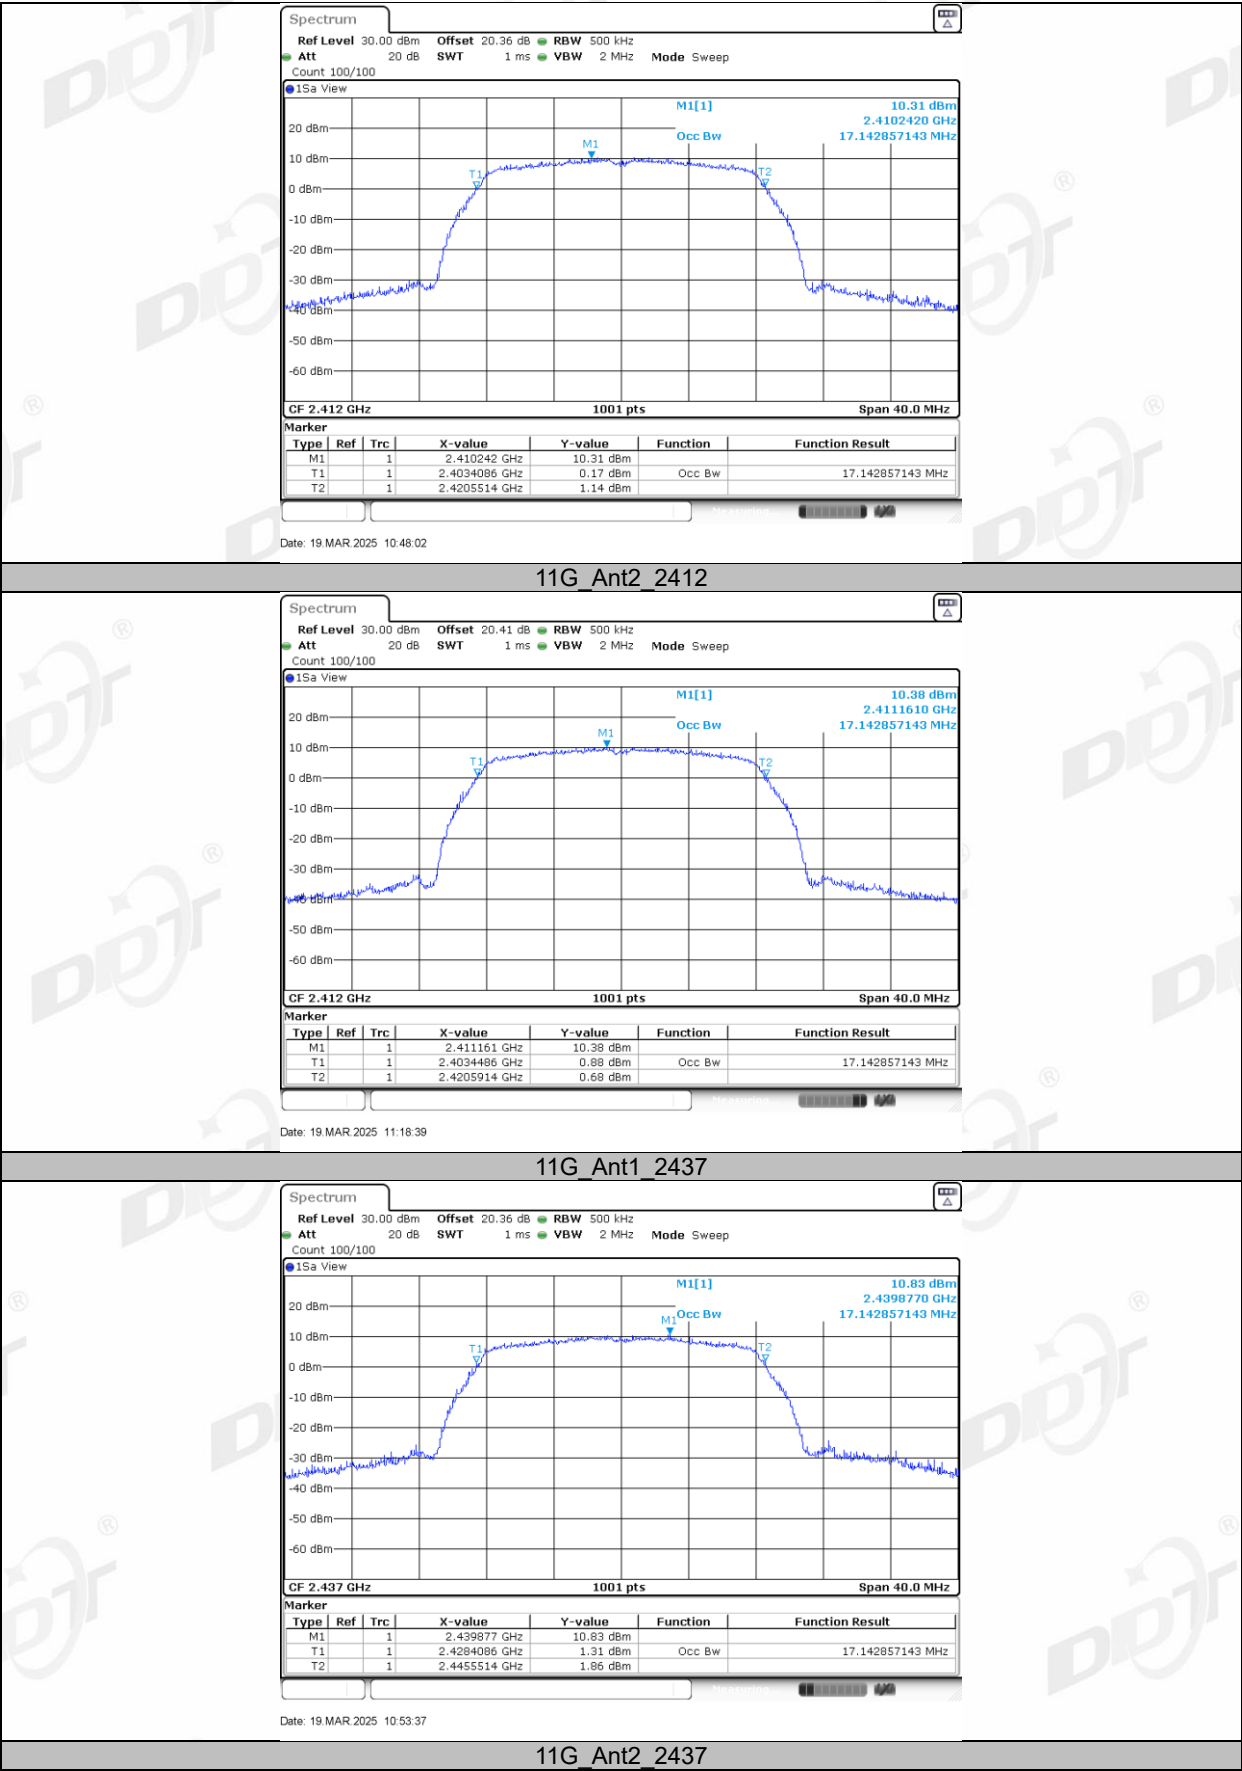


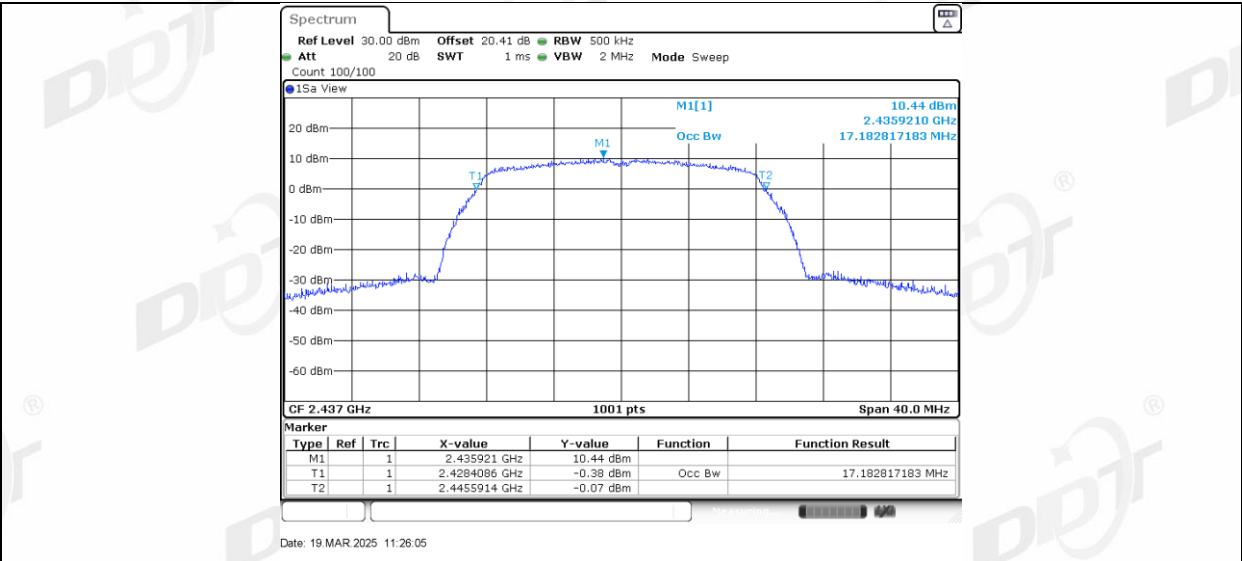


11G Ant1_2462

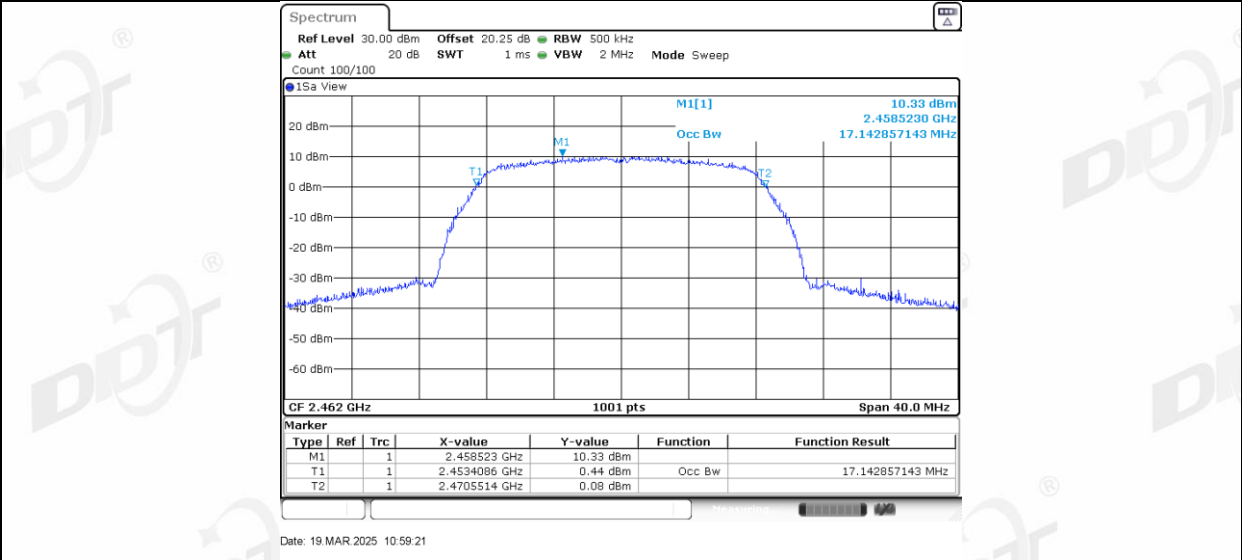


11G Ant2_2462

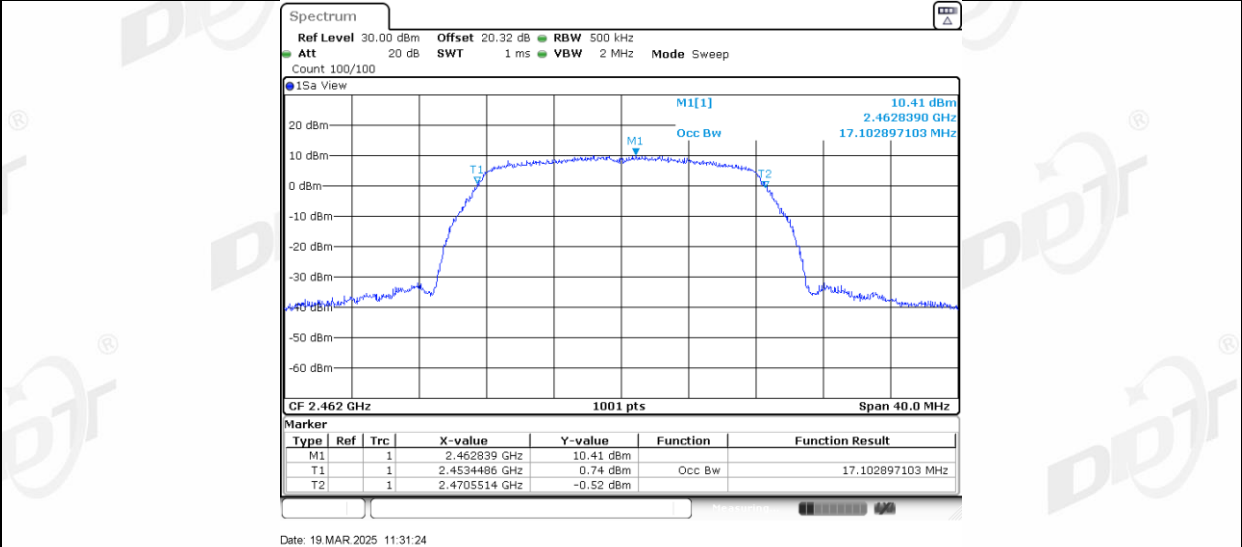


11N20MIMO_Ant1_2412

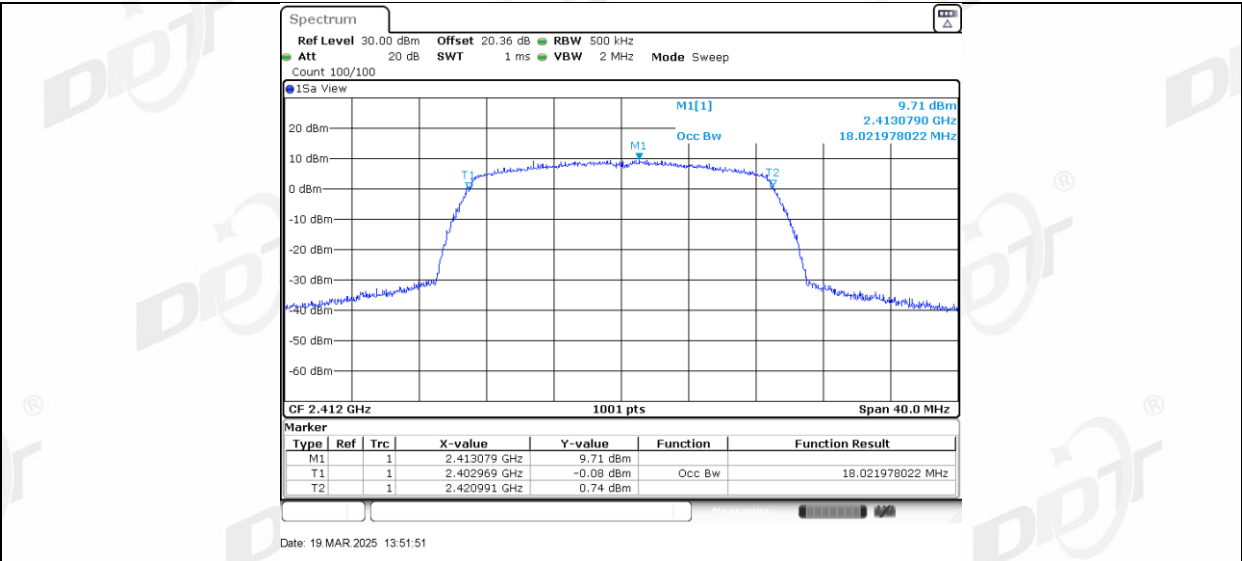


11N20MIMO_Ant2_2412

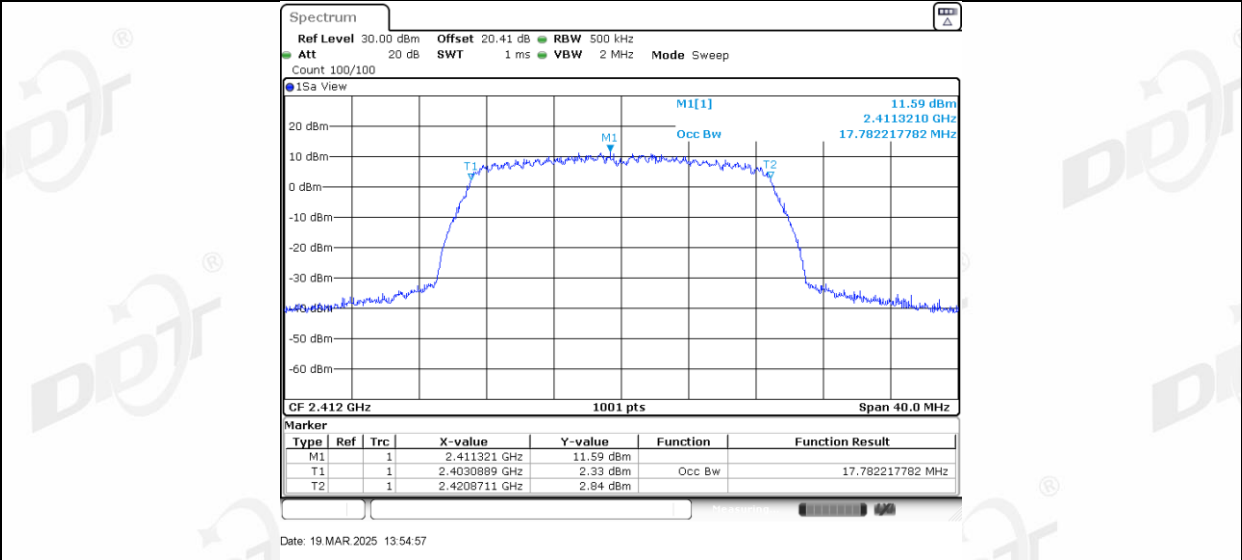


11N20MIMO_Ant1_2437

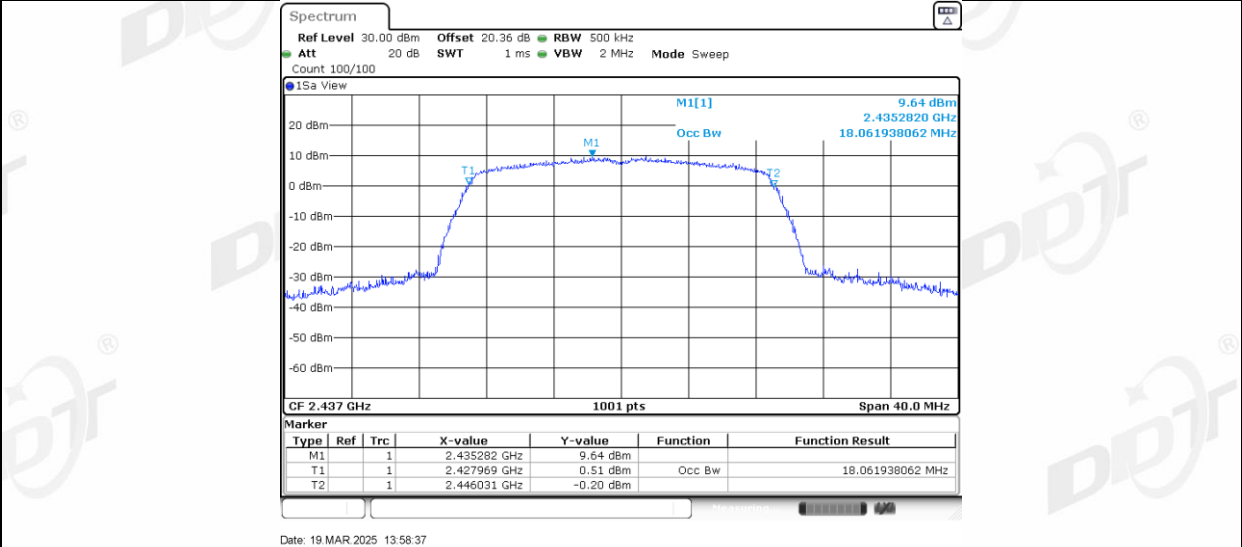


11N20MIMO_Ant2_2437

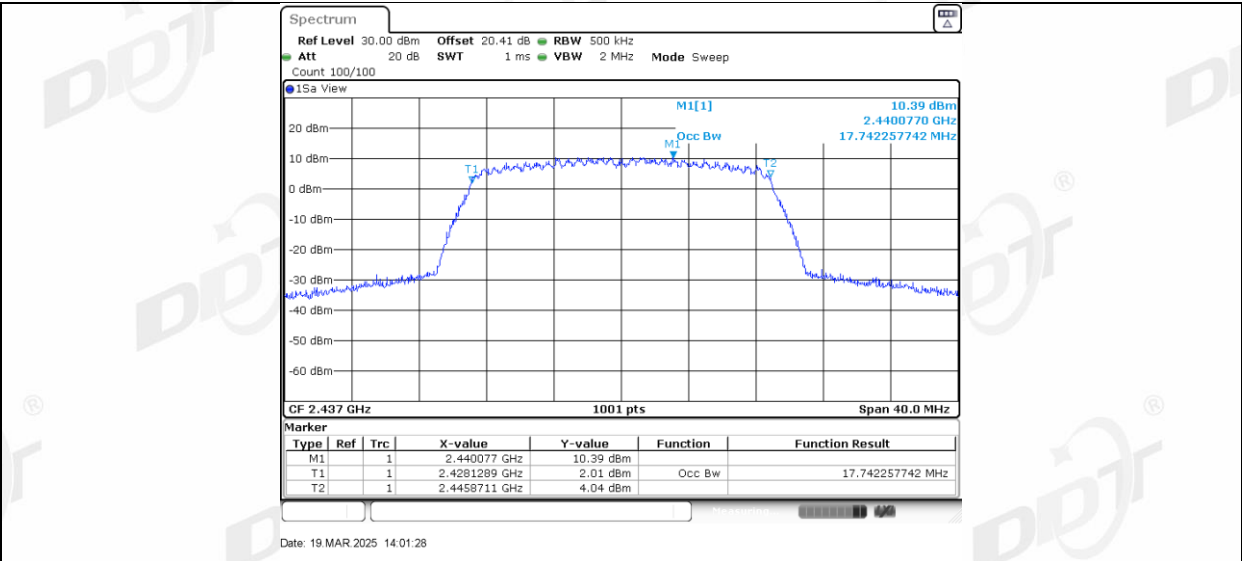


11N20MIMO_Ant1_2462

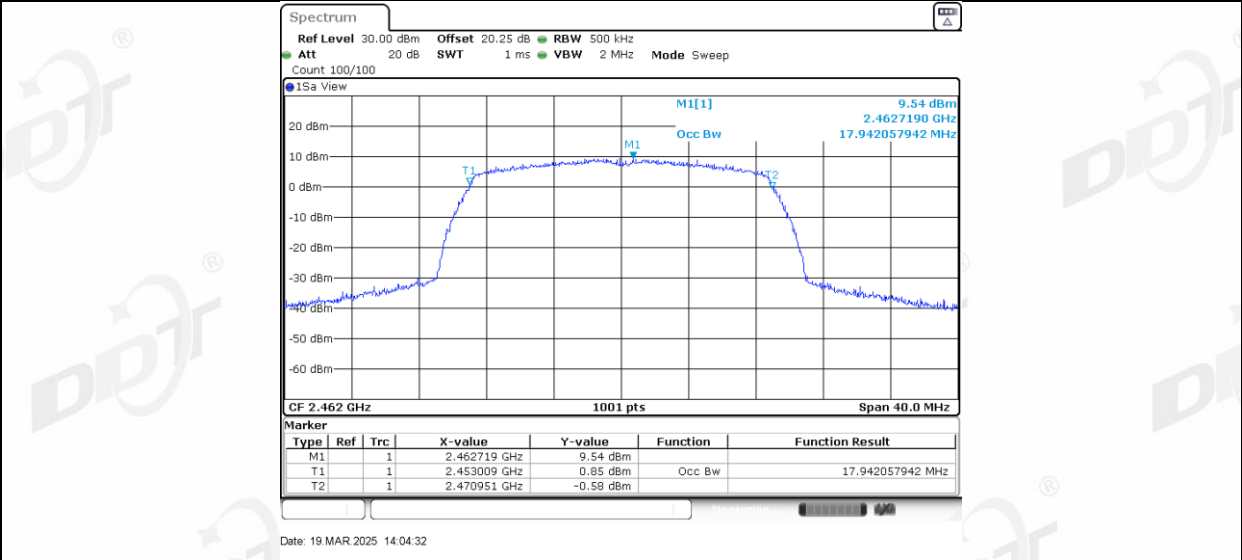


11N20MIMO_Ant2_2462

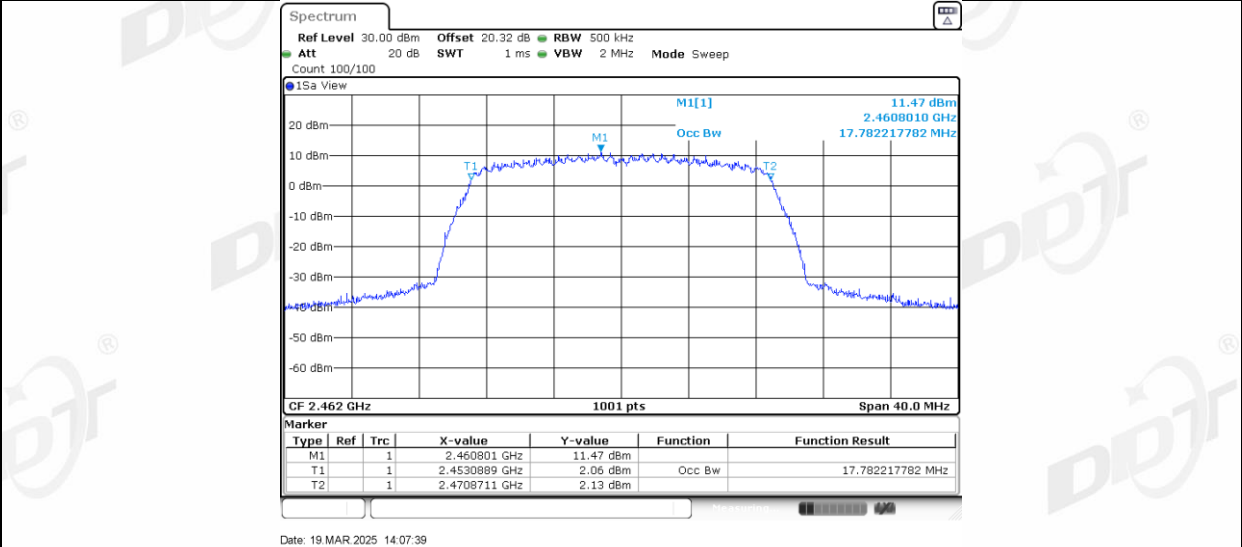


11N40MIMO_Ant1_2422

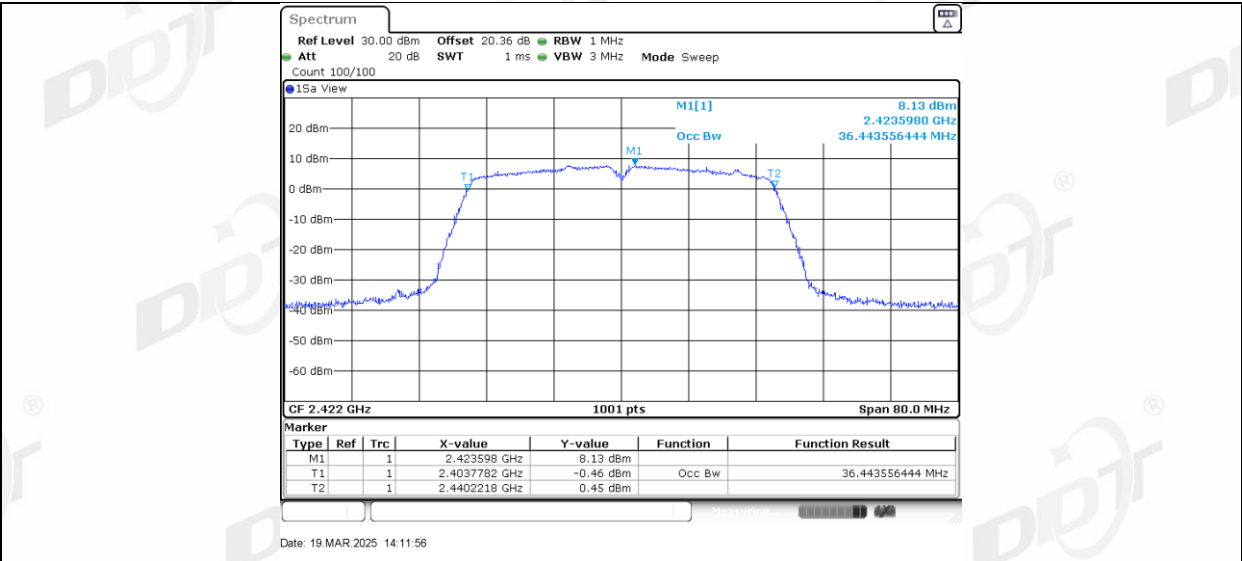


11N40MIMO_Ant2_2422

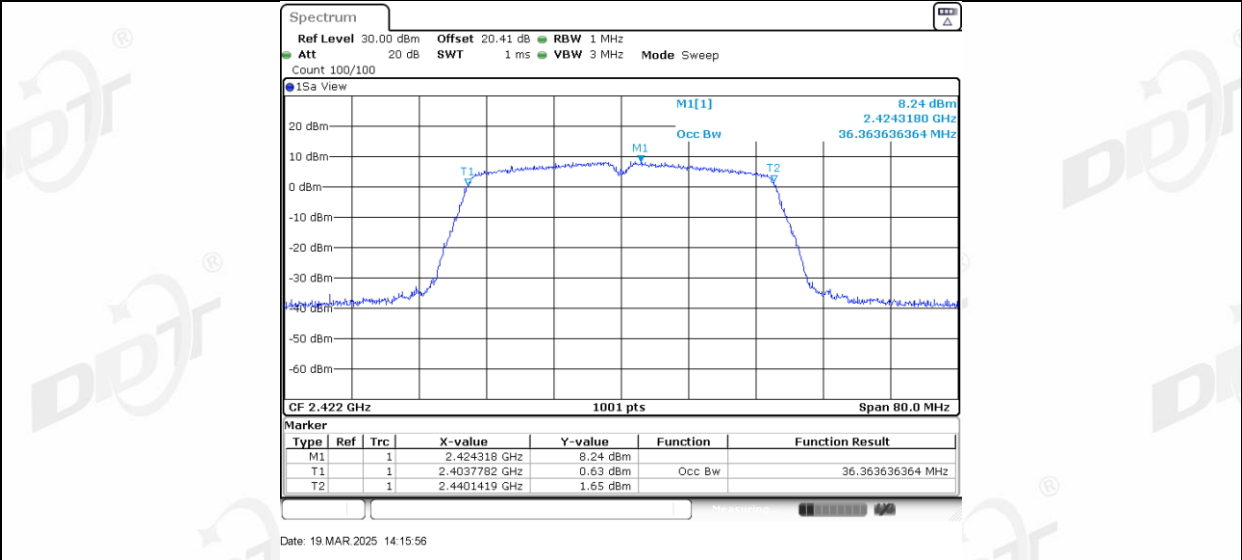


11N40MIMO_Ant1_2437

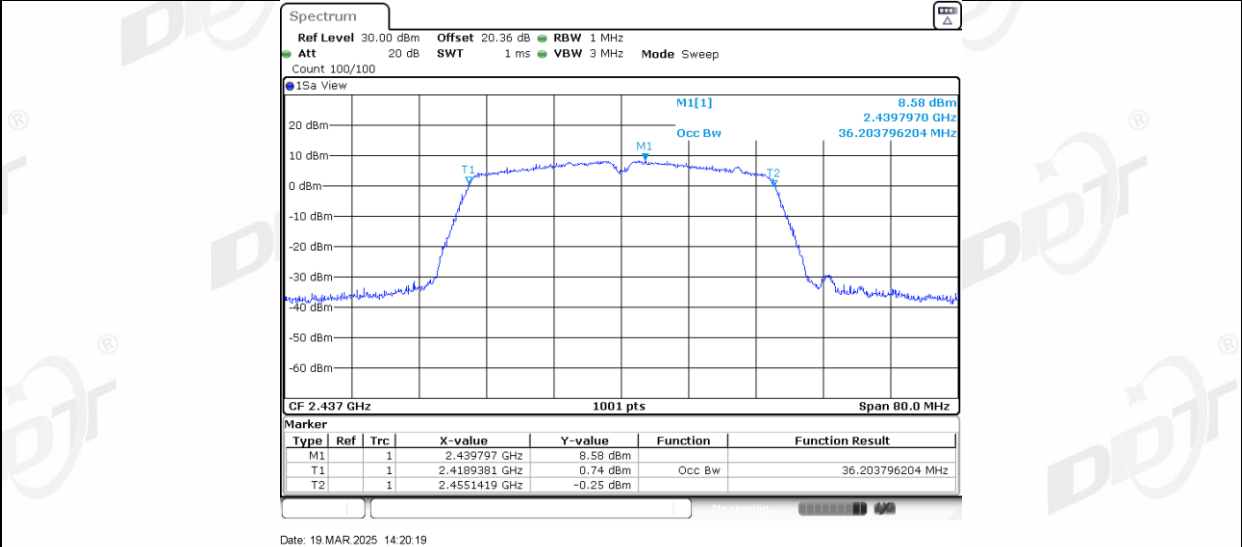


11N40MIMO_Ant2_2437

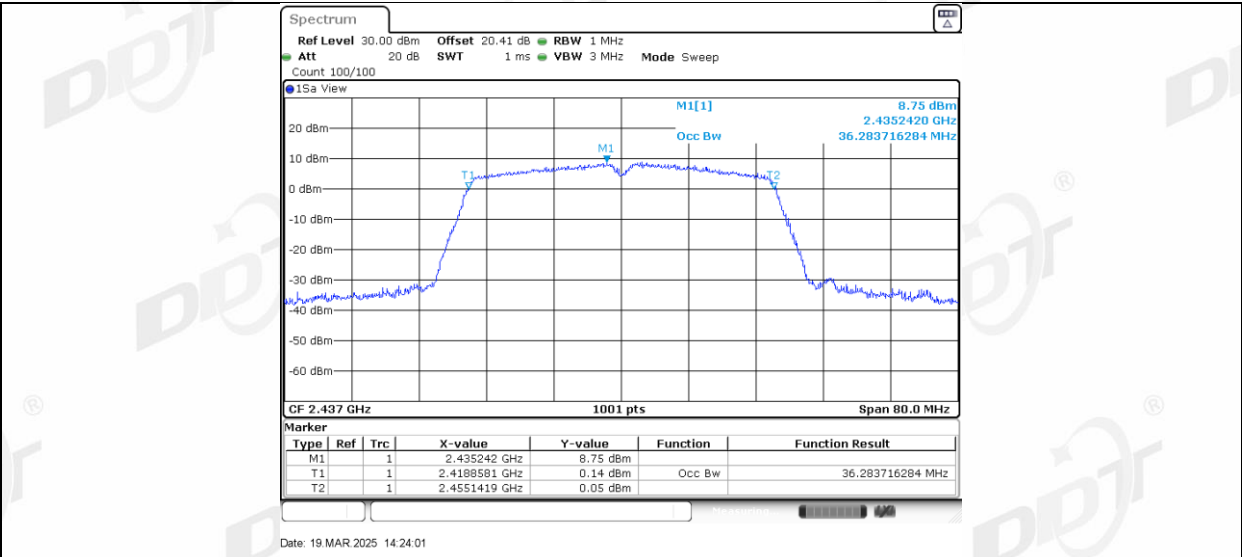

11N40MIMO_Ant1_2452

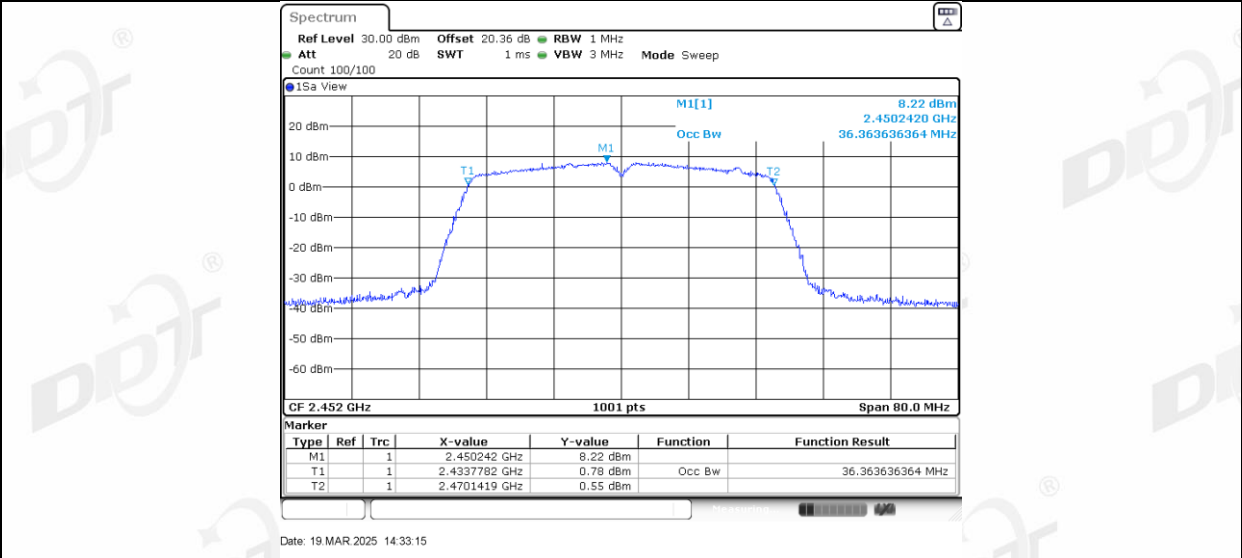


11N40MIMO_Ant2_2452

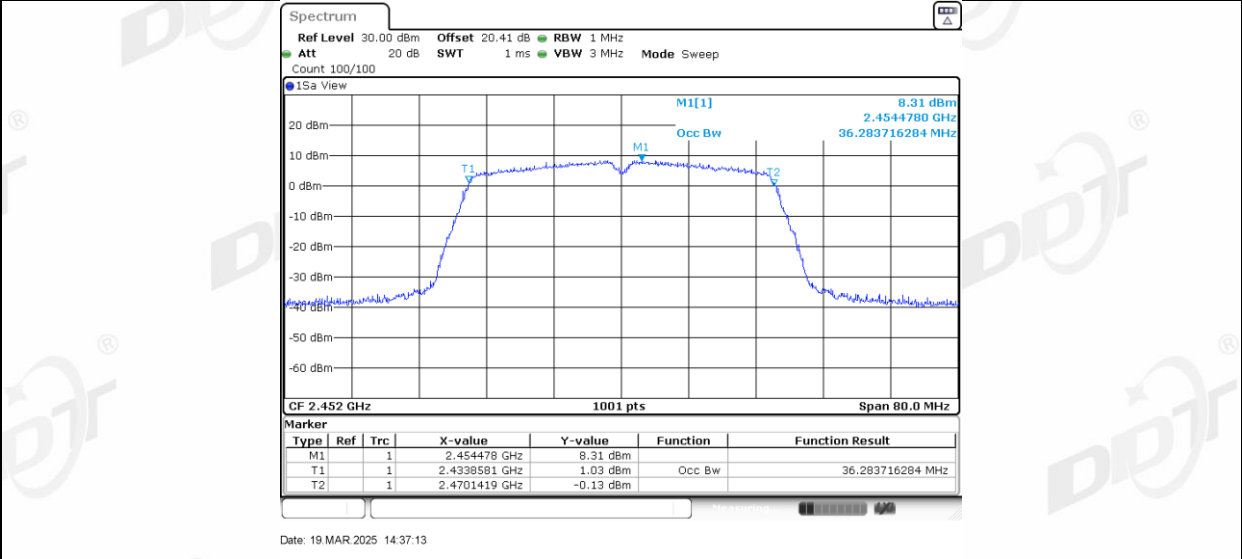

6. Conducted Output Power

6.1. Block diagram of test setup

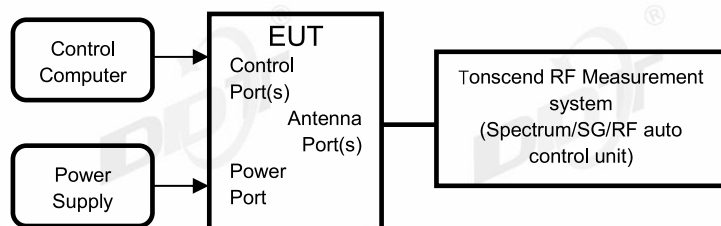

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

6.4. Test result average


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,32.6%RH	Test Date:	2025.03.19
Test Power Supply:	AC 120V	Sample Number:	S25011610-003

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	19.70	99.64	0.02	19.72	≤30.00	19.5	≤36.00	PASS
	Ant2	2412	19.32	99.64	0.02	19.34	≤30.00	20.23	≤36.00	PASS
	Ant1	2437	19.93	99.53	0.02	19.95	≤30.00	19.73	≤36.00	PASS
	Ant2	2437	19.64	99.53	0.02	19.66	≤30.00	20.55	≤36.00	PASS
	Ant1	2462	19.69	99.41	0.03	19.72	≤30.00	19.5	≤36.00	PASS
	Ant2	2462	19.26	99.53	0.02	19.28	≤30.00	20.17	≤36.00	PASS
11G	Ant1	2412	16.57	97.20	0.12	16.69	≤30.00	16.47	≤36.00	PASS
	Ant2	2412	16.47	97.22	0.12	16.59	≤30.00	17.48	≤36.00	PASS
	Ant1	2437	16.51	96.53	0.15	16.66	≤30.00	16.44	≤36.00	PASS
	Ant2	2437	16.12	96.53	0.15	16.27	≤30.00	17.16	≤36.00	PASS
	Ant1	2462	16.39	97.20	0.12	16.51	≤30.00	16.29	≤36.00	PASS
	Ant2	2462	16.15	96.53	0.15	16.30	≤30.00	17.19	≤36.00	PASS
11N20MIMO	Ant1	2412	15.82	94.37	0.25	16.07	≤30.00	15.85	≤36.00	PASS
	Ant2	2412	15.69	93.06	0.31	16.00	≤30.00	16.89	≤36.00	PASS
	total	2412	---	---	---	19.05	≤30.00	19.41	≤36.00	PASS
	Ant1	2437	15.78	93.06	0.31	16.09	≤30.00	15.87	≤36.00	PASS
	Ant2	2437	15.40	93.06	0.31	15.71	≤30.00	16.6	≤36.00	PASS
	total	2437	---	---	---	18.91	≤30.00	19.26	≤36.00	PASS
	Ant1	2462	15.66	93.06	0.31	15.97	≤30.00	15.75	≤36.00	PASS
	Ant2	2462	15.34	94.37	0.25	15.59	≤30.00	16.48	≤36.00	PASS
11N40MIMO	total	2462	---	---	---	18.79	≤30.00	19.14	≤36.00	PASS
	Ant1	2422	13.66	87.18	0.60	14.26	≤30.00	14.04	≤36.00	PASS
	Ant2	2422	13.52	87.18	0.60	14.12	≤30.00	15.01	≤36.00	PASS
	total	2422	---	---	---	17.20	≤30.00	17.56	≤36.00	PASS
	Ant1	2437	13.82	89.74	0.47	14.29	≤30.00	14.07	≤36.00	PASS
	Ant2	2437	13.47	89.74	0.47	13.94	≤30.00	14.83	≤36.00	PASS
	total	2437	---	---	---	17.13	≤30.00	17.48	≤36.00	PASS
	Ant1	2452	13.76	89.74	0.47	14.23	≤30.00	14.01	≤36.00	PASS
	Ant2	2452	13.40	89.74	0.47	13.87	≤30.00	14.76	≤36.00	PASS
	total	2452	---	---	---	17.06	≤30.00	17.41	≤36.00	PASS

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

7. Power Spectral Density

7.1. Block diagram of test setup

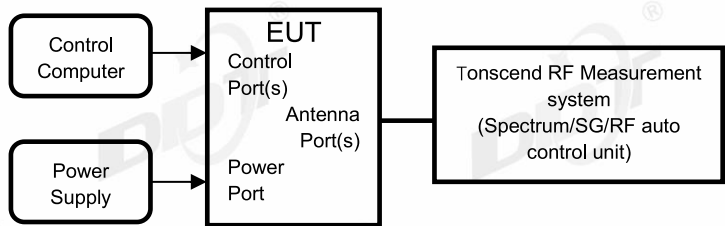

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.

(5) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


7.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,32.6%RH	Test Date:	2025.03.19
Test Power Supply:	AC 120V	Sample Number:	S25011610-003

Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-12.29	≤8.00	PASS
	Ant2	2412	-12.02	≤8.00	PASS
	Ant1	2437	-11.93	≤8.00	PASS
	Ant2	2437	-12.10	≤8.00	PASS
	Ant1	2462	-12.29	≤8.00	PASS
	Ant2	2462	-12.67	≤8.00	PASS
11G	Ant1	2412	-17.12	≤8.00	PASS
	Ant2	2412	-17.18	≤8.00	PASS
	Ant1	2437	-17.16	≤8.00	PASS
	Ant2	2437	-17.10	≤8.00	PASS
	Ant1	2462	-17.13	≤8.00	PASS
	Ant2	2462	-17.45	≤8.00	PASS
11N20MIMO	Ant1	2412	-17.56	≤8.00	PASS
	Ant2	2412	-16.56	≤8.00	PASS
	total	2412	-14.02	≤8.00	PASS
	Ant1	2437	-17.07	≤8.00	PASS
	Ant2	2437	-16.85	≤8.00	PASS
	total	2437	-13.95	≤8.00	PASS
	Ant1	2462	-17.47	≤8.00	PASS
	Ant2	2462	-17.05	≤8.00	PASS
11N40MIMO	total	2462	-14.24	≤8.00	PASS
	Ant1	2422	-23.34	≤8.00	PASS
	Ant2	2422	-23.06	≤8.00	PASS
	total	2422	-20.19	≤8.00	PASS
	Ant1	2437	-22.86	≤8.00	PASS
	Ant2	2437	-23.16	≤8.00	PASS
	total	2437	-20.00	≤8.00	PASS
	Ant1	2452	-23.12	≤8.00	PASS
	Ant2	2452	-23.35	≤8.00	PASS
	total	2452	-20.22	≤8.00	PASS


Note: The Duty Cycle Factor is compensated in the graph.

7.5. Test graphs

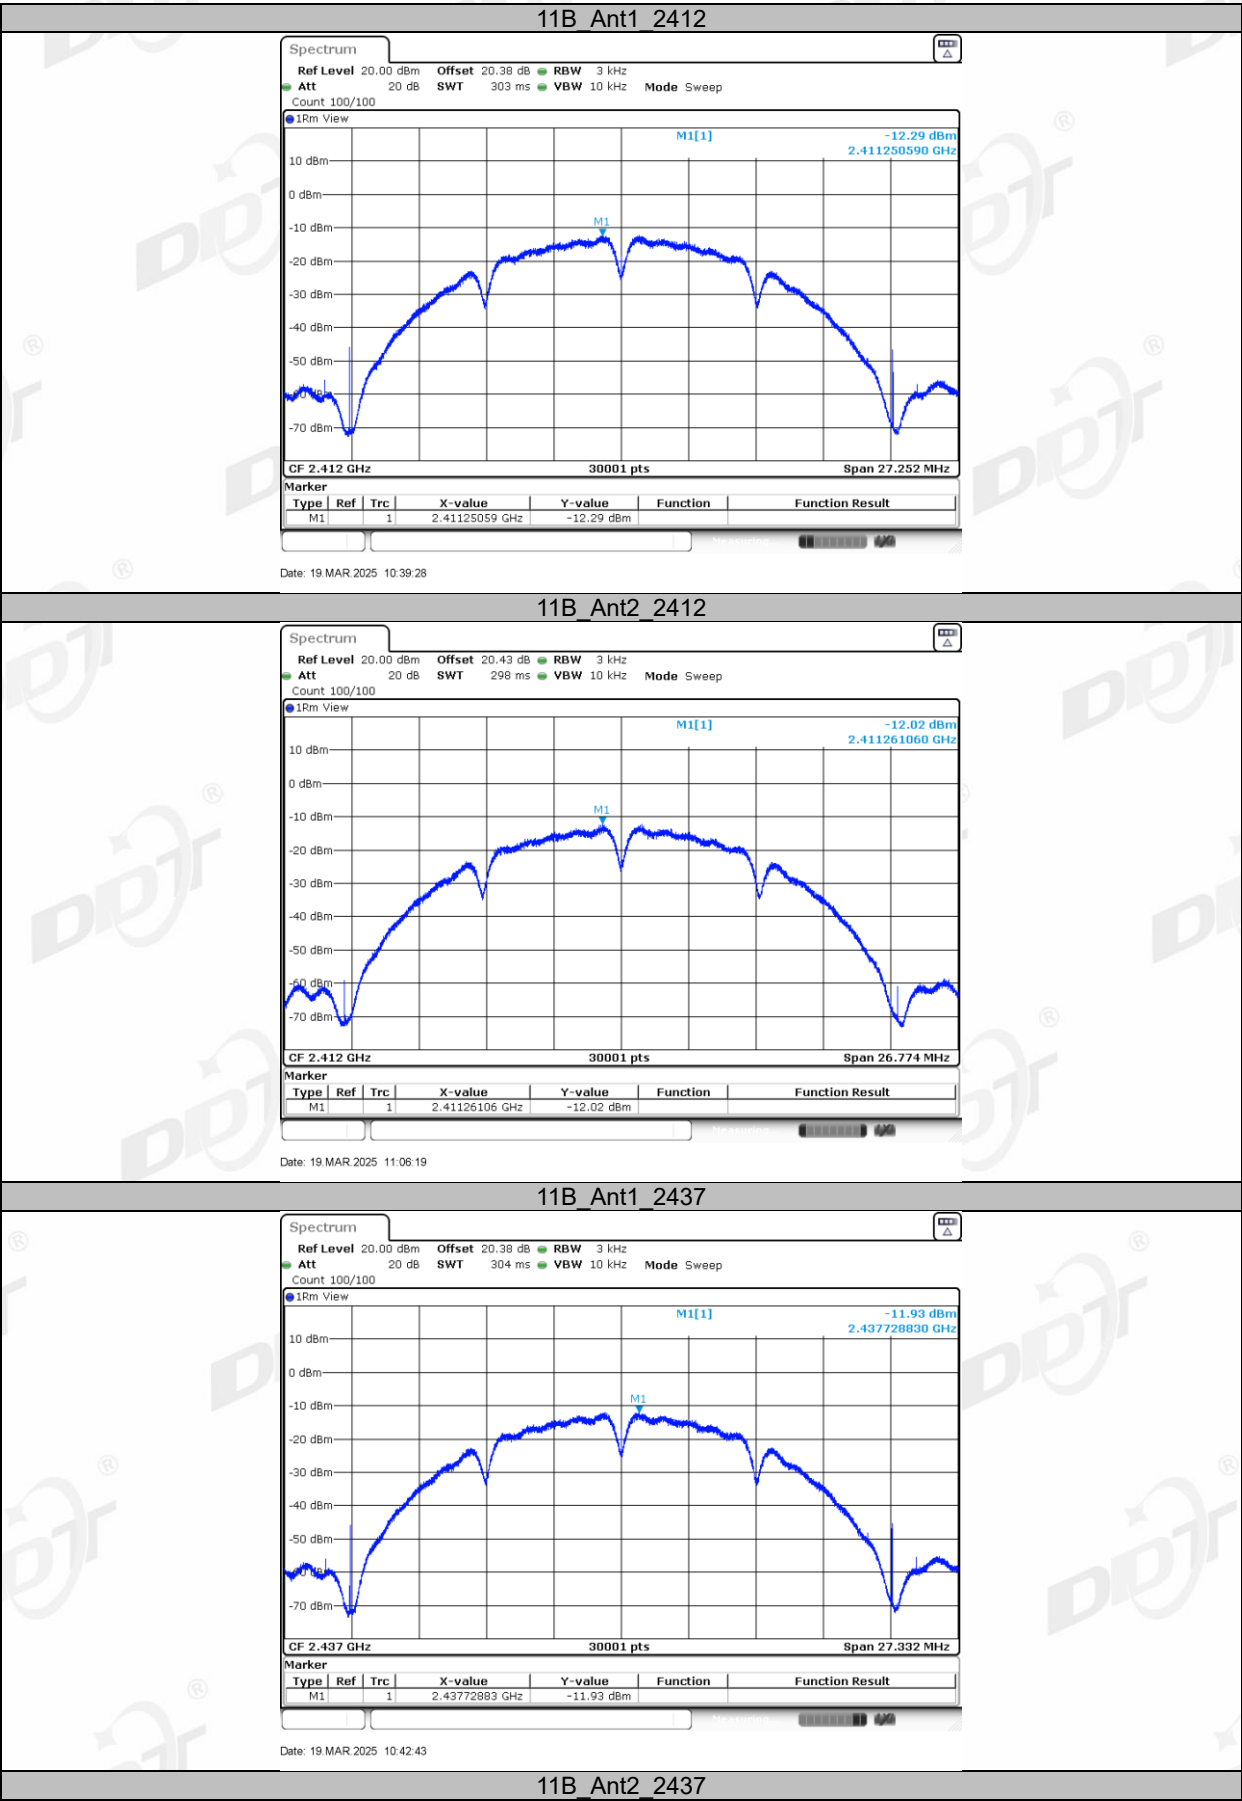


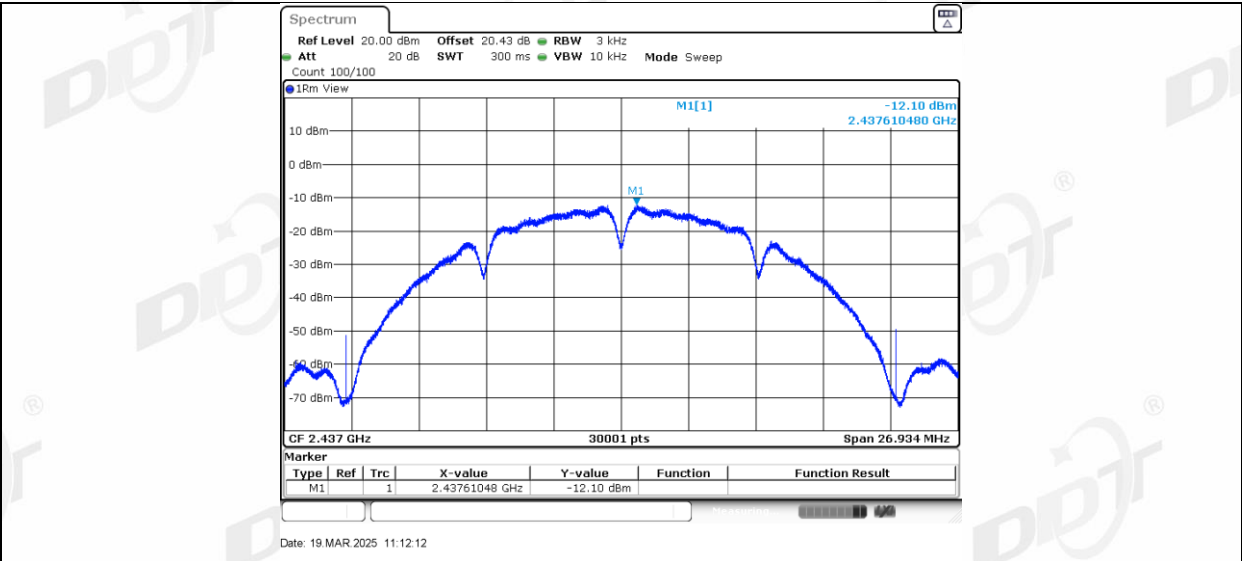


11B_Ant1_2462

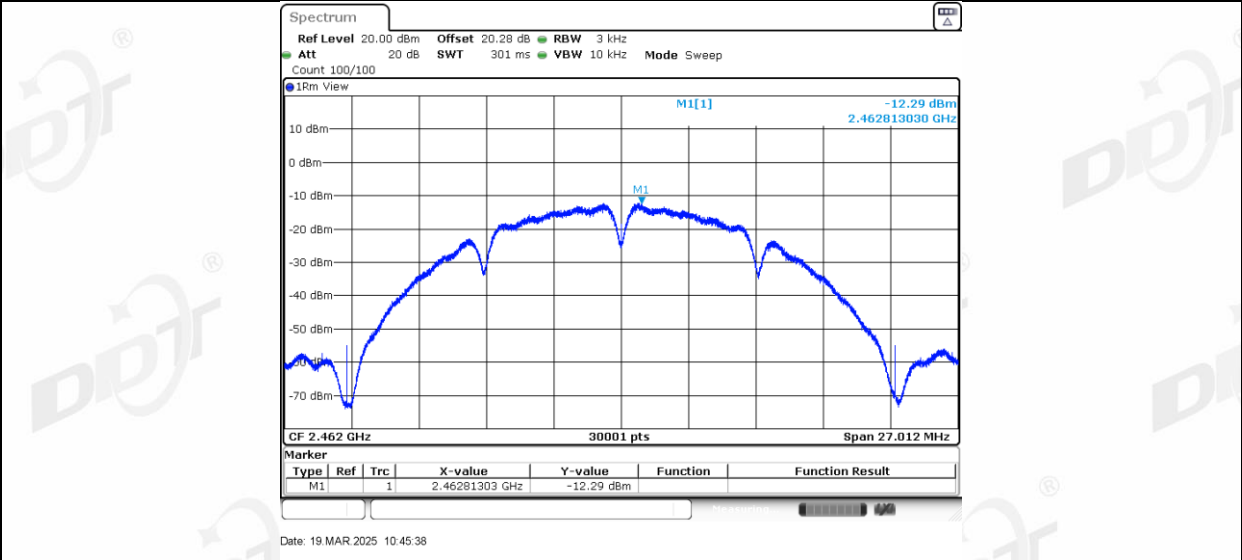


11B_Ant2_2462

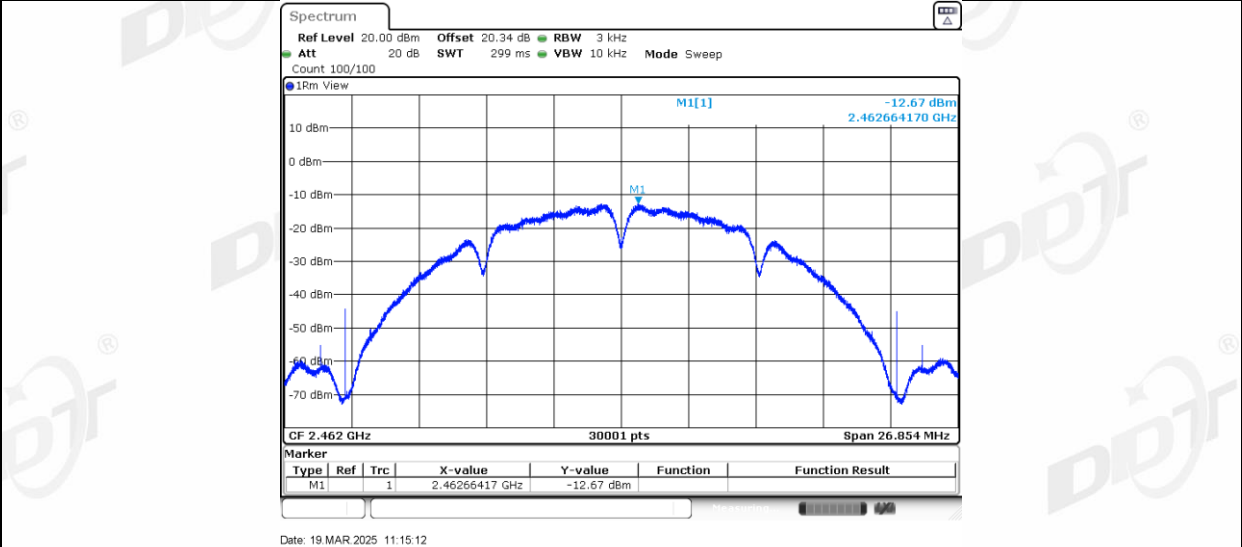


11G_Ant1_2412

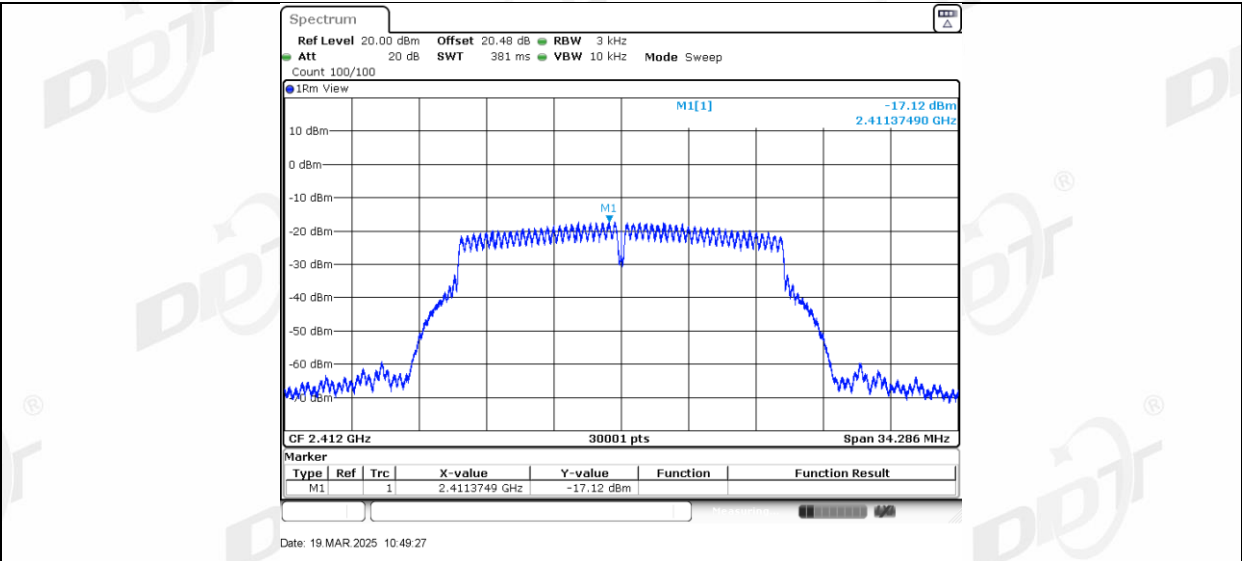


11G_Ant2_2412

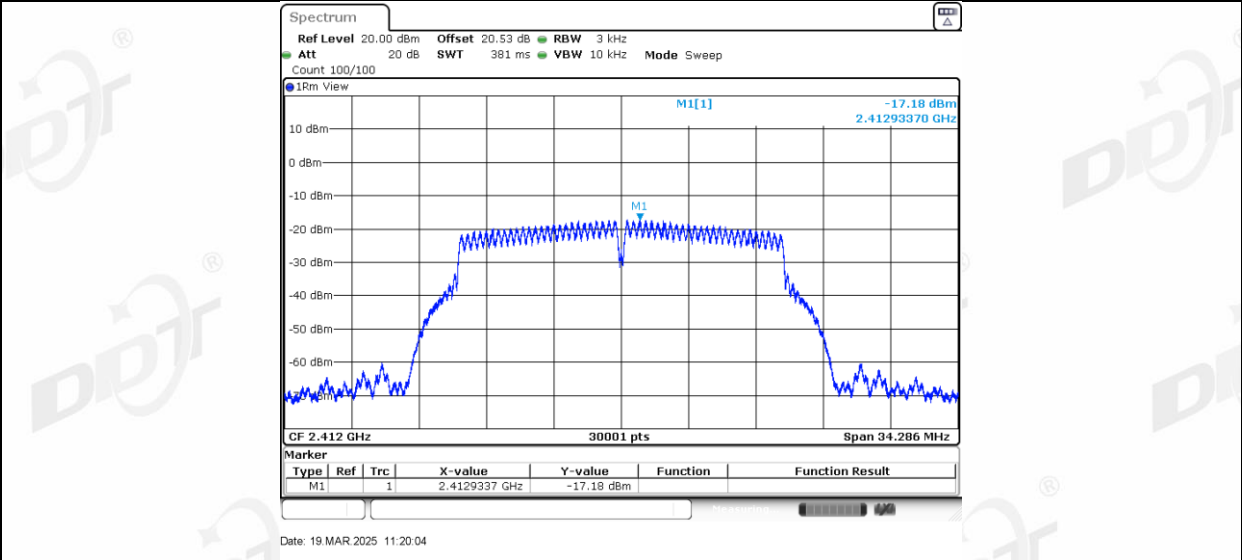


11G_Ant1_2437

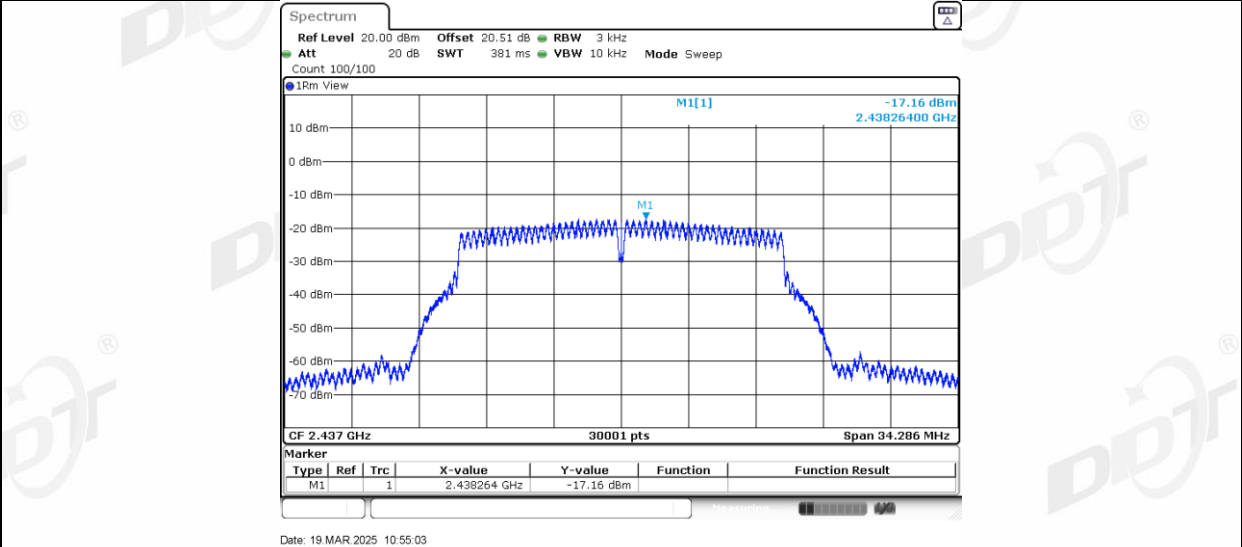


11G_Ant2_2437

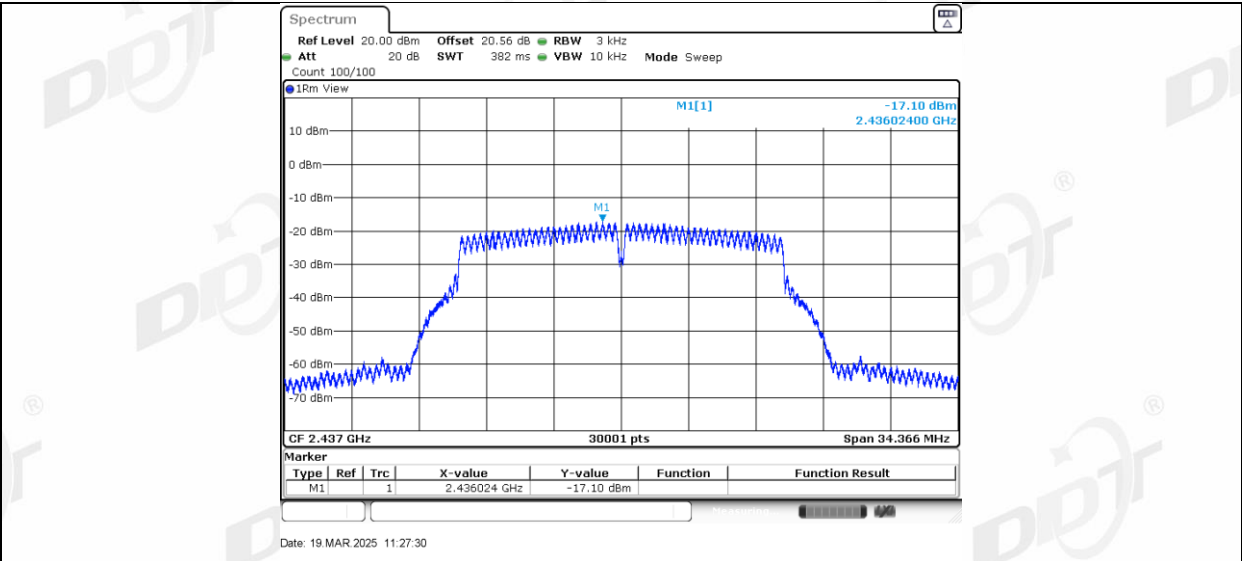


11G Ant1_2462

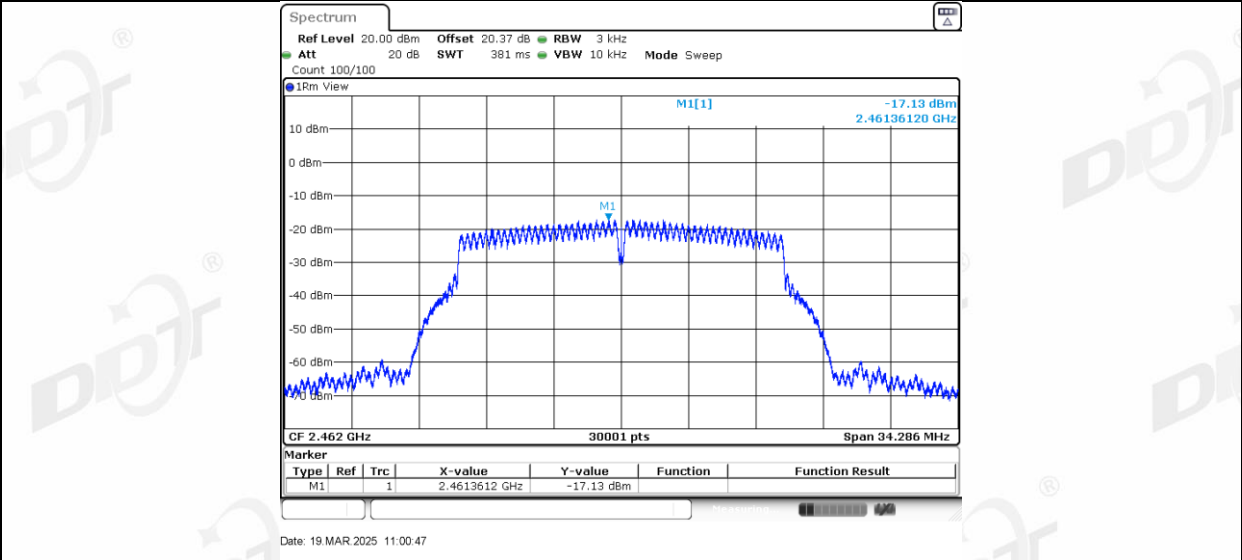


11G Ant2_2462

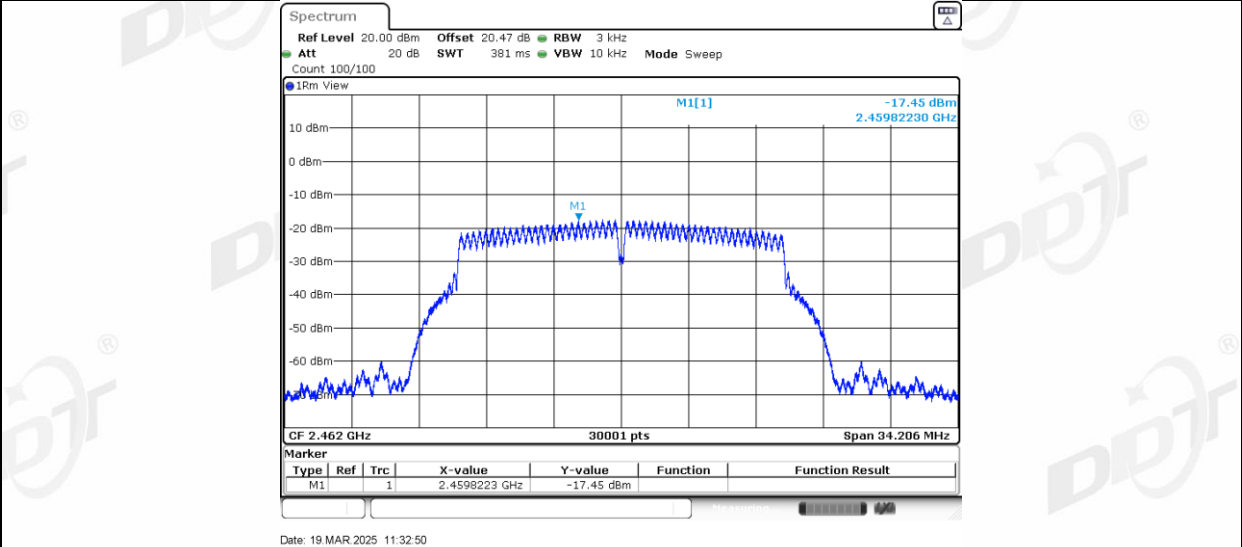


11N20MIMO_Ant1_2412

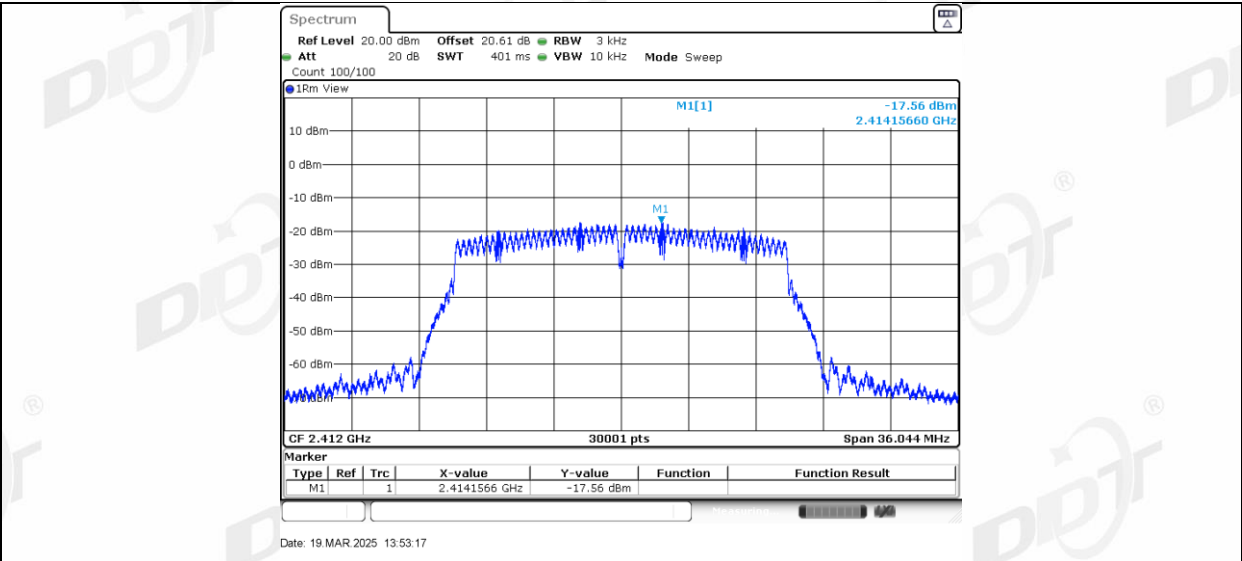


11N20MIMO_Ant2_2412

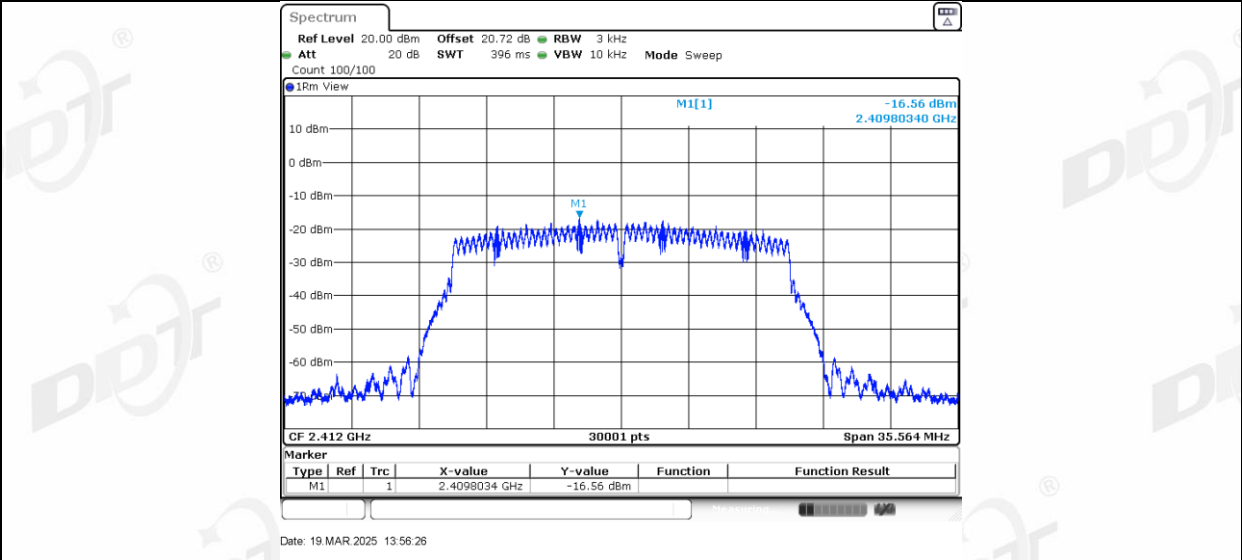


11N20MIMO_Ant1_2437

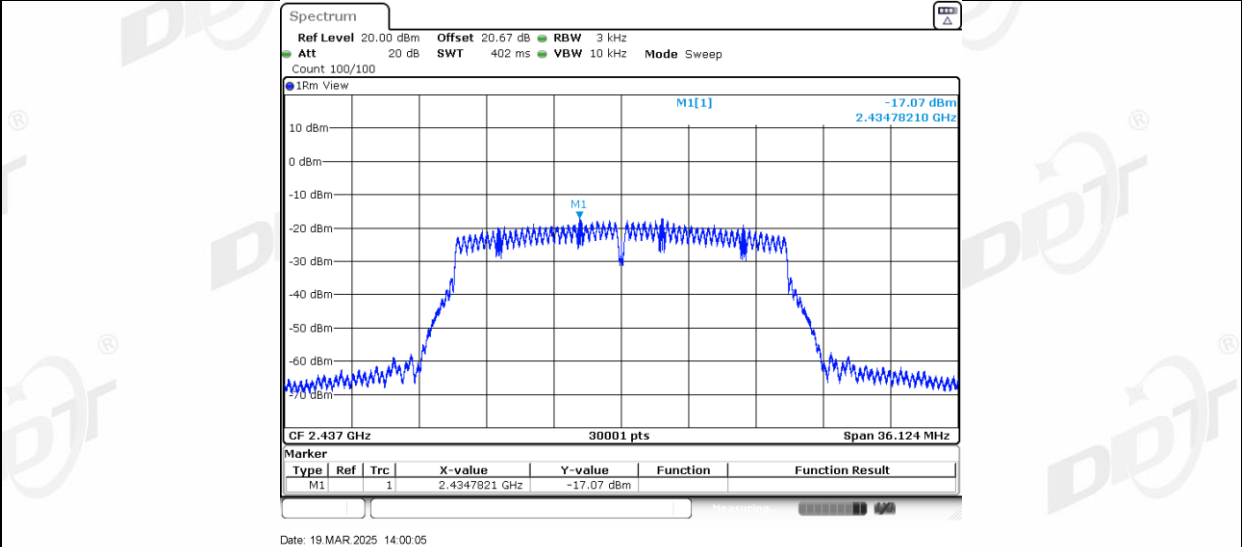


11N20MIMO_Ant2_2437

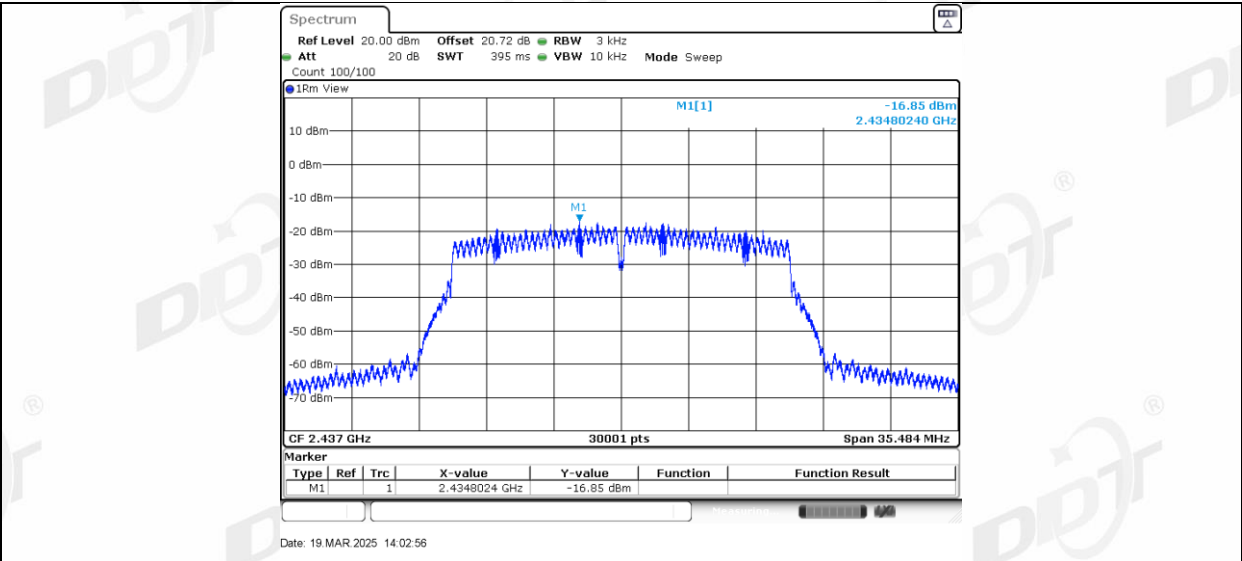


11N20MIMO_Ant1_2462

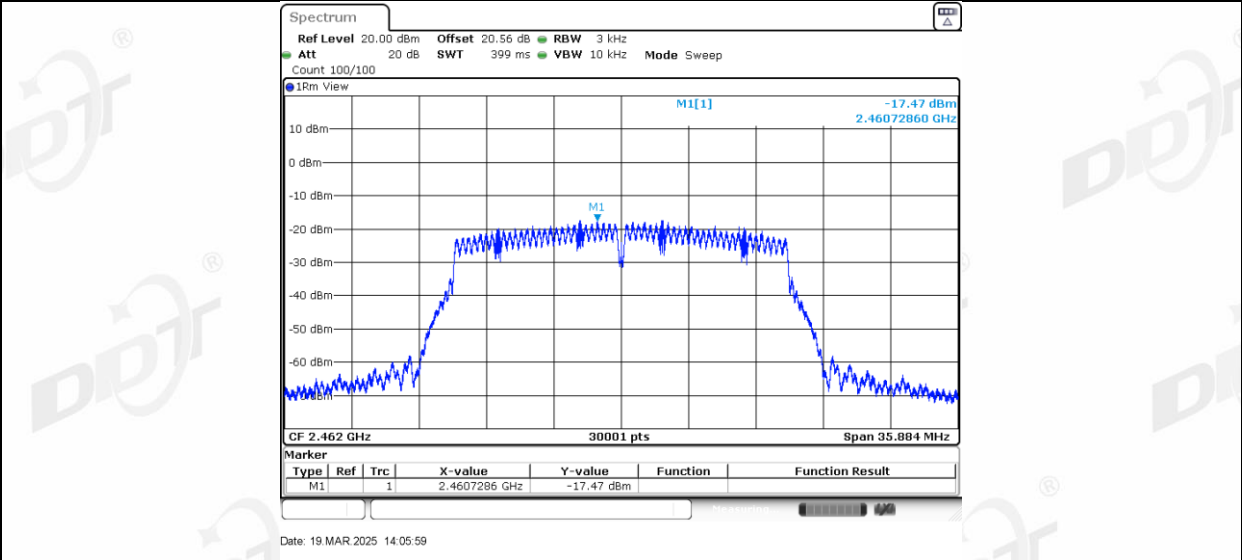


11N20MIMO_Ant2_2462

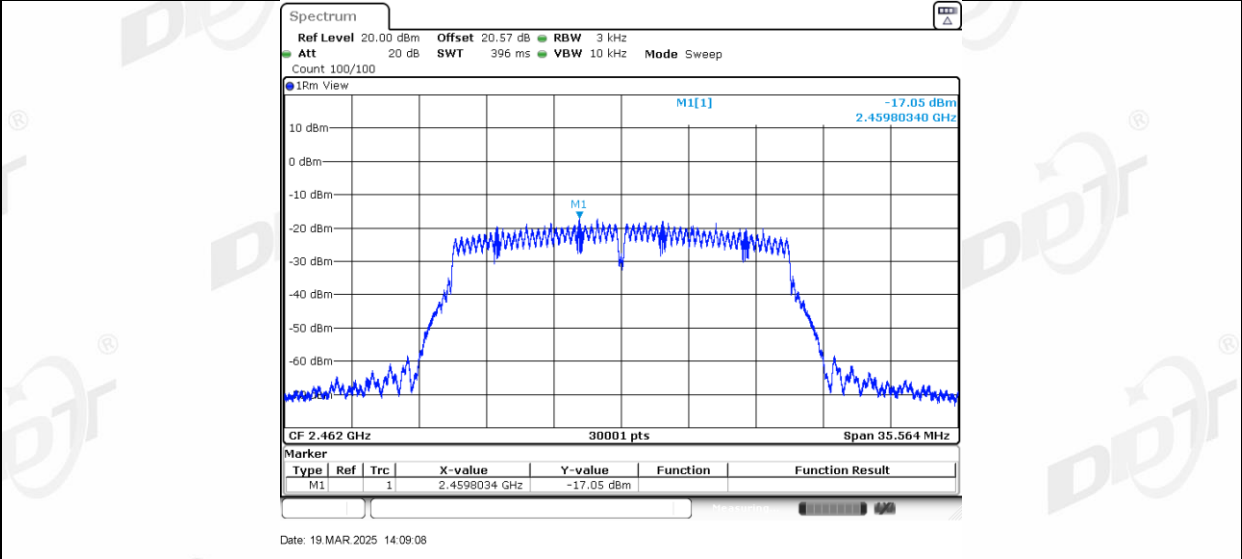


11N40MIMO_Ant1_2422

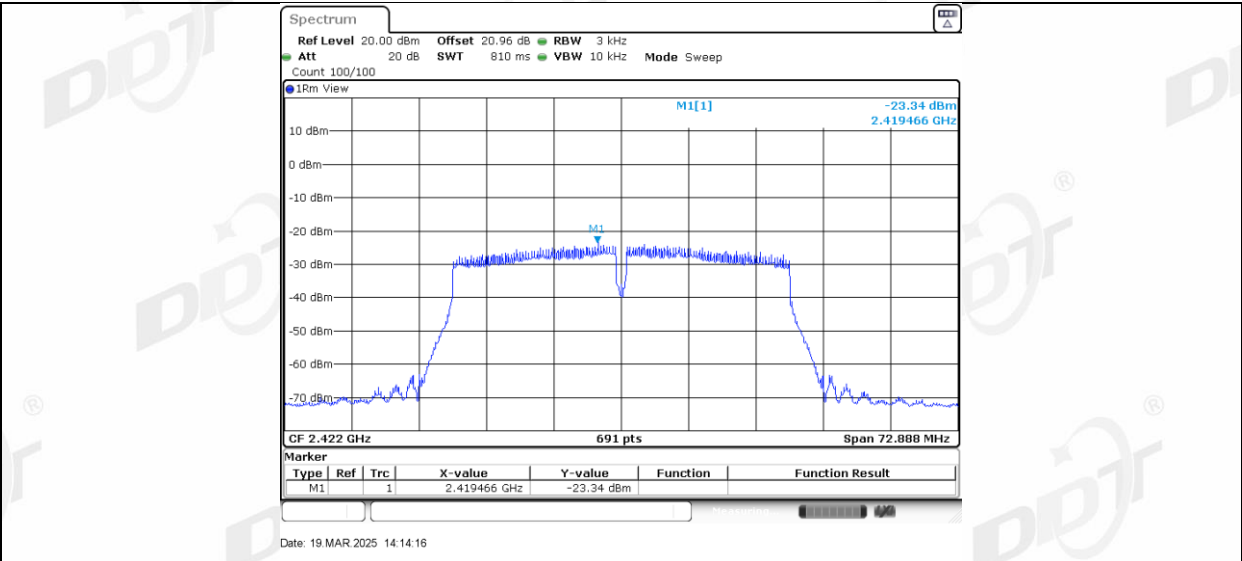


11N40MIMO_Ant2_2422

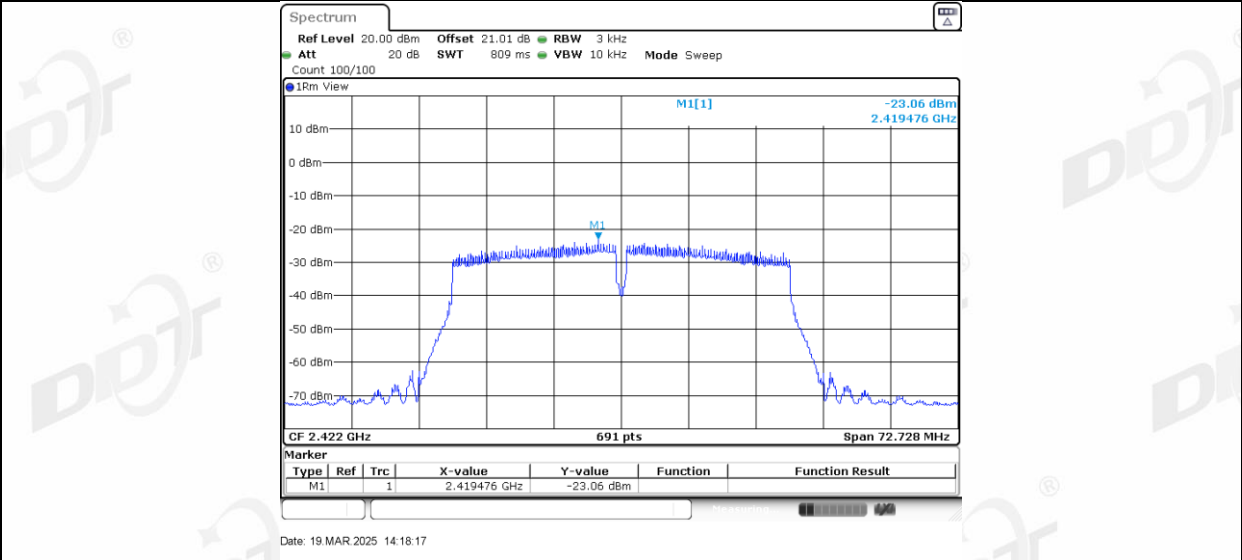


11N40MIMO_Ant1_2437

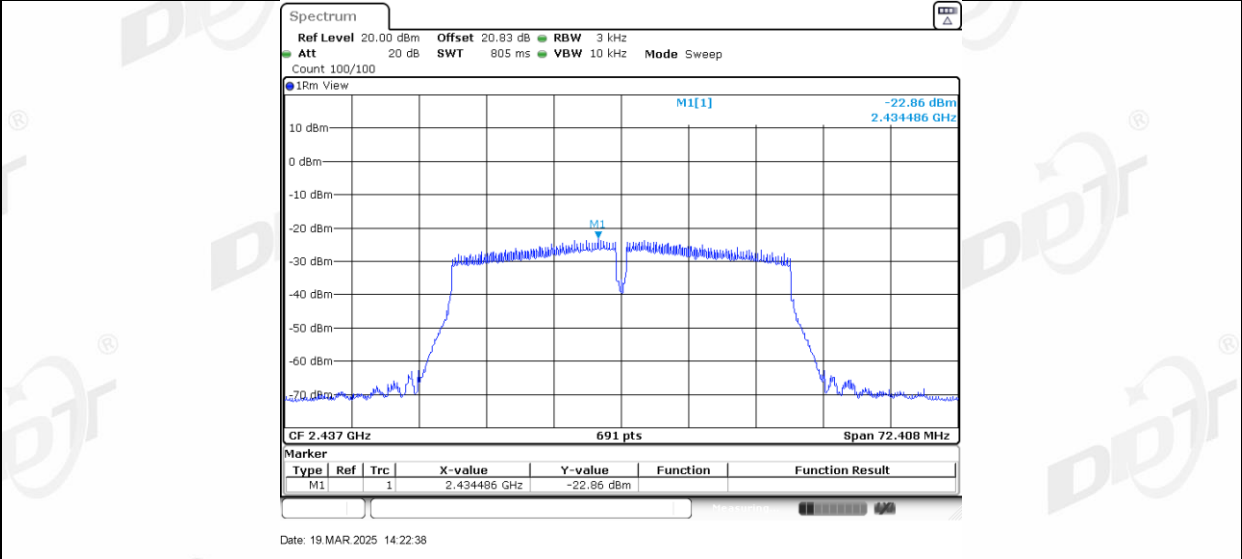


11N40MIMO_Ant2_2437

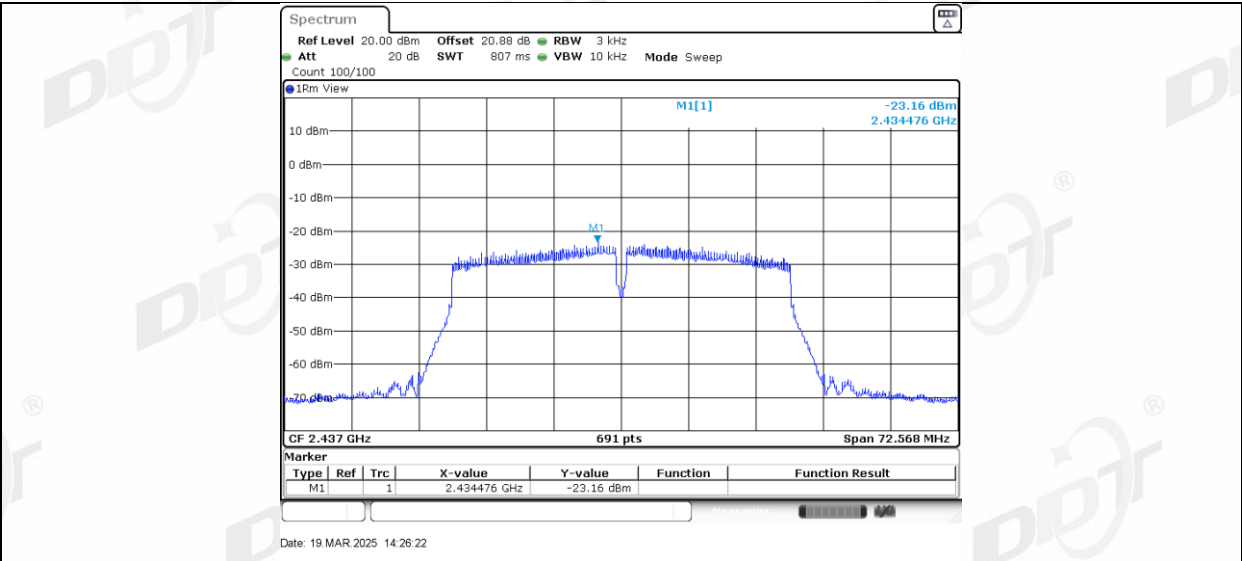

11N40MIMO_Ant1_2452

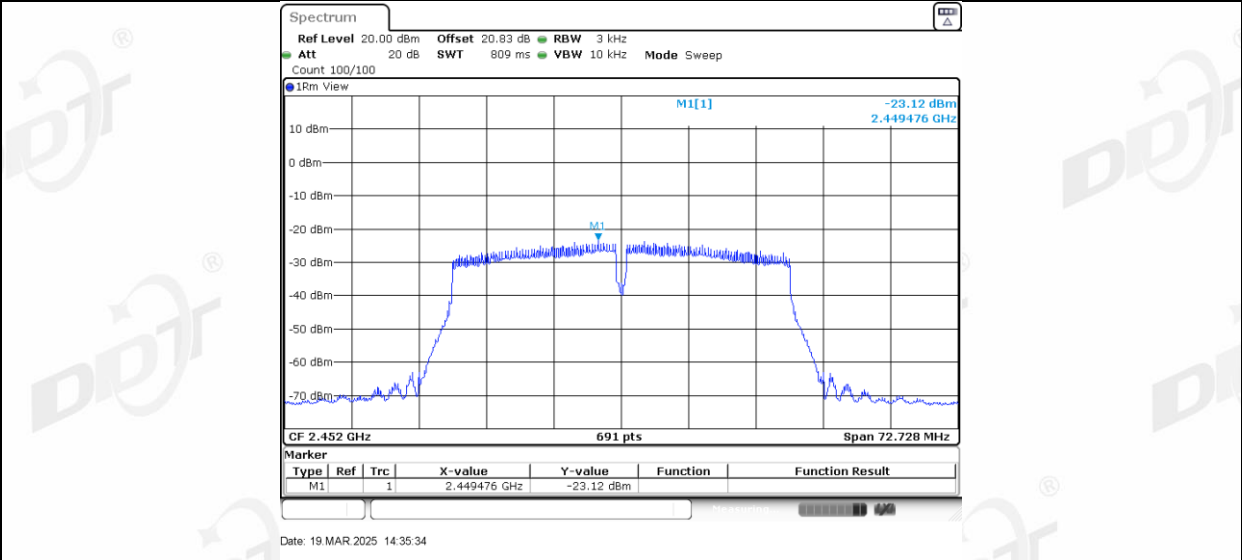


11N40MIMO_Ant2_2452

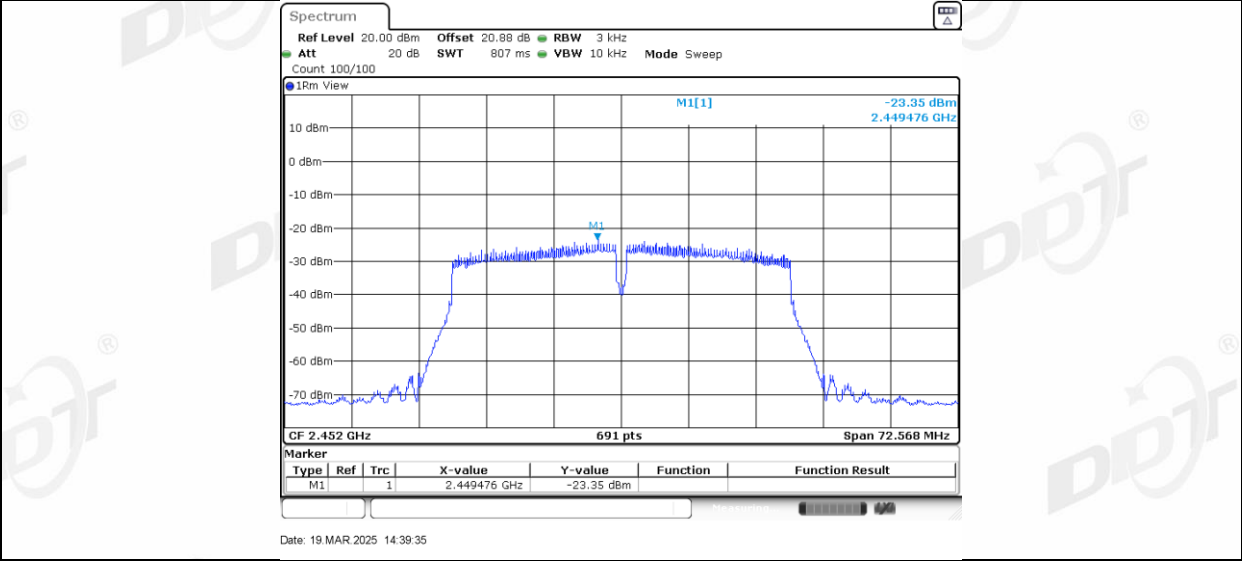

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

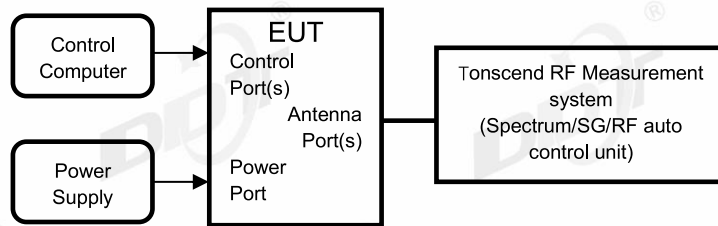

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


8.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3℃,32.6%RH	Test Date:	2025.03.19
Test Power Supply:	AC 120V	Sample Number:	S25011610-003


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
	CH11	Pass		CH9	Pass

8.5. Test graphs

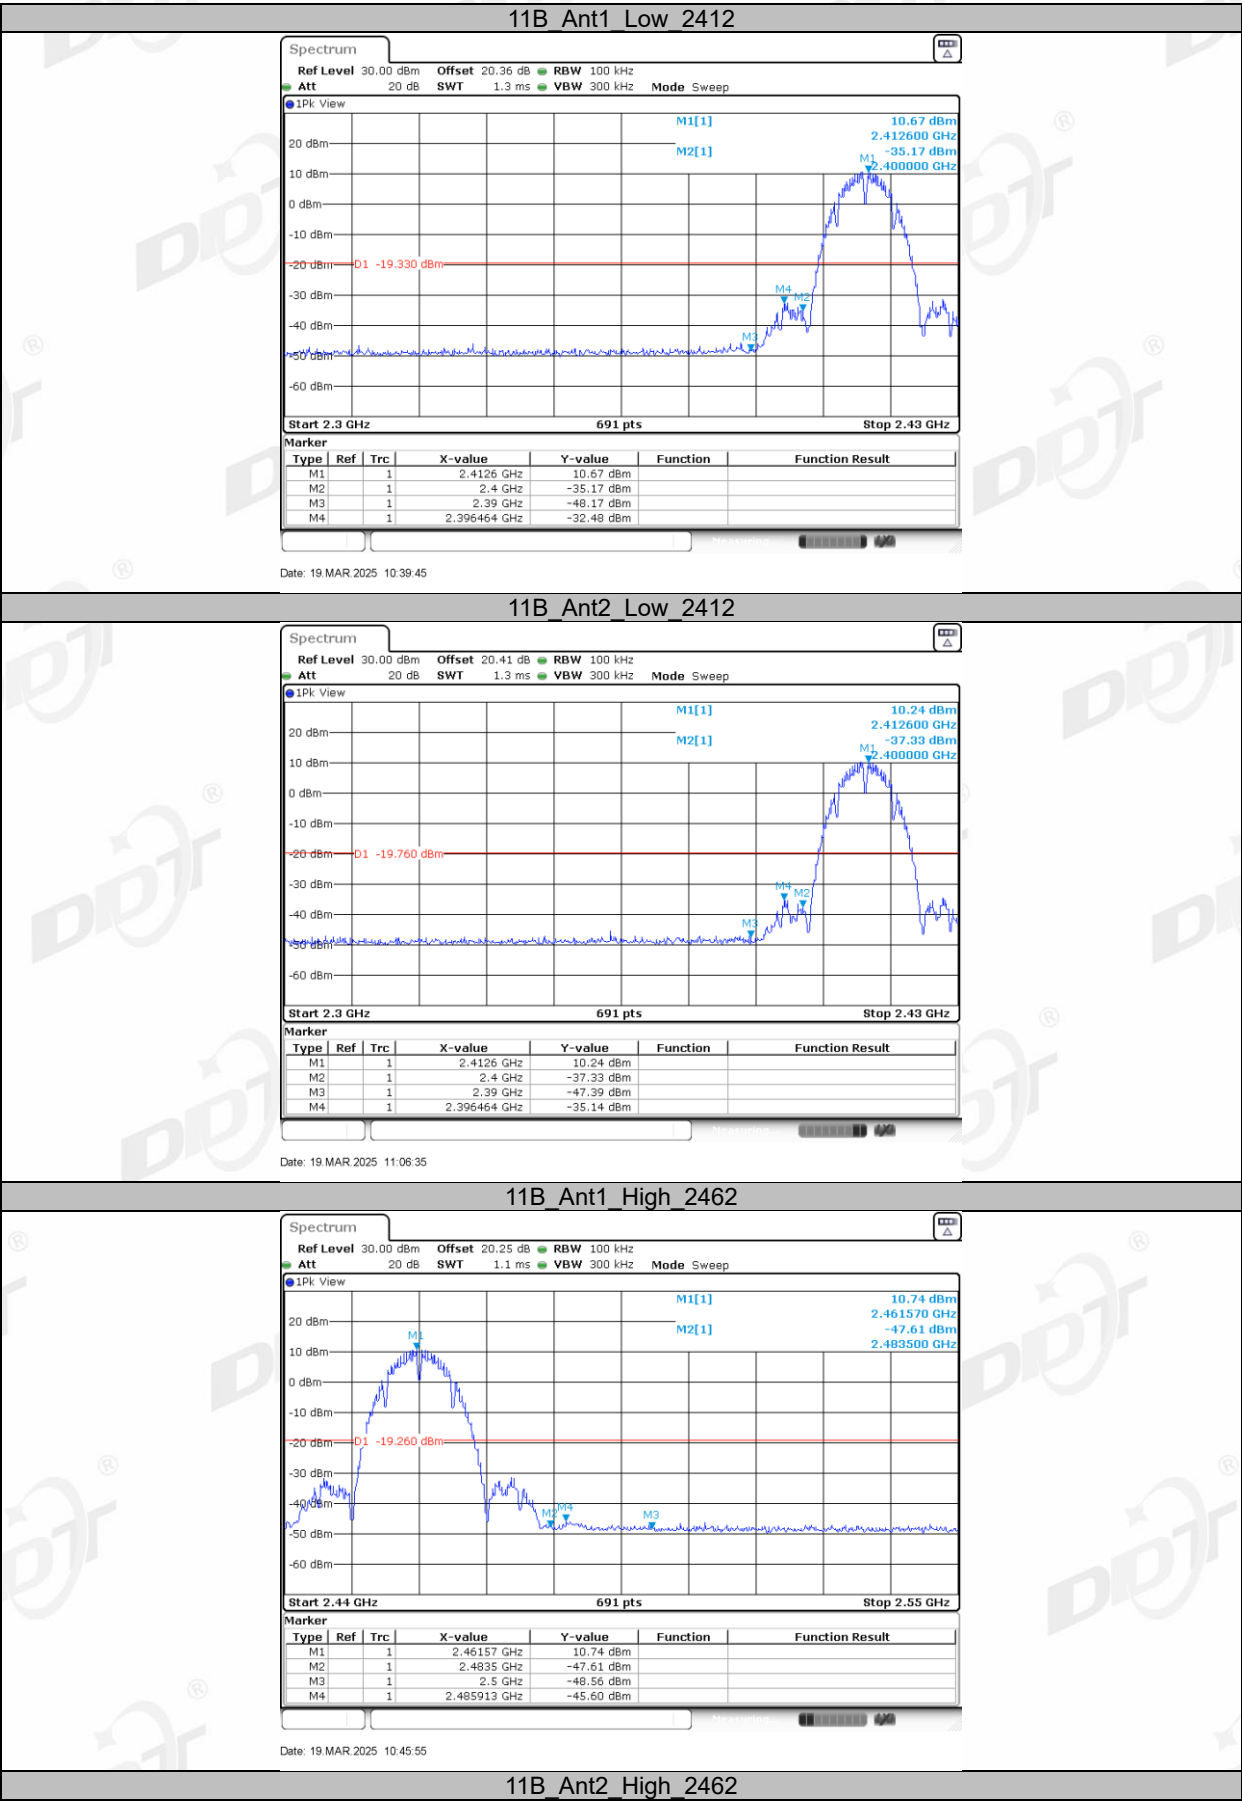


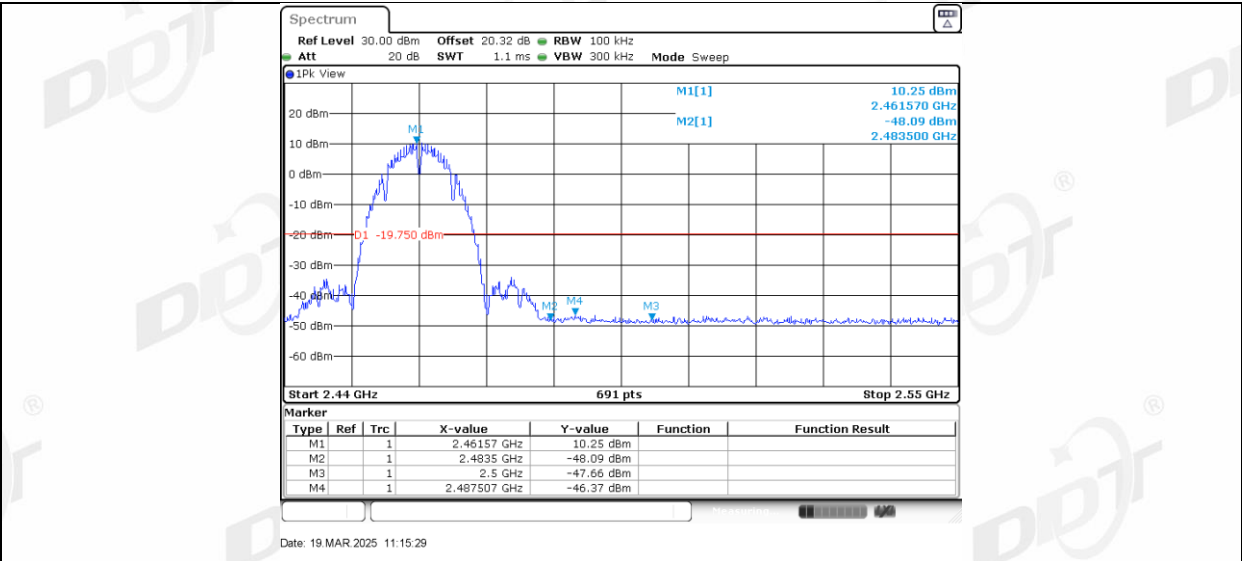


11G Ant1_Low_2412

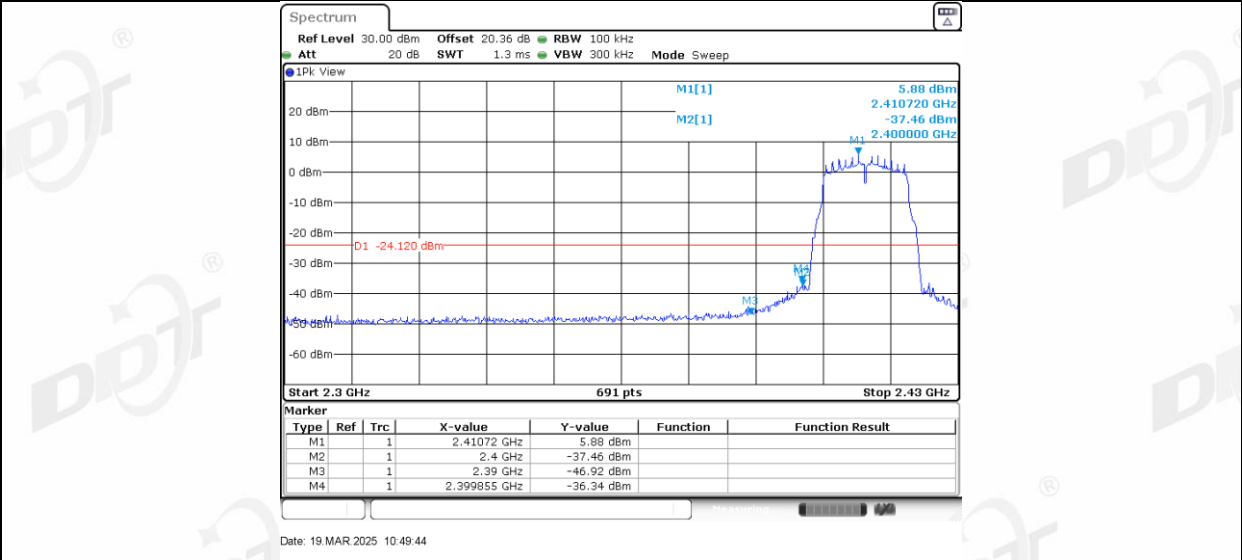


11G Ant2_Low_2412

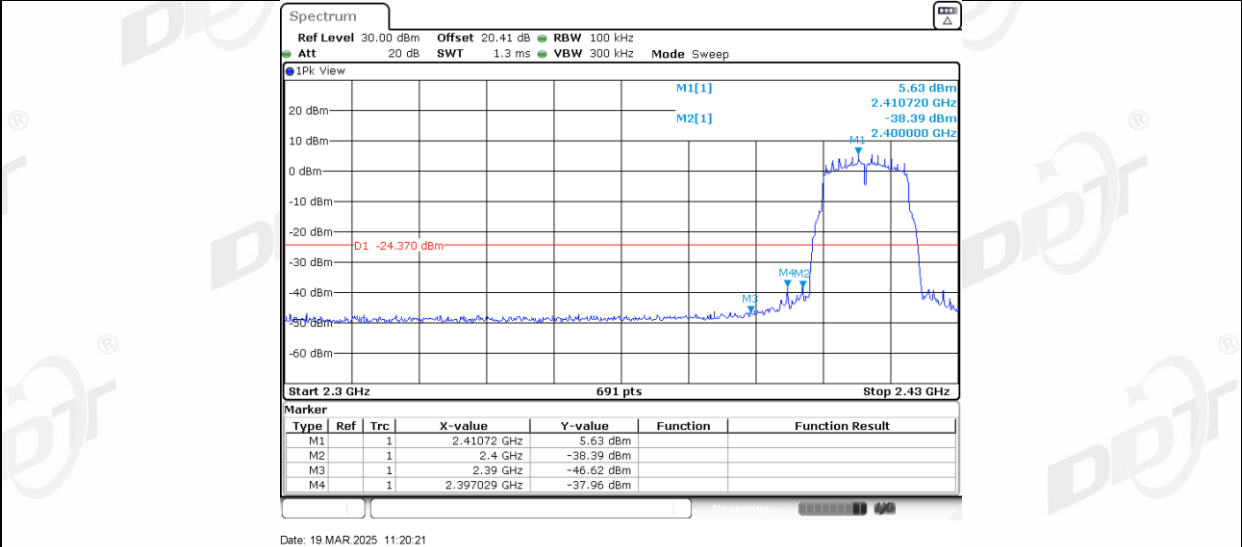


11G Ant1_High_2462

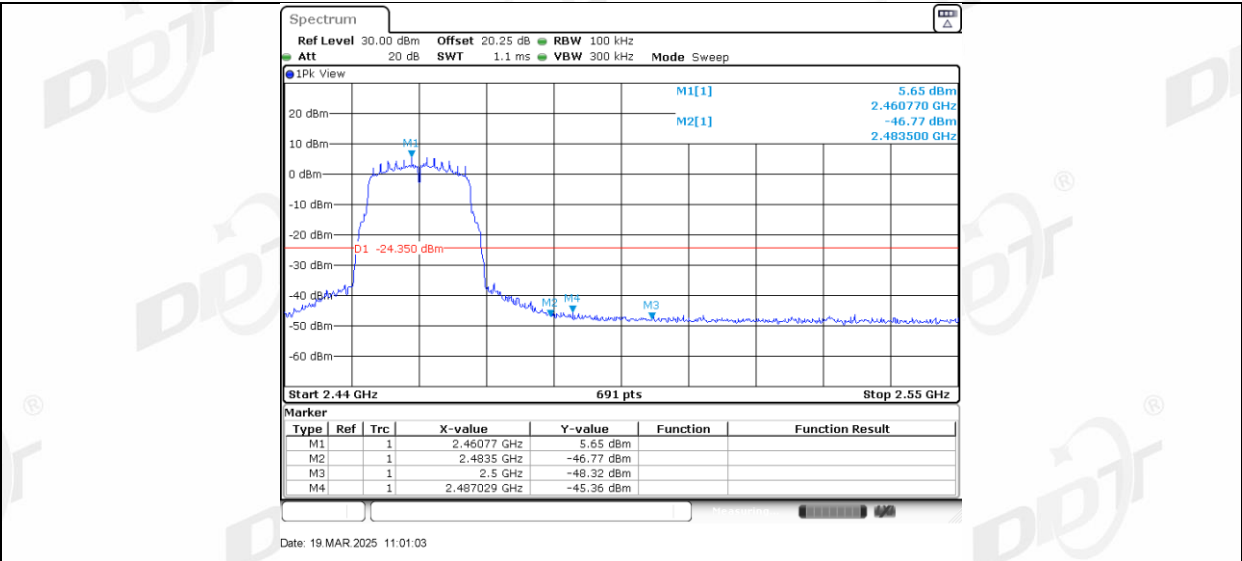

11G Ant2_High_2462

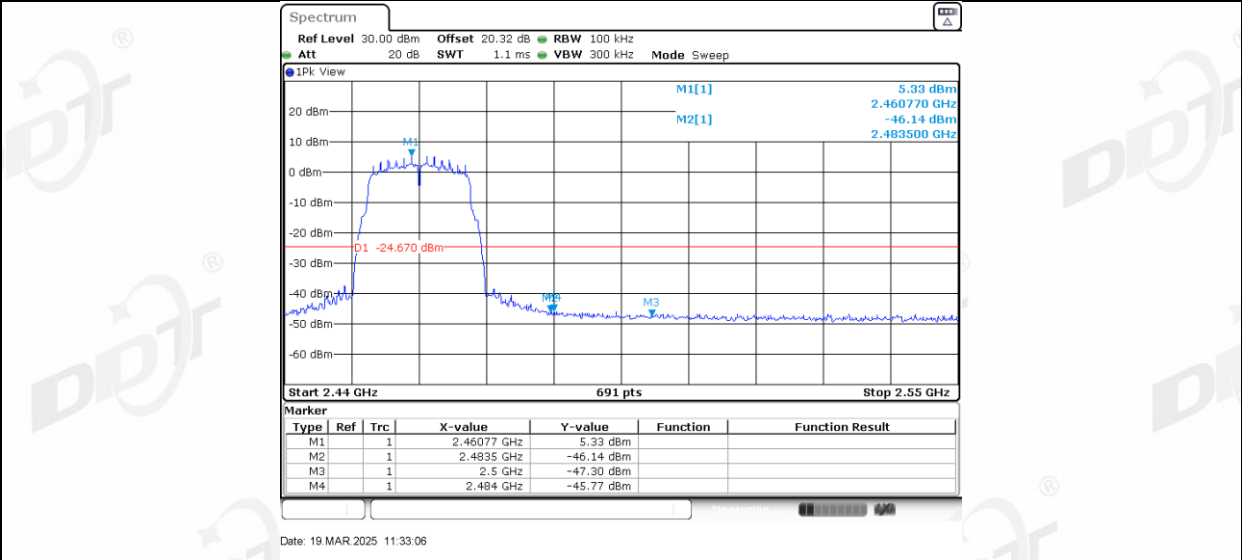

11N20MIMO_Ant1_Low_2412

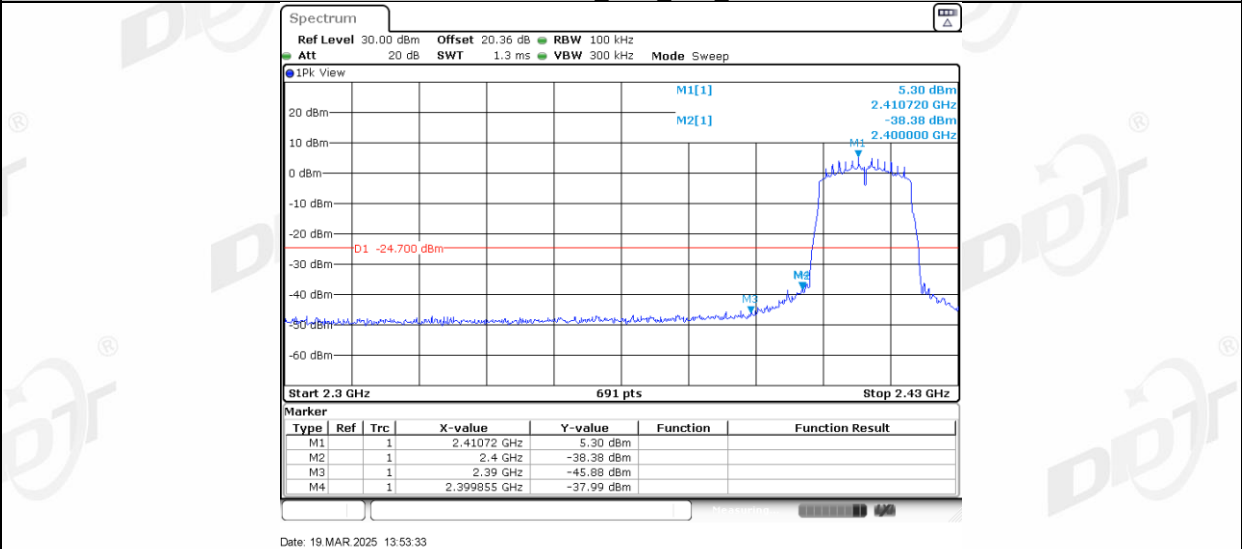

11N20MIMO_Ant2_Low_2412