

Report No.: SZEM150600380802

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 48

### **FCC REPORT**

**Application No:** SZEM1506003808CR

Applicant: Darma Inc.

Manufacturer: Darma Inc.

Factory: Darma Inc.

Product Name: Darma Cushion

Model No.(EUT): V1

FCC ID: 2AFF7-CUSHION

Standards: 47 CFR Part 15, Subpart C (2015)

**Date of Receipt:** 2015-07-01

**Date of Test:** 2015-07-08 to 2015-07-09

**Date of Issue:** 2016-03-04

Test Result: PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150600380802

Page: 2 of 48

### 2 Version

Revision Record						
Version Chapter Date Modifier Remark						
00		2016-03-04		Original		

Authorized for issue by:		
	Gebin Sun	2015-07-09
Tested By	(Gebin Sun) /Project Engineer	Date
	Joyce Shi	2016-03-04
Prepared By	(Joyce Shi) /Clerk	Date
	Eric Fu	2016-03-04
Checked By	(Eric Fu) /Reviewer	Date



Report No.: SZEM150600380802

Page: 3 of 48

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS





Report No.: SZEM150600380802

Page: 4 of 48

#### 4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	ERSION	2
3		EST SUMMARY	
4	CC	ONTENTS	4
5	GF	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	7
	5.5	TEST LOCATION	7
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TE	EST RESULTS AND MEASUREMENT DATA	
	6.1	Antenna Requirement	
	6.2	CONDUCTED PEAK OUTPUT POWER	
	6.3	6DB OCCUPY BANDWIDTH	
	6.4	POWER SPECTRAL DENSITY	
	6.5	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.6	Spurious RF Conducted Emissions	
	6.7	RADIATED SPURIOUS EMISSION	
	_	7.1 Spurious Emissions	
	6.8	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	HOTOGRAPHS - EUT TEST SETUP	47
	7.1	RADIATED EMISSION	47
	7.2	RADIATED SPURIOUS EMISSION	48
Q	DL	HOTOGRADUS ELIT CONSTRUCTIONAL DETAILS	10



Report No.: SZEM150600380802

Page: 5 of 48

#### 5 General Information

#### 5.1 Client Information

Applicant:	Darma Inc.
Address of Applicant:	645 High St.Palo Alto, CA, CA, US 94301
Manufacturer:	Darma Inc.
Address of Manufacturer:	645 High St.Palo Alto, CA, CA, US 94301
Factory:	Darma Inc.
Address of Factory:	645 High St.Palo Alto, CA, CA, US 94301

### 5.2 General Description of EUT

Product Name:	Darma Cushion
Model No.:	V1
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.0 BLE
Modulation Type:	GFSK
Number of Channel:	40
Test Power Grade:	Class II
Test software of EUT:	nRFgo studio
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	DC3.7V (1 x 3.7V Rechargeable battery) 70mAh



Report No.: SZEM150600380802

Page: 6 of 48

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	
The lowest channel (CH0)	2402MHz	
The middle channel (CH19)	2440MHz	
The highest channel (CH39)	2480MHz	



Report No.: SZEM150600380802

Page: 7 of 48

#### 5.3 Test Environment

Operating Environment:				
Temperature:	25.0 °C			
Humidity:	53 % RH			
Atmospheric Pressure:	1010mbar			

### 5.4 Description of Support Units

Description	Manufacturer	Model No.
Laptop	Lenovo	T430u
Test board	Supplied by client	V1.0.1

The laptop and test board is used only for engineering mode configuration before testing.

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM150600380802

Page: 8 of 48

### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### · VCC

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### • Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150600380802

Page: 9 of 48

### 5.10 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-05-13	2016-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-09	2016-10-09	
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-13	2016-05-13	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T8-02	SEL0162	2015-08-30	2016-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T4-02	SEL0163	2015-08-30	2016-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T2-02	SEL0164	2015-08-30	2016-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-13	2016-05-13	
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-13	2016-05-13	
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	2016-10-24	
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13	



Report No.: SZEM150600380802

Page: 10 of 48

	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEL0303	2015-08-01	2016-08-01	
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEL0175	2015-05-13	2016-05-13	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A	
4	Coaxial cable	SGS	N/A	SEL0288	2015-05-13	2016-05-13	
5	Coaxial cable	SGS	N/A	SEL0275	2015-05-13	2016-05-13	
6	Coaxial cable	SGS	N/A	SEL0274	2015-05-13	2016-05-13	
8	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-17	2016-01-26	2017-01-26	
9	Pre-amplifier	Sonoma Instrument Co	310N	SEL0298	2015-05-13	2016-05-13	
10	Loop Antenna	ETS-LINDGREN	6502	SEL0802	2015-08-14	2016-08-14	

	RE in Chamber							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEL0198	2015-05-13	2016-05-13		
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2015-05-13	2016-05-13		
3	EMI Test software	AUDIX	E3	SEL0201	N/A	N/A		
4	Coaxial cable	SGS	N/A	SEL0202	2015-05-13	2016-05-13		
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-11-15	2016-11-15		
6	Amplifier (0.1-1300MHz)	НР	8447D	SEL0153	2015-10-09	2016-10-09		
7	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEL0311	2015-06-14	2016-06-14		
8	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEL0319	2015-10-09	2016-10-09		
9	Band filter	Amindeon	Asi 3314	SEL0094	2015-05-13	2016-05-13		



Report No.: SZEM150600380802

Page: 11 of 48

RF connected test							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09	
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	2016-10-24	
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-17	2016-10-17	
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13	
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13	
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13	
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25	
8	POWER METER	R & S	NRVS	SEL0144	2015-10-09	2016-10-09	
9	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25	



Report No.: SZEM150600380802

Page: 12 of 48

#### 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

**Standard requirement:** 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

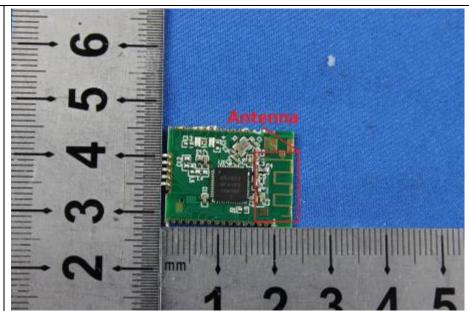


The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.



Report No.: SZEM150600380802

Page: 13 of 48

#### 6.2 Conducted Peak Output Power

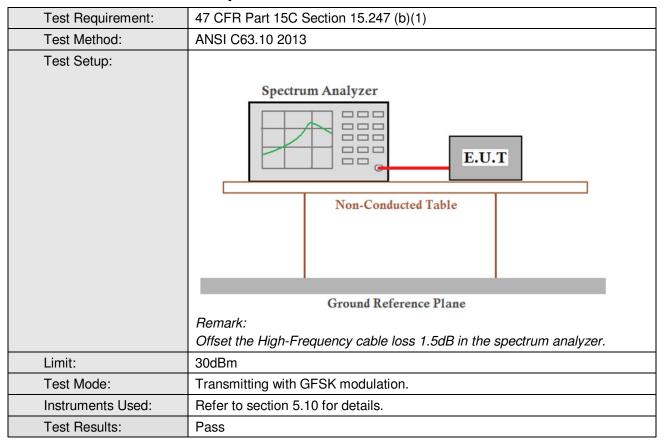

#### **Measurement Data**

Mcasarcincin Data	measurement bata						
GFSK mode							
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	3.58	30.00	Pass				
Middle	3.45	30.00	Pass				
Highest	2.89	30.00	Pass				






Report No.: SZEM150600380802


Page: 14 of 48

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

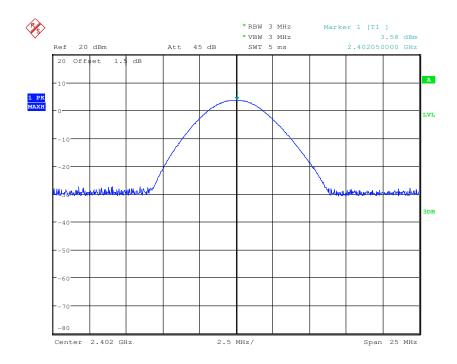



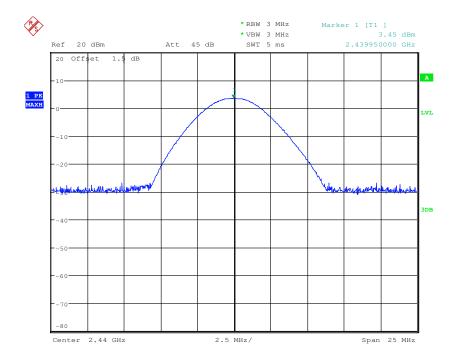




Report No.: SZEM150600380802

Page: 15 of 48



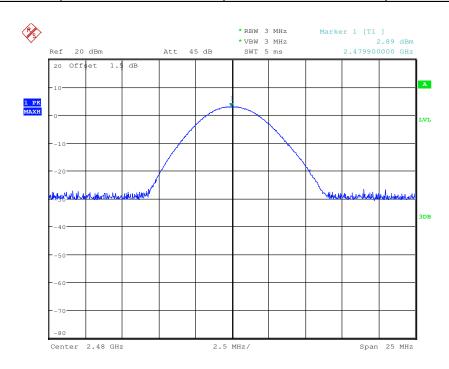




Report No.: SZEM150600380802

Page: 16 of 48

#### 6.3 6dB Occupy Bandwidth

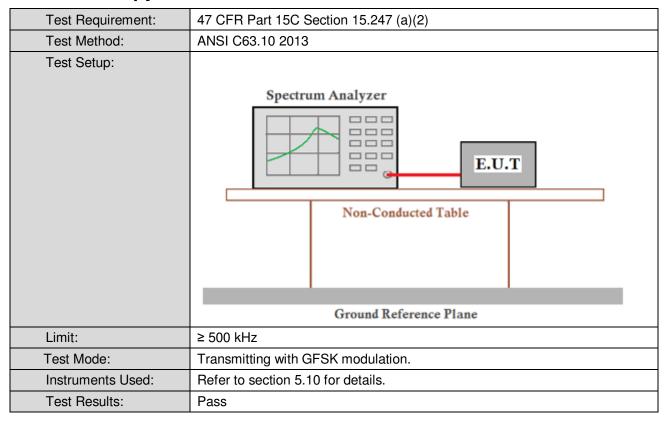

#### **Measurement Data**

GFSK mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result			
Lowest	0.663	≥500	Pass			
Middle	0.666	≥500	Pass			
Highest	0.669	≥500	Pass			




Report No.: SZEM150600380802


Page: 17 of 48

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

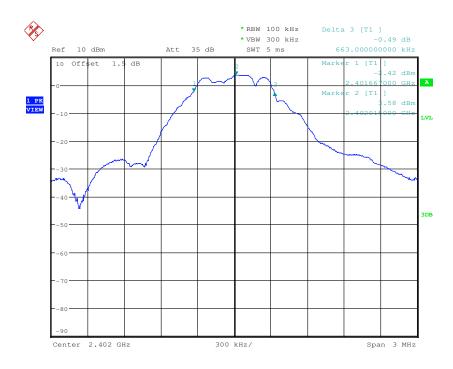



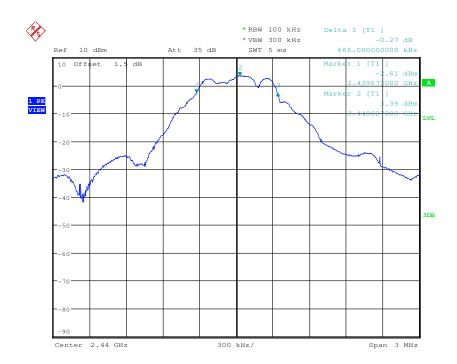




Report No.: SZEM150600380802

Page: 18 of 48



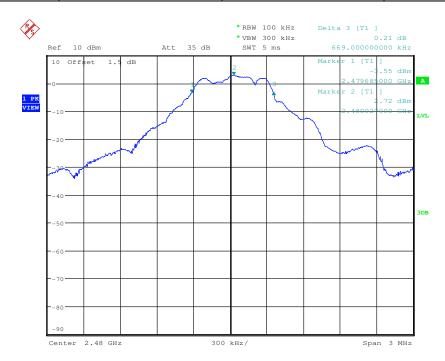




Report No.: SZEM150600380802

Page: 19 of 48

### 6.4 Power Spectral Density

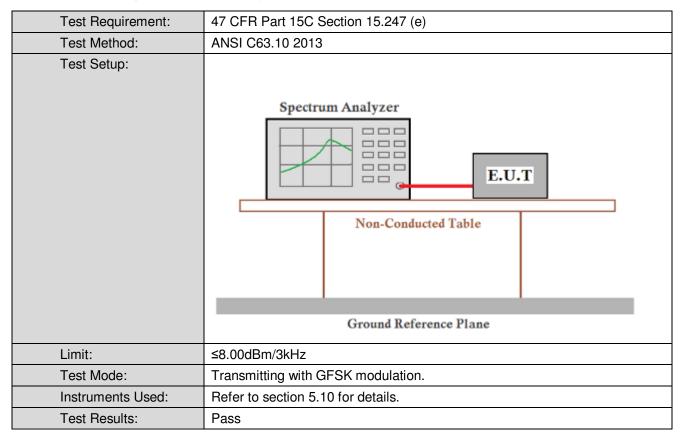

#### **Measurement Data**

GFSK mode							
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result				
Lowest	-12.58	≤8.00	Pass				
Middle	-11.98	≤8.00	Pass				
Highest	-11.86	≤8.00	Pass				




Report No.: SZEM150600380802


Page: 20 of 48

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

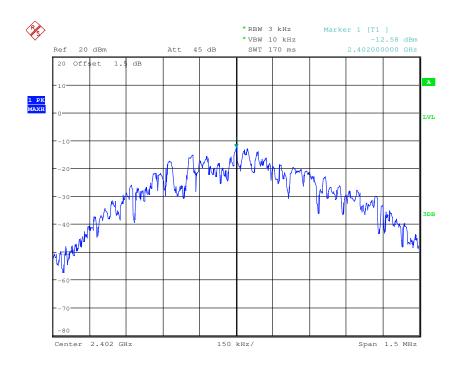



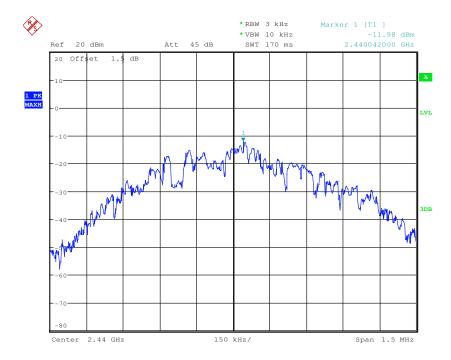




Report No.: SZEM150600380802

Page: 21 of 48



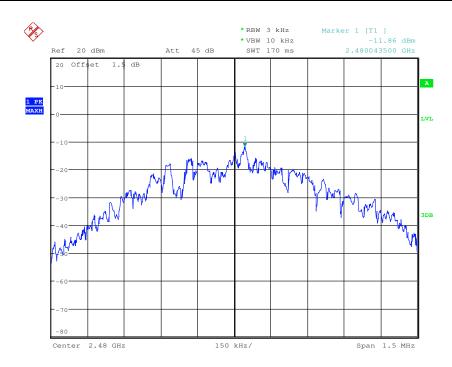



Report No.: SZEM150600380802

Page: 22 of 48

#### 6.5 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)		
Test Method:	ANSI C63.10 2013		
Test Setup:	Spectrum Analyzer  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Test Mode:	Transmitting with GFSK modulation.		
Instruments Used:	Refer to section 5.10 for details.		
Test Results:	Pass		






Report No.: SZEM150600380802


Page: 23 of 48

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

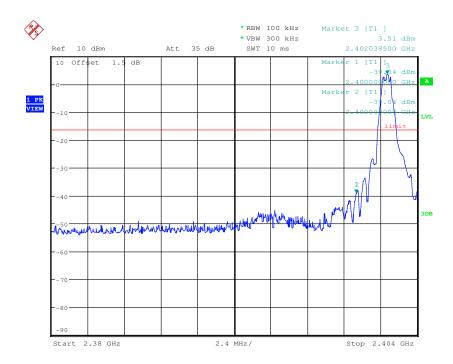



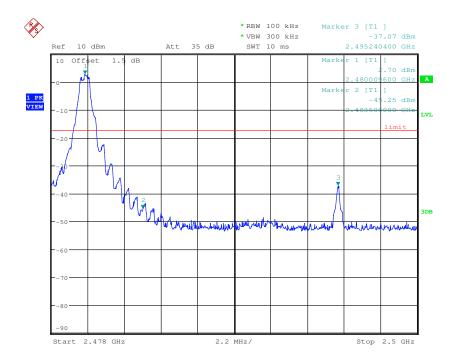



Report No.: SZEM150600380802

Page: 24 of 48

#### 6.6 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10 2013			
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:			
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Transmitting with GFSK modulation.			
Instruments Used:	Refer to section 5.10 for details.			
Test Results:	Pass			





Report No.: SZEM150600380802

Page: 25 of 48

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

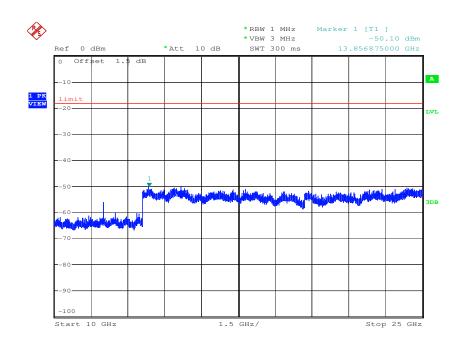


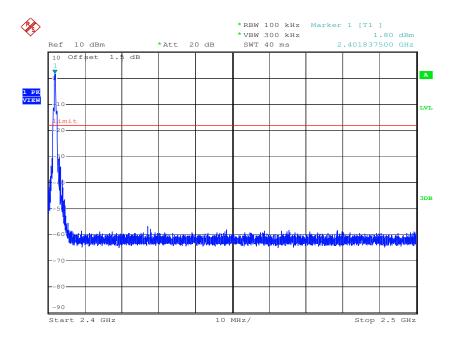




Report No.: SZEM150600380802

Page: 26 of 48

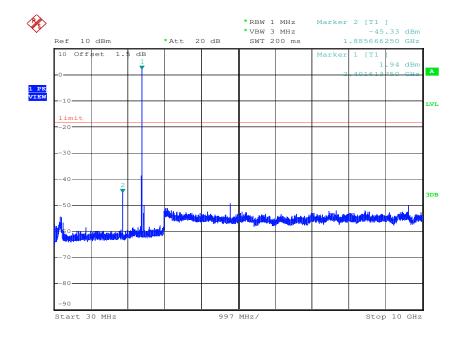





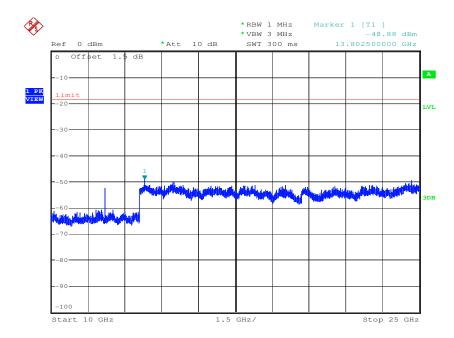



Report No.: SZEM150600380802

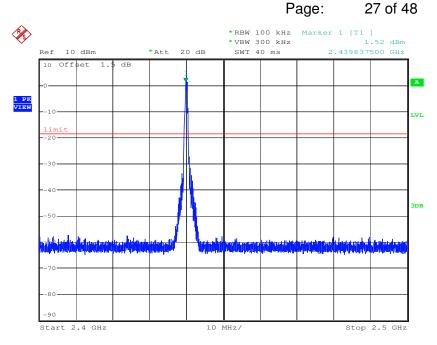


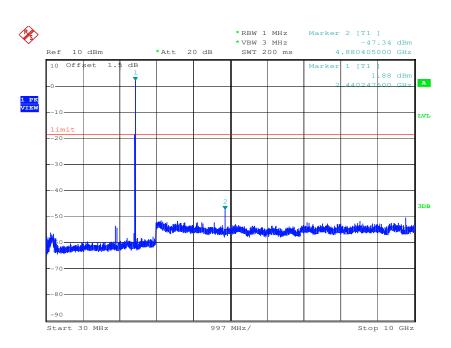





Report No.: SZEM150600380802

Page: 28 of 48



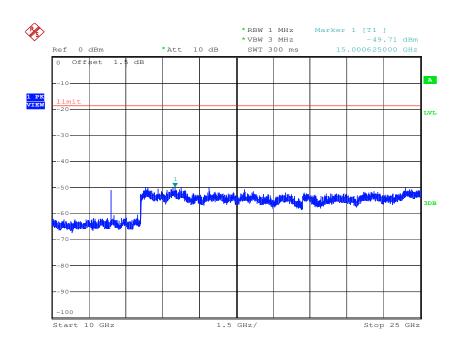


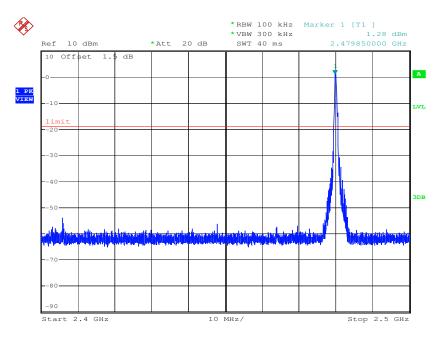



Report No.: SZEM150600380802

Page: 29 of 48

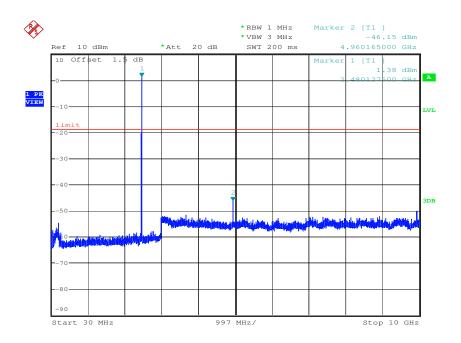

#### Remark:

Use100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



Report No.: SZEM150600380802

Page: 30 of 48

### 6.7 Radiated Spurious Emission


6.7.1 Spurious Emiss	ions							
Test Requirement:	47 CFR Part 15C Secti	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10 2013							
Test Site:	Measurement Distance	: 3n	n (Semi-Anech	noic Cham	ber	·)		
	Measurement Distance	: 10	m (Semi-Aned	choic Chai	mbe	er)		
Receiver Setup:	Frequency		Detector	RBW	'	VBW	Remark	
	0.009MHz-0.090MH	Z	Peak	10kHz	<u>z</u>	30kHz	Peak	
	0.009MHz-0.090MH	Z	Average	10kHz	Z	30kHz	Average	
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	<u>z</u>	30kHz	Quasi-peak	
	0.110MHz-0.490MH	Z	Peak	10kHz	<u>z</u>	30kHz	Peak	
	0.110MHz-0.490MH	Z	Average	10kHz	<u>z</u>	30kHz	Average	
	0.490MHz -30MHz		Quasi-peak	10kHz	Z	30kHz	Quasi-peak	
	30MHz-1GHz Quasi-pe		Quasi-peak	100 kH	lz	300kHz	Quasi-peak	
	Above 1011-		Peak	1MHz	<u> </u>	3MHz	Peak	
	Above Tariz	Above 1GHz Peak		1MHz	<u> </u>	10Hz	Average	
Limit:	Frequency	Frequency Field strength (microvolt/meter) (		Limit (dBuV/m)		Remark	Measurement distance (m)	
	0.009MHz-0.490MHz	2	400/F(kHz)	-	Q	uasi-peak	300	
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	Q	uasi-peak	30	
	1.705MHz-30MHz		30	-	Quasi-peak		30	
	30MHz-88MHz		29.9	29.5	Quasi-peak		10	
	88MHz-216MHz		44.7	33.0	Quasi-peak		10	
	216MHz-960MHz 60.3		35.6	Q	uasi-peak	10		
	960MHz-1GHz 100		44.4	Q	uasi-peak	10		
	Above 10115		54.0	,	Average	3		
	Above 1GHz 500		74.0		Peak	3		
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							



Report No.: SZEM150600380802

Page: 31 of 48

#### Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

#### Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the



Report No.: SZEM150600380802

Page: 32 of 48


	EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.  h. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)			
	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.			
	j. Repeat above procedures until all frequencies measured was complete.			
Exploratory Test Mode:	Transmitting with GFSK modulation.			
	Transmitting mode.			
Final Test Mode:	Transmitting with GFSK modulation.			
	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case.			
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.			
	Only the worst case is recorded in the report.			
Instruments Used:	Refer to section 5.10 for details.			
Test Results:	Pass			



Report No.: SZEM150600380802

Page: 33 of 48

Radiated Emission below 1GHz					
30MHz~1GHz (QP)					
Test mode: Transmitting mode Vertical					

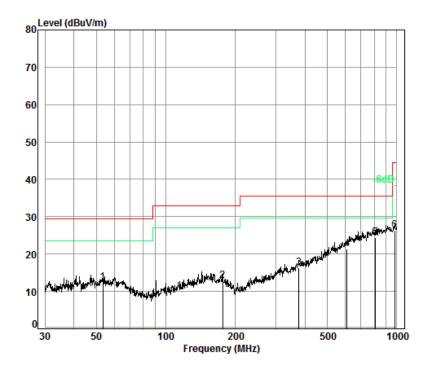

Condition: 10m VULB 9160 10M(NEW) Vertical

Job No. : 3808CR Test Mode: TX mode

	Freq			Preamp Factor				
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	53.51	6.97	12.40	32.98	25.93	12.32	29.50	-17.18
2	176.27	7.50	11.87	32.72	26.19	12.84	33.00	-20.16
3	377.26	8.30	14.75	32.60	25.94	16.39	35.60	-19.21
4	607.79	8.92	20.23	32.60	24.88	21.43	35.60	-14.17
5 pp	804.60	9.30	22.15	32.60	25.52	24.37	35.60	-11.23
6	979.18	9.60	23.71	32.50	25.59	26,40	44.40	-18.00






Report No.: SZEM150600380802

Page: 34 of 48

Test mode:	Transmitting mode	Horizontal

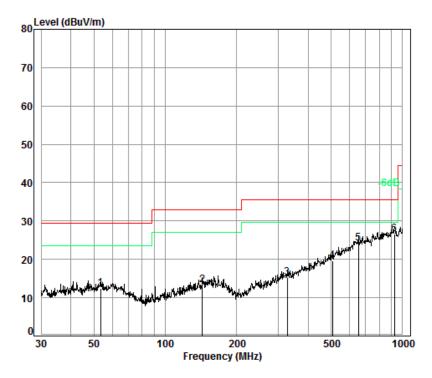

Condition: 10m VULB 9160 10M(NEW) Horizontal

Job No. : 3808CR Test Mode: TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	53.51	6 07	12 40	32.98	25 02	12 22	20 50	17 10
1	33.31	0.57	12.40	32.30	25.55	12.52	29.50	-17.10
2	143.33	7.42	12.80	32.75	25.86	13.33	33.00	-19.67
3	326.74	8.14	13.60	32.60	26.04	15.18	35.60	-20.42
4	506.48	8.63	17.63	32.60	26.03	19.69	35.60	-15.91
5	651.94	9.03	20.60	32.60	27.23	24.26	35.60	-11.34
6 pp	925.76	9.51	23.26	32.50	26.22	26.49	35.60	-9.11



Report No.: SZEM150600380802

Page: 35 of 48

Transmitter Emission above 1GHz								
Test mode:		GFSK -		st channel:	Lowest	Rema	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3641.878	5.82	33.03	38.80	47.69	47.74	74	-26.26	Vertical
4804.000	5.49	34.70	39.24	47.21	48.16	74	-25.84	Vertical
6034.386	7.48	36.26	39.18	48.42	52.98	74	-21.02	Vertical
7206.000	8.27	35.63	39.07	47.21	52.04	74	-21.96	Vertical
9608.000	9.26	37.33	37.93	42.58	51.24	74	-22.76	Vertical
11455.380	10.03	38.19	38.45	43.39	53.16	74	-20.84	Vertical
3594.760	5.85	32.99	38.78	46.88	46.94	74	-27.06	Horizontal
4804.000	5.49	34.70	39.24	48.55	49.50	74	-24.50	Horizontal
6087.002	7.45	36.20	39.17	48.59	53.07	74	-20.93	Horizontal
7206.000	8.27	35.63	39.07	47.79	52.62	74	-21.38	Horizontal
9608.000	9.26	37.33	37.93	42.93	51.59	74	-22.41	Horizontal
11389.270	9.98	38.15	38.41	43.43	53.15	74	-20.85	Horizontal

Test mode:		GFSK		t channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3652.432	32.31	7.69	38.43	44.90	46.47	74	-27.53	Vertical
4880.000	34.18	8.97	38.76	45.32	49.71	74	-24.29	Vertical
5999.562	34.70	10.56	38.96	46.63	52.93	74	-21.07	Vertical
7320.000	35.54	10.72	37.59	41.17	49.84	74	-24.16	Vertical
9760.000	37.10	12.58	36.14	37.19	50.73	74	-23.27	Vertical
12494.320	37.79	14.15	37.65	38.63	52.92	74	-21.08	Vertical
3652.432	32.31	7.69	38.43	46.01	47.58	74	-26.42	Horizontal
4880.000	34.18	8.97	38.76	45.54	49.93	74	-24.07	Horizontal
6051.874	34.73	10.49	38.89	45.95	52.28	74	-21.72	Horizontal
7320.000	35.54	10.72	37.59	41.22	49.89	74	-24.11	Horizontal
9760.000	37.10	12.58	36.14	37.51	51.05	74	-22.95	Horizontal
12530.530	37.83	14.24	37.68	38.60	52.99	74	-21.01	Horizontal



Report No.: SZEM150600380802

Page: 36 of 48

Test mode:		GFSK		st channel:	Highest	Ren	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3748.808	6.83	33.11	38.85	51.72	52.81	74	-21.19	Vertical
4960.000	6.76	34.86	39.29	50.36	52.69	74	-21.31	Vertical
5947.702	8.00	36.20	39.19	46.39	51.40	74	-22.60	Vertical
7440.000	9.23	35.43	39.05	47.58	53.19	74	-20.81	Vertical
9920.000	9.81	38.27	37.75	42.64	52.97	74	-21.03	Vertical
11689.790	10.47	38.39	38.56	43.39	53.69	74	-20.31	Vertical
3272.085	7.41	32.44	38.64	48.73	49.94	74	-24.06	Horizontal
4960.000	6.76	34.86	39.29	48.89	51.22	74	-22.78	Horizontal
5947.702	8.00	36.20	39.19	48.39	53.40	74	-20.60	Horizontal
7440.000	9.23	35.43	39.05	46.96	52.57	74	-21.43	Horizontal
9920.000	9.81	38.27	37.75	42.64	52.97	74	-21.03	Horizontal
11791.720	10.52	38.49	38.60	43.00	53.41	74	-20.59	Horizontal

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
  - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM150600380802

Page: 37 of 48

#### 6.8 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2013	ANSI C63.10 2013						
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)					
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1GHz	54.0	Average Value					
	Above IGHZ	74.0	Peak Value					
Test Setup:								






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

_		
Toot	Procedure	٠
1651	Frocedure	_

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
- h. Test the EUT in the lowest channel, the Highest channel



Report No.: SZEM150600380802

Page: 38 of 48

	<ul> <li>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</li> <li>j. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Transmitting with GFSK modulation.
	Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation.
	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass




Report No.: SZEM150600380802

Page: 39 of 48

#### Test plot as follows:

Worse case mode: GFSK Test channel: Lowest Remark: Peak Vertical

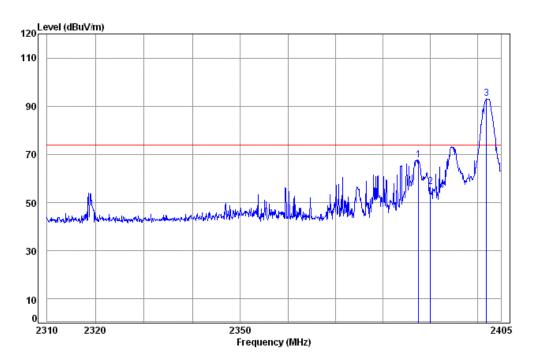

Site : chamber

Condition: PK 3m Vertical

Job No: : 3808CR

Mode: : 2402 Band edge


		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Le∨el	Level	Line	Limit
_								
	MHz	dB	dB/m	dB	dBu∀	dBuV/m	dBuV/m	dB
1	2387.52	4.90	32.33	38.46	69.06	67.83	74.00	-6.17
2	2390.00	4.90	32.35	38.46	57.68	56.47	74.00	-17.53
3 рр	2401.90	4.92	32.41	38.46	94.16	93.03	74.00	19.03



Report No.: SZEM150600380802

Page: 40 of 48

Worse case mode: GFSK Test channel: Lowest Remark: Peak Horizontal

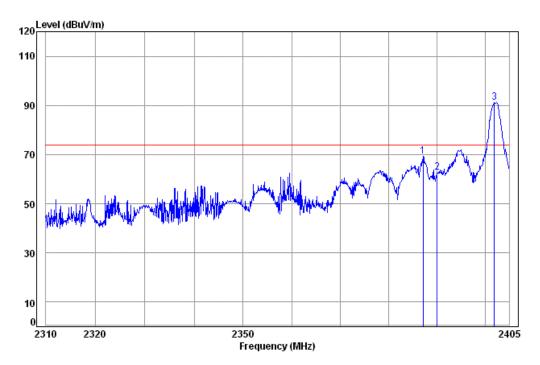

Site : chamber

Condition: PK 3m Horizontal

Job No: : 3808CR

Mode: : 2402 Band edge


	Freq			Preamp Factor			Limit Line	
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2387.04	4.90	32.33	38.46	70.45	69.22	74.00	-4.78
2	2390.00	4.90	32.35	38.46	64.01	62.80	74.00	-11.20
3 рр	2401.90	4.92	32.41	38.46	92.22	91.09	74.00	17.09



Report No.: SZEM150600380802

Page: 41 of 48

Worse case mode: GFSK Test channel: Lowest Remark: Average Vertical

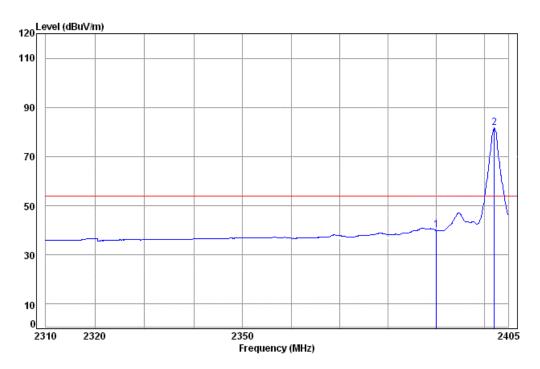

Site : chamber

Condition: AV 3m Vertical

Job No: : 3808CR

Mode: : 2402 Band edge


Cable Ant Preamp 0ver Read Limit Loss Factor Factor Level Level Line Limit Frea MHz dB dB/m dB dBuV dBuV/m dBuV/m 2390.00 4.90 32.35 38.46 42.00 40.79 54.00 -13.21 2 pp 2402.09 4.92 32.41 38.46 82.22 81.09 54.00 27.09



Report No.: SZEM150600380802

Page: 42 of 48

Worse case mode: GFSK Test channel: Lowest Remark: Average Horizontal

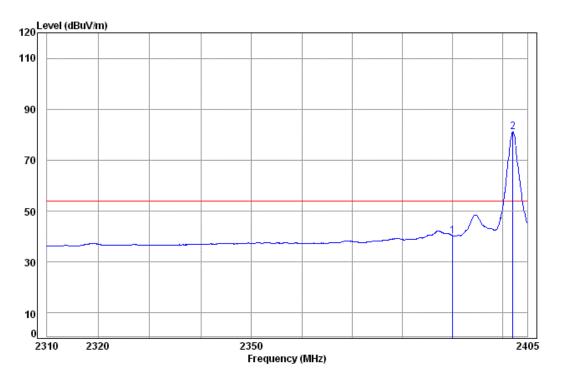

Site : chamber

Condition: AV 3m Horizontal

Job No: : 3808CR

Mode: : 2402 Band edge


	Freq			Preamp Factor				
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 pp	2390.00 2402.09							



Report No.: SZEM150600380802

Page: 43 of 48

Worse case mode: GFSK Test channel: Highest Remark: Peak Vertical

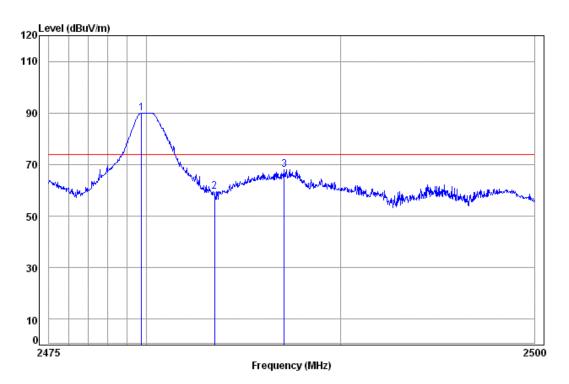

Site : chamber

Condition: PK 3m Horizontal

Job No: : 3808CR

Mode: : 2480 Band edge

	Freq			Preamp Factor				
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2479.76	5.02	32.44	38.47	91.07	90.06	74.00	16.06
2	2483.50	5.03	32.44	38.47	60.55	59.55	74.00	- 14.45
3	2487.09	5.03	32.44	38.47	69.11	68.11	74.00	-5.89






Report No.: SZEM150600380802

Page: 44 of 48

Worse case mode: GFSK Test channel: Highest Remark: Peak Horizontal

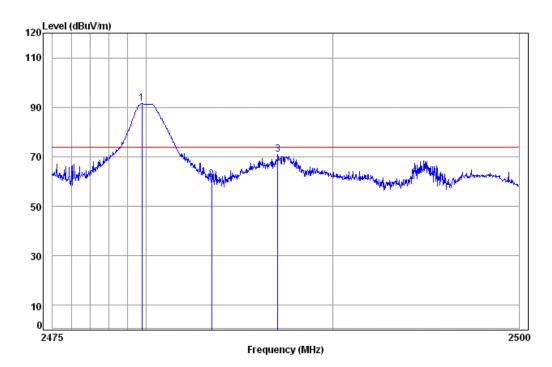

Site : chamber

Condition: PK 3m Horizontal

Job No: : 3808CR

Mode: : 2480 Band edge

		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Le∨el	Level	Line	Limit
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 рр	2479.78	5.02	32.44	38.47	92.45	91.44	74.00	17.44
2	2483.50	5.03	32.44	38.47	61.81	60.81	74.00	-13.19
3	2487.04	5.03	32.44	38.47	71.87	70.87	74.00	-3.13


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150600380802

Page: 45 of 48

Worse case mode: GFSK Test channel: Highest Remark: Average Vertical

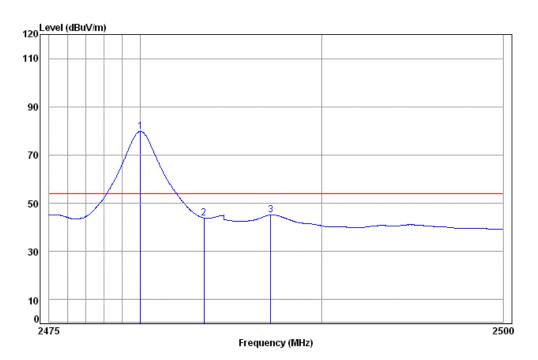

Site : chamber

Condition: AV 3m Horizontal

Job No: : 3808CR

Mode: : 2480 Band edge


		Cable	Ant	Preamp	Read		Limit	0∨er
	Freq	Loss	Factor	Factor	Le∨el	Le∨el	Line	Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 рр	2480.01	5.02	32.44	38.47	80.61	79.60	54.00	25.60
2	2483.50	5.03	32.44	38.47	44.79	43.79	54.00	-10.21
3	2487.17	5.03	32.44	38.47	46.02	45.02	54.00	-8.98



Report No.: SZEM150600380802

Page: 46 of 48

Worse case mode: GFSK Test channel: Highest Remark: Average Horizontal

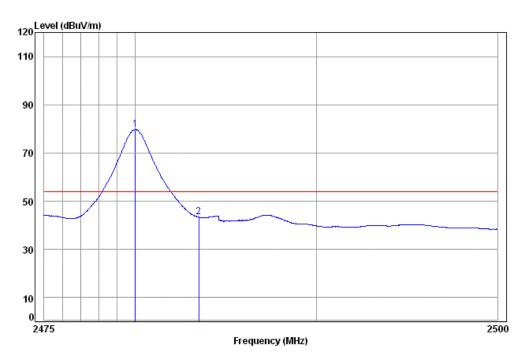

Site : chamber

Condition: AV 3m Horizontal

Job No: : 3808CR

Mode: : 2480 Band edge

				Preamp Factor			Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	-
							2480.01 2483.50	1 pp

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: SZEM150600380802

Page: 47 of 48


#### 7 Photographs - EUT Test Setup

Test model No.: V1

#### 7.1 Conducted Emission

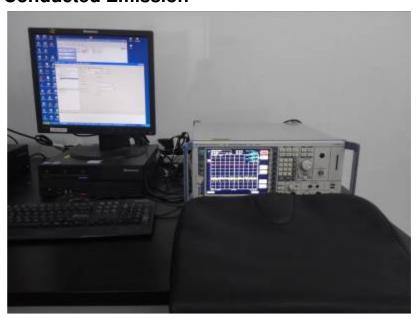

#### 7.2 Radiated Emission

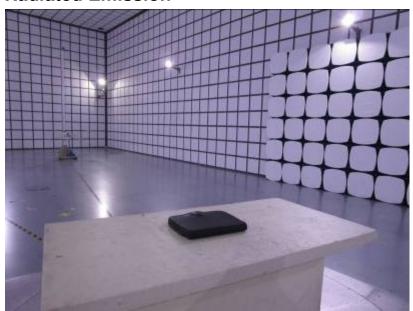




Report No.: SZEM150600380802

Page: 48 of 48

#### 7.3 Radiated Spurious Emission

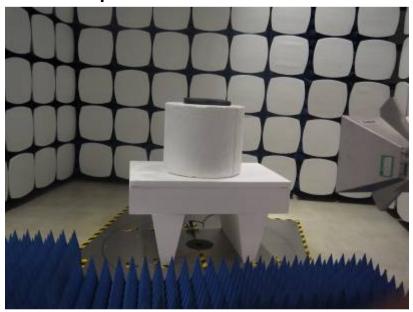

#### 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1506003808CR.