



Appendix G: Duty Cycle Test Result

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	8.38	8.41	0.9964	99.64	0.02	0.12	0.01
11G	1.39	1.43	0.9720	97.20	0.12	0.72	1
11N20MIMO	1.30	1.34	0.9701	97.01	0.13	0.77	1
11N40MIMO	0.65	0.68	0.9559	95.59	0.20	1.54	2

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used. And the VBW will be 10 Hz which the Duty Cycle is greater than 98%.

Test Graphs



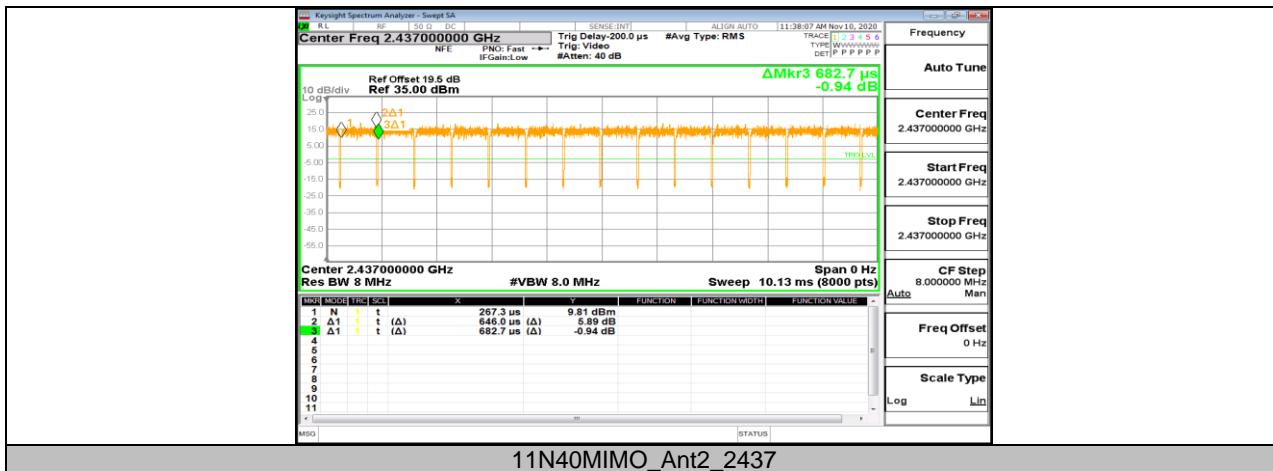

END OF REPORT