

FCC PART 15.231

TEST REPORT

For

HAMATON AUTOMOTIVE TECHNOLOGY CO., LTD

12 East Zhenxing Road, Linping, Yuhang, Hangzhou, China

FCC ID: 2AFH7PHT100

Report Type: Product Type: Original Report TPMS Sensor Chris. Wang **Test Engineer:** Chris Wang Report Number: RKS160901003-00G **Report Date:** 2016-10-20 Jesse. Hump Jesse Huang **Reviewed By:** EMC Manager **Prepared By:** Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	3
TEST METHODOLOGY	
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	5
EUT Exercise Software	5
EQUIPMENT MODIFICATIONS	
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC§15.203 - ANTENNA REQUIREMENT	7
APPLICABLE STANDARD	
ANTENNA CONNECTED CONSTRUCTION	
FCC §15.205, §15.209, §15.231 (e) - RADIATED EMISSIONS TEST	
APPLICABLE STANDARD	
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	
APPLICABLE STANDARD	
TEST RESULTS SUMMARY	
TEST DATA	
FCC §15.231 (c) – 20 dB BANDWIDTH TESTING	
Requirement	
TEST EQUIPMENT LIST AND DETAILS.	
TEST PROCEDURE	
TEST DATA	
FCC §15.231(e) - TRANSMISSION AND SILENT PERIOD TESTING	
APPLICABLE STANDARD	
EUT SETUP	
TEST EQUIPMENT LIST AND DETAILS	
Trox DATA	10

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The HAMATON AUTOMOTIVE TECHNOLOGY CO., LTD's product, model number: HTS-1000, (FCC ID: 2AFH7PHT100) the "EUT" is a TPMS Sensor, The EUT was measured approximately: 72.7mm(L)*53.5 mm(W)* 17.5mm(H). Rated input voltage: DC 3V from battery.

Report No.: RKS160901003-00G

*The product's series model number: S218. The difference between them was explained in the attached declaration letter.

*All measurement and test data in this report was gathered from production sample serial number: 20160830001.

(Assigned by BACL Kunshan). The EUT supplied by the applicant was received on 2016-08-30.

Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10-2013.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.231 Page 3 of 19

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China.

Report No.: RKS160901003-00G

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FCC Part 15.231 Page 4 of 19

SYSTEM TEST CONFIGURATION

Justification

The system was configured in testing mode which was provided by manufacturer.

Report No.: RKS160901003-00G

EUT Exercise Software


No exercise software.

Equipment Modifications

No modification on the EUT.

Block Diagram of Test Setup

Below 1GHz:

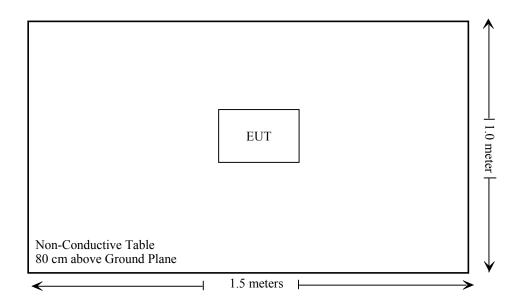

FCC Part 15.231 Page 5 of 19

SUMMARY OF TEST RESULTS

FCC Rules Description of Test		Result
§15.203	Antenna Requirement Compliance	
§15.207	AC Line Conducted Emission Not applicable	
§ 15.205, §15.209, §15.231 (e)	Radiated Emission Test	Compliance
§ 15.231 (c)	20dB Bandwidth Testing	Compliance
§ 15.231 (e)	Transmission and Silent Period Testing	Compliance

Report No.: RKS160901003-00G

Not applicable*: The EUT is powered by battery only.

FCC Part 15.231 Page 6 of 19

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Report No.: RKS160901003-00G

Antenna Connected Construction

The EUT has an internal antenna welded on the PCB and the antenna gain is 2dBi, which complied with 15.203. Please refer to the EUT Internal photos.

FCC Part 15.231 Page 7 of 19

FCC §15.205, §15.209, §15.231 (e) - RADIATED EMISSIONS TEST

Applicable Standard

FCC §15.205, §15.209, §15.231 (e)

Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Report No.: RKS160901003-00G

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Kunshan) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report


EUT Setup

Below 1GHz:

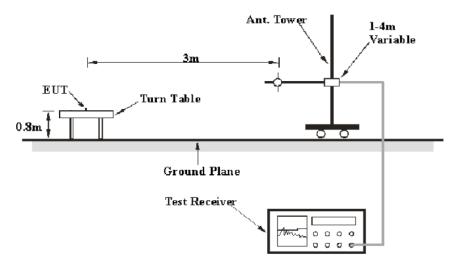

FCC Part 15.231 Page 8 of 19

Above 1 GHz:

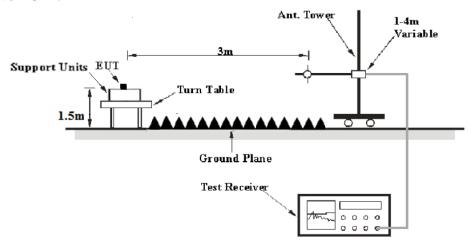

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10 - 2013. The specification used was the FCC part15.209, 15.205 and 15.231.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000MHz	100 kHz	300 kHz	100kHz	QP
1000 MHz – 5000 MHz	1MHz	3MHz	/	PK

FCC Part 15.231 Page 9 of 19

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrunent	Amplifier	330	171377	2016-09-16	2017-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	ЈВ3	A090314-1	2016-09-12	2017-09-12
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Mini	Pre-amplifier	ZVA-183-S+	857001418	2016-09-16	2017-09-16
champrotek	Chamber	Chamber A	1#	2016-09-17	2017-09-17
R&S	Auto test Software	EMC32	V 09.10.0	-	-
BACL	RF cable	KS-LAB-A01	KS-LAB-A01	2015-12-16	2016-12-15
BACL	RF cable	KS-LAB-A02	KS-LAB-A02	2015-12-16	2016-12-15

Report No.: RKS160901003-00G

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

According to §15.231, Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector.

FCC Part 15.231 Page 10 of 19

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Applicable Standard

According to §15.231 (e), the field strength of emissions from intentional radiators operated under this section shall not exceed the following

Report No.: RKS160901003-00G

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500 *	50 to 150 *
174-260	1,500	150
260-470	1,500 to 5,000 *	150 to 500*
Above 470	5,000	500

^{*}Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Results Summary

According to the data in the following table, the EUT complied with the CFR47 §15.205, §15.209, § 15.231 (e), with the worst margin reading of:

13.99dB at 315MHz in the Vertical polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

FCC Part 15.231 Page 11 of 19

Test Data

Environmental Conditions

Temperature:	25 ℃	
Relative Humidity:	50 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Chris Wang on 2016-10-18.

Test mode: FSK and ASK Transmitting

Field Strength (Peak)

D	Maximum	ximum RX Antenna		Capie Amniiner	Corrected	15.231(e)		
Frequency (MHz)	Reading (dBuV)	Polar (H/V)	Factor (dB)	Loss (dB)	Gain (dB)	Amplitude (dBμV/m)	Limit (dBµV/m)	Margin (dB)
315	71.51	V	13.7	1.2	25.2	61.21	87.66	26.45
315	73.87	Н	13.7	1.2	25.2	63.57	87.66	24.09
630	46.43	Н	18.5	1.8	25.2	41.53	67.66	26.13
630	47.58	V	18.5	1.8	25.2	42.68	67.66	24.98
945	40.82	Н	22.4	2.4	25.3	40.32	67.66	27.34
945	42.17	V	22.4	2.4	25.3	41.67	67.66	25.99

Report No.: RKS160901003-00G

Field Strength (Average)

Peak		Antenna	Duty Cycle	Average	15.231(e)		
Frequency (MHz)	Measurement @3m (dBμV/m)	Polarity (H/V)	Correction Factor (dB)	Amp. (dBμV/m)	Limit (dBµV/m)	Margin (dB)	
315	61.21	Н	-9.90	51.31	67.66	16.35	
315	63.57	V	-9.90	53.67	67.66	13.99	
630	41.53	Н	-9.90	31.63	47.66	16.03	
630	42.68	V	-9.90	32.78	47.66	14.88	
945	40.32	Н	-9.90	30.42	47.66	17.24	
945	41.67	V	-9.90	31.77	47.66	15.89	

Note: All other spurious emissions for above 1GHz are 20dB below the limit.

Note:

Calculate Average value based on duty cycle correction factor:

 $\begin{array}{l} Duty\ cycle=T_{on}/T_{P}\\ =32ms\ /100.0ms \end{array}$

= 0.32

FCC Part 15.231 Page 12 of 19

^{*}Within measurement uncertainty!

Duty cycle factor= 20*log (duty cycle) = -9.90dB

So The Max. duty cycle is 32%, and duty cycle correction factor is -9.90 dB

Report No.: RKS160901003-00G


Average=Peak+ Duty cycle factor

FCC Part 15.231 Page 13 of 19

Please refer to the following plot.

Duty Cycle

Report No.: RKS160901003-00G

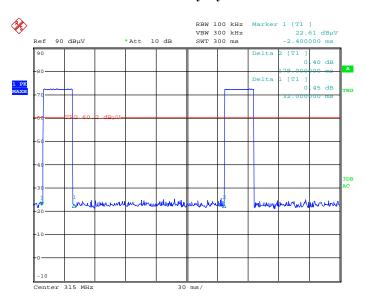

Date: 18.OCT.2016 16:58:51

FCC Part 15.231 Page 14 of 19

FCC §15.231(c) – 20 dB BANDWIDTH TESTING

Requirement

Per 15.231*e+, The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Report No.: RKS160901003-00G

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrunent	Amplifier	330	171377	2016-09-16	2017-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	ЈВ3	A090314-1	2016-09-12	2017-09-12
champrotek	Chamber	Chamber A	1#	2016-09-17	2017-09-17
R&S	Auto test Software	EMC32	V 09.10.0	-	-
BACL	RF cable	KS-LAB-A02	KS-LAB-A02	2015-12-16	2016-12-15

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Procedure

With the EUT's antenna attached, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

Test Data

Environmental Conditions

Temperature:	26 ℃	
Relative Humidity:	53 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Chris Wang on 2016-10-18.

Test Mode: Transmitting

Please refer to following table and plot.


FCC Part 15.231 Page 15 of 19

Model	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
ASK&FSK	315	170.0	787.5	Pass

Report No.: RKS160901003-00G

Note: Limit = 0.25% * Center Frequency = 0.25% * 315MHz = 787.5 kHz 20dB Bandwidth=170.0 kHz<787.5 kHz

20 dB Bandwidth

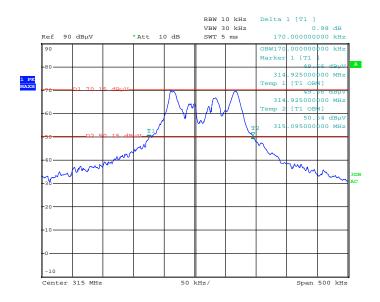

Date: 19.OCT.2016 15:12:35

FCC Part 15.231 Page 16 of 19

FCC §15.231(e) - Transmission and Silent Period Testing


Applicable Standard

Per 15.231(e), devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Report No.: RKS160901003-00G

EUT Setup

Below 1GHz:

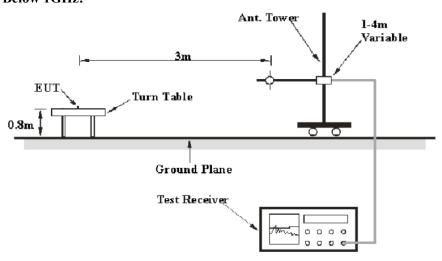

The deactivation test was performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10- 2013. The specification used was the FCC 15.231(e) limits.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrunent	Amplifier	330	171377	2016-09-16	2017-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	ЈВ3	A090314-1	2016-09-12	2017-09-12
champrotek	Chamber	Chamber A	1#	2016-09-17	2017-09-17
BACL	RF cable	KS-LAB-A02	KS-LAB-A02	2015-12-16	2016-12-15

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC Part 15.231 Page 17 of 19

Test Data

Environmental Conditions

Temperature:	26 ℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Chris Wang on 2016-10-18.

Test Mode: Transmitting

Please refer to following table and plot.

Deactivation

Report No.: RKS160901003-00G

Transmission period (s)	Limit (s)	Result
0.39	< 1	Pass

Silent period

Silent period (s)	Limit (s)	Result
15.41	> 11.70	Pass

Note: The silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.


The duration time is 0.39s, $0.39 \times 30 = 11.70s$.

This test mode mixed ASK & FSK modulation.


FCC Part 15.231 Page 18 of 19

Transmission period and Silent period

Report No.: RKS160901003-00G

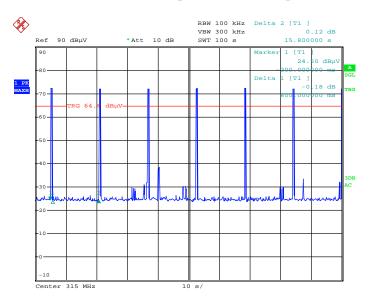

Date: 18.OCT.2016 17:06:02

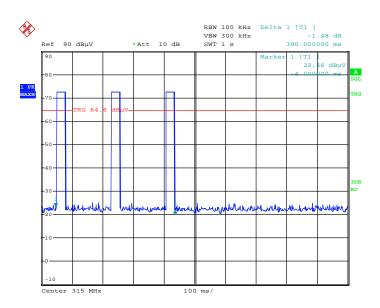

Date: 18.OCT.2016 17:10:00

***** END OF REPORT *****

FCC Part 15.231 Page 19 of 19