





FCC 47 CFR PART 15 SUBPART C Canada RSS-247 Issue2 Canada RSS-Gen Issue4 TEST REPORT

For

Product Name: YI Horizon VR180 Camera

Brand Name: YI Model No.: YVR.1117

Series Model.: N/A

FCC ID: 2AFIB-YVR1117

IC: 20436-YVR1117 Test Report Number: C171023R02-RPW

Issued for

Shanghai Xiaoyi Technology Co., Ltd.

16F, Building 1, No. 515, Huanke Road, Shanghai, China

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

No.10 Weiye Rd., Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China

TEL: 86-512-57355888

FAX: 86-512-57370818




Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	TEST RESULT CERTIFICATION	4
2.	EUT DESCRIPTION	5
3.	TEST METHODOLOGY	6
3.	.1. EUT CONFIGURATION	6
	.2. EUT EXERCISE	
	.3. GENERAL TEST PROCEDURES	
	.4. RESTRICTED BANDS OF OPERATIONS	
	.5. DESCRIPTION OF TEST MODES	
	.6. DUTY CYCLE	
3.	.7. ANTENNA DESCRIPTION	12
4.	INSTRUMENT CALIBRATION	13
4.	.1. MEASURING INSTRUMENT CALIBRATION	13
5. 3	FACILITIES AND ACCREDITATIONS	15
5.	.1. FACILITIES	15
	.2. EQUIPMENT	
	.3. LABORATORY ACCREDITATIONS AND LISTING	
5.	.4. TABLE OF ACCREDITATIONS AND LISTINGS	16
6.	SETUP OF EQUIPMENT UNDER TEST	18
6.	.1. SETUP CONFIGURATION OF EUT	18
6.	.2. SUPPORT EQUIPMENT	18
7. 3	FCC PART 15.247 REQUIREMENTS	19
7.	.1. 6DB BANDWIDTH	19
7.	.2. 99% BANDWIDTH MEASUREMENT	30
	.3. PEAK POWER	
	.4. PEAK POWER SPECTRAL DENSITY	
	.5. SPURIOUS EMISSIONS	
	.6. RADIATED EMISSIONS	
1	TOTAL BOTT IN BUTTANIA I CALLER LA MARCELLA NIC	1410







Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	April 2, 2018	C171023R02-RPW	ALL	N/A
01	May 25, 2018	C171023R02-RPW	P4; P5; P6; P8; P10-12; P19; P41-43; P54; P89; P109	Modify Antenna gain and EIRP; Add the ISED standard in section 3 and all section of test items; Put the plots of duty cycle.
02	June 1, 2018	C171023R02-RPW	P5	Delete the ant gain of 5GHz





1. TEST RESULT CERTIFICATION

Product Name:	YI Horizon VR180 Camera
Trade Name:	YI
Model Name.:	YVR.1117
Series Model:	N/A
Applicant Discrepancy:	Initial
Device Category:	Mobile unit
Date of Test:	March 1, 2018~March 30, 2018
Applicant:	Shanghai Xiaoyi Technology Co., Ltd. 16F, Building 1, No. 515, Huanke Road, Shanghai, China
Manufacturer:	Shanghai Xiaoyi Technology Co., Ltd. 16F, Building 1, No. 515, Huanke Road, Shanghai, China
Application Type:	Certification

APPLICABLE STANDARDS				
STANDARD	TEST RESULT			
FCC 47 CFR Part 15 Subpart C	No non-compliance noted			
Canada RSS-247 Issue 2	No non-compliance noted			
Canada RSS-Gen Issue 4	No non-compliance noted			

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 and IC Rules RSS-247 Issue2, RSS-Gen Issue4.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Jeff.Fang RF Manager

Compliance Certification Service Inc.

Tested by:

Lily.Wang Test Engineer

Compliance Certification Service Inc.





2. EUT DESCRIPTION

Product Name:	YI Horizon VR180 Camera				
Brand Name:	YI				
Model Name:	YVR.1117				
Series Model:	N/A				
Model Discrepancy:	N/A	N/A			
Power Adapter:	DC 5V Battery: Model: U344378P(1ICP4/43/78) 3.85V===1800mAh 6.93Wh Charging Limit Voltage: 4.4V				
Frequency Range:	IEEE 802.11b/g: 2412MHz to 2462 N IEEE 802.11n HT20: 2412MHz to 24				
Peak output Power:	IEEE 802.11b mode: 16.43dBm IEEE 802.11g mode: 20.16dBm IEEE 802.11n HT20 mode: 20.42dB	m			
Peak e.i.r.p:	IEEE 802.11b mode: 19.20dBm IEEE 802.11g mode: 22.93dBm IEEE 802.11n HT20 mode: 23.19dB	m			
Average output Power:	IEEE 802.11b mode: 13.16dBm IEEE 802.11g mode: 13.44dBm IEEE 802.11n HT20 mode: 13.21dBm				
Average e.i.r.p:	IEEE 802.11b mode: 15.93dBm IEEE 802.11g mode: 16.21dBm IEEE 802.11n HT20 mode: 15.98dBm				
Modulation Technique:	IEEE802.11b mode: DSSS (1,2,5.5 and 11 Mbps) IEEE802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) IEEE802.11n HT20 mode: OFDM (MCS0~MCS7)				
Number of Channels:	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT20: 11 Channels				
Antenna Specification:	FPC Antenna				
Antenna Specification:					

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2.This submittal(s) (test report) is intended for *FCC ID: 2AFIB-YVR1117* filling to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
- 3. This submittal(s) (test report) is intended for *IC : 20436-YVR1117* filling to comply with IC rules RSS-247 Issue2, RSS-Gen Issue4.







3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 2013 and FCC CFR 47 15.207. 15.209 and 15.247 and IC RSS-247 Issue2. RSS-Gen Issue4.

3.1.EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2.EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C and RSS-247 Issue2, RSS-Gen Issue4 under the IC Rules.

3.3.GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

Under 1GHz

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.4 & 6.5 of ANSI C63.10:2013.

Above 1GHz

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.6 of ANSI C63.10:2013.





3.4.RESTRICTED BANDS OF OPERATIONS FCC

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

rrequericy barids listed below			
MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

² Above 38.6





ICExcept as shown RSS-Gen 8.10, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	GHz
0.090-0.110	74.8-75.2	9.0-9.2
2.1735-2.1905	108-138	9.3-9.5
3.020-3.026	156.52475-156.52525	10.6-12.7
4.125-4.128	156.7-156.9	13.25-13.4
4.17725-4.17775	240-285	14.47-14.5
4.20725-4.20775	322-335.4	15.35-16.2
5.677-5.683	399.9-410	17.7-21.4
6.215-6.218	608-614	22.01-23.12
6.26775-6.26825	960-1427	23.6-24.0
6.31175-6.31225	1435-1626.5	31.2-31.8
8.291-8.294	1645.5-1646.5	36.43-36.5
8.362-8.366	1660-1710	Above 38.6
8.37625-8.38675	1718.8-1722.2	
8.41425-8.41475	2200-2300	
12.29-12.293	2310-2390	
12.51975-12.52025	2655-2900	
12.57675-12.57725	3260-3267	
13.36-13.41	3332-3339	
16.42-16.423	3345.8-3358	
16.69475-16.69525	3500-4400	
16.80425-16.80475	4500-5150	
25.5-25.67	5350-5460	
37.5-38.25	7250-7750	
73-74.6	8025-8500	

^{*} Certain frequency bands listed in Table 6 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in the 200-and 300-series of RSSs, such as RSS-210 and RSS-310, which contain the requirements that apply to licence-exempt radio apparatus.





3.5.DESCRIPTION OF TEST MODES

Test Mode	Antenna 1	Antenna 2	Antenna 1+2
802.11b	√	√	х
802.11g	√	√	х
802.11n HT20	√	√	√

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 1Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 6Mbps data rate was chosen for full testing.

IEEE 802.11n HT20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with MCS0 data rate was chosen for full testing.






3.6.DUTY CYCLE

Band	Duty Cycle(%)	T(s)	1/T(kHz)	VBW Setting
IEEE 802.11 b	100	-	-	10Hz
IEEE 802.11 g	98.80	-	-	10Hz
IEEE 802.11n HT20	98.97	-	-	10Hz



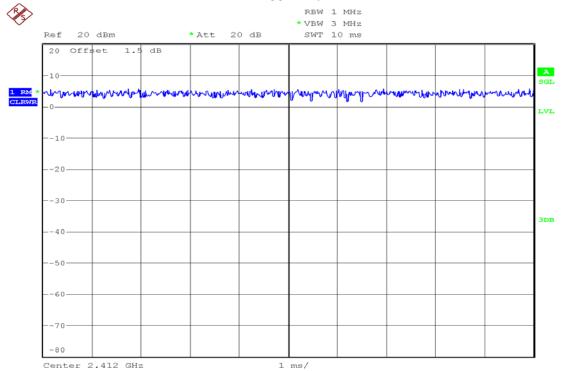









IEEE 802.11 g

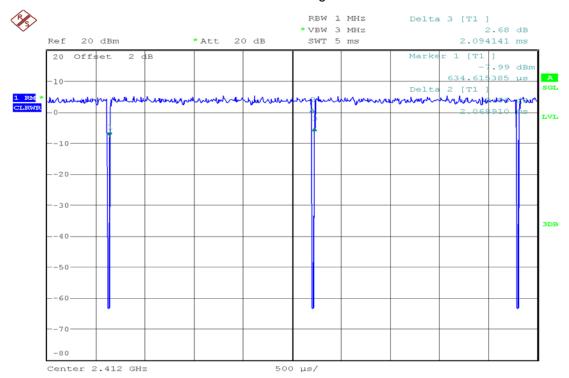

IEEE 802.11n HT20

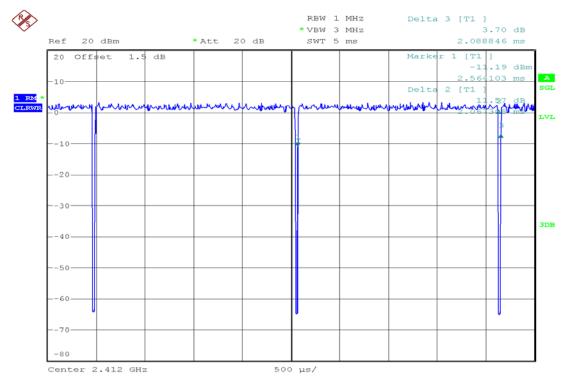






3.7.ANTENNA DESCRIPTION

According to FCC 47 CFR 15.203 and RSS-Gen 8.3

"an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section"

As the photo below, the EUT use a unique coupling to the intentional radiator attached antenna, so the EUT complies with the requirement of FCC 47 CFR 15.203 and RSS-Gen 8.3.

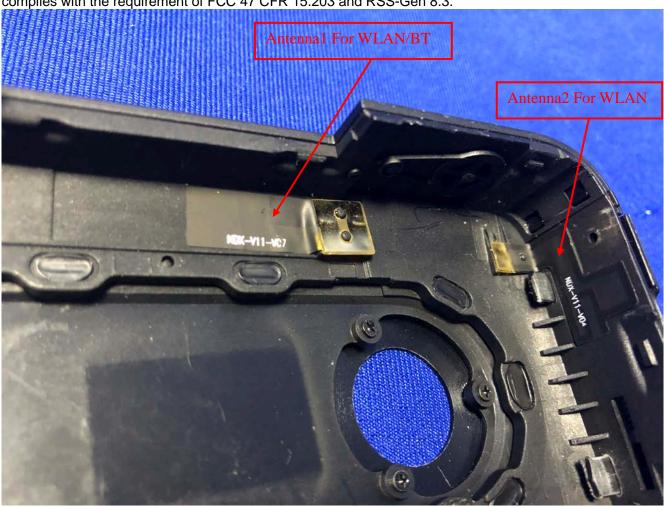





4. INSTRUMENT CALIBRATION

4.1.MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

Conducted Emissions Test Site						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due	
Spectrum Analyzer	Agilent	E4446A	MY44020154	2017-9-4	2018-9-3	
Spectrum Analyzer	RS	FSU26	200789	2017-7-20	2018-7-19	
Power meter	Anritsu	ML2495A	1445010	2017-4-26	2018-4-25	
Power sensor	Anritsu	MA2411B	1339220	2017-4-26	2018-4-25	
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	N.C.R	
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R	N.C.R	
Cable	N/A	Cable-05	N/A	2017-4-26	2018-4-25	
Cable	N/A	Cable-06	N/A	2017-4-26	2018-4-25	
6dB Attenuator	N/A	N/A	N/A	2017-4-26	2018-4-25	
Temp. / Humidity Gauge	Anymetre	TH603	CCS007	2017-10-24	2018-10-23	
Test S		EZ-EMC				

Conducted Emission						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due	
EMI TEST RECEIVER	R&S	ESCI	100781	2018-2-26	2019-2-25	
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	2017-10-29	2018-10-28	
TWO-LINE V-NETWORK	R&S	ENV216	101604	2017-10-29	2018-10-28	
Pulse LIMITER	R&S	ESH3-Z2	100524	2017-12-27	2018-12-26	
Cable	Thermax	Cable-02	14	2017-12-27	2018-12-26	
		EZ-EMC				





	977 Chamber					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due	
Spectrum Analyzer	Agilent	E4446A	MY44020154	2017-9-4	2018-9-3	
Spectrum Analyzer	RS	FSU26	200789	2017-7-20	2018-7-19	
EMI Test Receiver	R&S	ESCI	101378	2017-12-26	2018-12-25	
Amplifier	COM-POWER	PAM-840A	461332	2017-11-29	2018-11-28	
Amplifier	MITEQ	JS41-00101800-32-10P	1675713	2017-7-20	2018-7-19	
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9170	9170-515	2018-2-26	2019-2-25	
Bilog Antenna	Sunol	JB1	A062604	2017-5-27	2018-5-26	
Bilog Antenna	Sunol	JB1	A110204-1	2017-5-27	2018-5-26	
Loop Antenna	Hengweiyi	39501C	2014012	2018-1-4	2019-1-3	
Horn-antenna	SCHWARZBECK	9120D	D:266	2018-2-26	2019-2-25	
Horn-antenna	SCHWARZBECK	9120D	D:267	2017-11-5	2018-11-4	
Turn Table	СТ	CT123	4165	N.C.R	N.C.R	
Antenna Tower	СТ	CTERG23	3256	N.C.R	N.C.R	
Controller	СТ	CT100	95637	N.C.R	N.C.R	
Cable	REBES MICROWAVE	Cable-93	N/A	2017-10-29	2018-10-28	
Cable	REBES MICROWAVE	Cable-94	N/A	2017-10-29	2018-10-28	
Cable	REBES MICROWAVE	Cable-95	N/A	2017-10-29	2018-10-28	
Cable	N/A	Cable-03	N/A	2017-4-26	2018-4-25	
Cable	N/A	Cable-04	N/A	2017-4-26	2018-4-25	
2.4G Filter	N/A	N/A	N/A	2017-4-26	2018-4-25	
Filter 5150MHz-5350MHz	N/A	N/A	N/A	2017-4-26	2018-4-25	
Filter 5725MHz-5850MHz	N/A	N/A	N/A	2017-4-26	2018-4-25	
	Test Software)		EZ-EMC		

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2





5. FACILITIES AND ACCREDITATIONS

5.1.FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 2013 and CISPR Publication 22.

5.2.EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3.LABORATORY ACCREDITATIONS AND LISTING

FCC -Designation Number: CN1172.

Compliance Certification Services Inc. Kun shan Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Designation Number: CN1172.

Also the test facilities are listed with Industry Canada, Laboratory Division, 2324E-1 for 10m chamber, 2324E-2 for 3m chamber.





5.4.TABLE OF ACCREDITATIONS AND LISTINGS


Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC, Part 15,Subpart B (using ANSI 63.4:2009 and ANSI C63.4:2014);ICES-003; 47 CFR FCC, Part 18(using MP-5:1986);ICES-001;VCCI - V3; VCCI-CISPR-32(up to 6GHz);VCCI 32-1;CNS 13438(up to 6GHz); CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22; EN 55022; AS/NZS CISPR 23;EN55014-1(excluding clicks);CISPR 14-1(excluding clicks);EN55015;CISPR 15; IEC 61000-3-2; EN 61000-3-2; AS/NZS 61000.3.2 IEC 61000-3-2; EN 61000-3-3; AS/NZS 61000.3.3 IEC 61000-4-3; EN 61000-4-2; AS/NZS 61000.4.3 IEC 61000-4-3; EN 61000-4-2; AS/NZS 61000.4.3 IEC 61000-4-3; EN 61000-4-3; AS/NZS 61000.4.3 IEC 61000-4-3; EN 61000-4-3; AS/NZS 61000.4.4 IEC 61000-4-4; EN 61000-4-4; AS/NZS 61000.4.5 IEC 61000-4-8; EN 61000-4-6; AS/NZS 61000.4.6 IEC 61000-4-8; EN 61000-4-6; AS/NZS 61000.4.8 IEC 61000-4-8; EN 61000-4-1; AS/NZS 61000.4.8 IEC 61000-4-1; EN 61000-4-1; AS/NZS 61000.4.8 IEC 61000-6-1; EN 61000-6-2; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-3 (excluding discontinuous interference); IEC 61000-6-4; EN 61000-6-3 (excluding discontinuous interference); IEC 61000-6-4; EN 61000-6-3 (excluding discontinuous interference); IEC 61000-6-3 (excluding discontinuous interference); IEC 61000-6-3 (excluding discontinuous interference); EN 61000-6-3 (excluding discontinuous interference); IEC 61000-6-3 (excluding discontinuous interference); AS/NZS 61000.6.3 (excluding discontinuous interference); IEC 61000-6-3 (excluding discont	ACCREDITED TESTING CERT #2541.01





		EN 301 908-2 (clauses 4.2.4, 4.2.10, 5.3.3, and 5.3.9) AS/NZS 4268 IEEE Std 1528:2013; EN 50360; EN 50566; EN 62479; EN 50383; EN 50385; EN 62311; IEC 62209-1; EN 62209-1; IEC 62209-2; EN 62209-2; CNS 14958-1; CNS 14959; RSS-102; ACMA Radio Communications (Electromagnetic Radiation – Human Exposure) Standard 2014	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	FC CN1172
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-1600 C-1707 G-216

^{*} No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.







6. SETUP OF EQUIPMENT UNDER TEST

6.1.SETUP CONFIGURATION OF EUT

See test photographs attached in Setup photo for the actual connections between EUT and support equipment.

6.2.SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
N/A	N/A	N/A	N/A	N/A	N/A

Remark:

- 1.All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.





7. FCC PART 15.247 REQUIREMENTS


7.1.6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

According to RSS-247 section 5.2, DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz: The minimum 6 dB bandwidth shall be 500 kHz

Test Configuration



TEST PROCEDURE

Set the spectrum analyzer as RBW = 100 kHz, VBW = 300 kHz, Sweep = auto couple.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode /Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	8.646		PASS
Mid	2437	8.632	>500	PASS
High	2462	9.110		PASS

IEEE 802.11b mode /Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.163		PASS
Mid	2437	9.121	>500	PASS
High	2462	9.130		PASS

IEEE 802.11g mode /Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.426		PASS
Mid	2437	16.404	>500	PASS
High	2462	16.387		PASS







IEEE 802.11g mode /Chain 1


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.422		PASS
Mid	2437	16.399	>500	PASS
High	2462	16.411		PASS

IEEE 802.11n HT20 mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.601		PASS
Mid	2437	17.643	>500	PASS
High	2462	17.610		PASS

IEEE 802.11n HT20 mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.680		PASS
Mid	2437	17.676	>500	PASS
High	2462	17.691		PASS








Test Plot IEEE 802.11b MODE /Chain 0


6dB Bandwidth (CH Low)

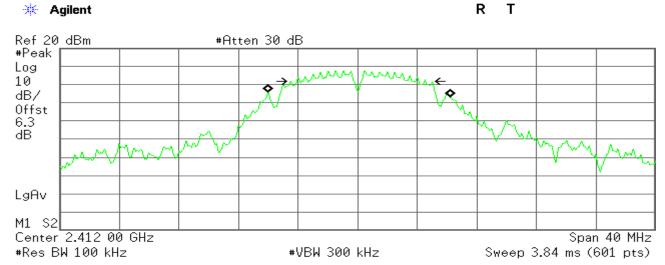

Occupied Bandwidth 12.1513 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 102.813 kHz x dB Bandwidth 8.646 MHz

6dB Bandwidth (CH Mid)

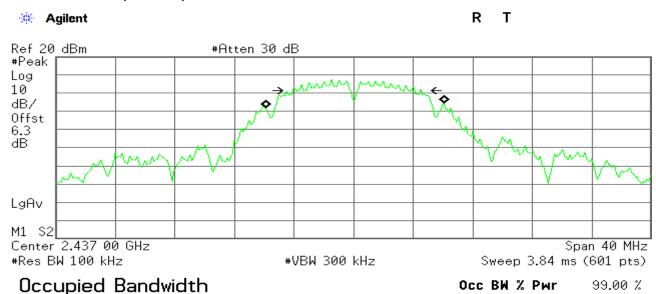

Transmit Freq Error 67.776 kHz x dB Bandwidth 8.632 MHz

11.9331 MHz

-6.00 dB


x dB







6dB Bandwidth (CH High)

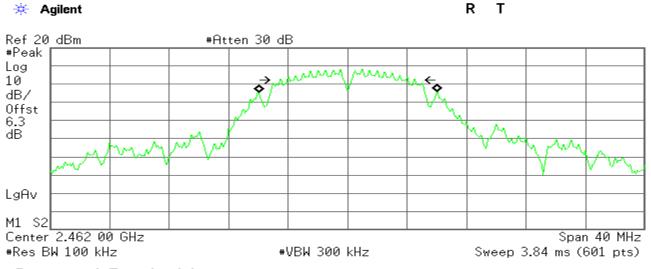


Occupied Bandwidth 11.9971 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 32.721 kHz x dB Bandwidth 9.110 MHz

IEEE 802.11b MODE /Chain 1

6dB Bandwidth (CH Low)

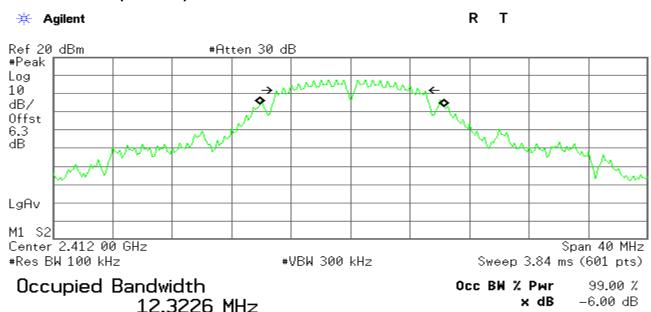


Transmit Freq Error 84.980 kHz x dB Bandwidth 9.163 MHz








6dB Bandwidth (CH Mid)

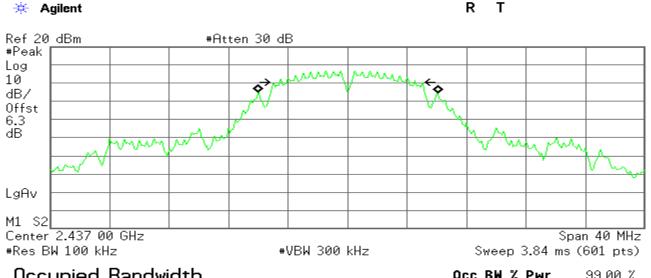

Occupied Bandwidth 12.0304 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 36.222 kHz x dB Bandwidth 9.121 MHz

6dB Bandwidth (CH High)

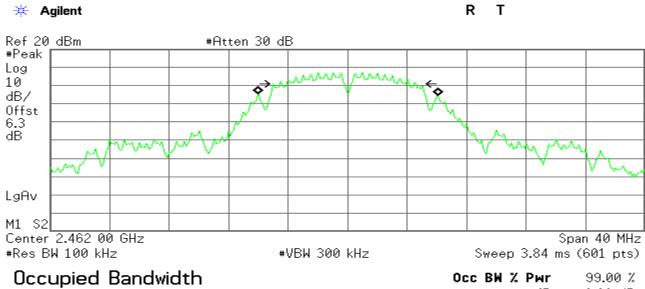

12.0176 MHz

-6.00 dB x dB

Transmit Freq Error 40.861 kHz x dB Bandwidth 9.130 MHz








IEEE 802.11g MODE /Chain 0


6dB Bandwidth (CH Low)

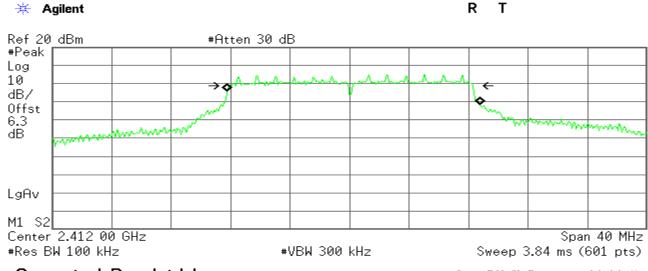

Occupied Bandwidth 17.0724 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 283.708 kHz x dB Bandwidth 16.426 MHz

6dB Bandwidth (CH Mid)

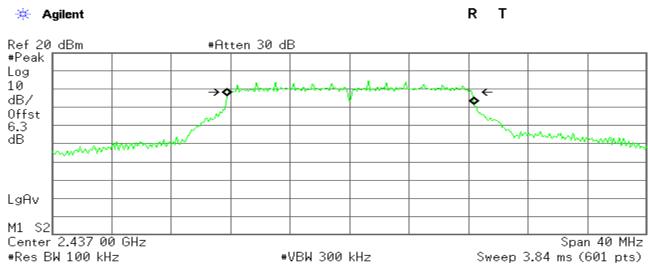

Occupied Bandwidth 16.6608 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB


Transmit Freq Error 63.686 kHz x dB Bandwidth 16.404 MHz







6dB Bandwidth (CH High)

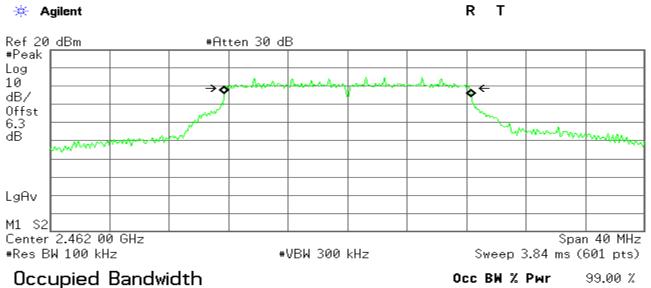


16.6655 MHz

x dB -6.00 dB


Transmit Freq Error 31.123 kHz x dB Bandwidth 16.387 MHz

IEEE 802.11g MODE /Chain 1 6dB Bandwidth (CH Low)

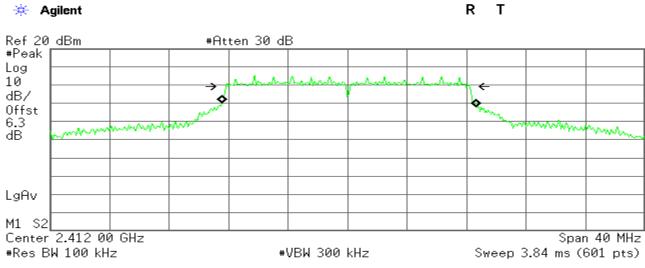

Occupied Bandwidth 17.1504 MHz Occ BW % Pwr 99.00 % -6.00 dB x dB


Transmit Freq Error 98.145 kHz x dB Bandwidth 16.422 MHz








6dB Bandwidth (CH Mid)

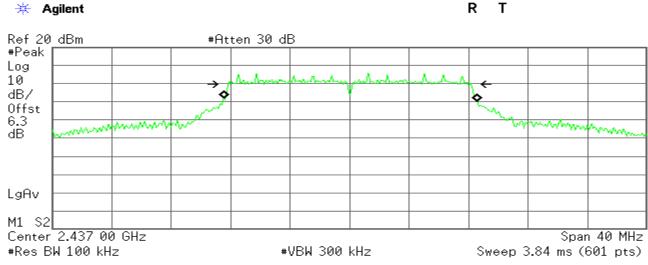

Occupied Bandwidth 17.1124 MHz 0cc BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 60.764 kHz x dB Bandwidth 16.399 MHz

6dB Bandwidth (CH High)

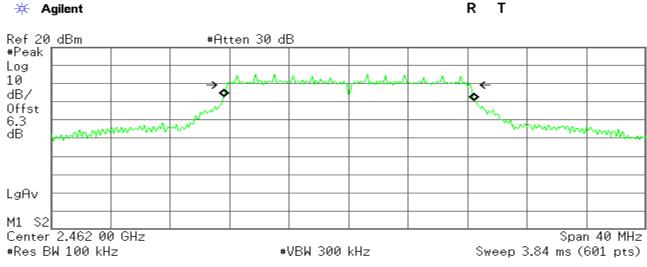

Occupied Bandwidth 16.8525 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 38.265 kHz x dB Bandwidth 16.411 MHz








IEEE 802.11n HT20 mode / Chain 0


6dB Bandwidth (CH Low)

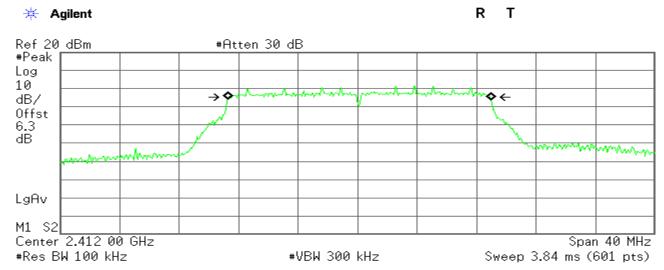

Occupied Bandwidth 17.7739 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB


Transmit Freq Error 126.869 kHz x dB Bandwidth 17.601 MHz

6dB Bandwidth (CH Mid)

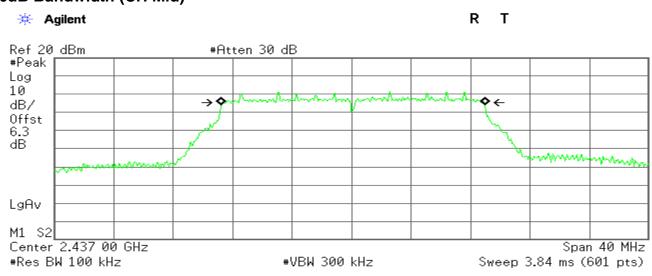

Occupied Bandwidth 17.7643 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB


Transmit Freq Error 115.176 kHz x dB Bandwidth 17.643 MHz







6dB Bandwidth (CH High)

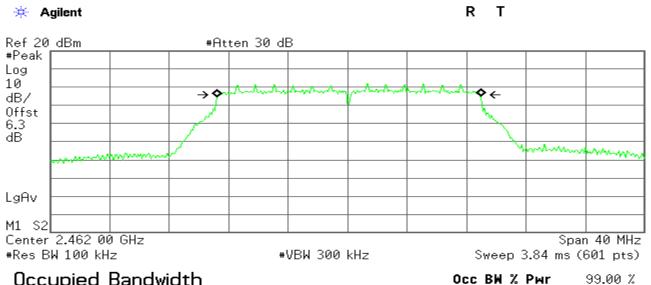


Occupied Bandwidth 17.7665 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 97.858 kHz x dB Bandwidth 17.610 MHz

IEEE 802.11n HT20 mode / Chain 1


6dB Bandwidth (CH Low)

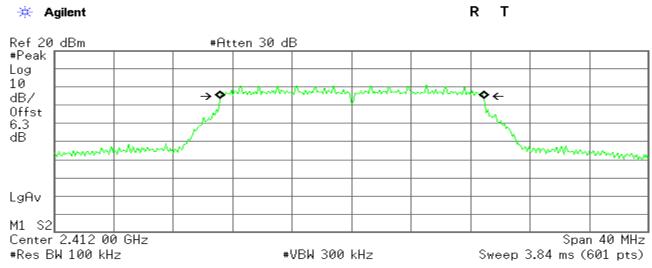

Occupied Bandwidth 17.7640 MHz

Occ BW % Pwr 99.00 % x dB -6.00 dB


Transmit Freq Error 37.311 kHz x dB Bandwidth 17.680 MHz








6dB Bandwidth (CH Mid)

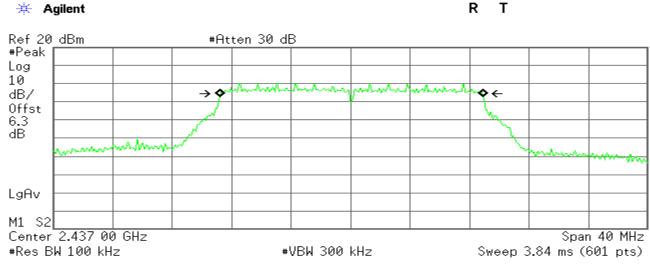

Occupied Bandwidth 17.7471 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 58.688 kHz x dB Bandwidth 17.676 MHz

6dB Bandwidth (CH High)

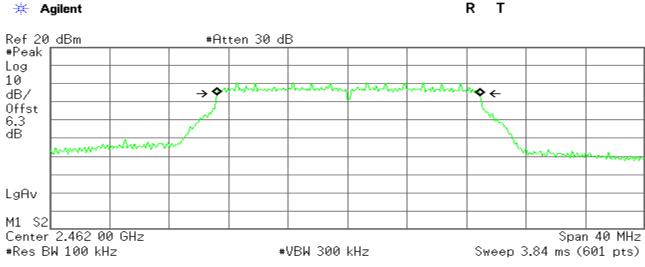

Occupied Bandwidth 17.7302 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 66.233 kHz x dB Bandwidth 17.691 MHz








7.2.99% BANDWIDTH MEASUREMENT

LIMIT

None; for reporting purposes only RSS-Gen 6.6

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW shall be in the range of 1% to 5% of the occupied bandwidth and VBW shall be approximately 3x RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

TEST RESULTS

No non-compliance noted





Test Data

IEEE 802.11b mode/Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	12.266
Mid	2437	11.969
High	2462	11.983

IEEE 802.11b mode/Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	12.363
Mid	2437	12.165
High	2462	12.017

IEEE 802.11g mode/Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	17.601
Mid	2437	17.292
High	2462	17.325

IEEE 802.11g mode/Chain 1


Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	18.016
Mid	2437	17.668
High	2462	17.535

IEEE 802.11n HT20 mode/Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	18.169
Mid	2437	18.175
High	2462	18.156

IEEE 802.11n HT20 mode/Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	18.037
Mid	2437	17.974
High	2462	18.048








IEEE 802.11b MODE/Chain 0

99% Bandwidth (CH Low)

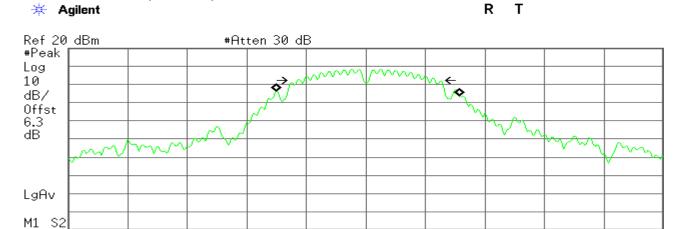

#VBW 1 MHz

Occupied Bandwidth 12.2662 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Sweep 1 ms (601 pts)


Span 40 MHz

Transmit Freq Error 135.964 kHz x dB Bandwidth 9.244 MHz

99% Bandwidth (CH Mid)

Center 2.412 00 GHz


#Res BW 300 kHz

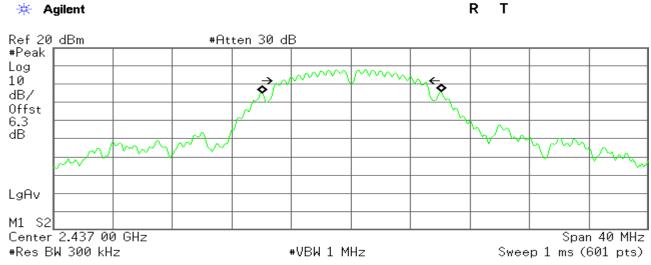

Occupied Bandwidth 11.9693 MHz

Осс В**W % Рыг** 99.00 % **х dB** -6.00 dB


Transmit Freq Error 57.151 kHz x dB Bandwidth 9.222 MHz







99% Bandwidth (CH High)

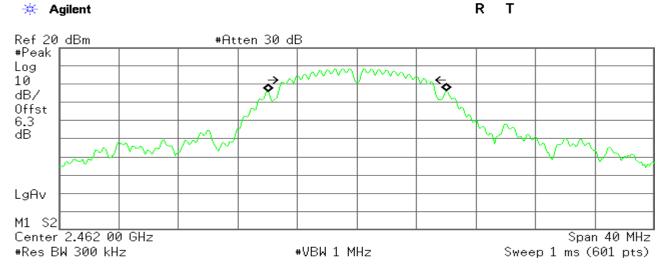


Occupied Bandwidth 11.9832 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 38.891 kHz x dB Bandwidth 9.227 MHz


IEEE 802.11b MODE/Chain 1

99% Bandwidth (CH Low)

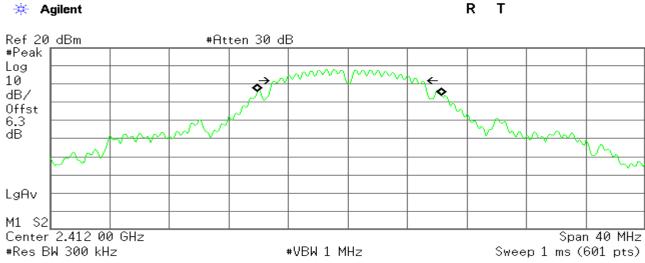

Occupied Bandwidth 12.3629 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB


Transmit Freq Error 112.772 kHz x dB Bandwidth 9.306 MHz








99% Bandwidth (CH Mid)

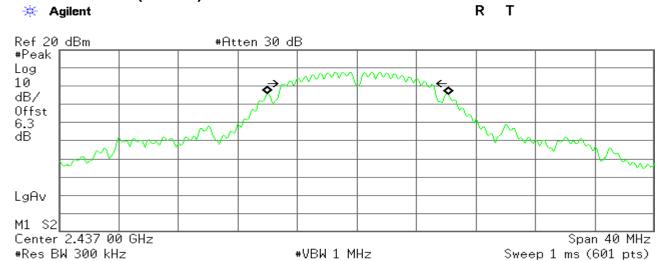

Occupied Bandwidth 12.1645 MHz 0cc BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 73.252 kHz x dB Bandwidth 9.283 MHz

99% Bandwidth (CH High)

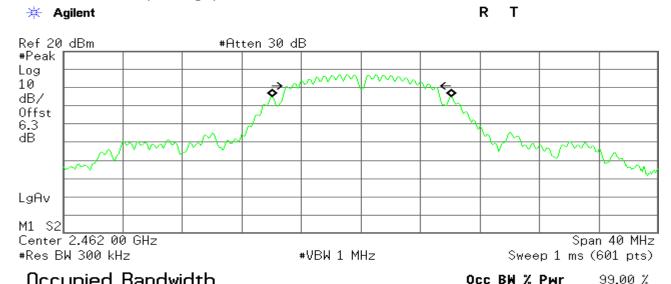

Occupied Bandwidth 12.0173 MHz

x dB -6.00 dB

Transmit Freq Error 70.684 kHz x dB Bandwidth 9.270 MHz



R T






IEEE 802.11g MODE/Chain 0

99% Bandwidth (CH Low)


🔆 Agilent

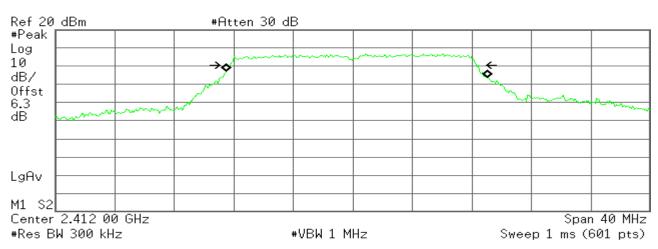

Occupied Bandwidth 17.6008 MHz Occ BW % Pwr 99.00 % -6.00 dB x dB

Transmit Freq Error 251.859 kHz x dB Bandwidth 16.595 MHz

99% Bandwidth (CH Mid)

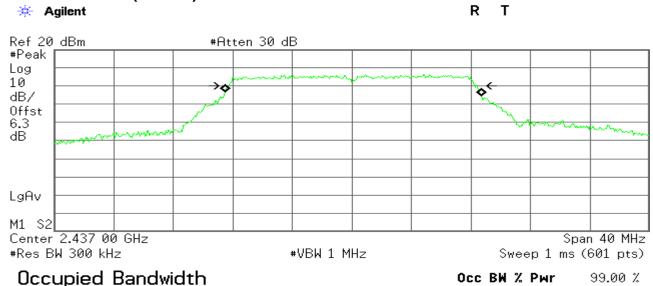

Transmit Freq Error 112.776 kHz x dB Bandwidth 16.714 MHz

17.2915 MHz

-6.00 dB


x dB







99% Bandwidth (CH High)

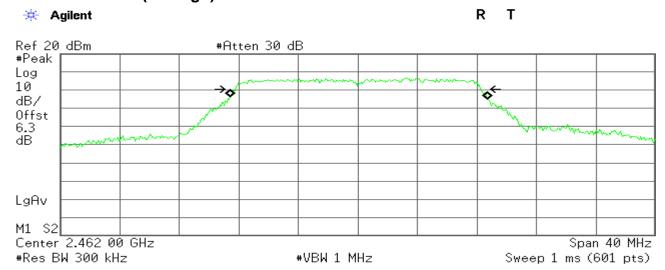


Occupied Bandwidth 17.3250 MHz

Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 65.355 kHz x dB Bandwidth 16.508 MHz

IEEE 802.11g MODE/Chain 1


99% Bandwidth (CH Low)

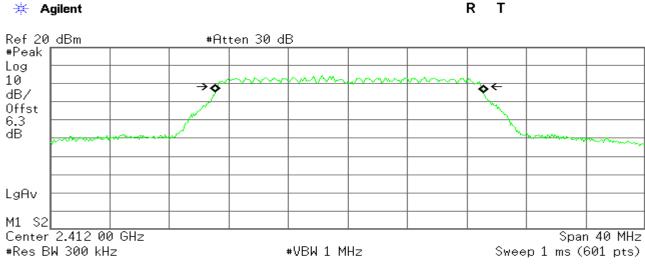

Occupied Bandwidth 18.0163 MHz

Occ BW % Pwr 99.00 % × dB -6.00 dB


Transmit Freq Error 97.926 kHz x dB Bandwidth 17.787 MHz







99% Bandwidth (CH Mid)

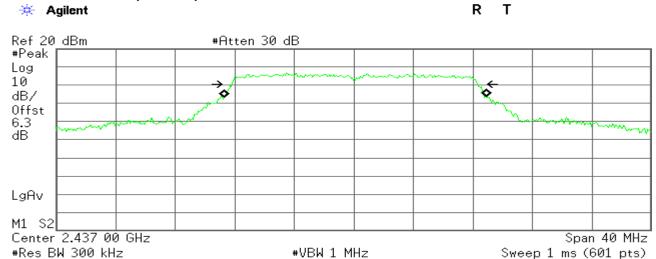


Occupied Bandwidth 17.6684 MHz

Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 72.866 kHz x dB Bandwidth 16.527 MHz

99% Bandwidth (CH High)

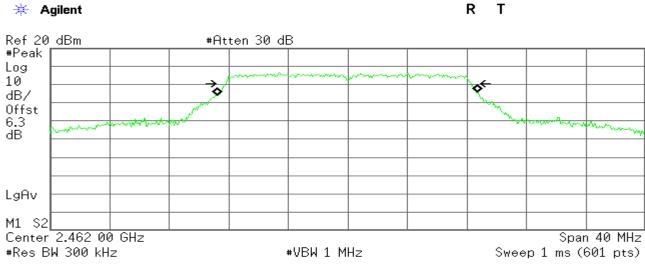

Occupied Bandwidth 17.5351 MHz

Осс В**W % Р**wr 99.00 % **х dB** -6.00 dB

Transmit Freq Error -5.268 kHz x dB Bandwidth 16.515 MHz








IEEE 802.11n20 MODE/Chain 0

99% Bandwidth (CH Low)




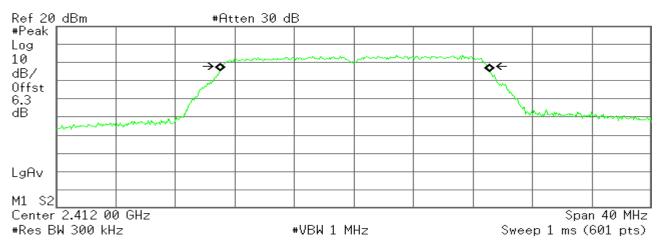

Occupied Bandwidth 18.1686 MHz Occ BW % Pwr 99.00 % × dB -6.00 dB


Transmit Freq Error 75.485 kHz x dB Bandwidth 17.775 MHz

99% Bandwidth (CH Mid)

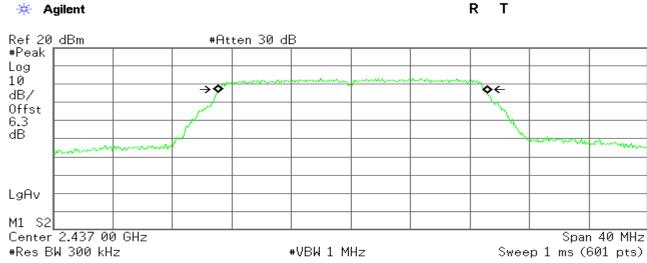

Occupied Bandwidth 18.1751 MHz Occ BW % Pwr 99.00 % × dB -6.00 dB


Transmit Freq Error 121.548 kHz x dB Bandwidth 17.757 MHz







99% Bandwidth (CH High)

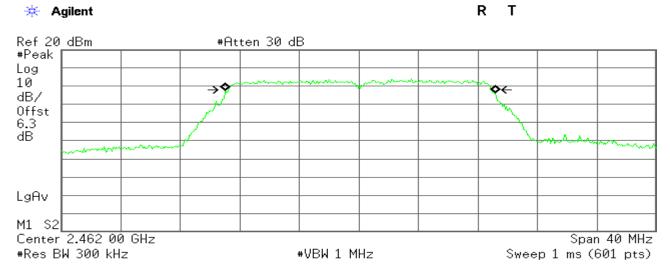


Occupied Bandwidth 18.1562 MHz 0cc BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 93.825 kHz x dB Bandwidth 17.738 MHz

IEEE 802.11n20 MODE/Chain 1

99% Bandwidth (CH Low)

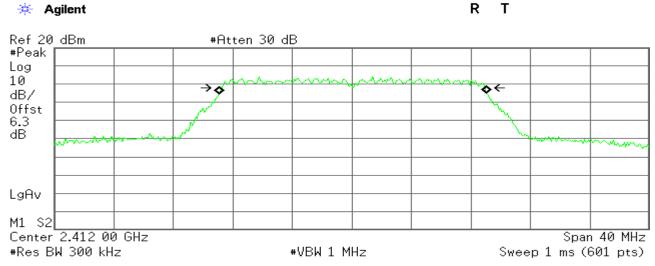

Occupied Bandwidth 18.0368 MHz

Occ BW % Pwr 99.00 % x dB -6.00 dB


Transmit Freq Error 73.631 kHz x dB Bandwidth 17.706 MHz








99% Bandwidth (CH Mid)

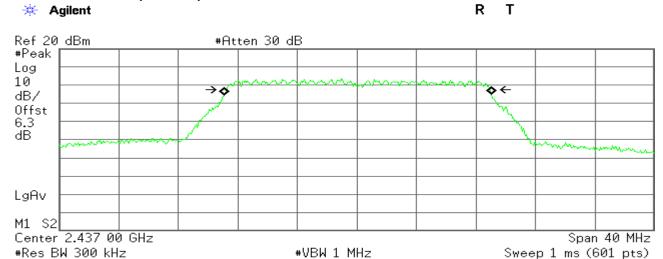

Occupied Bandwidth 17.9740 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB

Transmit Freq Error 67.531 kHz x dB Bandwidth 17.755 MHz

99% Bandwidth (CH High)

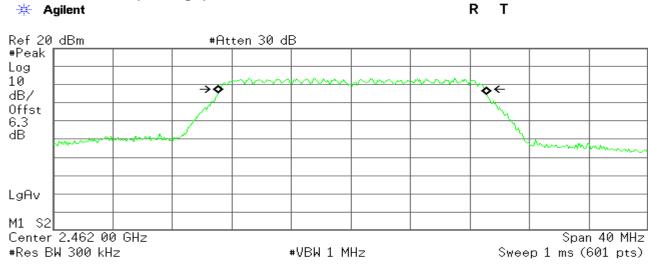

Occupied Bandwidth 18.0481 MHz Occ BW % Pwr 99.00 % + dB -6.00 dB

Transmit Freq Error 84.638 kHz x dB Bandwidth 17.777 MHz





7.3.PEAK POWER


LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz; 1 Watt.
- 2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
- 3. According to RSS-247 section 5.4, For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e)

Directional Gain=G_{ANT} + Array Gain=2.77dBi + 0dBi=2.77dBi <6dBi

Test Configuration



TEST PROCEDURE

- 1. The EUT transmitter output is connected to the Power meter. The Power meter is set to the peak power detection.
- 2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas. Guidance v04. 9.1.3 PKPM1 Peak-reading power meter method.

TEST RESULTS

No non-compliance noted





Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)		Chain 1 peak Output Power (dBm)	Limit (dBm)	Chain 0 peak e.i.r.p (dBm)	Chain 1 peak e.i.r.p (dBm)	Limit (dBm)
Low	2412	16.09	15.88	30.00	18.86	18.65	36.02
Mid	2437	15.52	16.26	30.00	18.29	19.03	36.02
High	2462	16.14	16.43	30.00	18.91	19.20	36.02

Channel	Frequency (MHz)	Chain 0 Average Output Power (dBm)	Chain 1 Average Output Power (dBm)	Chain 0 Average e.i.r.p (dBm)	Chain 1 Average e.i.r.p (dBm)
Low	2412	13.16	12.49	15.93	15.26
Mid	2437	12.62	12.58	15.39	15.35
High	2462	13.06	12.81	15.83	15.58

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	•	Chain 1 peak Output Power (dBm)	Limit (dBm)	Chain 0 peak e.i.r.p (dBm)	Chain 1 peak e.i.r.p (dBm)	Limit (dBm)
Low	2412	19.94	19.51	30.00	22.71	22.28	36.02
Mid	2437	19.65	19.75	30.00	22.42	22.52	36.02
High	2462	20.16	19.96	30.00	22.93	22.73	36.02

Channel	Frequency (MHz)	Chain 0 Average Output Power (dBm)	Chain 1 Average Output Power (dBm)	Chain 0 Average e.i.r.p (dBm)	Chain 1 Average e.i.r.p (dBm)
Low	2412	13.44	12.66	16.21	15.43
Mid	2437	12.95	12.86	15.72	15.63
High	2462	13.41	13.01	16.18	15.78

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Chain 0 peak Output Power (dBm)	Chain 1 peak Output Power (dBm)	Total peak Output Power (dBm)	Limit (dBm)	Total peak e.i.r.p (dBm)	Limit (dBm)
Low	2412	18.15	16.51	20.42	30.00	23.19	36.02
Mid	2437	18.13	16.00	20.20	30.00	22.97	36.02
High	2462	17.60	15.80	19.80	30.00	22.57	36.02

Channel	Frequency (MHz)	Chain 0 Average Output Power (dBm)	Chain 1 Average Output Power (dBm)	Total Average Output Power (dBm)	Total Average e.i.r.p (dBm)
Low	2412	10.83	9.24	13.12	15.89
Mid	2437	11.10	9.07	13.21	15.98
High	2462	10.21	8.65	12.51	15.28

Remark: 1.Total Output Power (dBm) = 10*LOG(10^(Chain 0 Output Power / 10)+10^(Chain 1 Output Power /10))

2. Duty factor has been offseted with cableloss






7.4.PEAK POWER SPECTRAL DENSITY

LIMIT

- 1.According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
- 2.According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.
- 3.According to RSS-247 section 5.2, The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Directional Gain=G_{ANT} + Array Gain=2.77 dBi+10log(2/1) dB =5.78dBi<6dBi

Test Configuration



TEST PROCEDURE

1.Place the EUT on the table and set it in transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

- 2.Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto
- 3.Record the max reading.
- 4.Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted





Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Limit (dBm)	Result
Low	2412	-6.06	-6.29	8.00	PASS
Mid	2437	-5.51	-6.87	8.00	PASS
High	2462	-5.91	-7.41	8.00	PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Limit (dBm)	Result
Low	2412	-9.69	-9.13	8.00	PASS
Mid	2437	-9.58	-8.40	8.00	PASS
High	2462	-9.02	-9.10	8.00	PASS

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-12.78	-14.02	-10.35	8.00	PASS
Mid	2437	-12.06	-14.04	-9.93	8.00	PASS
High	2462	-12.83	-14.20	-10.45	8.00	PASS

Remark: 1. Total PPSD(dBm) = 10*LOG(10^(Chain 0 PPSD/10)+10^(Chain 1 PPSD/10))







Test Plot

IEEE 802.11b mode/Chain 0

PPSD (CH Low)

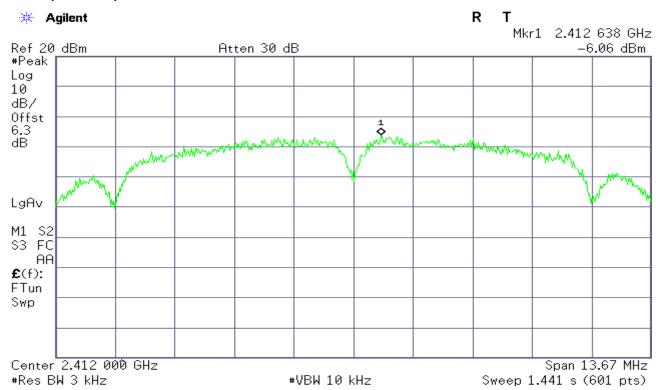

PPSD(CH Mid)

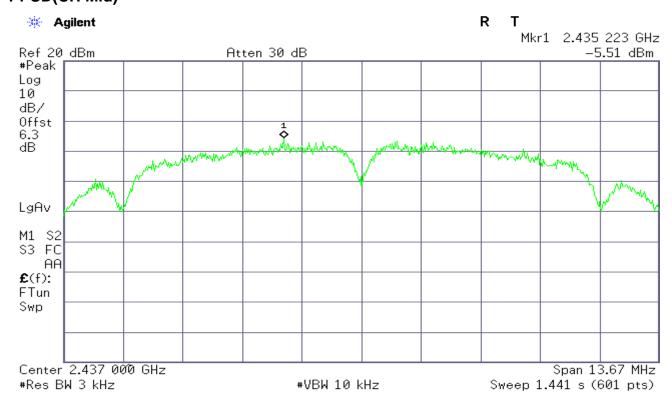








PPSD (CH High)



IEEE 802.11b mode/Chain 1

PPSD (CH Low)

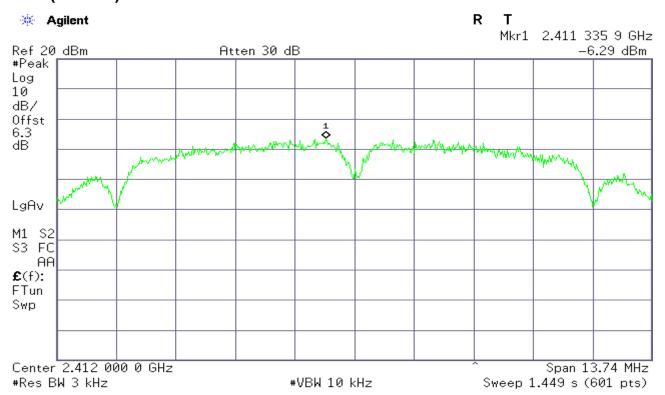








PPSD(CH Mid)



PPSD (CH High)

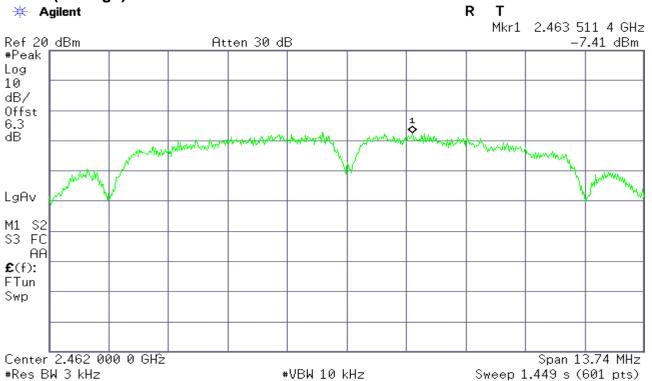








IEEE 802.11g mode/Chain 0

PPSD (CH Low)

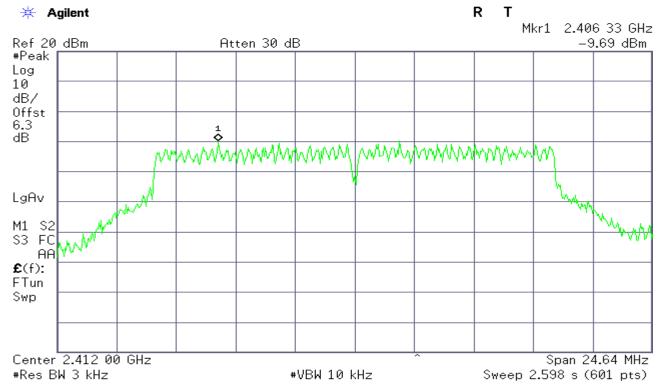

PPSD (CH Mid)

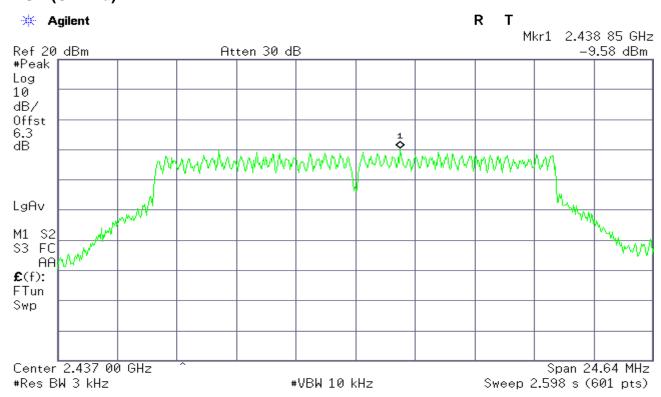










PPSD (CH High)

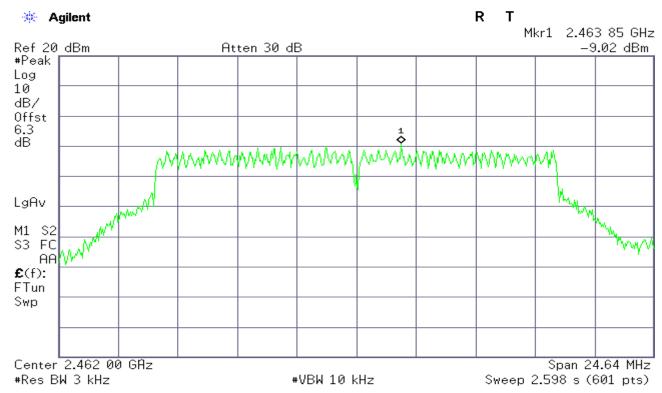

IEEE 802.11g mode/Chain 1

PPSD (CH Low)

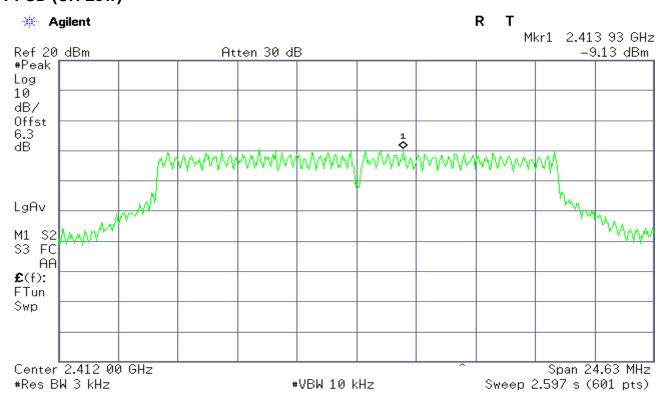









PPSD (CH Mid)

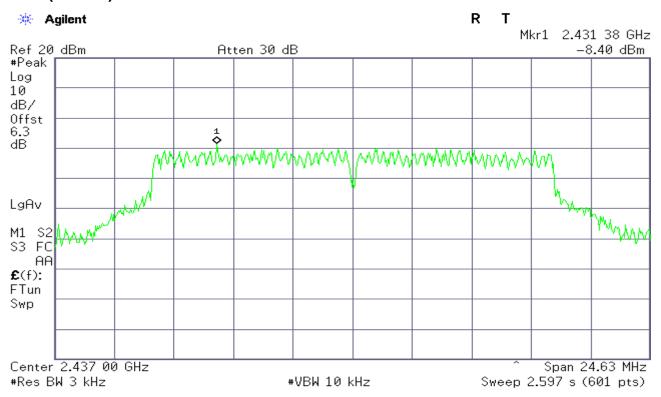

PPSD (CH High)

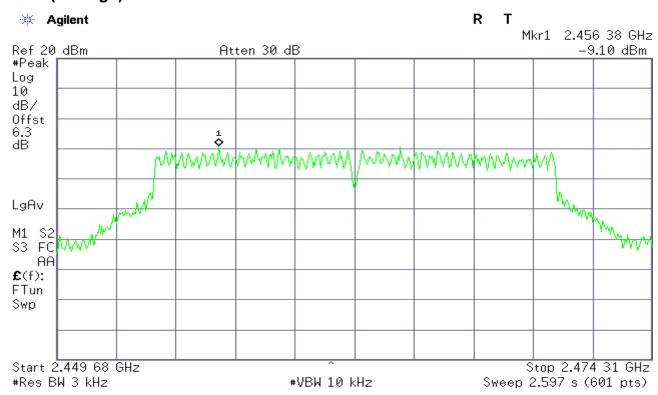








IEEE 802.11n HT20 mode/Chain 0

PPSD (CH Low)

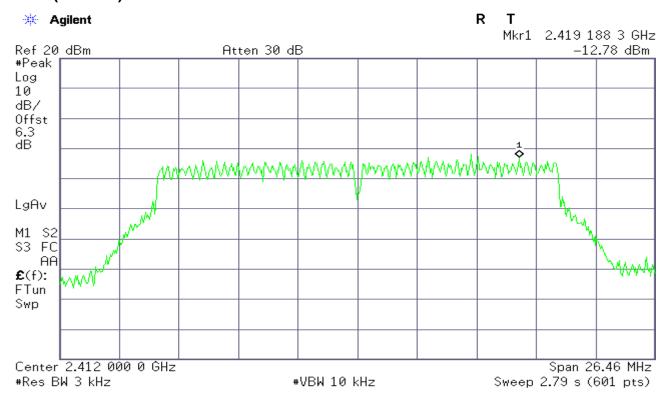

PPSD (CH Mid)

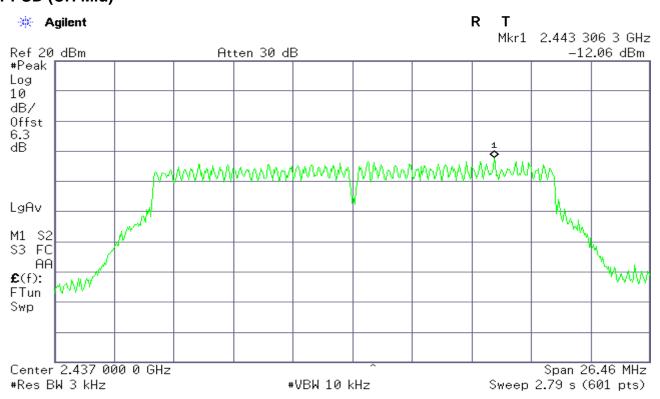










PPSD (CH High)

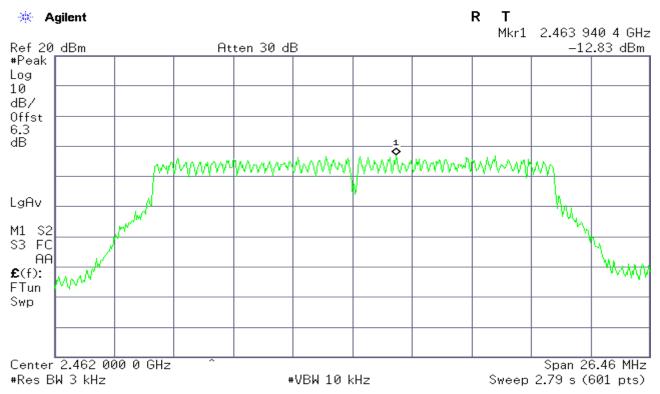

IEEE 802.11n HT20 mode/Chain 1

PPSD (CH Low)

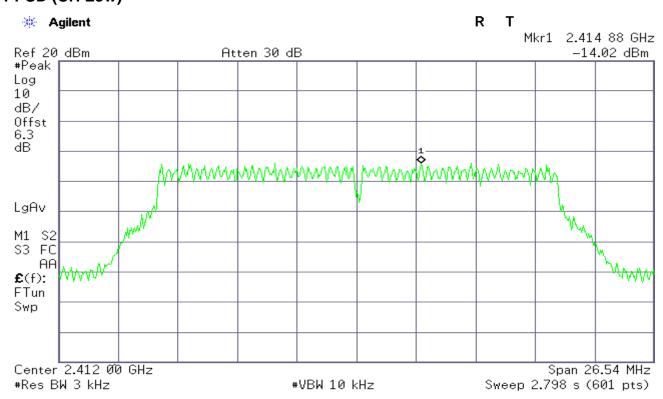









PPSD (CH Mid)

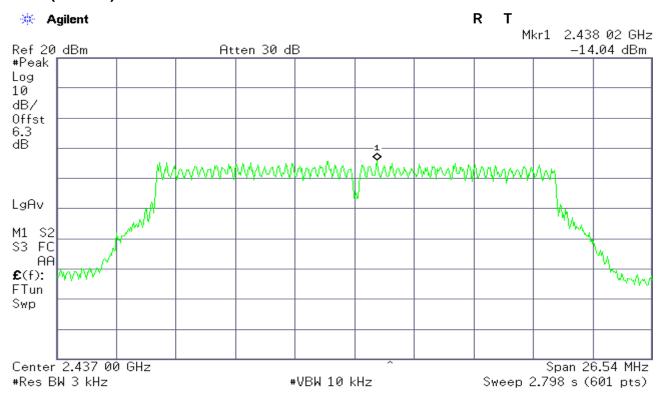

PPSD (CH High)

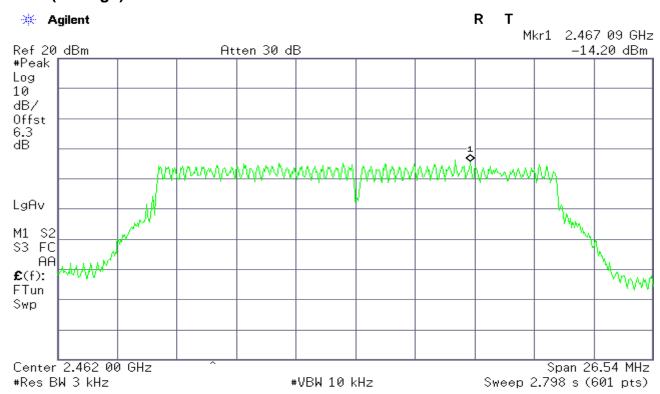





7.5.SPURIOUS EMISSIONS


Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

According to RSS-247 section 5.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted









Test Plot OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT IEEE 802.11b mode/Chain 0

CH Low

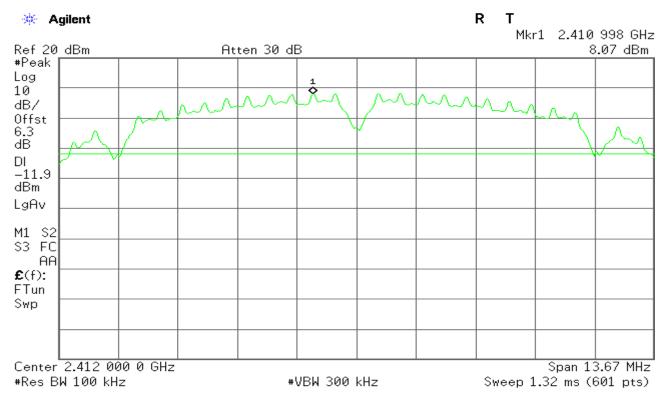


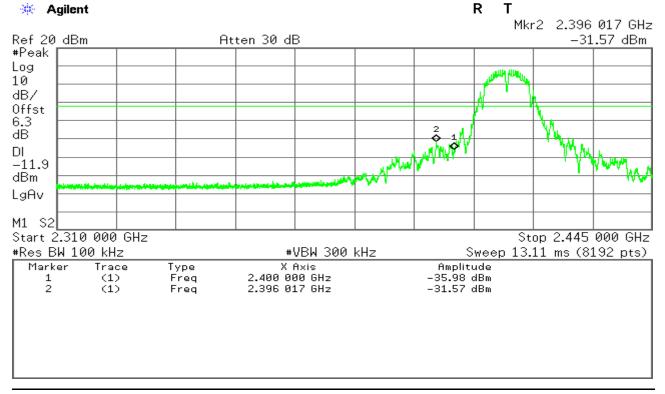









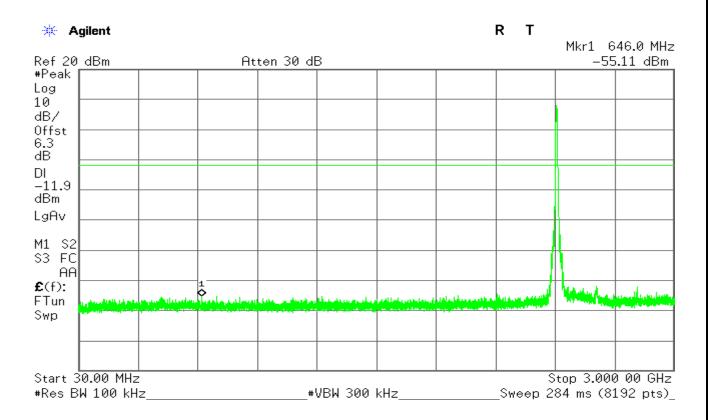

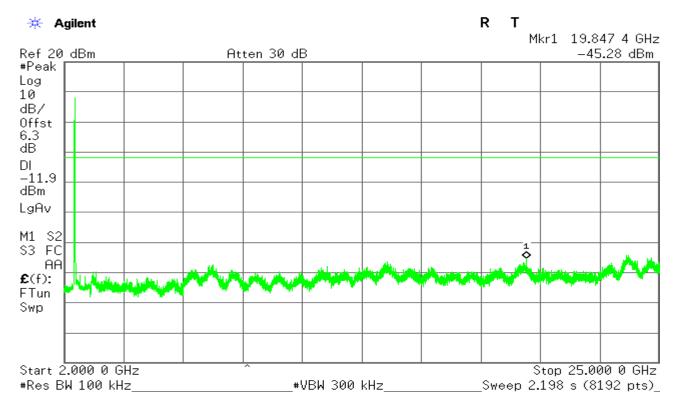










CH Mid

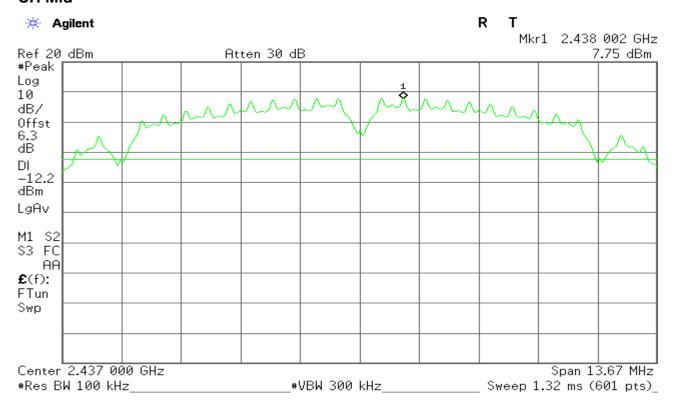


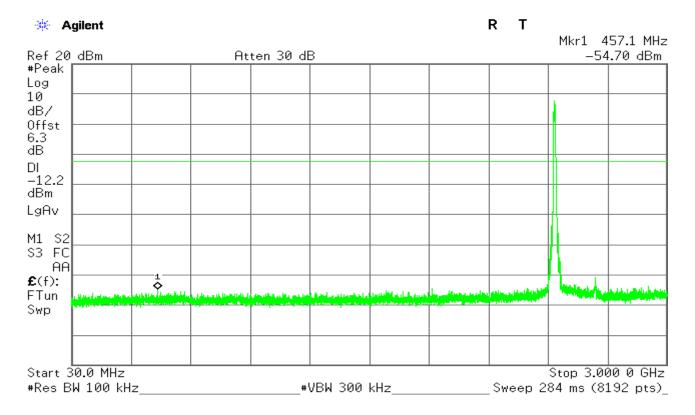








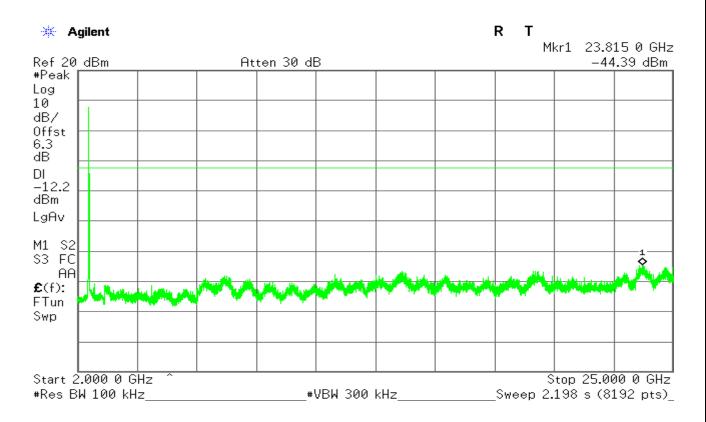


CH High

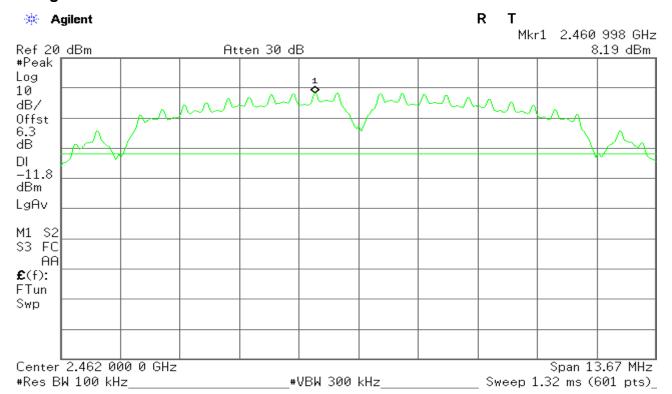








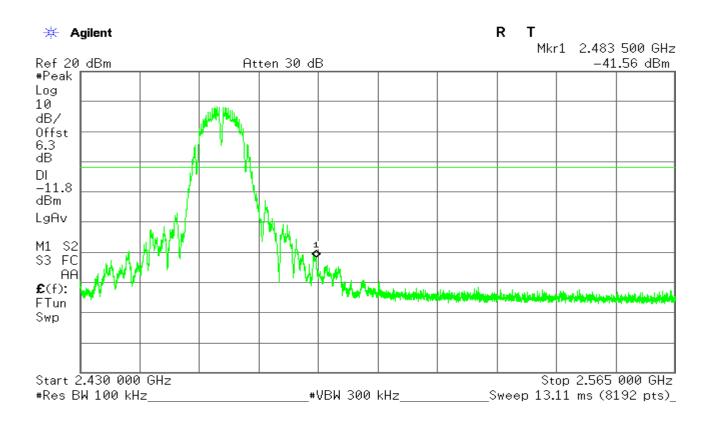


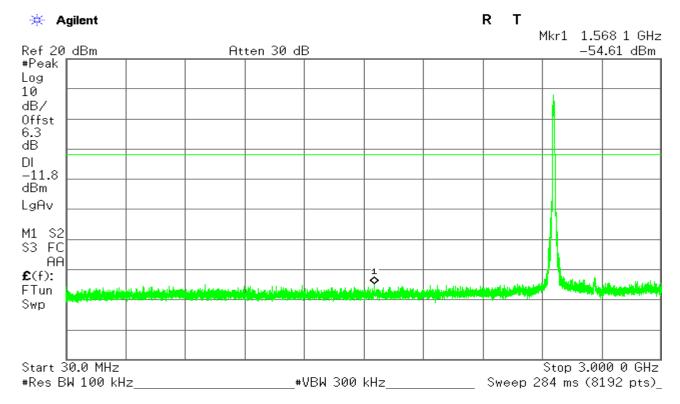








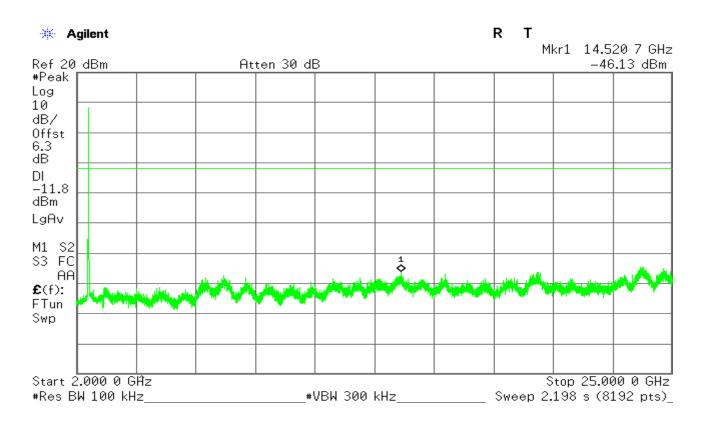

IEEE 802.11b mode/Chain 1


CH Low

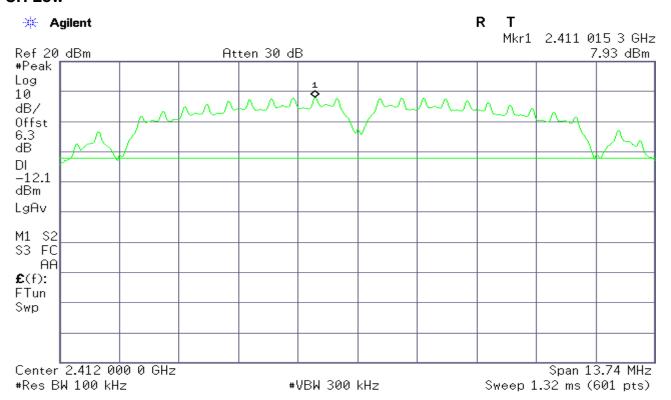






Report No.:C171023R02-RPW Page 61 of 111

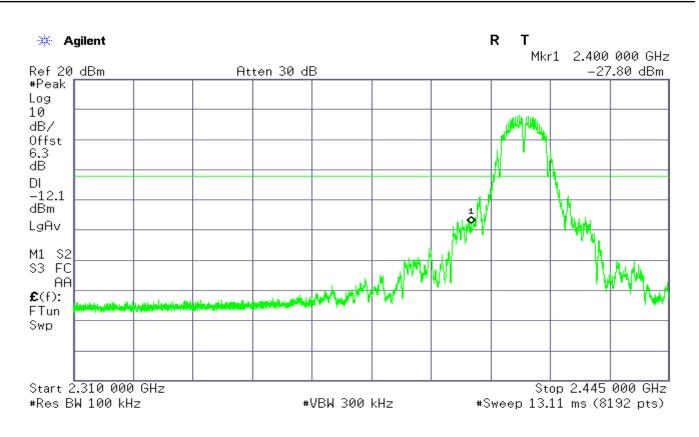


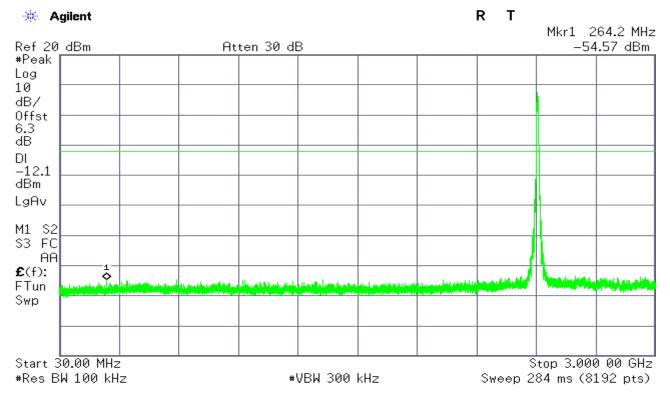








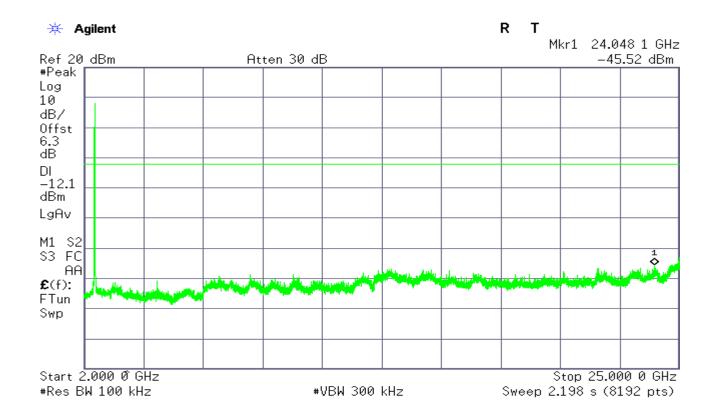


CH Mid

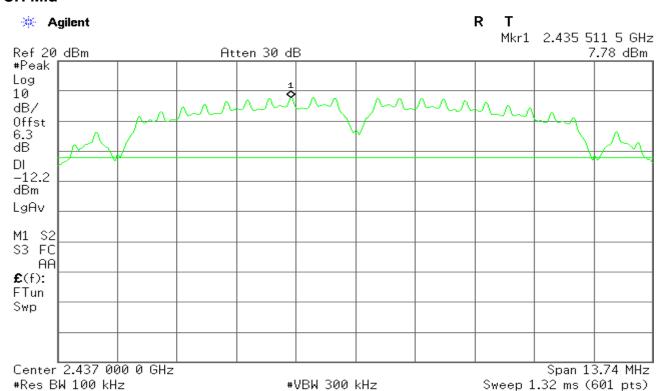








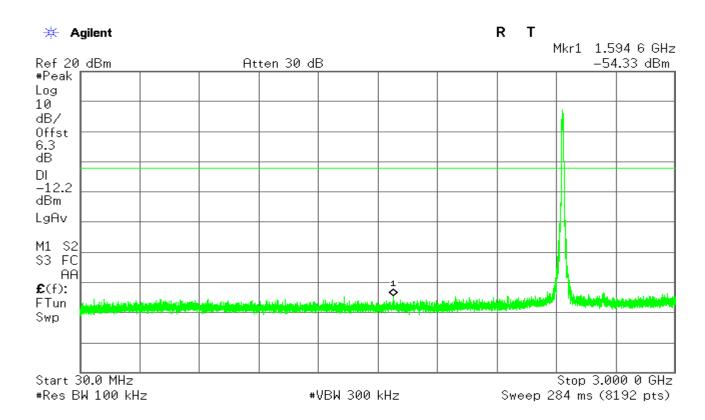

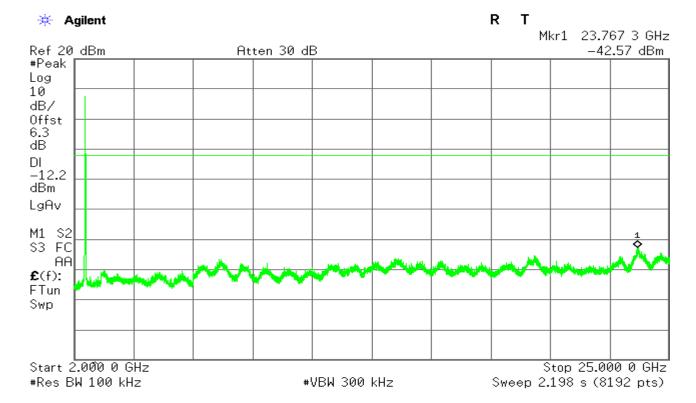










CH High

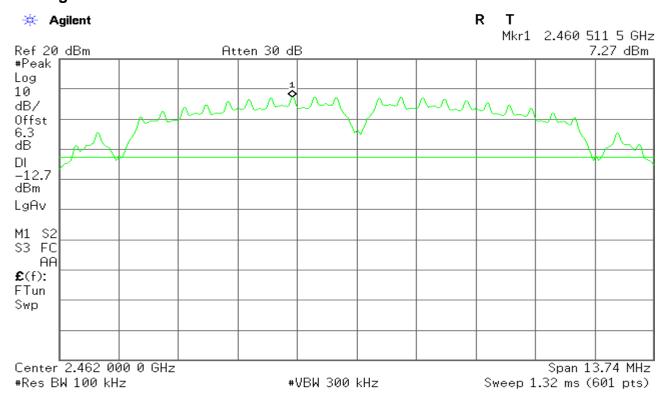


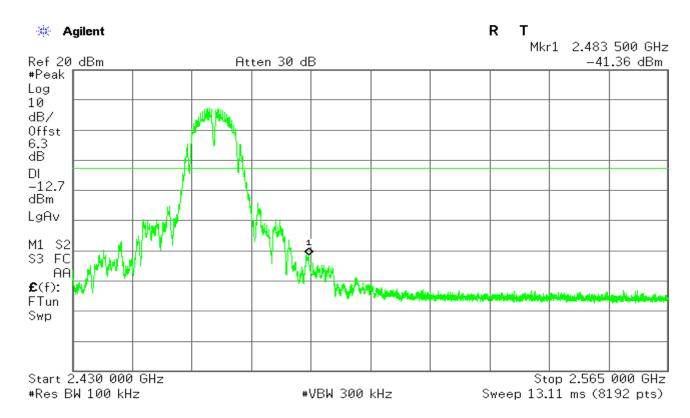








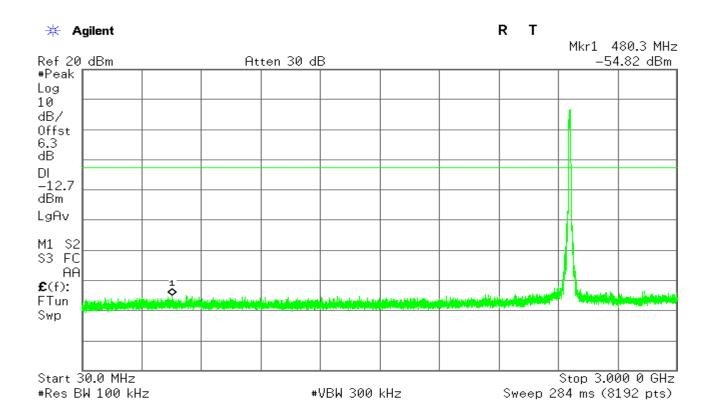

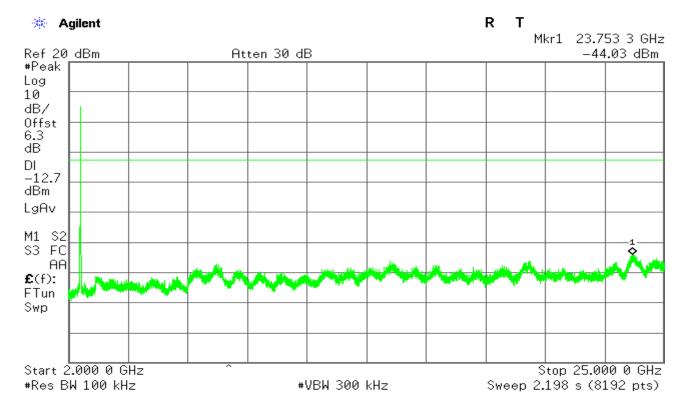








IEEE 802.11g mode/Chain 0

CH Low

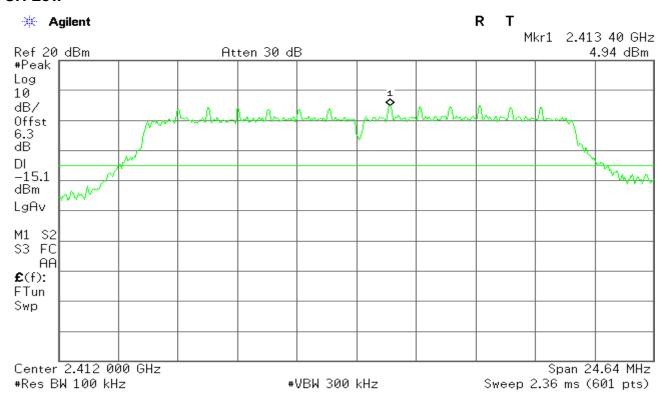


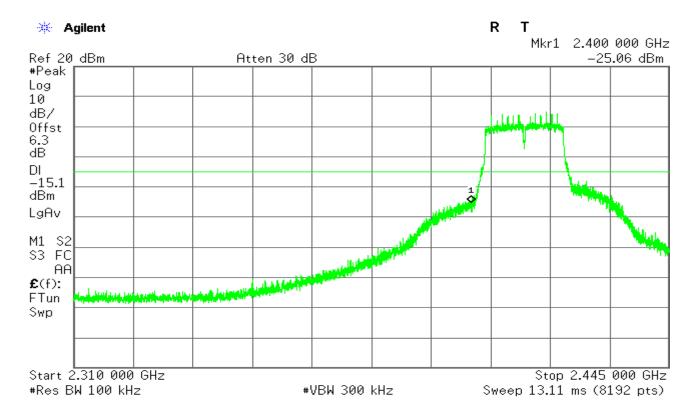








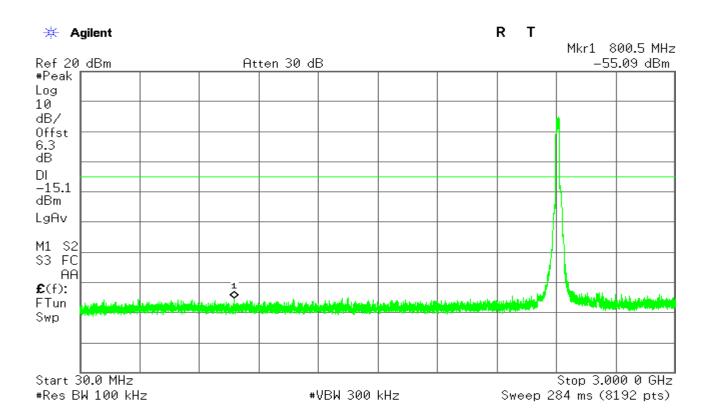

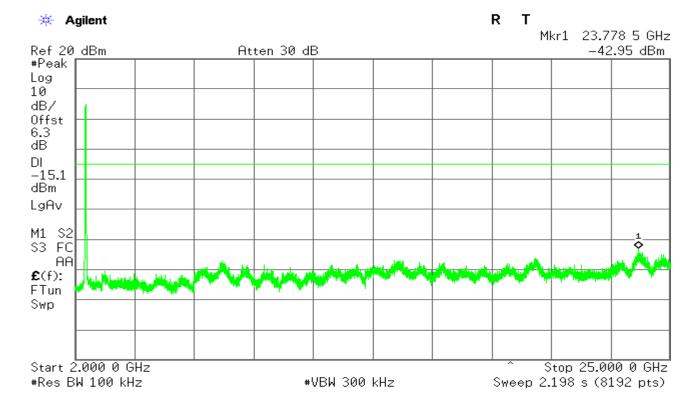










CH Mid

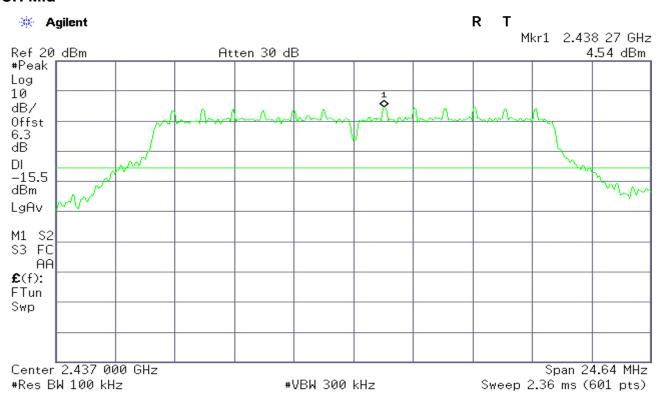


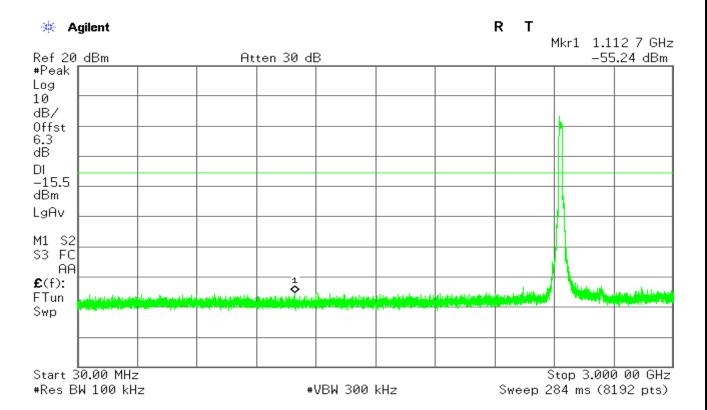








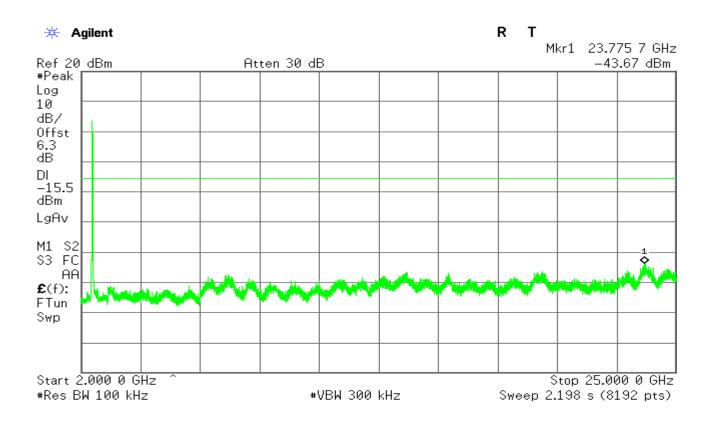


CH High

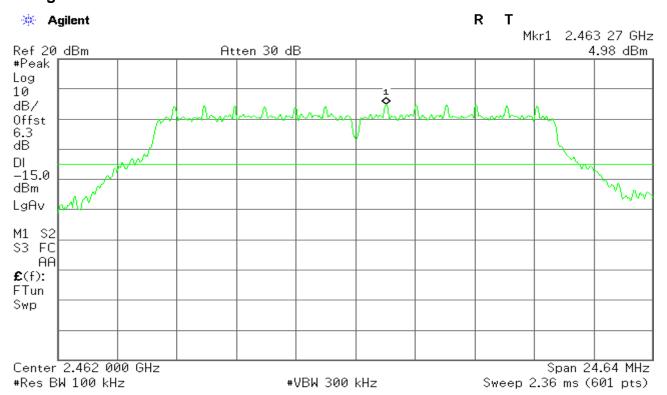









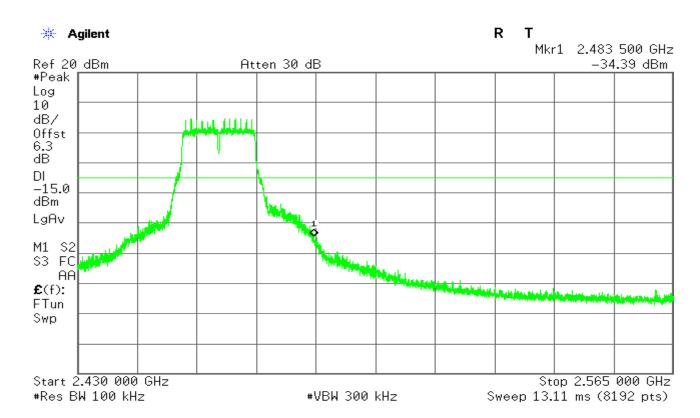

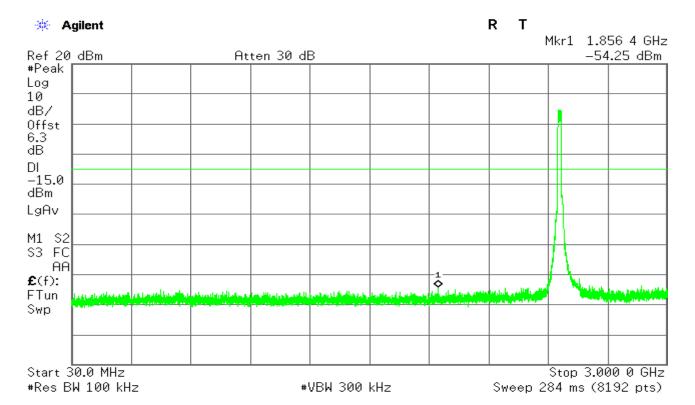





Report No.:C171023R02-RPW Page 71 of 111

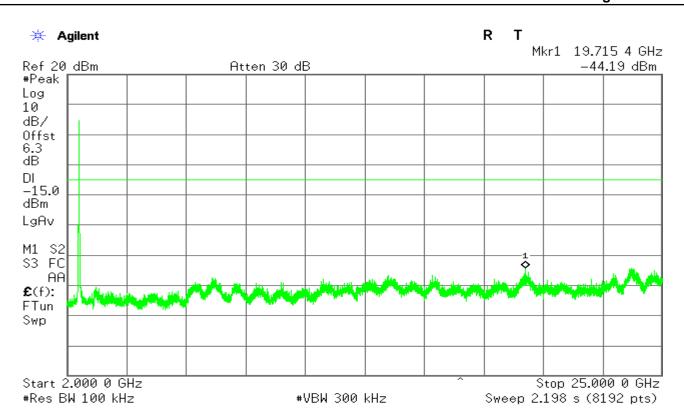

IEEE 802.11g mode/Chain 1


CH Low

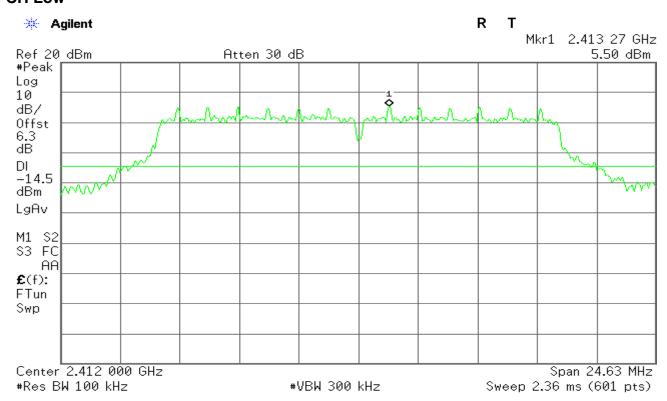








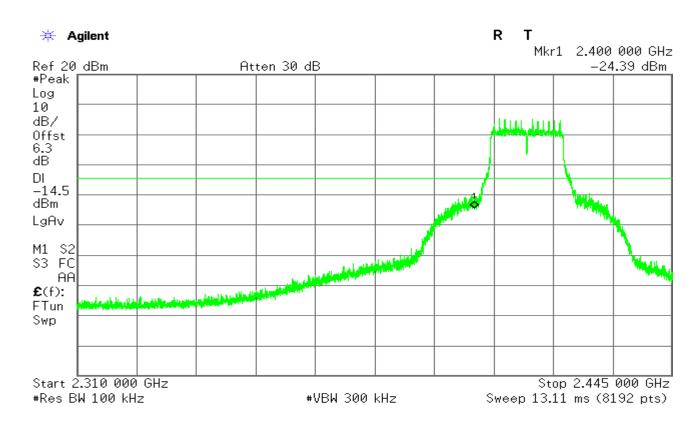


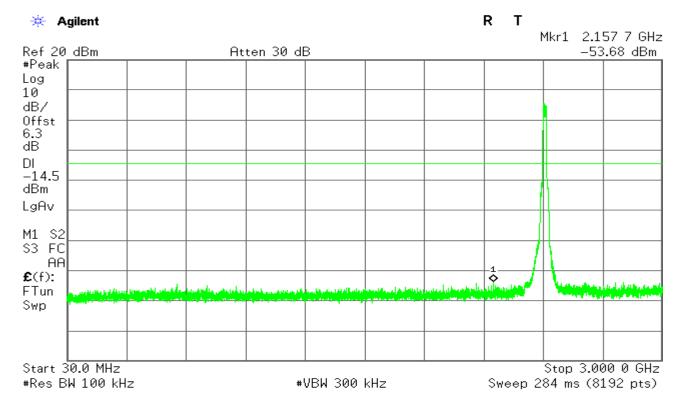








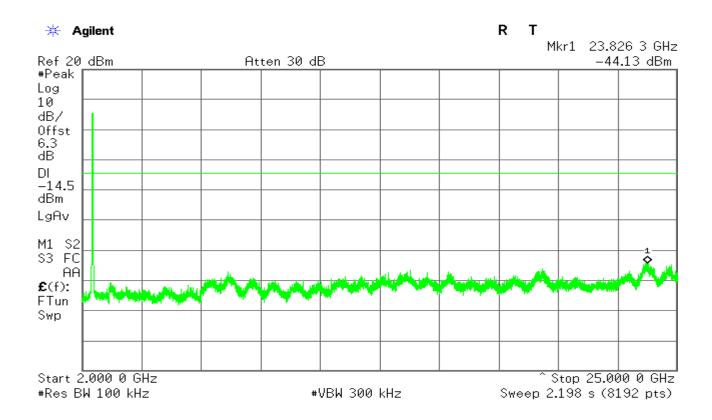


CH Mid

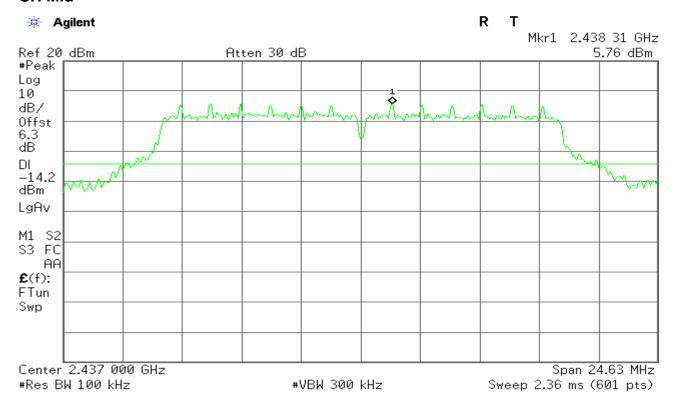








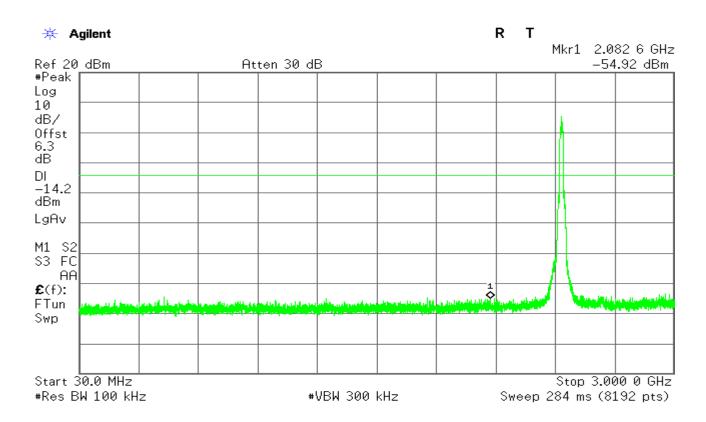

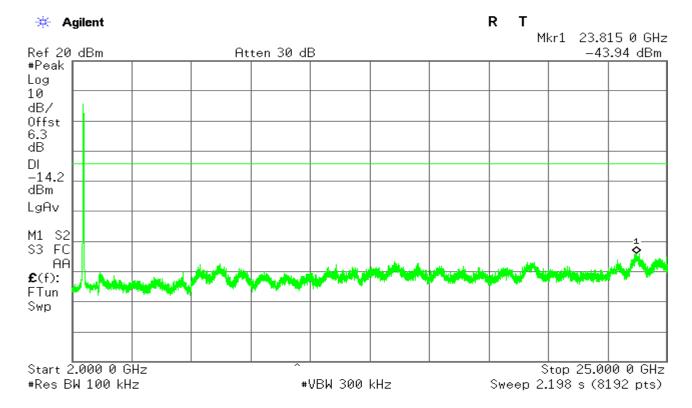










CH High

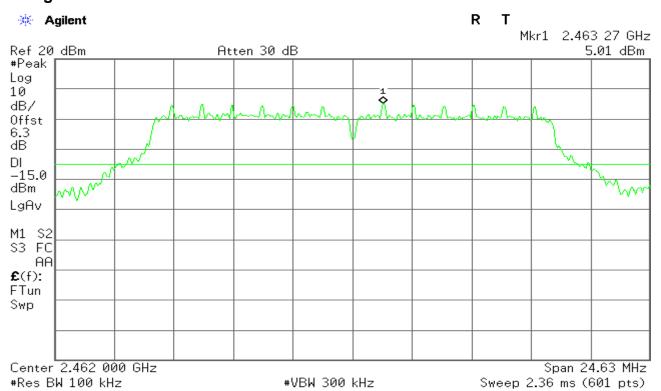


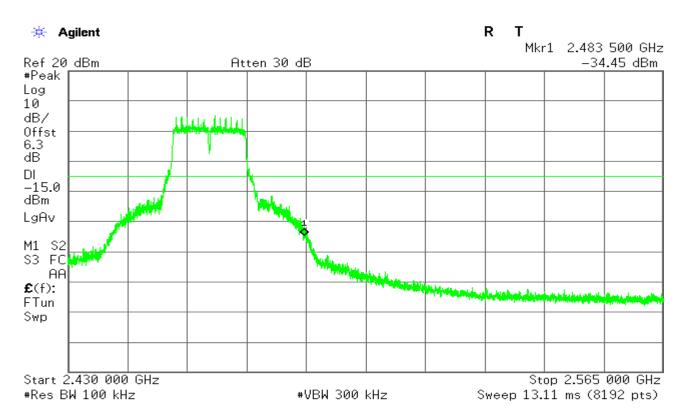








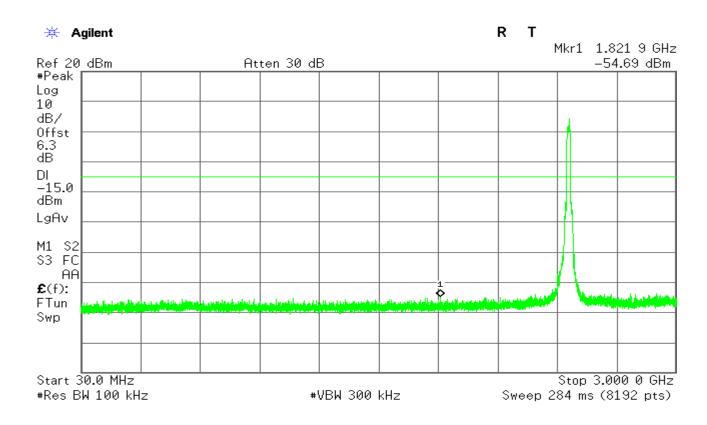

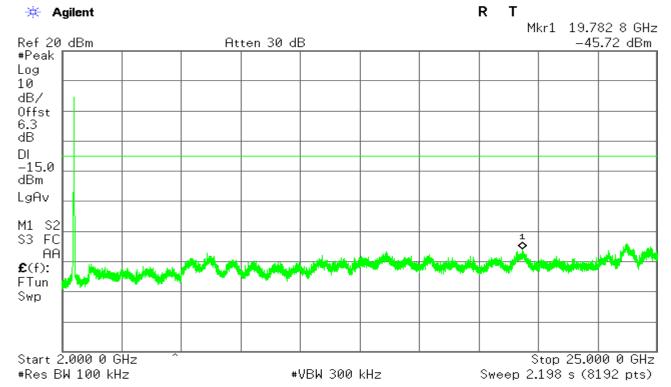







IEEE 802.11n HT20 mode/Chain 0


CH Low

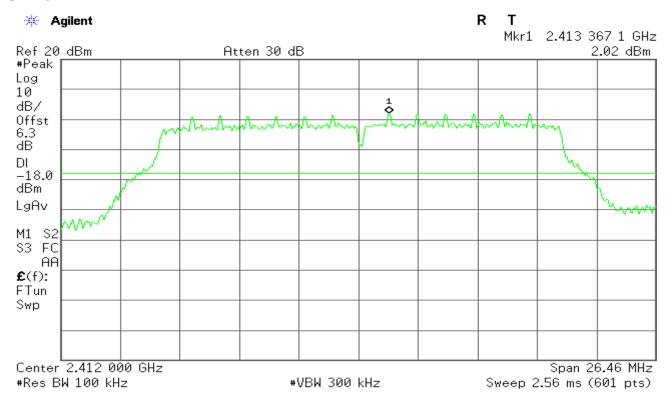


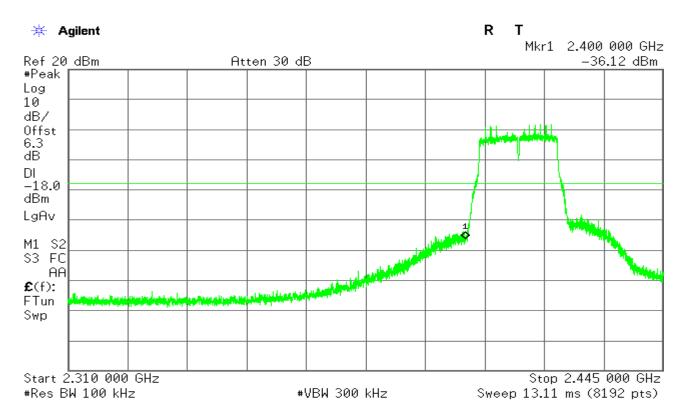





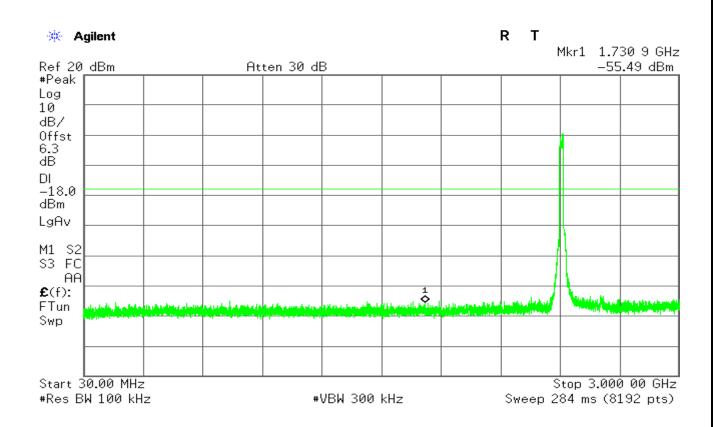

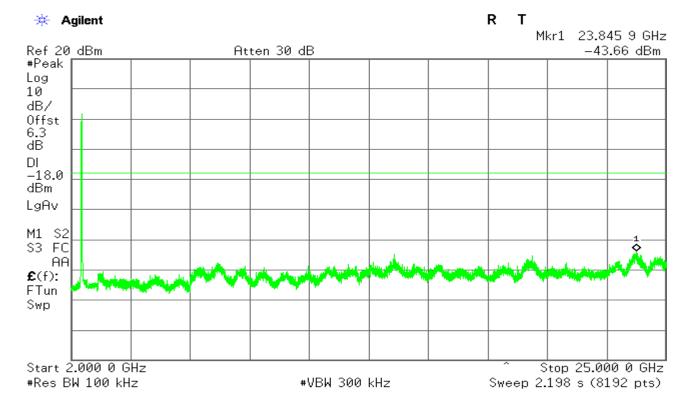









CH Mid

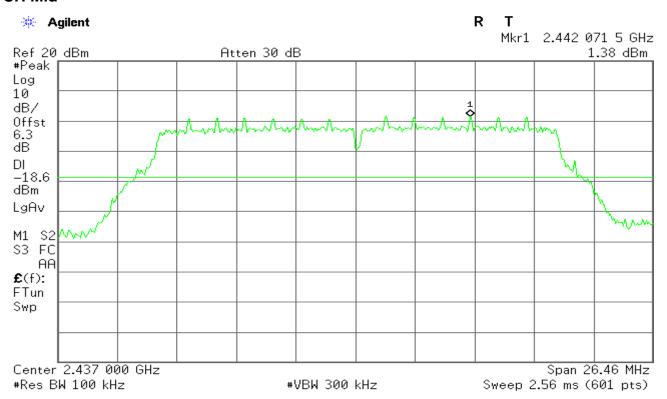


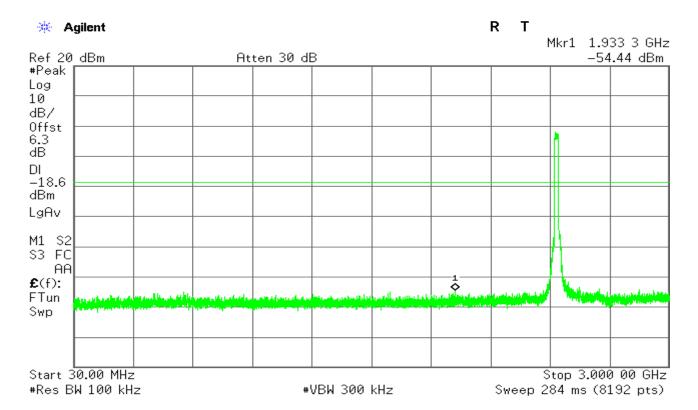








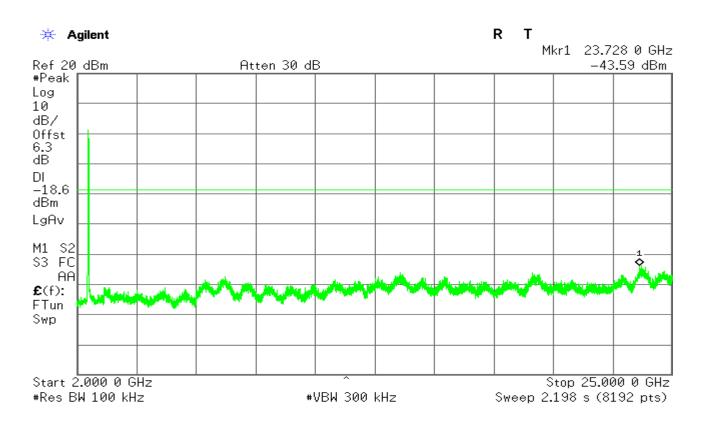


CH High

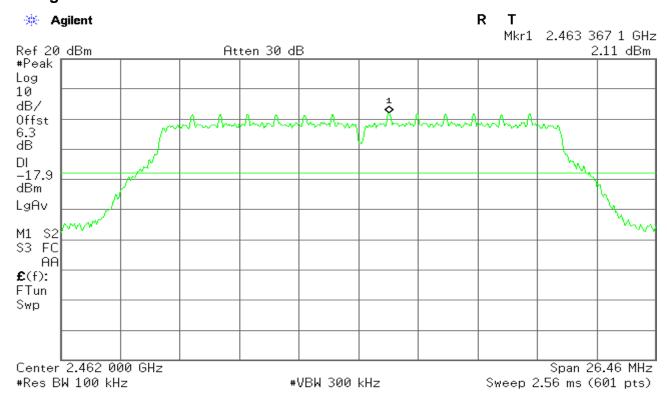









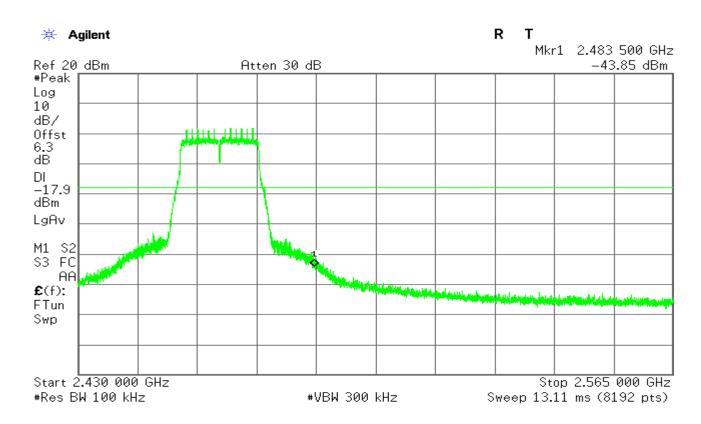


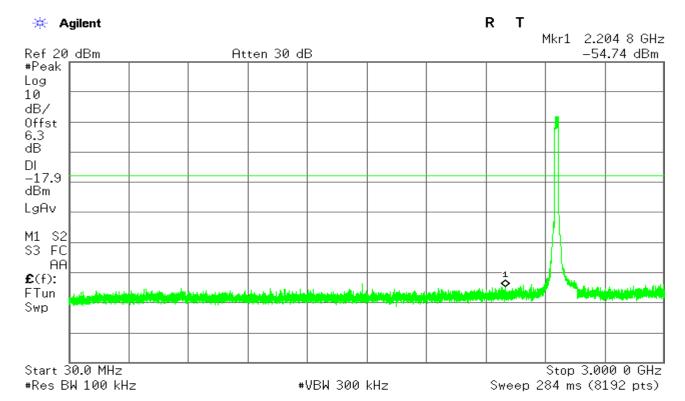









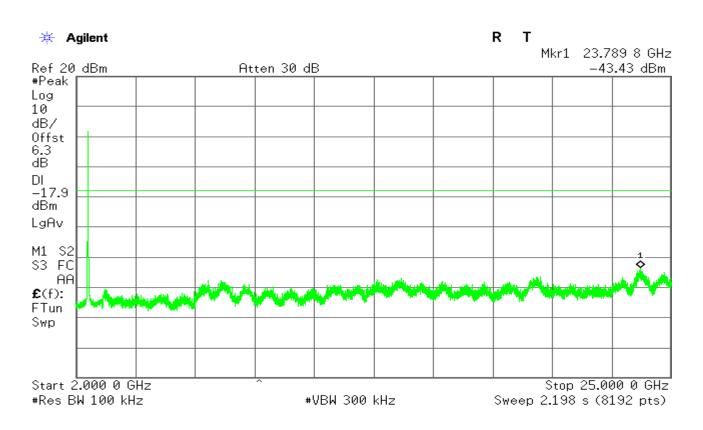

IEEE 802.11n HT20 mode/Chain 1


CH Low

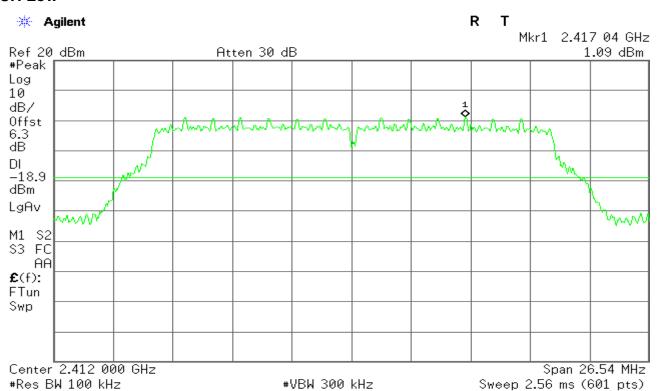








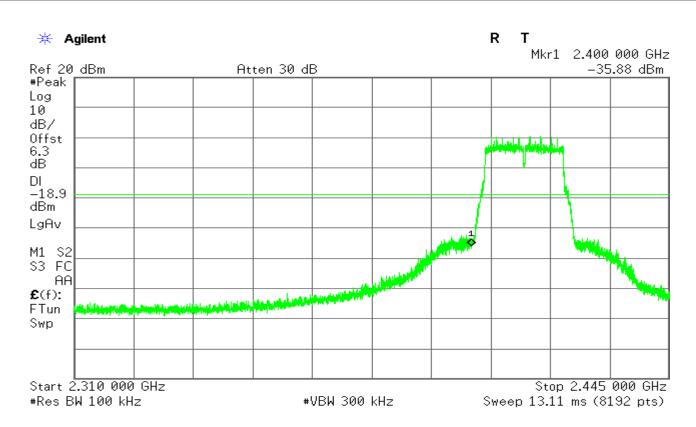


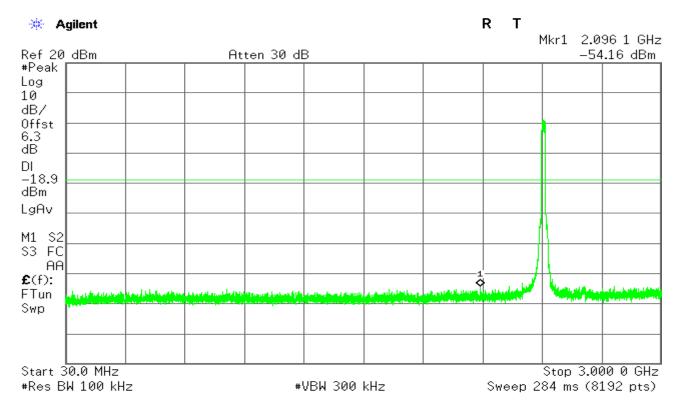








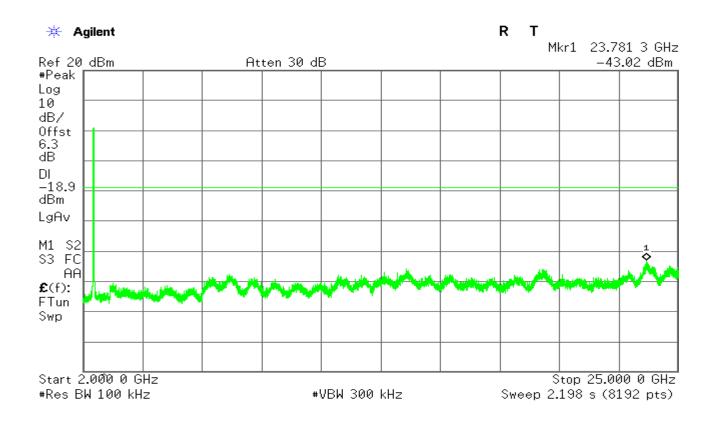


CH Mid

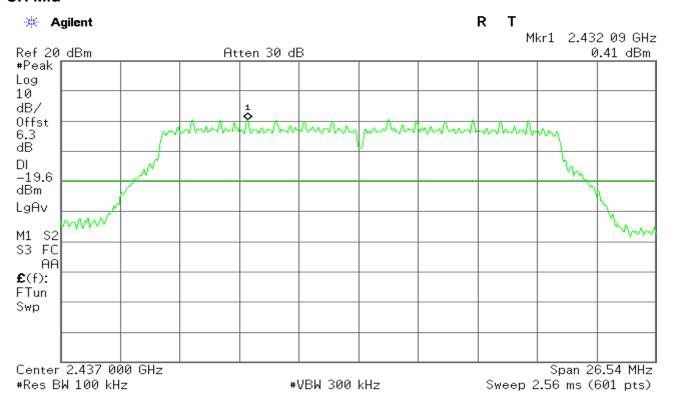








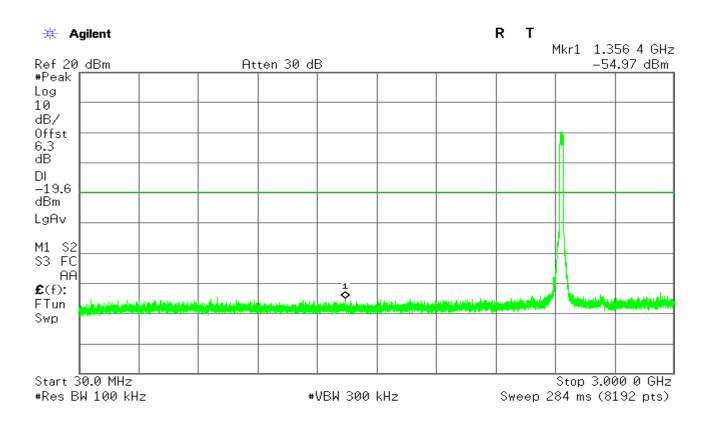

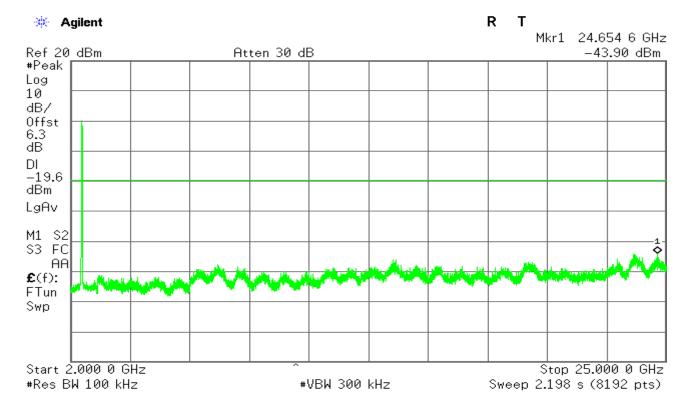










CH High

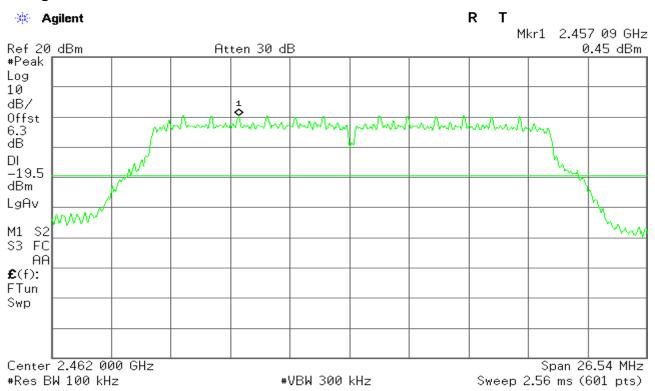


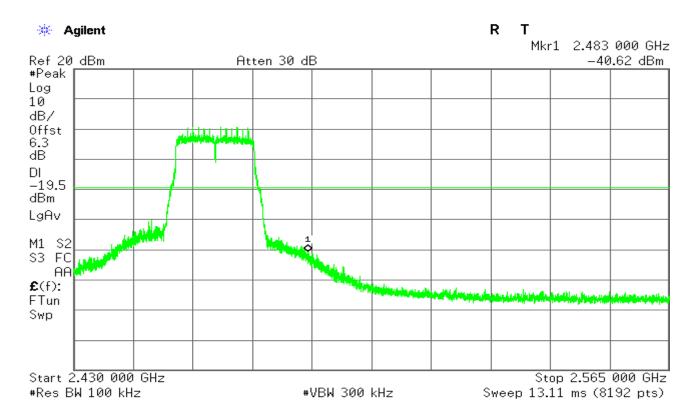








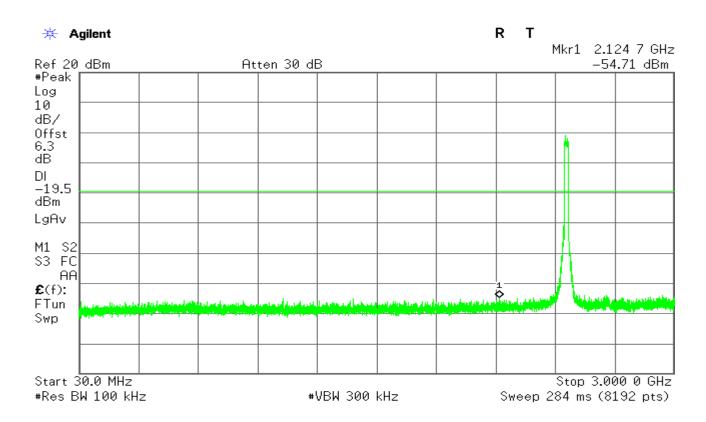

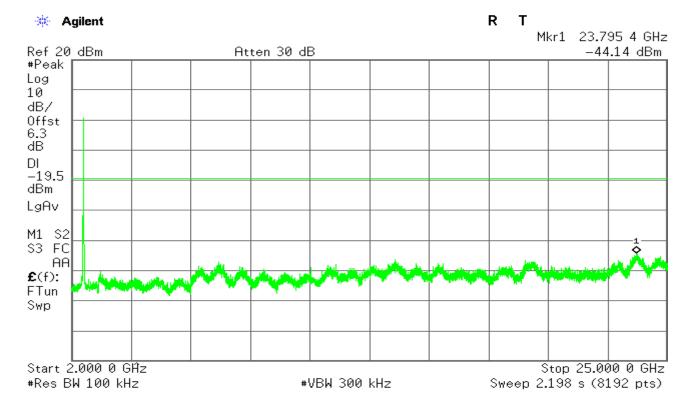





7.6. RADIATED EMISSIONS

LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions


1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2.In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54







3.According to RSS-Gen section 8.9, Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Frequency	Electric Field Strength (μV/m)	Magnetic Field Strength (H-Field) (μΑ/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1,705-30 MHz	30	N/A	30

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector. Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the relevant RSS. 2.In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μν/m at 3 metres)				
30-88	100				
88-216	150				
216-960	200				
Above 960*	500				

^{*} Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.


Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.






Test Configuration

Below 30MHz

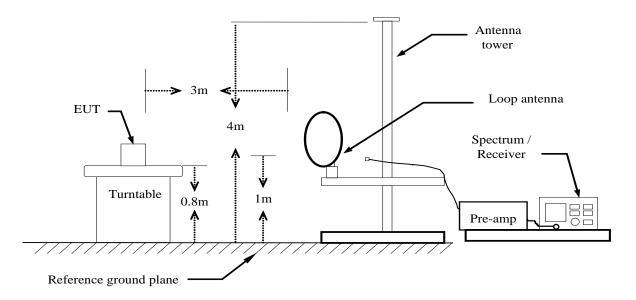


Below 1 GHz

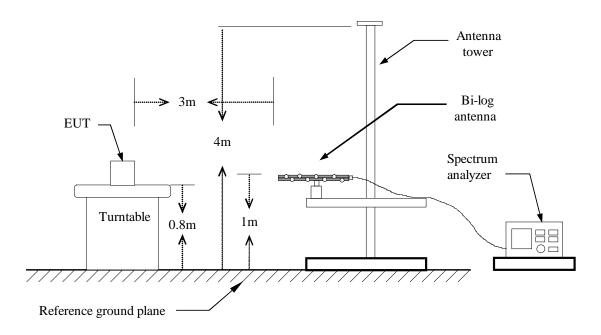





Above 1 GHz

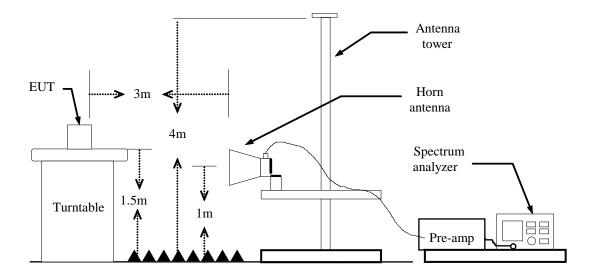

TEST PROCEDURE

- 1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

PEAK: RBW=VBW=1MHz / Sweep=AUTO AVERAGE: RBW=1MHz / Sweep=AUTO

VBW=10Hz, when duty cycle is no less than 98 percent.

VBW ≥ 1/T, when duty cycle is less than 98 percent, where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximun power control level for the tested mode of operation.


7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS






RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)

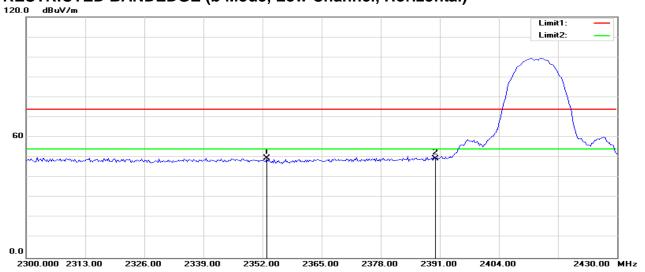

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2352.917	57.41	-7.70	49.71	74.00	-24.29	100	179	peak
2	2390.000	57.05	-7.57	49.48	74.00	-24.52	100	117	peak

RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)

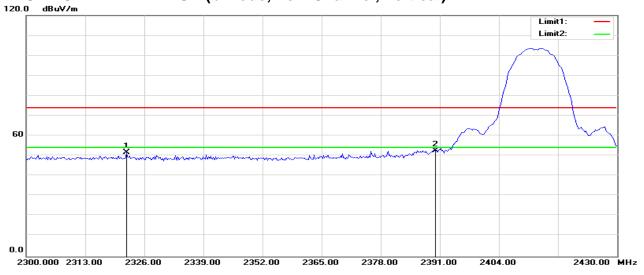


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2322.083	59.56	-7.80	51.76	74.00	-22.24	200	173	peak
2	2390.000	60.12	-7.57	52.55	74.00	-21.45	100	181	peak






RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)

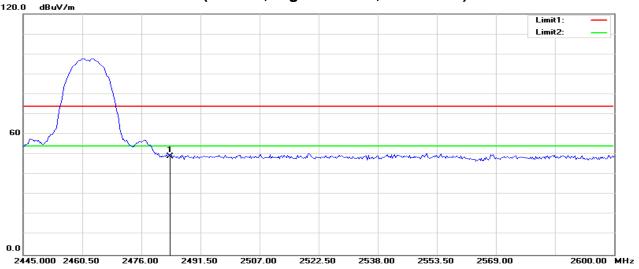

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	56.32	-7.26	49.06	74.00	-24.94	100	136	peak

RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)

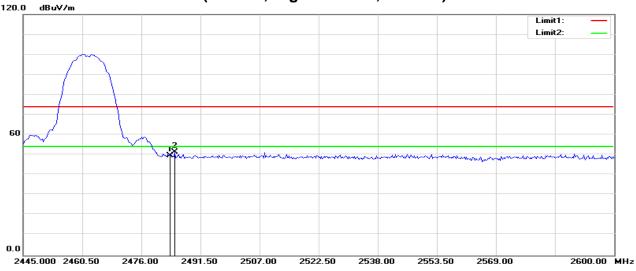


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	56.82	-7.26	49.56	74.00	-24.44	100	207	peak
2	2484.744	58.81	-7.26	51.55	74.00	-22.45	100	195	peak






RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)

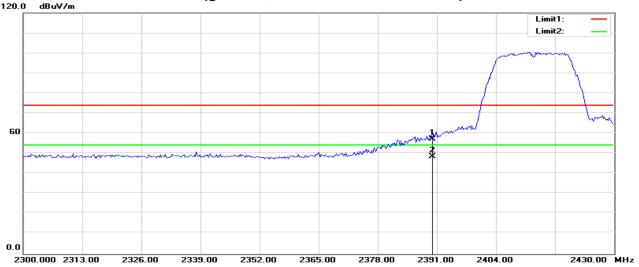

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	64.82	-7.57	57.25	74.00	-16.75	100	128	peak
2	2390.000	56.15	-7.57	48.58	54.00	-5.42	100	28	AVG


RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)

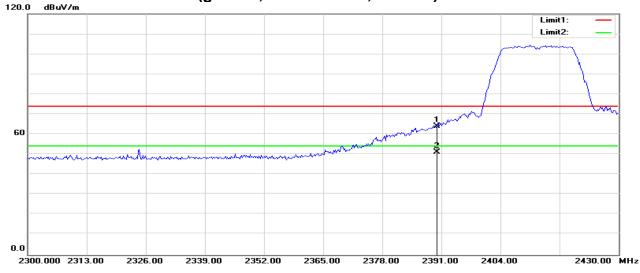

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	71.65	-7.57	64.08	74.00	-9.92	100	175	peak
2	2390.000	58.80	-7.57	51.23	54.00	-2.77	100	172	AVG






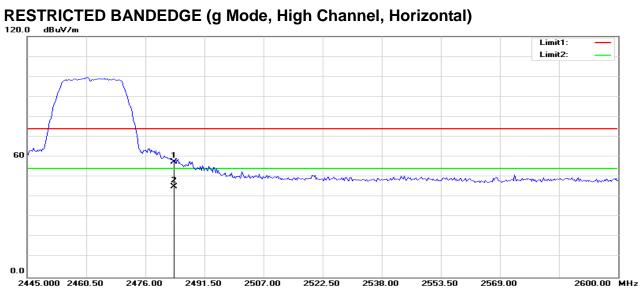

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	64.61	-7.26	57.35	74.00	-16.65	100	110	peak
2	2483.500	52.44	-7.26	45.18	54.00	-8.82	100	166	AVG

RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)

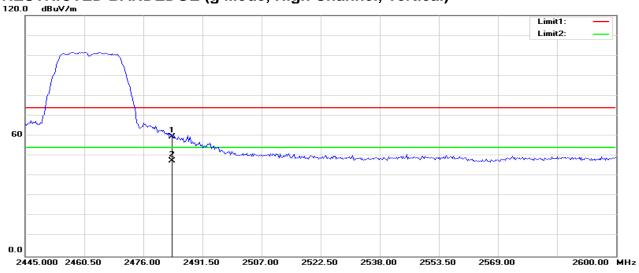


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	66.93	-7.26	59.67	74.00	-14.33	100	177	peak
2	2483.500	54.88	-7.26	47.62	54.00	-6.38	100	171	AVG






RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Horizontal)

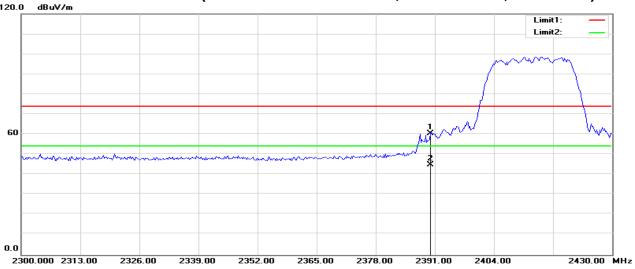

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	67.90	-7.57	60.33	74.00	-13.67	100	349	peak
2	2390.000	52.44	-7.57	44.87	54.00	-9.13	100	350	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Vertical)

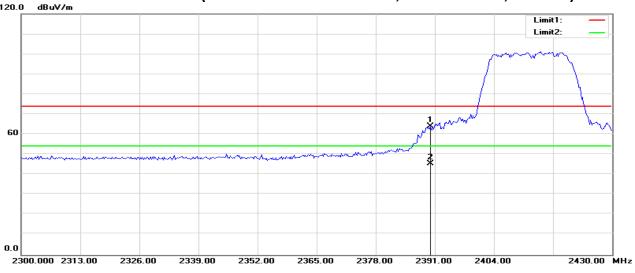


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2390.000	71.58	-7.57	64.01	74.00	-9.99	100	201	peak
2	2390.000	52.96	-7.57	45.39	54.00	-8.61	100	204	AVG






RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Horizontal)

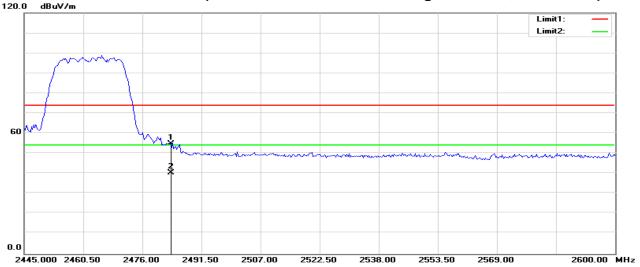

N o.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	61.87	-7.26	54.61	74.00	-19.39	100	127	peak
2	2483.500	47.71	-7.26	40.45	54.00	-13.55	100	159	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Vertical)

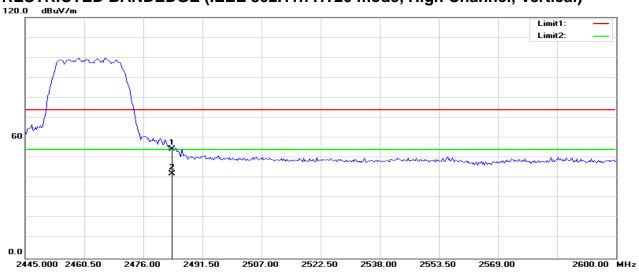

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	61.79	-7.26	54.53	74.00	-19.47	100	193	peak
2	2483.500	49.47	-7.26	42.21	54.00	-11.79	100	191	AVG






Test Result of Radiated Emission

Below 30MHz and above 18GHz. The measured value have enough margin over 20dB than the limit, therefore they are not reported.

30MHz-1GHz

Operation Mode:	Normal Link	Test Date:	2018-3-19
Temperature:	25°C	Tested by:	Lily.Wang
Humidity:	48% RH	Polarity:	Hor.

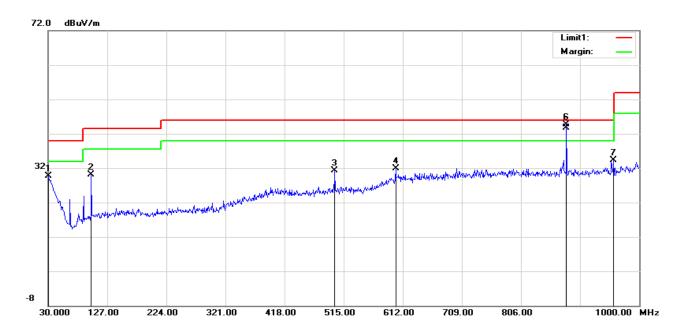


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	30.9700	6.25	23.45	29.70	40.00	-10.30	100	340	peak
2	100.8100	16.63	13.54	30.17	43.50	-13.33	100	142	peak
3	500.4500	9.59	21.80	31.39	46.00	-14.61	100	227	peak
4	600.3600	7.28	24.67	31.95	46.00	-14.05	100	111	peak
5	879.8980	17.31	26.35	43.66	46.00	-2.34	100	237	QP
6	880.6900	18.41	26.35	44.76	46.00	-1.24	100	326	peak
7	958.2900	7.36	26.86	34.22	46.00	-11.78	100	325	peak





Operation Mode:	Normal Link	Test Date:	2018-3-19
Temperature:	25°C	Tested by:	Lily.Wang
Humidity:	48% RH	Polarity:	Ver.

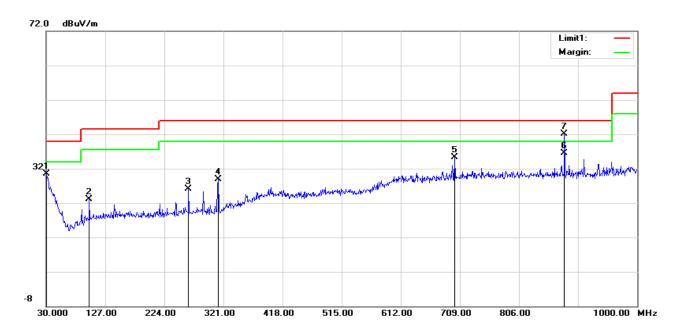

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	30.9700	7.00	23.45	30.45	40.00	-9.55	100	87	peak
2	100.8100	9.58	13.54	23.12	43.50	-20.38	200	337	peak
3	263.7700	10.63	15.48	26.11	46.00	-19.89	100	48	peak
4	312.2700	12.36	16.62	28.98	46.00	-17.02	100	95	peak
5	700.2700	9.88	25.52	35.40	46.00	-10.60	100	48	peak
6	879.8630	10.10	26.35	36.45	46.00	-9.55	100	5	QP
7	880.6900	15.67	26.35	42.02	46.00	-3.98	100	56	peak

Remark:

- 1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MHz).
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 4. Margin (dB) = Result (dBuV/m) Limit (dBuV/m).






Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low **Test Date:** 2018-3-19


Temperature: 24°C **Tested by:** Lily.Wang

Humidity: 48 % RH **Polarity:** Ver. / Hor.

Horizontal

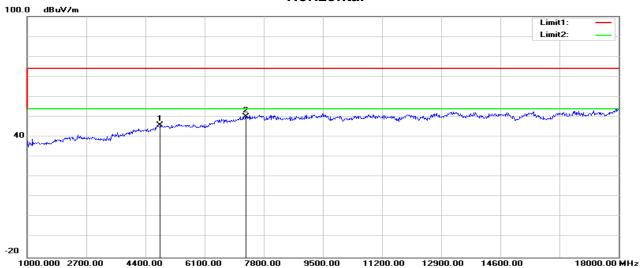

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4825.000	46.25	-0.28	45.97	74.00	-28.03	100	102	peak
2	7290.000	44.84	5.34	50.18	74.00	-23.82	100	161	peak

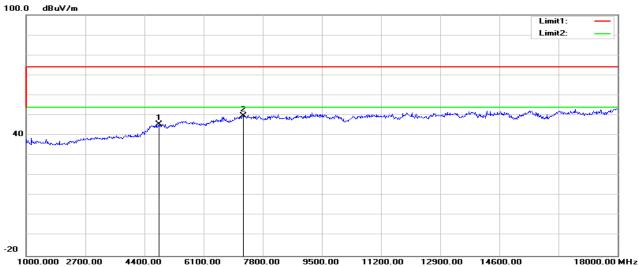

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4825.000	45.93	-0.28	45.65	74.00	-28.35	100	174	peak
2	7239.000	44.55	5.16	49.71	74.00	-24.29	100	283	peak





Report No.:C171023R02-RPW

Page 101 of 111

Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: 2018-3-19


Temperature: 24°C

Tested by: Lily.Wang


Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

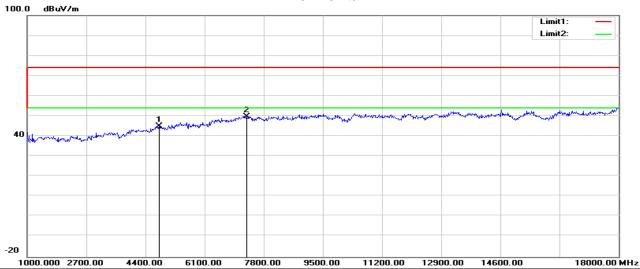

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4791.000	45.31	-0.41	44.90	74.00	-29.10	100	136	peak
2	7307.000	44.32	5.40	49.72	74.00	-24.28	100	33	peak

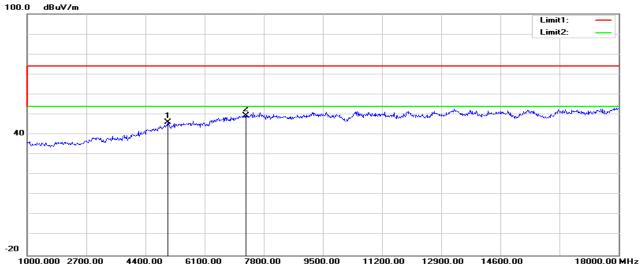

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5046.000	45.91	0.36	46.27	74.00	-27.73	100	0	peak
2	7290.000	44.17	5.34	49.51	74.00	-24.49	100	44	peak

Tested by:Lily.Wang






Operation TX / IEEE 802.11b / CH High Test Date: 2018-3-19


Mode: TA / IEEE 802.11B / CH Fight

Humidity: 48 % RH Polarity: Ver. / Hor.

Horizontal

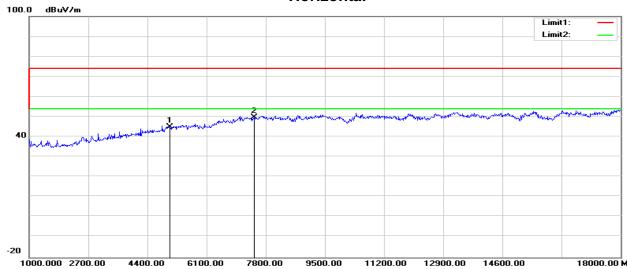

	1000.000 2700.00	7400.00	0100.00 1000.0	3300.00	11200.00	12300.00	14000.00	10000.	00 MIII2
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5046.000	44.55	0.36	44.91	74.00	-29.09	100	75	peak
2	7460.000	43.82	5.95	49.77	74.00	-24.23	100	15	peak

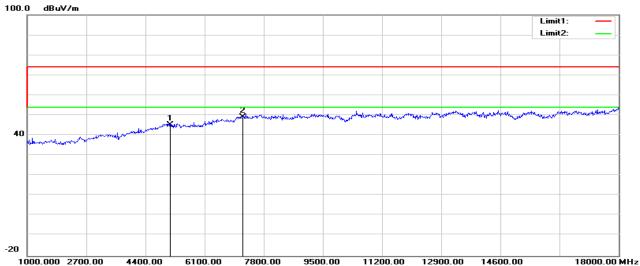

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5114.000	45.00	0.33	45.33	74.00	-28.67	100	143	peak
2	7205.000	44.13	5.04	49.17	74.00	-24.83	100	88	peak





Report No.:C171023R02-RPW

Page 103 of 111

Operation Mode:

TX / IEEE 802.11g / CH Low

iest i

Test Date: 2018-3-19


Temperature: 24°C

Tested by:Lily.Wang


Humidity: 48 % RH

Polarity: Ver. / Hor.


Horizontal

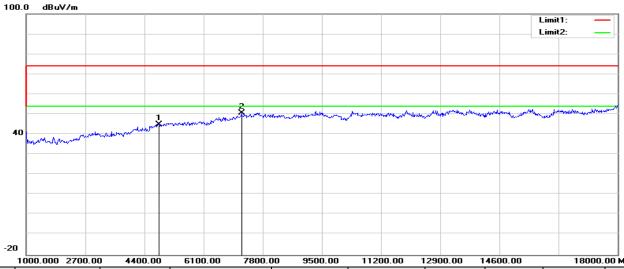

	1000.000 2100.00	7 4400.00	0100.00 1000.0	3000.00	11200.00	2000.00	1000.00	10000.	00 1-1112
No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4825.000	45.27	-0.28	44.99	74.00	-29.01	100	214	peak
2	7188.000	45.53	4.98	50.51	74.00	-23.49	100	235	peak

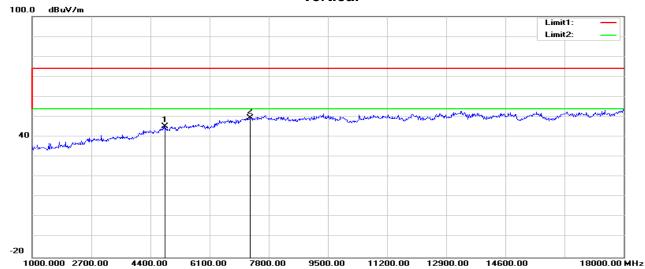

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4825.000	45.67	-0.28	45.39	74.00	-28.61	100	200	peak
2	7256.000	44.14	5.22	49.36	74.00	-24.64	100	170	peak







Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: 2018-3-19


Temperature: 24°C

Tested by: Lily.Wang


Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

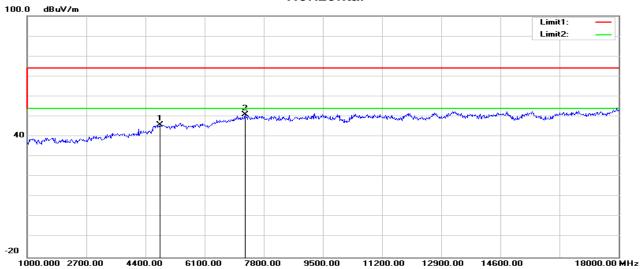

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4825.000	46.00	-0.28	45.72	74.00	-28.28	100	251	peak
2	7256.000	45.67	5.22	50.89	74.00	-23.11	100	62	peak

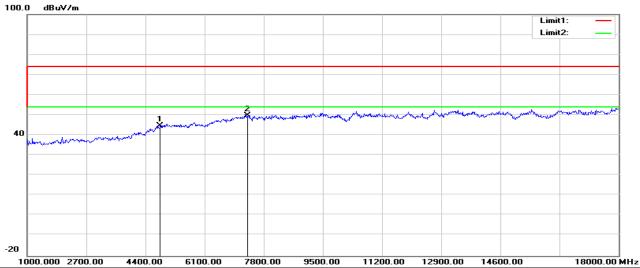

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4825.000	44.93	-0.28	44.65	74.00	-29.35	100	235	peak
2	7324.000	44.14	5.46	49.60	74.00	-24.40	100	313	peak







Operation Mode: TX / IEEE 802.11g / CH High

Temperature: 24°C


Humidity: 48 % RH

Test Date: 2018-3-19


Tested by: Lily.Wang

Polarity: Ver. / Hor.

Horizontal

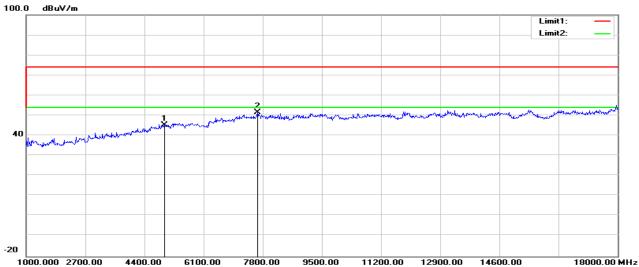

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4978.000	45.06	0.29	45.35	74.00	-28.65	100	92	peak
2	7647.000	45.48	6.00	51.48	74.00	-22.52	100	327	peak

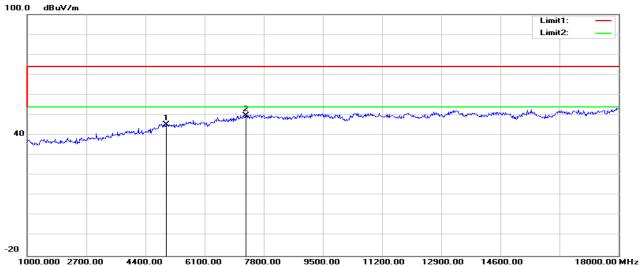

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4995.000	45.01	0.35	45.36	74.00	-28.64	100	226	peak
2	7290.000	44.37	5.34	49.71	74.00	-24.29	100	230	peak





Report No.:C171023R02-RPW

Page 106 of 111

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Low

Test Date: 2018-3-19


Temperature: 24°C

Tested by: Lily.Wang


Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

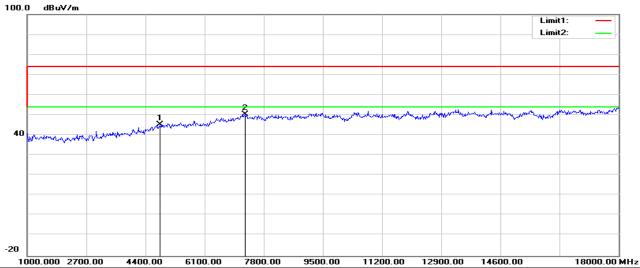

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4825.000	45.43	-0.28	45.15	74.00	-28.85	100	157	peak
2	7273.000	45.06	5.28	50.34	74.00	-23.66	100	114	peak

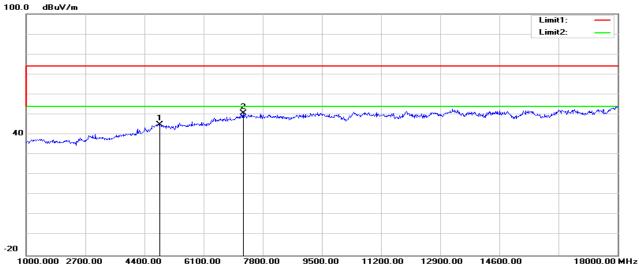

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4842.000	45.22	-0.22	45.00	74.00	-29.00	100	154	peak
2	7239.000	45.53	5.16	50.69	74.00	-23.31	100	45	peak






Report No.:C171023R02-RPW Page 107 of 111

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Mid Test Date: 2018-3-19


Temperature: 24°C **Tested by:** Lily.Wang

Humidity: 48 % RH Polarity: Ver. / Hor.

Horizontal

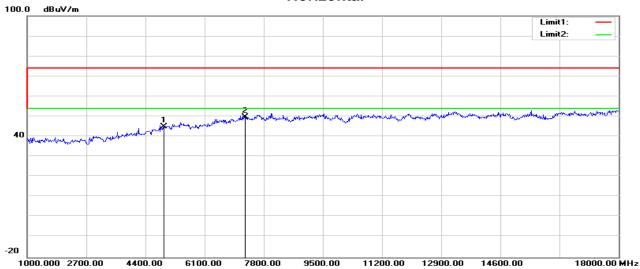

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4927.000	44.71	0.10	44.81	74.00	-29.19	100	164	peak
2	7273.000	44.43	5.28	49.71	74.00	-24.29	100	342	peak
N/A									

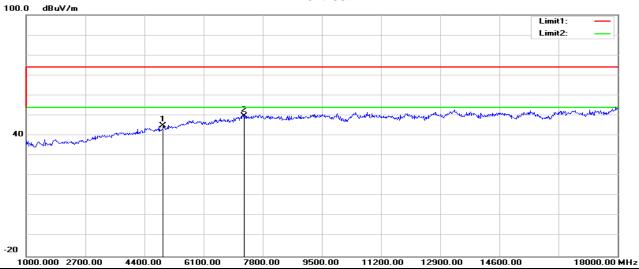

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4927.000	44.72	0.10	44.82	74.00	-29.18	100	113	peak
2	7273.000	44.62	5.28	49.90	74.00	-24.10	100	277	peak






Operation Mode: TX / IEEE 802.11n HT20 mode / CH High Test Date: 2018-3-19


Temperature: 24°C **Tested by:**Lily.Wang

Humidity: 48 % RH Polarity: Ver. / Hor.

Horizontal

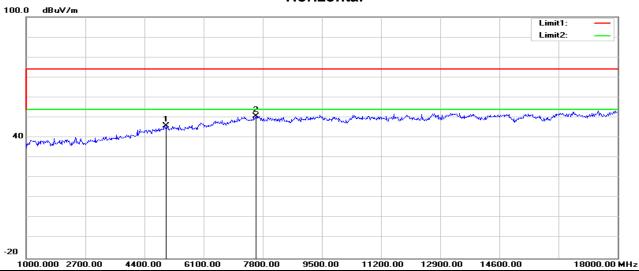

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5029.000	45.39	0.36	45.75	74.00	-28.25	100	139	peak
2	7613.000	44.68	6.02	50.70	74.00	-23.30	100	71	peak

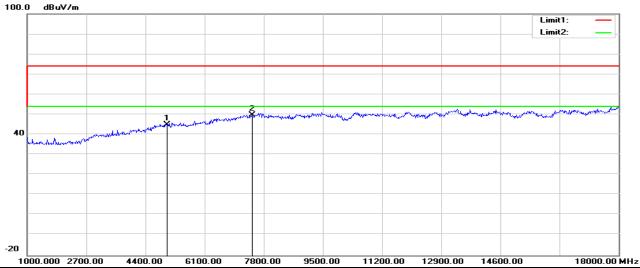

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5029.000	44.69	0.36	45.05	74.00	-28.95	100	283	peak
2	7460.000	43.80	5.95	49.75	74.00	-24.25	100	122	peak





7.7.POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)					
(WITIZ)	Quasi-peak	Average				
0.15 to 0.50	66 to 56*	56 to 46*				
0.50 to 5	56	46				
5 to 30	60	50				

^{*} Decreases with the logarithm of the frequency.

According to RSS-Gen 8.8, a radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits in Table below.

Francisco (MILE)	Conducted li	mit (dBμV)
Frequency (MHz)	Quasi-Peak	Average**
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

^{*} The level decreases linearly with the logarithm of the frequency.

Test Configuration

See test photographs attached in Setup photo for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.


TEST DATA

^{**} A linear average detector is required.



Report No.:C171023R02-RPW Page 110 of 111

Job No.:	C171023R02	Date:	2018/3/1
Model No.:	YVR.1117	Time:	9:20:13
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	

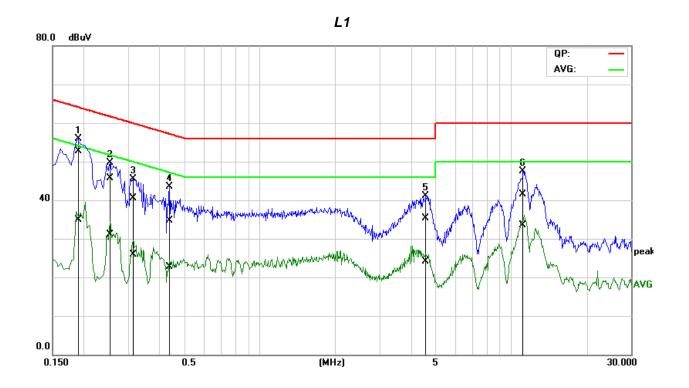


No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1868	32.61	14.79	20.09	52.70	34.88	64.18	54.18	-11.48	-19.30	Pass
2	0.2514	25.63	11.04	20.14	45.77	31.18	61.71	51.71	-15.94	-20.53	Pass
3	0.3114	20.29	5.86	20.14	40.43	26.00	59.93	49.93	-19.50	-23.93	Pass
4	0.4340	14.48	2.56	20.15	34.63	22.71	57.18	47.18	-22.55	-24.47	Pass
5	4.5565	14.96	3.81	20.38	35.34	24.19	56.00	46.00	-20.66	-21.81	Pass
6	11.1748	20.62	12.77	20.80	41.42	33.57	60.00	50.00	-18.58	-16.43	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).





Job No.:	C171023R02	Date:	2018/3/1
Model No.:	YVR.1117	Time:	9:26:04
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 120V/60Hz
Model:		Description:	

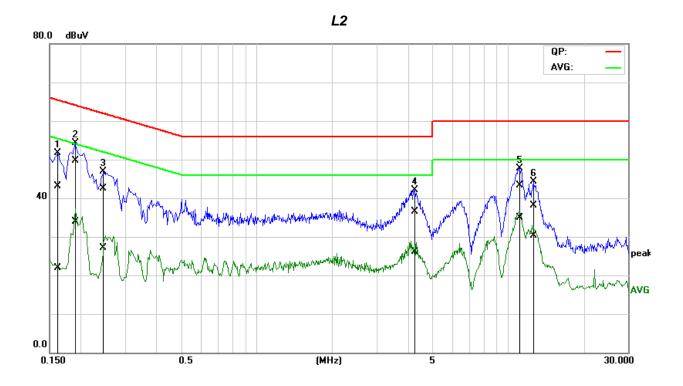

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1607	22.97	1.88	20.07	43.04	21.95	65.43	55.43	-22.39	-33.48	Pass
2	0.1887	29.57	13.77	20.09	49.66	33.86	64.09	54.09	-14.43	-20.23	Pass
3	0.2460	22.44	6.92	20.13	42.57	27.05	61.89	51.89	-19.32	-24.84	Pass
4	4.2656	16.22	5.75	20.33	36.55	26.08	56.00	46.00	-19.45	-19.92	Pass
5	11.0549	22.54	14.18	20.76	43.30	34.94	60.00	50.00	-16.70	-15.06	Pass
6	12.6476	17.25	9.52	20.77	38.02	30.29	60.00	50.00	-21.98	-19.71	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line). *Remark*:

- 1. The measuring frequencies range between 0.15 MHz and 30 MHz.
- 2.The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
- 3."---" denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
- 4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

END OF REPORT