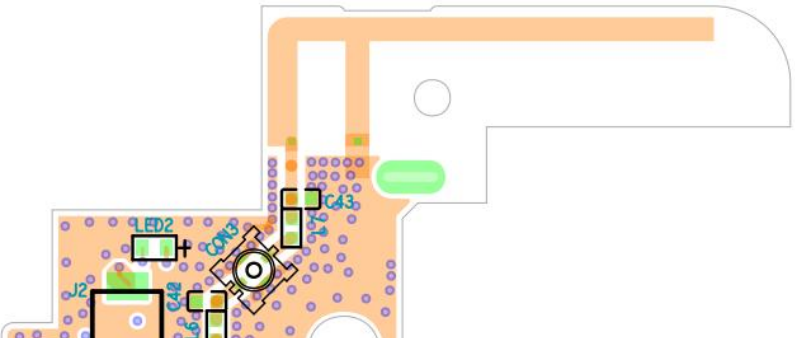


Antenna Report

Antenna model	PCB Antenna
Antenna Material	PCB
Antenna Information	
Frequency range	2400 ~ 2500 MHz
VSWR	≤ 1.17
Isolation	NA
Gain	0.73 dBi MAX
Efficiency	>38%
Impedance	50 Ohm Nominal
Return Loss	-17.11dB Max
Radiation	Omni-directional
Manufacturer	GL Technologies (Hong Kong) Limited
Address	Unit 601, Building 5W, Hong Kong Science Park, Shatin, N.T., Hong Kong


Contents

Contents2

1. Parameter Test 3


2. Test Data4

1. Parameter Test

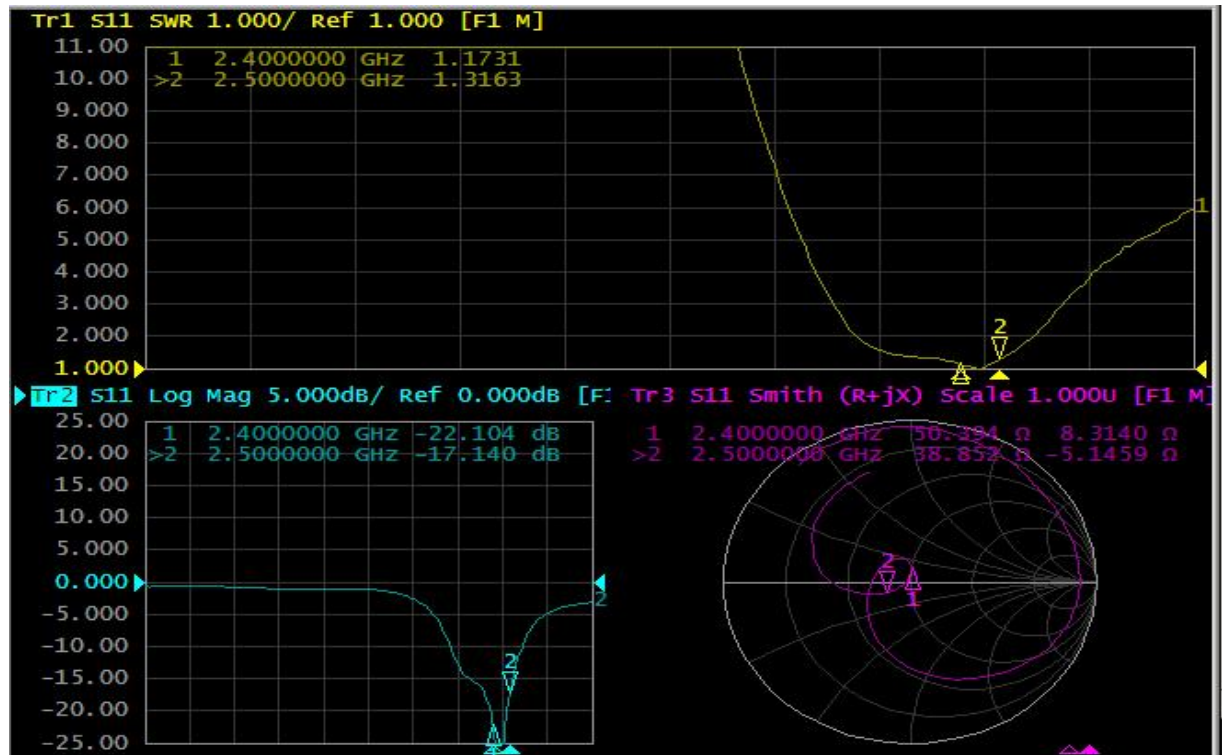

2. Test Data

Passive Test For 2400MHz~2500MHz				
Freq	Effi	Effi	Gain	
(MHz)	(%)	(dB)	(dBi)	
2400	38.5%	-4.15	0.37	
2410	39.2%	-4.07	0.44	
2420	40.1%	-3.97	0.49	
2430	40.7%	-3.90	0.53	
2440	41.3%	-3.84	0.62	
2450	41.9%	-3.78	0.73	
2460	41.5%	-3.82	0.69	
2470	40.8%	-3.89	0.57	
2480	40.1%	-3.97	0.51	

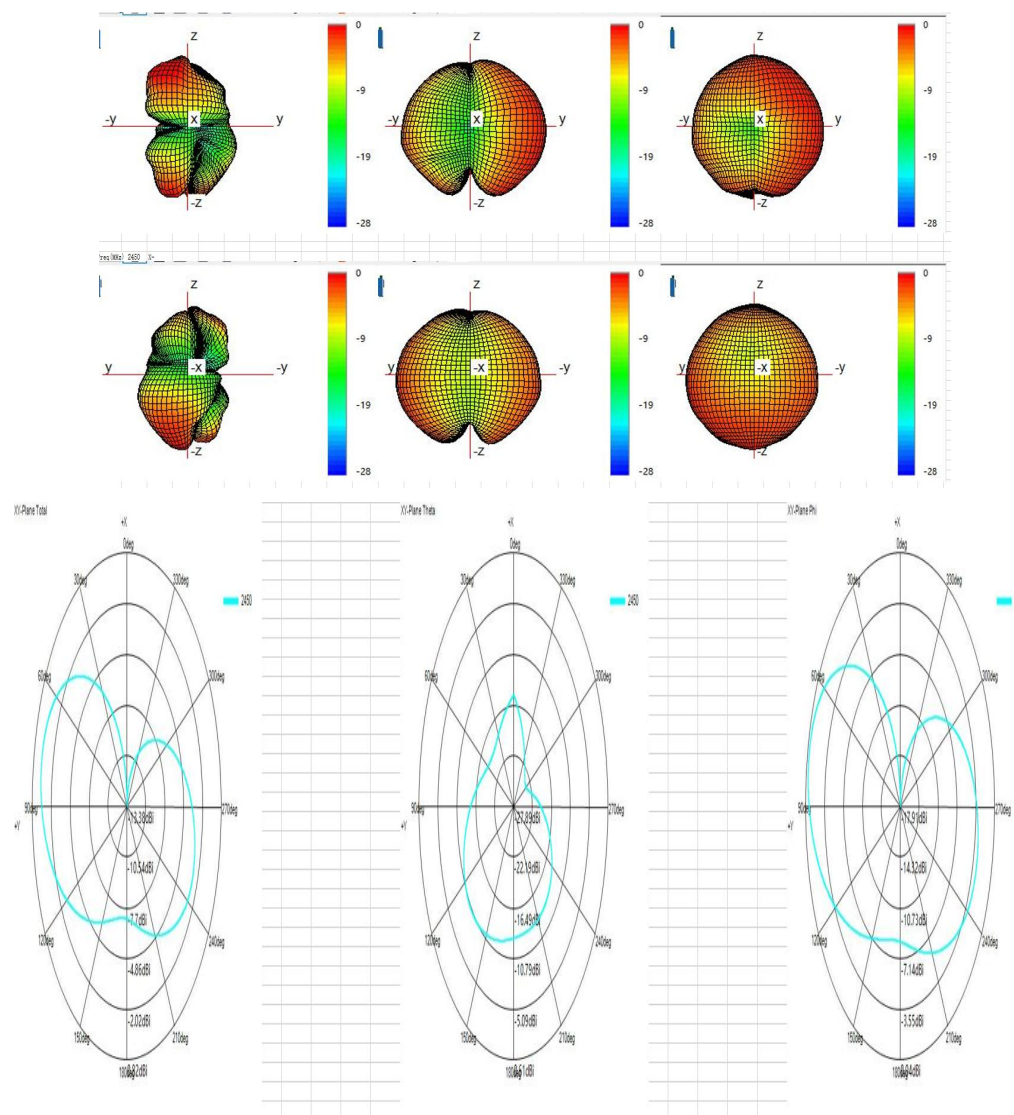

----- The End -----