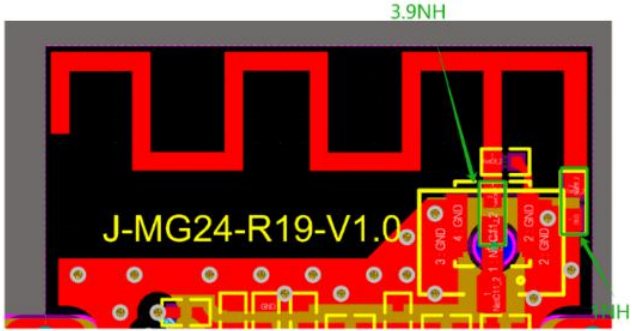


Antenna Report

Antenna model	PCB Antenna
Antenna Material	PCB
Antenna Information	
Frequency range	2400 ~ 2500 MHz
VSWR	≤ 1.57
Isolation	N/A
Gain	0.5±0.5dB
Efficiency	>38%
Impedance	50 Ohm Nominal
Return Loss	--13.11 dB Max
Radiation	Omni-directional
Manufacturer	广联智通
Address	

Contents


Contents.....2

1. Parameter Test.....3

2. Test Data..... 4


3. EUT Photo and test setup.....6


1. Parameter Test

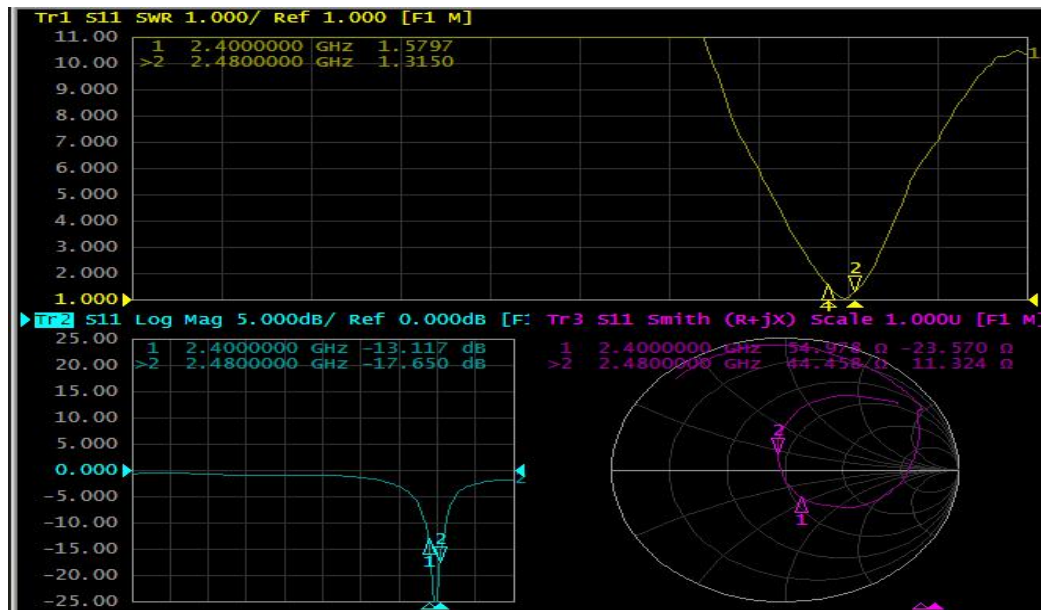

2. Test Data

Passive Test For 2400MHz~2500MHz				
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	
2400	38.6%	-4.13	0.51	
2410	39.2%	-4.07	0.43	
2420	40.5%	-3.93	0.40	
2430	41.3%	-3.84	0.48	
2440	41.5%	-3.82	0.51	
2450	42.6%	-3.71	0.54	
2460	41.4%	-3.83	0.55	
2470	41.1%	-3.86	0.44	
2480	40.3%	-3.95	0.39	
2490	39.2%	-4.07	0.43	
2500	38.7%	-4.12	0.44	

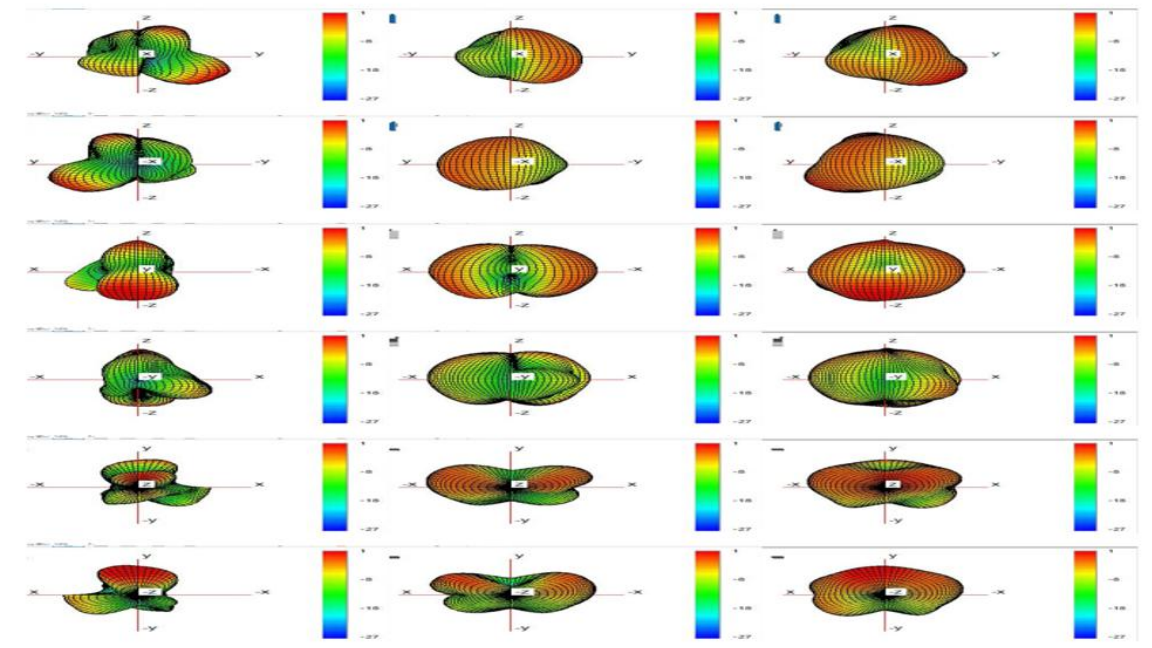

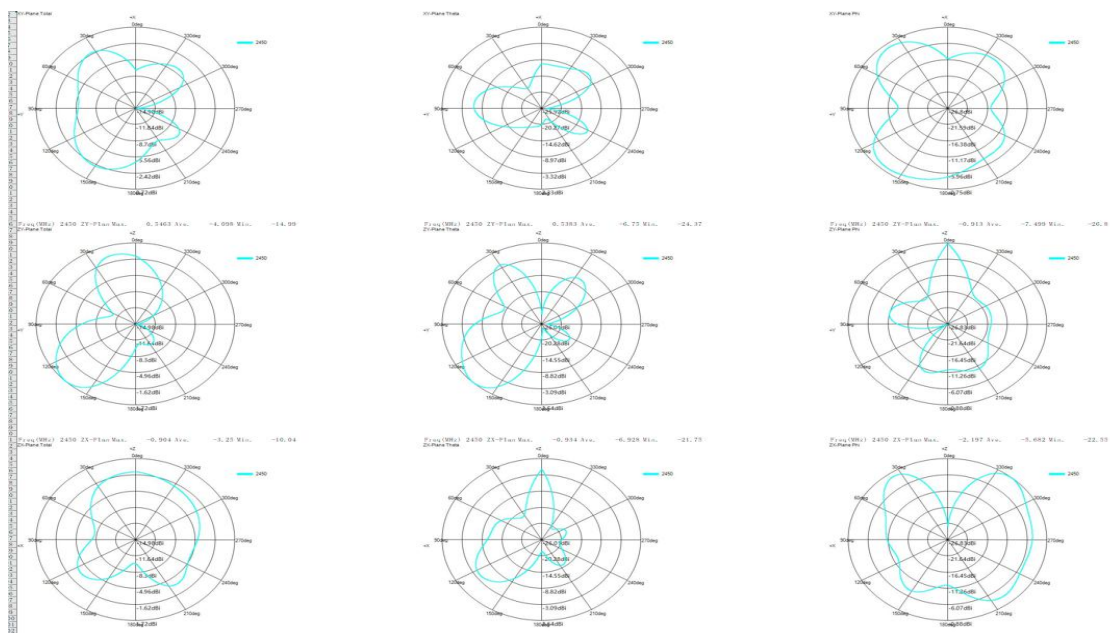

3. EUT Photo and test setup

----- The End -----