



REPORT No.: SZ15080014W01

FCC RF TEST REPORT

APPLICANT : KPhone USA Inc.

PRODUCT NAME : smart phone

MODEL NAME : K5

TRADE NAME : KPHONE

BRAND NAME : KPHONE

FCC ID : 2AFJ5K5

STANDARD(S) : 47 CFR Part 22 Subpart H
47 CFR Part 24 Subpart E
47 CFR Part 27 Subpart L

ISSUE DATE : 2015-9-15



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. GENERAL INFORMATION	5
1.1 EUT DESCRIPTION	5
1.2 TEST STANDARDS AND RESULTS	6
1.3 FACILITIES AND ACCREDITATIONS	7
1.3.1 FACILITIES	7
1.3.2 TEST ENVIRONMENT CONDITIONS	7
2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS	8
2.1 CONDUCTED RF OUTPUT POWER	8
2.1.1 REQUIREMENT	8
2.1.2 TEST DESCRIPTION	8
2.1.3 TEST RESULTS	9
2.2 PEAK TO AVERAGE RADIO	20
2.2.1 DEFINITION	20
2.2.2 TEST DESCRIPTION	20
2.2.3 TEST VERDICT	20
2.3 99% OCCUPIED BANDWIDTH	27
2.3.1 DEFINITION	27
2.3.2 TEST DESCRIPTION	27
2.3.3 TEST VERDICT	27
2.4 FREQUENCY STABILITY	51
2.4.1 REQUIREMENT	51
2.4.2 TEST DESCRIPTION	52
2.4.3 TEST VERDICT	52
2.5 CONDUCTED OUT OF BAND EMISSIONS	60
2.5.1 REQUIREMENT	60
2.5.2 TEST DESCRIPTION	60
2.5.3 TEST RESULT	60
2.6 BAND EDGE	101
2.6.1 REQUIREMENT	101
2.6.2 TEST DESCRIPTION	101



2.6.3	TEST RESULT.....	101
2.7	TRANSMITTER RADIATED POWER (EIRP/ERP)	116
2.7.1	REQUIREMENT.....	116
2.7.2	TEST DESCRIPTION	116
2.7.3	TEST RESULT.....	117
2.8	RADIATED OUT OF BAND EMISSIONS	128
2.8.1	REQUIREMENT.....	128
2.8.2	TEST DESCRIPTION	128
2.8.3	TEST RESULT.....	128

Change History		
Issue	Date	Reason for change
1.0	2015-9-15	First edition



REPORT No.: SZ15080014W01

TEST REPORT DECLARATION

Applicant	KPhone USA Inc.
Applicant Address	8333 Foothill Blvd.#840 Rancho Cucamonga, CA 91730
Manufacturer	Beijing Benywave Wireless Communication Co.,Ltd
Manufacturer Address	No. 55, Jiachuang 2 Road, Beijing OPTO-Mechatronics Industrial Park (OIP),Tongzhou District, Beijing, China 101111
Product Name	smart phone
Model Name	K5
Brand Name	KPHONE
HW Version	TBT5755_P2_001
SW Version	575511_1001_VXXXX
Test Standards	47 CFR Part 22 Subpart H 47 CFR Part 24 Subpart E 47 CFR Part 27 Subpart L
Test Date	2015-8-14 to 2015-9-14
Test Result	PASS

Tested by : Yuan Ling
Yuan Ling(Test Engineer)

Reviewed by : Qiu Xiaojun
Qiu Xiaojun(RF Manager)

Approved by : Zeng Dexin
Zeng Dexin(Chief Engineer)



1. GENERAL INFORMATION

1.1 EUT Description

EUT Type: smart phone
Serial No.: (n.a, marked #1 by test site)
Hardware Version: TBT5755_P2_001
Software Version: 575511_1001_VXXXX
Applicant: KPhone USA Inc.
8333 Foothill Blvd.#840 Rancho Cucamonga, CA 91730
Manufacturer: Beijing Benywave Wireless Communication Co.,Ltd
No. 55, Jiachuang 2 Road, Beijing OPTO-Mechatronics Industrial
Park (OIP),Tongzhou District, Beijing, China 101111
Frequency Range: GSM 850MHz:
Tx: 824.20 - 848.80MHz (at intervals of 200kHz);
Rx: 869.20 - 893.80MHz (at intervals of 200kHz)
GSM 1900MHz:
Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz);
Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz)
WCDMA 850MHz
Tx: 826.4 - 846.6MHz (at intervals of 200kHz);
Rx: 871.4 - 891.6MHz (at intervals of 200kHz)
WCDMA 1700MHz
Tx: 1712.4 - 1752.6MHz (at intervals of 200kHz);
Rx: 2112.4 - 2152.6MHz (at intervals of 200kHz)
WCDMA 1900MHz
Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz);
Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz)
Modulation Type.....: GSM,GPRS Mode with GMSK Modulation
EDGE Mode with 8PSK Modulation
WCDMA Mode with QPSK Modulation
HSDPA Mode with QPSK Modulation
HSUPA Mode with QPSK Modulation
Multislot Class: GPRS: Multislot Class12; EGPRS: Multislot Class12
Antenna Type: PIFA Antenna
Emission Designators: GSM 850:248KGXW,GSM 1900:252KGXW
EGPRS850:250KG7W, EGPRS1900:254KG7W,
WCDMA 850:4M16F9W ,WCDMA1700:4M18F9W
WCDMA1900:4M19F9W



Note 1: The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula $F(n)=1850.2+0.2*(n-512)$, $512 \leq n \leq 810$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4175(835MHz) and 4233 (846.6MHz).

Note 4: The transmitter (Tx) frequency arrangement of the WCDMA 1900MHz band used by the EUT can be represented with the formula $F(n)=1852.4+0.2*(n-9262)$, $9262 \leq n \leq 9538$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

Note 5: The transmitter (Tx) frequency arrangement of the WCDMA 1700MHz band used by the EUT can be represented with the formula $F(n)=1712.4+0.2*(n-1312)$, $1312 \leq n \leq 1513$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 1312 (1712.4MHz), 1412 (1732.4MHz) and 1513 (1752.6MHz).

Note 6: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 7: After pre-scan test, the SIM Card 1 was the worst case, so we did the testing and recorded the results according to SIM card 1.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22, Part 24 and Part 27 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22	Public Mobile Services
3	47 CFR Part 24	Personal Communications Services
4	47 CFR Part 27	Miscellaneous Wireless Communications Services



Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2.	24.232(d), 27.50(d)(5)	Peak to average ratio	PASS
2	2.1049, 22.917, 24.238, 27.53(g)	99% Occupied Bandwidth	PASS
3	2.1055, 22.355, 24.235, 27.54	Frequency Stability	PASS
4	2.1051, 2.1057, 22.917, 24.238, 27.53(g)	Conducted Out of Band Emissions	PASS
5	2.1051, 2.1057, 22.917, 24.238, 27.53(g)(h)	Band Edge	PASS
6	22.913, 24.232, 27.50(d)(4)	Transmitter Radiated Power (EIPR/ERP)	PASS
7	2.1053, 2.1057, 22.917, 24.238, 27.53(g)	Radiated Out of Band Emissions	PASS

NOTE: Measurement method according to TIA/EIA 603.D-2010

1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL1.1, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China 518101. The test site is constructed in conformance with the requirements of ANSI C63.7-2009, ANSI C63.4-2009 and CISPR Publication 22:2010; the FCC registration number is 695796.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 2, PART 22H & 24E & 27L REQUIREMENTS


2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Test Description

Test Setup:

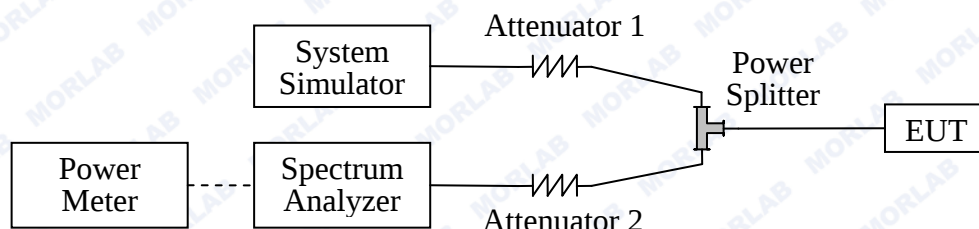

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

The Power Meter was just used for the Conducted RF Output Power test of WCDMA Model.

Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2015.02.26	2016.02.25
Spectrum Analyzer	Agilent	E7405A	US44210471	2015.02.26	2016.02.25
Power Meter	Agilent	E4418B	GB43318055	2015.02.26	2016.02.25
Power Sensor	Agilent	8482A	MY41091706	2015.02.26	2016.02.25
Power Splitter	Weinschel	1506A	NW521	2015.02.26	2016.02.25
Attenuator 1	Resnet	20dB	(n.a.)	2015.02.26	2016.02.25
Attenuator 2	Resnet	3dB	(n.a.)	2015.02.26	2016.02.25



2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	Measured Output Power		Limit	Verdict
			dBm	Refer to Plot	dBm	
GSM 850MHz	128	824.2	32.96	Plot A1 to A3	35	PASS
	190	836.6	32.99			PASS
	251	848.8	33.01			PASS
GSM 1900MHz	512	1850.2	28.64	Plot B1 to B3	32	PASS
	661	1880.0	28.20			PASS
	810	1909.8	28.00			PASS
GPRS 850MHz	128	824.2	32.49	Plot C1 to C3 ^{Note 1}	35	PASS
	190	836.6	32.40			PASS
	251	848.8	32.3			PASS
GPRS 1900MHz	512	1850.2	27.99	Plot D1 to D3 ^{Note 1}	32	PASS
	661	1880.0	27.62			PASS
	810	1909.8	27.49			PASS
EGPRS 850MHz	128	824.2	29.77	Plot E1 to E3 ^{Note 1}	35	PASS
	190	836.6	29.84			PASS
	251	848.8	29.83			PASS
EGPRS 1900MHz	512	1850.2	27.40	Plot F1 to F3 ^{Note 1}	32	PASS
	661	1880.0	27.09			PASS
	810	1909.8	27.17			PASS

Note 1: For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.



WCDMA Model Test Verdict:

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	24.54	24.29	24.07	22.17	22.32	22.34
HSDPA	1	24.41	24.30	24.00	22.06	22.21	22.28
	2	24.40	24.29	24.01	22.09	22.18	22.25
	3	23.91	23.78	23.50	21.58	21.67	21.74
	4	23.90	23.79	23.52	21.57	21.64	21.73
HSUPA	1	24.28	24.02	23.84	19.61	21.95	22.24
	2	22.27	22.03	21.82	17.60	19.94	20.23
	3	23.28	23.02	22.83	18.59	20.93	21.24
	4	22.26	22.02	21.81	17.60	19.92	20.21
	5	24.27	24.01	23.82	19.60	21.94	22.24


Note: The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA was tested by power meter.

Item	band	WCDMA 1700		
	ARFCN	1312	1412	1513
	subtest	dBm		
5.2(WCDMA)	non	23.06	23.36	22.94
HSDPA	1	23.20	23.45	22.89
	2	23.15	23.42	22.84
	3	22.64	22.93	22.56
	4	22.66	22.95	22.58
HSUPA	1	23.27	23.48	22.85
	2	21.26	21.45	20.84
	3	22.25	22.47	21.81
	4	21.25	21.46	20.83
	5	23.26	23.45	22.84


Note: The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA was tested by power meter.



GSM Model Test Plots:

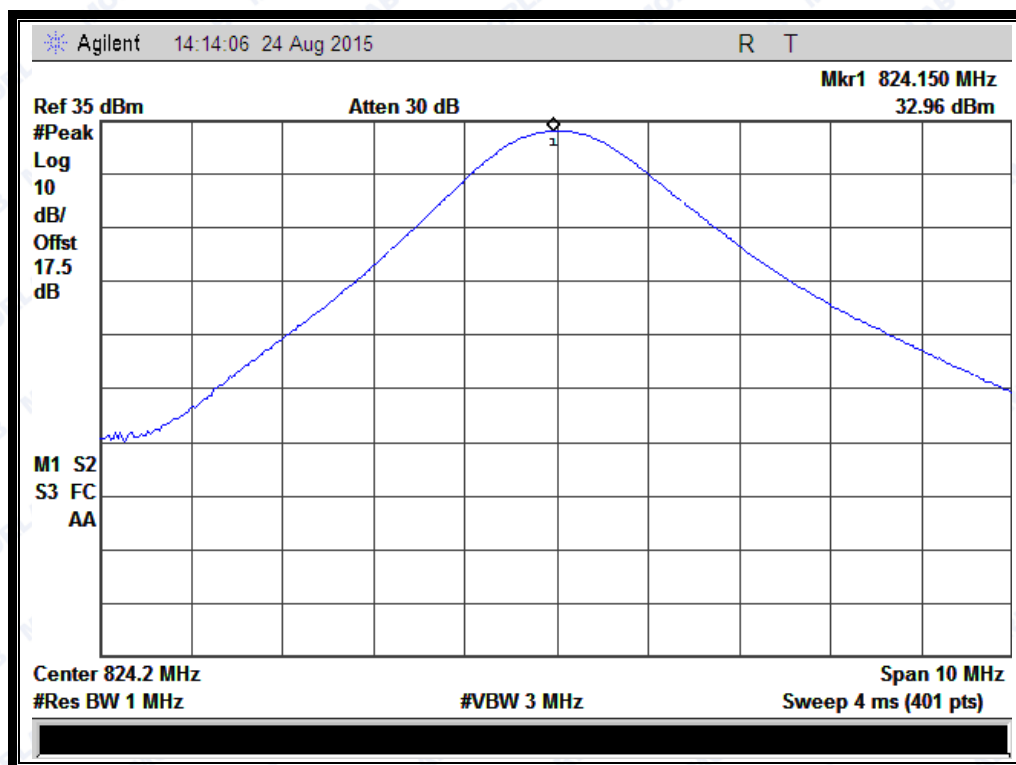


(Plot A1: GSM 850MHz Channel = 128)

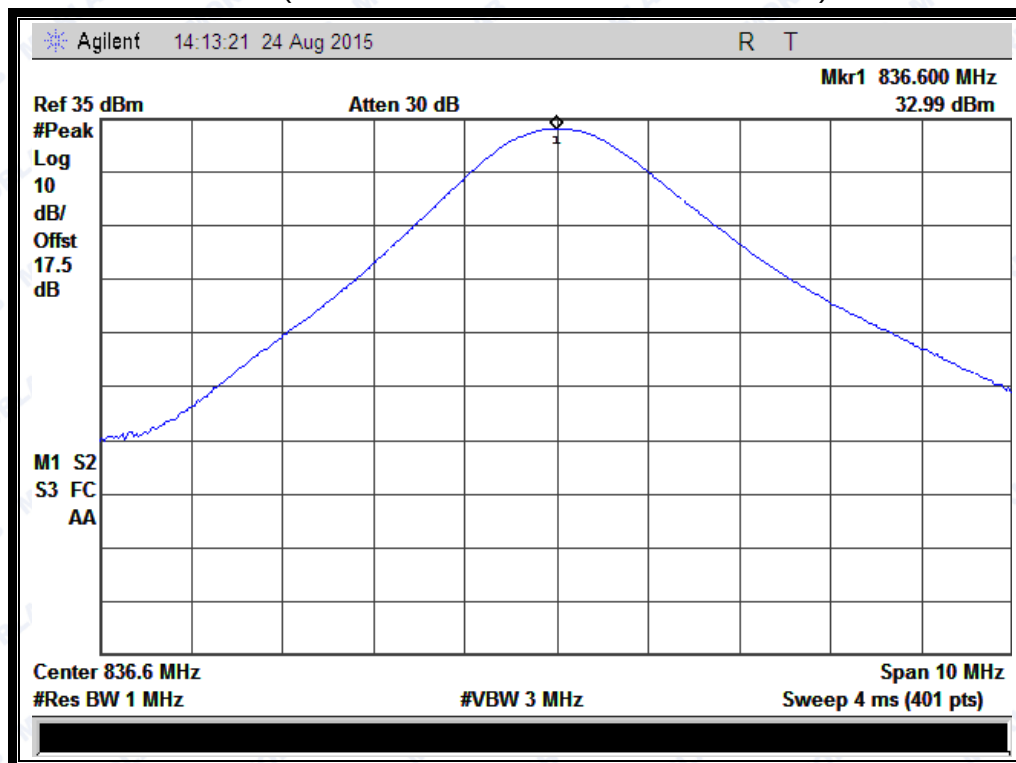


(Plot A2: GSM 850MHz Channel = 190)



REPORT No.: SZ15080014W01

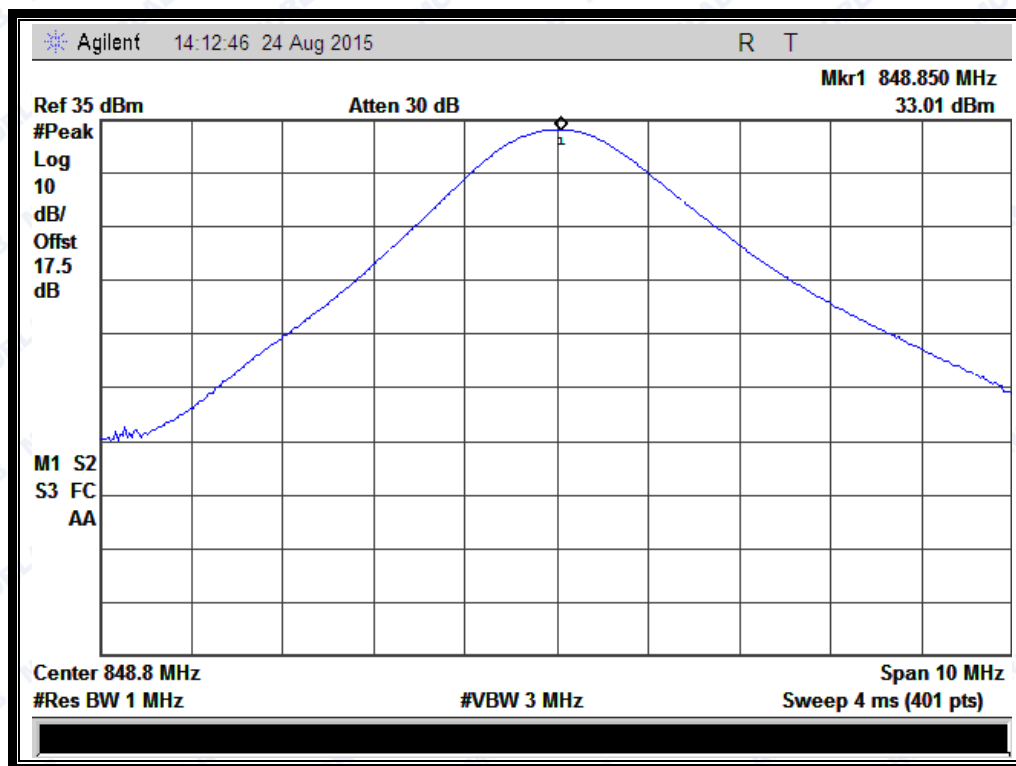


(Plot A3: GSM 850MHz Channel = 251)

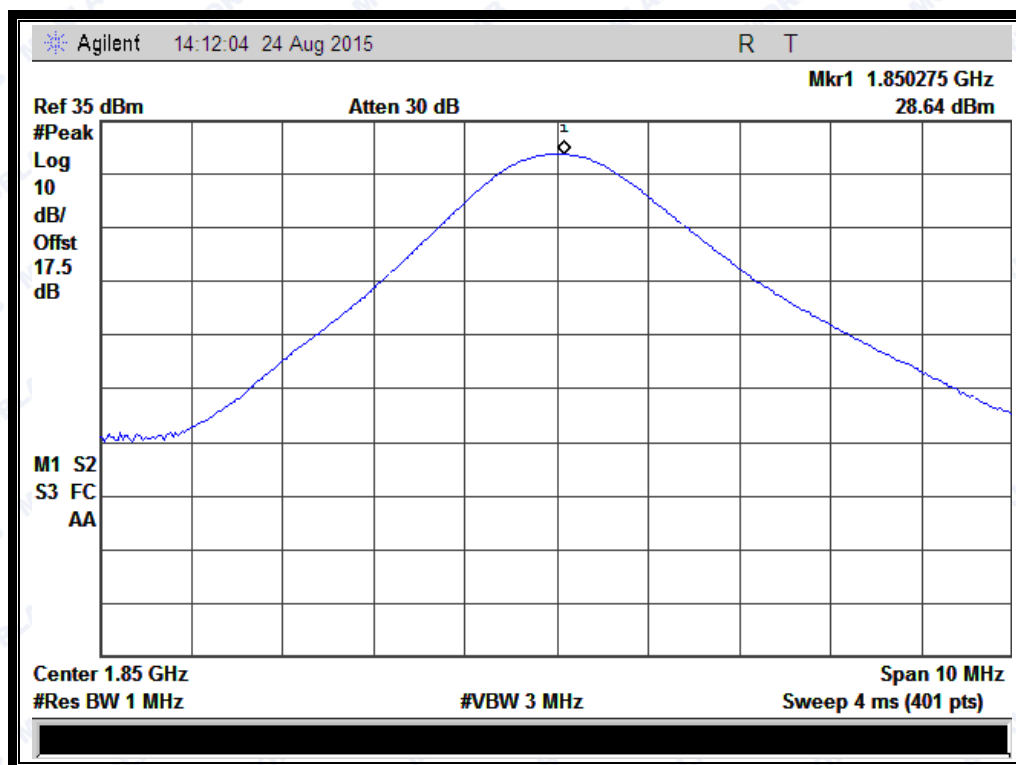


(Plot B1: GSM 1900MHz Channel = 512)



REPORT No.: SZ15080014W01

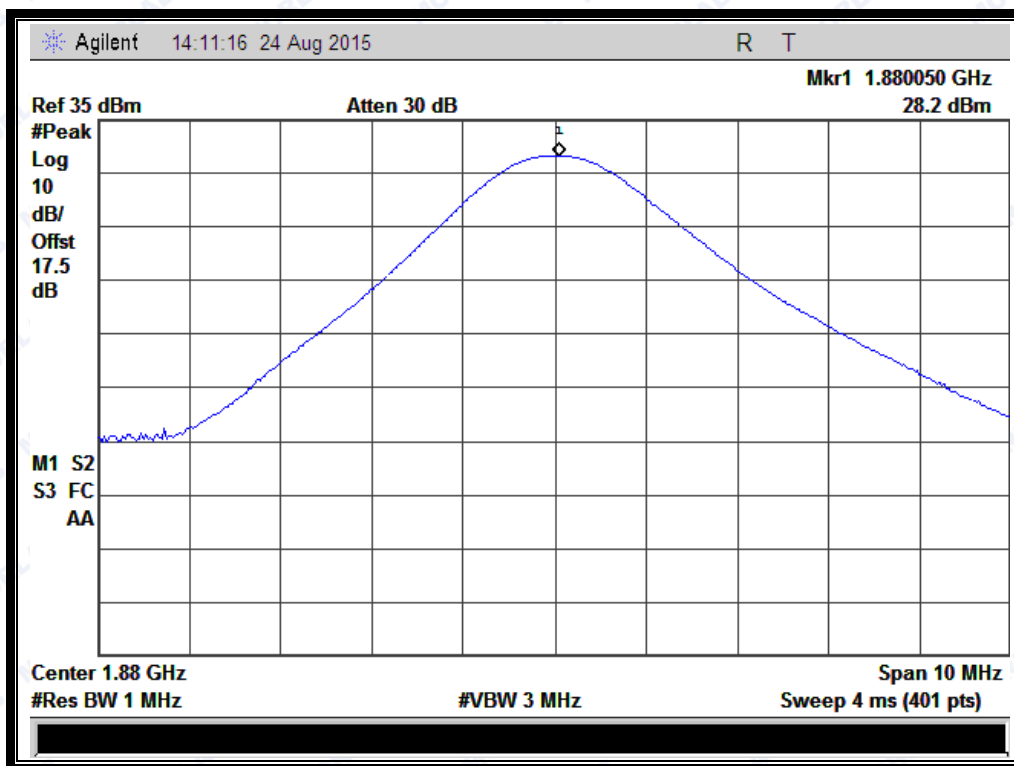



(Plot B2: GSM 1900MHz Channel = 661)

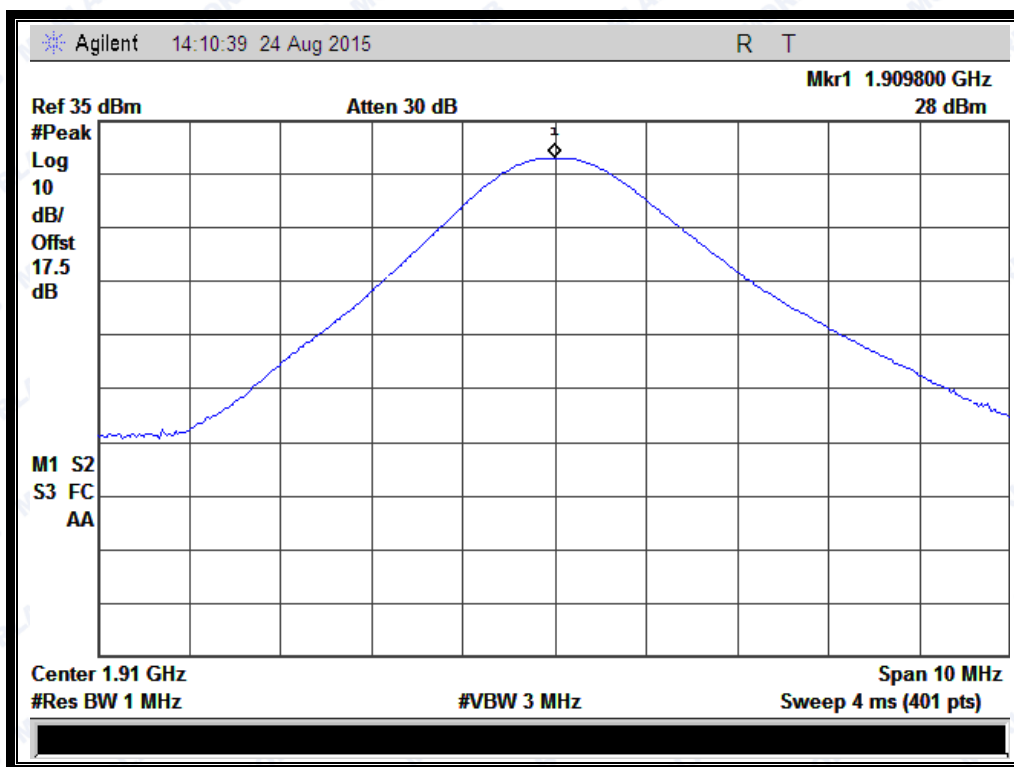

(Plot B3: GSM 1900Hz Channel = 810)




REPORT No.: SZ15080014W01

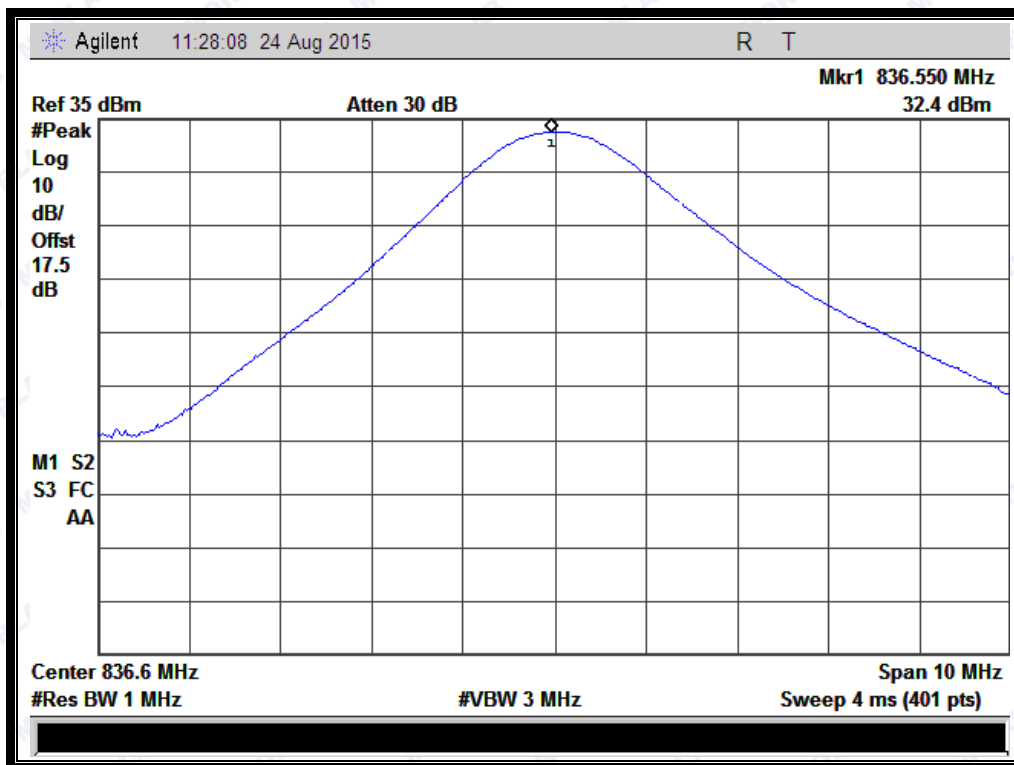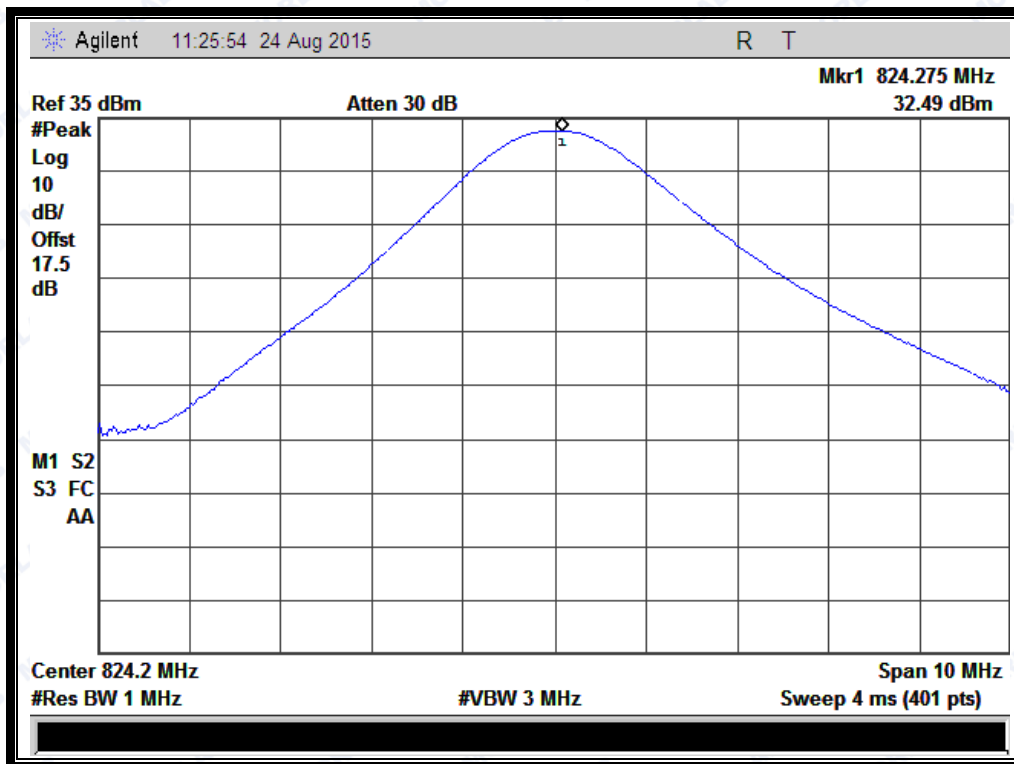




REPORT No.: SZ15080014W01

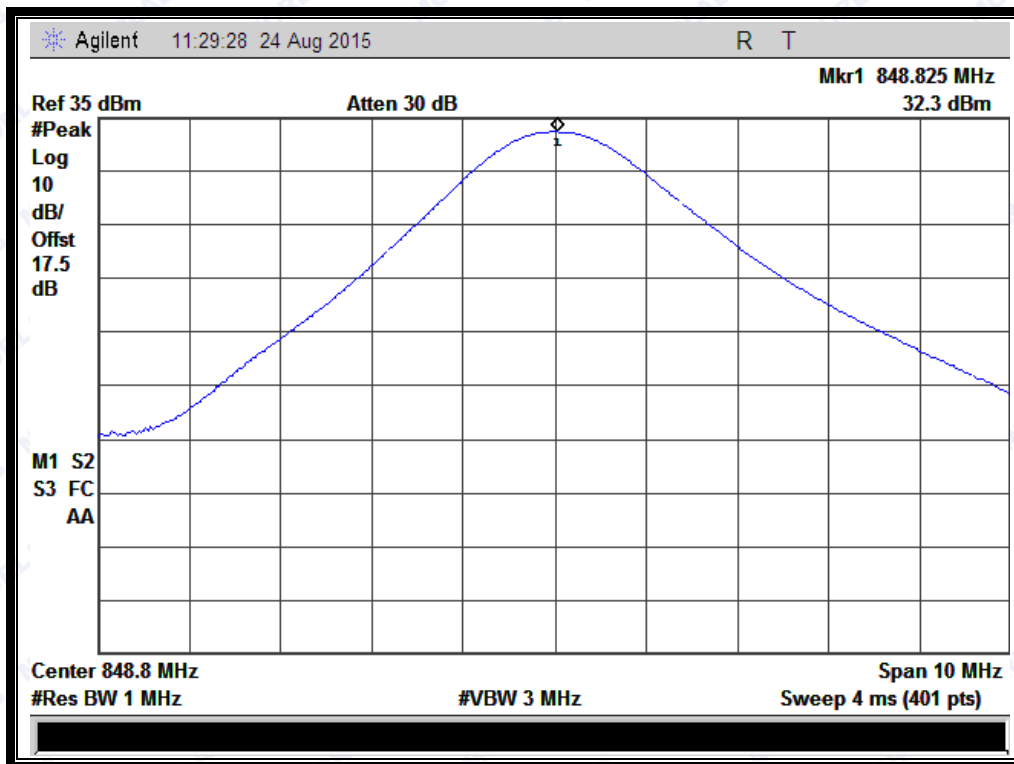


(Plot C3: GPRS 850MHz Channel = 251)

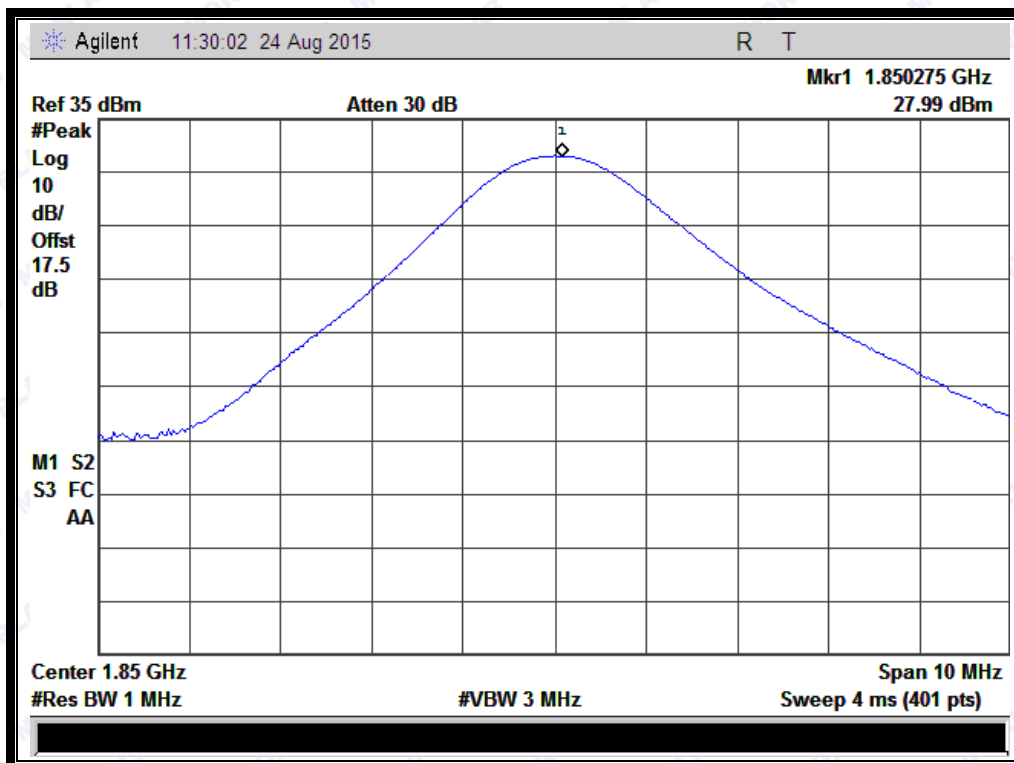


(Plot D1: GPRS 1900MHz Channel = 512)



REPORT No.: SZ15080014W01

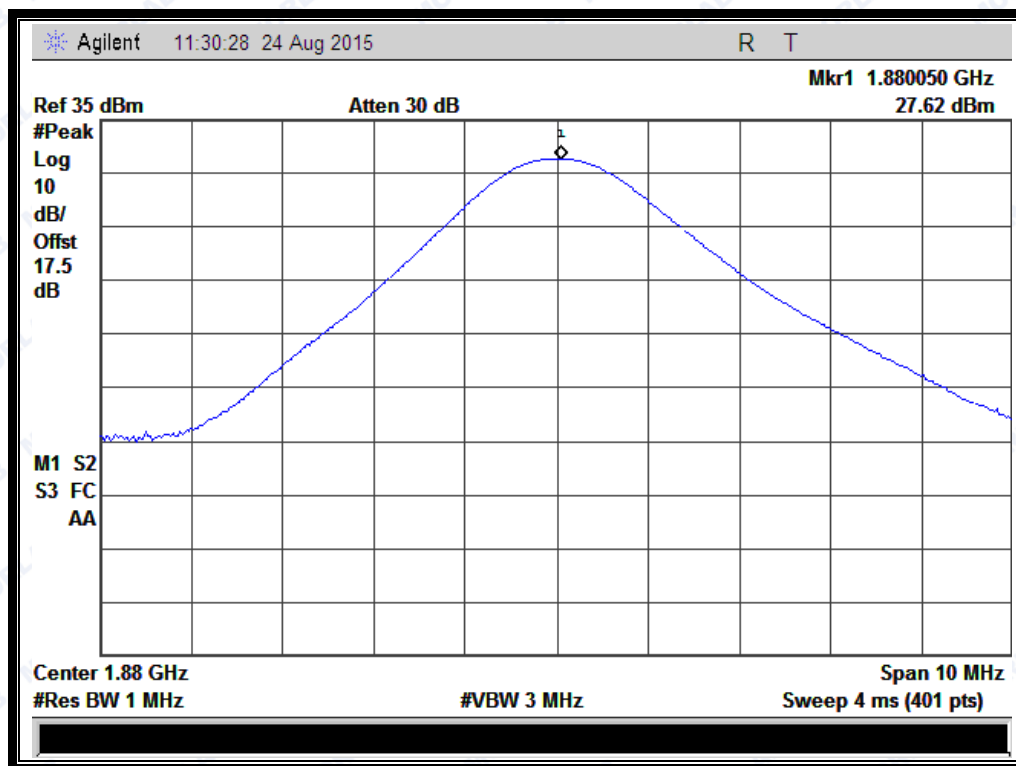


(Plot D2: GPRS 1900MHz Channel = 661)

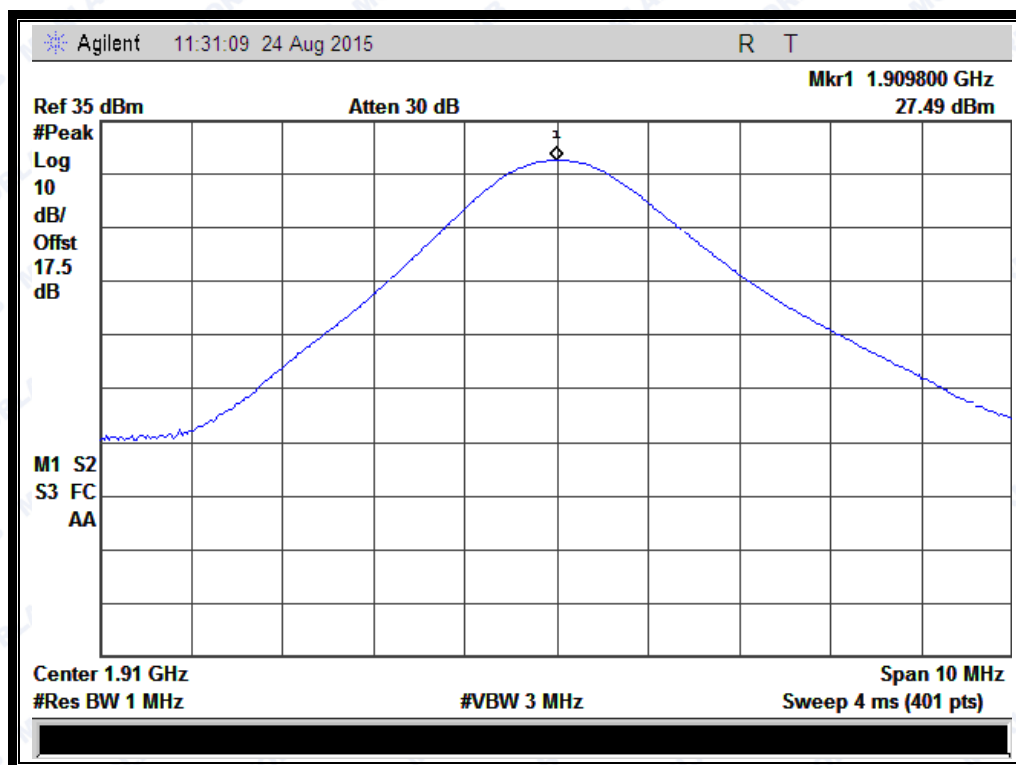


(Plot D3: GPRS 1900Hz Channel = 810)




REPORT No.: SZ15080014W01

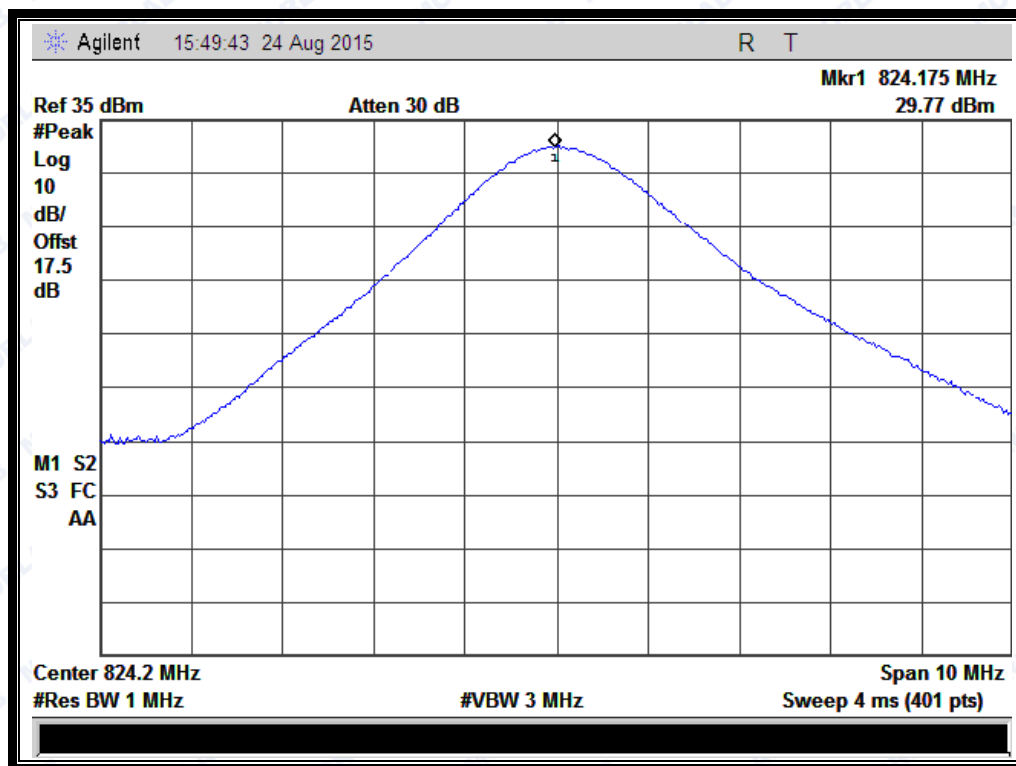


(Plot E1: EGPRS 850MHz Channel = 128)

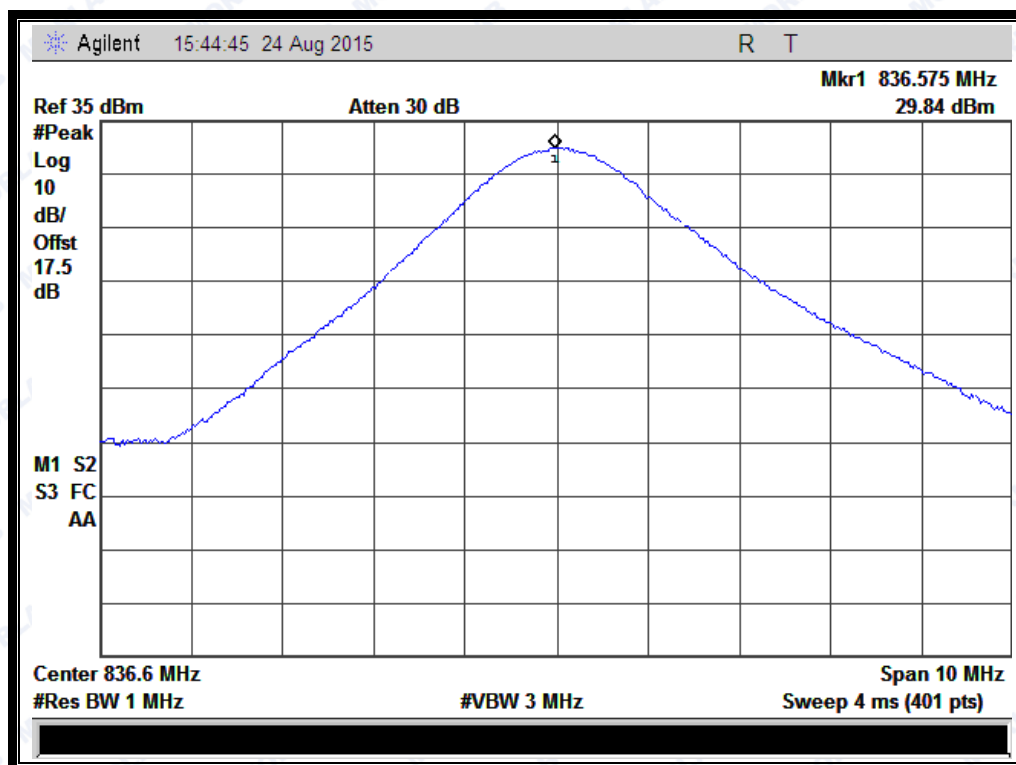

(Plot E2: EGPRS 850MHz Channel = 190)

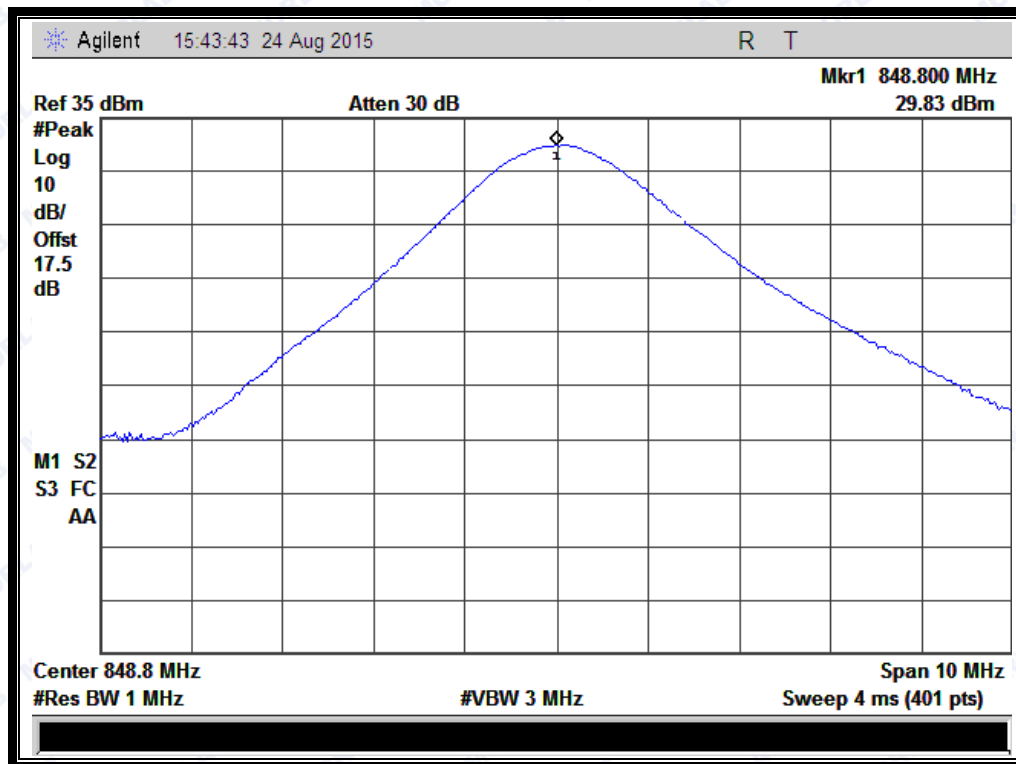


(Plot E3: EGPRS 850MHz Channel = 251)

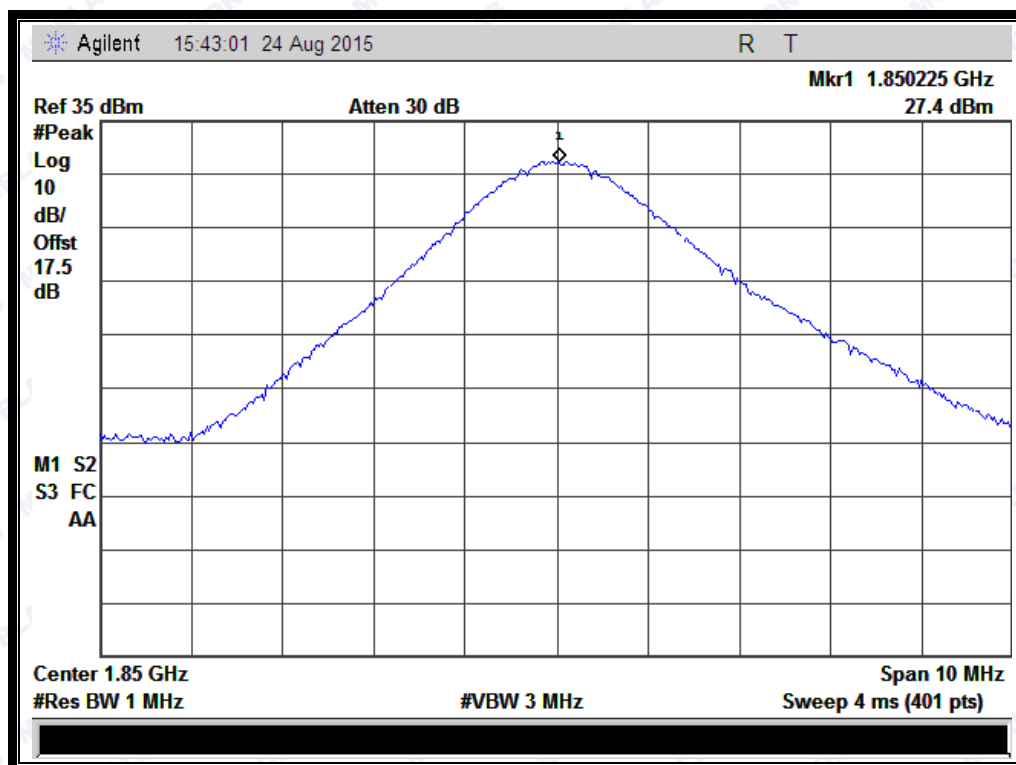


(Plot F1: EGPRS 1900MHz Channel = 512)



REPORT No.: SZ15080014W01

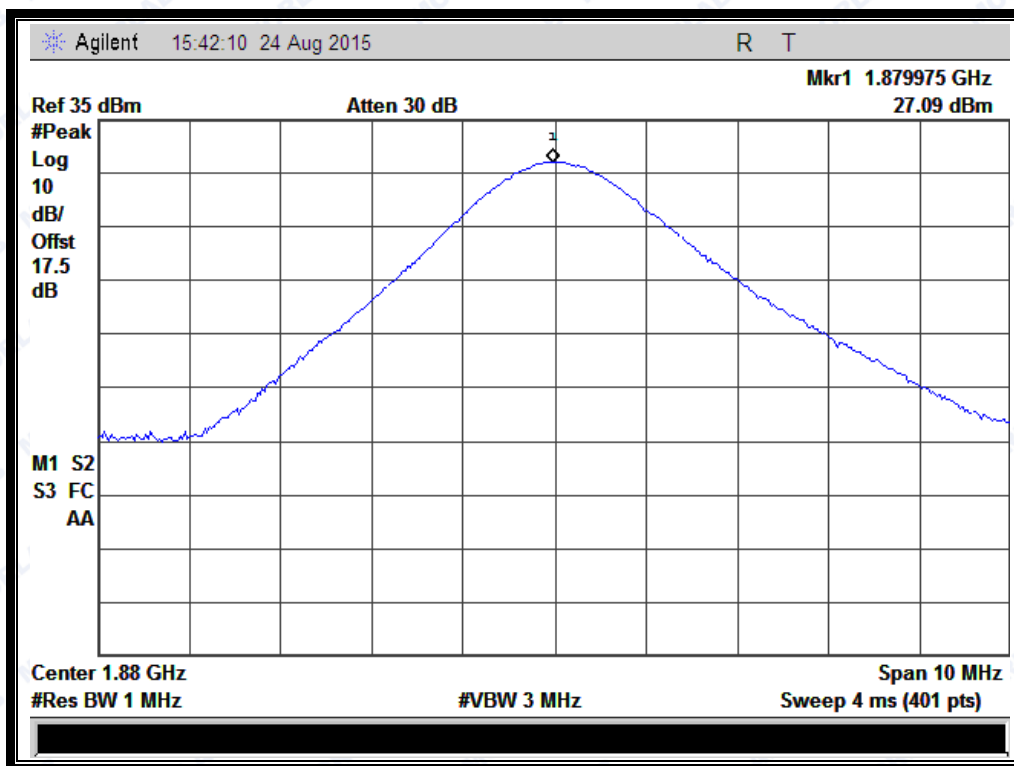

(Plot F2: EGPRS 1900MHz Channel = 661)

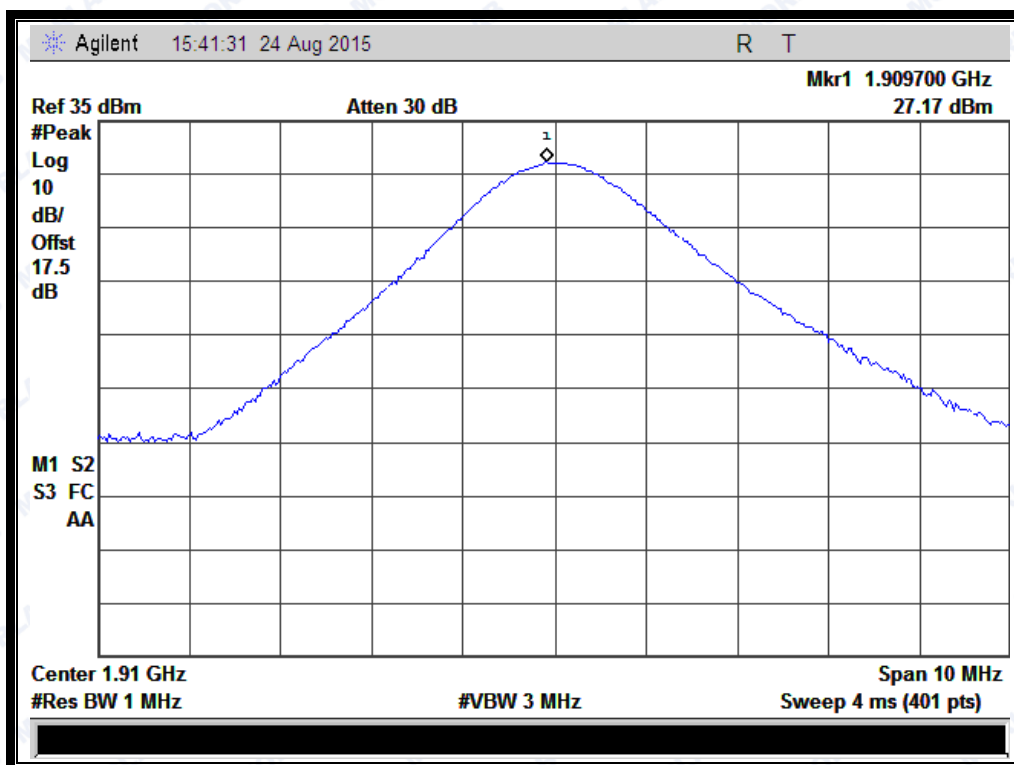

(Plot F3: EGPRS 1900Hz Channel = 810)



2.2 Peak to Average Ratio

2.2.1 Definition

According to FCC section 2.1049 and FCC 24.232(d), 27.50(d) the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A. For GSM/EGPRS operating mode:

- Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
- Set EUT in maximum output power, and triggered the burst signal.
- Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.

B. For UMTS operating mode:


- Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.

Test Verdict:


Band	Channel	Frequency (MHz)	Peak to Average ratio		Limit dB	Verdict
			dB	Refer to Plot		
GSM 1900MHz	512	1850.2	0.08	Plot A1 to A3	13	PASS
	661	1880.0	0.10			PASS
	810	1909.8	0.02			PASS
EGPRS 1900MHz	512	1850.2	0.01	Plot B1 to B3	13	PASS
	661	1880.0	0.06			PASS
	810	1909.8	0.12			PASS
WCDMA 1900MHz	9262	1852.4	2.76	Plot C1 to C3	13	PASS
	9400	1880.0	2.89			PASS
	9538	1907.6	2.80			PASS
WCDMA 1700MHz	1312	1712.4	2.70	Plot D1 to D3	13	PASS
	1412	1732.4	2.84			PASS
	1513	1752.6	2.77			PASS




REPORT No.: SZ15080014W01

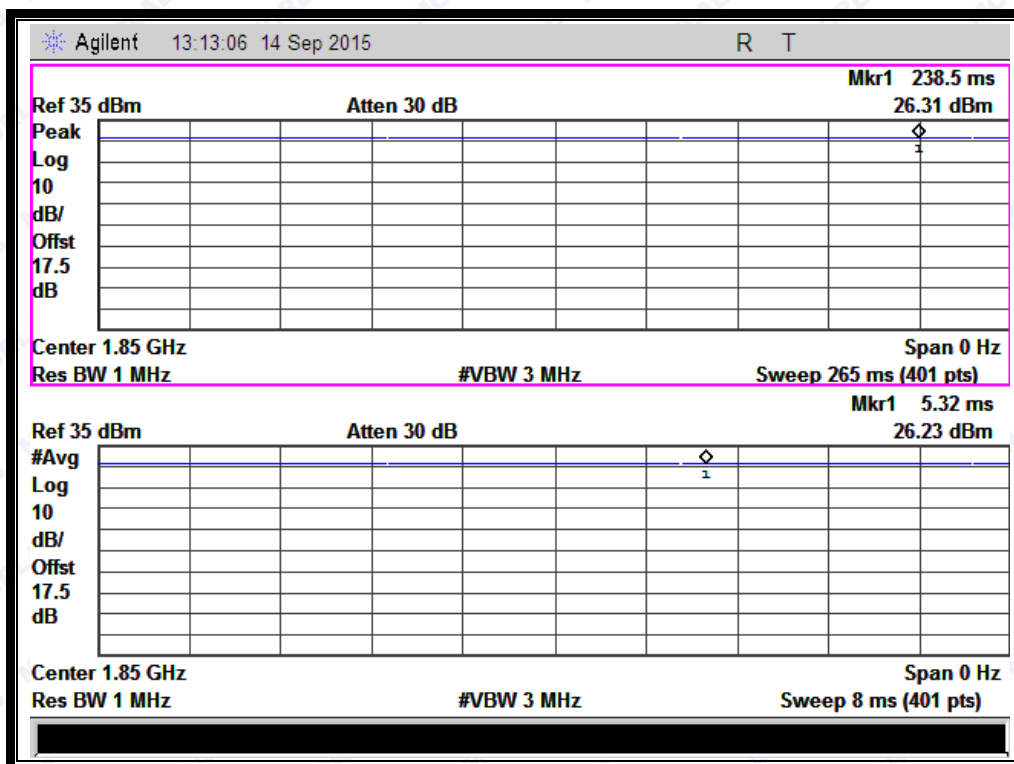

(Plot A1: GSM 1900 MHz Channel = 512)

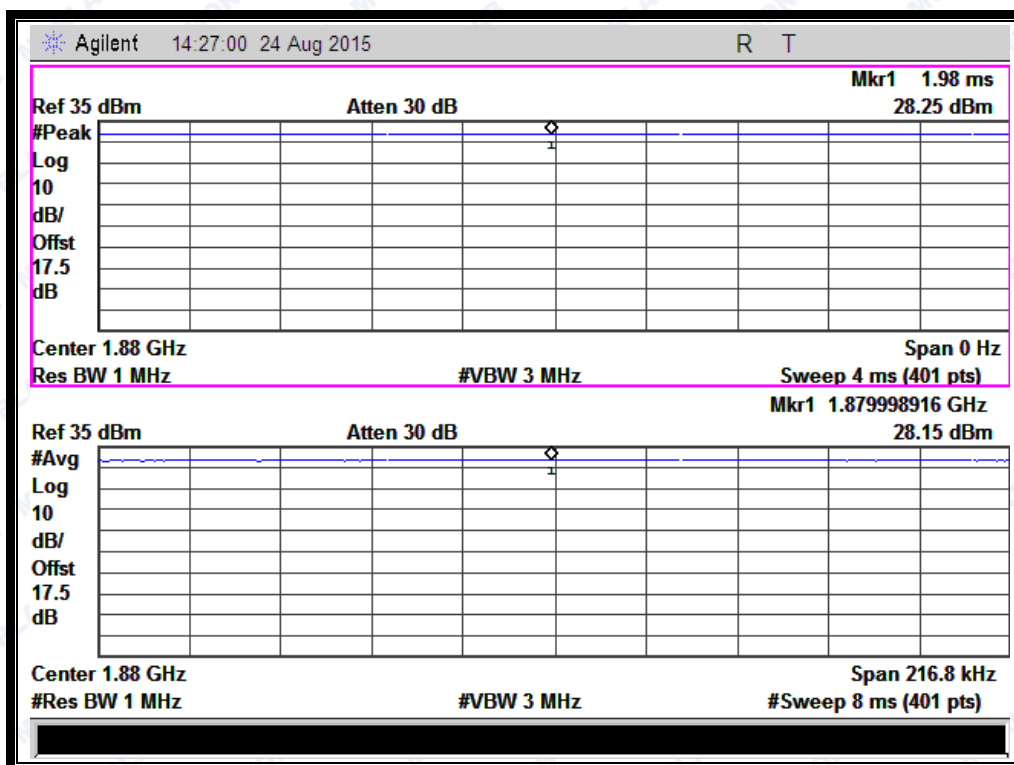


(Plot A2: GSM 1900 MHz Channel = 661)






REPORT No.: SZ15080014W01

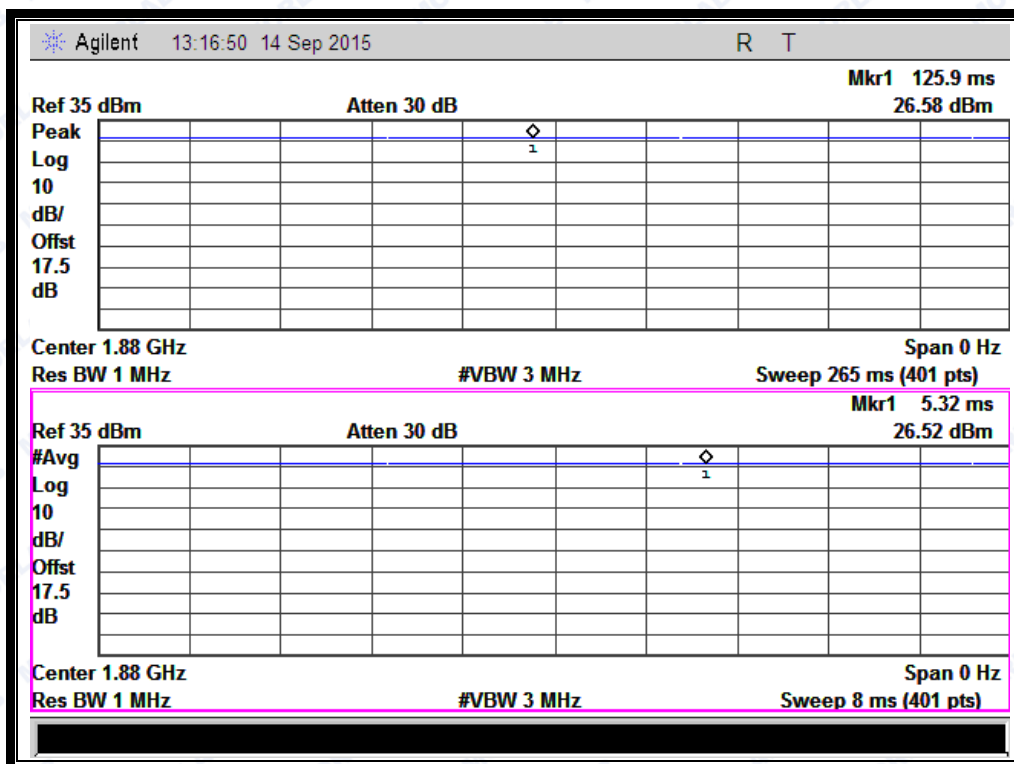


(Plot B2: EGPRS 1900 MHz Channel = 661)

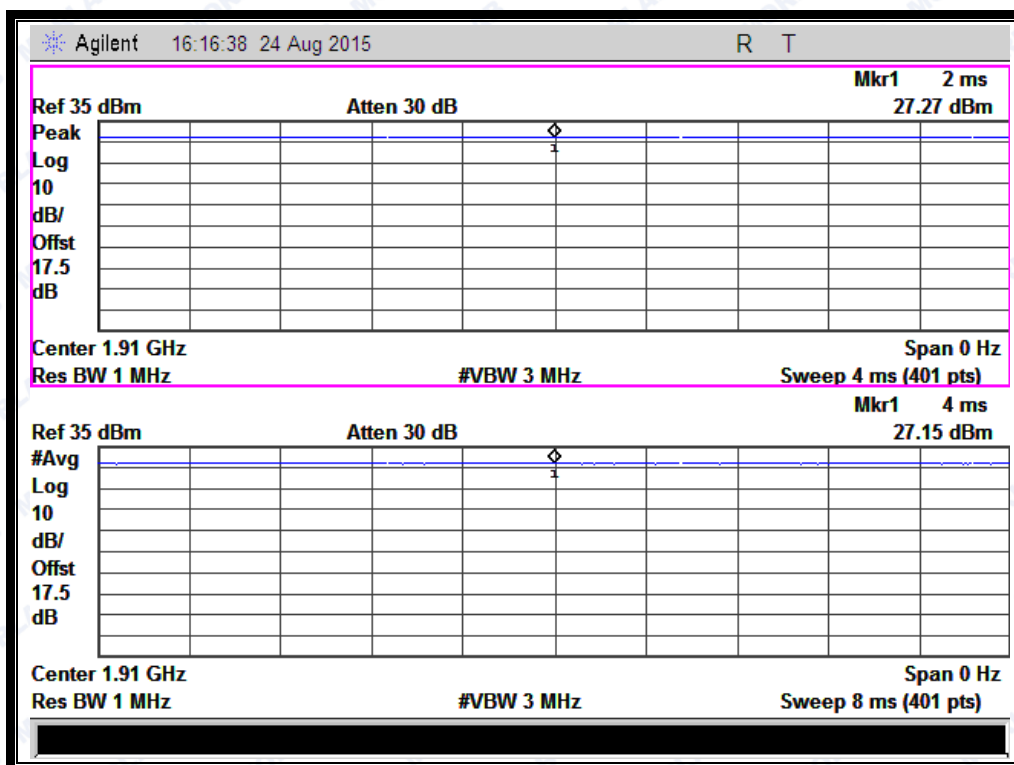


(Plot B3: EGPRS 1900MHz Channel = 810)



REPORT No.: SZ15080014W01

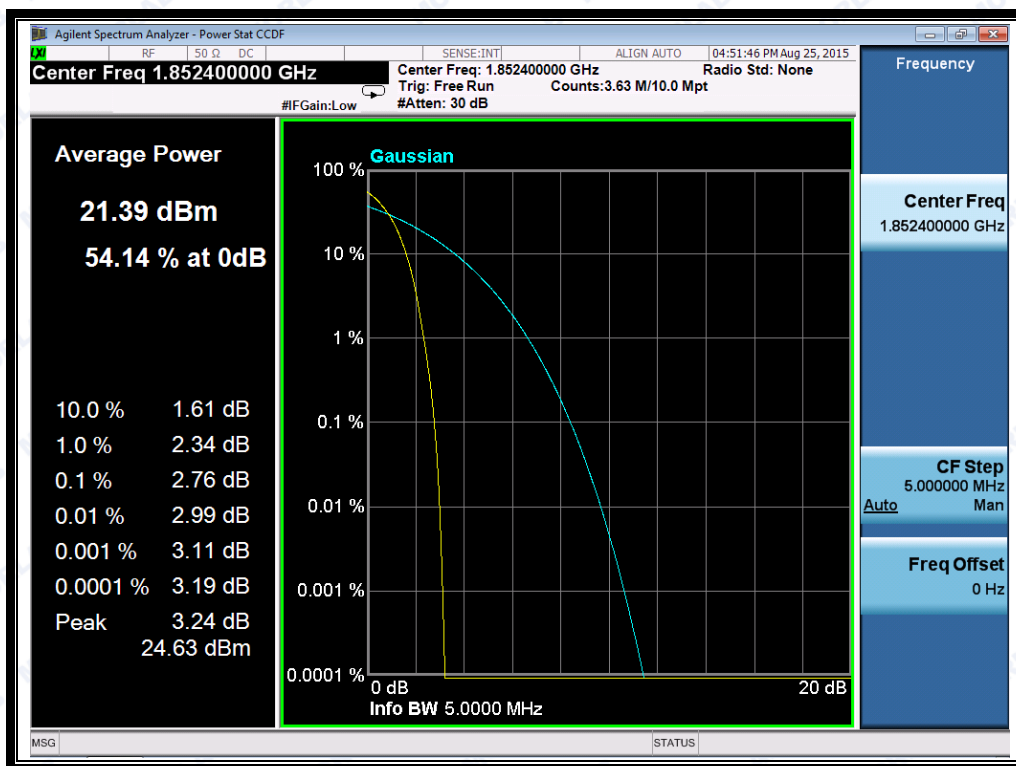


(Plot C1: WCDMA 1900MHz Channel = 9262)

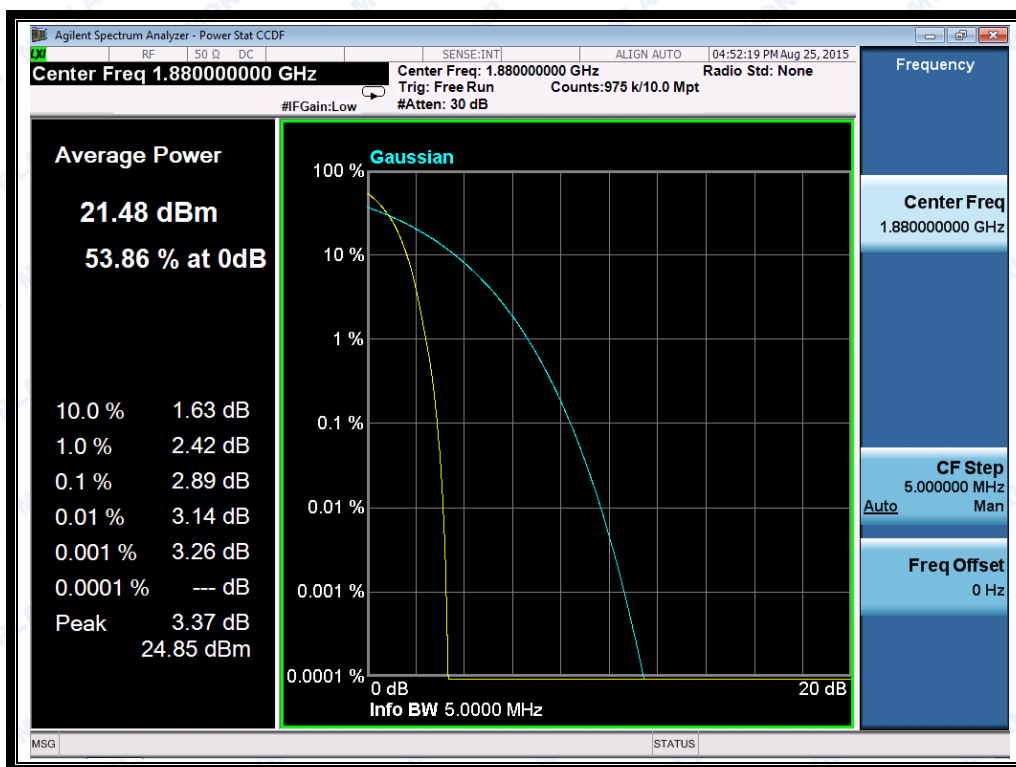


(Plot C2: WCDMA 1900MHz Channel = 9400)



REPORT No.: SZ15080014W01

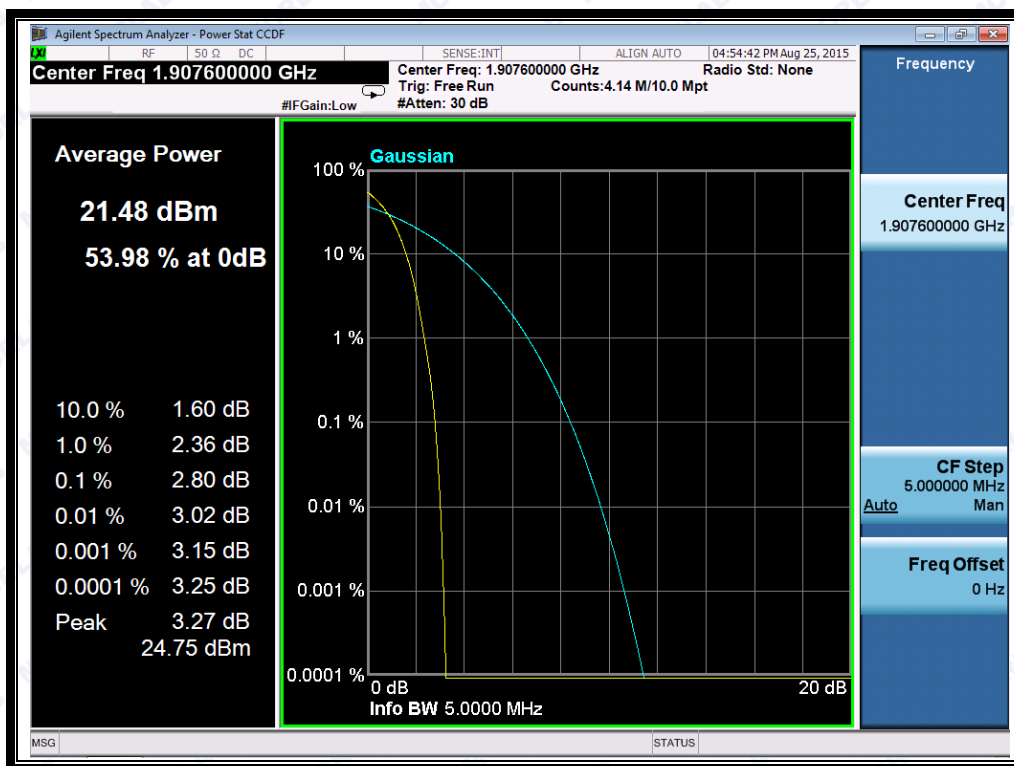


(Plot C3: WCDMA 1900MHz Channel = 9538)

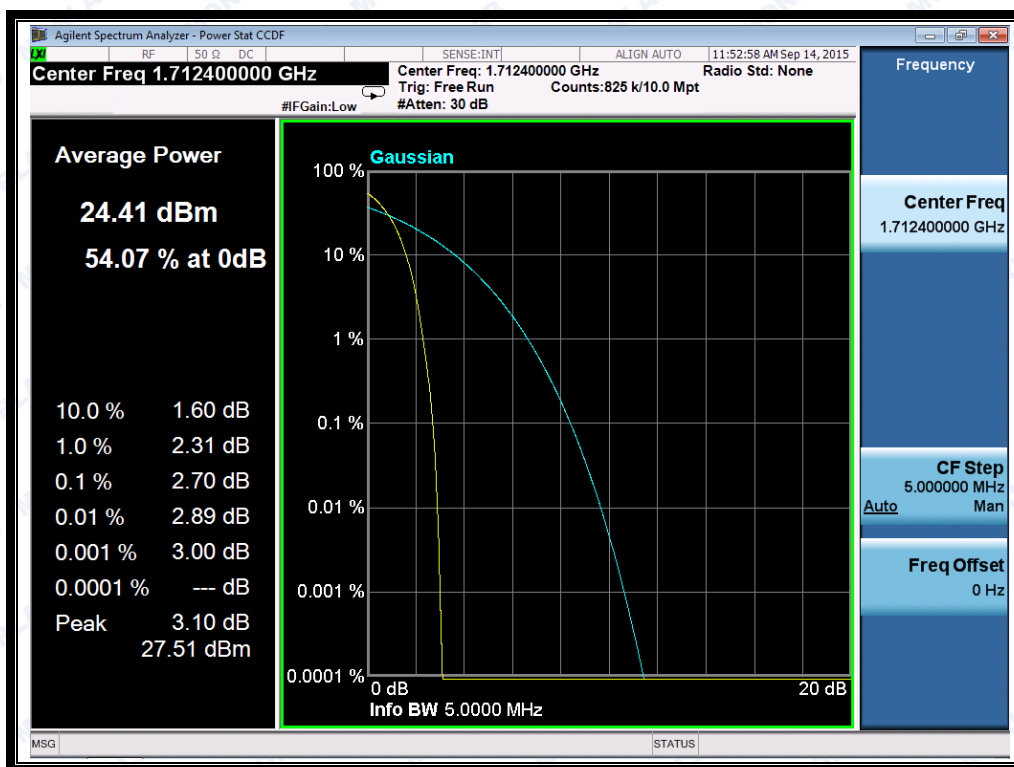


(Plot D1: WCDMA 1700MHz Channel = 1312)



REPORT No.: SZ15080014W01

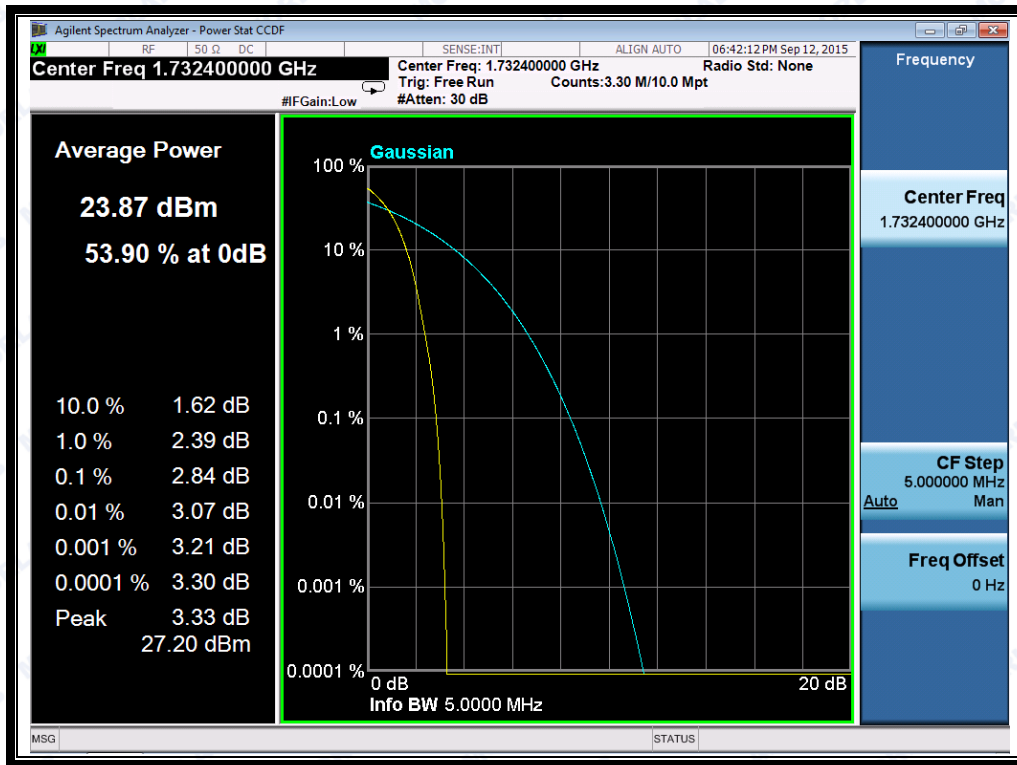

(Plot D2: WCDMA 1700MHz Channel = 1412)

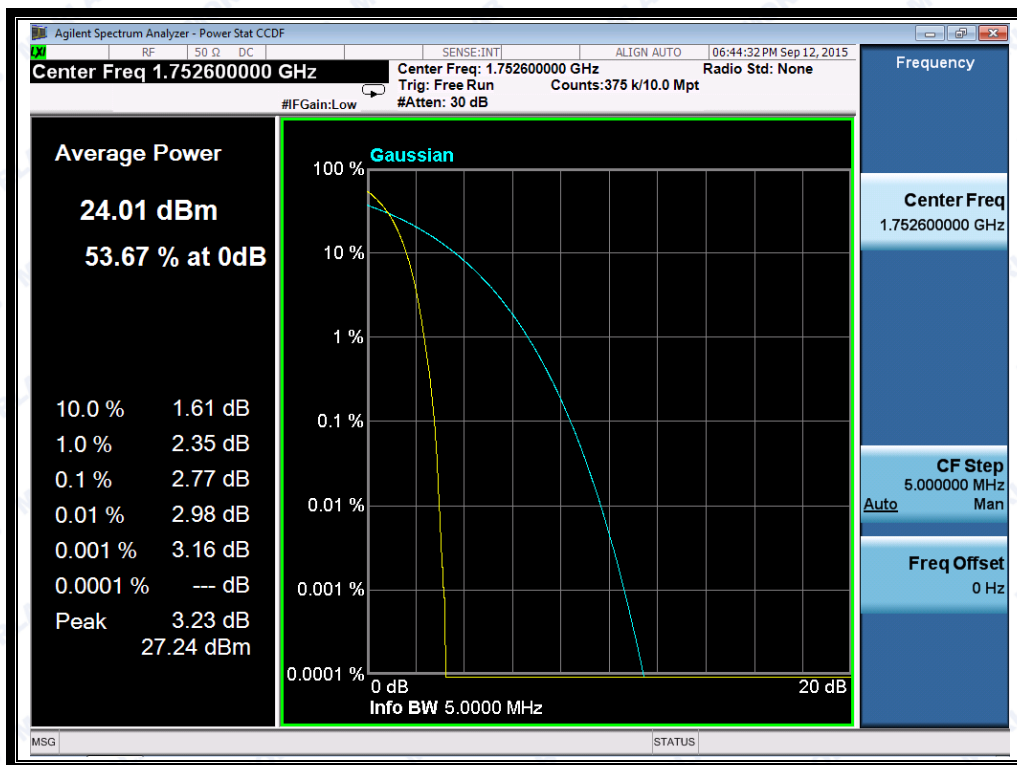

(Plot C3: WCDMA 1900MHz Channel = 9538)



2.3 99% Occupied Bandwidth

2.3.1 Definition

According to FCC section 2.1049 and FCC § 22.917 & 24.238 and 27.53(g), the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.

Test Verdict:

Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
GSM 850MHz	128	824.2	316.465 KHz	242.8320 KHz	Plot A1 to A3
	190	836.6	319.158 KHz	248.1033 KHz	
	251	848.8	319.402 KHz	246.2148 KHz	
GSM 1900MHz	512	1850.2	323.790 KHz	249.6639 KHz	Plot B1 to B3
	661	1880.0	318.273 KHz	251.8223 KHz	
	810	1909.8	322.476 KHz	249.8333 KHz	
GPRS 850MHz	128	824.2	323.892 KHz	246.1515 KHz	Plot C1 to C3
	190	836.6	324.439 KHz	245.7211 KHz	
	251	848.8	314.732 KHz	242.8854 KHz	
GPRS 1900MHz	512	1850.2	319.977 KHz	247.7318 KHz	Plot D1 to D3
	661	1880.0	319.299 KHz	247.7760 KHz	
	810	1909.8	323.871 KHz	244.3404 KHz	
EGPRS 850MHz	128	824.2	308.987 KHz	242.6781 KHz	Plot E1 to E3
	190	836.6	316.740 KHz	250.3156 KHz	
	251	848.8	322.246 KHz	247.7907 KHz	
EGPRS 1900MHz	512	1850.2	313.651 KHz	242.4814 KHz	Plot F1 to F3
	661	1880.0	314.079 KHz	248.7786 KHz	
	810	1909.8	322.878 KHz	253.7335 KHz	
WCDMA 850MHz	4132	826.4	4.628 MHz	4.1626 MHz	Plot G1 to G3
	4175	835.0	4.622 MHz	4.1505 MHz	
	4233	846.6	4.618 MHz	4.1413 MHz	




Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
WCDMA 1700MHz	1312	1712.4	4.694 MHz	4.1769 MHz	Plot H1 to H3
	1412	1732.4	4.691 MHz	4.1782 MHz	
	1513	1752.6	4.680 MHz	4.1734 MHz	
WCDMA 1900MHz	9262	1852.4	4.652 MHz	4.1712 MHz	Plot I1 to I3
	9400	1880.0	4.636 MHz	4.1650 MHz	
	9538	1907.6	4.651 MHz	4.1697 MHz	
HSDPA 850MHz	4132	826.4	4.635 MHz	4.1525 MHz	Plot J1 to J3
	4175	835.0	4.635 MHz	4.1551 MHz	
	4233	846.6	4.663 MHz	4.1427 MHz	
HSDPA 1700MHz	1312	1712.4	4.689 MHz	4.1823 MHz	Plot K1 to K3
	1412	1732.4	4.693 MHz	4.1823 MHz	
	1513	1752.6	4.690 MHz	4.1804 MHz	
HSDPA 1900MHz	9262	1852.4	4.662 MHz	4.1856 MHz	Plot L1 to L3
	9400	1880.0	4.644 MHz	4.1622 MHz	
	9538	1907.6	4.658 MHz	4.1707 MHz	
HSUPA 850MHz	4132	826.4	4.634 MHz	4.1476 MHz	Plot M1 to M3
	4175	835.0	4.628 MHz	4.1595 MHz	
	4233	846.6	4.635 MHz	4.1456 MHz	
HSUPA 1700MHz	1312	1712.4	4.683 MHz	4.1783 MHz	Plot N1 to N3
	1412	1732.4	4.690 MHz	4.1788 MHz	
	1513	1752.6	4.697 MHz	4.1810 MHz	
HSUPA 1900MHz	9262	1852.4	4.666 MHz	4.1874 MHz	Plot O1 to O3
	9400	1880.0	4.646 MHz	4.1711 MHz	
	9538	1907.6	4.670 MHz	4.1745 MHz	




REPORT No.: SZ15080014W01

Test Plots:

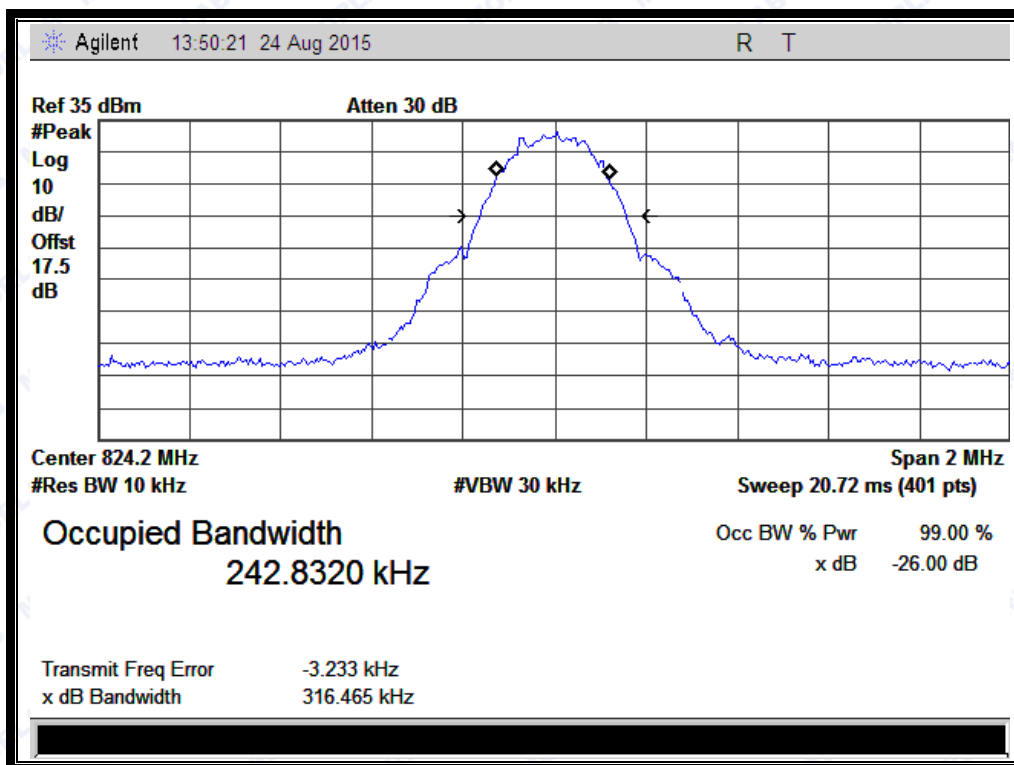


(Plot A1: GSM 850MHz Channel = 128)

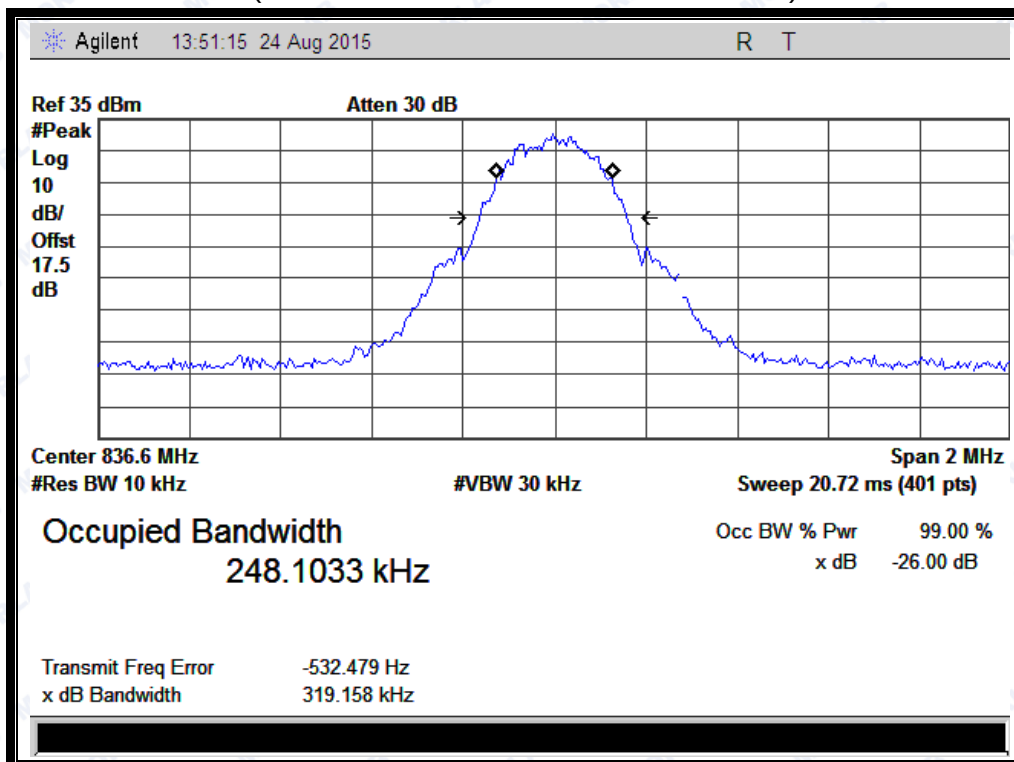


(Plot A2: GSM 850MHz Channel = 190)



REPORT No.: SZ15080014W01

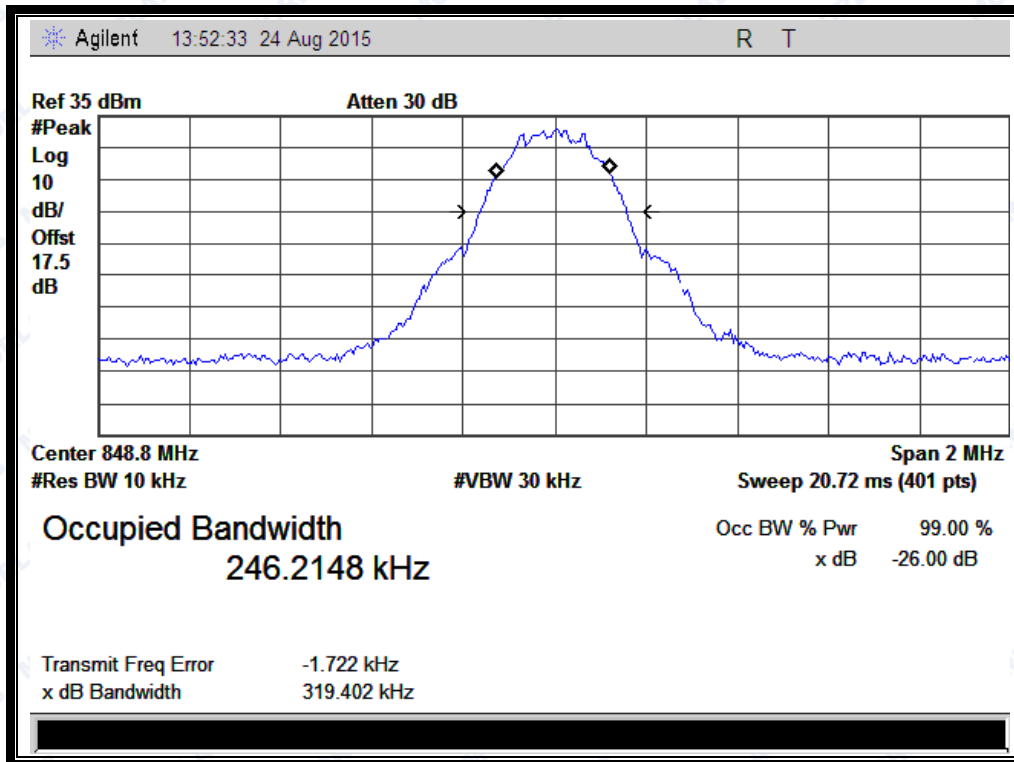


(Plot A3: GSM 850MHz Channel = 251)

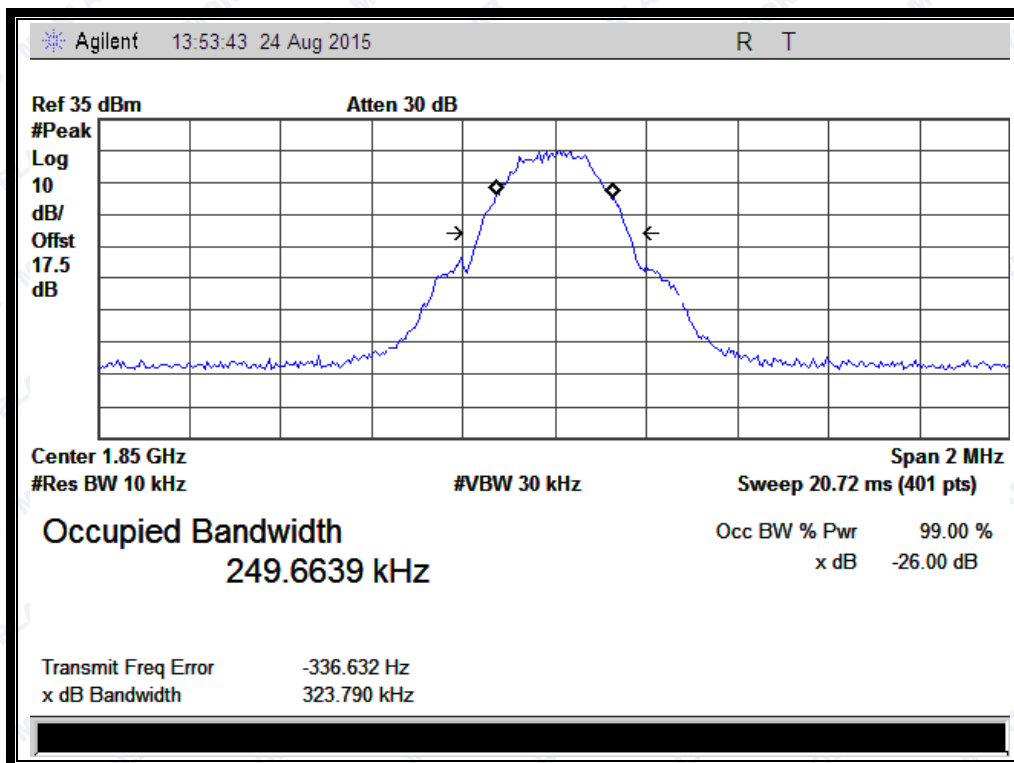


(Plot B1: GSM1900MHz Channel = 512)



REPORT No.: SZ15080014W01

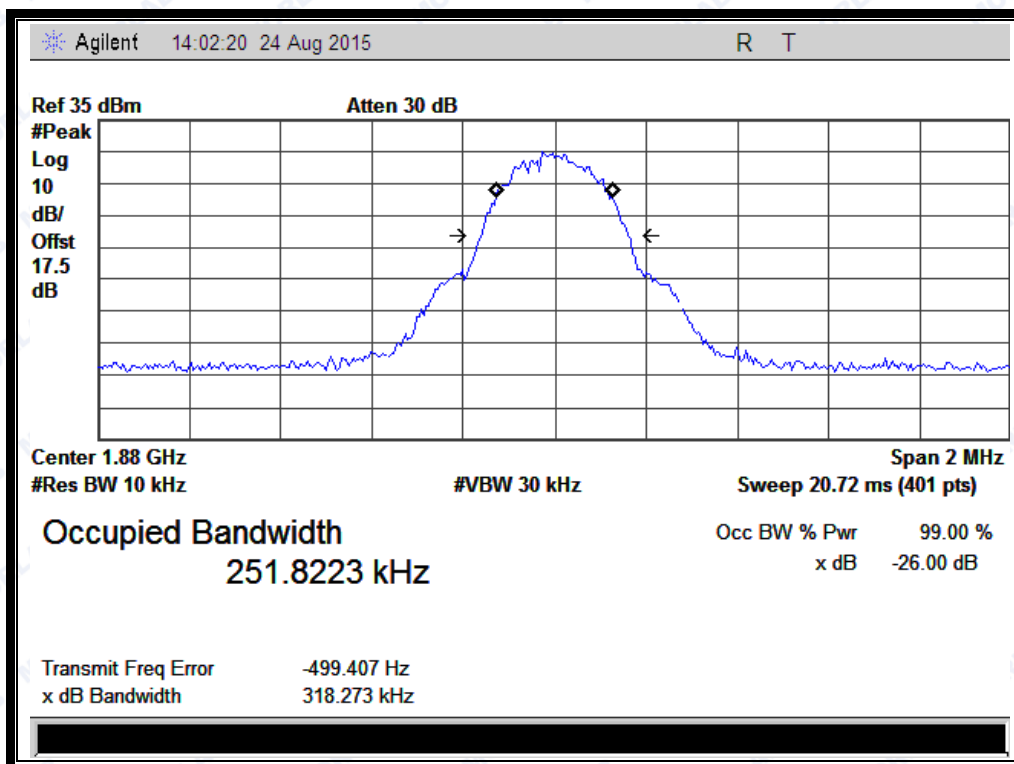


(Plot B2: GSM1900MHz Channel = 661)

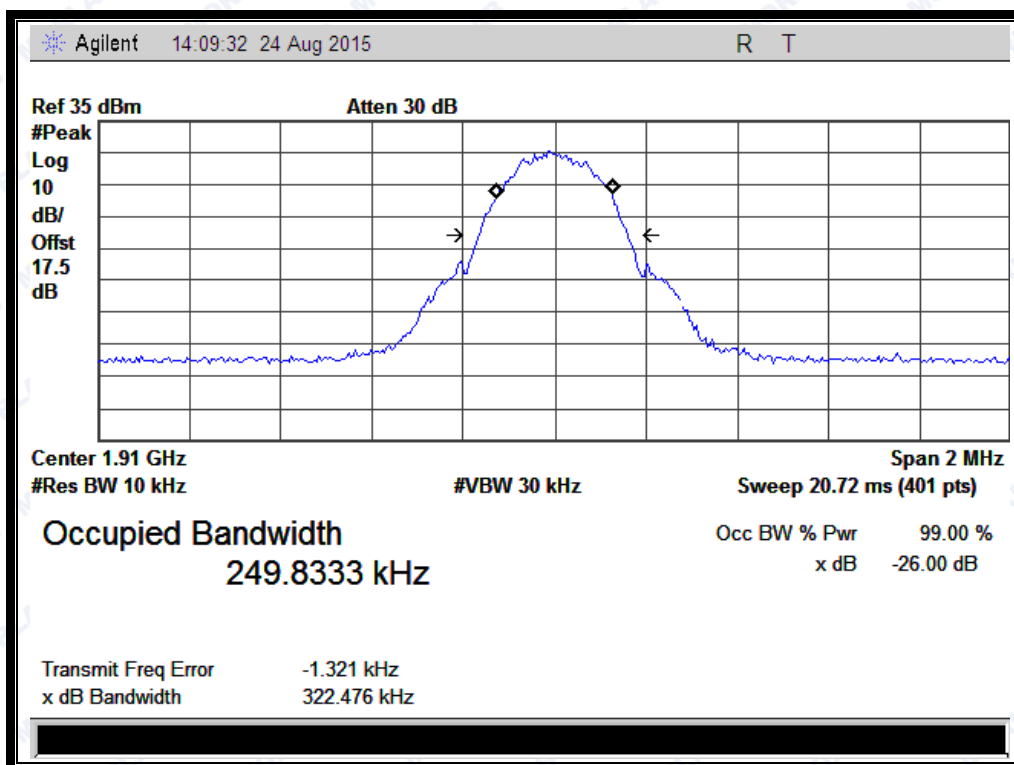


(Plot B3: GSM 1900MHz Channel = 810)



REPORT No.: SZ15080014W01

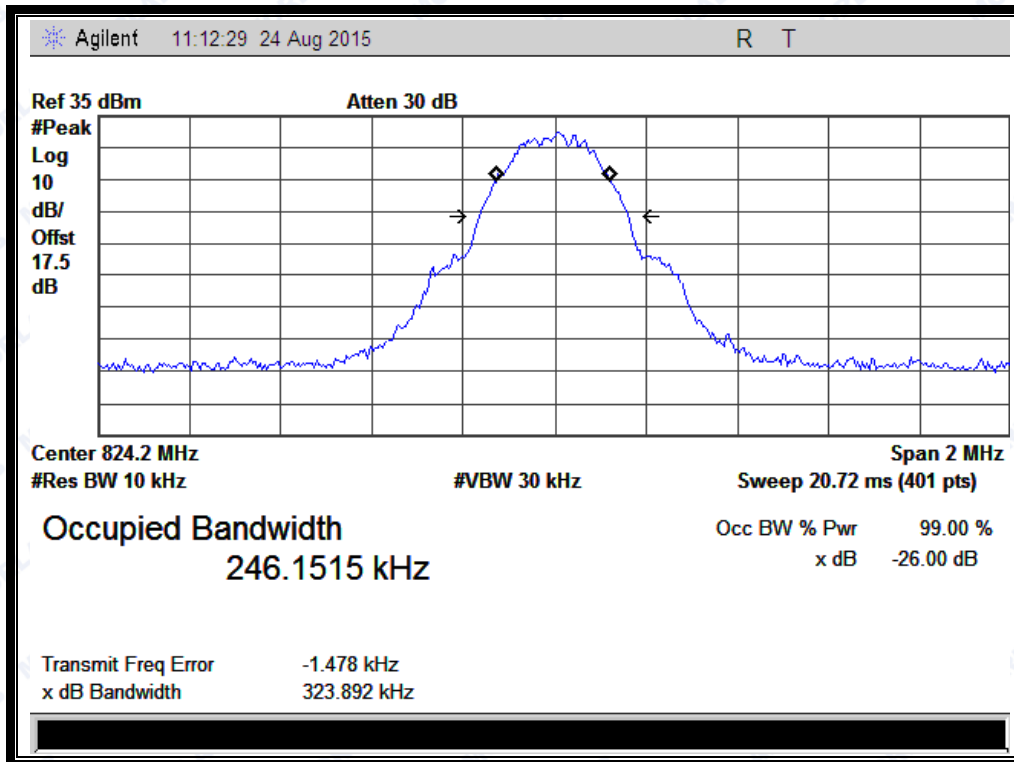


(Plot C1: GPRS 850MHz Channel = 128)

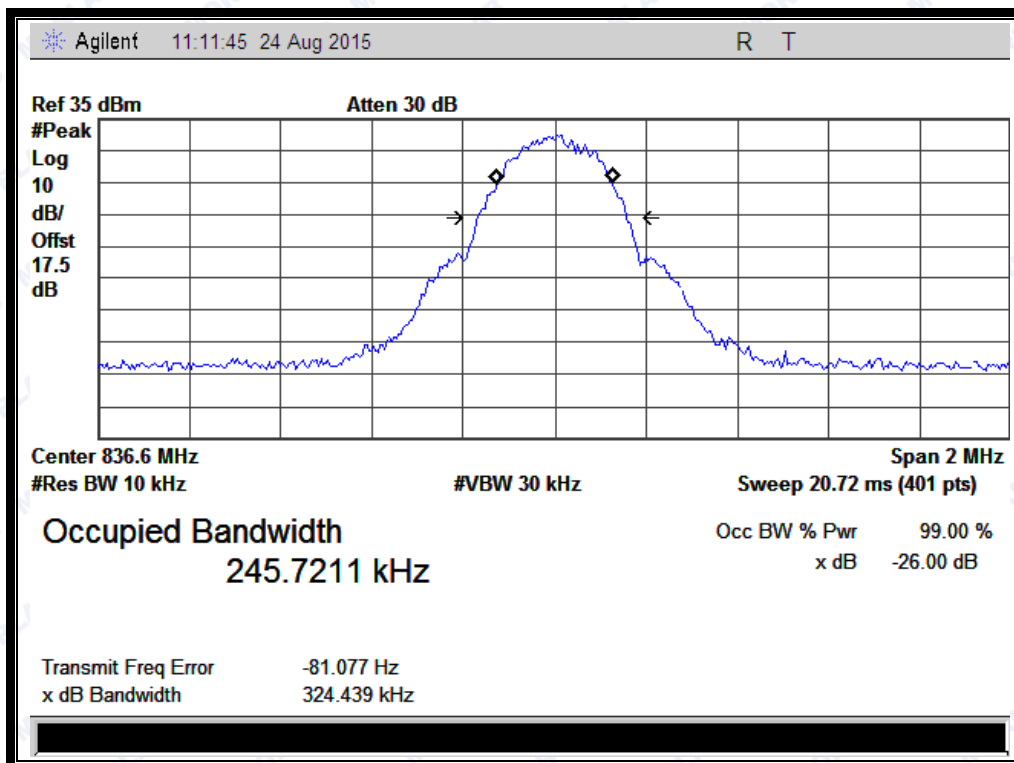


(Plot C2: GPRS 850MHz Channel = 190)



REPORT No.: SZ15080014W01

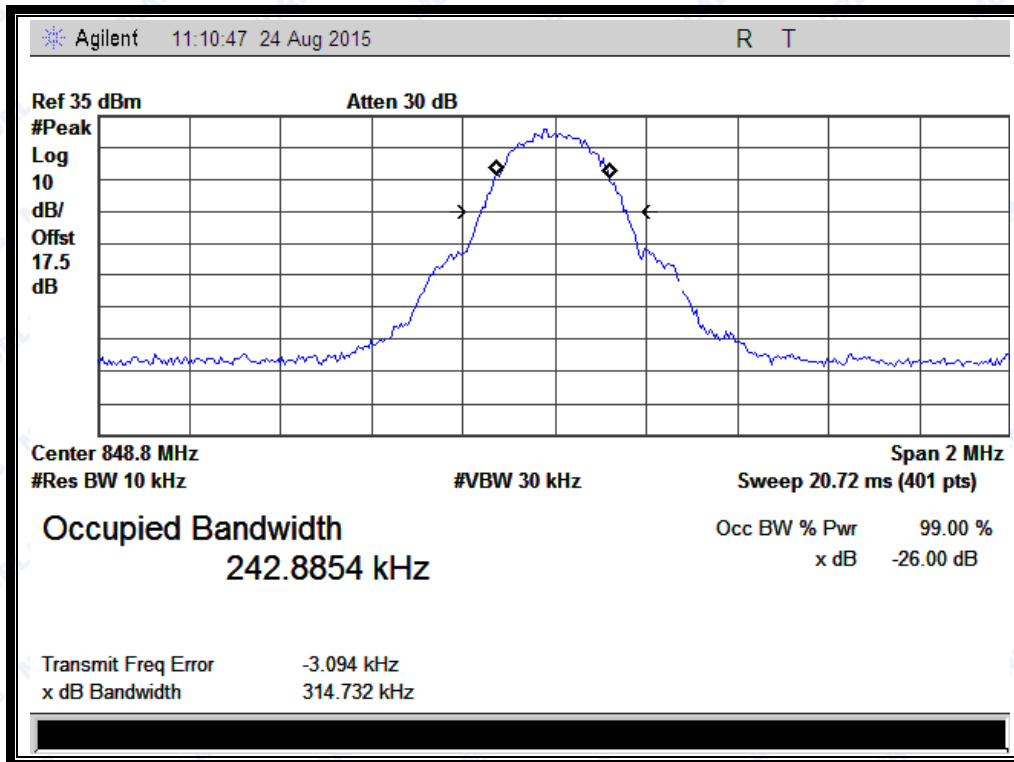


(Plot C3: GPRS 850MHz Channel = 251)

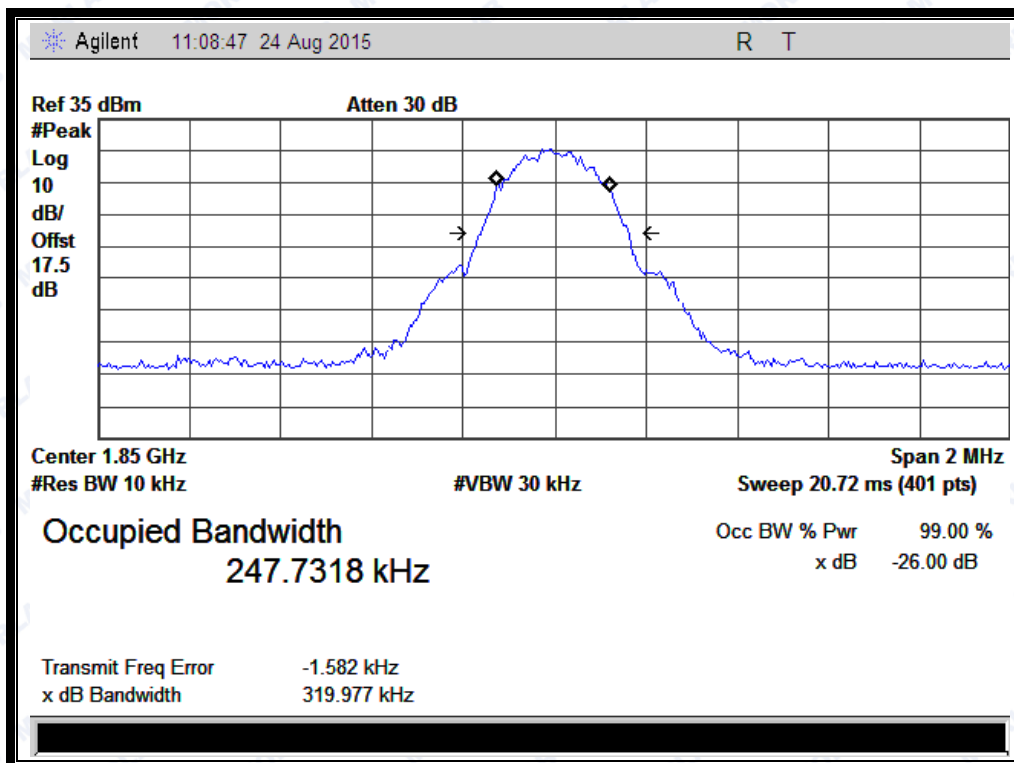


(Plot D1: GPRS1900MHz Channel = 512)



REPORT No.: SZ15080014W01

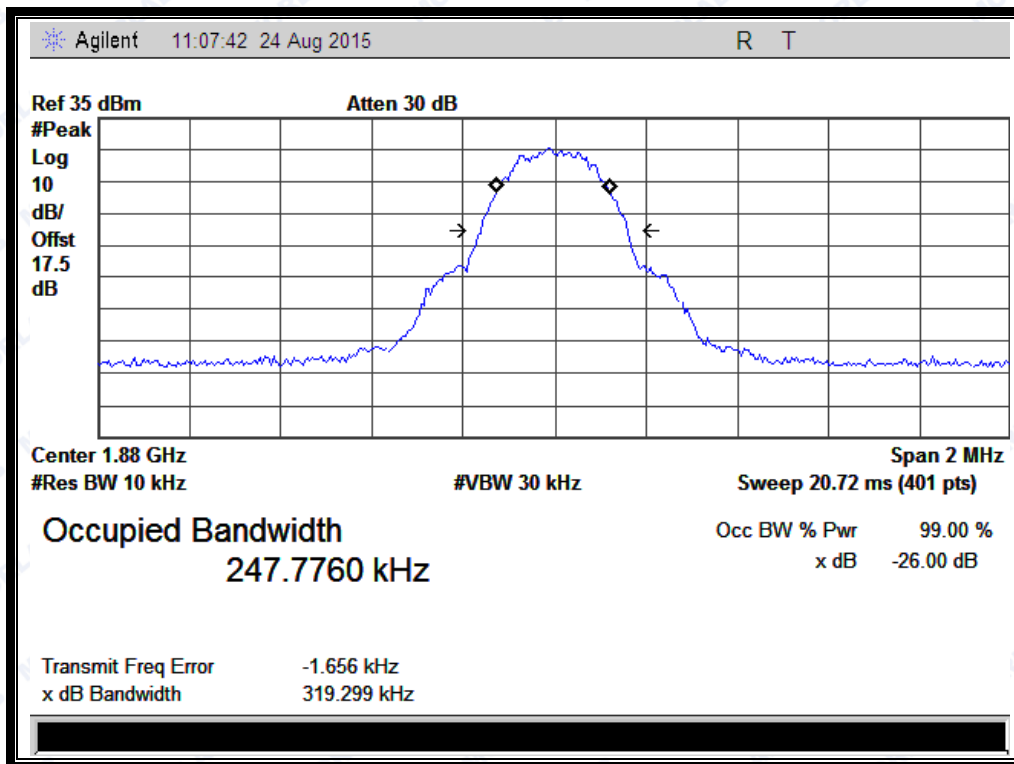


(Plot D2: GPRS1900MHz Channel = 661)

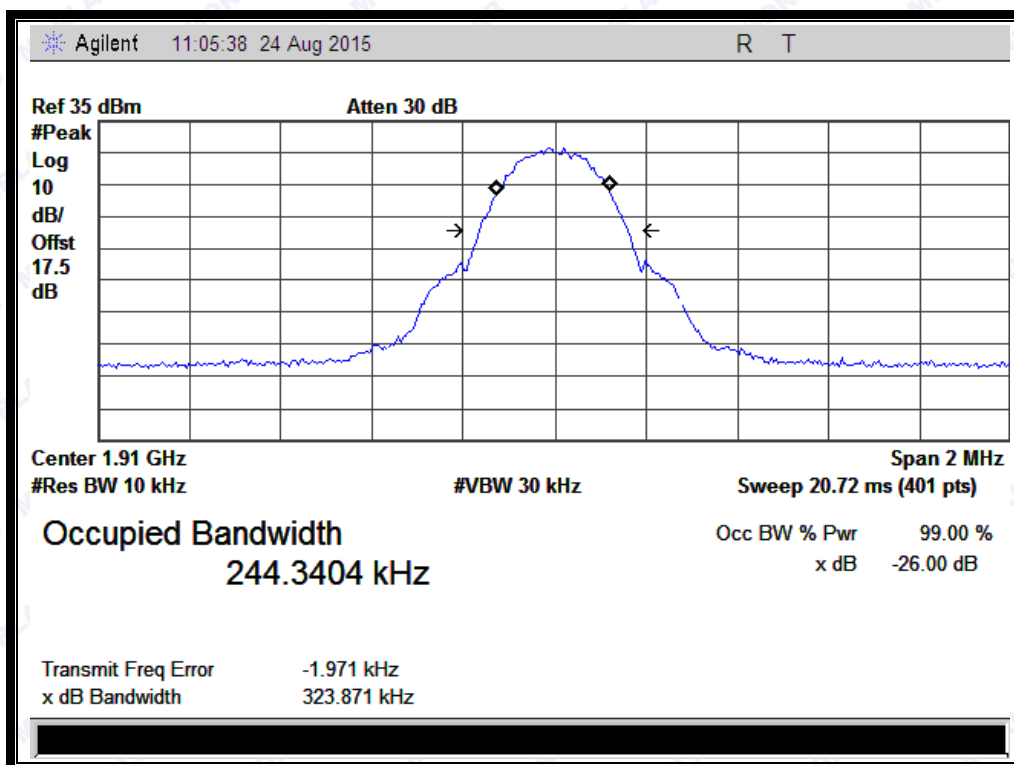


(Plot D3: GPRS 1900MHz Channel = 810)



REPORT No.: SZ15080014W01

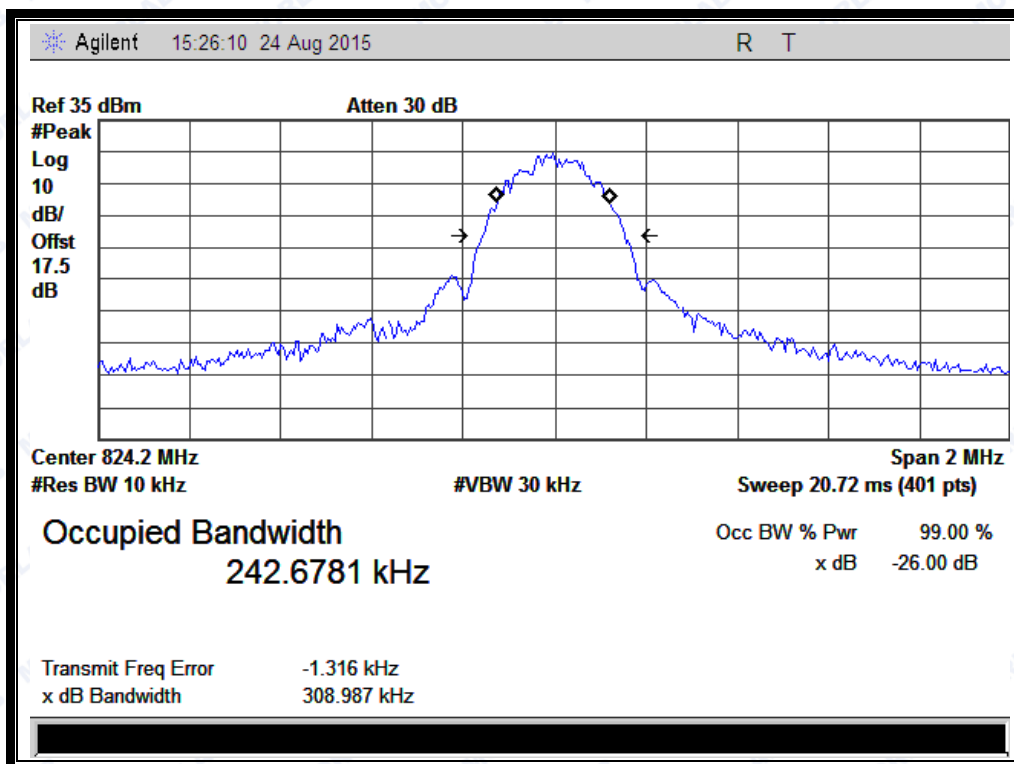


(Plot E1: EGPRS 850MHz Channel = 128)

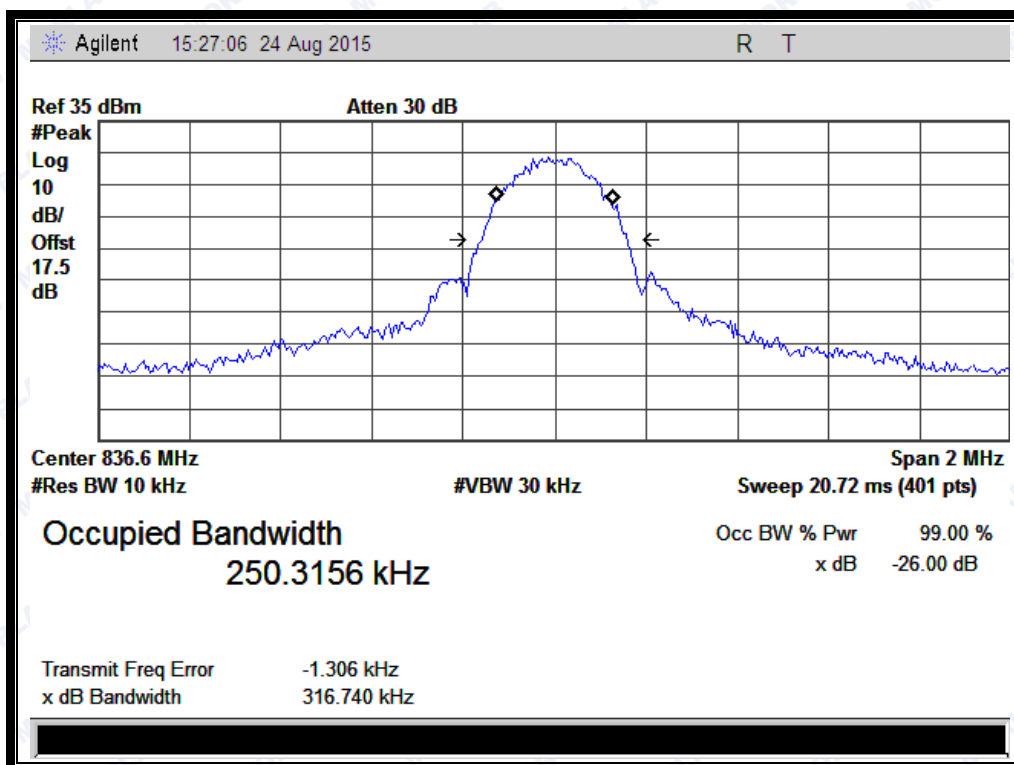


(Plot E2: EGPRS 850MHz Channel = 190)



REPORT No.: SZ15080014W01

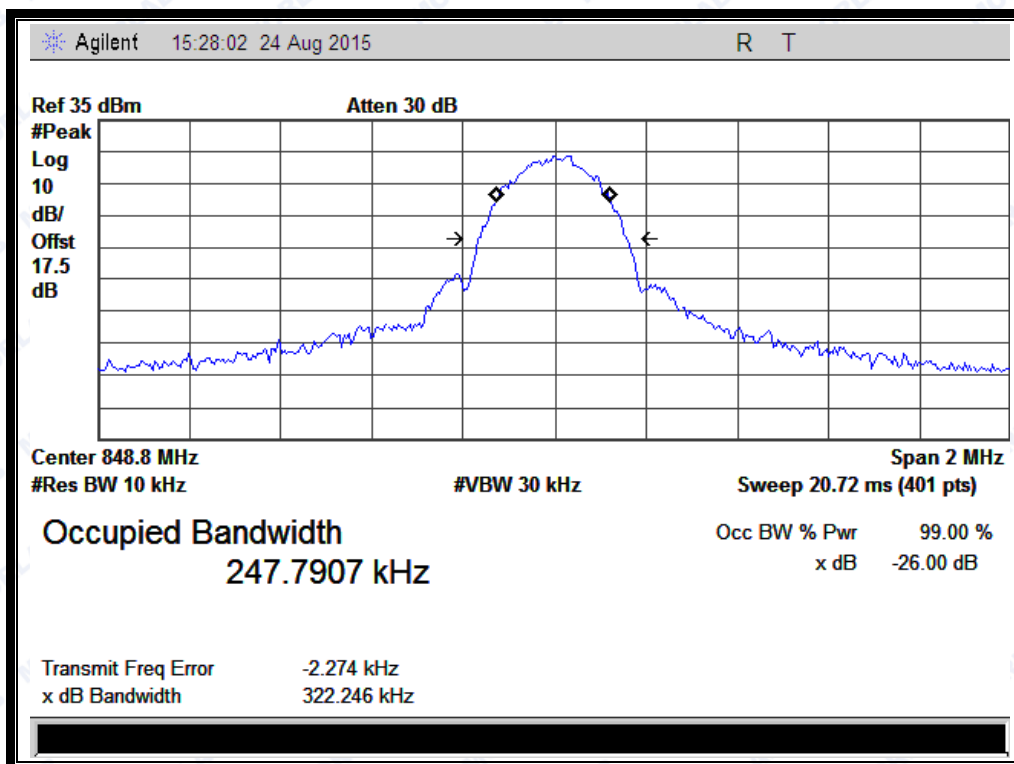


(Plot E3: EGPRS 850MHz Channel = 251)

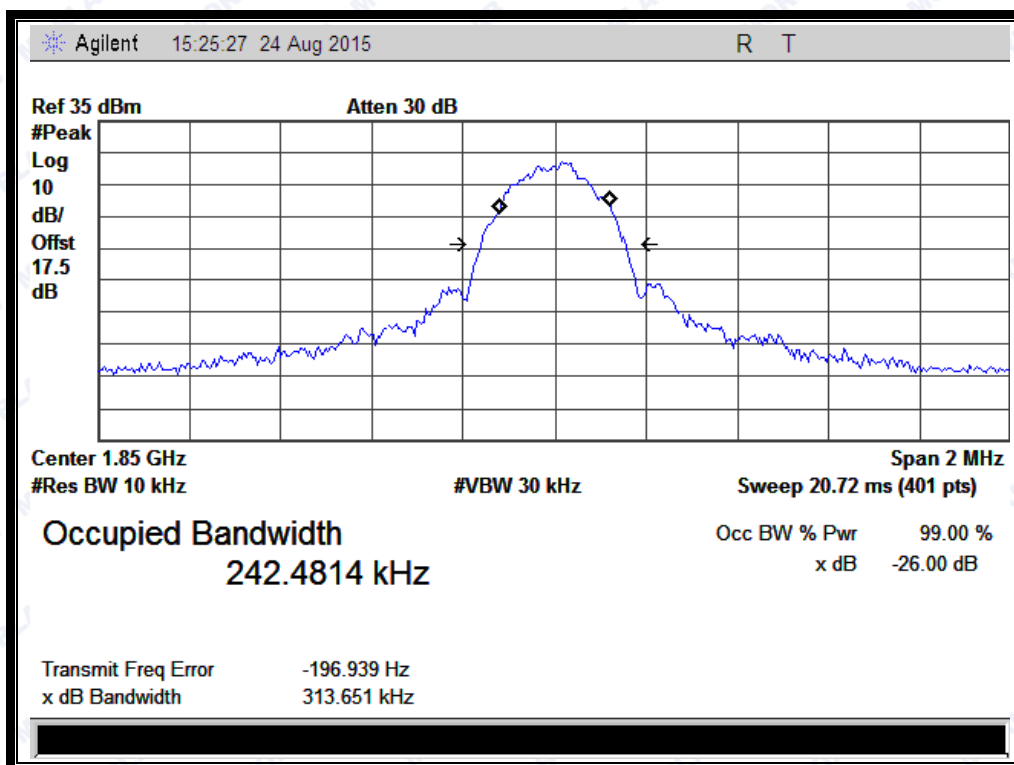


(Plot F1: EGPRS1900MHz Channel = 512)



REPORT No.: SZ15080014W01

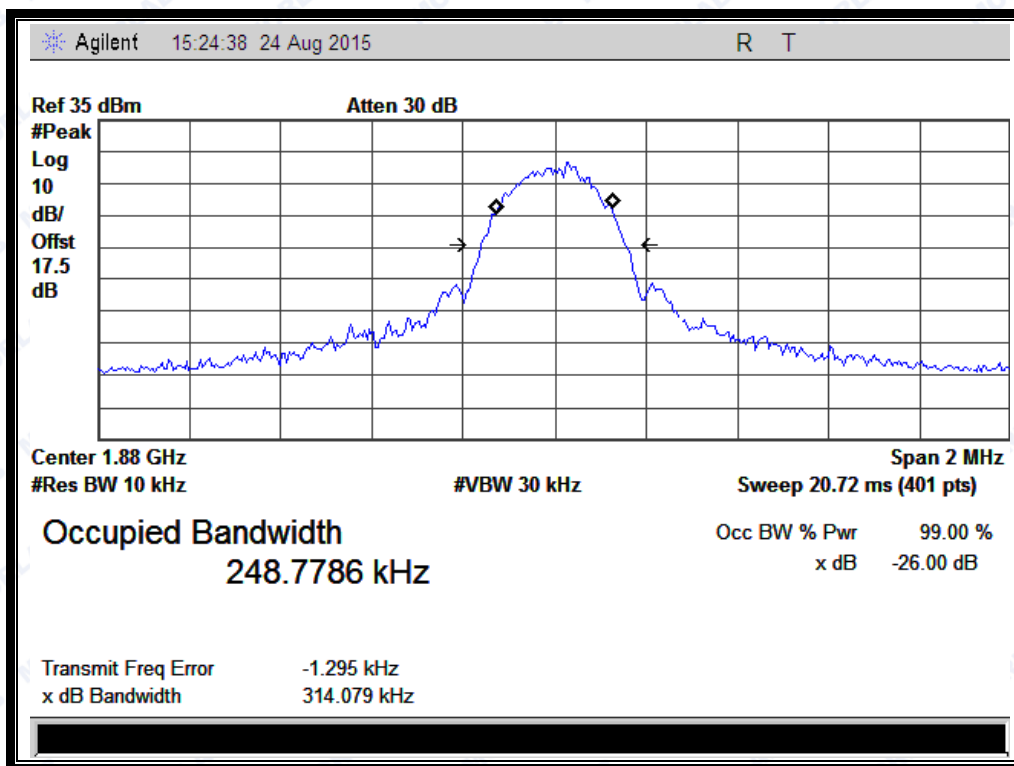


(Plot F2: EGPRS1900MHz Channel = 661)

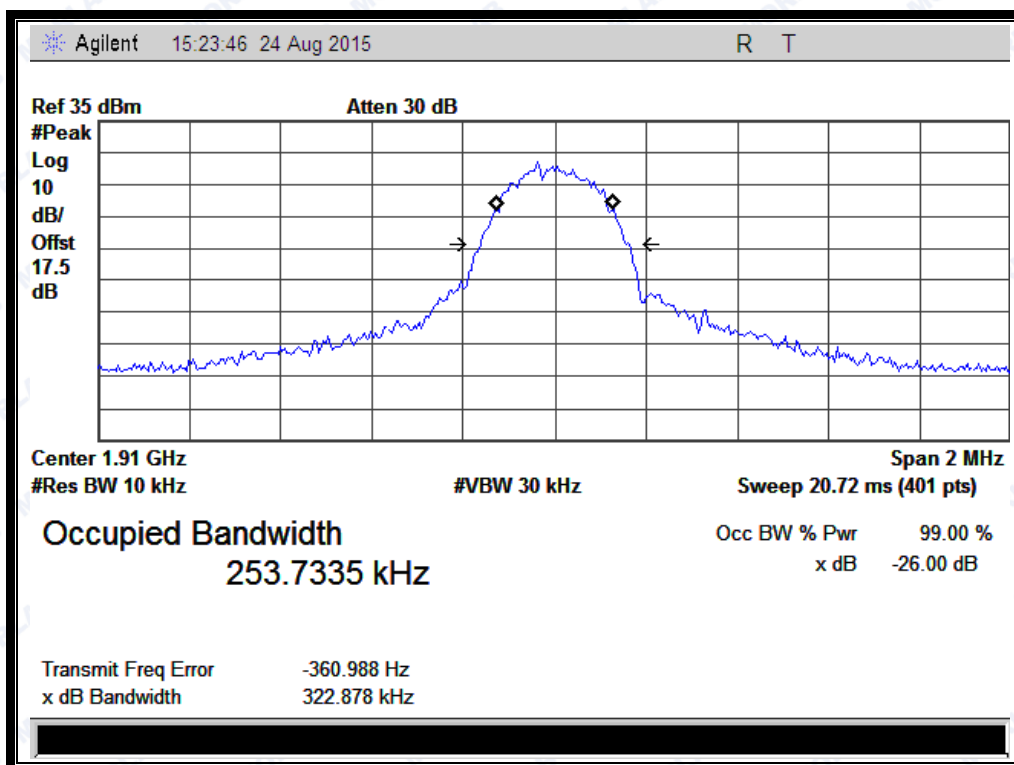


(Plot F3: EGPRS 1900MHz Channel = 810)



REPORT No.: SZ15080014W01

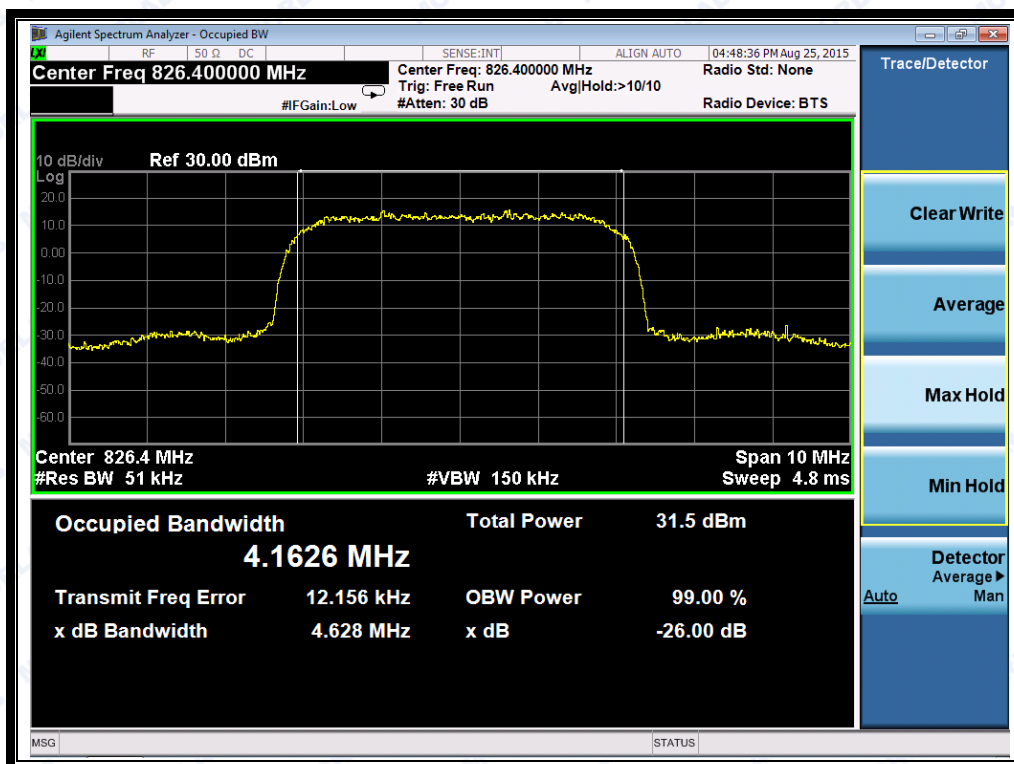


(Plot G1: WCDMA 850MHz Channel = 4132)

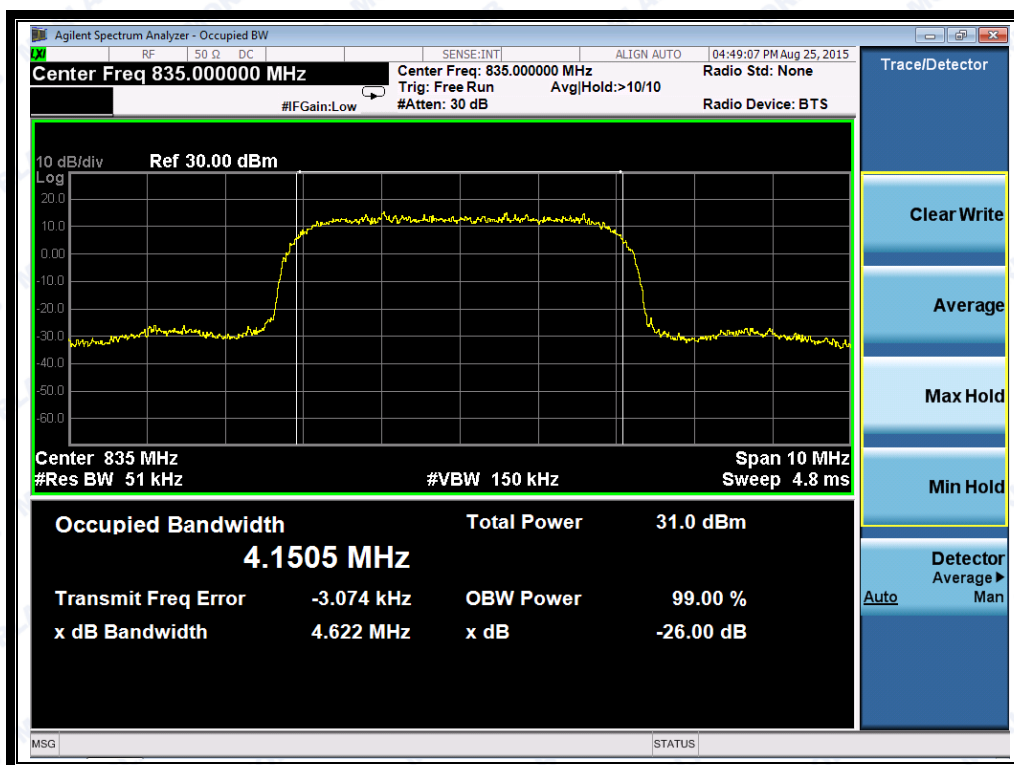


(Plot G2: WCDMA 850 MHz Channel = 4175)



REPORT No.: SZ15080014W01

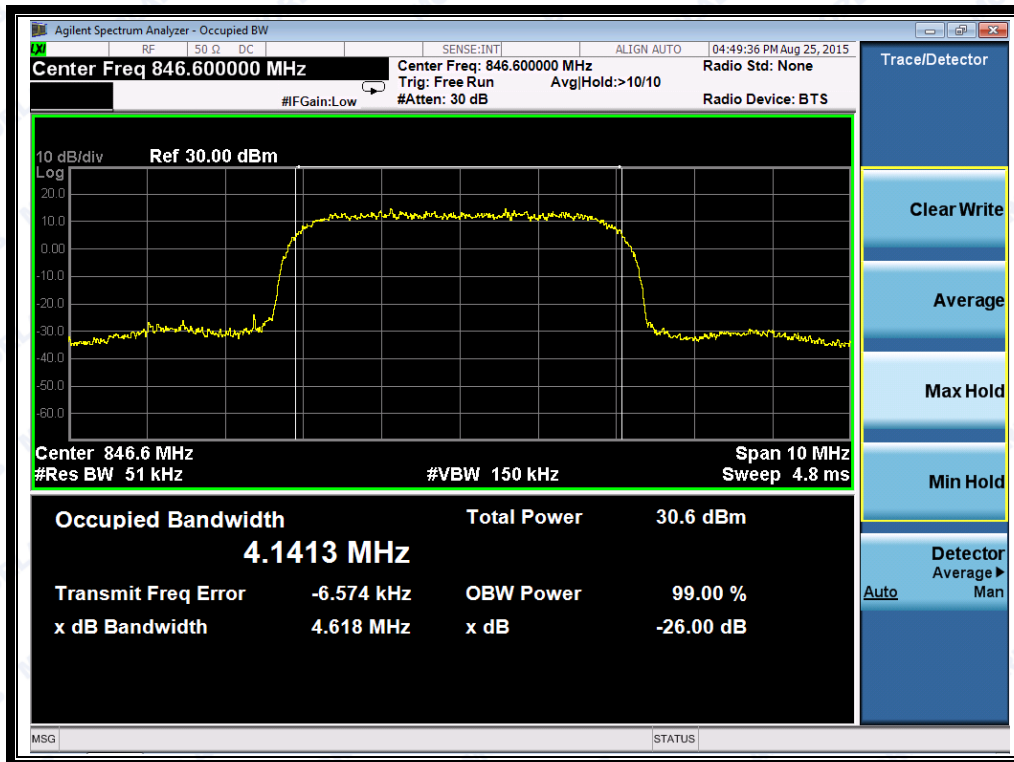


(Plot G3: WCDMA 850MHz Channel = 4233)

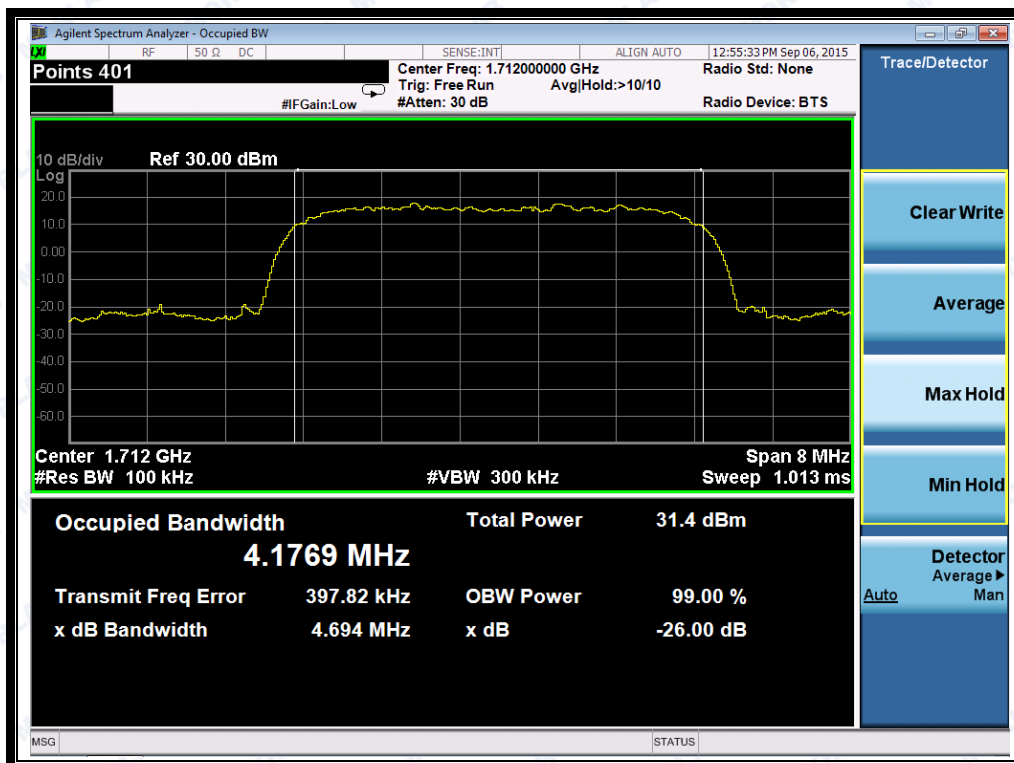


(Plot H1: WCDMA 1700MHz Channel = 1513)



REPORT No.: SZ15080014W01

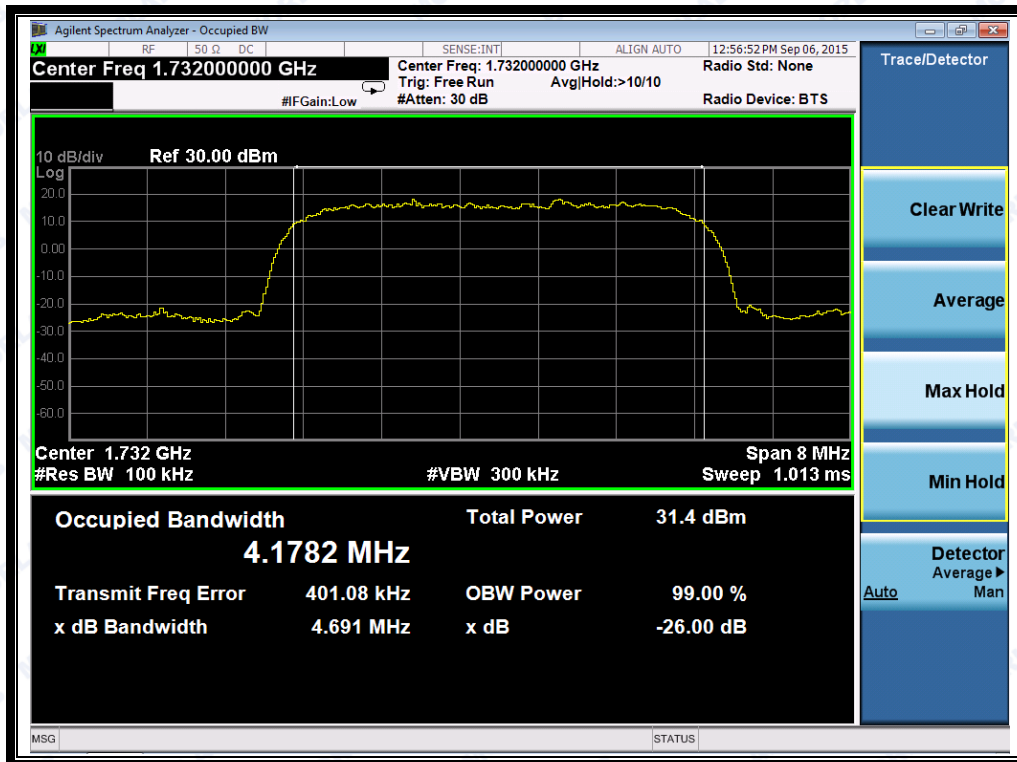


(Plot H2: WCDMA 1700 MHz Channel = 1513)

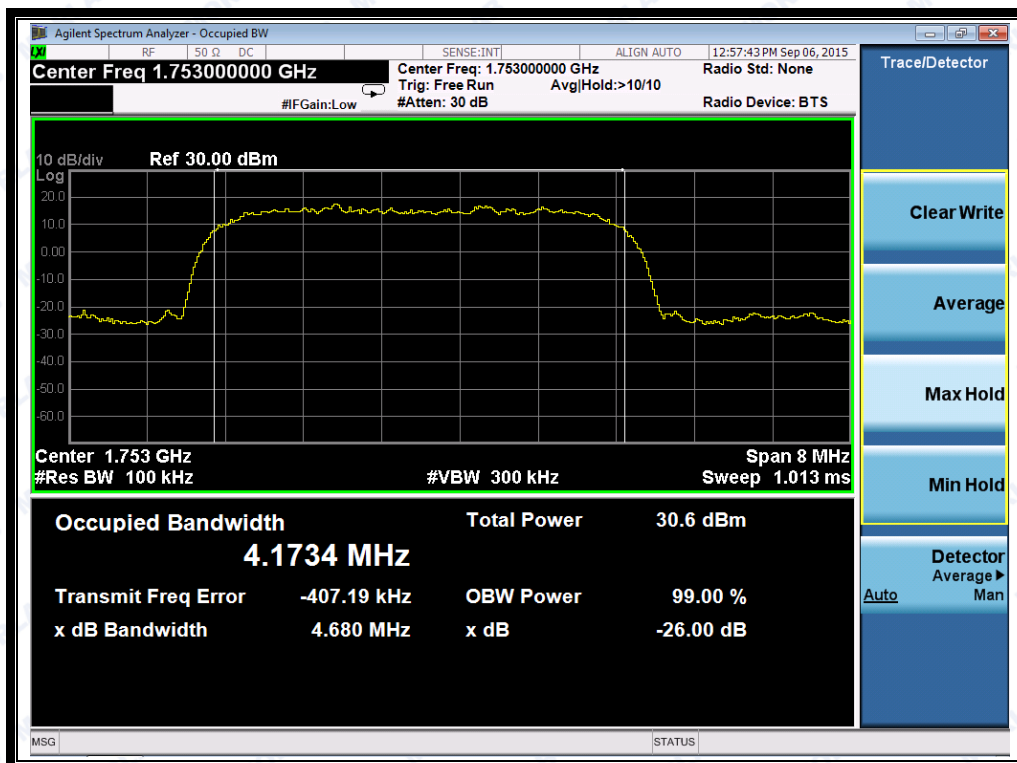


(Plot H3: WCDMA1700MHz Channel = 1513)



REPORT No.: SZ15080014W01

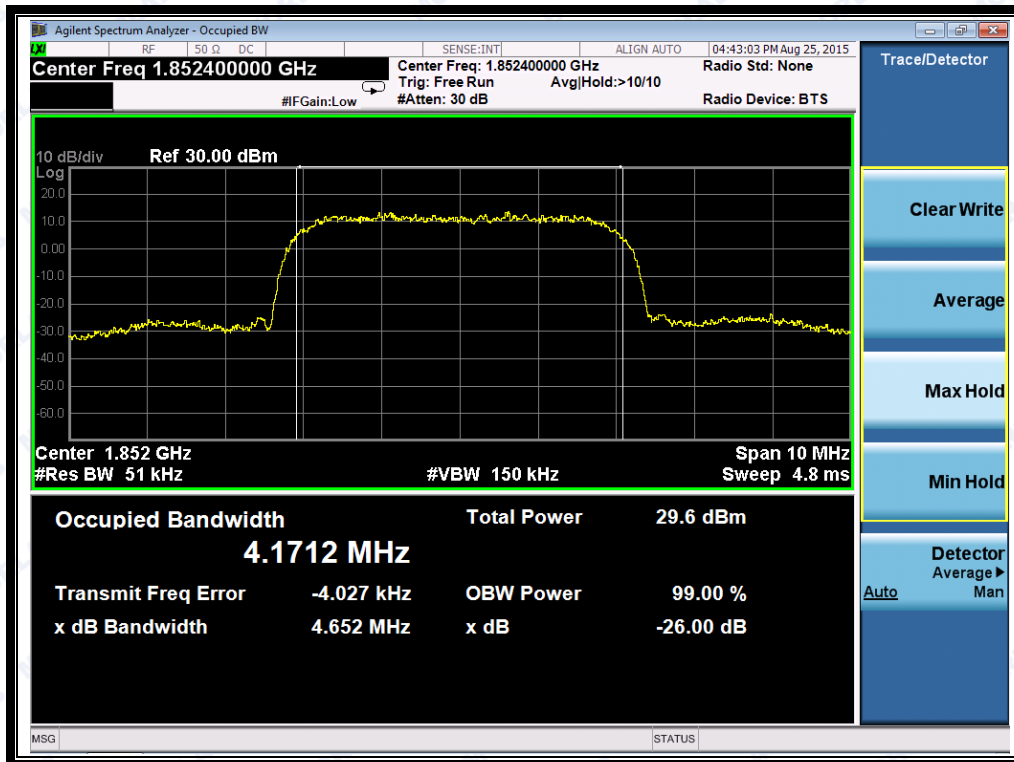


(Plot I1: WCDMA 1900MHz Channel = 9262)

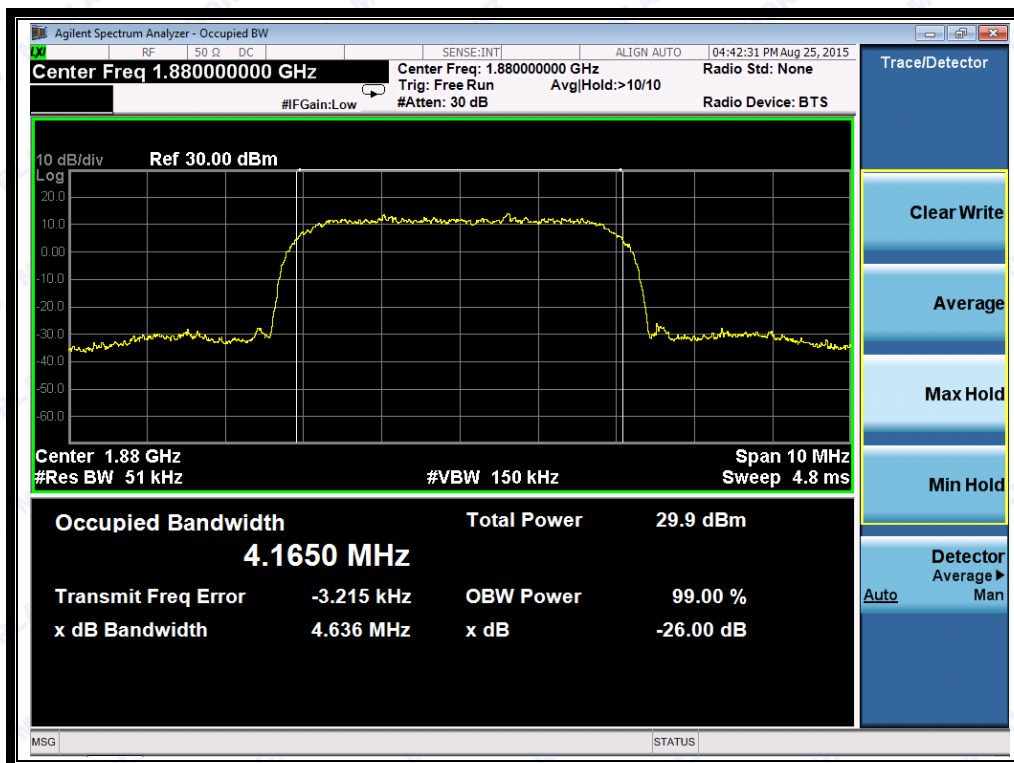


(Plot I2: WCDMA 1900 MHz Channel = 9400)



REPORT No.: SZ15080014W01

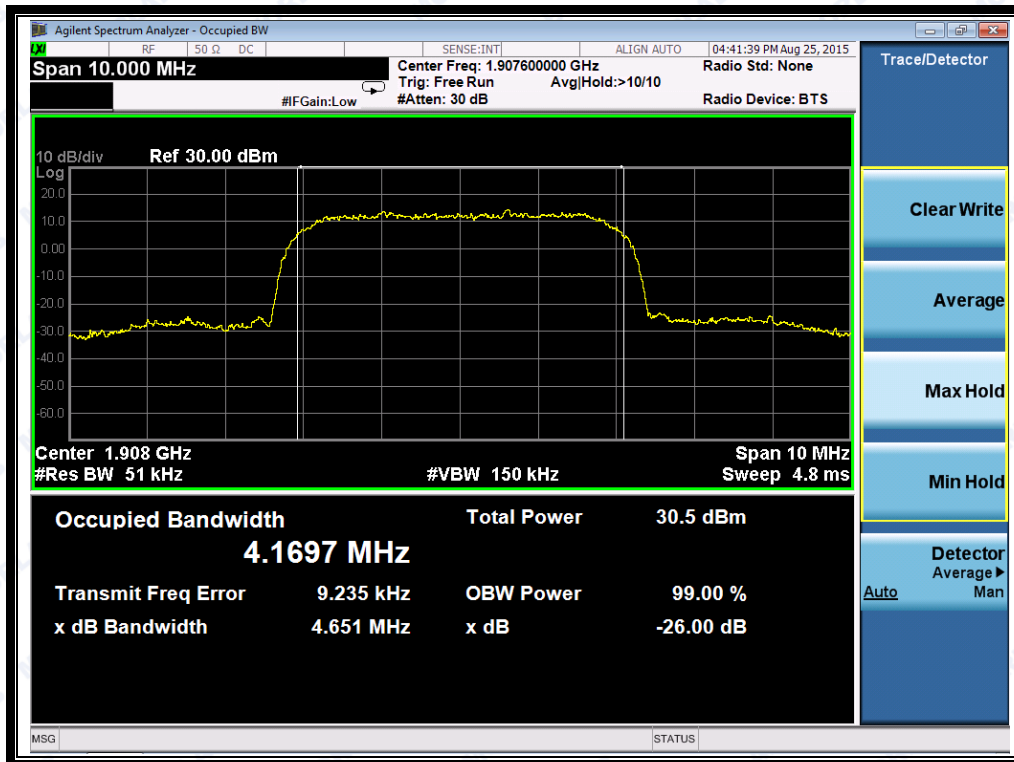


(Plot I3: WCDMA1900MHz Channel = 9538)

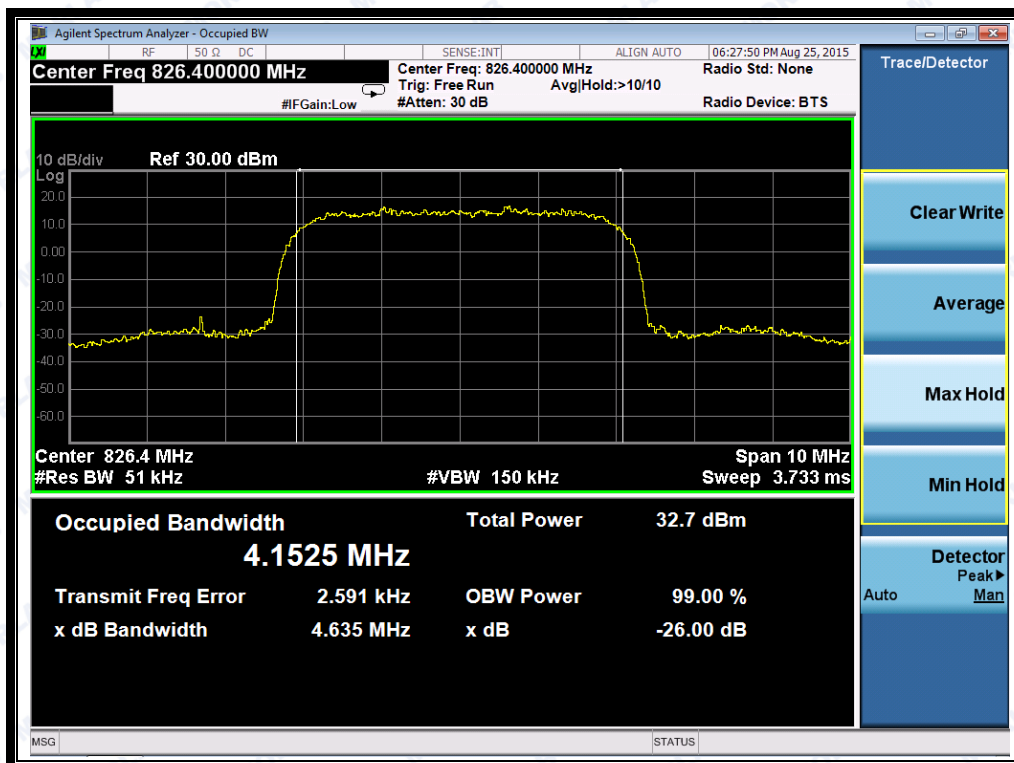


(Plot J1: HSDPA 850MHz Channel = 4132)



REPORT No.: SZ15080014W01

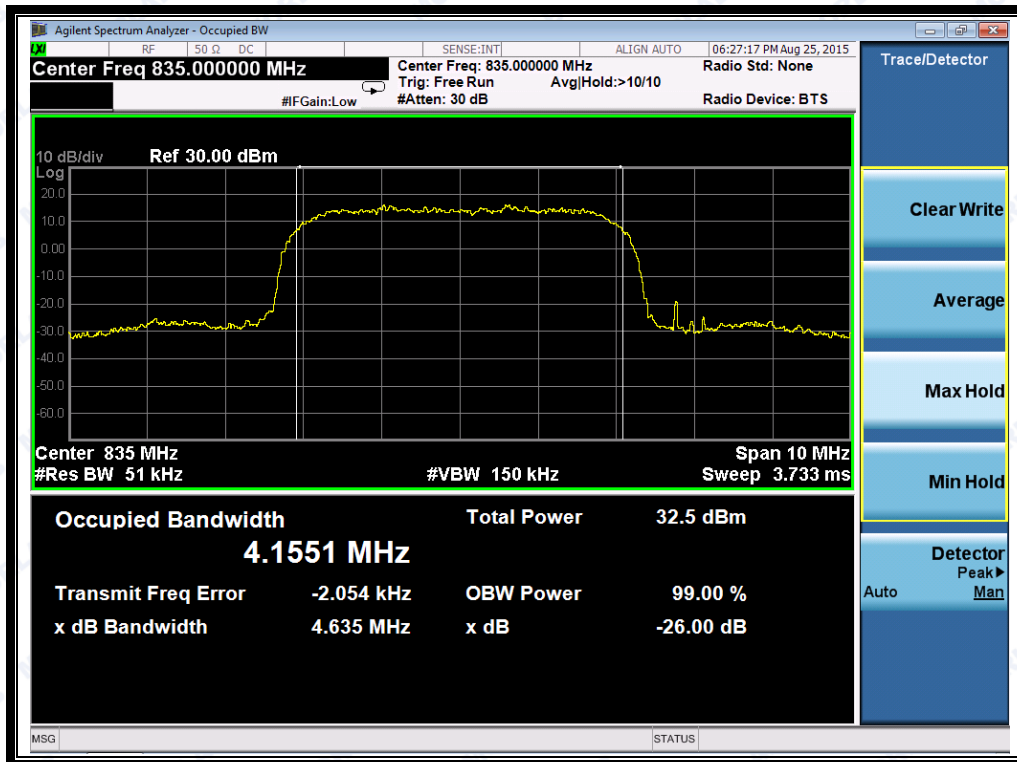


(Plot J2: HSDPA 850 MHz Channel = 4175)

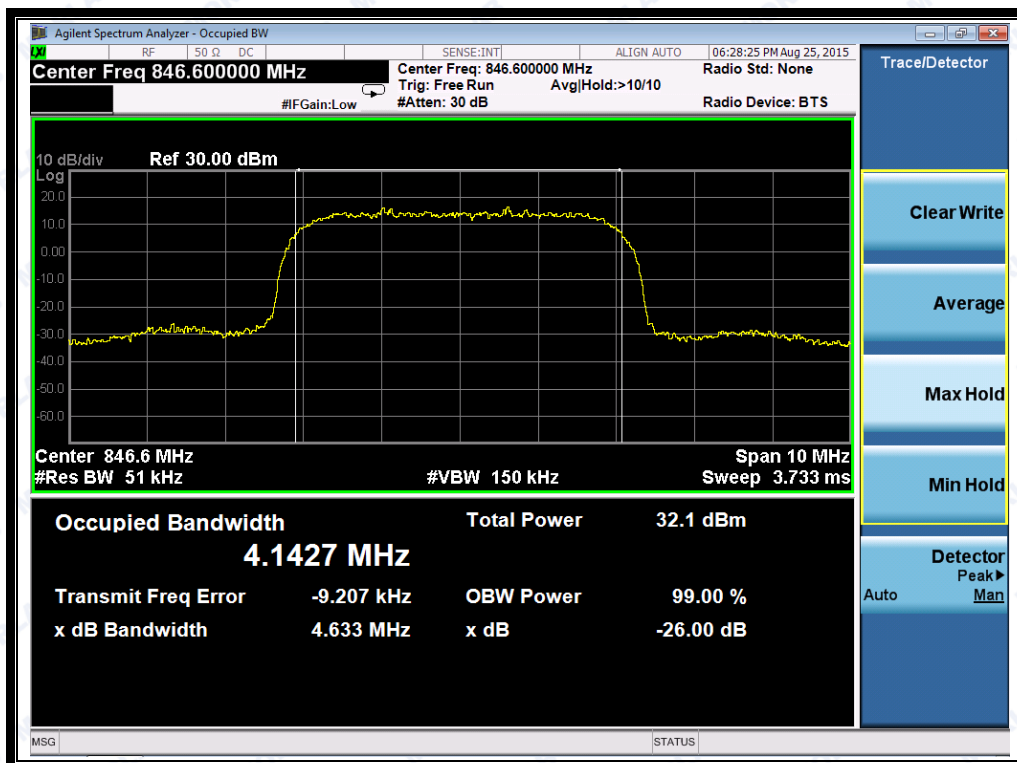


(Plot J3: HSDPA 850MHz Channel = 4233)



REPORT No.: SZ15080014W01

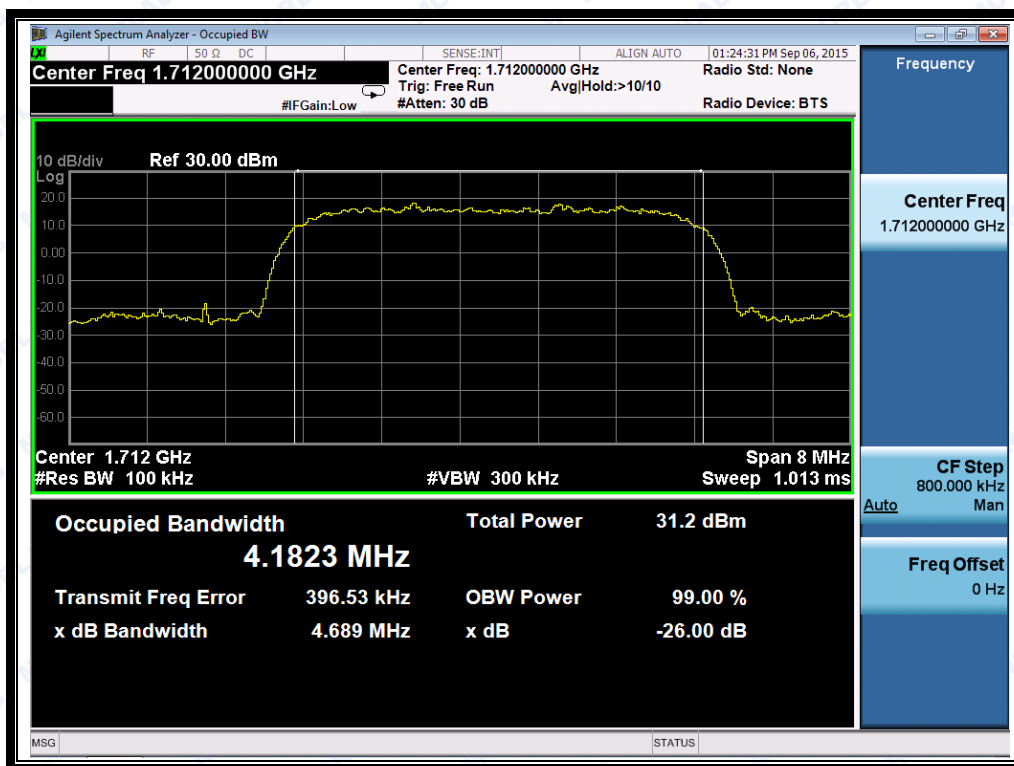


(Plot K1: HSDPA 1700MHz Channel = 1312)

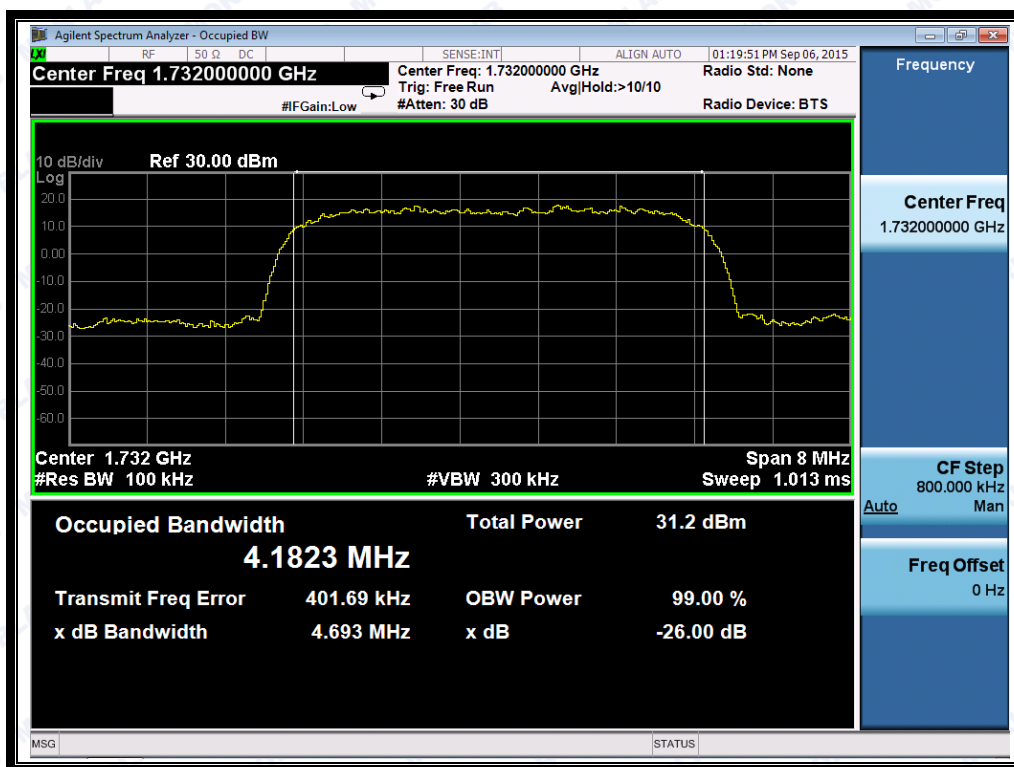


(Plot K2: HSDPA 1700 MHz Channel = 1412)



REPORT No.: SZ15080014W01

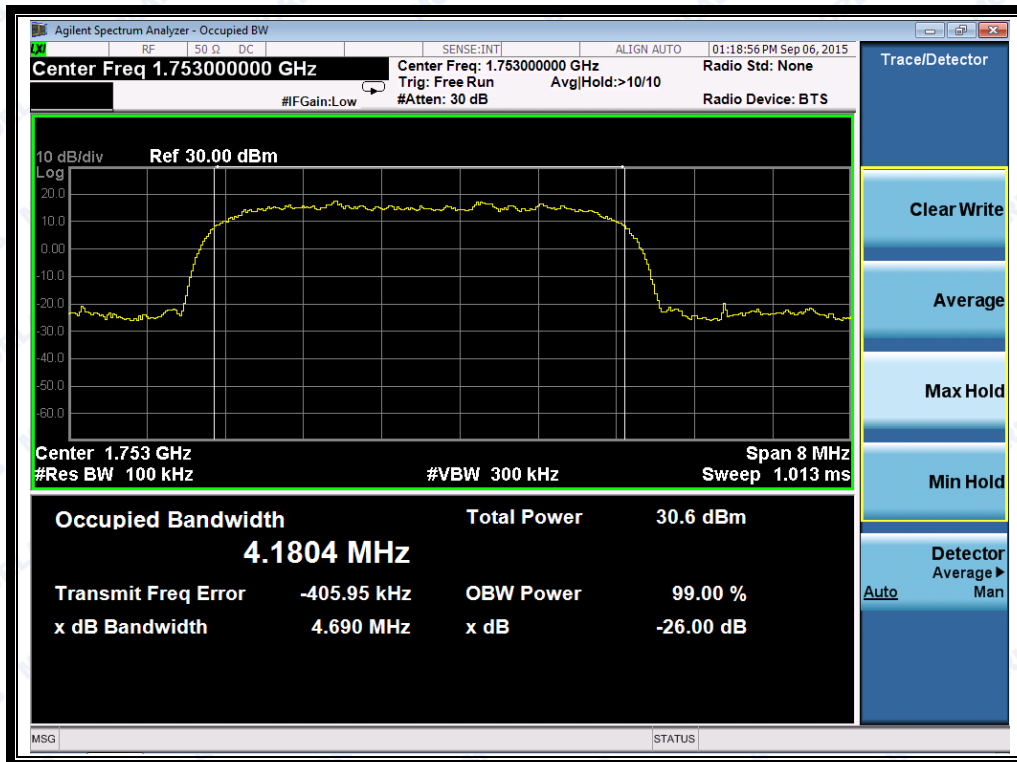


(Plot K3: HSDPA 1700MHz Channel = 1513)

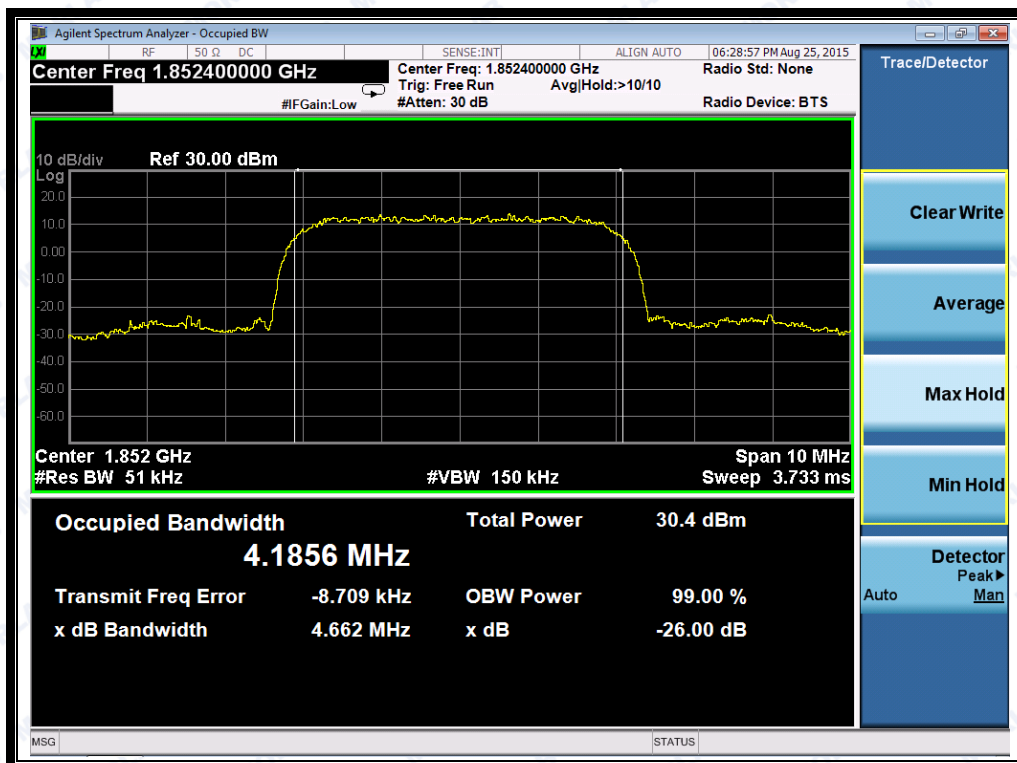


(Plot L1: HSDPA 1900MHz Channel = 9262)



REPORT No.: SZ15080014W01

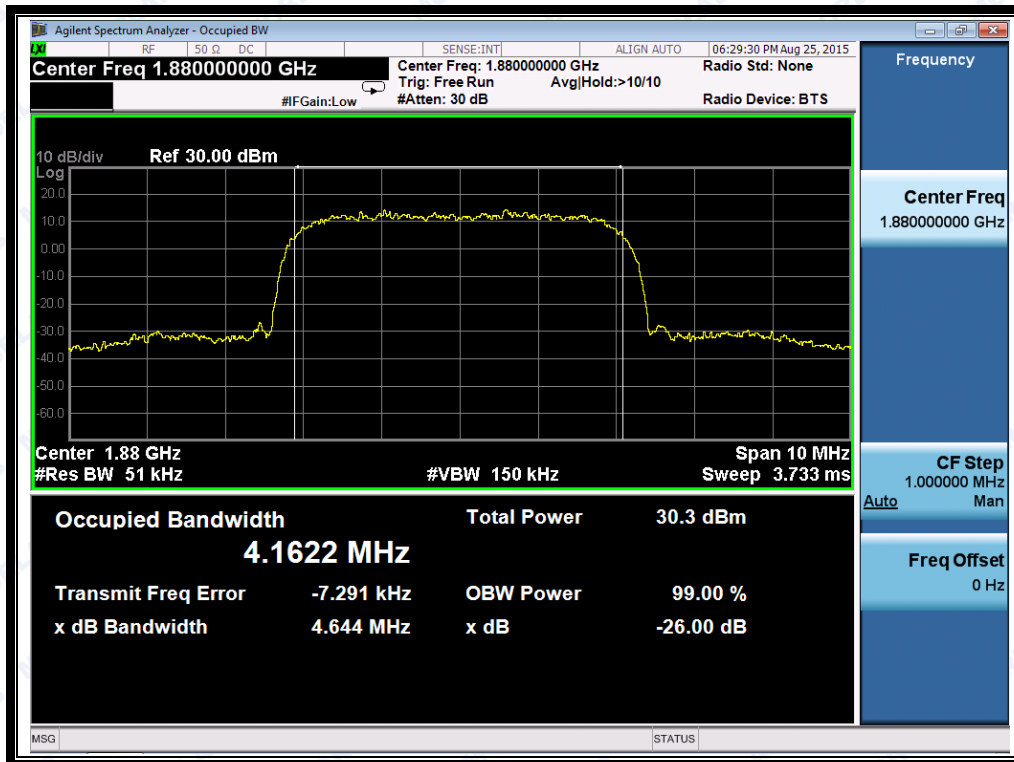


(Plot L2: HSDPA 1900 MHz Channel = 9400)

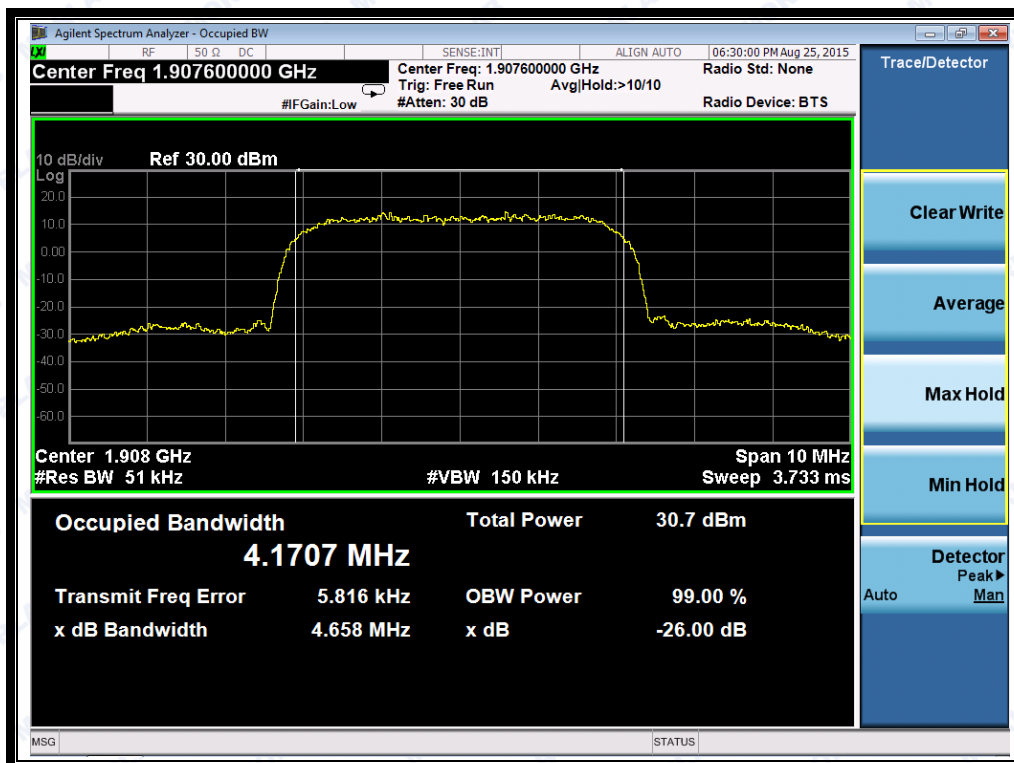


(Plot L3: HSDPA 1900MHz Channel = 9538)



REPORT No.: SZ15080014W01

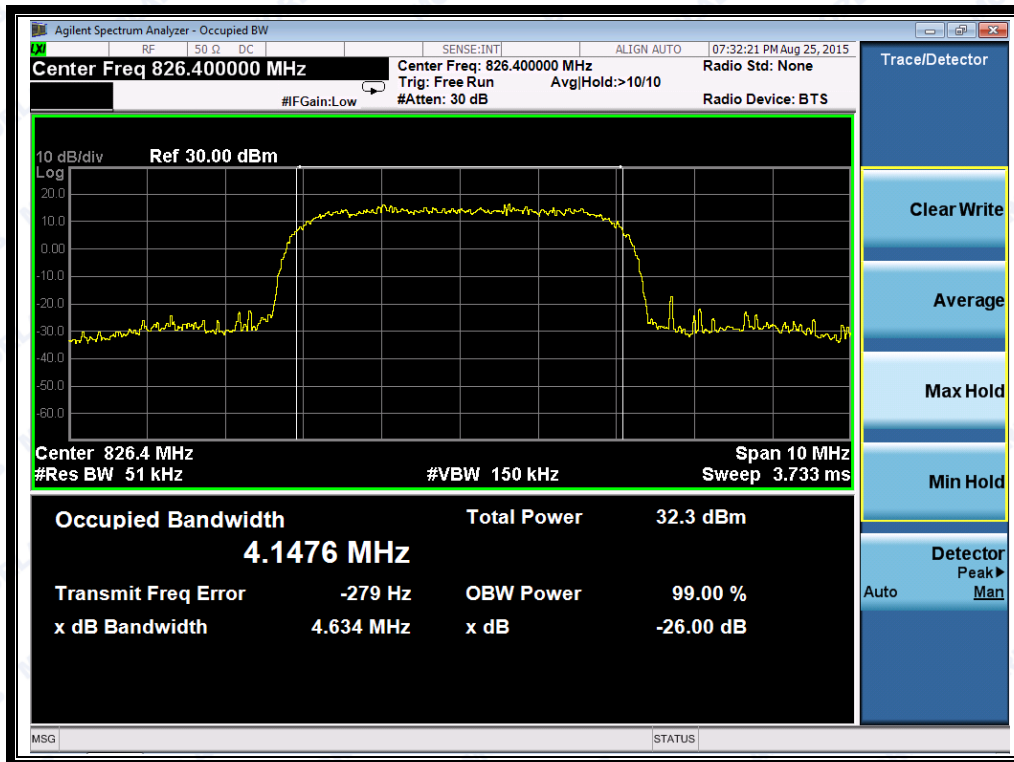


(Plot M1: HSUPA 850MHz Channel = 4132)

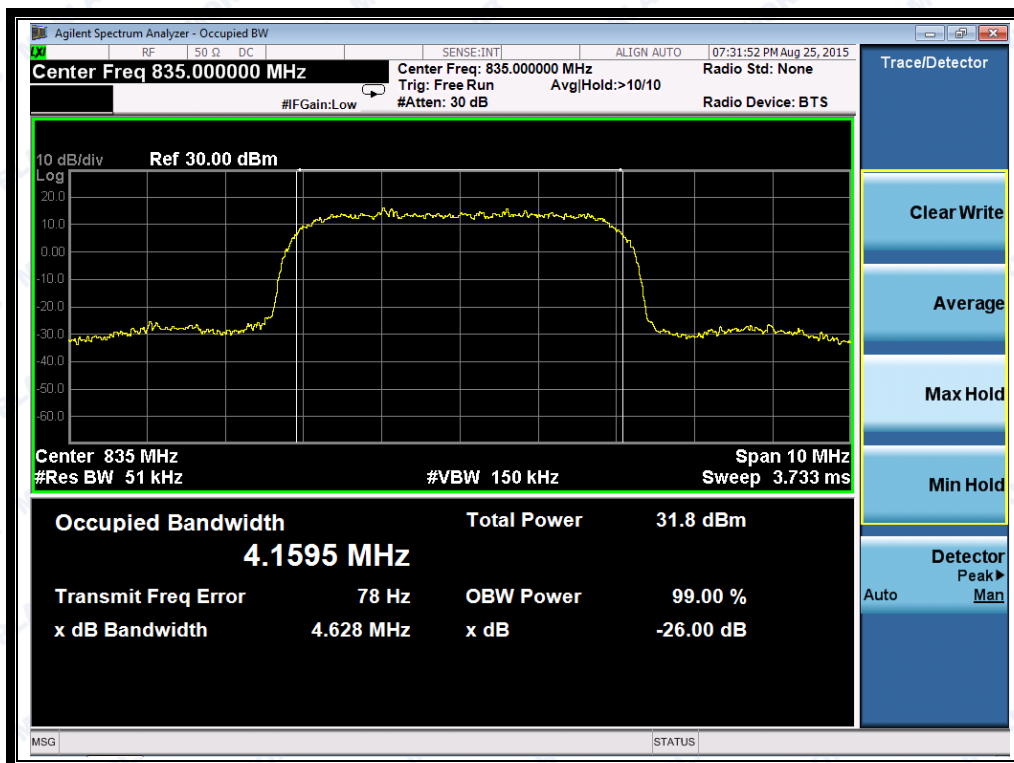


(Plot M2: HSUPA 850 MHz Channel = 4175)



REPORT No.: SZ15080014W01

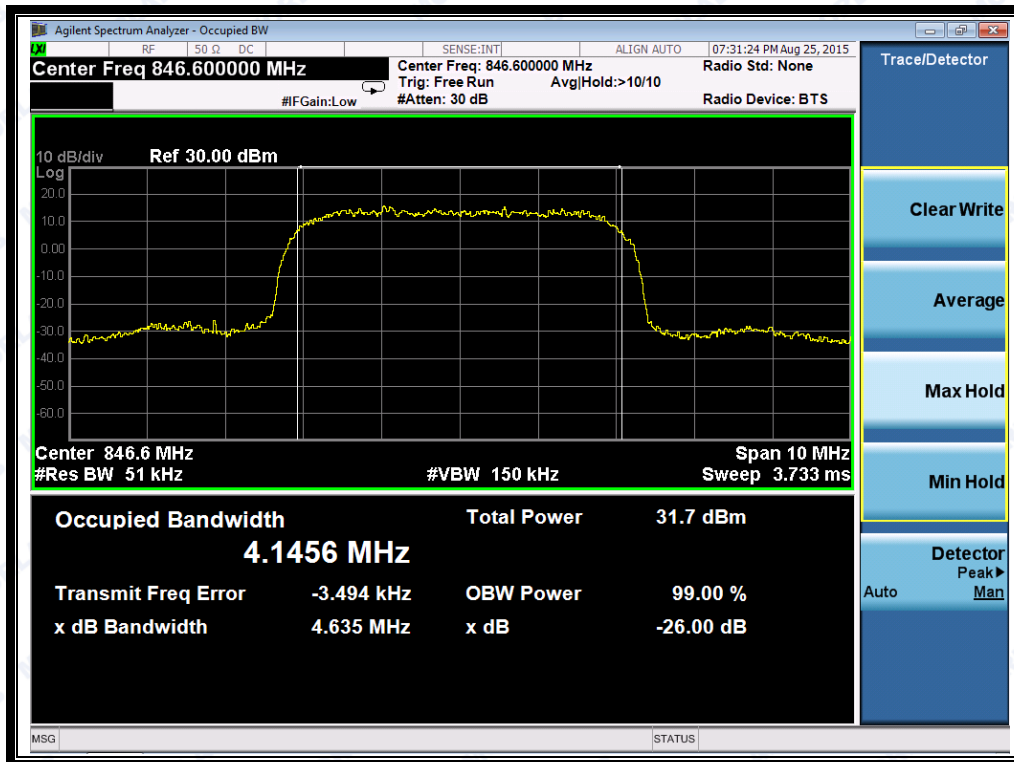


(Plot M3: HSUPA 850MHz Channel = 4233)

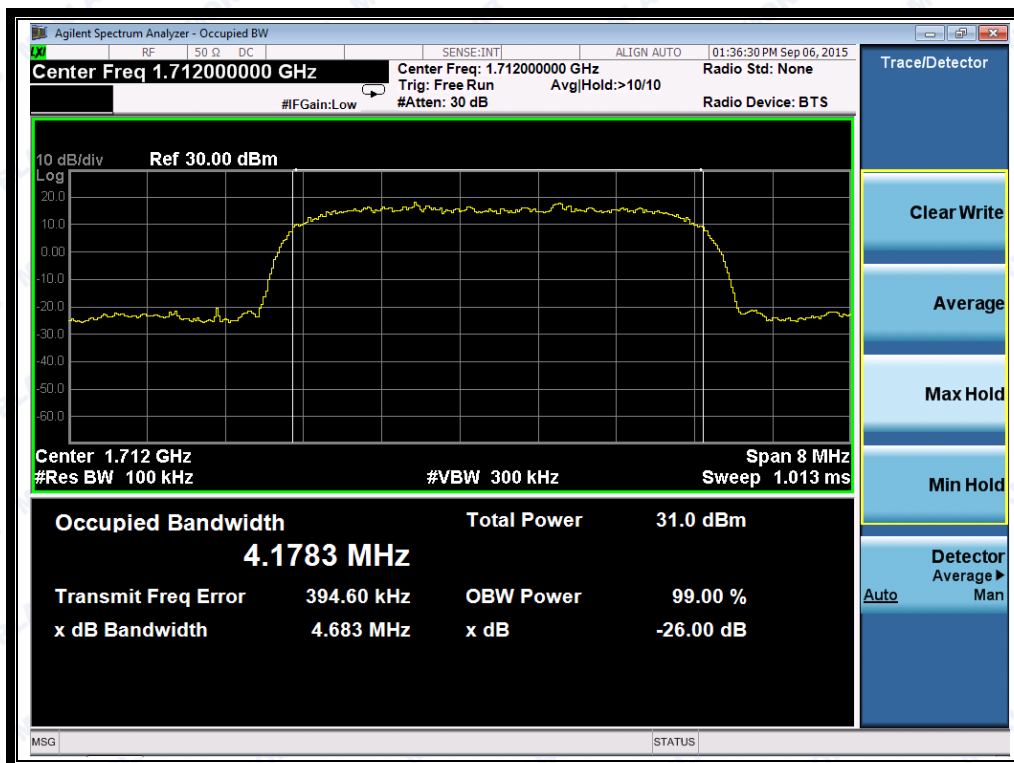


(Plot N1: HSUPA 1700MHz Channel =1312)



REPORT No.: SZ15080014W01

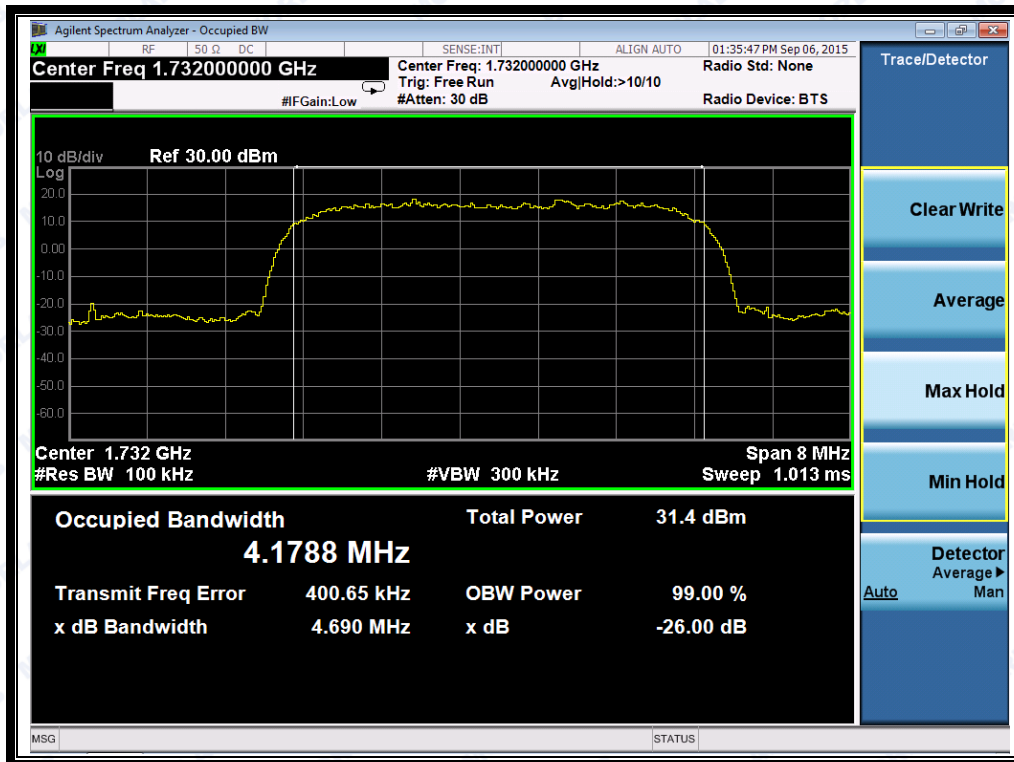


(Plot N2: HSUPA 1700 MHz Channel = 1412)

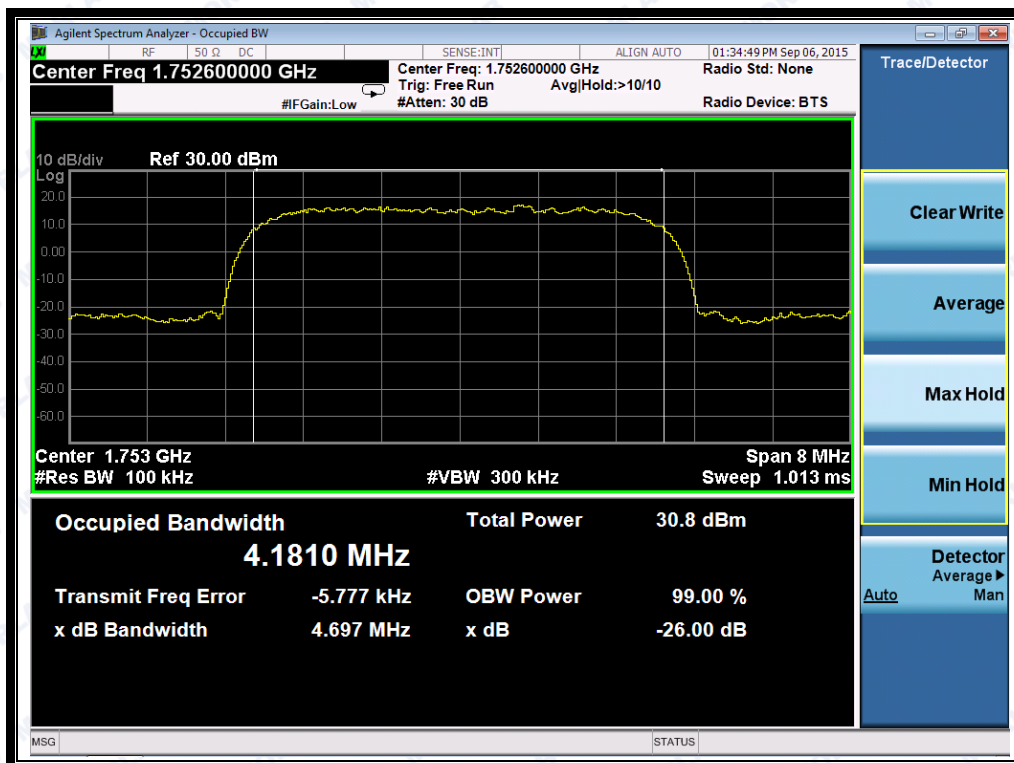


(Plot N3: HSUPA 1700MHz Channel = 1513)




REPORT No.: SZ15080014W01

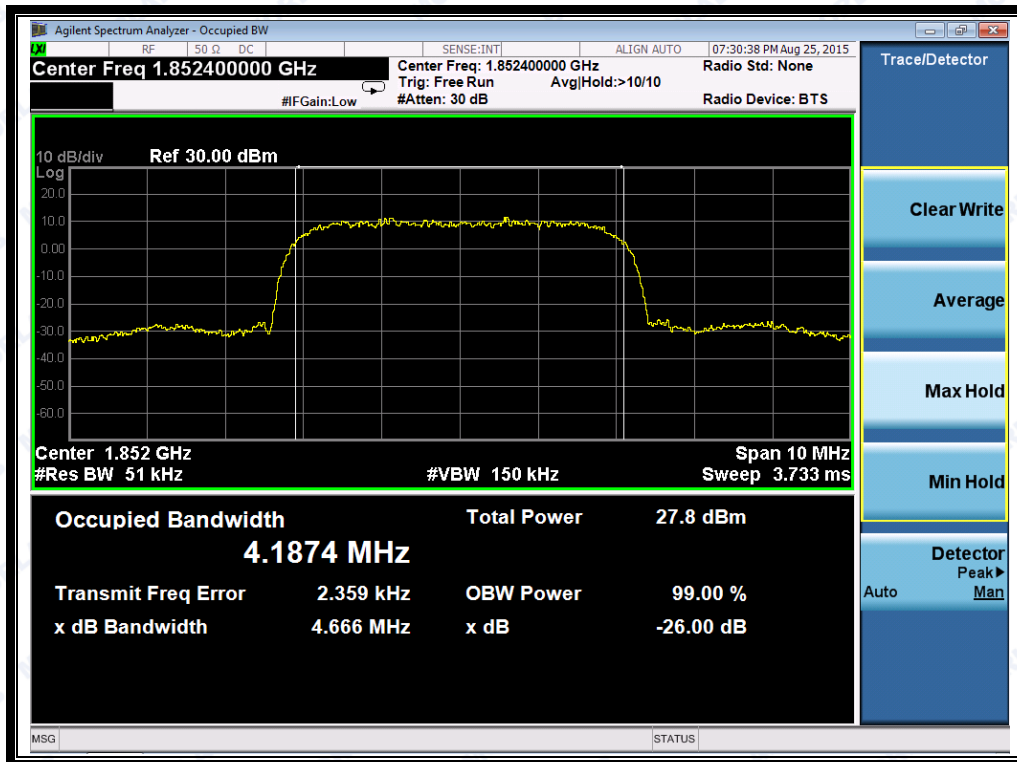

(Plot O1: HSUPA 1900MHz Channel = 9262)

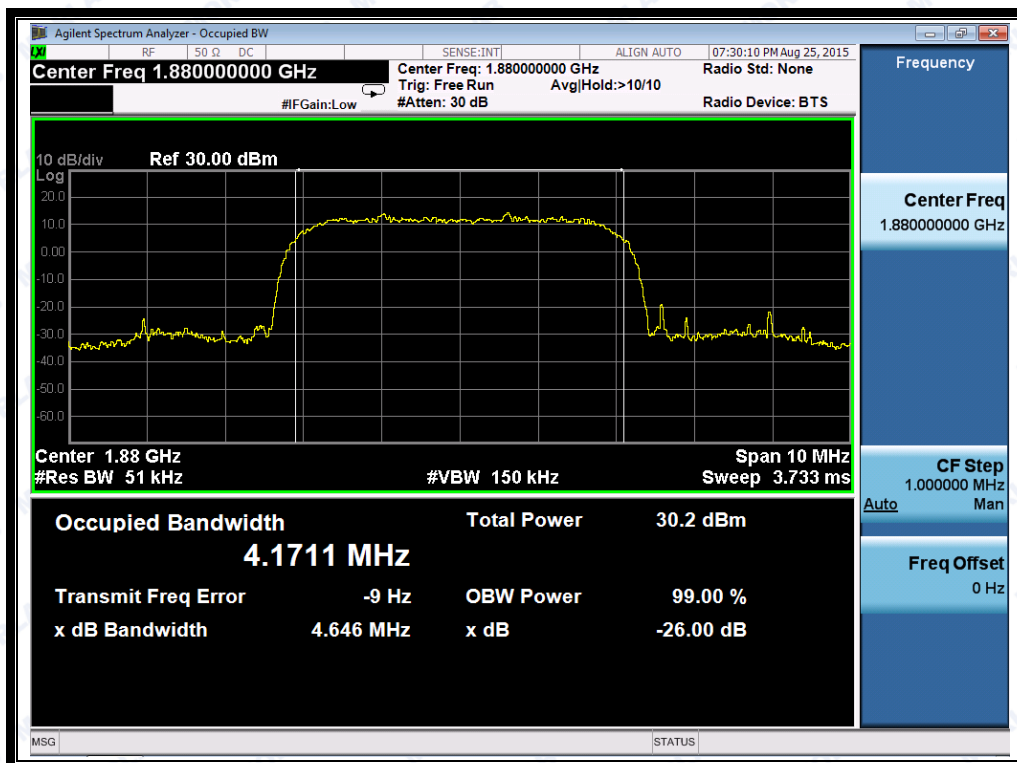

(Plot O2: HSUPA 1900 MHz Channel = 9400)

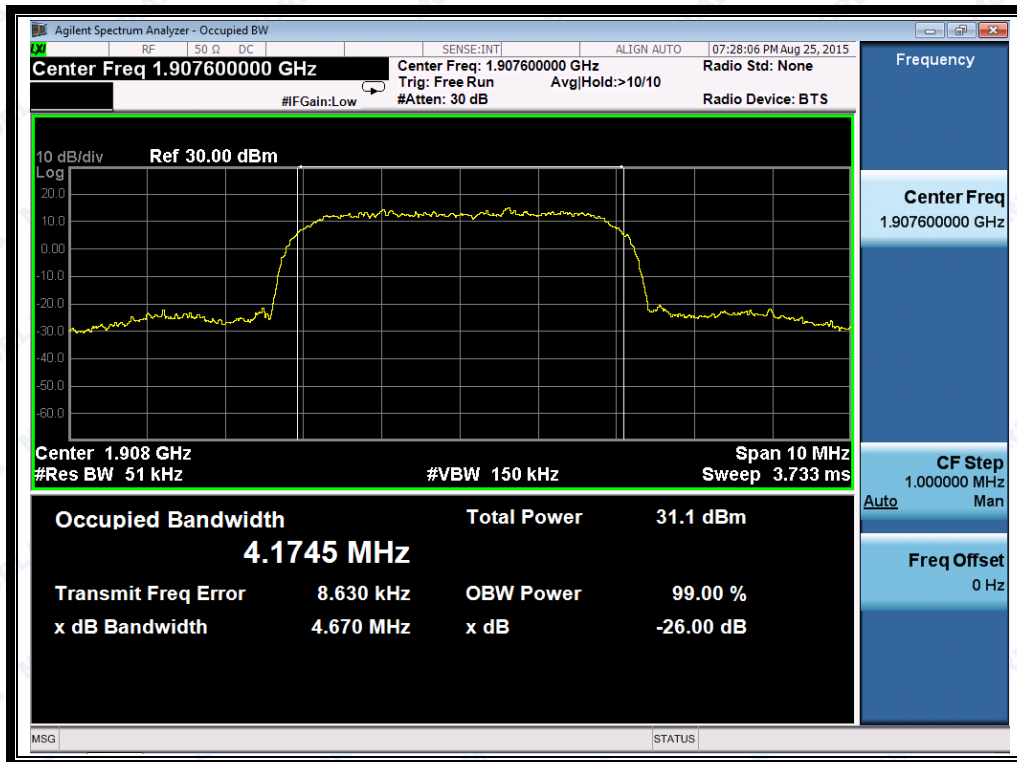

(Plot O3: HSUPA 1900MHz Channel = 9538)

2.4 Frequency Stability


2.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, section 27.54 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Test Description

Test Setup:

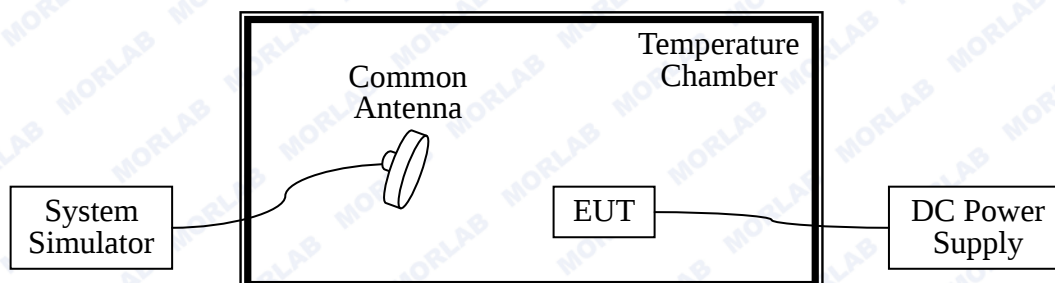

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2015.02.26	2016.02.25
DC Power Supply	Good Will	GPS -3030DD	EF920938	2015.02.26	2016.02.25
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2015.02.26	2016.02.25

2.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.8VDC, 4.2VDC and 3.45VDC, which are specified by the applicant; the normal temperature here used is 25°C. The frequency deviation limit of 850MHz band is $\pm 2.5\text{ppm}$, and 1900MHz is $\pm 1\text{ppm}$.



REPORT No.: SZ15080014W01

1. GSM 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	18.49	±2060.5	11.43	±2091.5	-15.52	±2122	PASS
	-20	-3.03		2.37		37.65		
	-10	12.23		-10.86		-22.56		
	0	15.12		-2.21		-16.61		
	+10	13.27		13.23		17.26		
	+20	10.66		5.23		15.14		
	+30	-16.61		-2.66		3.17		
	+40	-2.2		10.51		13.45		
	+55	-13.09		12.41		-18.05		
4.35	+25	-7.63		11.43		13.45		
3.0	+25	15.97		-17.87		15.72		

2. GSM 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	12.48	±1850.2	-13.46	±1880.0	29.18	±1909.8	PASS
	-20	13.4		33.41		14.69		
	-10	4.34		14.81		26.69		
	0	-8.89		50.99		-9.74		
	+10	-0.24		66.72		12.29		
	+20	15.2		0.16		10.91		
	+30	7.2		7.26		18.53		
	+40	7.2		4.92		12.73		
	+55	-0.69		4.98		15.29		
4.35	+25	19.47		13.22		28.58		
3.0	+25	-16.14		11.95		13.66		



3. EDGE 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-10.85	±2060.5	14.1	±2091.5	7.7	±2122	<u>PASS</u>
	-20	-8.34		-15.68		-21.31		
	-10	15.2		39.97		0.21		
	0	7.2		-20.19		-17.21		
	+10	37.13		-14.24		-20.14		
	+20	-24.91		19.63		16.05		
	+30	21.41		17.51		0.79		
	+40	-14.8		19.2		38.34		
	+55	28.66		-15.68		5.14		
4.35	+25	-8.89		-14.84		18.42		
3.0	+25	9.65		-13.83		36.7		

4. EDGE 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-16.3	±1850.2	0.66	±1880.0	17.66	±1909.8	<u>PASS</u>
	-20	29.87		22.7		33.43		
	-10	45.89		16.7		34.32		
	0	-15.54		3.56		-5.73		
	+10	12.76		-10.27		28.46		
	+20	8.48		32.87		13.35		
	+30	30.78		15.7		-3.92		
	+40	21.07		-10.27		-10.43		
	+55	24.04		1.66		39.12		
4.35	+25	28.64		17.85		5.27		
3.0	+25	20.78		-34.76		15.44		



5. WCDMA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	13.07	±2066	-14.4	±2087.5	-10.07	±2116.5	PASS
	-20	22.86		-0.76		33.45		
	-10	-13.48		23.96		-6.06		
	0	-12.11		22.37		-11.7		
	+10	37.06		-12.84		-22.06		
	+20	-6.46		24.96		15.1		
	+30	-12.07		18.57		-12.5		
	+40	16.26		-9.02		25.62		
	+55	23.4		12.58		19.27		
4.35	+25	-22.52		-0.76		37.48		
3.0	+25	12.87		23.98		-15.82		

6. WCDMA 1700MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 1312 (1712.4MHz)		Channel = 1412 (1732.4MHz)		Channel = 1513 (1752.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	-11.87	±4281	-14.1	±4331	11.07	±4381.5	PASS
	-20	31.65		-0.46		20.86		
	-10	-7.86		24.26		-15.48		
	0	-13.5		22.67		-14.11		
	+10	-23.86		-12.54		35.06		
	+20	13.3		25.26		-8.46		
	+30	-14.3		18.87		-14.07		
	+40	23.82		-8.72		14.26		
	+55	17.47		12.88		21.4		
4.35	+25	35.68		-0.46		-24.52		
3.0	+25	-17.62		24.28		10.87		



7. WCDMA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	17.06	±1852.4	-12.04	±1880	9.76	±1907.6	PASS
	-20	-9.46		9.77		-12.87		
	-10	12.35		-19.37		-8.36		
	0	-3.06		21.36		5.79		
	+10	36.06		22.77		-3.7		
	+20	10.11		-13.36		9.72		
	+30	-24.13		21.36		27.69		
	+40	31.18		15.97		-12.37		
	+55	-10.52		-12		-2.68		
4.35	+25	16.12	9.77	-12.87				
3.0	+25	-9.46	-13.44	-8.36				

8. HSDPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	14.96	±2066	28.21	±2087.5	-25.72	±2116.5	PASS
	-20	15.56		-7.81		-15.31		
	-10	21.72		22.4		34.88		
	0	-24.22		14.63		-8.66		
	+10	-13.81		-13		-14.3		
	+20	35.38		10.53		-24.72		
	+30	-8.16		0.26		12.53		
	+40	-13.8		18.89		-15.1		
	+55	26.52		-21.86		23.02		
4.35	+25	8.07		31.78		7.58		
3.0	+25	2.93		20.26		-32.56		



9. HSDPA 1700MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 1312 (1712.4MHz)		Channel = 1412 (1732.4MHz)		Channel = 1513 (1752.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	-16.5	±4281	10.87	±4331	14.2	±4381.5	PASS
	-20	-2.86		20.66		32.95		
	-10	21.86		-15.68		-6.56		
	0	20.27		-14.31		-12.2		
	+10	-14.94		34.86		-22.56		
	+20	22.86		-8.66		14.6		
	+30	16.47		-14.27		-13		
	+40	-11.12		14.06		25.12		
	+55	10.48		21.2		18.77		
4.35	+25	-2.86		-24.72		36.98		
3.0	+25	21.88		10.67		-16.32		

10. HSDPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	0.09	±1852.4	8.25	±1880	-2.83	±1907.6	PASS
	-20	-12.1		-19.17		22.89		
	-10	-16.54		17.5		15.55		
	0	-12.03		-5.63		-10.03		
	+10	2.12		19.09		11.78		
	+20	-7.37		17.5		-3.63		
	+30	6.05		-17.63		35.49		
	+40	24.02		20.09		9.54		
	+55	-16.04		13.7		-24.7		
4.35	+25	-6.35	-12.9	30.71				
3.0	+25	12.9	8.01	-1.19				



11. HSUPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	11.03	±2066	23.9	±2087.5	15.98	±2116.5	PASS
	-20	24.9		-19.82		-16.15		
	-10	33.49		-15.23		-10.61		
	0	-10.84		-15.71		0.74		
	+10	-8.43		-3		1.19		
	+20	17.83		-14.47		-5.46		
	+30	-9.46		26.95		25.43		
	+40	10.26		-14.41		10.81		
	+55	24.93		-3.06		24.94		
4.35	+25	25.59		-0.91		-3.39		
3.0	+25	-11.32		-0.98		6.23		

12. HSUPA 1700MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 1312 (1712.4MHz)		Channel = 1412 (1732.4MHz)		Channel = 1513 (1752.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.8	-30	14.17	±4281	-13.77	±4331	-18	±4381.5	PASS
	-20	23.96		29.75		-4.36		
	-10	-12.38		-9.76		20.36		
	0	-11.01		-15.4		18.77		
	+10	38.16		-25.76		-16.44		
	+20	-5.36		11.4		21.36		
	+30	-10.97		-16.2		14.97		
	+40	17.36		21.92		-12.62		
	+55	24.5		15.57		8.98		
4.35	+25	-21.42		33.78		-4.36		
3.0	+25	13.97		-19.52		20.38		



REPORT No.: SZ15080014W01

13. HSUPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.8	-30	-11.81	±1852.4	4.27	±1880	29.25	±1907.6	PASS
	-20	0.64		-0.41		24.81		
	-10	0.99		-8.17		4.3		
	0	14.8		12.96		-1.01		
	+10	-14.27		-5.18		-8.05		
	+20	-10.81		20.1		12.9		
	+30	0.54		-3.8		-4.87		
	+40	2.13		-15.27		19.84		
	+55	-6.96		-9.33		10.47		
4.35	+25	7.79		22.06		-10.4		
3.0	+25	-1.85		-20.2		18.26		



2.5 Conducted Out of Band Emissions

2.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a) & 27.53(g) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2015.02.26	2016.02.25
Spectrum Analyzer	Agilent	E7405A	US44210471	2015.02.26	2016.02.25
Power Meter	Agilent	E4418B	GB43318055	2015.02.26	2016.02.25
Power Sensor	Agilent	8482A	MY41091706	2015.02.26	2016.02.25
Power Splitter	Weinschel	1506A	NW521	2015.02.26	2016.02.25
Attenuator 1	Resnet	20dB	(n.a.)	2015.02.26	2016.02.25
Attenuator 2	Resnet	3dB	(n.a.)	2015.02.26	2016.02.25

2. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-19.65	Plot A1 to A1.1	-13	PASS
	190	836.6	-19.45	Plot A2 to A2.1		PASS
	251	848.8	-20.13	Plot A3 to A3.1		PASS
GSM 1900MHz	512	1850.2	-20.85	Plot B1 to B1.1	-13	PASS
	661	1880.0	-20.17	Plot B2 to B2.1		PASS
	810	1909.8	-20.88	Plot B3 to B3.1		PASS
EGPRS 850MHz	128	824.2	-19.61	Plot E1 to E1.1	-13	PASS
	190	836.6	-19.92	Plot E2 to E2.1		PASS
	251	848.8	-19.81	Plot E3 to E3.1		PASS
EGPRS 1900MHz	512	1850.2	-21.48	Plot F1 to F1.1	-13	PASS
	661	1880.0	-21.44	Plot F2 to F2.1		PASS
	810	1909.8	-19.77	Plot F3 to F3.1		PASS




Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
WCDMA 850MHz	4132	826.4	< -25	Plot G1 to G1.1	-13	PASS
	4175	835.0	< -25	Plot G2 to G2.1		PASS
	4233	846.6	< -25	Plot G3 to G3.1		PASS
WCDMA 1700MHz	1312	1712.4	< -25	Plot H1 to H1.1	-13	PASS
	1412	1732.4	< -25	Plot H2 to H2.1		PASS
	1513	1752.6	< -25	Plot H3 to H3.1		PASS
WCDMA 1900MHz	9262	1852.4	< -25	Plot I1 to I1.1	-13	PASS
	9400	1880.0	< -25	Plot I2 to I2.1		PASS
	9538	1907.6	< -25	Plot I3 to I3.1		PASS
HSDPA 850MHz	4132	826.4	-19.716	Plot J1 to J1.1	-13	PASS
	4175	835.0	-20.349	Plot J2 to J2.1		PASS
	4233	846.6	-21.072	Plot J3 to J3.1		PASS
HSDPA 1700MHz	1312	1712.4	< -25	Plot K1 to K1.1	-13	PASS
	1412	1732.4	< -25	Plot K2 to K2.1		PASS
	1513	1752.6	< -25	Plot K3 to K3.1		PASS
HSDPA 1900MHz	9262	1852.4	< -25	Plot L1 to L1.1	-13	PASS
	9400	1880.0	< -25	Plot L2 to L2.1		PASS
	9538	1907.6	< -25	Plot L3 to L3.1		PASS
HSUPA 850MHz	4132	826.4	< -25	Plot M1 to M1.1	-13	PASS
	4175	835.0	< -25	Plot M2 to M2.1		PASS
	4233	846.6	< -25	Plot M3 to M3.1		PASS
HSUPA 1700MHz	1312	1712.4	< -25	Plot N1 to N1.1	-13	PASS
	1412	1732.4	< -25	Plot N2 to N2.1		PASS
	1513	1752.6	< -25	Plot N3 to N3.1		PASS
HSUPA 1900MHz	9262	1852.4	< -25	Plot O1 to M1.1	-13	PASS
	9400	1880.0	< -25	Plot O2 to M2.1		PASS
	9538	1907.6	< -25	Plot O3 to M3.1		PASS

Test Plots for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.



REPORT No.: SZ15080014W01

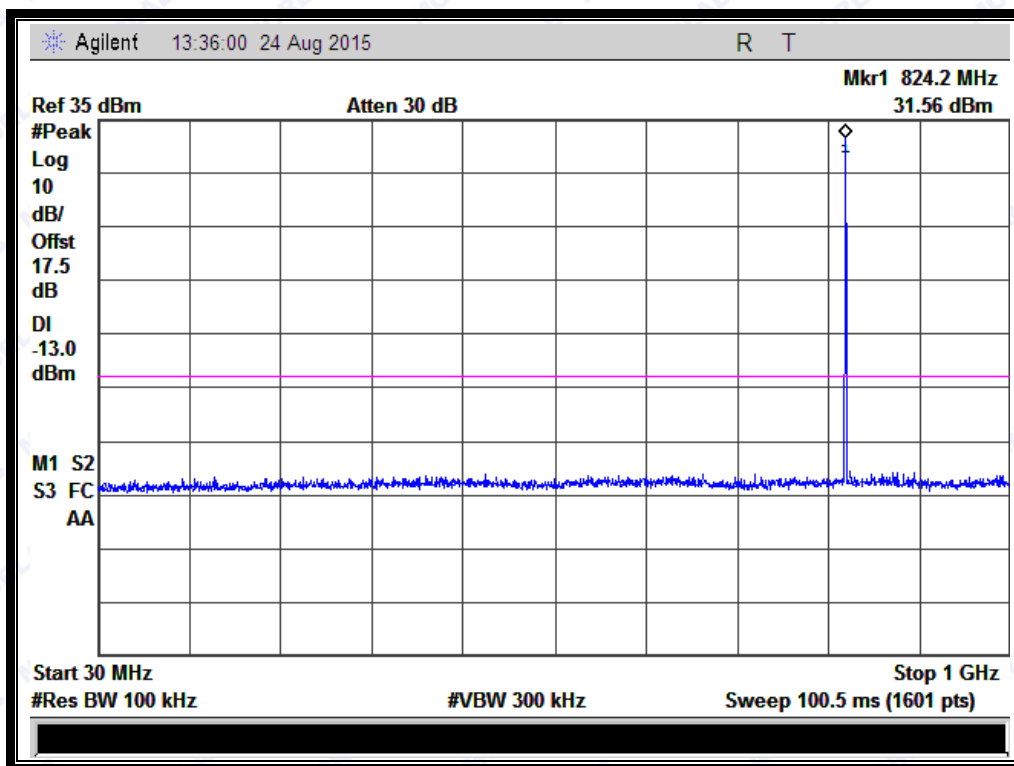


(Plot A1: GSM 850MHz Channel = 128, 30MHz to 1GHz)

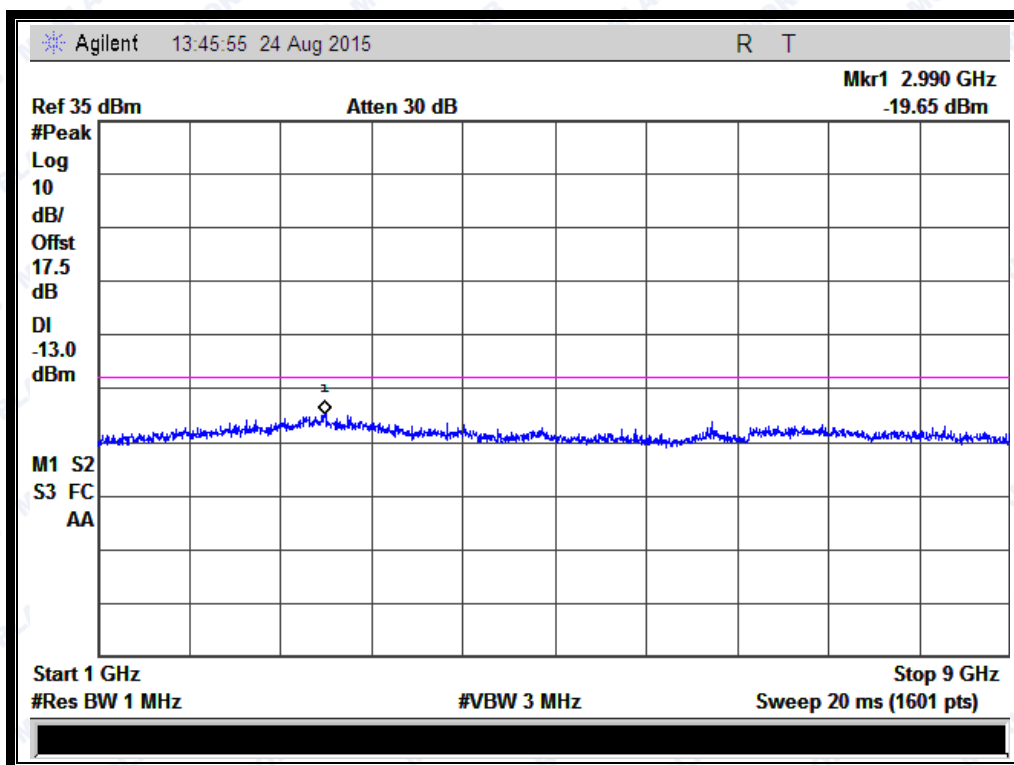


(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

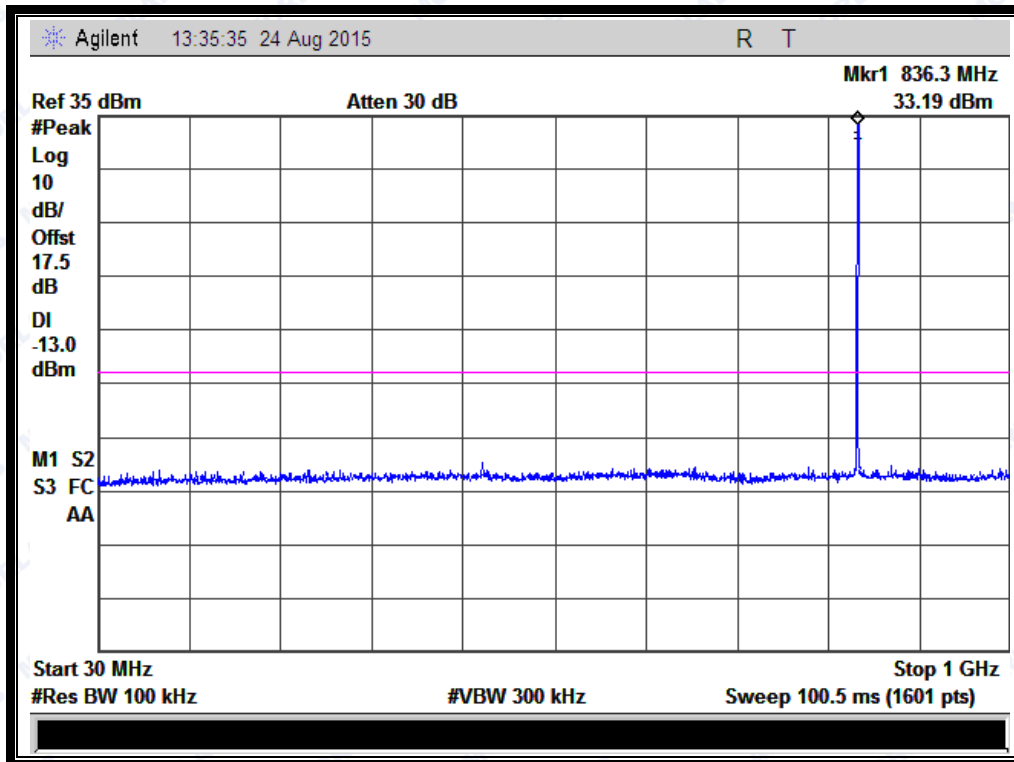


(Plot A2: GSM 850MHz Channel = 190, 30MHz to 1GHz)

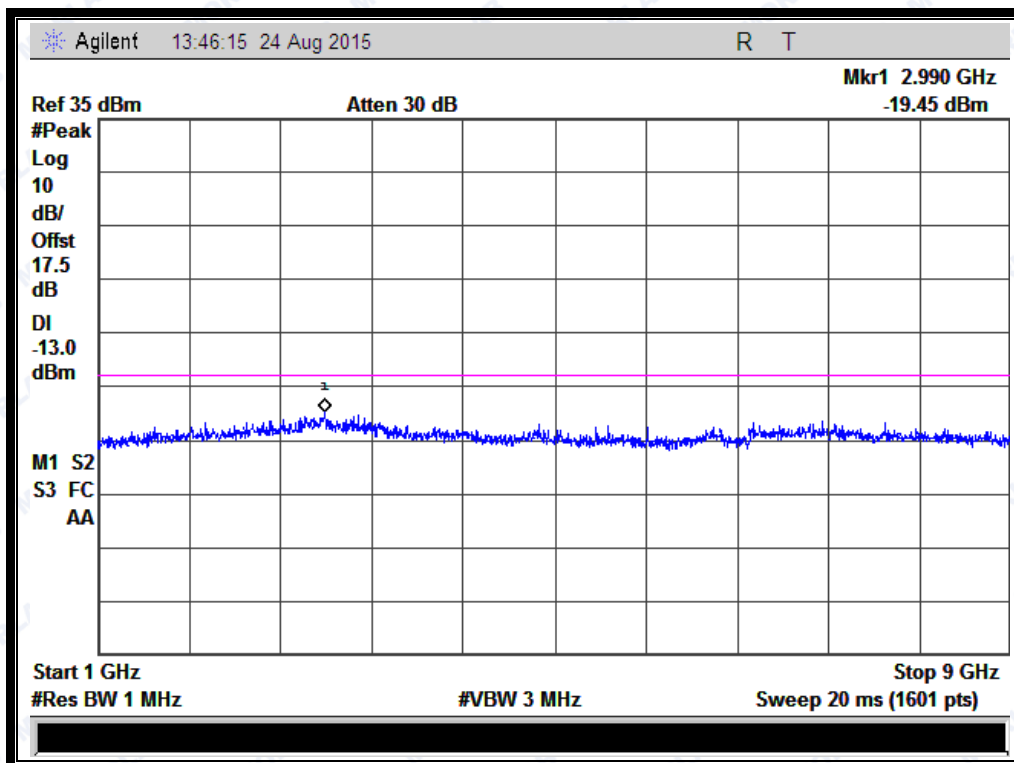


(Plot A2.1: GSM 850MHz Channel = 190, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

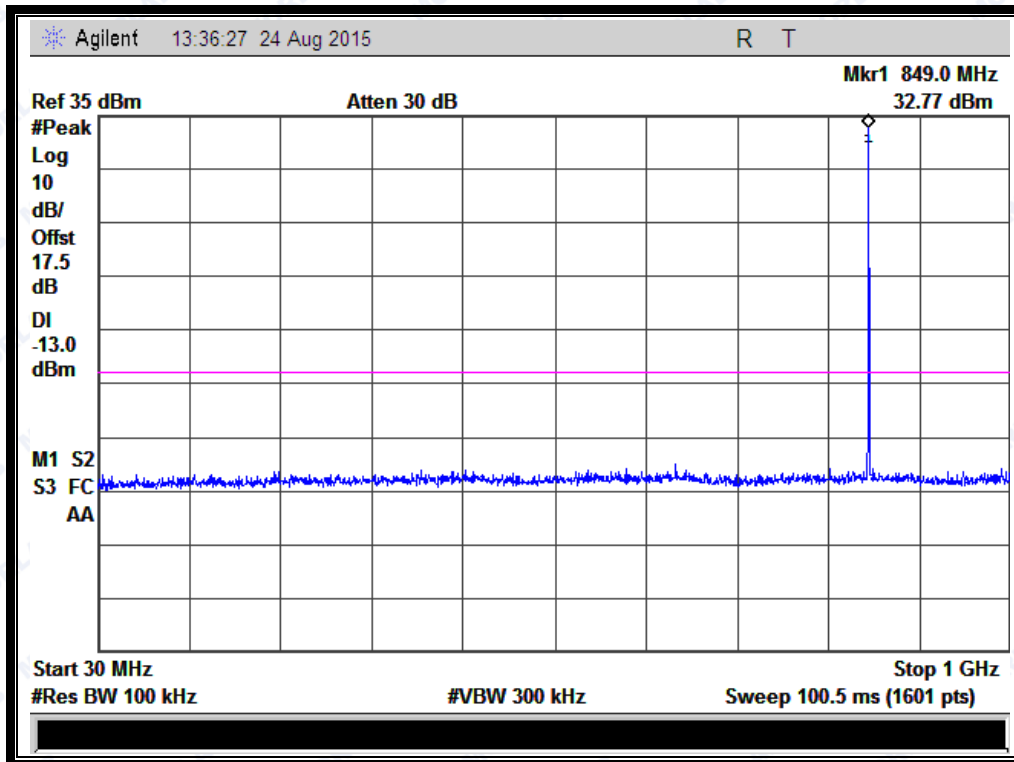


(Plot A3: GSM 850MHz Channel = 251, 30MHz to 1GHz)

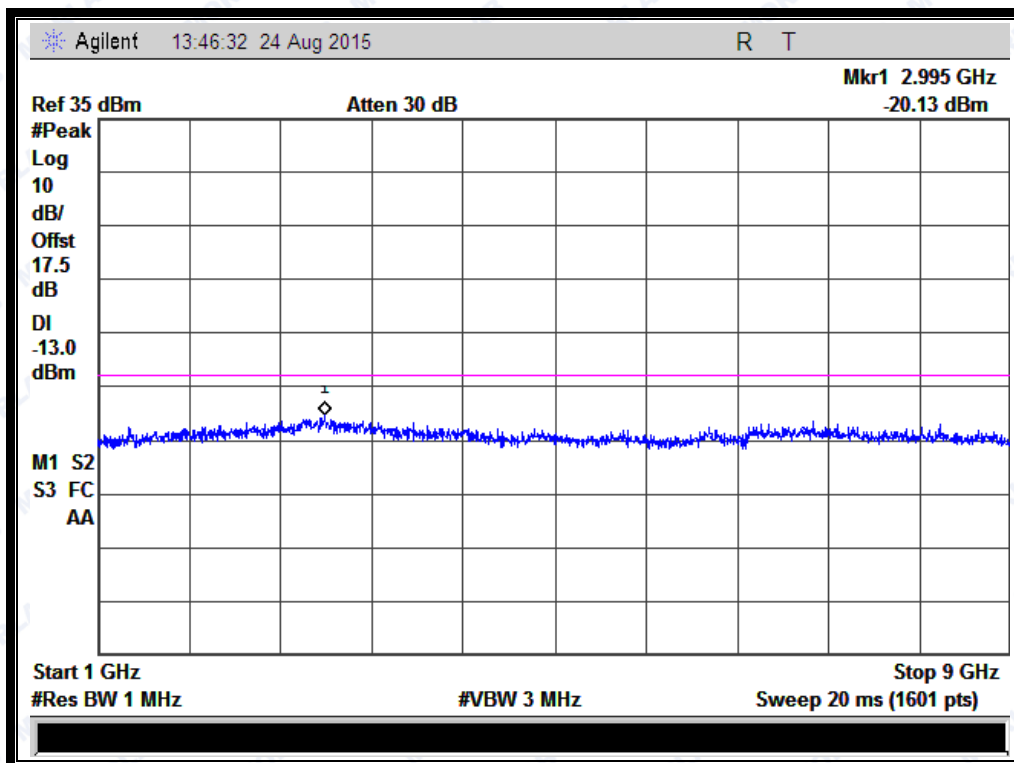


(Plot A3.1: GSM 850MHz Channel = 251, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

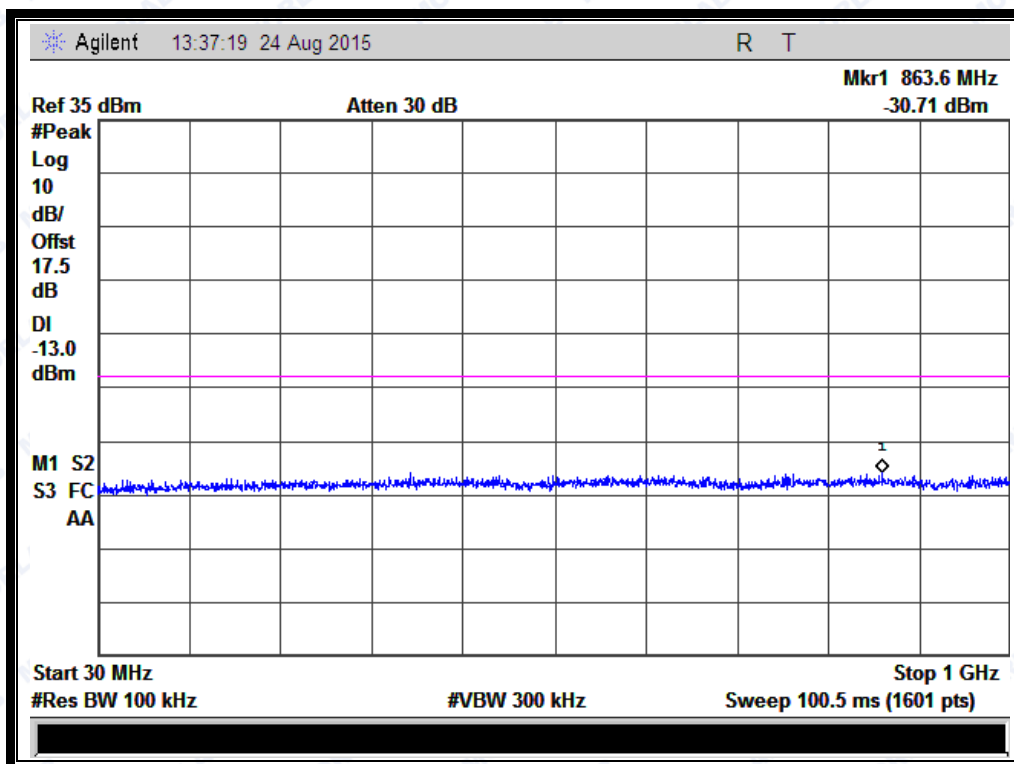


(Plot B1: GSM 1900MHz Channel = 512, 30MHz to 1GHz)

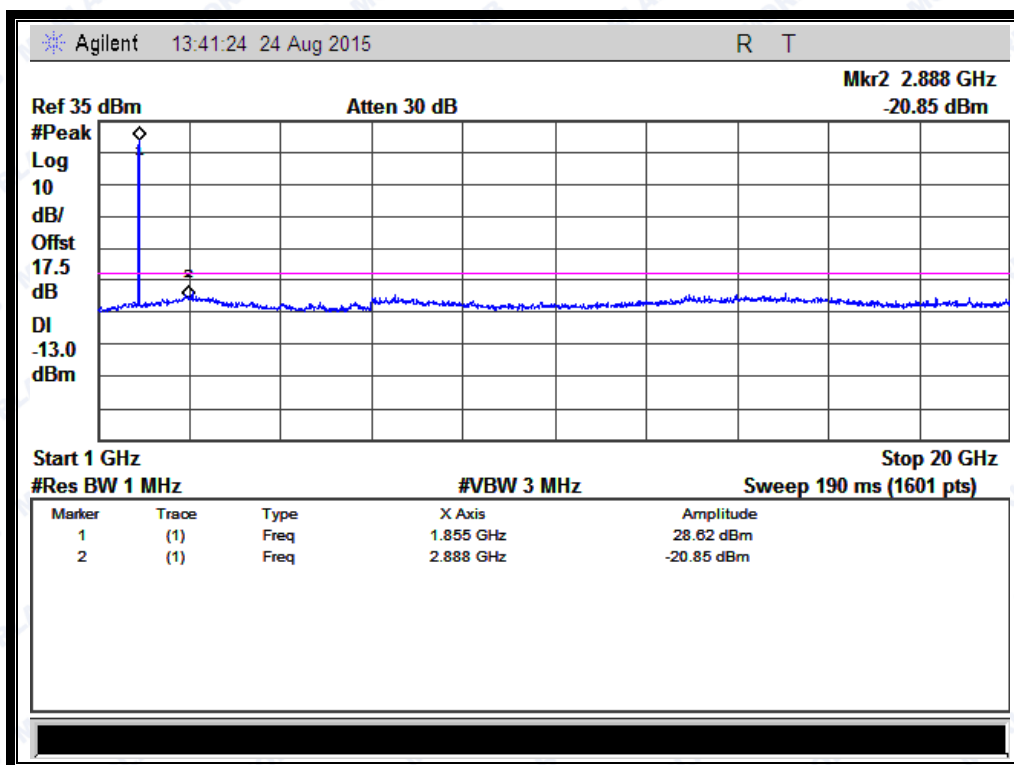


(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

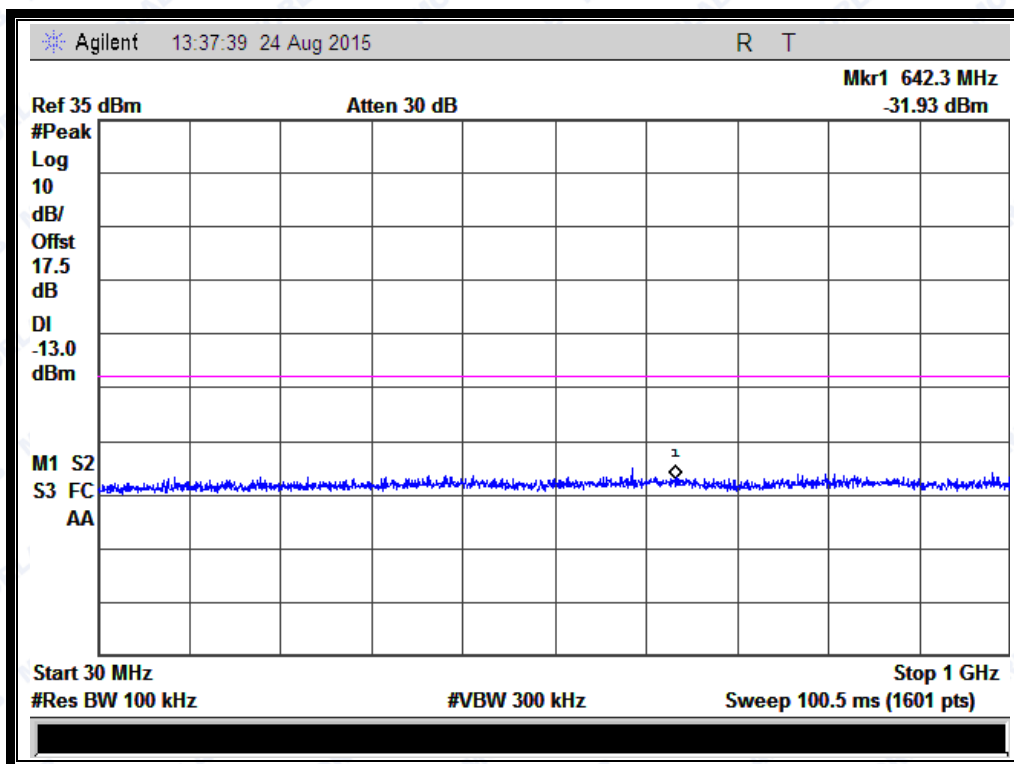


(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)

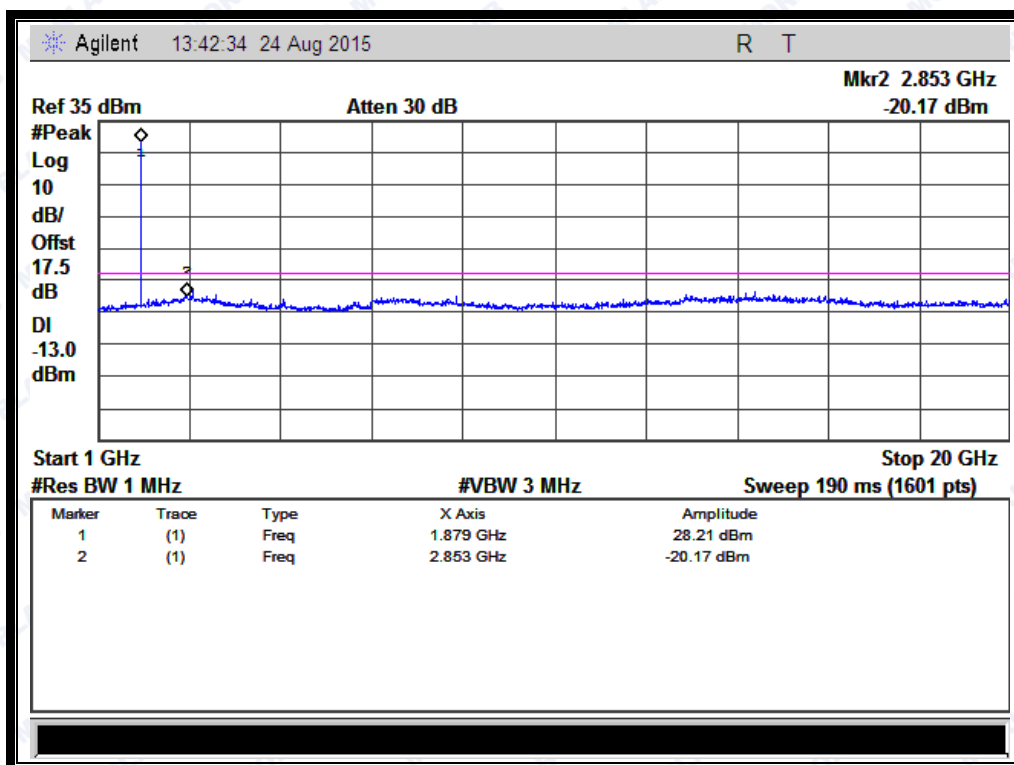


(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

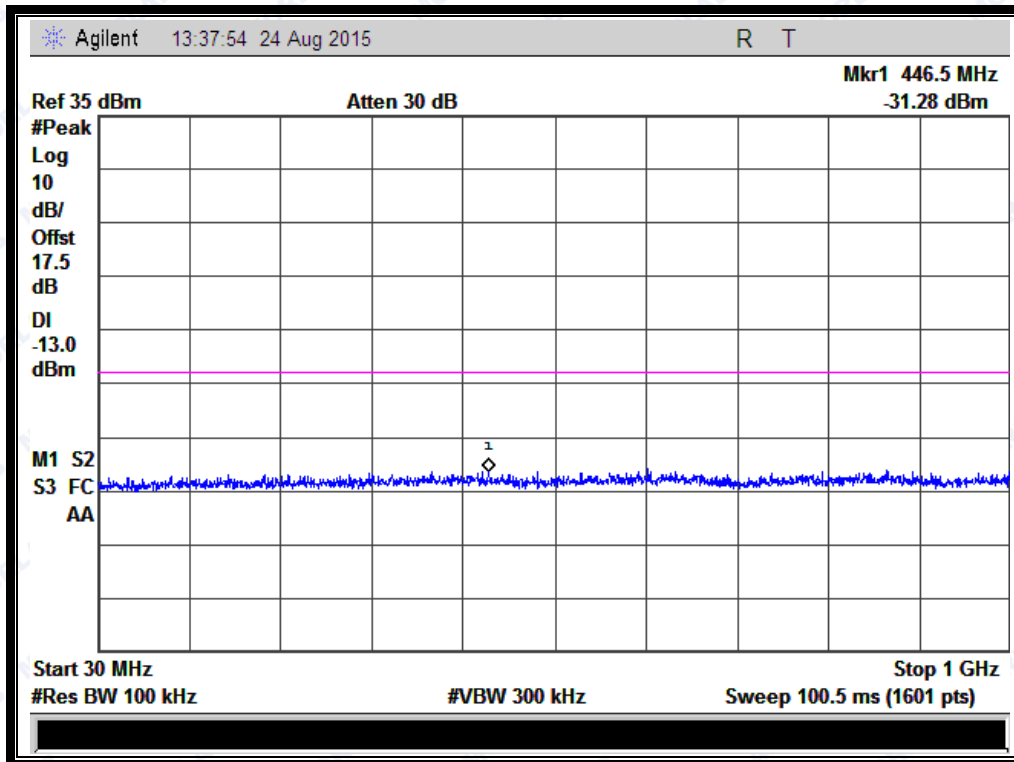


(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

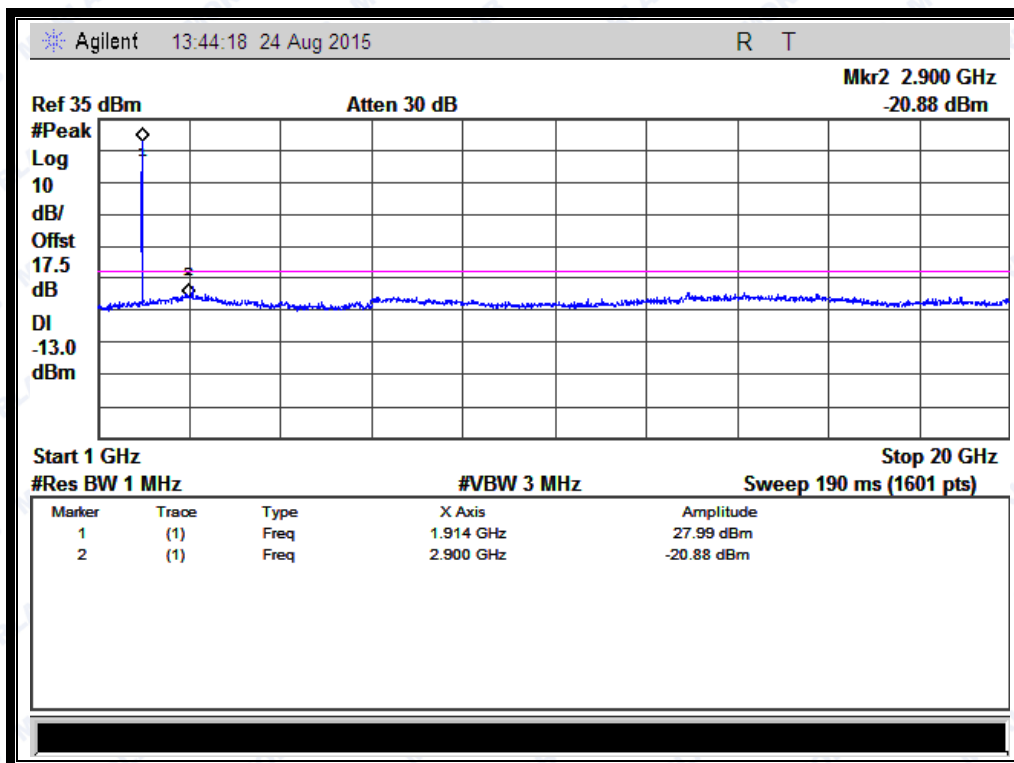


(Plot B3.1: GSM 1900MHz Channel = 810, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

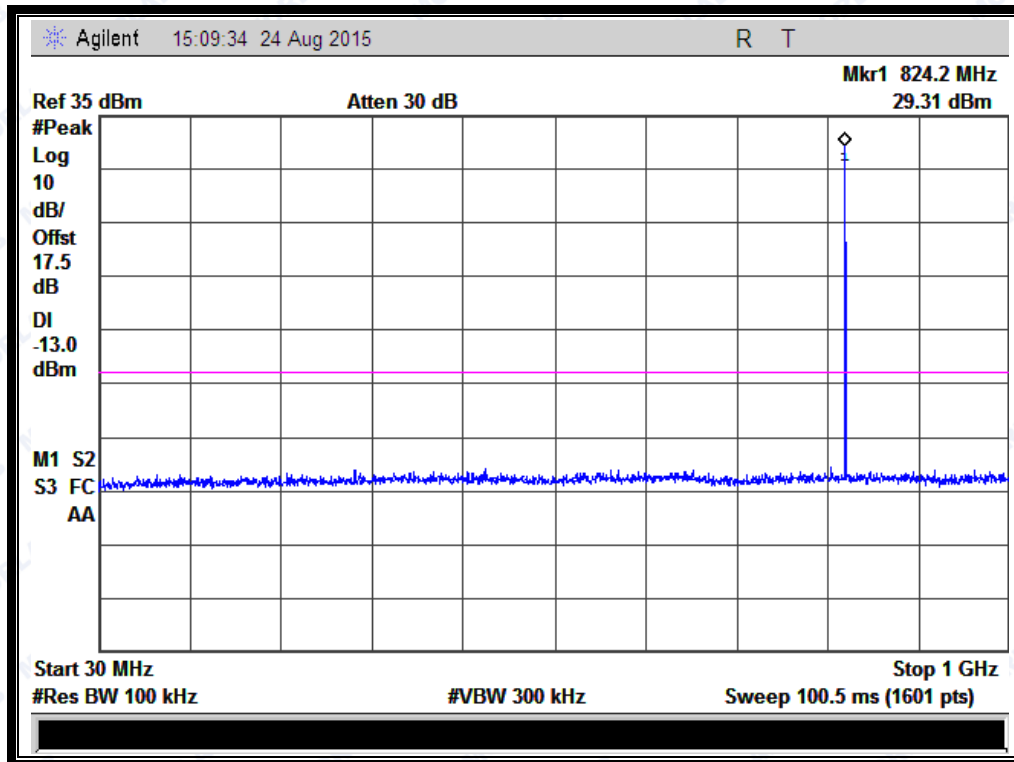


(Plot E1: EGPRS 850MHz Channel = 128, 30MHz to 1GHz)

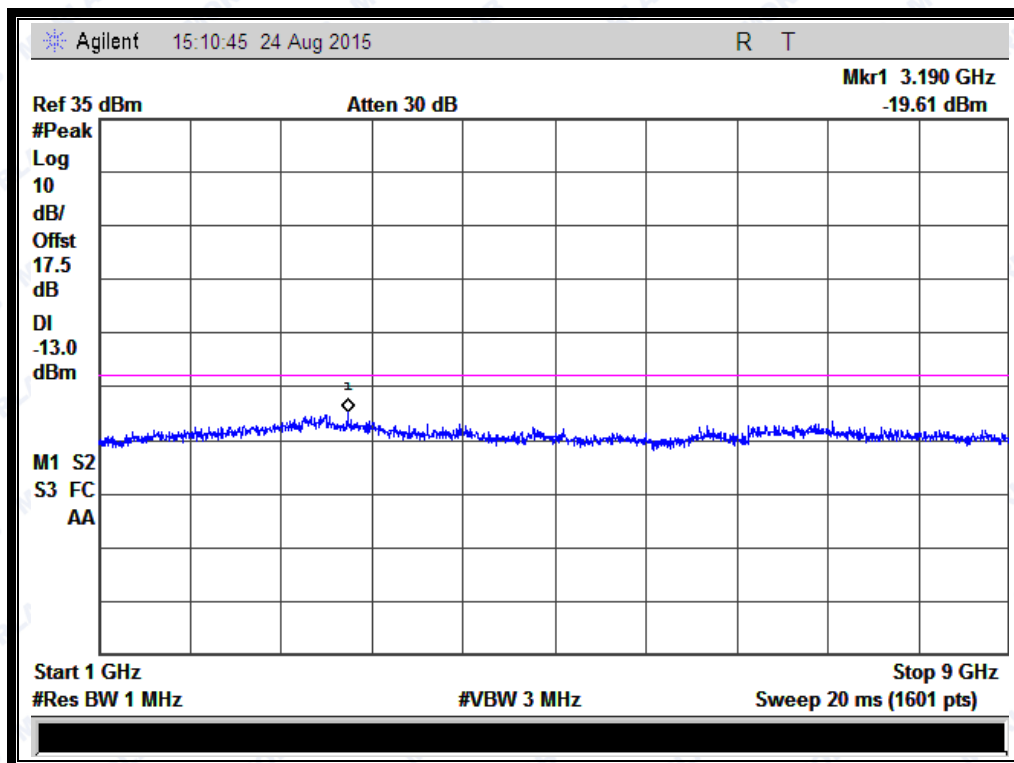


(Plot E1.1: EGPRS 850MHz Channel = 128, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

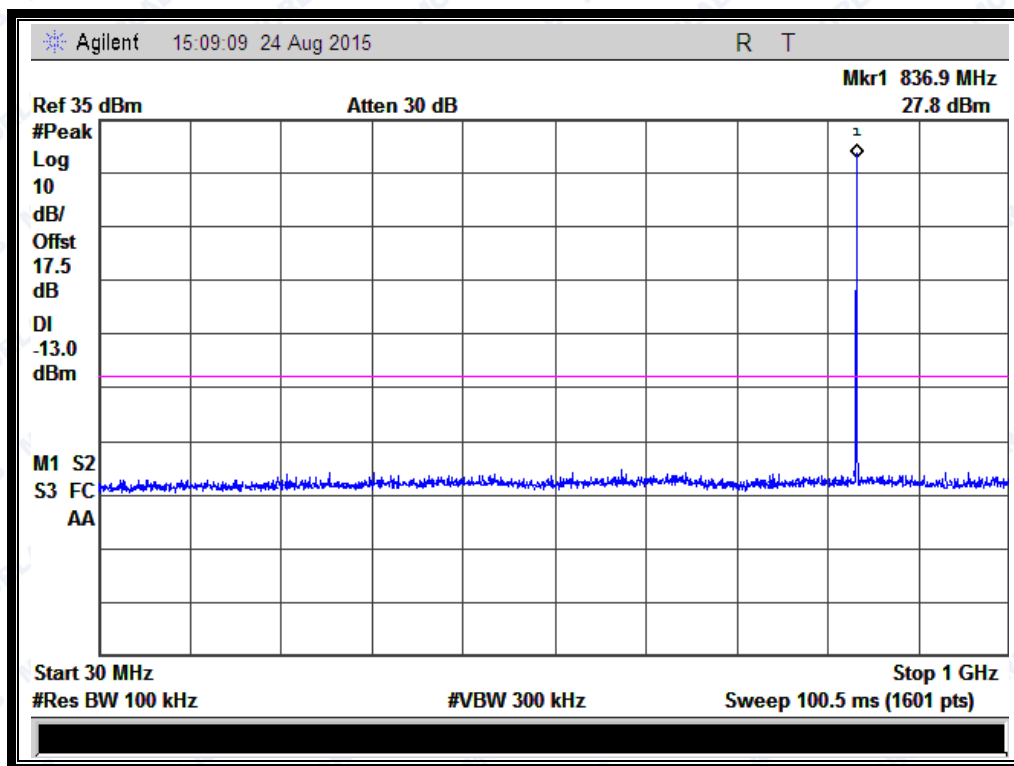


(Plot E2: EGPRS 850MHz Channel = 190, 30MHz to 1GHz)

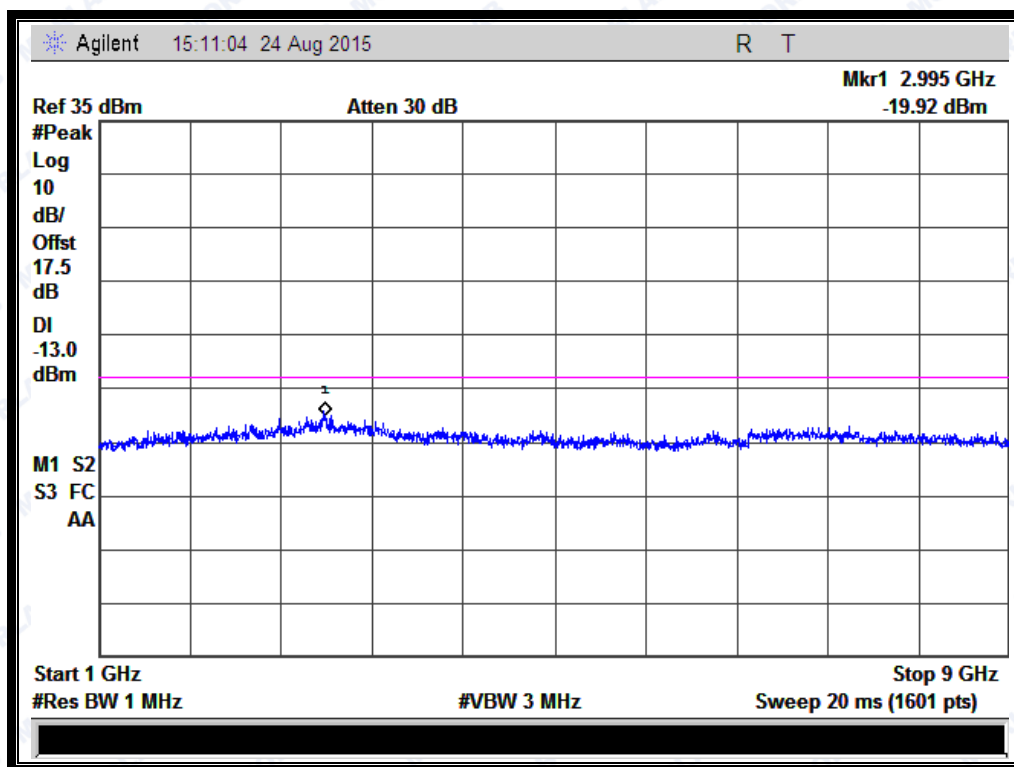


(Plot E2.1: EGPRS 850MHz Channel = 190, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

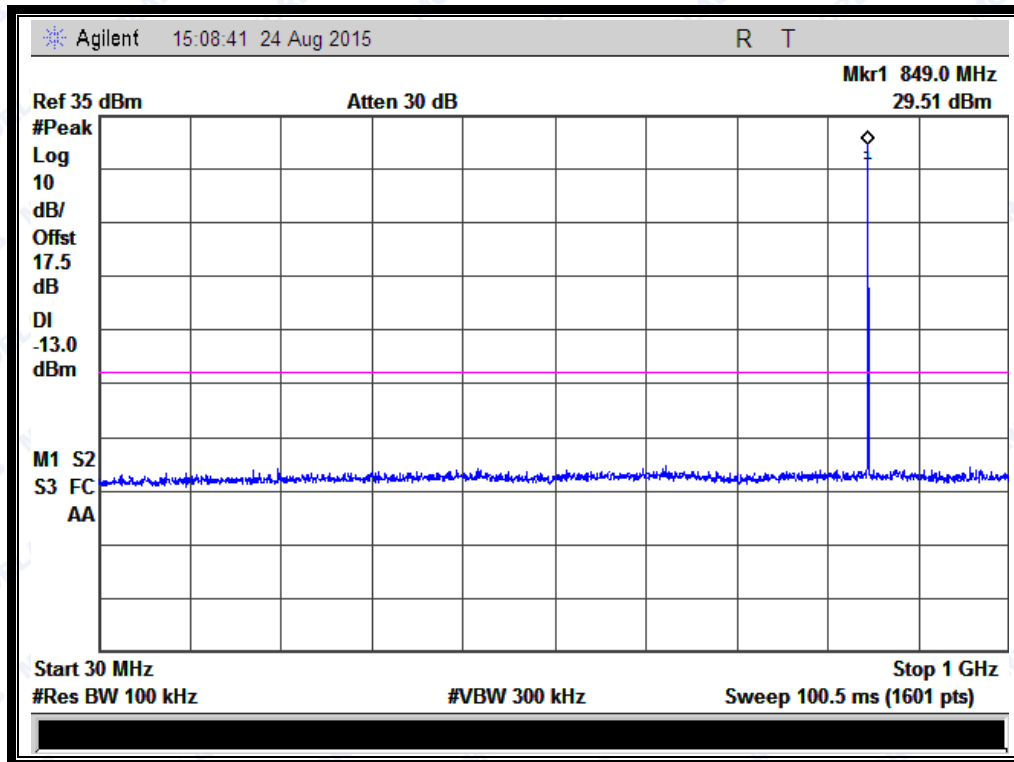


(Plot E3: EGPRS 850MHz Channel = 251, 30MHz to 1GHz)

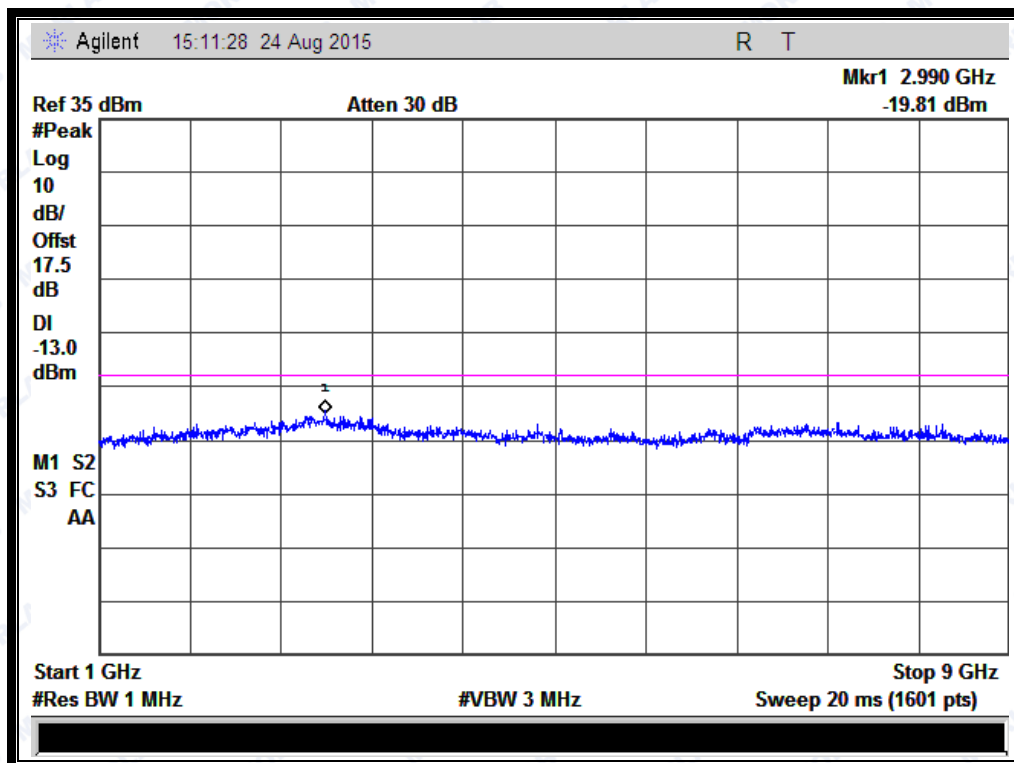


(Plot E3.1: EGPRS 850MHz Channel = 251, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

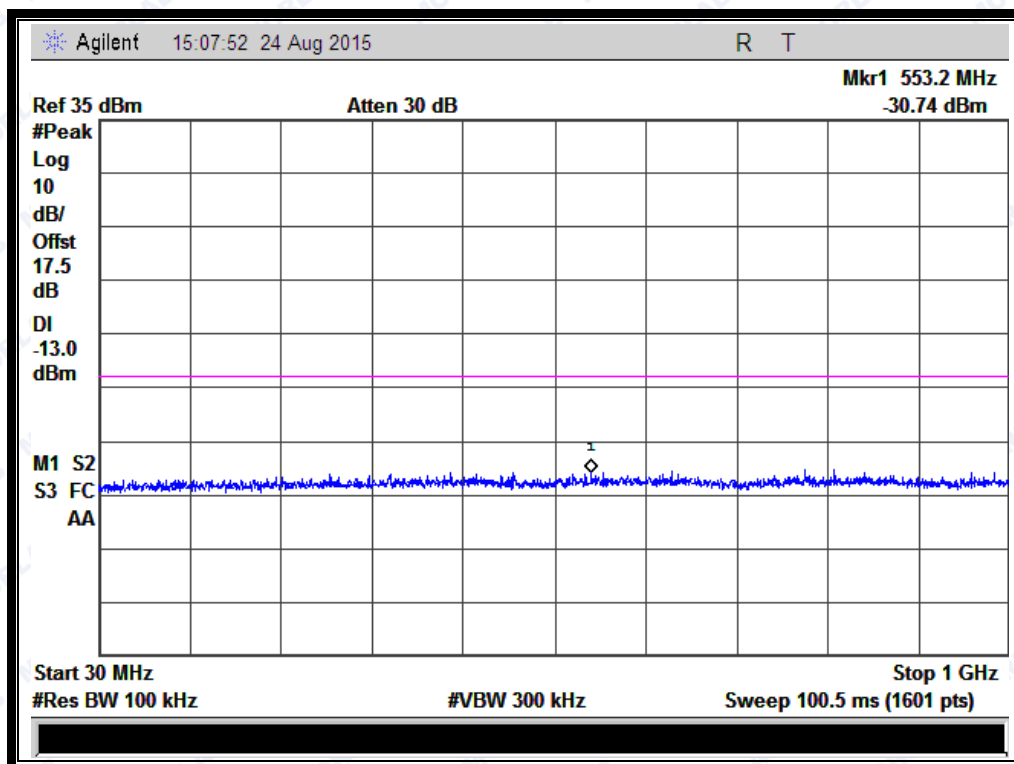


(Plot F1: EGPRS 1900MHz Channel = 512, 30MHz to 1GHz)

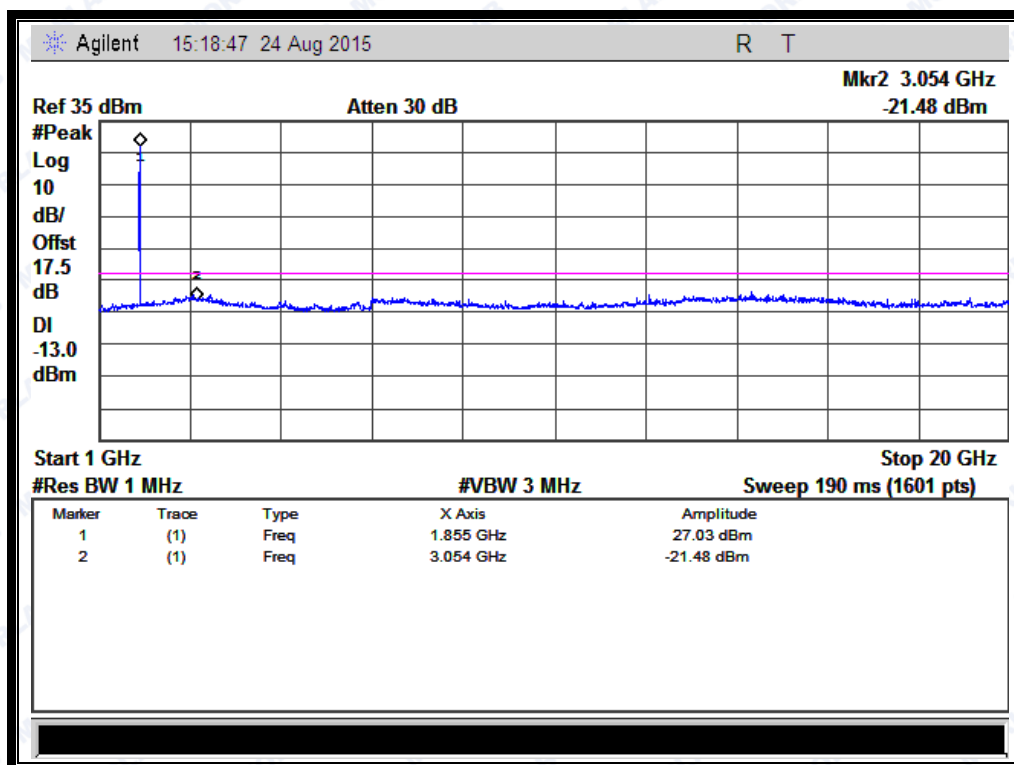


(Plot F1.1: EGPRS 1900MHz Channel = 512, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

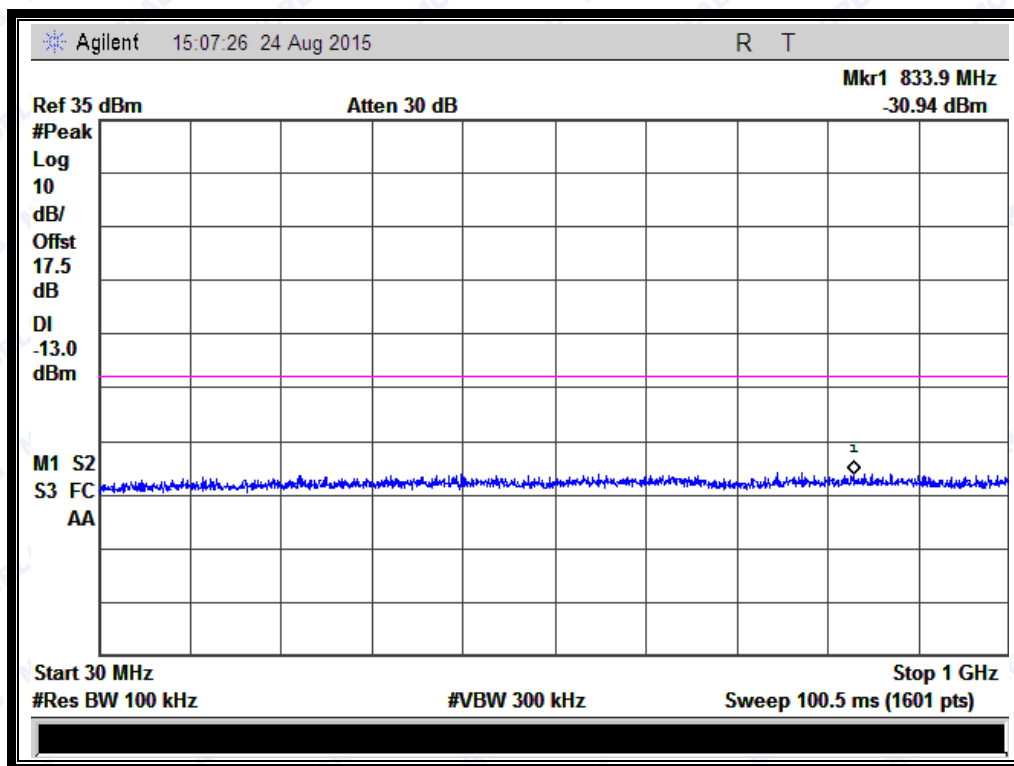


(Plot F2: EGPRS 1900MHz Channel = 661, 30MHz to 1GHz)

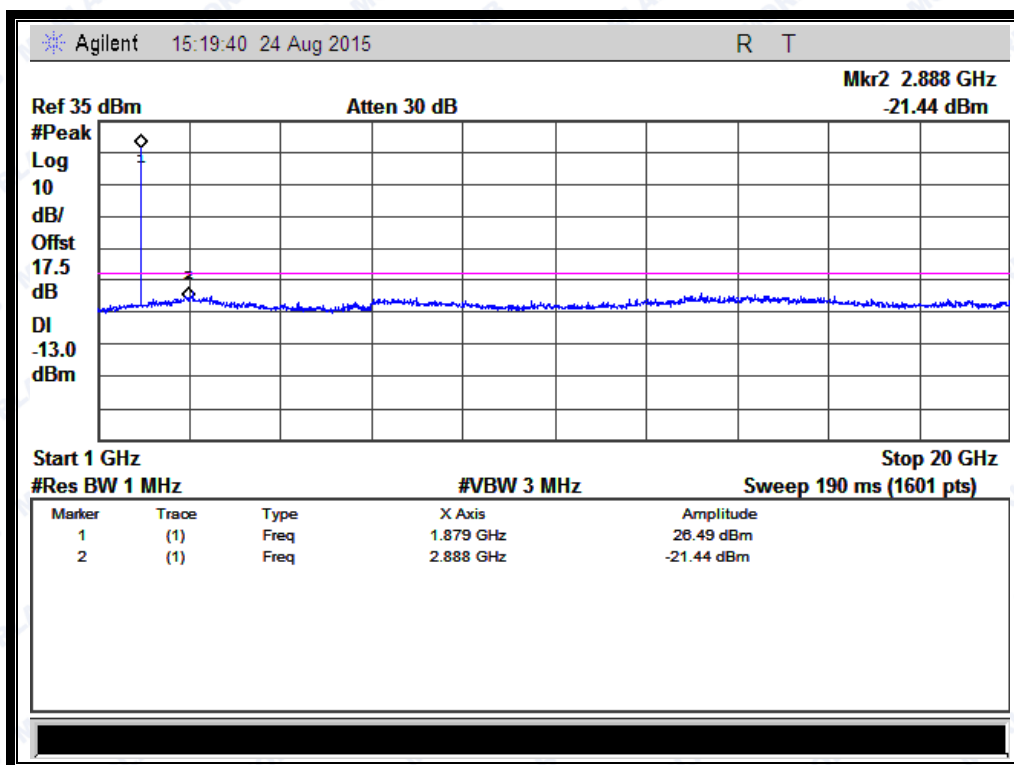


(Plot F2.1: EGPRS 1900MHz Channel = 661, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

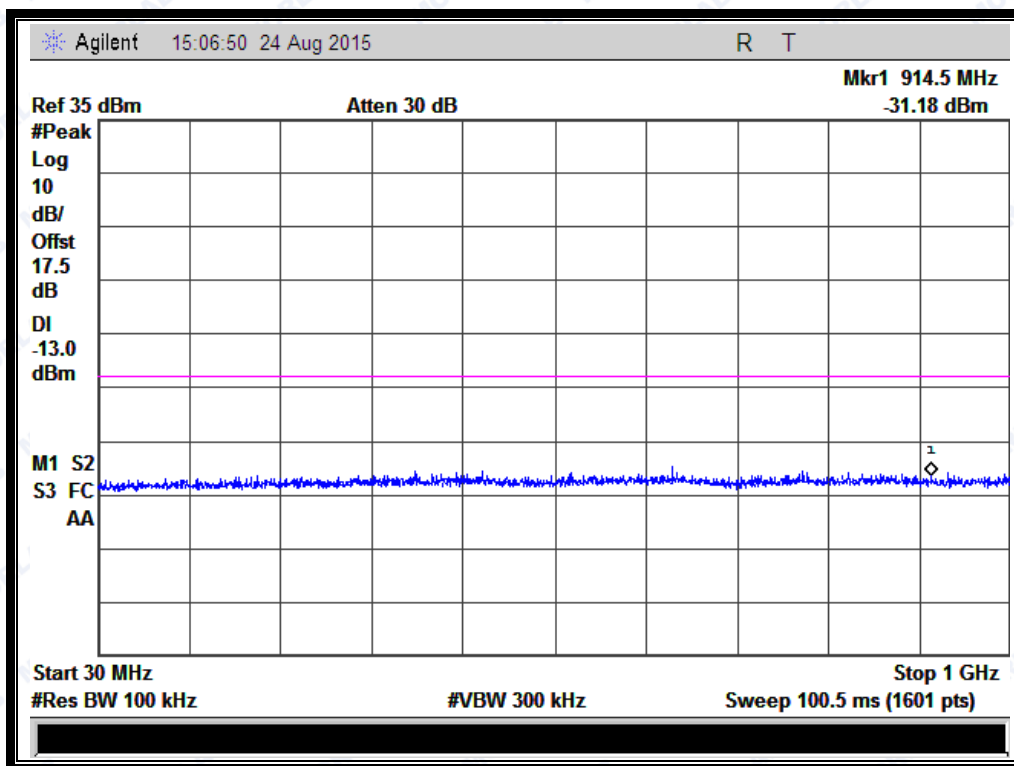


(Plot F3: EGPRS 1900MHz Channel = 810, 30MHz to 1GHz)

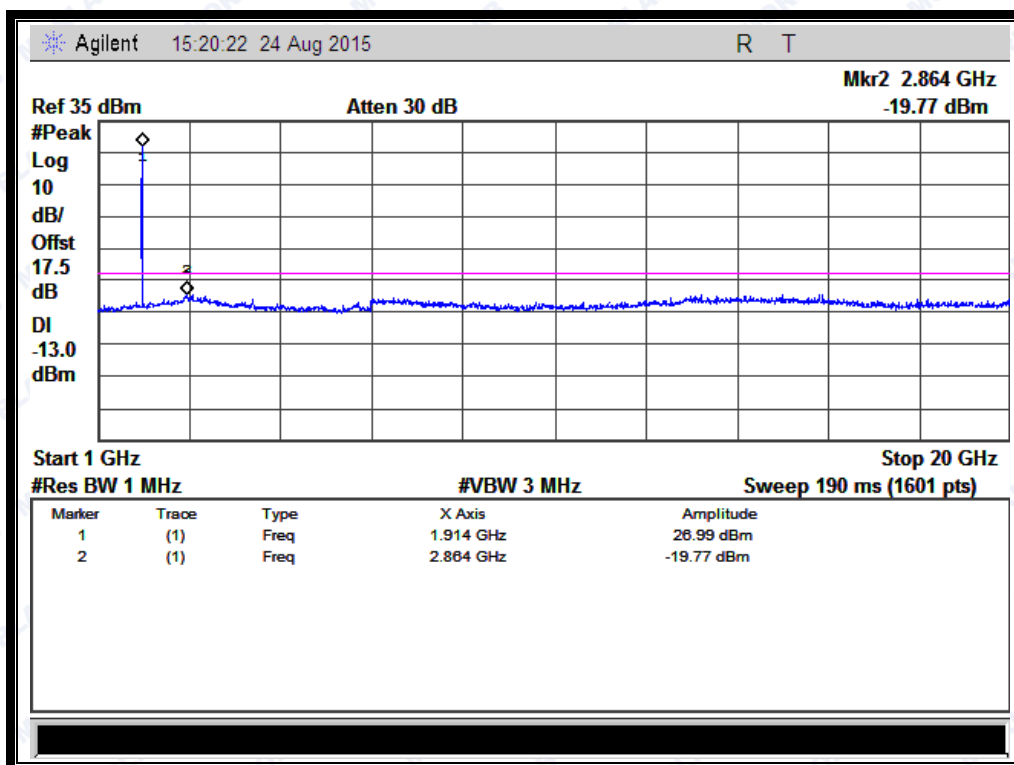


(Plot F3.1: EGPRS 1900MHz Channel = 810, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

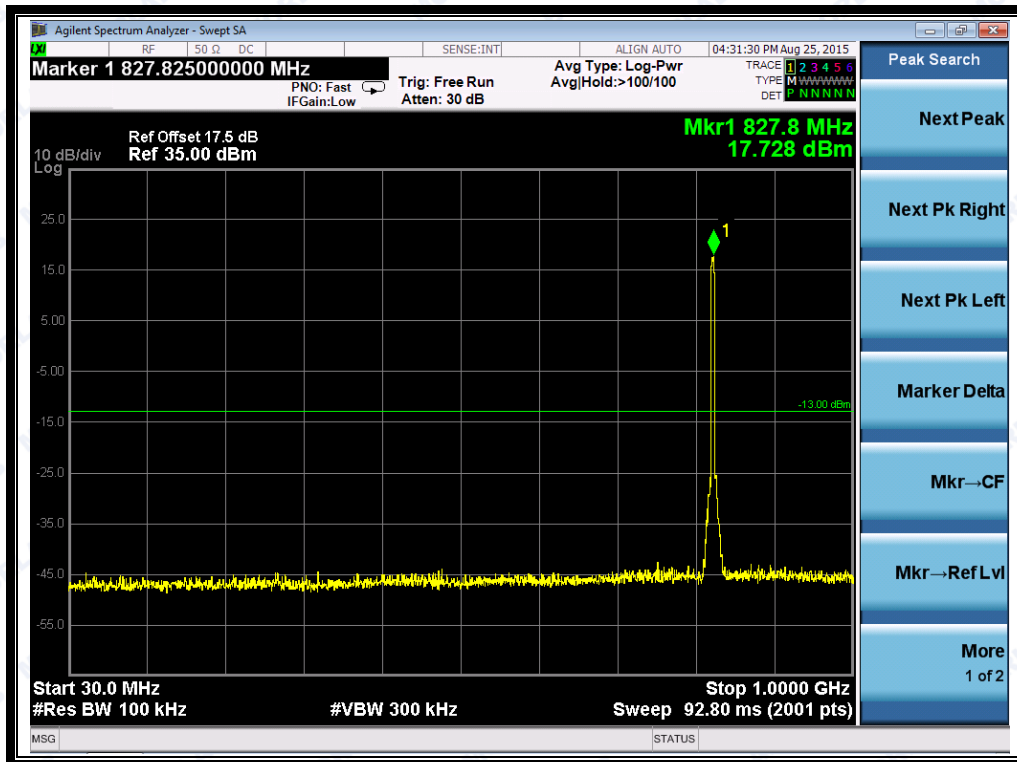


(Plot G1: WCDMA850MHz Channel = 4132, 30MHz to 1GHz)

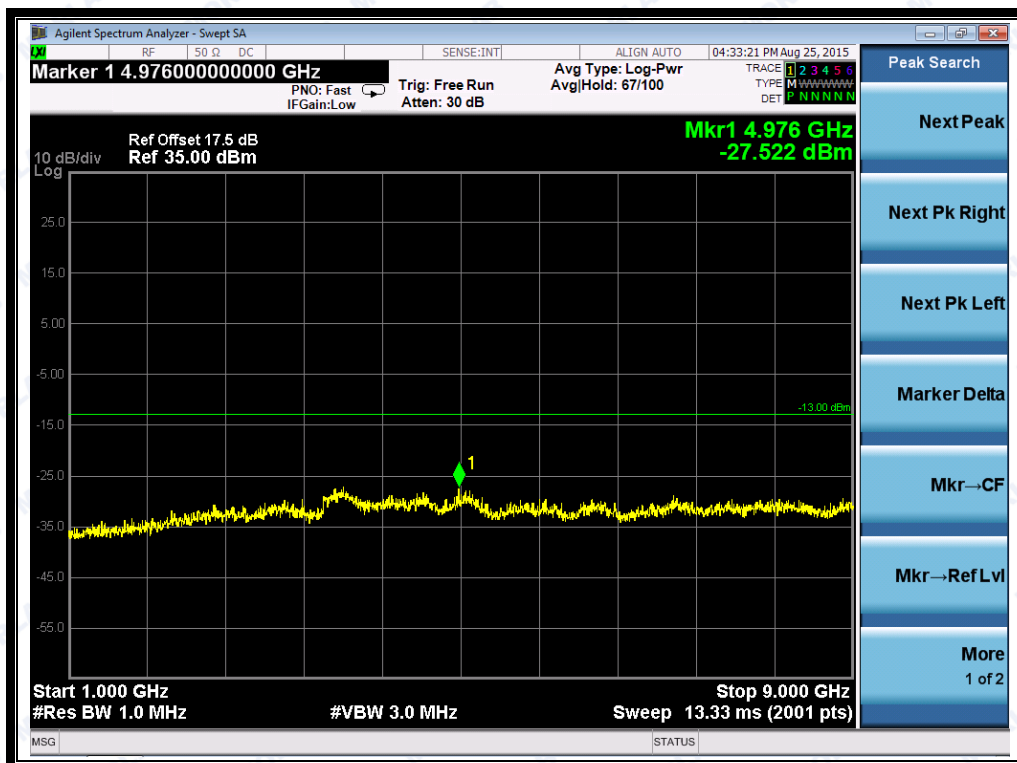


(Plot G1.1: WCDMA850MHz Channel = 4132, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

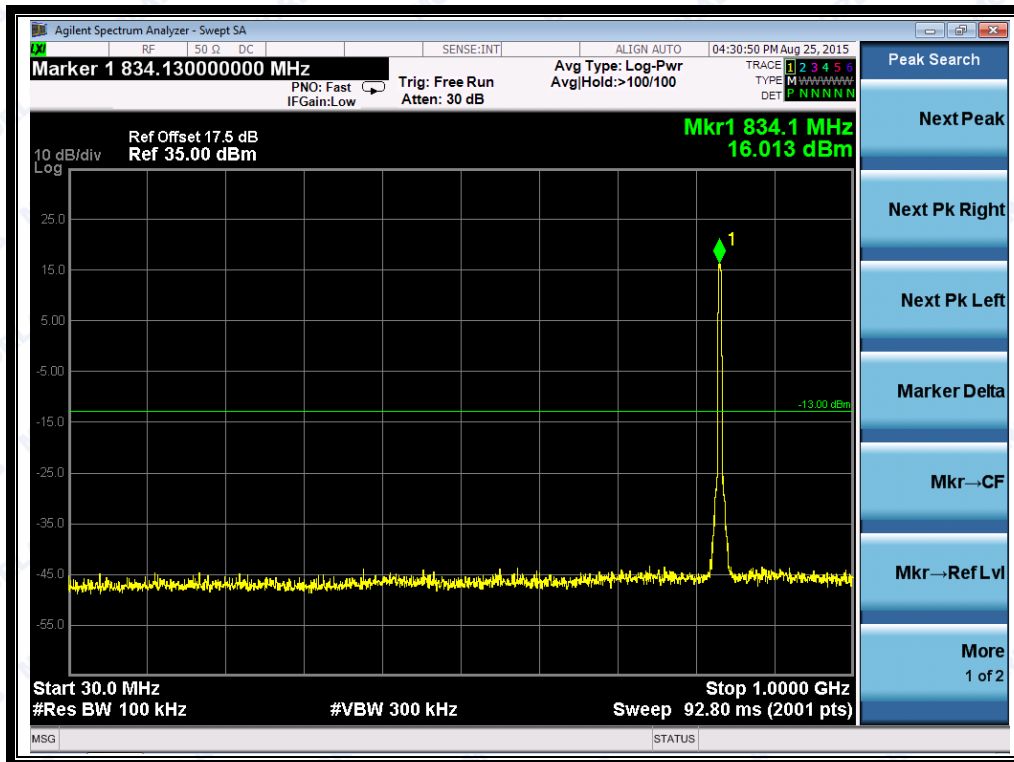


(Plot G2: WCDMA850MHz Channel = 4175, 30MHz to 1GHz)

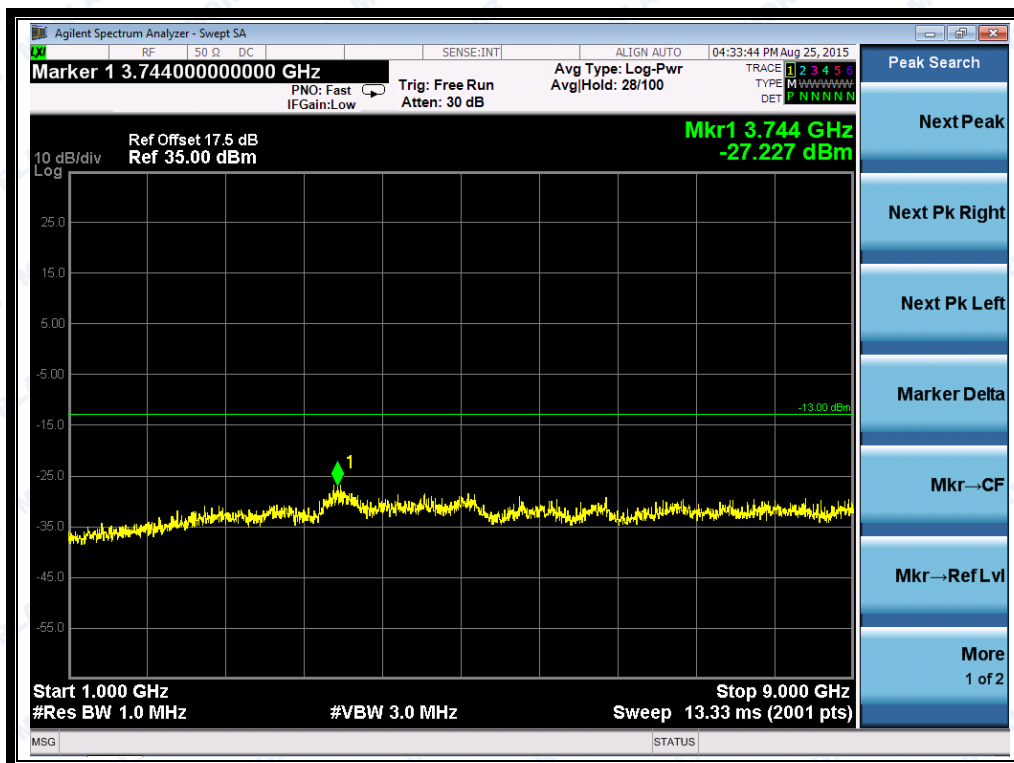


(Plot G2.1: WCDMA850MHz Channel = 4175, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

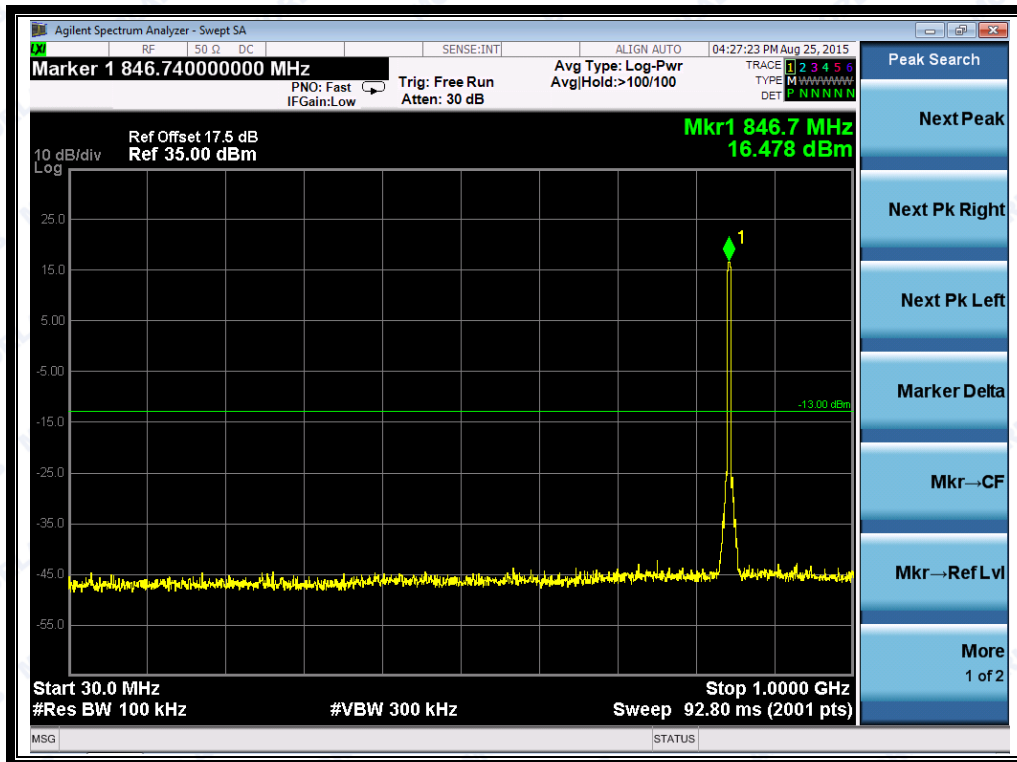


(Plot G3: WCDMA850MHz Channel = 4233, 30MHz to 1GHz)

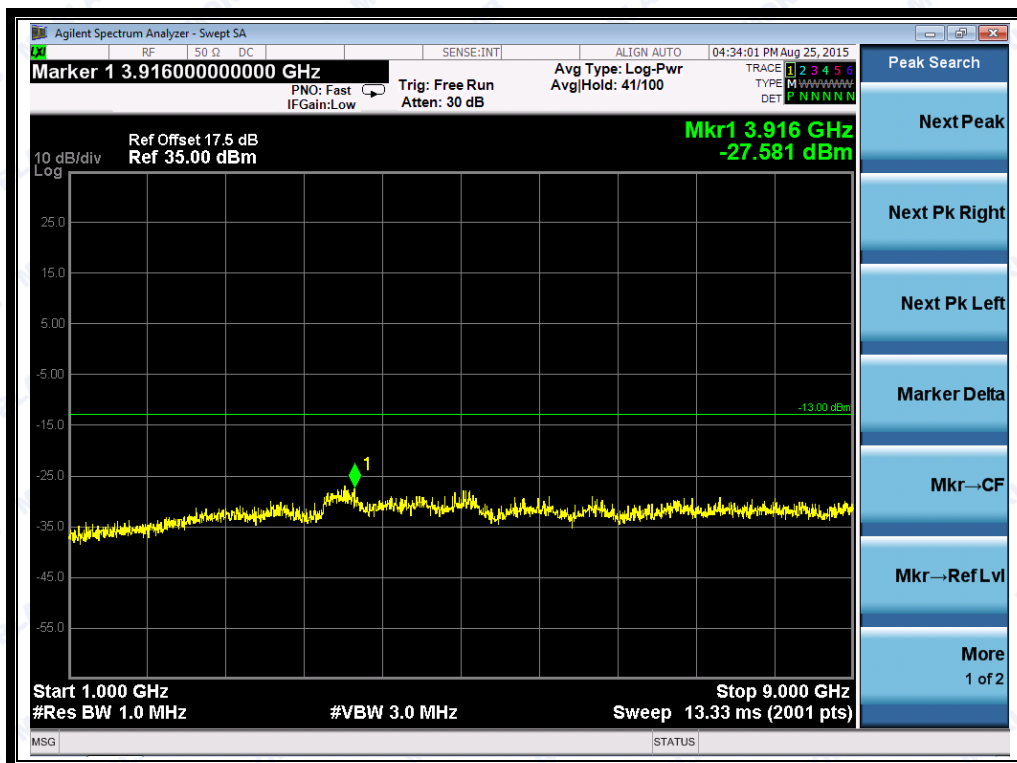


(Plot G3.1: WCDMA850MHz Channel = 4233, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

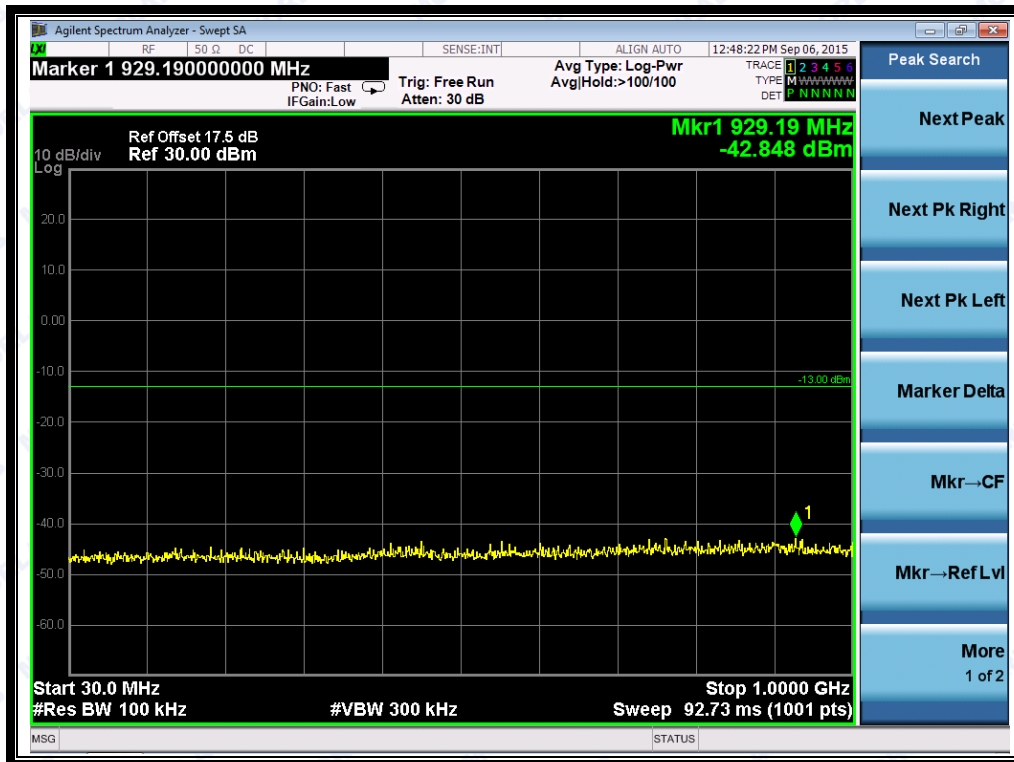


(Plot H1: WCDMA1700MHz Channel = 1312, 30MHz to 1GHz)

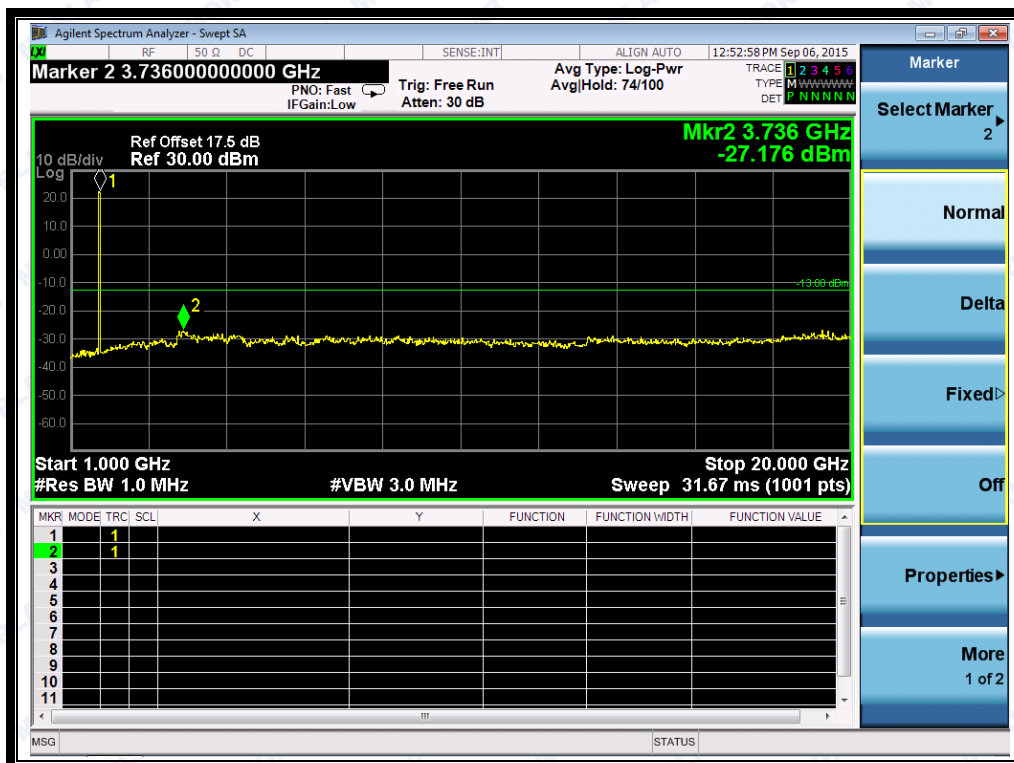


(Plot H1.1: WCDMA1700MHz Channel = 1312, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

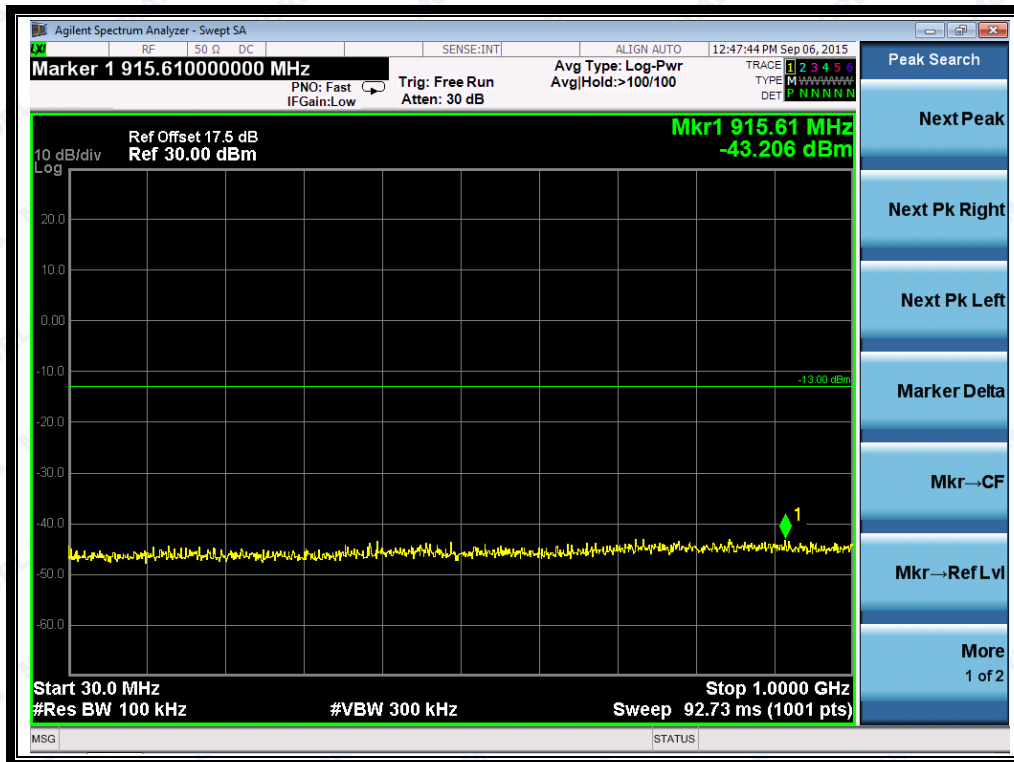


(Plot H2: WCDMA1700MHz Channel = 1412, 30MHz to 1GHz)

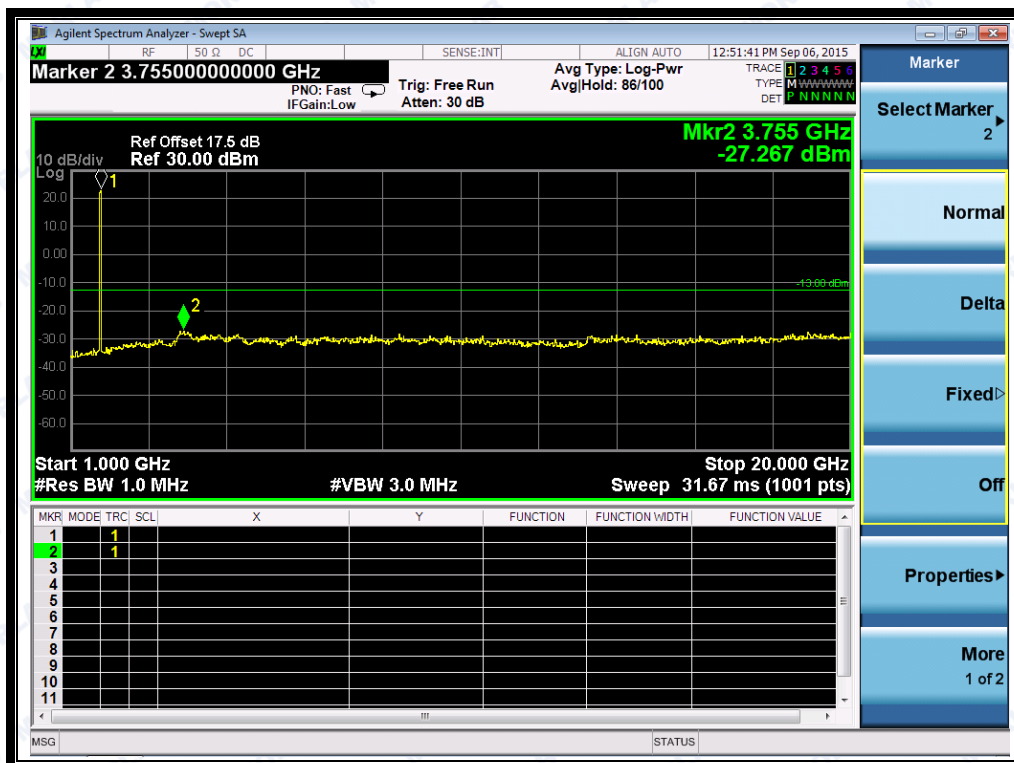


(Plot H2.1: WCDMA1700MHz Channel = 1412, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

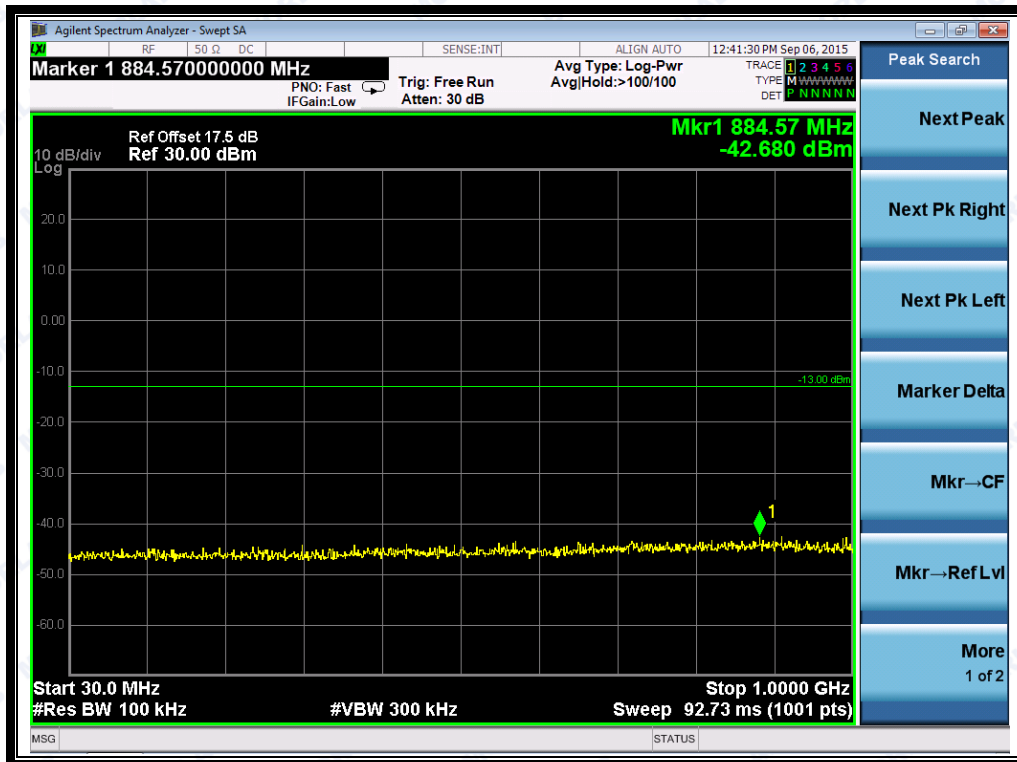


(Plot H3: WCDMA1700MHz Channel = 1513, 30MHz to 1GHz)

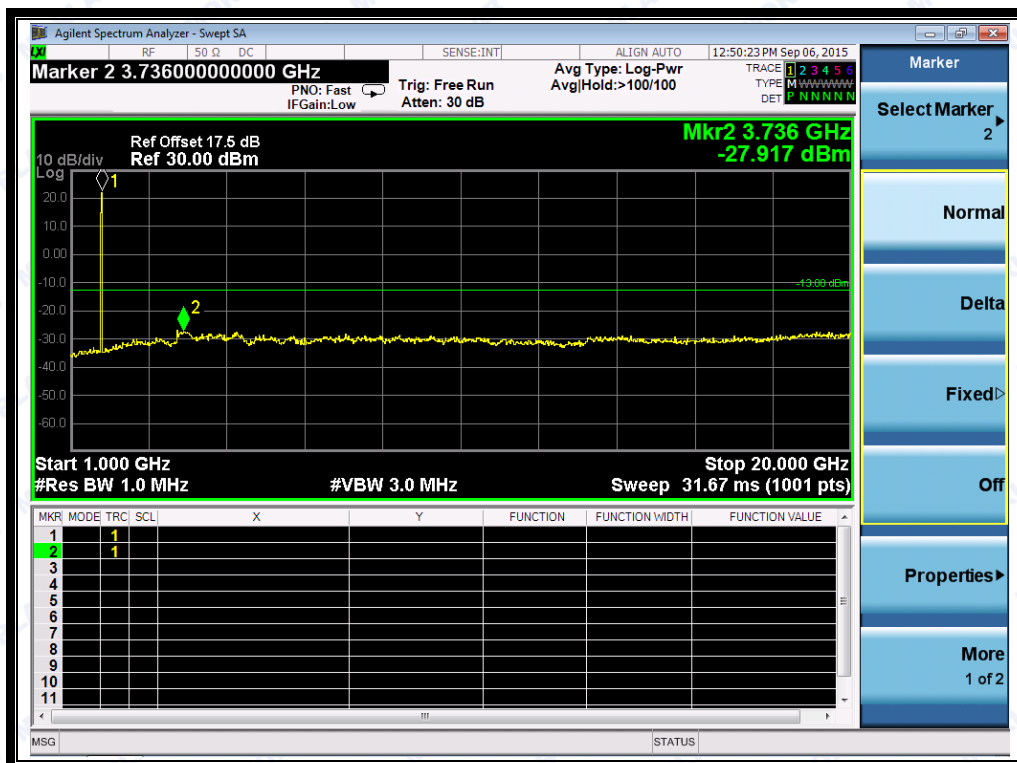


(Plot H3.1: WCDMA1700MHz Channel = 1513, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

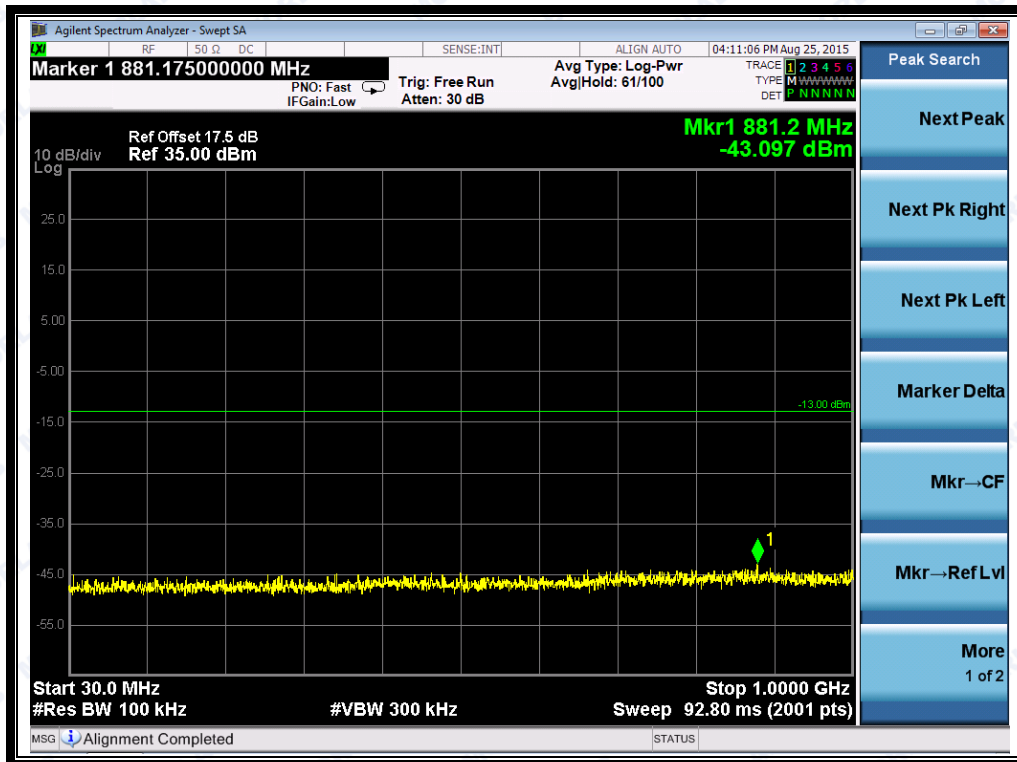


(Plot I1: WCDMA1900MHz Channel = 9262, 30MHz to 1GHz)

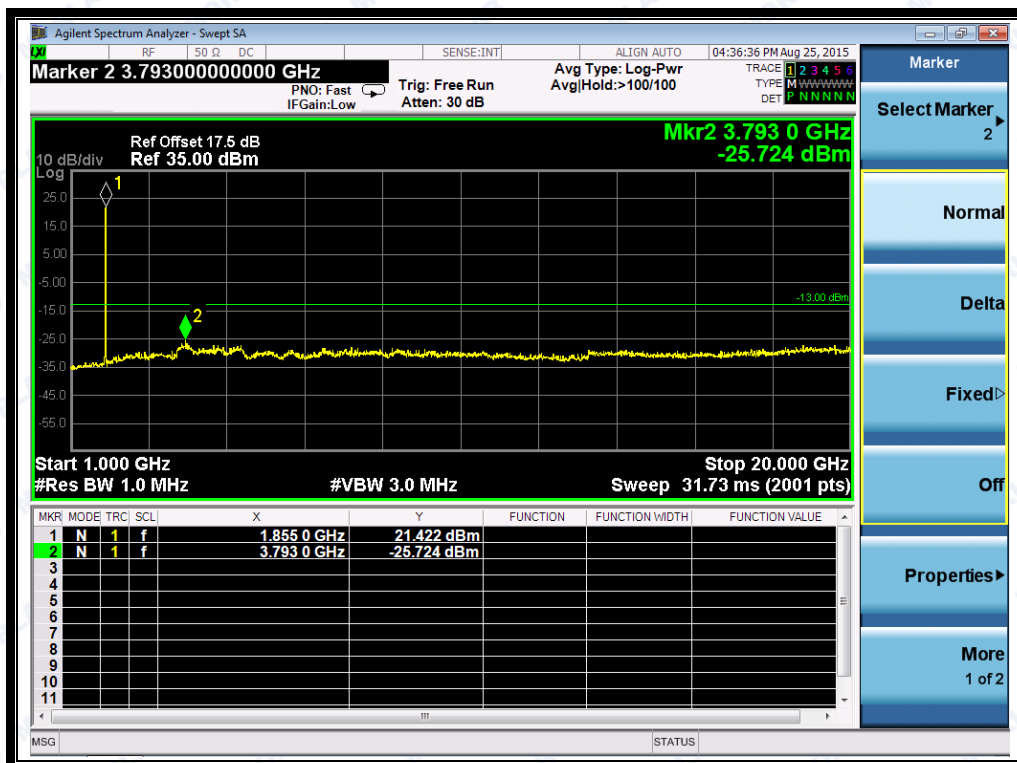


(Plot I1.1: WCDMA1900MHz Channel = 9262, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

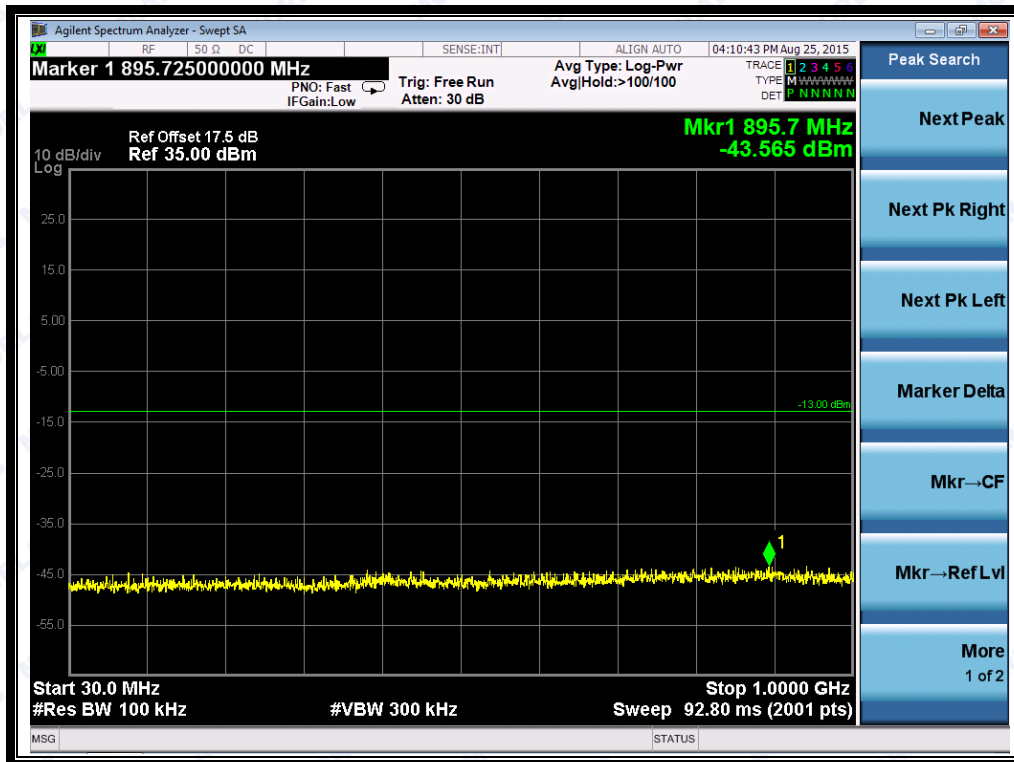


(Plot I2: WCDMA1900MHz Channel = 9400, 30MHz to 1GHz)

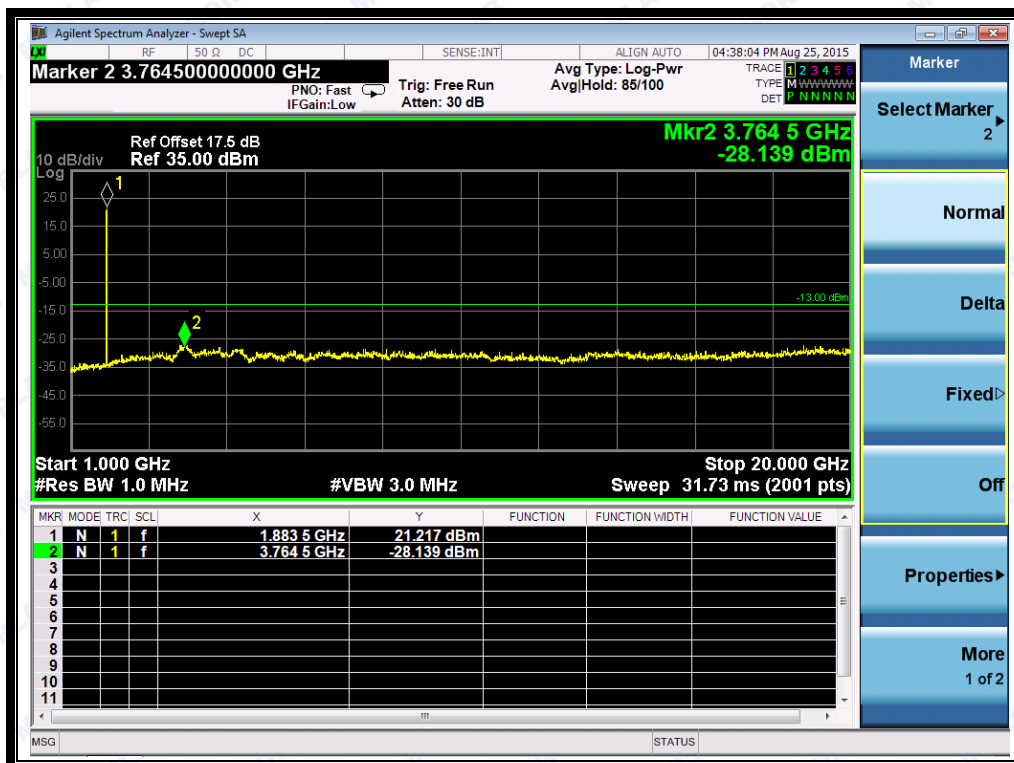


(Plot I2.1: WCDMA1900MHz Channel = 9400, 1GHz to 20GHz)



REPORT No.: SZ15080014W01

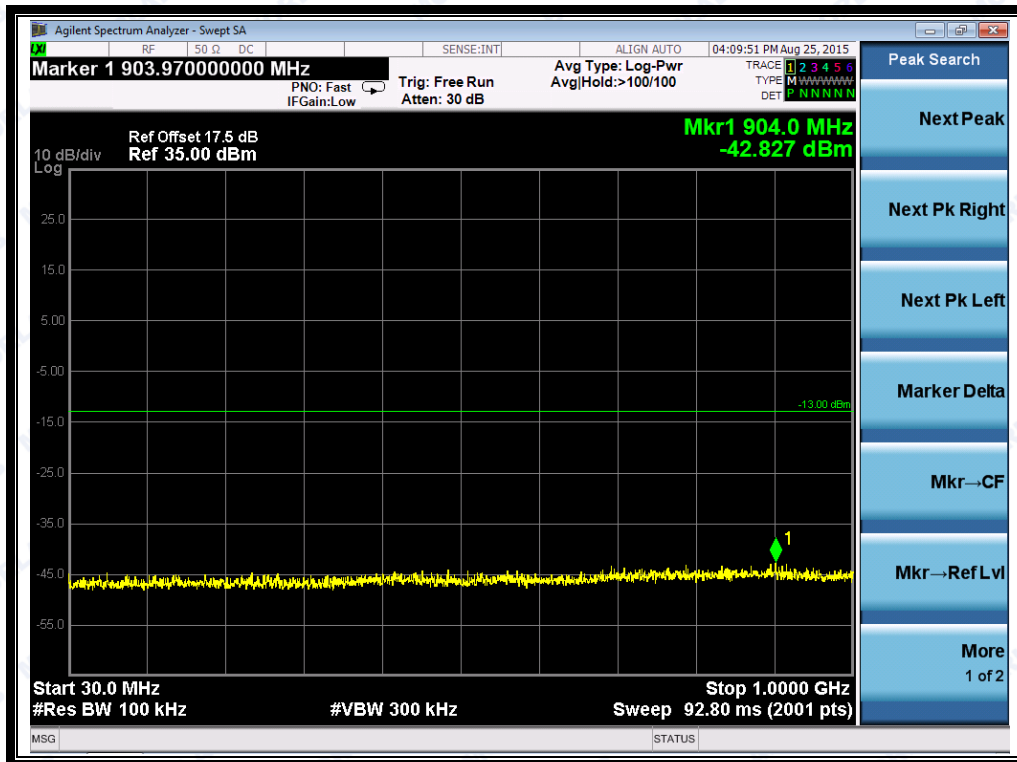


(Plot I3: WCDMA1900MHz Channel = 9538, 30MHz to 1GHz)

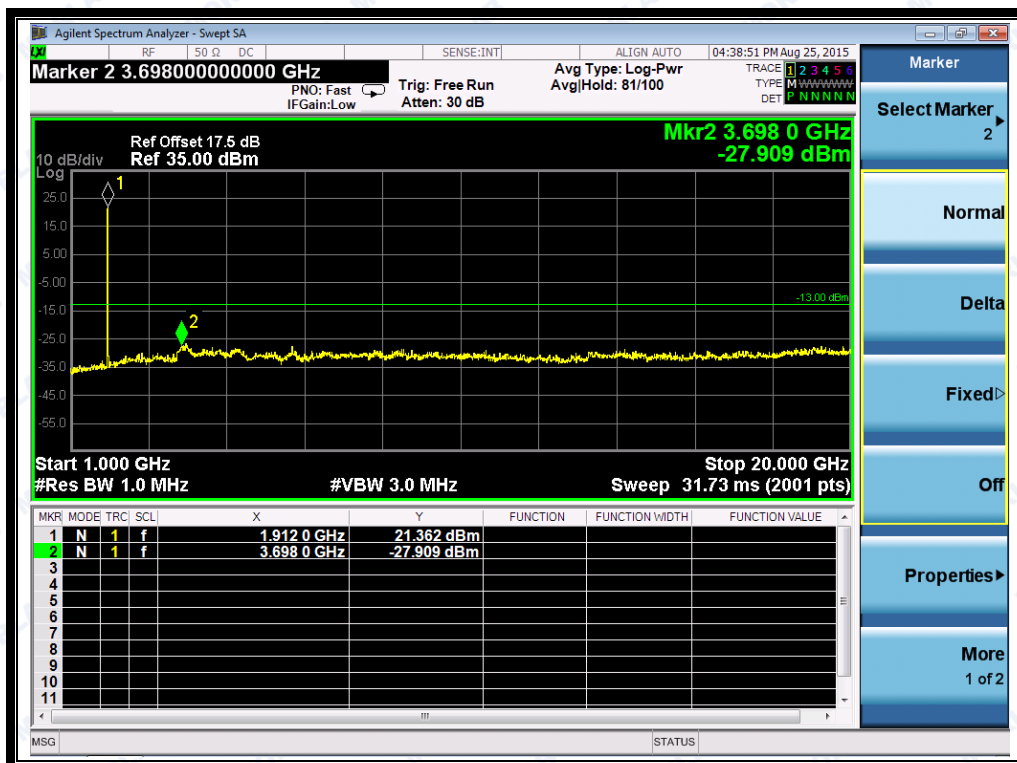


(Plot I3.1: WCDMA1900MHz Channel = 9538 1GHz to 20GHz)



REPORT No.: SZ15080014W01

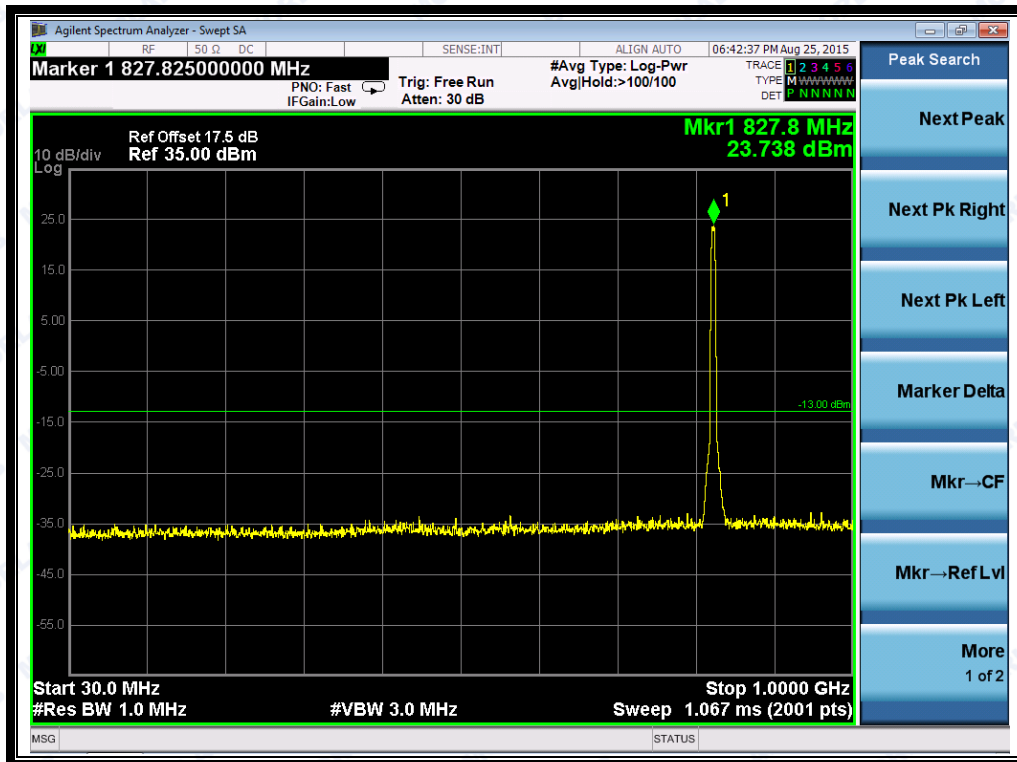


(Plot J1: HSDPA 850MHz Channel = 4132, 30MHz to 1GHz)

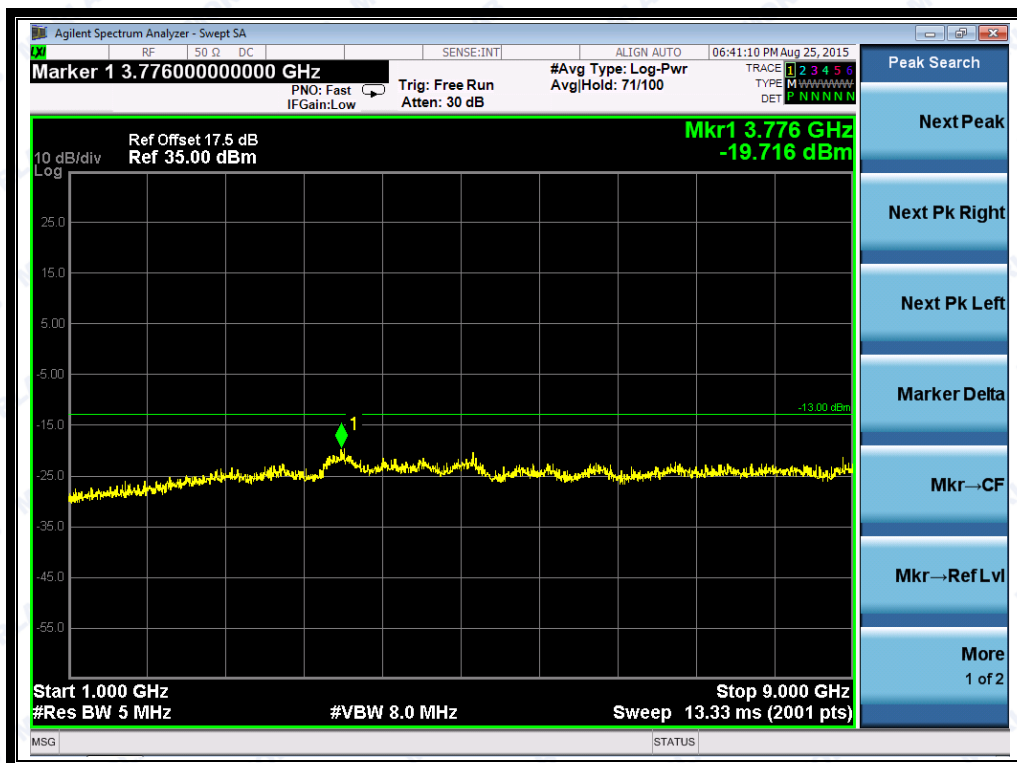


(Plot J1.1: HSDPA 850MHz Channel = 4132, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

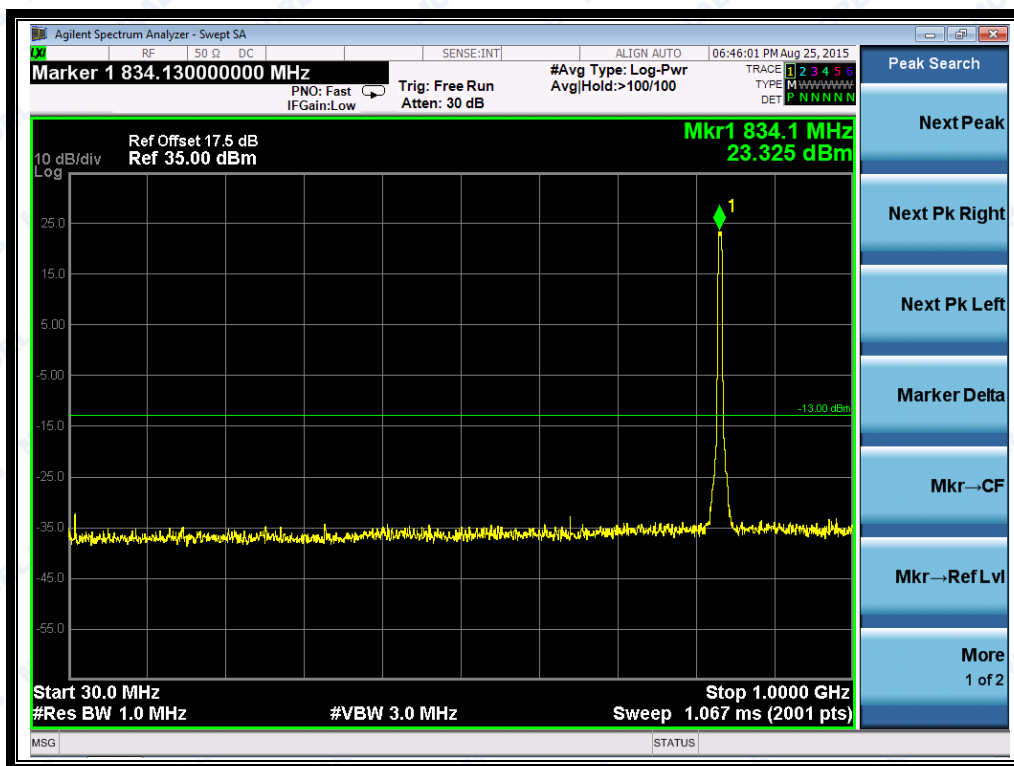


(Plot J2: HSDPA 850MHz Channel = 4175, 30MHz to 1GHz)

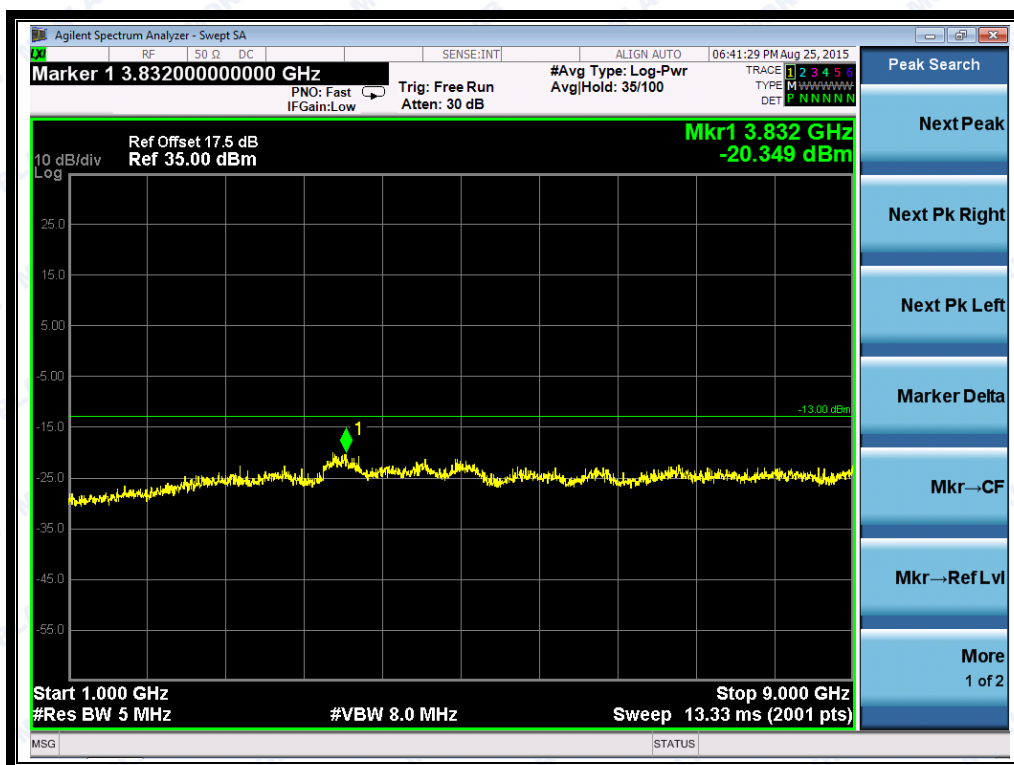


(Plot J2.1: HSDPA 850MHz Channel = 4175, 1GHz to 9GHz)



REPORT No.: SZ15080014W01

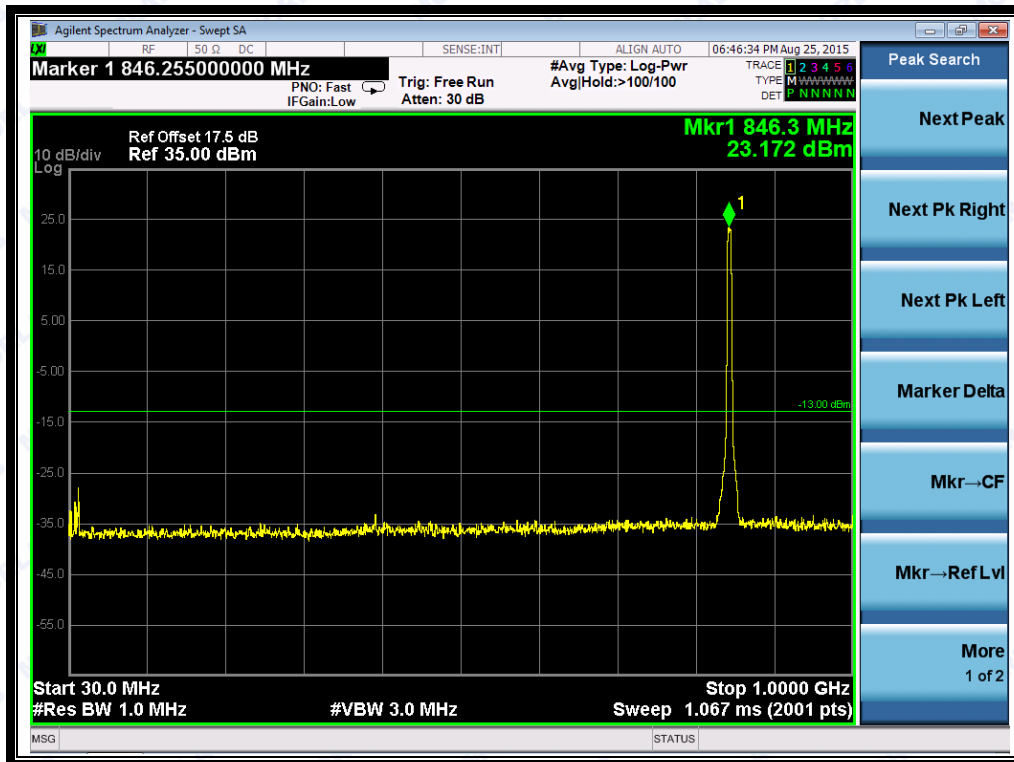

(Plot J3: HSDPA 850MHz Channel = 4233, 30MHz to 1GHz)

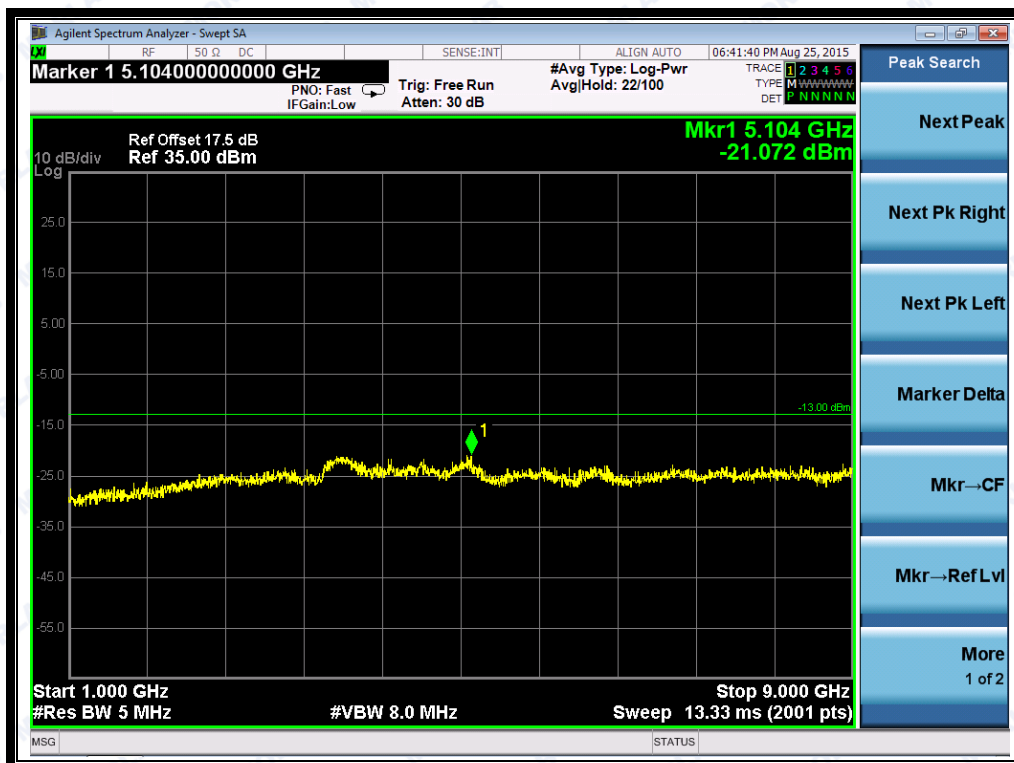

(Plot J3.1: HSDPA 850MHz Channel = 4233, 1GHz to 9GHz)