

Issued: 2015-8-05

TEST REPORT

Applicant Name & : DooGooD

Address 49 rue de Sèvres – 92100 BOULOGNE France

Sample Description

Product : RF RADIO EMITTER FOR DP LUMINOUS BUZZ C1

FCC ID : 2AFJR-DOWINBZ001

Model No. : 2034414

Electrical Rating : For adapter: 100-240V 50/60Hz

For battery: DC 6V, 1A, Max 6w

Frequency: 433.92MHz

Date Received : 11 May 2015

Date Test Conducted : 11 May 2015 – 7 July 2015

Test standards : 47 CFR PART 15 Subpart C: 2014 section 15.231

Test Result : Pass

Conclusion : The submitted samples complied with the above rules/standards.

Remark : None.

Prepared and Checked By:

Approved By:

Sky Zhu Engineer

Intertek Guangzhou

Helen Ma Team Leader

Intertek Guangzhou

05 August 2015 Date

Signature

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
Tel / Fax: 86-20-8213 9688/86-20-3205 7538

FCC ID: 2AFJR-DOWINBZ001 Page 1 of 25



Issued: 2015-8-05

CONTENT

TEST I	REPORT	`	1
CONT	ENT		2
1.0	Summa	ary of Test	3
2.0	Genera	l Description	4
	2.1	Product Description	4
	2.3	Test Methodology	5
	2.4	Test Facility	5
3.0	System	Test Configuration	6
	3.1	Justification	6
	3.2	EUT Exercising Software	7
	3.3	Special Accessories	7
	3.4	Measurement Uncertainty	7
	3.5	Equipment Modification	7
	3.6	Support Equipment List and Description	7
4.0	Measu	rement Results	8
	4.1	Antenna Requirement:	8
	4.2	Radiated Emissions	9
	4.3	Occupied Bandwidth	. 17
	4.4	Dwell Time:	. 19
	4.5	Conducted Emission Test	.21
	4.5.1.	Block Diagram of Test Setup	.21
	4.5.2.	Test Setup and Procedure	.21
	4.5.3.	Limit	.22
	4.5.4.	Test Data	.23
	4.5.5.	Emission Curve	. 24
	4.5.6.	Measurement Uncertainty	. 24
5.0	Test Ed	quipment List	25



Issued: 2015-8-05

1.0 Summary of Test

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Conducted Emission	FCC PART 15	ANSI C 63.10: Clause	PASS
Conducted Emission	section 15.107	6.2	PASS
Radiated Emission	FCC PART 15	ANSI C 63.10: Clause	PASS
Radiated Emission	section 15.231(b)	6.4, 6.5 and 6.6	FASS
Occupied Bandwidth	FCC PART 15	ANSI C 63.10:	PASS
Occupied Baildwidth	section 15.231(c)	Clause 6.9	FASS
Dwell Time	FCC PART 15	FCC PART 15:	PASS
Dwen Time	section 15.231(a)	Section 15.231(a)	I ASS

Remark:

N/A: not applicable. Refer to the relative section for the details. EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.



Page 4 of 25

Issued: 2015-8-05

2.0 General Description

2.1 Product Description

Operating Frequency 433.92 MHz

Type of Modulation: ASK modulated by internal signal

Antenna Type Integral
Antenna gain: 0 dBi

Function: Wireless control with 433.92 MHz as carrier.

Power Supply: DC 6V,100-240V for adaptor

Power cord: Power by battery, the battery can be charged



Issued: 2015-8-05

2.3 Test Methodology

For radiated emission measurement, preliminary scans and final tests were performed in the semi-anechoic chamber to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

2.4 Test Facility

All of the tests are performed at:

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China.

This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 549654.

FCC ID: 2AFJR-DOWINBZ001 Page 5 of 25



Issued: 2015-8-05

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, it was powered by DC 6V supply.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. The spurious emissions more than 20 dB below the permissible value are not reported.

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30	5th harmonic of highest fundamental frequency or to 100
GHz	GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Remark: Test frequency is 433.92MHz.



Page 7 of 25

Issued: 2015-8-05

3.2 EUT Exercising Software

N/A

3.3 Special Accessories

No special accessories used.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.5 Equipment Modification

Any modifications installed previous to testing by Packo Gift Co.,Ltd Will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

3.6 Support Equipment List and Description

This product was tested as an independent unit.



Issued: 2015-8-05

4.0 Measurement Results

4.1 Antenna Requirement:


Standard requirement

15.203 requirement:

For intentional device. According to 15.203, an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is an integral antenna and no consideration of replacement. The best case gain of the antenna is 0 dBi.

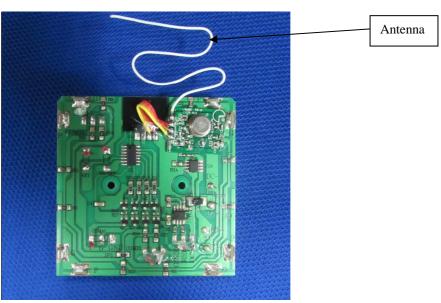



Issued: 2015-8-05

4.2 Radiated Emissions

Test Requirement: FCC Part 15 C section 15.231(b)

Test Method: ANSI C63.10: Clause 6.4, 6.5 and 6.6

Measurement Distance: 3 m (Semi-Anechoic Chamber)

Test Status: Test the transmitter in continuous transmitting mode.

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: The field strength of emissions from intentional radiators operated

under this Section shall not exceed the following:

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics
Frequency	(dBµV/m @ 3 m)	and Spurious Emissions
MHz	(α Β μ V /III @ 3 III)	(dBµV/m @ 3 m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48**	41.94 to 51.48**
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94**	51.48 to 61.94**
Above 470	81.94	61.94

^{**} linear interpolations

The fundamental frequency of the EUT is 433.92 MHz

The limit for average or QP field strength dBuV/m for the fundamental emission= 80.8 dB μ V/m

No fundamental is allowed in the restricted bands.


The limit for average field strength dBuV/m for the spurious emission=60.8 dBuV/m. Spurious Emissions do not fall in the restricted bands must be less than 60.8 dBuV/m or limits shown in Section 15.209, whichever limit permits a higher field strength.

Spurious Emissions appear within the restricted bands shall not exceed the limits shown in Section 15.209.



Issued: 2015-8-05


Test Configuration:
1) 9 kHz to 30 MHz emissions:

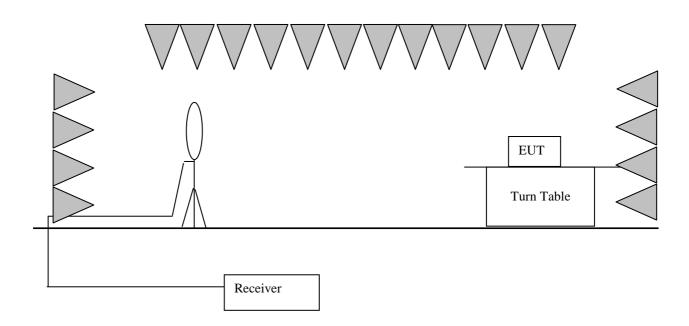




Issued: 2015-8-05

2) 30 MHz to 1 GHz emissions:

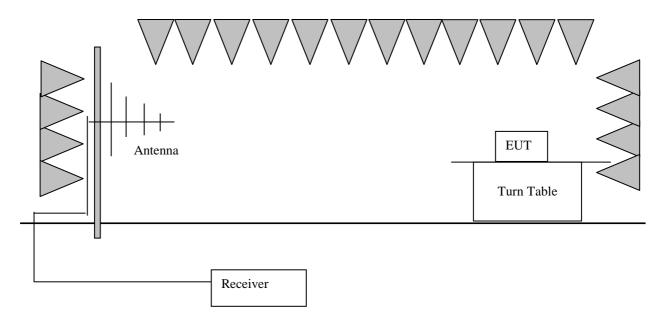

3) 1 GHz to 40 GHz emissions:

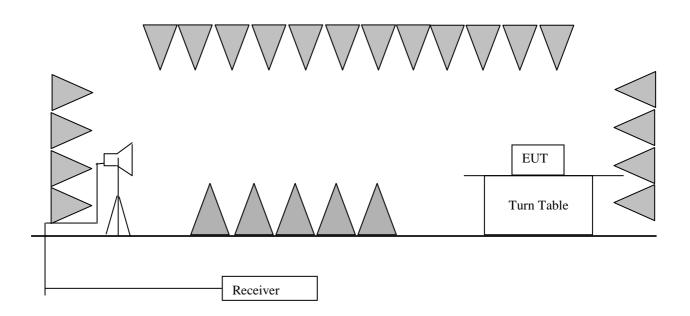

Test Procedure:

1) 9 kHz to 30 MHz emissions:



Issued: 2015-8-05

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 40 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Detector: For Peak and Quasi-Peak value:

RBW = 1 MHz for $f \ge 1$ GHz, 200 Hz for 9 kHz to 150 kHz 9 kHz for 150 kHz to 30 MHz 120 kHz for 30 MHz to 1GHz

 $VBW \ge RBW$ Sweep = auto

Detector function = peak for $f \ge 1$ GHz, QP for f < 1 GHz

Trace = max hold For AV value:

Average = Peak value + $20\log$ (Duty cycle)

The average correction factor is computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:

The duration of one cycle =28.99ms

Effective period of the cycle = (0.96×10) ms=9.6ms

DC =9.6/28.99=0.3311 or 33.11 %


Therefore, the averaging factor is found by 20lg0.3311=-9.6

Please refer to below plots for more details. The test mode is continues transmit; it is the worst case mode.


FCC ID: 2AFJR-DOWINBZ001 Page 12 of 25




Issued: 2015-8-05

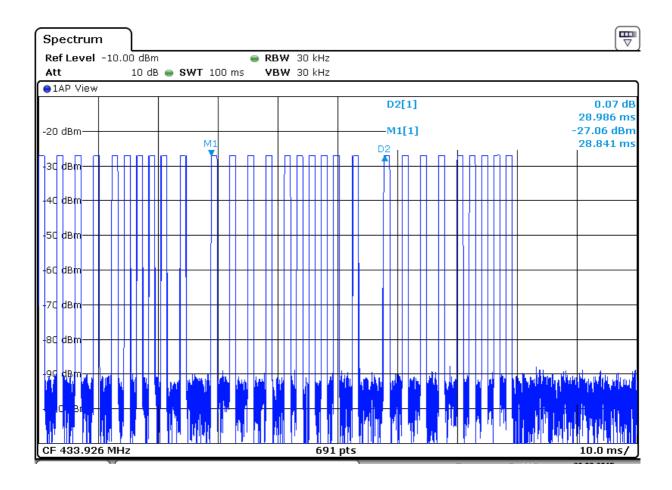





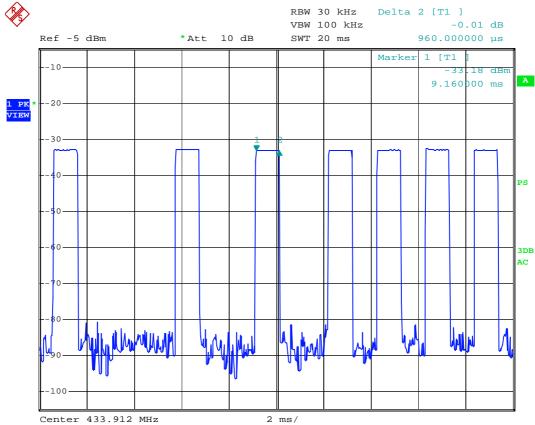



Issued: 2015-8-05

1) Fundamental emission:

Antenna polarization: Continues transmit Horizontal:

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Remark
433.87	62.77	18.60	81.37	100.80	-19.43	Peak
433.87	81.37	-9.60	71.77	80.80	-9.03	Average

Antenna polarization: Continues transmit Vertical

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBµV/m)		Remark
433.87	56.78	18.60	75.38	100.80	-25.42	Peak
433.87	75.38	-9.60	65.78	80.80	-15.02	Average

Y: rotate EUT by 90° vertically.

X: rotate EUT by 90° clockwise.

Z: EUT as Radiated Emission test setup photograph.

2) other emissions:

The receiver was scanned from the lowest frequency generated within the EUT to 5 GHz.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier.

The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Peramplifier Factor. The following test results were performed on the EUT.

Test the EUT in transmitting mode:

9 kHz~30 MHz Field Strength of Unwanted Emissions. Peak and Average or Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~5 GHz Field Strength of Unwanted Emissions. Peak and Average or Quasi-Peak Measurement.

FCC ID: 2AFJR-DOWINBZ001 Page 15 of 25



Issued: 2015-8-05

Continues transmit Horizontal.

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Remark
867.87	19.88	25.80	45.68	60.80	-15.12	Peak
1301.00	64.78	-13.20	51.58	54.00	-2.42	Peak
1736.00	59.23	-10.30	48.93	60.80	-11.87	Peak
3036.80	62.94	-4.50	58.44	60.80	-2.36	Peak
3470.80	56.88	-3.30	53.58	60.80	-7.22	Peak

Continues transmit Vertical

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Remark
867.87	9.80	25.80	35.60	60.80	-25.20	Peak
1302.00	65.06	-13.10	51.96	54.00	-2.04	Peak
1735.50	58.05	-10.30	47.75	60.80	-13.05	Peak
2604.00	57.39	-6.40	50.99	60.80	-9.81	Peak
3036.80	67.54	-4.50	63.04	80.80	-17.76	Peak
3036.80	63.04	-9.60	53.44	60.80	-7.36	AV

Charging for battery Horizontal

 TOTIZOTICAL						
Frequency	Read Level	Correction	Level	Limit Line	Over Limit	Remark
(MHz)	(dBuV)	Factor	(dBuV/m)	(dBµV/m)	(dB)	
		(dB)				
35.00	-3.00	27.50	24.50	40.00	-15.50	QP
148.00	3.10	26.40	29.50	43.50	-14.00	QP
600.00	4.90	25.20	30.10	46.00	-15.90	QP

Charging for battery

Vertical

Frequenc	y Read Leve	I Correction	Level	Limit Line	Over Limit	Remark
(MHz)	(dBuV)	Factor (dB)	(dBuV/m)	(dBµV/m)	(dB)	
35.84	7.90	27.50	35.40	40.00	-4.60	QP
108.60	8.80	26.40	35.20	43.50	-8.30	QP
186.00	4.90	25.20	30.10	46.00	-15.90	QP

Remark:

Page 16 of 25 FCC ID: 2AFJR-DOWINBZ001



Issued: 2015-8-05

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

4.3 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.231 (c)

Test Method: ANSI C63.10: Clause 6.9

Test Status: Test in continuously transmitting mode.

Requirements: 15.231 (c) The bandwidth of the emission shall be no wider

than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the

points 20 dB down from the modulated carrier.

Method of measurement: The useful radiated emission from the EUT was detected by

the spectrum analyzer with peak detector. Record the 20 dB

bandwidth of the carrier.

Test result:

Test Channel	bandwidth	Limit
433.92MHz	156 kHz	1.09 MHz


Remark:

The bandwidth limit is $433.92 \times 0.0025 = 1.09 \text{ MHz}$



Issued: 2015-8-05

Test plot:

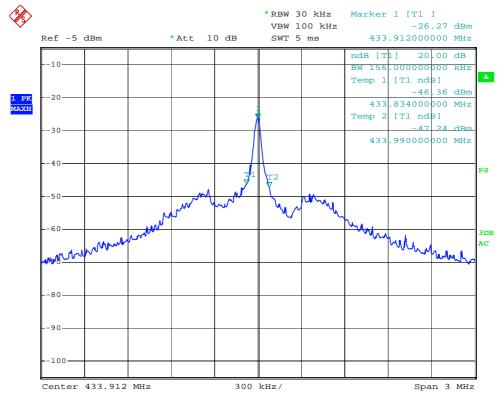



Issued: 2015-8-05

4.4 Dwell Time:

Test Requirement: FCC Part 15 C section 15.231(a)
Test Method: FCC Part 15 C section 15.231(a)

Test Status: Test in transmitting mode.

Requirements:

1. Regulation 15.231 (a) The provisions of this Section are restricted to periodic operation within the band 40.66 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

Result:

The EUT is a remote switch without audio or video transmitted.

The EUT meets the requirements of this section.

2. Regulation 15.231 (a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Result:


Carrier Frequency	Shutdown Time	Limit
433.92MHz	0.27s	≤5s

Result polt as follows:

FCC ID: 2AFJR-DOWINBZ001 Page 19 of 25



Report No.: 150511029GZU-001 Issued: 2015-8-05

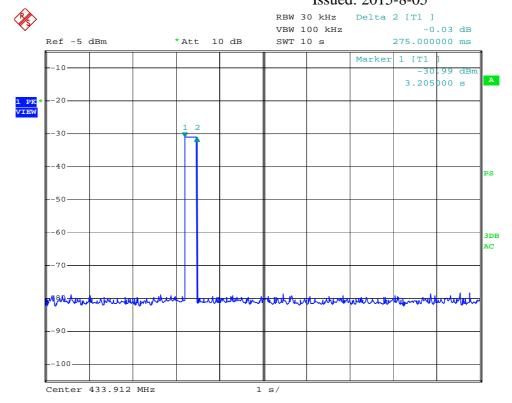

3. Regulation 15.231 (a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result:

The EUT does not have automatic transmission.

4. Regulation15.231 (a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

Result:

The EUT does not employ periodic transmission.

5. Regulation 15.231 (a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result:

This section is not applicable to the EUT.




Issued: 2015-8-05

4.5 Conducted Emission Test

Test Result: Pass

4.5.1. Block Diagram of Test Setup

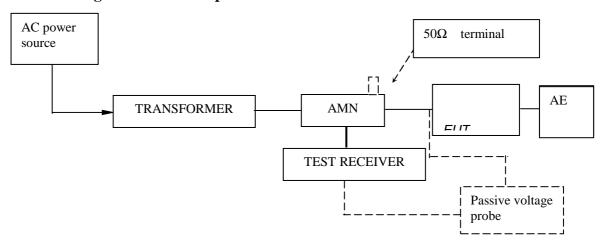

4.5.2. Test Setup and Procedure

Test was performed according to ANSI C63.4: 2009. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane(Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.



Issued: 2015-8-05

4.5.3. Limit

Class B

Frequency range MHz	AC mains terminals dB (uV)		
	Quasi-peak	Average	
0.15 to 0.5	66 to 56	56 to 46	
0.5 to 5	56	46	
5 to 30	60	50	

Note 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The lower limit is applicable at the transition frequency.




Issued: 2015-8-05

4.5.4. Test Data


At main terminal: Pass Test Voltage: AC120 V, 60 Hz

Tested Wire: Live Operation Mode: Charging for battery

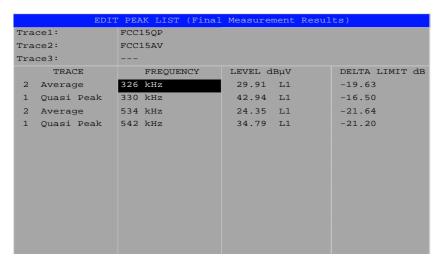

Tested Wire: Neutral

Operation Mode: Charging for battery

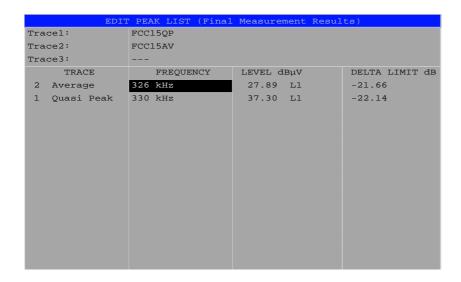





Issued: 2015-8-05

4.5.5. Emission Curve



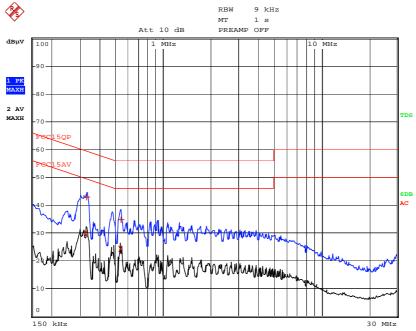

Tested Wire: Neutral

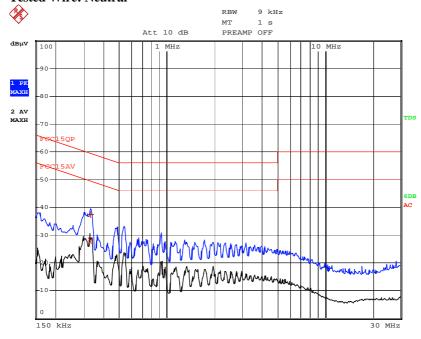

4.5.6. Measurement Uncertainty

Uncertainty: 2.58 dB at a level of confidence of 95%



Issued: 2015-8-05

5.0 Test Equipment List

Radiated Emission

Equipment No.	Equipment	Model	Manufacturer	Cal. date (YYYY-MM-DD)	Calibration Interval
EM030-01	3m Semi-Anechoic Chamber	$9\times6\times6$ m ³	ETS·LINDGREN		
EM030-02	Control room for 3m Semi- Anechoic Chamber	$4\times4\times3~\text{m}^3$	ETS•LINDGREN	2015-04-02	1Y
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2014-10-03	1 Y
SZ056-03	Spectrum Analyzer	FSP30	R&S	2015-03-10	1Y
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2014-10-03	1Y
EM011-04	Loop antenna (9 kHz-30 MHz)	HFH2-Z2	R&S	2014-9-25	1Y
EM061-03	TRILOG Super Broadband test Antenna (30 MHz-1.5 GHz)	VULB 9161	SCHWARZBECK	2014-9-25	1Y
EM033-02	Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)	R&S HF907	R&S	2014-9-25	1Y
EM033-03	High Frequency Antenna & preamplifier (18 GHz~26.5 GHz)	R&S SCU- 26	R&S	2014-9-25	1Y
EM033-04	High Frequency Antenna & preamplifier (26 GHz-40 GHz)	R&S SCU- 40	R&S	2014-9-25	1Y
EM031-02-01	Coaxial cable(9 kHz-1 GHz)	/	R&S	2014-10-03	1Y
EM033-02-02	Coaxial cable(1 GHz-18 GHz)	/	R&S	2014-10-09	
EM033-04-02	Coaxial cable (18~40) GHz	/	R&S	2014-10-09	
EM022-03	2.45 GHz Filter	BRM 50702	Micro-Tronics	2015-05-06	1Y

Conducted emission at the mains terminals test

Equipment No.	Equipment	Model	Manufacturer	Cal. date	Calibration Interval
EM080-05	EMI receiver	ESCI	R&S	2015-08-04	1Y
EM006-05	LISN	ENV216	R&S	2014-09-12	1Y
EM006-06	LISN	ENV216	R&S	2014-09-12	1Y
EM006-06-01	Coaxial cable	/	R&S	2015-04-12	1Y
EM004-04	EMC shield Room	8m×3m×3m	Zhongyu	2015-08-04	1Y

FCC ID: 2AFJR-DOWINBZ001 Page 25 of 25