



FCC TEST REPORT

FCC ID:2AFKP-EL236

Report Number..... : ZKT-24122519459E

Date of Test..... Jan. 01, 2025 to Mar. 03, 2025

Date of issue..... : Mar. 03, 2025

Total number of pages..... 22

Test Result : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Prevailing Corp Limited

Address : Rm 1613, Huatong Building, No.2127 of East Sungang Road,Luohu District, Shenzhen, China

Manufacturer's name : Prevailing Corp Limited

Address : Room 1613,Huatong Building,No.2127 of East Sungang Rd.,Luohu District,Shenzhen China

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-107_V0

Test Report Form(s) Originator..... : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.



Product name..... : Power bank with Wireless charger

Trademark : N/A

Model/Type reference..... : EL236
PPS5143, P-PPS9218, P-PPS9482, P-PPS9610, P-PPS102,
P-PPS9240, P-PPS9241, P-PPS963, P-PPS5244, P-PPS9220,
P-PS9004T, P-PPS9003T, P-PPS9242, P-PPS9243, P-PPS9244,
P-PPS9245, P-PPS9246, P-PPS9247, P-PPS9248, P-PPS5521,
P-PPS5522, P-PPS5523, P-PPS5524, P-PPS5525, P-PPS5526,
P-PPS5529, P-PPS5527, P-PPS5528, P-PPS7169, P-PPS7150,
P-PPS7503, P-PPS5239, P-PPS7902, P-PPS7863, P-PPS7113,
P-PPS7864, P-PPS7196, P-PPS7199, P-PPS7895, P-PPS7896,
P-PPS7403, P-PPS7164, P-PPS7165, P-PPS7166, P-PPS7142,
P-PPS7213, P-PPS7214, P-PPS7217, P-PPS7504, P-PPS7505,
P-PPS7506, P-PPS7123, P-PPS7202, P-PPS7251, P-PPS7548,
P-PPS7220, P-PPS7252

Ratings..... : Battery DC 3.7V, 8000mAh, 29.6Wh
Type-C Input: 5V---3A, 9V---2A, 12V---1.5A (18W MAX)
Micro Input: 5V---2A, 9V---2A, 12V---1.5A (18W MAX)
Type-C Output: 5V---3A, 9V---2.22A, 12V---1.67A(PD 20W
MAX)
USB1-2 Output: 5V---3A, 9V---2A, 12V---1.5A,
10V---2.25A(22.5W MAX)
Wireless charging Output: 15W(MAX)



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Tested by (name + signature).....: Alen He

Reviewer (name + signature).....: Joe Liu

Approved (name + signature).....: Lake Xie





TABLE OF CONTENTS

1. VERSION	5
2. TEST SUMMARY	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 Test mode	8
3.3 Block Diagram of EUT Configuration	9
3.4 Test Conditions	9
3.5 Description Of Support Units (Conducted Mode)	9
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. CONDUCTED EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 Test Result	13
5. RADIATED EMISSION MEASUREMENT	16
5.1 Radiated Emission Limits	16
5.2 Anechoic Chamber Test Setup Diagram	17
5.3 Test Procedure	17
5.4 DEVIATION FROM TEST STANDARD	17
5.5 Test Result	17
6. ANTENNA REQUIREMENT	21
7. TEST SETUP PHOTO	22
8. EUT CONSTRUCTIONAL DETAILS	22



1. VERSION

Report No.	Version	Description	Approved
ZKT-24122519459E	Rev.01	Initial issue of report	Mar. 03, 2025



2. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=5.0dB
5	Conducted Adjacent channel power	U=1.38dB
6	Conducted output power uncertainty Above 1G	U=1.576dB
7	Conducted output power uncertainty below 1G	U=1.28dB
8	humidity uncertainty	U=5.3%
9	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Power bank with Wireless charger
Model No.:	EL236 PPS5143, P-PPS9218, P-PPS9482, P-PPS9610, P-PPS102, P-PPS9240, P-PPS9241, P-PPS963, P-PPS5244, P-PPS9220, P-PPS9004T, P-PPS9003T, P-PPS9242, P-PPS9243, P-PPS9244, P-PPS9245, P-PPS9246, P-PPS9247, P-PPS9248, P-PPS5521, P-PPS5522, P-PPS5523, P-PPS5524, P-PPS5525, P-PPS5526, P-PPS5529, P-PPS5527, P-PPS5528, P-PPS7169, P-PPS7150, P-PPS7503, P-PPS5239, P-PPS7902, P-PPS7863, P-PPS7113, P-PPS7864, P-PPS7196, P-PPS7199, P-PPS7895, P-PPS7896, P-PPS7403, P-PPS7164, P-PPS7165, P-PPS7166, P-PPS7142, P-PPS7213, P-PPS7214, P-PPS7217, P-PPS7504, P-PPS7505, P-PPS7506, P-PPS7123, P-PPS7202, P-PPS7251, P-PPS7548, P-PPS7220, P-PPS7252
Model Difference:	All models are the same circuit and RF module, Only the exterior color is slightly different
Serial No.:	N/A
Hardware version:	H1.0
Software version:	S1.0
Operation Frequency:	Phone:115kHz-205kHz
Modulation type:	ASK
Antenna Type:	Inductive loop coil Antenna
Antenna gain:	0dBi
Power supply:	Battery DC 3.7V, 8000mAh, 29.6Wh Type-C Input: 5V---3A, 9V---2A, 12V---1.5A (18W MAX) Micro Input: 5V---2A, 9V---2A, 12V---1.5A (18W MAX) Type-C Output: 5V---3A, 9V---2.22A, 12V---1.67A(PD 20W MAX) USB1-2 Output: 5V---3A, 9V---2A, 12V---1.5A, 10V---2.25A(22.5W MAX) Wireless charging Output: 15W(MAX)
Test description:	Battery $\geq 98\%$, $\approx 50\%$ and $\leq 1\%$ are tested, and the worst is $\leq 1\%$.

3.2 Test mode


Test Modes:		Description:	
Mode 1	AC/DC Adapter +EUT+ iPhone	Battery $\geq 98\%$	
		Battery $\approx 50\%$	
		Battery $\leq 1\%$	Record
Mode 2	EUT+ iPhone	Battery $\geq 98\%$	
		Battery $\approx 50\%$	
		Battery $\leq 1\%$	

Note: All modes have been tested, and the report only reflects the worst case data.




3.3 Block Diagram of EUT Configuration

Conducted Emission



Radiated Emission



3.4 Test Conditions

Temperature: 23~26℃

Relative Humidity: 54~63 %

3.5 Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	Power bank with Wireless charger	N/A	EL236	N/A	EUT
A1	Adapter	HUAWEI	HW200450CP0	N/A	Auxiliary
A2	Phone	APPLE	iPhone13 Pro	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	1.0M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Sep. 29, 2024	Sep. 28, 2025
5	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\

Radiation Emissions & Radiation Spurious Emissions Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	N/A	\	\
16	Turntable	MF	MF-7802BS	N/A	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\

RF Conducted Test

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	N9020A	MY55370835	A.17.05	Sep. 29, 2024	Sep. 28, 2025



2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	RF-01	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	RF-02	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	RF-03	N/A	N/A	Sep. 30, 2024	Sep. 29, 2025
6	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Sep. 29, 2024	Sep. 28, 2025
7	Signal Generator	Agilent	N5182A	N/A	A.01.87	Sep. 29, 2024	Sep. 28, 2025
8	Magnetic Field Probe Tester	Narda	ELT-400	0-0344/M-17 52	N/A	Nov. 16, 2024	Nov. 15, 2025
9	Van der Hoofden measuring head	Schwarzbeck Mess-elektron ik	VDHH 9502	9502-039	N/A	Sep. 30, 2024	Sep. 29, 2025
10	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Sep. 30, 2024	Sep. 29, 2025
11	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Sep. 29, 2024	Sep. 28, 2025
12	D.C. Power Supply	LongWei	TPR-6405 D	N/A	N/A	Sep. 29, 2024	Sep. 28, 2025
13	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\



4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

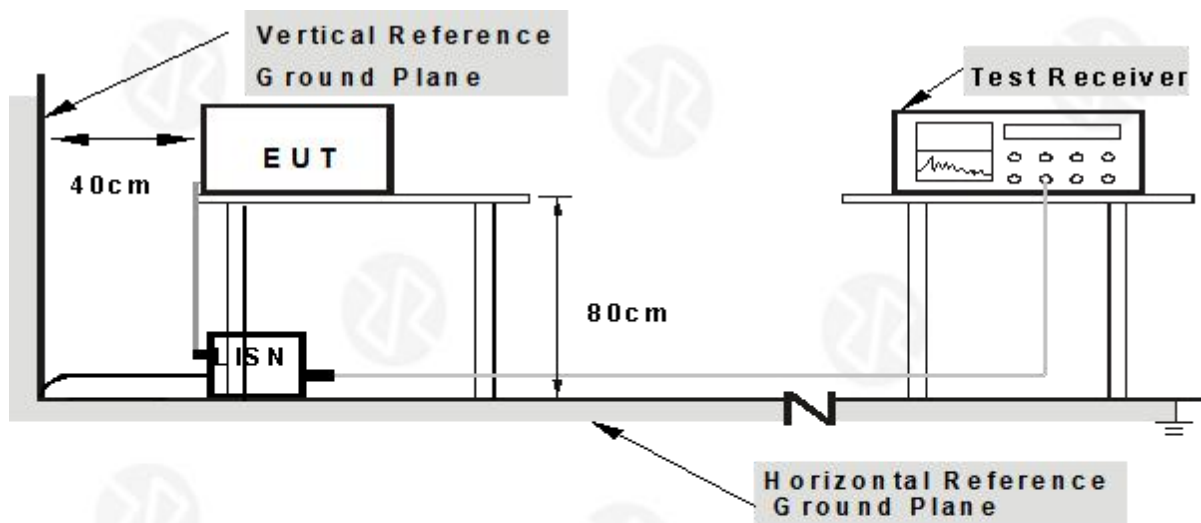

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 Test Result



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

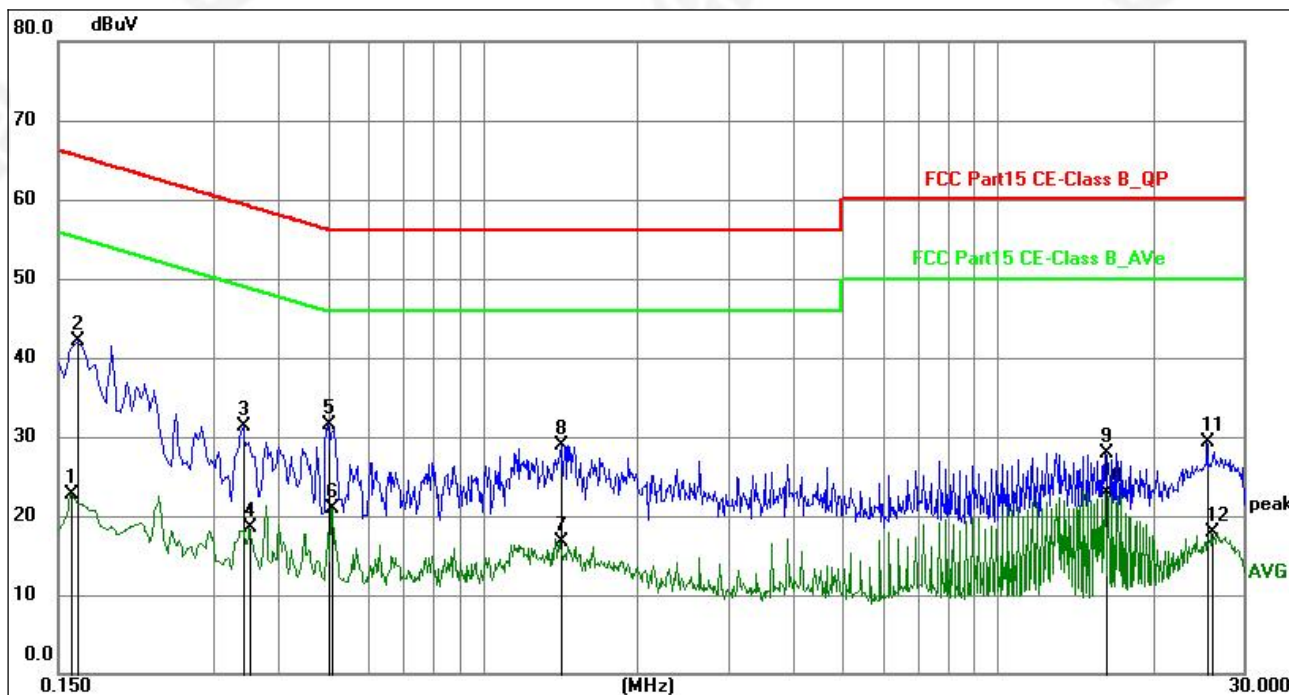


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1590	11.53	11.15	22.68	55.52	-32.84	AVG	P
2	0.1635	30.84	11.18	42.02	65.28	-23.26	QP	P
3	0.3435	19.96	11.34	31.30	59.12	-27.82	QP	P
4	0.3525	7.22	11.33	18.55	48.90	-30.35	AVG	P
5	0.5010	20.30	11.30	31.60	56.00	-24.40	QP	P
6	0.5100	9.59	11.30	20.89	46.00	-25.11	AVG	P
7	1.4144	5.33	11.34	16.67	46.00	-29.33	AVG	P
8	1.4234	17.57	11.34	28.91	56.00	-27.09	QP	P
9	16.1835	16.49	11.41	27.90	60.00	-32.10	QP	P
10	16.1835	11.50	11.41	22.91	50.00	-27.09	AVG	P
11	25.5345	17.90	11.48	29.38	60.00	-30.62	QP	P
12	26.0430	6.45	11.49	17.94	50.00	-32.06	AVG	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

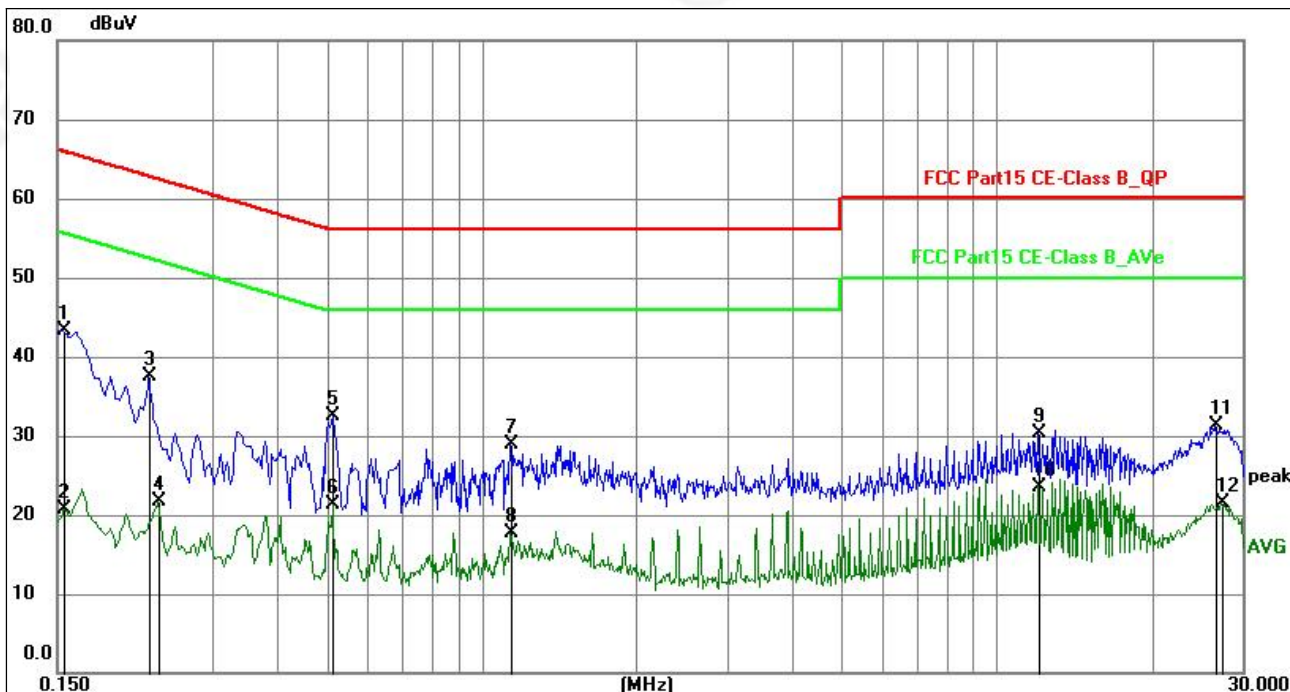

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1545	32.11	11.15	43.26	65.75	-22.49	QP	P
2	0.1545	9.61	11.15	20.76	55.75	-34.99	AVG	P
3	0.2265	26.15	11.27	37.42	62.58	-25.16	QP	P
4	0.2355	10.39	11.27	21.66	52.25	-30.59	AVG	P
5	0.5144	21.14	11.30	32.44	56.00	-23.56	QP	P
6	0.5144	10.02	11.30	21.32	46.00	-24.68	AVG	P
7	1.1400	17.70	11.22	28.92	56.00	-27.08	QP	P
8	1.1400	6.57	11.22	17.79	46.00	-28.21	AVG	P
9	12.0390	18.87	11.44	30.31	60.00	-29.69	QP	P
10	12.0390	12.16	11.44	23.60	50.00	-26.40	AVG	P
11	26.6235	19.60	11.64	31.24	60.00	-28.76	QP	P
12	27.3705	9.84	11.66	21.50	50.00	-28.50	AVG	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



5. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 Radiated Emission Limits

Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value


Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value




5.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

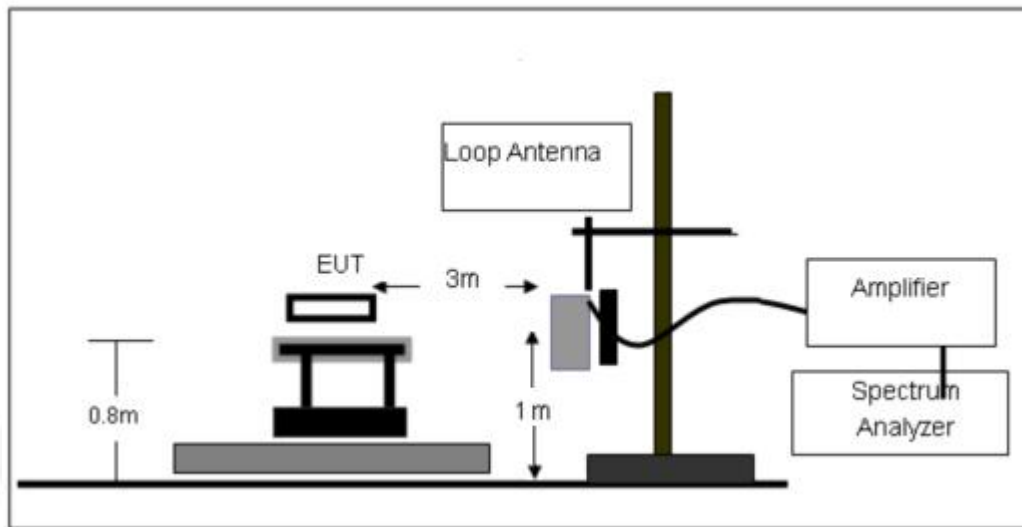

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

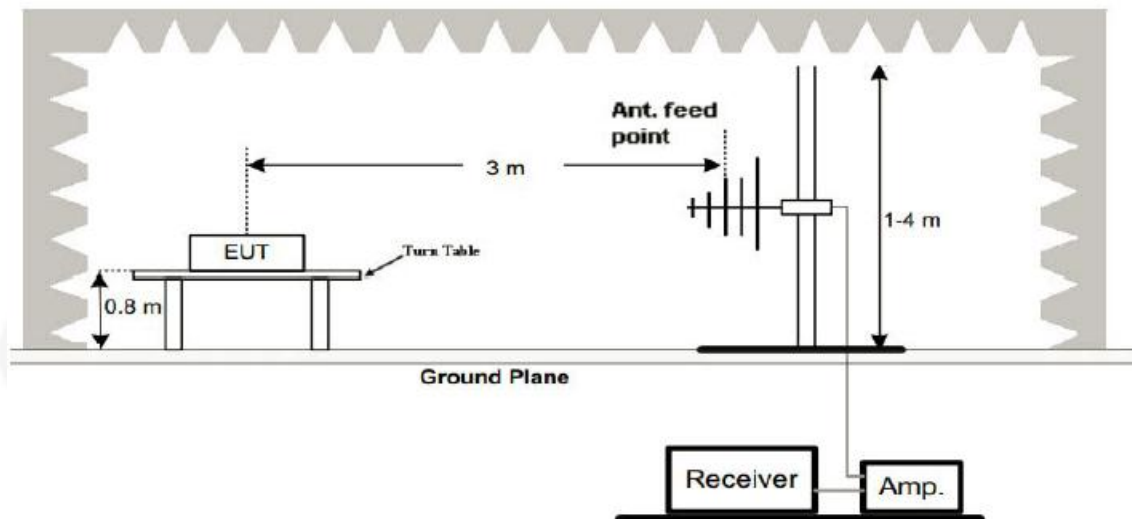

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

5.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5 Test Result




Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	coaxial
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

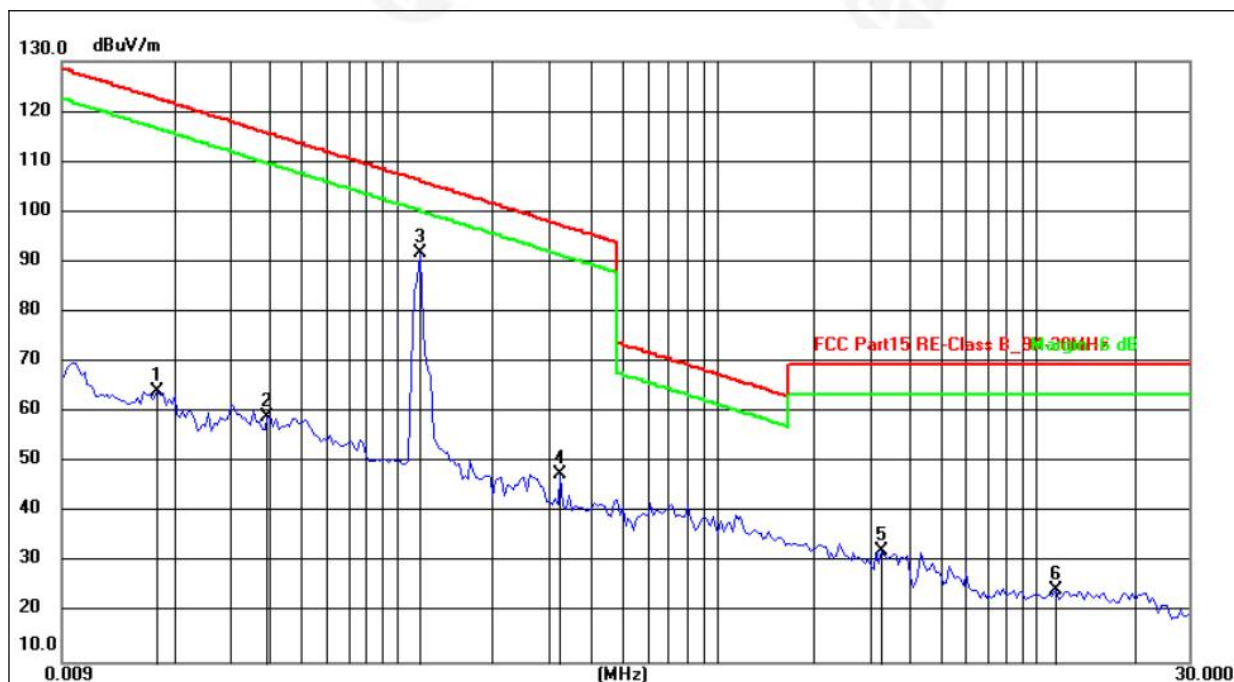

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0177	43.78	20.47	64.25	122.65	-58.40	peak
2	0.0395	39.15	19.99	59.14	115.67	-56.53	peak
3	0.1164	71.96	19.86	91.82	106.29	-14.47	peak
4	0.3259	27.62	20.13	47.75	97.34	-49.59	peak
5	3.2894	12.82	19.63	32.45	69.54	-37.09	peak
6	11.5655	5.56	18.98	24.54	69.54	-45.00	peak

Remarks:


1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

2.The emission levels of other frequencies are very lower than the limit and not show in test report.



30MHz-1GHz


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

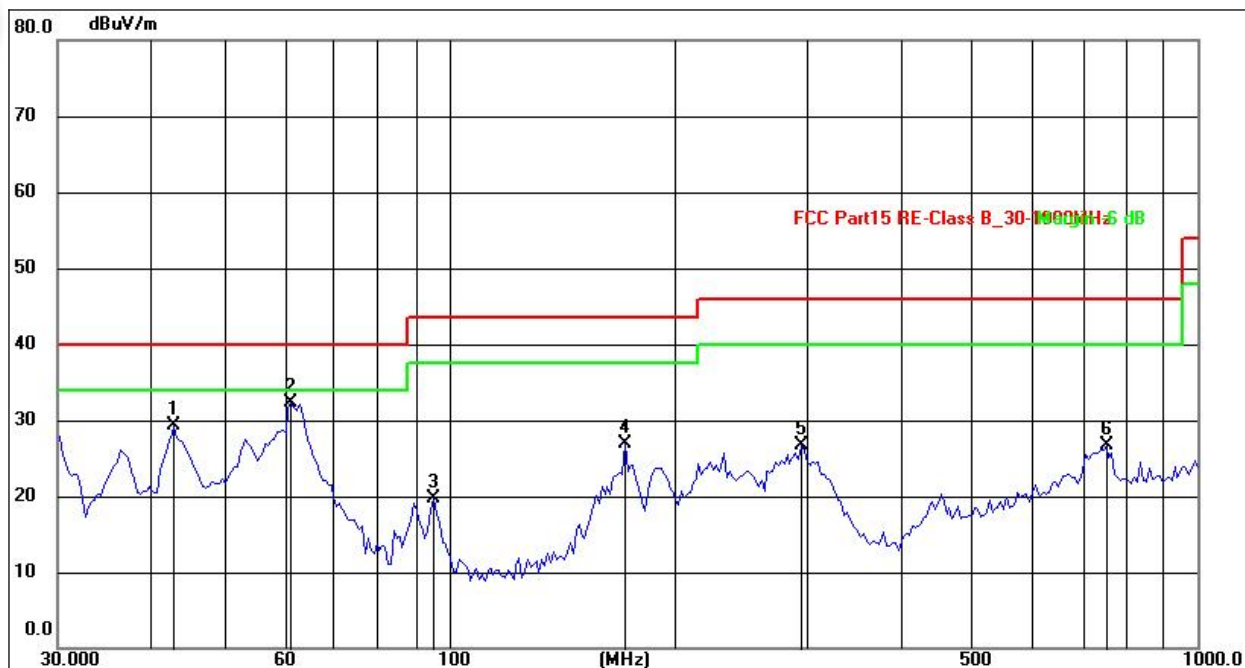

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.9750	43.36	-14.10	29.26	40.00	-10.74	QP
2	61.5618	46.97	-14.66	32.31	40.00	-7.69	QP
3	95.4269	39.65	-19.99	19.66	43.50	-23.84	QP
4	171.6933	44.14	-17.15	26.99	43.50	-16.51	QP
5	295.6648	43.13	-16.41	26.72	46.00	-19.28	QP
6	755.3873	33.46	-6.85	26.61	46.00	-19.39	QP



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

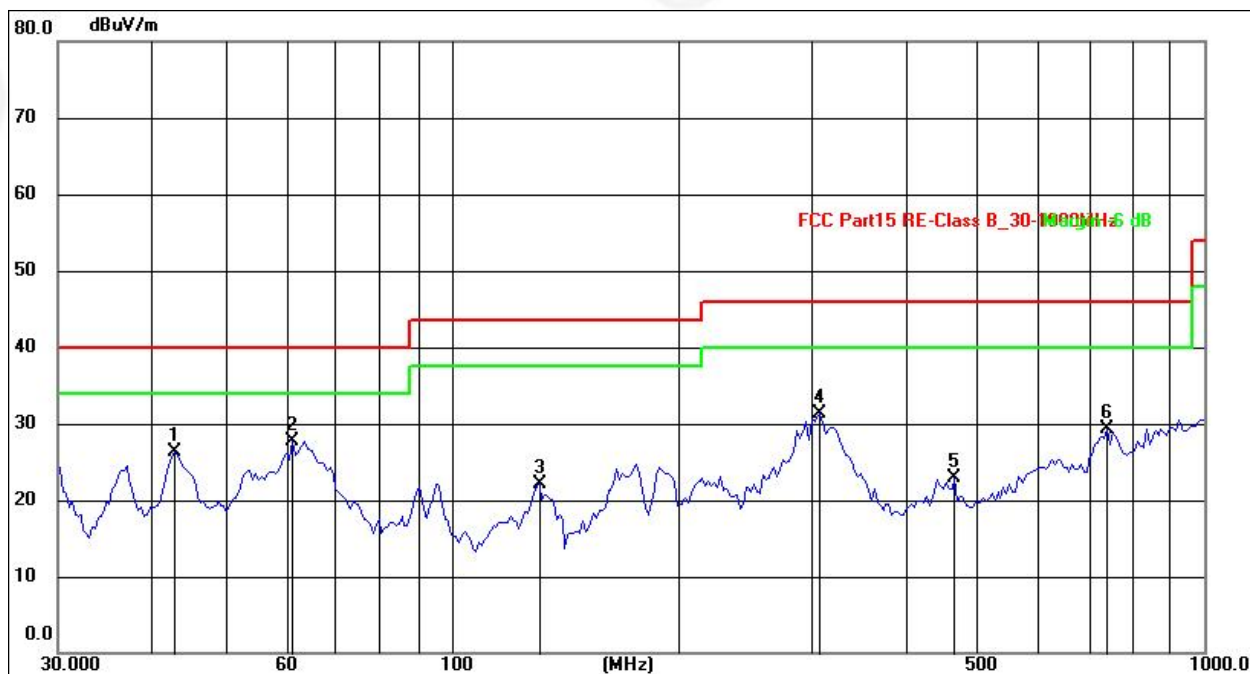

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.9750	43.25	-16.99	26.26	40.00	-13.74	QP
2	61.5617	46.24	-18.48	27.76	40.00	-12.24	QP
3	130.8369	43.33	-21.14	22.19	43.50	-21.31	QP
4	308.9125	49.38	-18.04	31.34	46.00	-14.66	QP
5	466.4164	35.64	-12.75	22.89	46.00	-23.11	QP
6	742.2586	35.20	-5.93	29.27	46.00	-16.73	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.



6. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Loop antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	



7. TEST SETUP PHOTO

Reference to the appendix I for details.

8. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****