

TEST REPORT

FCC ID: 2AFLR-ALD60

Product: Bluetooth Transmitter

Model No.: ALD60

Additional Model: ALD62, ALD65, ALD69

Trade Mark: ANLUD

Report No.: TCT170330E006

Issued Date: Apr. 12, 2017

Issued for:

**ShenZhen Anlud Science and Technology Development Co., Ltd
3F/Building A, BoLe Industrial Zone, BanTian Avenue, LongGang District,
Shenzhen, China**

Issued By:

**Shenzhen Tongce Testing Lab.
1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China
TEL: +86-755-27673339
FAX: +86-755-27673332**

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

| | |
|---|----------|
| 1. Test Certification..... | 3 |
| 2. Test Result Summary | 3 |
| 3. EUT Description | 5 |
| 4. Genera Information..... | 6 |
| 4.1. Test Environment and Mode | 6 |
| 4.2. Description of Support Units | 6 |
| 5. Facilities and Accreditations | 7 |
| 5.1. Facilities | 7 |
| 5.2. Location | 7 |
| 5.3. Measurement Uncertainty | 7 |
| 6. Test Results and Measurement Data | 8 |
| 6.1. Antenna Requirement..... | 8 |
| 6.2. Conducted Emission..... | 9 |
| 6.3. Radiated Emission Measurement..... | 10 |
| 6.4. 20dB Occupied Bandwidth..... | 20 |

Appendix A: Photographs of Test Setup

Appendix B: Photographs of EUT

1. Test Certification

| | |
|------------------------------|--|
| Product: | Bluetooth Transmitter |
| Model No.: | ALD60 |
| Additional Model No.: | ALD62, ALD65, ALD69 |
| Applicant: | ShenZhen Anlud Science and Technology Development Co., Ltd |
| Address: | 3F/Bulding A, BoLe Industrial Zone, BanTian Avenue, LongGang District, Shenzhen, China |
| Manufacturer: | ShenZhen Anlud Science and Technology Development Co., Ltd |
| Address: | 3F/Bulding A, BoLe Industrial Zone, BanTian Avenue, LongGang District, Shenzhen, China |
| Date of Test: | Apr. 01 – Apr. 11, 2017 |
| Applicable Standards: | FCC CFR Title 47 Part 15 Subpart C Section 15.239 |

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Ride Cheng

Date:

Apr. 11, 2017

Ride Cheng

Reviewed By:

Zen Zhou

Date:

Apr. 12, 2017

Joe Zhou

Approved By:

Tomsin

Date:

Apr. 12, 2017

Tomsin

2. Test Result Summary

| Requirement | CFR 47 Section IC Paragraph | Result |
|--|--------------------------------|--------|
| Antenna requirement | §15.203 | PASS |
| AC Power Line Conducted Emission | §15.207 | N/A |
| Field strength of the fundamental signal | §15.239 (b) | PASS |
| Spurious emissions | §15.239 (b) (c)/ §15.209 | PASS |
| Occupied Bandwidth | §15.215 (c) | PASS |

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

| | |
|-------------------------------|---|
| Product Name: | Bluetooth Transmitter |
| Model : | ALD60 |
| Additional Model: | ALD62, ALD65, ALD69 |
| Trade Mark: | ANLUD |
| Operation Frequency: | 87.6-107.9MHz |
| Channel Separation: | 100 kHz |
| Number of Channel: | 204CH (See NOTE 2) |
| Modulation Technology: | FM |
| Antenna Type: | PCB Antenna |
| Antenna Gain: | 2dBi |
| Power Supply: | DC 12V/DC 24V |
| Remark: | All models above are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement. |

Operation Frequency Each of Channel

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 1 | 87.6 MHz | 104 | 97.9 MHz | 202 | 107.7 MHz |
| 2 | 87.7 MHz | 105 | 98.0 MHz | 203 | 107.8 MHz |
| 3 | 87.8 MHz | 106 | 98.1 MHz | 204 | 107.9 MHz |
| -- | -- | -- | -- | | |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel | Frequency |
|---------------------|-----------|
| The lowest channel | 87.6MHz |
| The middle channel | 98.0MHz |
| The Highest channel | 107.9MHz |

4. General Information

4.1. Test Environment and Mode

| Operating Environment: | |
|--|---|
| Temperature: | 24.0 °C |
| Humidity: | 54 % RH |
| Atmospheric Pressure: | 1010 mbar |
| Test Mode: | |
| Operation mode: | Keep the EUT in continuous transmitting with modulation |
| <p>The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p> | |

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No. | FCC ID | Trade Name |
|-----------|-----------|------------|--------|------------|
| / | / | / | / | / |

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen TCT Testing Technology Co., Ltd.

Address: 1F, Building 1, Yibaolai Industrial Par Qiaotou Village, Fuyong Town Shenzhen, China

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | MU |
|-----|-------------------------------|-------------------------|
| 1 | Conducted Emission | $\pm 2.56\text{dB}$ |
| 2 | RF power, conducted | $\pm 0.12\text{dB}$ |
| 3 | Spurious emissions, conducted | $\pm 0.11\text{dB}$ |
| 4 | All emissions, radiated(<1G) | $\pm 3.92\text{dB}$ |
| 5 | All emissions, radiated(>1G) | $\pm 4.28\text{dB}$ |
| 6 | Temperature | $\pm 0.1^\circ\text{C}$ |
| 7 | Humidity | $\pm 1.0\%$ |

6. Test Results and Measurement Data

6.1. Antenna Requirement

| | |
|-----------------------|-------------------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 /247(c) |
|-----------------------|-------------------------------------|

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The FM antenna is a wire antenna which permanently attached, and the best case gain of the antenna is 2dBi.

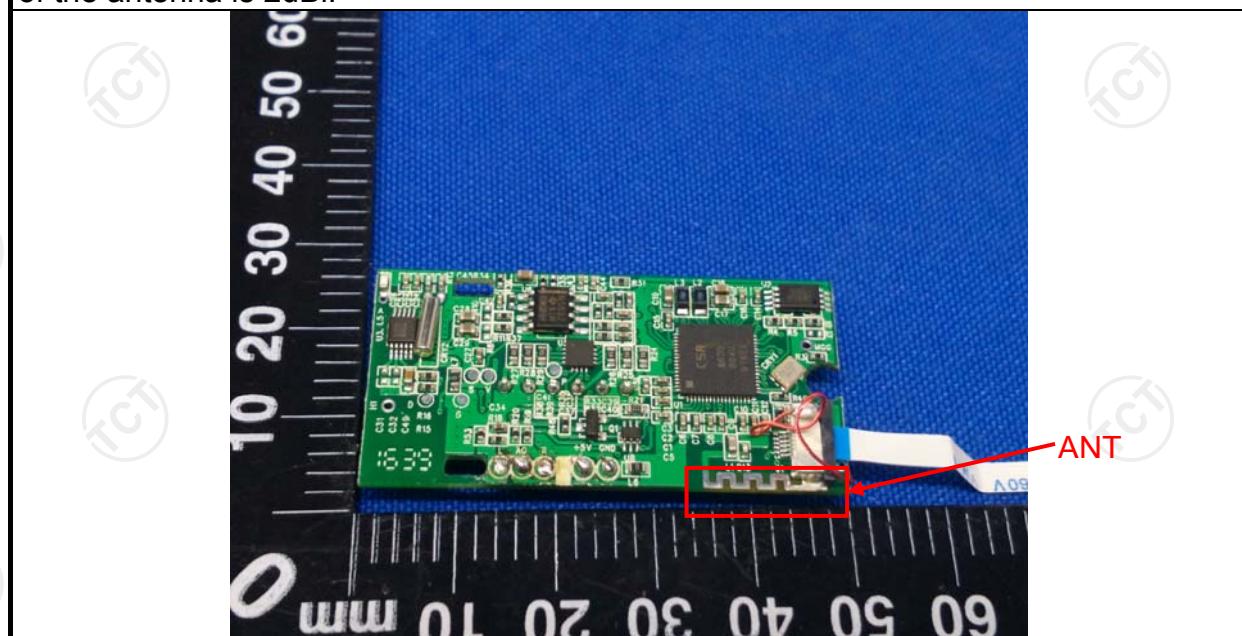

6.2. Conducted Emission



6.2.1. Test Specification

| Test Requirement: | FCC Part15 C Section 15.207 | | | | | | | | | | | | | | |
|--------------------------|---|--------------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Test Method: | ANSI C63.10:2013 | | | | | | | | | | | | | | |
| Frequency Range: | 150 kHz to 30 MHz | | | | | | | | | | | | | | |
| Receiver setup: | RBW=9 kHz, VBW=30 kHz, Sweep time=auto | | | | | | | | | | | | | | |
| Limits: | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> | Frequency range (MHz) | Limit (dBuV) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBuV) | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | |
| Test Setup: | <p>Reference Plane</p> <p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p> | | | | | | | | | | | | | | |
| Test Mode: | Refer to section 4.1 for details | | | | | | | | | | | | | | |
| Test Procedure: | <ol style="list-style-type: none"> The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. | | | | | | | | | | | | | | |
| Test Result: | The EUT is powered by car's power DC 12V/DC 24V, So not applicable. | | | | | | | | | | | | | | |

6.3. Radiated Emission Measurement

6.3.1. Test Specification

| | | | | | | | | | |
|---|--|--------------------|--------|------------------|------------------|--|--|--|--|
| Test Requirement: | FCC Part15 C Section 15.209 | | | | | | | | |
| Test Method: | ANSI C63.10: 2013 | | | | | | | | |
| Frequency Range: | 9 kHz to 1 GHz | | | | | | | | |
| Measurement Distance: | 3 m | | | | | | | | |
| Antenna Polarization: | Horizontal & Vertical | | | | | | | | |
| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark | | | | |
| | 9kHz- 150kHz | Quasi-peak | 200Hz | 1kHz | Quasi-peak Value | | | | |
| | 150kHz- 30MHz | Quasi-peak | 9kHz | 30kHz | Quasi-peak Value | | | | |
| | 30MHz-1GHz | Quasi-peak | 100KHz | 300KHz | Quasi-peak Value | | | | |
| Limit(Field strength of the fundamental signal): | Frequency | Limit (dBuV/m @3m) | | Remark | | | | | |
| | 88-108MHz | 48 | | Average Value | | | | | |
| | | 68 | | Peak Value | | | | | |
| | <p>Note: Fcc part15.239 (b) The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.</p> | | | | | | | | |
| Limit(Spurious Emissions): | Frequency | Limit (dBuV/m @3m) | | Remark | | | | | |
| | 30MHz-88MHz | 40.0 | | Quasi-peak Value | | | | | |
| | 88MHz-216MHz | 43.5 | | Quasi-peak Value | | | | | |
| | 216MHz-960MHz | 46.0 | | Quasi-peak Value | | | | | |
| | 960MHz-1GHz | 54.0 | | Quasi-peak Value | | | | | |
| Limit (band edge) : | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. | | | | | | | | |
| Test Procedure: | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and | | | | | | | | |
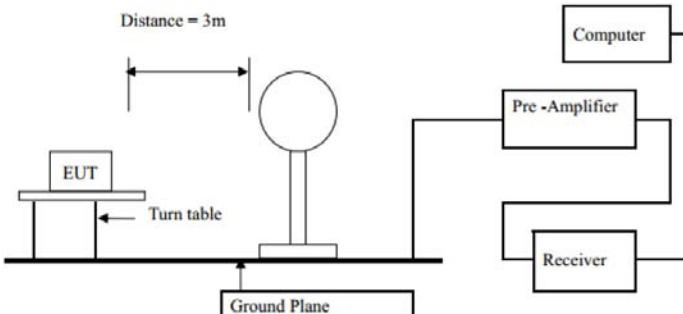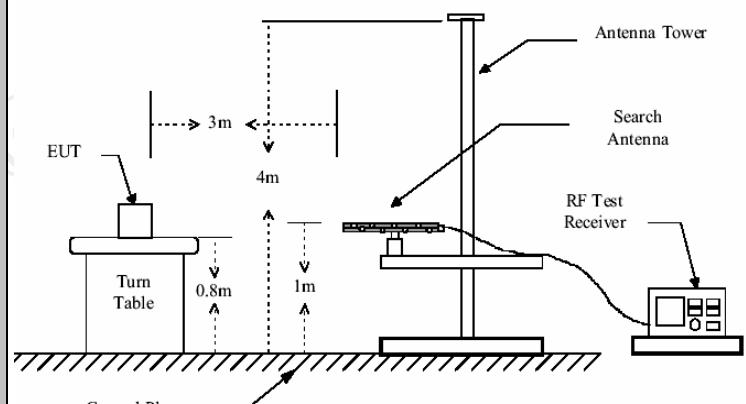
| | |
|----------------------|---|
| | <p>vertical polarizations of the antenna are set to make the measurement.</p> <p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> |
| Test setup: | <p>For radiated emissions below 30MHz</p>  <p>30MHz to 1GHz</p>  |
| Test Mode: | Refer to section 4.1 for details |
| Test results: | PASS |

6.3.2. Test Instruments

| Radiated Emission Test Site (966) | | | | |
|-----------------------------------|------------------------------------|------------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| ESPI Test Receiver | ROHDE&SCHW ARZ | ESVD | 100008 | Aug. 11, 2017 |
| Spectrum Analyzer | ROHDE&SCHW ARZ | FSEM | 848597/001 | Aug. 11, 2017 |
| Pre-amplifier | EM Electronics Corporation CO.,LTD | EM30265 | 07032613 | Aug. 11, 2017 |
| Pre-amplifier | HP | 8447D | 2727A05017 | Aug. 11, 2017 |
| Loop antenna | ZHINAN | ZN30900A | 12024 | Aug. 13, 2017 |
| Broadband Antenna | Schwarzbeck | VULB9163 | 340 | Aug. 13, 2017 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 631 | Aug. 13, 2017 |
| Coax cable (9kHz-40GHz) | TCT | N/A | N/A | Aug. 12, 2017 |
| Coax cable (9kHz-40GHz) | TCT | N/A | N/A | Aug. 12, 2017 |
| Coax cable (9kHz-40GHz) | TCT | N/A | N/A | Aug. 12, 2017 |
| Coax cable (9kHz-40GHz) | TCT | N/A | N/A | Aug. 12, 2017 |
| EMI Test Software | Shurples Technology | EZ-EMC | N/A | N/A |

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data

Field Strength of Fundamental

| Frequency (MHz) | Emission PK/AV (dBuV/m) | Horizontal /Vertical | Limits PK/AV (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------------------|-----------------------|-------------|
| 87.6 | 37.80(AV) | H | 48 | -8.04 |
| 87.6 | 39.96(PK) | H | 68 | -28.04 |
| 87.6 | 35.26(AV) | V | 48 | -8.6 |
| 87.6 | 37.40(PK) | V | 68 | -28.6 |

| Frequency (MHz) | Emission PK/AV (dBuV/m) | Horizontal /Vertical | Limits PK/AV (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------------------|-----------------------|-------------|
| 98.0 | 50.23(AV) | H | 48 | 4.38 |
| 98.0 | 52.38(PK) | H | 68 | -15.62 |
| 98.0 | 48.86(AV) | V | 48 | 8.95 |
| 98.0 | 50.53(PK) | V | 68 | -11.05 |

| Frequency (MHz) | Emission PK/AV (dBuV/m) | Horizontal /Vertical | Limits PK/AV (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------------------|-----------------------|-------------|
| 107.9 | 53.10(AV) | H | 48 | 7.27 |
| 107.9 | 55.27(PK) | H | 68 | -12.73 |
| 107.9 | 51.64(AV) | V | 48 | 7.8 |
| 107.9 | 53.80PK | V | 68 | -12.2 |

Spurious Emissions

Frequency Range (9 kHz-30MHz)


| Frequency (MHz) | Level@3m (dB μ V/m) | Limit@3m (dB μ V/m) |
|-----------------|-------------------------|-------------------------|
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

87.6MHz

Radiated Emission In Horizontal (30MHz---1000MHz)

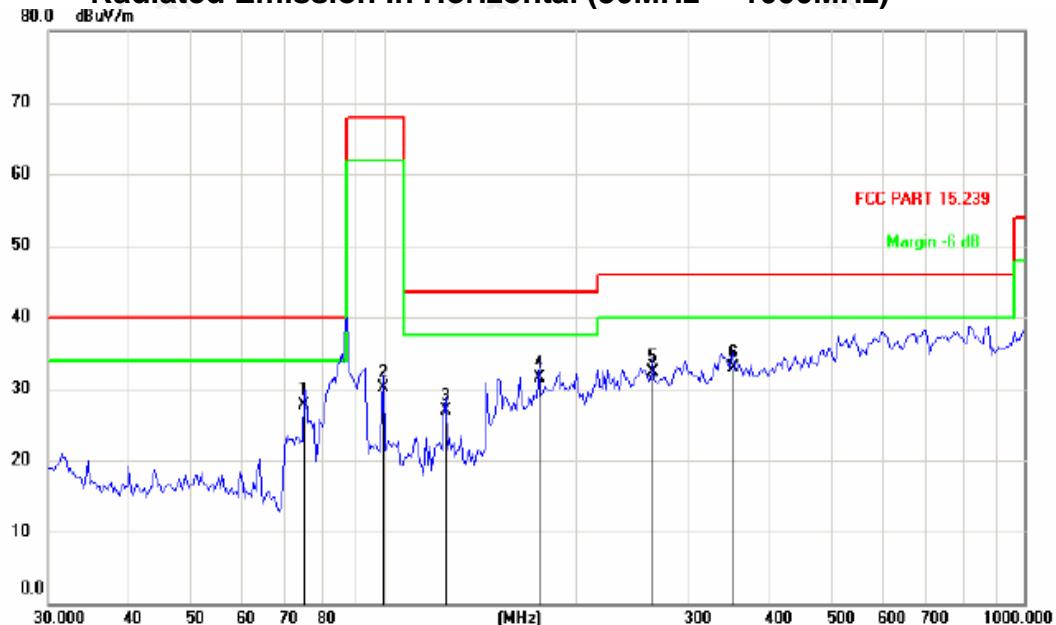

| Site | Polarization: <i>Horizontal</i> | | | | Temperature: 25 | | | | |
|------------------------|---------------------------------|--------------------|-------------------|---------------------|-----------------|---------|-------------------|--------------|---------|
| Limit: FCC PART 15.239 | Power: DC 12V | | | | Humidity: 55 % | | | | |
| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure-ment dBuV/m | Limit dBuV/m | Over dB | Antenna Height cm | Table degree | Comment |
| 1 | 75.3208 | 44.10 | -16.41 | 27.69 | 40.00 | -12.31 | QP | | |
| 2 | 99.7676 | 41.60 | -11.47 | 30.13 | 68.00 | -37.87 | QP | | |
| 3 | 124.9248 | 41.30 | -14.33 | 26.97 | 43.50 | -16.53 | QP | | |
| 4 * | 175.0404 | 45.00 | -13.41 | 31.59 | 43.50 | -11.91 | QP | | |
| 5 | 263.1154 | 41.80 | -9.51 | 32.29 | 46.00 | -13.71 | QP | | |
| 6 | 350.9721 | 40.20 | -7.20 | 33.00 | 46.00 | -13.00 | QP | | |

Note :

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)


Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Any value more than 10dB below limit have not been specifically reported.

* is meaning the worst frequency has been tested in the test frequency range

Radiated Emission In Vertical (30MHz----1000MHz)

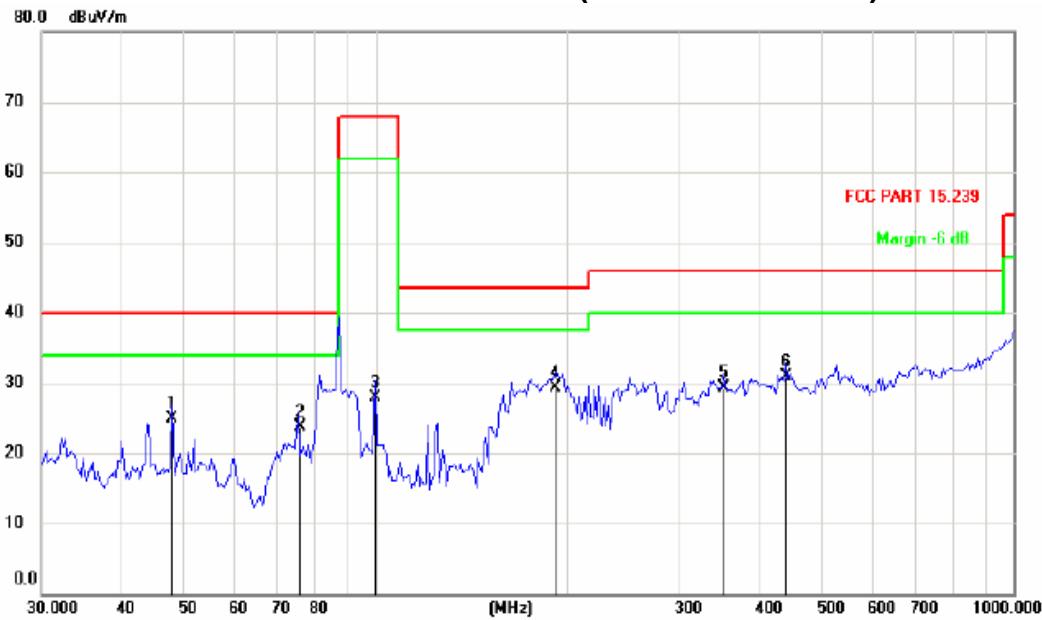

| Site | | | | Polarization: <i>Vertical</i> | | | Temperature: 25 | | | | |
|------------------------|-----|---------------|----------------|-------------------------------|--------|--------|-----------------|--------------|---------|--------|---------|
| Limit: FCC PART 15.239 | | | | Power: DC 12V | | | Humidity: 55 % | | | | |
| No. | Mk. | Reading Level | Correct Factor | Measure-ment | Limit | Over | Antenna Height | Table Degree | Comment | | |
| | | MHz | dB μ V | dB | dBuV/m | dBuV/m | dB | Detector | cm | degree | Comment |
| 1 | | 48.0392 | 37.00 | -12.12 | 24.88 | 40.00 | -15.12 | QP | | | |
| 2 | | 75.8520 | 40.20 | -16.41 | 23.79 | 40.00 | -16.21 | QP | | | |
| 3 | | 99.7676 | 39.40 | -11.47 | 27.93 | 68.00 | -40.07 | QP | | | |
| 4 | * | 191.7838 | 41.60 | -12.24 | 29.36 | 43.50 | -14.14 | QP | | | |
| 5 | | 350.9721 | 36.50 | -7.20 | 29.30 | 46.00 | -16.70 | QP | | | |
| 6 | | 439.4730 | 35.90 | -4.92 | 30.98 | 46.00 | -15.02 | QP | | | |

Note :

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Any value more than 10dB below limit have not been specifically reported.

** is meaning the worst frequency has been tested in the test frequency range*

98.0MHz

Radiated Emission In Horizontal (30MHz----1000MHz)

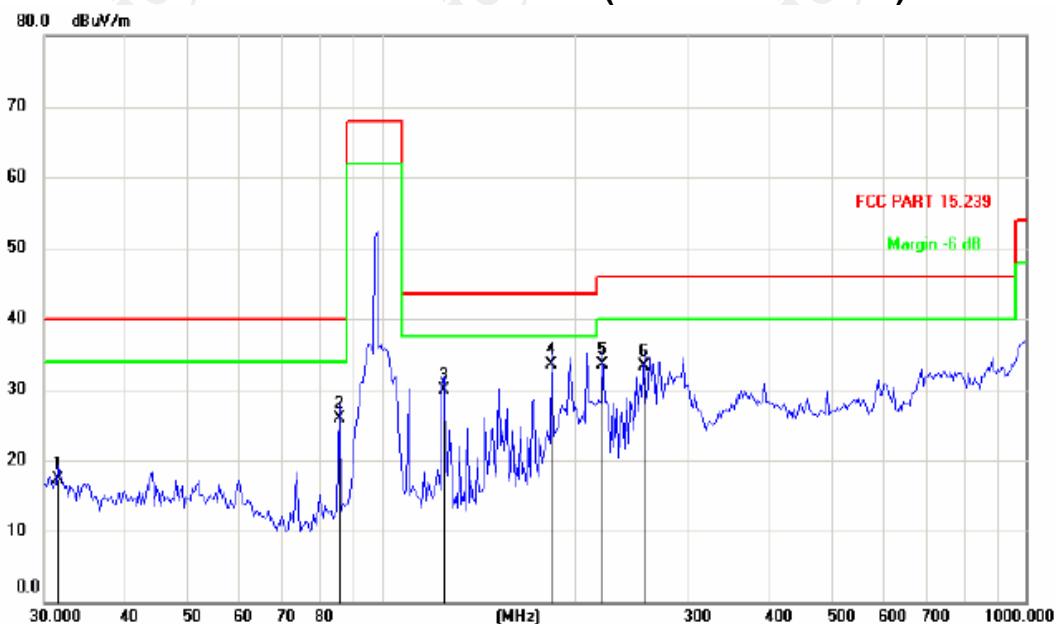

Site: FCC PART 15.239 Polarization: **Horizontal** Temperature: 25
Power: DC 12V Humidity: 55 %

| No. | Mk. | Freq. MHz | Reading Level dB μ V | Correct Factor dB | Measure- ment dB μ V/m | Limit dB μ V/m | Over dB | Antenna Height cm | Table Degree | Comment |
|-----|-----|--------------|--------------------------------|-------------------------|----------------------------------|-----------------------|------------|-------------------------|-----------------|---------|
| 1 | | 31.5121 | 30.90 | -13.53 | 17.37 | 40.00 | -22.63 | QP | | |
| 2 | | 86.0794 | 40.30 | -14.31 | 25.99 | 40.00 | -14.01 | QP | | |
| 3 | | 124.9248 | 44.20 | -14.33 | 29.87 | 43.50 | -13.63 | QP | | |
| 4 | * | 183.8660 | 46.30 | -12.79 | 33.51 | 43.50 | -9.99 | QP | | |
| 5 | | 220.7238 | 44.50 | -10.96 | 33.54 | 46.00 | -12.46 | QP | | |
| 6 | | 255.8223 | 43.00 | -9.76 | 33.24 | 46.00 | -12.76 | QP | | |

Note :

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Any value more than 10dB below limit have not been specifically reported.

* is meaning the worst frequency has been tested in the test frequency range

Radiated Emission In Vertical (30MHz----1000MHz)



| Site | | | | Polarization: Vertical | | | Temperature: 25 | | |
|------------------------|-----------|--------------------|-------------------|-------------------------------|--------------|---------|-------------------|--------------|---------|
| Limit: FCC PART 15.239 | | | | Power: DC 12V | | | Humidity: 55 % | | |
| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure-ment dBuV/m | Limit dBuV/m | Over dB | Antenna Height cm | Table degree | Comment |
| 1 | 40.0172 | 35.30 | -12.47 | 22.83 | 40.00 | -17.17 | QP | | |
| 2 | 86.0794 | 39.40 | -14.31 | 25.09 | 40.00 | -14.91 | QP | | |
| 3 | 124.9248 | 39.00 | -14.33 | 24.67 | 43.50 | -18.83 | QP | | |
| 4 | 156.4259 | 41.00 | -14.71 | 26.29 | 43.50 | -17.21 | QP | | |
| 5 | 197.2512 | 39.60 | -11.86 | 27.74 | 43.50 | -15.76 | QP | | |
| 6 * | 787.4749 | 30.30 | 1.29 | 31.59 | 46.00 | -14.41 | QP | | |

Note :

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Any value more than 10dB below limit have not been specifically reported.

* is meaning the worst frequency has been tested in the test frequency range

107.9MHz

Radiated Emission In Horizontal (30MHz----1000MHz)



| Site | Polarization: <i>Horizontal</i> | | | | Temperature: 25 | | |
|------------------------|---------------------------------|--------------------------|-------------------|---------------------------|--------------------|---------|--------------------------------|
| Limit: FCC PART 15.239 | Power: DC 12V | | | | Humidity: 55 % | | |
| No. Mk. | Freq. MHz | Reading Level dB μ V | Correct Factor dB | Measure-ment dB μ V/m | Limit dB μ V/m | Over dB | Antenna Height cm Table degree |
| | | | | | | | |
| 1 | 31.2914 | 31.90 | -13.56 | 18.34 | 40.00 | -21.66 | QP |
| 2 | 95.6483 | 45.60 | -12.11 | 33.49 | 68.00 | -34.51 | QP |
| 3 * | 120.6118 | 49.60 | -13.74 | 35.86 | 43.50 | -7.64 | QP |
| 4 | 193.1365 | 47.90 | -12.15 | 35.75 | 43.50 | -7.75 | QP |
| 5 | 255.8223 | 47.00 | -9.76 | 37.24 | 46.00 | -8.76 | QP |
| 6 | 324.8645 | 41.30 | -7.74 | 33.56 | 46.00 | -12.44 | QP |

Note :

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)


Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Any value more than 10dB below limit have not been specifically reported.

* is meaning the worst frequency has been tested in the test frequency range

Radiated Emission In Vertical (30MHz---1000MHz)

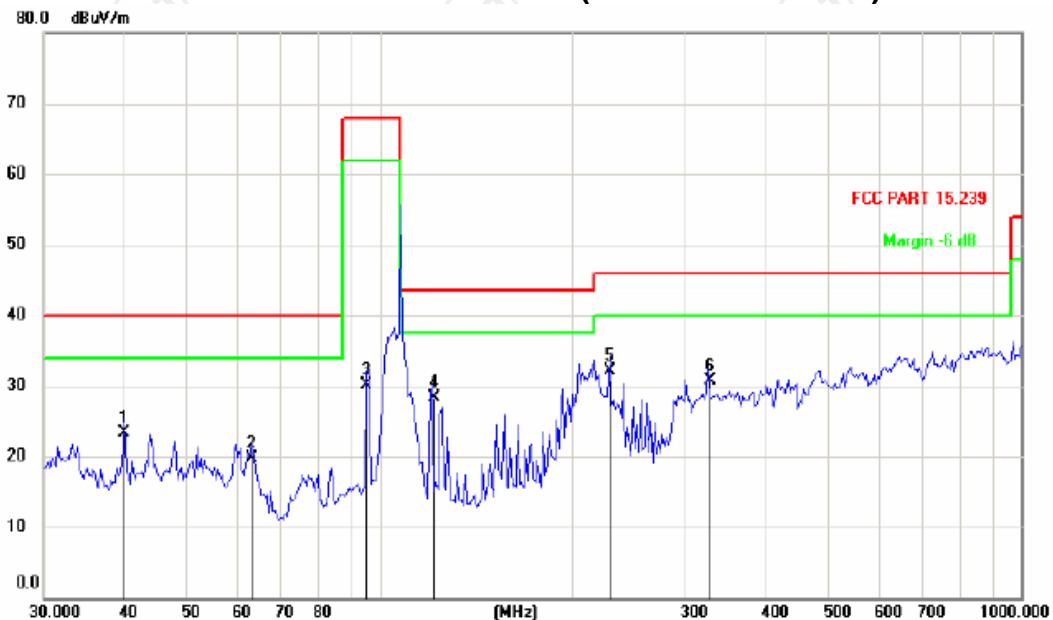

| Site | | | | Polarization: Vertical | | | Temperature: 25 | | |
|------------------------|-----|----------|---------------|-------------------------------|--------------|--------|-----------------|----------------|--------------|
| Limit: FCC PART 15.239 | | | | Power: DC 12V | | | Humidity: 55 % | | |
| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure-ment | Limit | Over | Antenna Height | Table Degree |
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | cm degree |
| 1 | | 40.0172 | 35.80 | -12.47 | 23.33 | 40.00 | -16.67 | QP | |
| 2 | | 63.1856 | 33.70 | -13.99 | 19.71 | 40.00 | -20.29 | QP | |
| 3 | | 95.6483 | 42.20 | -12.11 | 30.09 | 68.00 | -37.91 | QP | |
| 4 | | 120.6118 | 42.10 | -13.74 | 28.36 | 43.50 | -15.14 | QP | |
| 5 | * | 228.6173 | 42.80 | -10.70 | 32.10 | 46.00 | -13.90 | QP | |
| 6 | | 324.8645 | 38.40 | -7.74 | 30.66 | 46.00 | -15.34 | QP | |

Note :

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Any value more than 10dB below limit have not been specifically reported.

* is meaning the worst frequency has been tested in the test frequency range

6.4. 20dB Occupied Bandwidth

6.4.1. Test Specification

| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.215(c) |
| Test Method: | ANSI C63.10: 2013 |
| Limit: | 200kHz |
| Test Procedure: | <ol style="list-style-type: none">1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.2. Set to the maximum power setting and enable the EUT transmit continuously.3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; $RBW \geq 1\%$ of the 20 dB bandwidth; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.4. Measure and record the results in the test report. |
| Test setup: |  <p>The diagram illustrates the test setup. A green 'Spectrum Analyzer' is connected to a yellow 'EUT' (Equipment Under Test) via a grey cable with a white connector. The Spectrum Analyzer has a display screen and two control knobs. The EUT is a simple rectangular device with a single circular port.</p> |
| Test Mode: | Refer to section 4.1 for details |
| Test results: | PASS |

6.4.2. Test Instruments

| RF Test Room | | | | |
|-------------------|--------------|-------|---------------|-----------------|
| Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | R&S | FSU | 200054 | Aug. 11, 2017 |


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.4.3. Test data

| Test Channel | 20dB Occupy Bandwidth (kHz) | Limit (kHz) | Conclusion |
|--------------|-----------------------------|-------------|------------|
| Lowest | 52.08 | 200 | PASS |
| Middle | 52.08 | 200 | PASS |
| Highest | 52.88 | 200 | PASS |


Test plots as follows:

Lowest channel

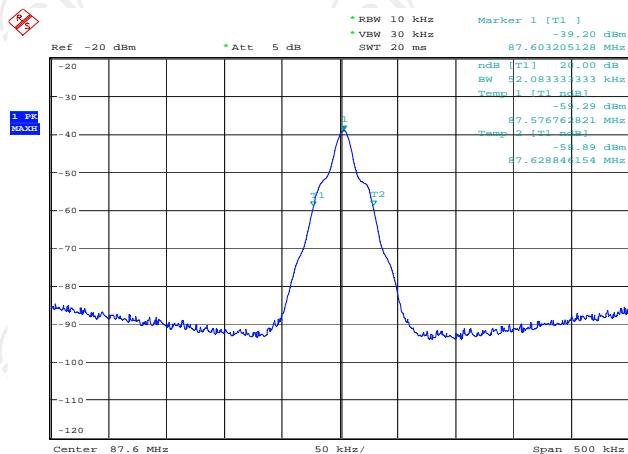


Date: 11.APR.2017 20:54:47

Middle channel

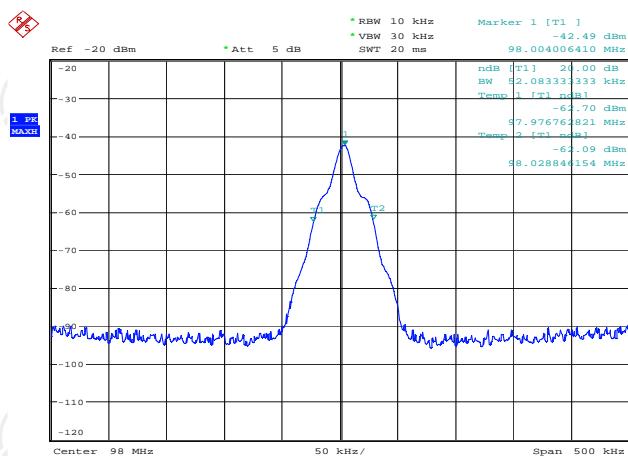

Date: 11.APR.2017 20:50:25

Highest channel

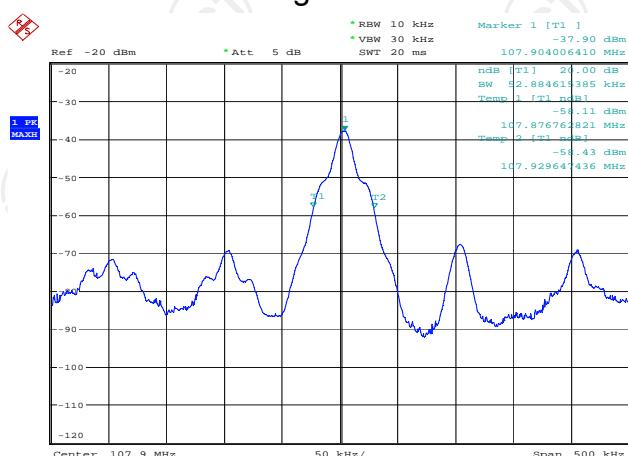

Date: 11.APR.2017 20:53:08

Appendix A: Photographs of Test Setup

Refer to test report TCT170330E021

Appendix B: Photographs of EUT

Refer to test report TCT170330E021

*******END OF REPORT*******