



TEST REPORT

FCC PART 15.225

Report Refe	rence No	:	CTL1607	7142685-	WF-03
-------------	----------	---	---------	----------	-------

Compiled by:
(position+printed name+signature)

Jacky Chen (File administrators)

Tested by: Allen Wang (position+printed name+signature) (Test Engineer)

Approved by: (position+printed name+signature)

Tracy Qi (Manager)

Jacky Chen

Jacky

Product Name.....: WaRP7

Model/Type reference: WaRP7

List Model(s)..... N/A

Trade Mark N/A

FCC ID 2AFLY-WARP7

Applicant's name Embest Technology Co.,Ltd

Guangdong, China

Test Firm Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,

Nanshan District, Shenzhen, China 518055

Test specification.....

Standard...... FCC Part 15.225: Operation within the band 13.110–14.010 MHz.

TRF Originator Shenzhen CTL Testing Technology Co., Ltd.

Master TRF Dated 2011-01

Date of Test Date Jul. 20, 2016–Aug. 10, 2016

Data of Issue...... Aug. 11, 2016

Result Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. : CTL1607142685-WF-03 Aug. 11, 2016

Date of issue

Equipment under Test : WaRP7

Model /Type : WaRP7

Listed Models : N/A

Applicant : Embest Technology Co.,Ltd

Address : Tower B 4/F, Shanshui Building, Nanshan Yungu

Innovation Industry Park, Liuxian Ave.No.1183, Nanshan District, Shenzhen, Guangdong, China

Report No.: CTL1607142685-WF-03

Manufacturer : Embest Technology Co.,Ltd

Address : Tower B 4/F,Shanshui Building, Nanshan Yungu

Innovation Industry Park, Liuxian Ave.No.1183, Nanshan District, Shenzhen, Guangdong, China

Test result Pass *

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

^{*} In the configuration tested, the EUT complied with the standards specified page 5.

** Modified History **

Report No.: CTL1607142685-WF-03

Version	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2016-08-11	CTL1607142685-WF-03	Tracy Qi
				_



	Table of Contents	Page
1. SU	JMMARY	5
1.1.	Test Standards	5
1.2.	Test Description	
1.3.	Test Facility	
1.4.	STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
2. GE	ENERAL INFORMATION	7
2.1.	ENVIRONMENTAL CONDITIONS	7
2.2.	GENERAL DESCRIPTION OF EUT	7
2.3.	EQUIPMENTS USED DURING THE TEST	
2.4.	RELATED SUBMITTAL(S) / GRANT (S)	8
2.5.	Modifications	8
3. TE	EST CONDITIONS AND RESULTS	9
3.1.	CONDUCTED EMISSION (AC MAIN)	9
3.2.	RADIATED EMISSION	12
3.3.	20dB Bandwidth	
3.4.	Frequency Stability Test Data	16
4. EL	UT TEST PHOTO	
	KTERNAL AND INTERNAL PHOTOS OF THE EUT	
J	\\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	



1. SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.225: Operation within the band 13.110–14.010 MHz

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

ANSI C63.4: 2014: —American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Test Description

FCC PART 15 .225				
FCC Part 15.207	AC Power Conducted Emission	PASS		
FCC Part 2.1049	20dB Bandwidth	PASS		
FCC Part 15.225(a) (b) (c)	In-band Emissions	PASS		
FCC Part 15.225(d)/15.207	Out-of-band Emissions	PASS		
FCC Part 15.225(e)	Frequency Stability Tolerance	PASS		

Remark: The measurement uncertainty is not included in the test result.



V1.0 Page 6 of 19 Report No.: CTL1607142685-WF-03

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods — Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

V1.0 Page 7 of 19 Report No.: CTL1607142685-WF-03

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	WaRP7
Model/Type reference:	WaRP7
Power supply:	DC 3.7V from battery
Hardware version:	REV 2.0
Software version:	V1.0
NFC	
Operation frequency:	13.56MHz
Modulation :	ASK
No. of Channel:	
Antenna type:	Loop Antenna

Note: For more details, please refer to the user's manual of the EUT.

2.3. Equipments Used during the Test

				1 5		
Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date	
LISN	R&S	ENV216	3560.6550.1 2	2016/06/02	2017/06/01	
LISN	R&S	ESH2-Z5	860014/010	2016/06/02	2017/06/01	
Bilog Antenna	Sunol Sciences Corp.	esting 1	A061713	2016/06/02	2 2017/06/01	
EMI Test Receiver	R&S	ESCI	103710	2016/06/02	2017/06/01	
Spectrum Analyzer	Agilent	N9020	US46220290	2016/01/17	2017/01/16	
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20	
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18	
Active Loop Antenna	SCHWARZBE CK	FMZB1519	1519-037	2016/05/19	2017/05/18	
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18	
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18	
Temperature/Humi dity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19	

Report No.: CTL1607142685-WF-03

The calibration interval was one year

2.4. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AFLY-WARP7 filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.

2.5. Modifications

No modifications were implemented to meet testing criteria.



V1.0 Page 9 of 19 Report No.: CTL1607142685-WF-03

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Fraguerov rongo (MIII)	Limit (dBuV)			
Frequency range (MHz)	Quasi-peak	Average		
0.15-0.5	0.15-0.5 66 to 56*			
0.5-5	56	46		
5-30	60	50		

^{*} Decreases with the logarithm of the frequency.

TEST CONFIGURATION

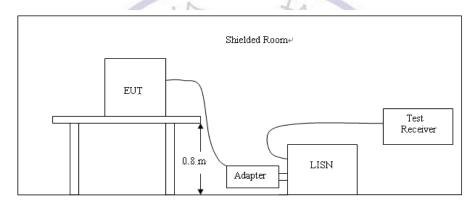


TEST PROCEDURE


- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a flood stand system; a wooden table with a height of 0.1 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2. Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipments received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Report No.: CTL1607142685-WF-03



SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

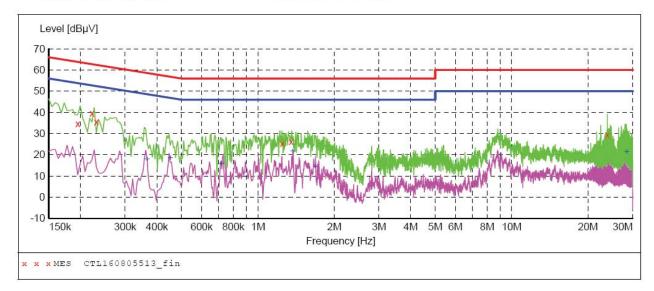


MEASUREMENT RESULT: "CTL160805513_fin"

8/5/2016 5:3	0PM						
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195001	34.70	10.2	64	29.1	QP	L1	GND
0.222001	39.60	10.2	63	23.1	QP	L1	GND
0.231001	35.60	10.2	62	26.8	QP	L1	GND
1.248001	25.30	10.3	56	30.7	QP	L1	GND
1.351501	26.30	10.3	56	29.7	QP	L1	GND
23.829001	29.40	11.1	60	30.6	QP	L1	GND

MEASUREMENT RESULT: "CTL160805513 fin2"

8/5/2016 5:30	PM						
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.366001	17.70	10.2	49	30.9	AV	L1	GND
0.451501	18.20	10.2	47	28.6	AV	L1	GND
0.717001	15.60	10.2	46	30.4	AV	L1	GND
1.374001	21.40	10.3	46	24.6	AV	L1	GND
1.684501	14.30	10.3	46	31.7	AV	L1	GND
28.459501	21.20	11.2	50	28.8	AV	L1	GND

Report No.: CTL1607142685-WF-03

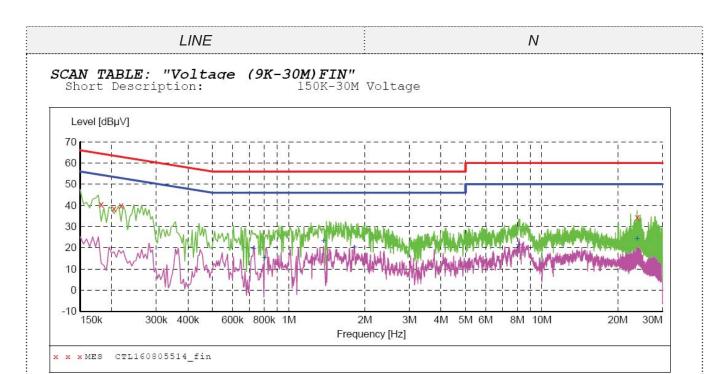

MEASUREMENT RESULT: "CTL160805514 fin"

8/5/2016 5	:34PM						
Frequenc MH		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.18150	1 40.40	10.2	64	24.0	QP	N	GND
0.20400	38.40	10.2	63	25.0	QP	N	GND
0.21750	1 40.00	10.2	63	22.9	QP	N	GND
23.82450	34.40	11.1	60	25.6	OP	N	GND

MEASUREMENT RESULT: "CTL160805514 fin2"

8/5/2016 5:34	PM						
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.726001	19.60	10.2	46	26.4	AV	N	GND
0.802501	15.20	10.2	46	30.8	AV	N	GND
1.374001	22.90	10.3	46	23.1	AV	N	GND
1.819501	20.00	10.3	46	26.0	AV	N	GND
8.106001	21.20	10.5	50	28.8	AV	N	GND
23.824501	24.30	11.1	50	25.7	AV	N	GND

V1.0 Page 12 of 19 Report No.: CTL1607142685-WF-03

3.2. Radiated Emission

Limit

- a The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.
- b Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d The field strength of any emissions appearing outside of the 13.110– 14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

exceed the general radiated enhecien in the in \$10,200.								
Distance (Meters)	Radiated (dBuV/m)	Radiated (µV/m)						
3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)						
3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)						
3	69.54	30						
3	80.50	106						
3	90.47	334						
3	124.00	15848						
3	90.47	334						
3	80.50	106						
3	69.54	30						
3	40.0	100						
3	43.5	150						
3	46.0	200						
0 3	54.0	500						
	Distance (Meters) 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	Distance (Meters) Radiated (dBuV/m) 3 20log(2400/F(KHz))+40log(300/3) 3 20log(24000/F(KHz))+ 40log(30/3) 3 69.54 3 80.50 3 90.47 3 90.47 3 80.50 3 69.54 3 40.0 3 43.5 3 46.0						

Test Procedure

- 1. The EUT was placed on 80cm wooden desk above ground plane which on a turn table.
- 2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measurements have been completed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG


Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example


Frequency	FS	RA	AF	CL	AG	Transd
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(dB)	(dB)
150.00	40	58.1	12.2	1.6	31.90	-18.1

Test Configuration

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

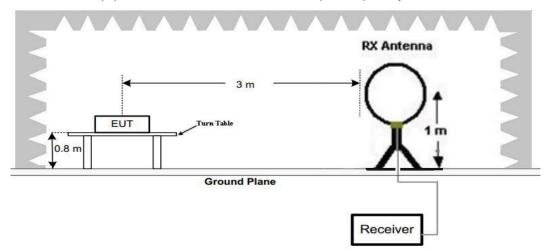

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

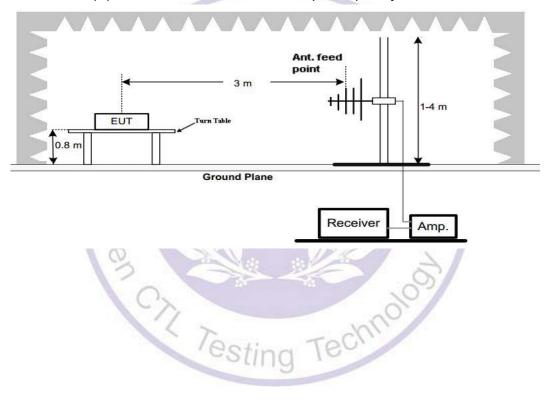

V1.0 Page 14 of 19 Report No.: CTL1607142685-WF-03

Test Results

3.2.1 In-band Emissions

	Frequency(MHz):			13.56		Polarity:		HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Detector	Limit (dBuV/m)		Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Correction Factor (dB/m)
1	13.15	42.48	PK	69.54		37.78	5.26	-0.56	4.70
2	13.553	48.56	PK	69.54		43.77	5.36	-0.57	4.79
3	13.56	87.69	PK	124.00		82.81	5.45	-0.57	4.88
4	13.567	48.87	PK	69.54		43.73	5.49	-0.35	5.14
5	13.75	41.93	PK	69.54		36.60	5.63	-0.30	5.33

Frequency(MHz):			13.56		Polarity:		VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)	Detector	Limit (dBuV/m)		Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Correction Factor (dB/m)
1	13.15	41.36	PK	69.54		36.66	5.26	-0.56	4.70
2	13.553	49.98	PK	69.54		45.19	5.36	-0.57	4.79
3	13.56	88.98	PK	124.00		84.10	5.45	-0.57	4.88
4	13.567	49.41	PK	69.54		44.27	5.49	-0.35	5.14
5	13.75	42.36	PK	69.54		37.03	5.63	-0.30	5.33

REMARKS:

- 1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)
- Margin value = Limit value- Emission level.
- 4. The other emission levels were very low against the limit.

3.2.2 Out-of-band Emissions

Frequency(MHz):			13.56			P	olarity:	HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Detector	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Correction Factor (dB/m)
1	27.12	36.52	PK	69.54	33.02	29.02	7.25	0.25	7.50
2	40.68	31.52	PK	40.00	8.48	22.71	8.25	0.56	8.81
3	54.24	29.59	PK	40.00	10.41	20.55	8.30	0.74	9.04
4	67.80	25.51	PK	40.00	14.49	15.98	8.55	0.98	9.53

Frequency(MHz):			13.56			Po	olarity:	VERTICAL			
No.	Frequency (MHz)	Emission Level (dBuV/m)	Detector	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Correction Factor (dB/m)		
1	27.12	36.98	PK	69.54	32.56	29.48	7.25	0.25	7.50		
2	40.68	33.25	PK	40.00	6.75	24.44	8.25	0.56	8.81		
3	54.24	30.74	PK	40.00	9.26	21.70	8.30	0.74	9.04		
4	67.80	28.87	PK	40.00	11.13	19.34	8.55	0.98	9.53		

REMARKS:

- 1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)
- 3. Margin value = Limit value- Emission level.
- 4. The other emission levels were very low against the limit.

Note: Test from 9KHz to 1GHz, only worse case is reported

V1.0 Page 15 of 19 Report No.: CTL1607142685-WF-03

3.3. 20dB Bandwidth

Limit

No limit for 20dB bandwidth.

Test Procedure

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results

Modulation	Frequency(MHz)	20dB bandwidth (KHz)	Result
ASK	13.56	2.854	Pass

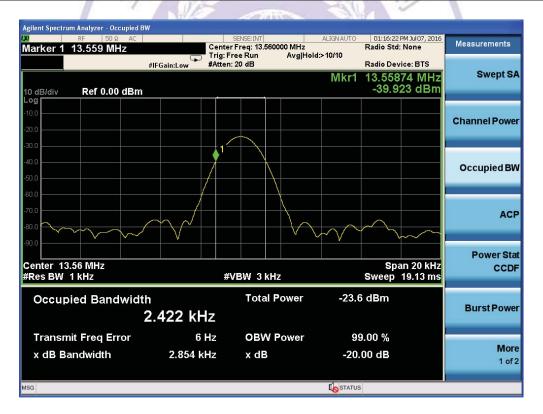


3.4. Frequency Stability Test Data

LIMIT

The frequency tolerance of the carrier signal shall be maintained within ±0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

TEST CONFIGURATION



Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20℃ operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to −20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- 6. Repeat step measure with 10℃ increased per stage until the highest temperature of +50℃ reached.
- 7. Reduce the input voltage to specified extreme voltage variation (+/- 15%) or endpoint, record the maximum frequency change.

TEST RESULTS

	Reference Frequency: 13.56MHz										
Voltage (V)	Temperature (°ℂ)	Frequency (Hz)	Frequency Deviation(Hz)	Deviation (%)							
	+20(Ref)	13,560,069	69	0.005088%							
	-20	13,560,047	47	0.003466%							
	-10	13,560,035	35	0.002581%							
	0	13,559,952	-48	-0.003540%							
3.70	+10	13,560,045	45	0.003319%							
3.70	+20	13,560,052	52	0.003835%							
	+25	13,560,041	41	0.003024%							
	+30	13,560,052	52	0.003835%							
	+40	13,560,032	32	0.002360%							
	+50	13,560,019	19	0.001401%							
4.26	+20	13,560,054	54	0.003982%							
3.15	+20	13,560,038	38	0.002802%							



4. EUT TEST PHOTO





Conducted Emission



5. External and Internal Photos of the EUT

Reference to the test report No. CTL1607142685-WF-01

