

**FCC Part 15B**  
**Measurement and Test Report**  
**For**  
**Cosmic Ray Enterprises Co., Ltd**  
**Haoyunlai Building, Xixiang Industrial zone, Bao'an District,**  
**Shenzhen, China**

**FCC ID: 2AFM9BD01**

<b>Test Rule(s):</b>	<u>FCC Part 15 Subpart B</u>
<b>Product Description:</b>	<u>Bluetooth dongle&amp;bluetooth adapter</u>
<b>Tested Model:</b>	<u>BD01</u>
<b>Report No.:</b>	<u>STR15088089I-2</u>
<b>Tested Date:</b>	<u>2015-08-10 to 2013-08-13</u>
<b>Issued Date:</b>	<u>2015-08-14</u>
<b>Tested By:</b>	<u>Vigoss Liang / Engineer</u>
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u>
<b>Prepared By:</b>	<p style="text-align: center;"><b>Shenzhen SEM.Test Technology Co., Ltd.</b> 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a></p>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY .....	4
1.5 EUT SETUP AND OPERATION MODE .....	5
1.6 TEST EQUIPMENT LIST AND DETAILS .....	5
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. CONDUCTED EMISSIONS .....</b>	<b>7</b>
3.1 MEASUREMENT UNCERTAINTY .....	7
3.2 TEST PROCEDURE.....	7
3.3 BASIC TEST SETUP BLOCK DIAGRAM.....	7
3.4 ENVIRONMENTAL CONDITIONS .....	8
3.5 SUMMARY OF TEST RESULTS/PLOTS .....	8
3.6 CONDUCTED EMISSIONS TEST DATA.....	8
<b>4. RADIATED EMISSIONS.....</b>	<b>11</b>
4.1 MEASUREMENT UNCERTAINTY .....	11
4.2 TEST PROCEDURE.....	11
4.3 TEST RECEIVER SETUP .....	12
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.5 ENVIRONMENTAL CONDITIONS .....	12
4.6 SUMMARY OF TEST RESULTS/PLOTS .....	12

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Cosmic Ray Enterprises Co., Ltd  
Address of applicant: Haoyunlai Building, Xixiang Industrial zone, Bao'an District, Shenzhen, China  
Manufacturer: Cosmic Ray Enterprises Co., Ltd  
Address of manufacturer: Haoyunlai Building, Xixiang Industrial zone, Bao'an District, Shenzhen, China

<b>General Description of EUT</b>	
Product Name:	Bluetooth dongle&bluetooth adapter
Trade Name:	N/A
Model No.:	BD01
Adding Model(s):	N/A

*Note: The test data is gathered from a production sample, provided by the manufacturer.*

<b>Technical Characteristics of EUT</b>	
Rated Voltage:	USB DC5V
Rated Current:	/
Rated Power:	/
Lowest Internal Frequency:	26MHz
Highest Internal Frequency:	26MHz
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the Cosmic Ray Enterprises Co., Ltd in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Operating	For EMI Testing

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Notebook	Lenovo	E10	LR-63C8R

## 1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

## 2. SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

### 3. Conducted Emissions


#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

#### 3.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.3 Basic Test Setup Block Diagram

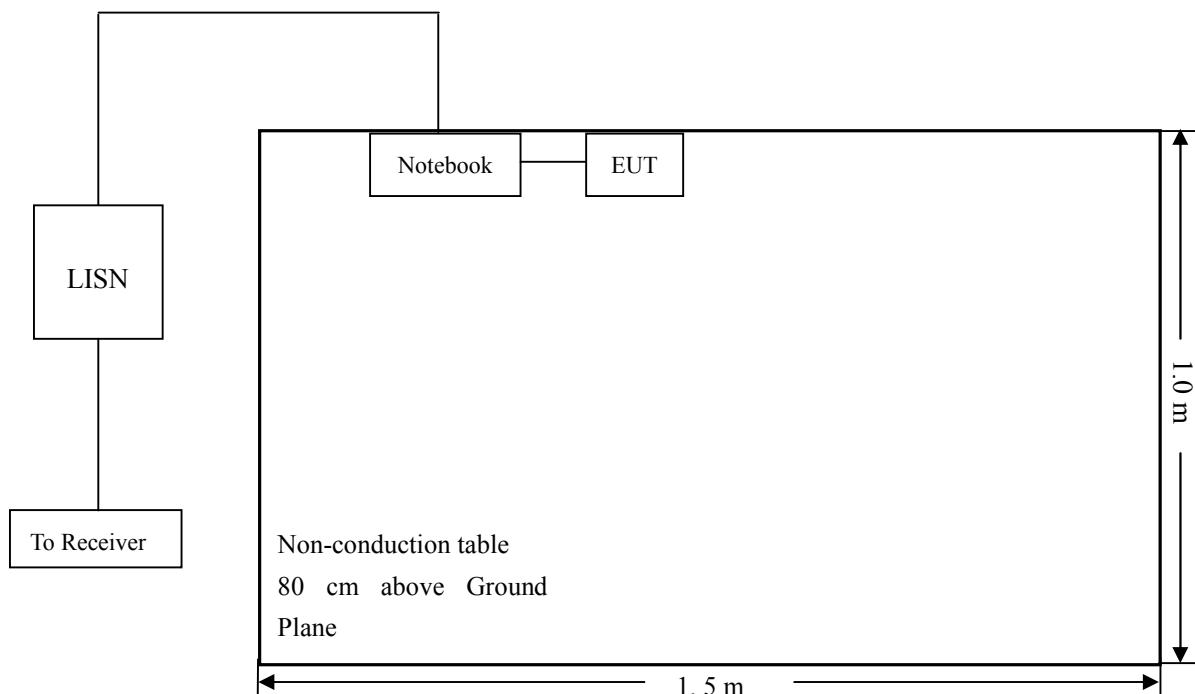

### 3.4 Environmental Conditions


Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

### 3.5 Summary of Test Results/Plots

According to the data in section 3.6, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


**-7.26 dB at 4.0100 MHz in the Neutral mode, peak detector, 0.15-30MHz**

### 3.6 Conducted Emissions Test Data

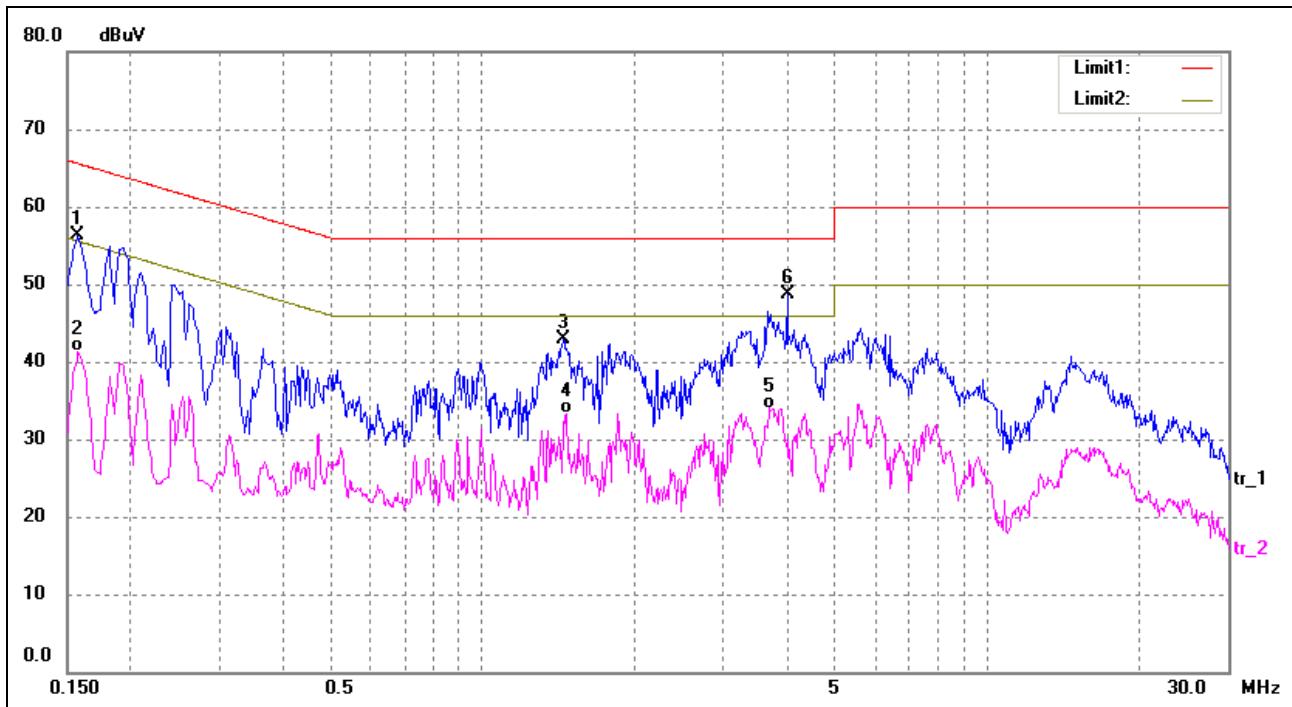**Plot of Conducted Emissions Test Data**EUT: *Bluetooth dongle&bluetooth adapter*Tested Model: *BD01*Operating Condition: *TMI*Comment: *USB DC5V*Test Specification: *Neutral*

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	43.88	12.50	56.38	65.57	-9.19	peak
2	0.1580	28.71	12.50	41.21	55.57	-14.36	AVG
3	1.4420	29.85	13.00	42.85	56.00	-13.15	peak
4	1.4660	20.33	13.00	33.33	46.00	-12.67	AVG
5	3.7140	21.00	13.00	34.00	46.00	-12.00	AVG
6*	4.0100	35.74	13.00	48.74	56.00	-7.26	peak

Test Specification: Line

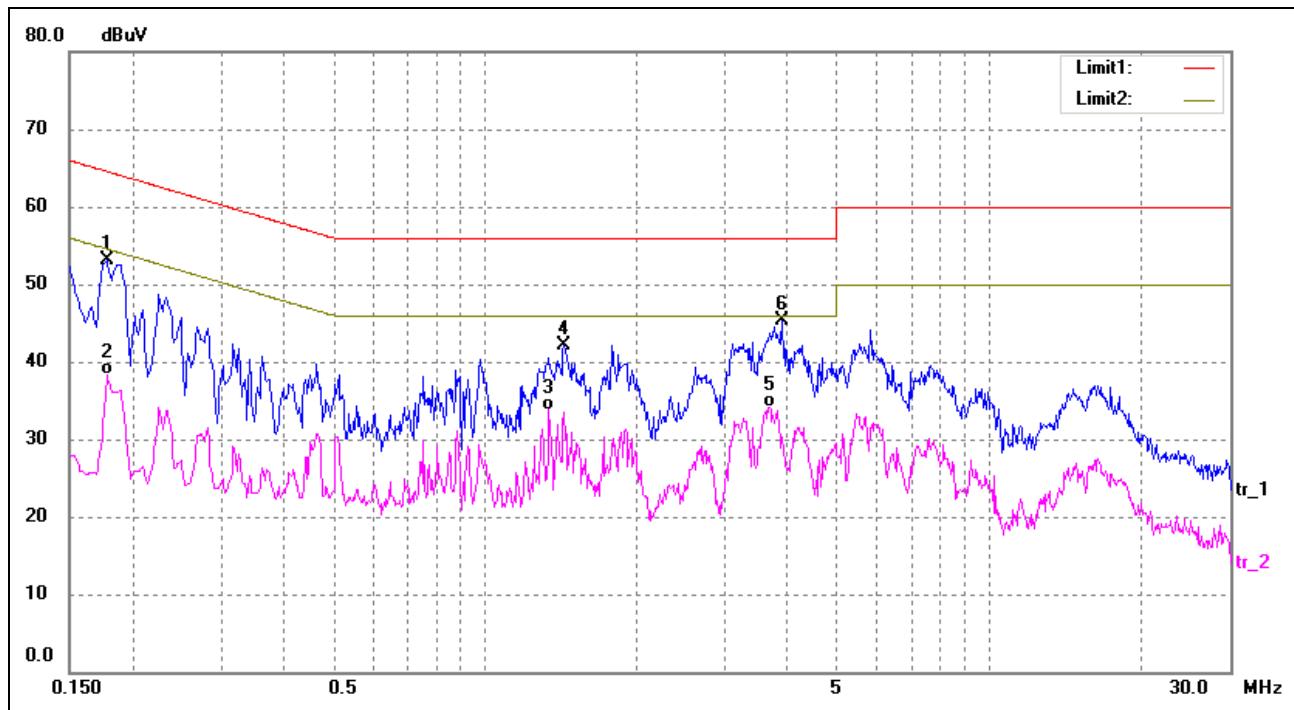

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1780	40.64	12.50	53.14	64.58	-11.44	peak
2	0.1780	25.75	12.50	38.25	54.58	-16.33	AVG
3	1.3380	20.80	13.00	33.80	46.00	-12.20	AVG
4	1.4380	29.07	13.00	42.07	56.00	-13.93	peak
5	3.6780	21.09	13.00	34.09	46.00	-11.91	AVG
6*	3.8980	32.37	13.00	45.37	56.00	-10.63	peak

## 4. Radiated Emissions


### 4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

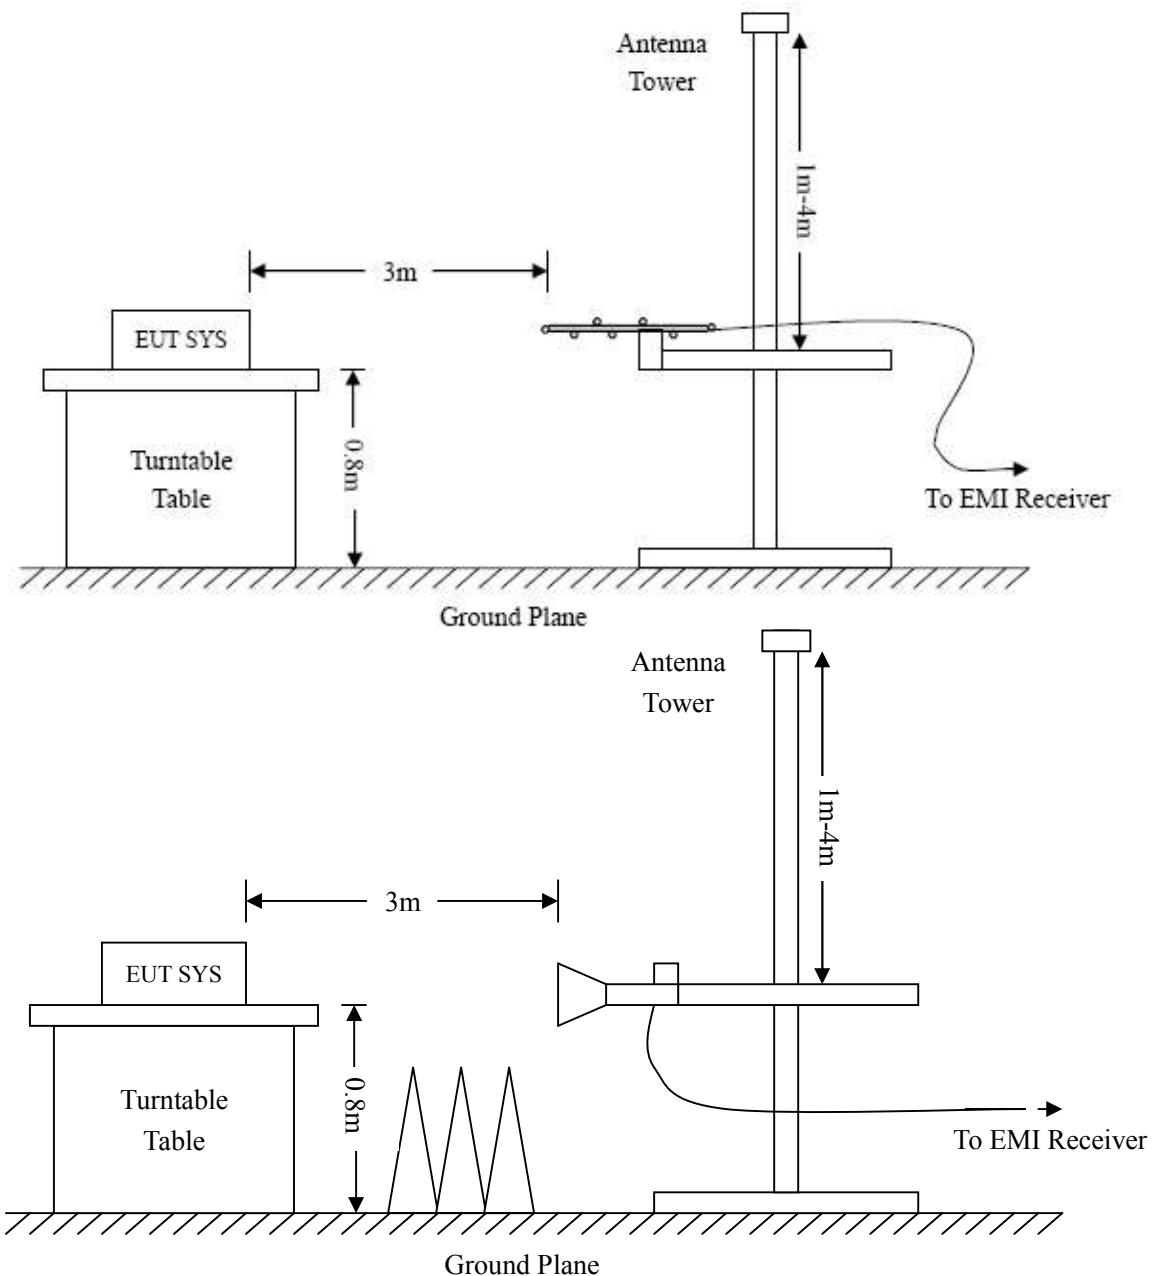

### 4.3 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

### 4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$


### 4.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

### 4.6 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

**-4.55 dB at 360.4476 MHz in the Horizontal polarization, 9 kHz to 1 GHz, 3Meters**

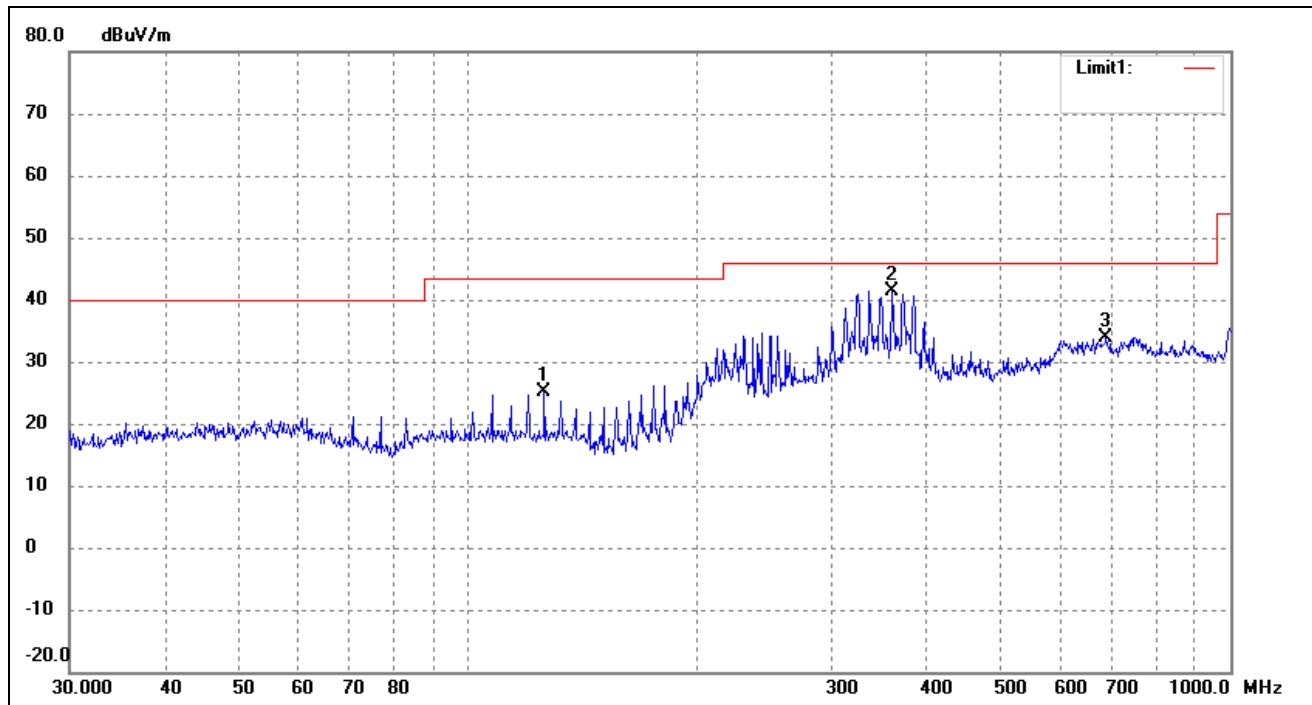**Plot of Radiated Emissions Test Data**EUT: *Bluetooth dongle&bluetooth adapter*Tested Model: *BD01*Operating Condition: *TM1*Comment: *USB DC5V*Test Specification: *Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	125.8863	20.57	4.54	25.11	43.50	-18.39	154	200	peak
2	360.4476	29.21	12.24	41.45	46.00	-4.55	245	200	peak
3	687.1507	15.19	18.72	33.91	46.00	-12.09	290	200	peak

Test Specification: Vertical

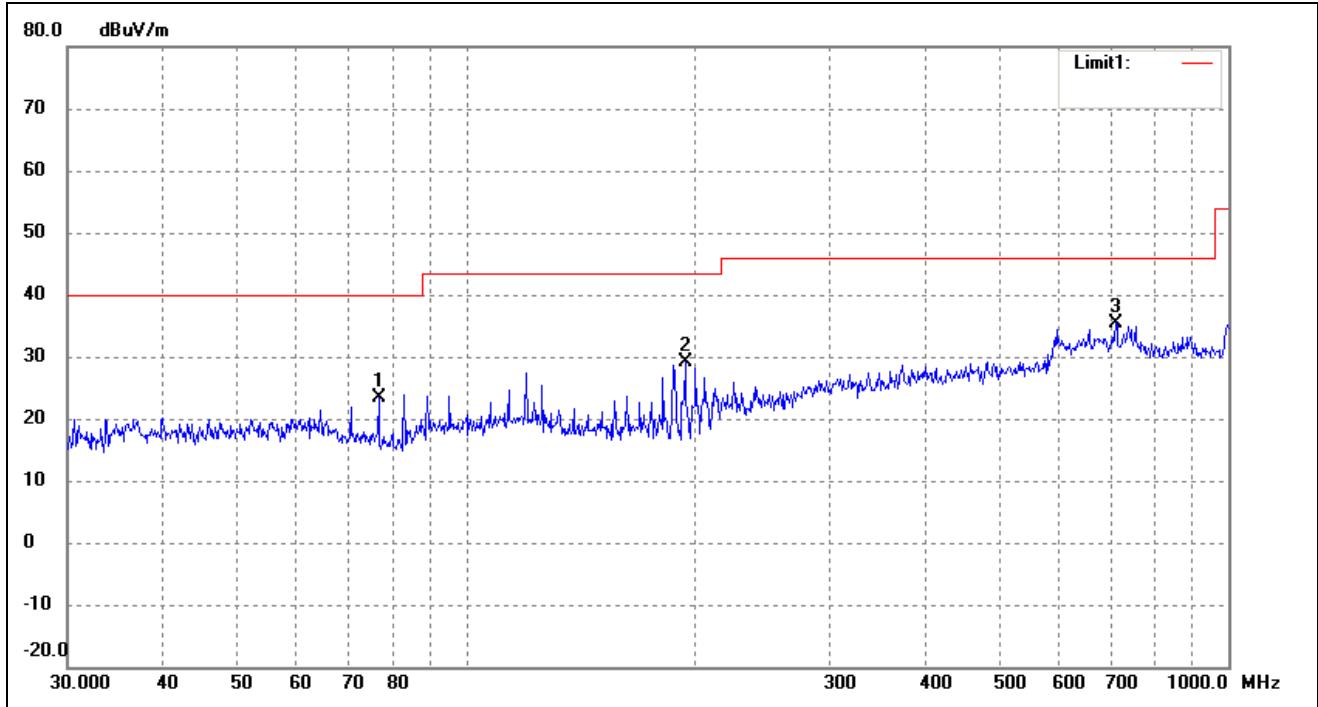

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	76.7807	20.95	2.39	23.34	40.00	-16.66	51	100	peak
2	193.7727	25.75	3.39	29.14	43.50	-14.36	308	100	peak
3	711.6734	17.38	18.12	35.50	46.00	-10.50	120	100	peak

Note: Testing is carried out with frequency rang 9kHz to the 1GHz.

The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not provided.

\*\*\*\*\* END OF REPORT \*\*\*\*\*