


**Product Title**  
**Font:** Arial, Regular, 12pt  
Top-align with Top Label Margin  
Left-align with Left Label Margin

**Serial Number,  
Part Number,  
IMEI Number**  
**Heading Font:** Arial Narrow, Bold, 6pt  
**Barcode Format:** Code 128  
**Barcode Line Height:** 2.5mm  
**Barcode Text Font:** OCR-B 10 BT, Regular, 11pt /  
Arial, Regular, 9pt  
Left-align with Left Label Margin

**Bluetooth MAC Address**  
**Heading Font:** Arial Narrow, Regular, 6pt  
**Paragraph Alignment:** Justify  
**MAC Address Font:** Arial, Regular, 8pt  
Left-align with Left Label Margin

**Product Version,  
Supplier Code,  
Date Of Manufacture**  
**Font:** Arial, Regular, 8pt  
**Paragraph alignment:** Left  
Left-align with Left Label Margin

**MiX Telematics Logo**  
**Width:** 29.91mm  
**Height:** 5.36mm  
Bottom-align with Bottom Label Margin  
Left-align with Left Label Margin

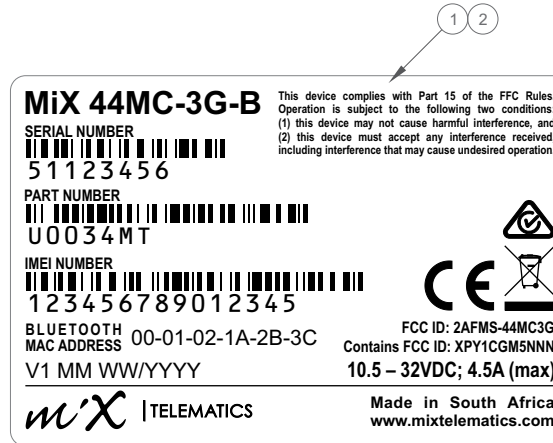

#### FCC Compliance Notice Text

**Font:** Arial Narrow, Bold, 4.5pt  
**Paragraph alignment:** Justify  
Right-align with Right Label Margin  
Top-align with Top Label Margin

#### RCM Logo

**Width:** 6.78mm  
**Height:** 5mm  
Right-align with Right Label Margin  
Bottom-align 1mm above CE Logo

#### Wheelie Bin Logo

**Width:** 5.44mm  
**Height:** 7.0mm  
Right-align with Right Label Margin  
Bottom-align with IMEI Barcode Text

#### CE Logo

**Width:** 9.1mm  
**Height:** 6.5mm  
Right-align 1.5mm from Wheelie Bin Logo  
Bottom-align with IMEI Barcode Text

#### FCC Text

**Font:** Arial Narrow, Bold, 6pt  
**Paragraph alignment:** Right  
Right-align with Right Label Margin  
Bottom-align with Bluetooth MAC Address Heading

#### Power Rating Text

**Font:** Arial Narrow, Bold, 8pt  
Right-align with Right Label Margin  
Bottom-align with Date of Manufacture Text

#### Line

**Height:** 0.5pt  
**Width:** (Area between Left and Right Label Margins)

#### Origin Text, MiX Telematics Website

**Font:** Arial, Bold, 6pt  
**Paragraph alignment:** Justify  
Right-align with Right Label Margin  
Centre vertically with MiX Telematics Logo

#### NOTES

1. Use 2mm margin on all sides of label
2. Do not scale logos. Use only logo artwork provided
3. Apply label symmetrically to indentation on bottom surface of the OBC's housing.  
Orientate label so that bottom edge of label is closest to the OBC's connectors.

| REF | DESCRIPTION                              | PART NUMBER |
|-----|------------------------------------------|-------------|
| 1   | LABEL HG DURAFLEX OD:77 ID:25MM 74x49MM  | CON0153     |
| 2   | RIBBON THER TRANS 110MMx70M NOTCHES B325 | CON0154     |

|  | SPECIFICATION   |                                  |               |    | REV | DATE        | ECN | CHANGES       |
|-------------------------------------------------------------------------------------|-----------------|----------------------------------|---------------|----|-----|-------------|-----|---------------|
|                                                                                     | DOCUMENT TITLE  | MiX 44MC-3G-B: Housing Label     |               |    | 1A  | 18 Sep 2019 | 721 | Field Trial 1 |
|                                                                                     | DOCUMENT NUMBER | SLU0034A                         |               |    | 1B  | 4 Nov 2019  | 736 | First release |
|                                                                                     | SHEET           | 1 OF 1                           | SHEET SIZE    | A4 |     |             |     |               |
|                                                                                     | SCALE           | 1:1 Except where shown otherwise |               |    |     |             |     |               |
|                                                                                     | FORM            | 7.11.5-22                        | FORM REVISION | 5  |     |             |     |               |