

Choose certainty.
Add value.

Report On

Limited FCC and Industry Canada Testing of the MiX Telematics Magix Pico Base Station In accordance with FCC 47 CFR Part 15C, Industry Canada RSS-247 and Industry Canada RSS-GEN

COMMERCIAL-IN-CONFIDENCE

FCC ID: 2AFMS-PBS9

IC: 20545-PBS9

Document 75932793 Report 01 Issue 2

January 2016



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North, Fareham, Hampshire, United Kingdom, PO15 5RL Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ONLimited FCC and Industry Canada Testing of the

MiX Telematics Magix Pico Base Station

In accordance with FCC 47 CFR Part 15C, Industry Canada RSS-247

and Industry Canada RSS-GEN

Document 75932793 Report 01 Issue 2

January 2016

PREPARED FOR MiX Telematics International (PTY) Ltd

Blaauwklip Office Park 2

cnr Strand & Webersvallei Streets

Stellenbosch Cape Town South Africa

PREPARED BY

LBONED

Natalie Bennett

Senior Administrator, Project Support

APPROVED BY

Matthew Russell
Authorised Signatory

DATED 19 January 2016

This report has been up-issued to Issue 2 to correct the manufacturer's name.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, Industry Canada RSS-247 and Industry Canada RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

G Lawler





CONTENTS

Section		Page No
1	REPORT SUMMARY	3
1.1	Introduction	4
1.2	Brief Summary of Results	5
1.3	Application Form	
1.4	Product Information	
1.5	Test Conditions	
1.6	Deviations from the Standard	
1.7	Modification Record	
2	TEST DETAILS	9
2.1	Peak EIRP	
2.2	Spurious Radiated Emissions	
2.3	Restricted Band Edges	25
2.4	Authorised Band Edges	30
3	TEST EQUIPMENT USED	35
3.1	Test Equipment Used	36
3.2	Measurement Uncertainty	
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT	39
4.1	Accreditation, Disclaimers and Copyright	40



SECTION 1

REPORT SUMMARY

Limited FCC and Industry Canada Testing of the
MiX Telematics Magix Pico Base Station
In accordance with FCC 47 CFR Part 15C and Industry Canada RSS-247



1.1 INTRODUCTION

The information contained in this report is intended to show the verification of Limited FCC and Industry Canada Testing of the MiX Telematics Magix Pico Base Station to the requirements of FCC 47 CFR Part 15C, Industry Canada RSS-247 and Industry Canada RSS-GEN.

Objective To perform Industry Canada Testing to determine the

Equipment Under Test's (EUT's) compliance with the Test

Specification, for the series of tests carried out.

Manufacturer MiX Telematics

Model Number(s) Magix Pico Base Station

Serial Number(s) 0964TE000051

Number of Samples Tested 1

Test Specification/Issue/Date FCC 47 CFR Part 15C (2014)

Industry Canada RSS-247 (Issue 1, 2015) Industry Canada RSS-GEN (Issue 4, 2014)

Incoming Release Application Form Date Application Form 10 December 2015

Disposal Held Pending Disposal

Reference Number Not Applicable
Date Not Applicable

Order Number P0084401

Date 25 November 2015 Start of Test 7 December 2015

Finish of Test 8 December 2015

Name of Engineer(s) G Lawler

Related Document(s) ANSI C63.10: 2013



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, Industry Canada RSS-247 and Industry Canada RSS-GEN is shown below.

Castian	Sp	ecification Cl	ause	Total Department	Danult	Comments/Base Standard
Section	Part 15C	RSS-247	RSS-GEN	Test Description	Result	Comments/Base Standard
Transmit						
2.1	15.247 (b)(4)	5.4(1)	-	Peak EIRP	Pass	
2.2	15.247 (d), 15.205 and 15.209	5.5	-	Spurious Radiated Emissions	Pass	
Transmit -	Static Mode				•	
2.3	15.205	-	8.10	Restricted Band Edges	Pass	
2.4	15.247 (d)	5.5	-	Authorised Band Edges	Pass	
Transmit -	Hopping Mod	е				
2.3	15.205	-	8.10	Restricted Band Edges	Pass	
2.4	15.247 (d)	5.5	-	Authorised Band Edges	Pass	



1.3 APPLICATION FORM

	EQUIPMENT DESCRIPTION							
Model Name/Number Magix Pico Base Station								
Part Number	440FT0964							
Hardware Version	Build State	V4 (PCB 440AWZ950-V2A – BOM 440PLZ950-V6B)						
Software Version								
FCC ID (if applicable)		2AFMS-PBS9						
Industry Canada ID (if applicable)		20545-PBS9						
Technical Description (Please provide description of the intended use of the equ		The Pico Base Station (PBS) is required as part of the Magix Asset Positioning System (MAPS) solution for the US market and has been designed to enable an FM OBC to act as a Base Station for the MAPS network providing two way communication with the GPS enabled Beame mobile devices.						

	PO	NER SC	DURCE
	AC mains	State	voltage
AC sup	ply frequency (Hz)		
	VAC		
	Max Current		
	Hz		
	Single phase		Three phase
And / C)r		
⊠	External DC supply		
	Nominal voltage	12 V	Max Current 0.1 A
	Extreme upper voltage	40V V	
	Extreme lower voltage	8 V	
Battery			
	Nickel Cadmium		Lead acid (Vehicle regulated)
	Alkaline		Leclanche
	Lithium		Other Details:
	Volts nominal.		
End po	int voltage as quoted by equipment manufacturer		V

	FREQUENCY INFORMATION										
Frequency Range	902 to928	N	ЛНz								
Channel Spacing (where applicable)											
Receiver Frequency Range (if different)	902 to928	ľ	ИHz								
Channel Spacing (if different)											
Test Frequencies*	Bottom	902.2	MHz	Channel Number (if applicable)							
	Middle	915.0	MHz	Channel Number (if applicable)							
	Тор	927.8	MHz	Channel Number (if applicable)							
Intermediate Frequencies			MHz								
Highest Internally Generated Frequen	ncy:		MHz								



Product Service

POWER CHARACTERISTICS										
Maximum TX power 0.1 W										
Minimum TX power	W (if variable)								
Is transmitter intended for :										
Continuous duty				Yes		No				
Intermittent duty				Yes		No				
If intermittent state DUTY CYCLE										
Transmitter ON seconds										
Transmitter OFF seconds										
	ANTENNA CHAR									
Antenna connector		State impedance	Ohm							
Temporary antenna connector		State impedance	Ohm							
Integral antenna Type		State impedance	dBi							
External antenna Type		State impedance	dBi							
	MODULATION CHA	ARACTERISTICS								
Amplitude		✓ Frequency								
☐ Phase		Other (please provide detai	ls):							
Can the transmitter operate un-modulated?										
Currino dunominari opolicio di modulatodi.										
	CLASS OF EMI	SSION USED								
	ITU designation or 0	class of Emission:								
	1	44K0F1D								
	(if applicable) 2									
	(if applicable) 3									
If more than three classes of emission, list s	eparately:									
	BATTERY POV	VER SUPPLY								
Model name/number		Identification/Part number								
Manufacturer		Country of Origin								
	ANCILLARIES	(If applicable)								
Model name/number		Identification/Part number								
Manufacturer		Country of Origin								
	EXTREME C	ONDITIONS								
Extreme test voltages (Max) 40	V	Extreme test voltages (Mix)	8		V					
Nominal DC Voltage 12	V	DC Maximum Current	0.	1	Α					
Maximum temperature + 85	°C	Minimum temperature	-2	20	°C					
I hereby declare that I am entitled to sign correct and complete.	on behalf of the app	icant and that the information s	supplied	lis						
Name: S R Dawes	Edwas									
Position held: Engineering Manage	r Date:	10 th Decem	ber 201	5						



1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a MiX Telematics Magix Pico Base Station. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 12 V DC supply.

FCC Measurement Facility Registration Number 90987 Octagon House, Fareham Test Laboratory

Industry Canada Company Address Code IC2932B-1 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



SECTION 2

TEST DETAILS

Limited FCC and Industry Canada Testing of the MiX Telematics Magix Pico Base Station In accordance with FCC 47 CFR Part 15C and Industry Canada RSS-247



2.1 PEAK EIRP

2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (b)(4) Industry Canada RSS-247, Clause 5.4(4)

2.1.2 Equipment Under Test and Modification State

Magix Pico Base Station S/N: 0964TE000051 - Modification State 0

2.1.3 Date of Test

7 December 2015

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The test was performed in accordance with ANSI TIA-603-D, Clause 2.2.17.2

Remarks

The plots on the following pages are for illustration purposes only. The final measured result is obtained after a substitution procedure.

2.1.6 Environmental Conditions

Ambient Temperature 19.7°C Relative Humidity 46.0%




2.1.7 Test Results

12 V DC Supply

Transmit, EIRP Peak Power Results

902.2	2 MHz	915.0	MHz	927.8 MHz		
dBm	mW	dBm	mW	dBm mW		
16.85	48.42	16.57	45.39	17.09	51.17	


Transmit, 902.2 MHz, EIRP Peak Power Plot

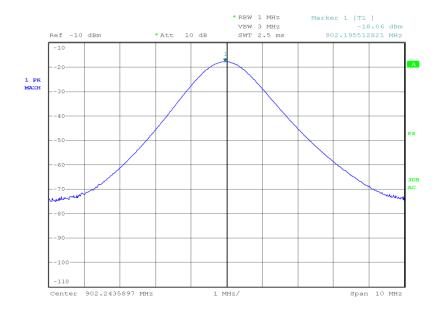

Date: 7.DEC.2015 21:59:29




Transmit, 915.0 MHz, EIRP Peak Power Plot

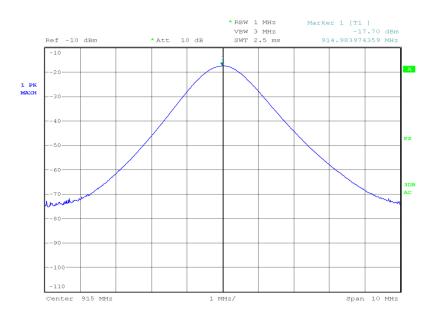

Date: 7.DEC.2015 22:12:18

Transmit, 927.8 MHz, EIRP Peak Power Plot

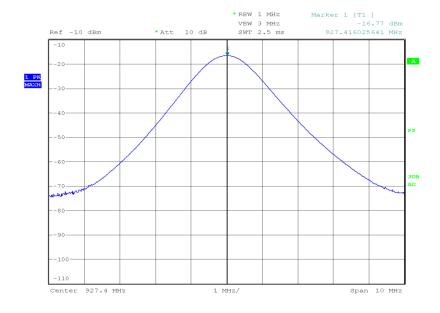

Date: 7.DEC.2015 22:16:45



FCC 47 CFR Part 15, Limit Clause 15.247 (b)(4)

36.0 dBm or 4000 mW

Industry Canada RSS-247, Limit Clause, 5.4(1)

For FHSs operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W, and the e.i.r.p. shall not exceed 4 W if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W and the e.i.r.p. shall not exceed 1 W if the hopset uses less than 50 hopping channels..



2.2 SPURIOUS RADIATED EMISSIONS

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d), 15.205 and 15.209 Industry Canada RSS-247, Clause 5.5

2.2.2 Equipment Under Test and Modification State

Magix Pico Base Station S/N: 0964TE000051 - Modification State 0

2.2.3 Date of Test

8 December 2015

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

The test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

2.2.6 Environmental Conditions

Ambient Temperature 19.7°C Relative Humidity 46.0%




2.2.7 Test Results

12 V DC Supply

Transmit, 902.2 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	QP Level (dBµV/m)	QP Margin (dBµV/m)	QP Level (μV/m)	QP Margin (μV/m)	Angle (°)	Height (m)	Polarisation
40.327	26.5	-13.5	21.1	-78.9	13	1.12	Vertical
43.436	24.5	-15.5	16.8	-83.2	351	1.00	Vertical
55.959	19.5	-20.5	9.4	-90.6	50	1.00	Vertical

Transmit, 902.2 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot

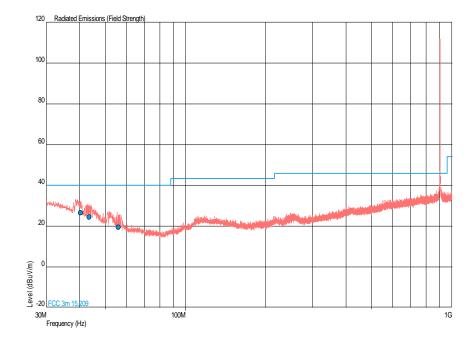




Transmit, 902.2 MHz, 1 GHz to 10 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	Final Peak (dBµV/m)	Final Average (dBµV/m)	Final Peak (μV/m)	Final Average (µV/m)	Angle (°)	Height (m)	Polarisation
3608.865	52.20	49.83	407.38	310.10	325	1.02	Vertical
5413.199	55.77	53.63	614.47	480.27	308	1.45	Vertical
8119.962	51.43	47.24	372.82	230.14	304	1.96	Vertical

No other emissions were detected within 10 dB of the limit.


Transmit, 902.2 MHz, 1 GHz to 1.5 GHz, Spurious Radiated Emissions Plot

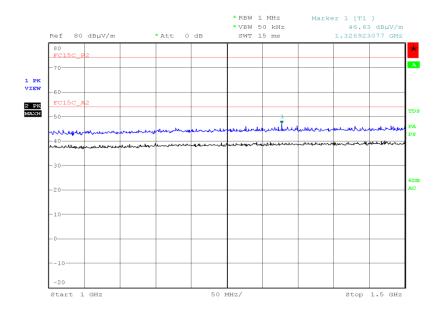

Date: 7.DEC.2015 21:16:07




Transmit, 902.2 MHz, 1.5 GHz to 8 GHz, Spurious Radiated Emissions Plot

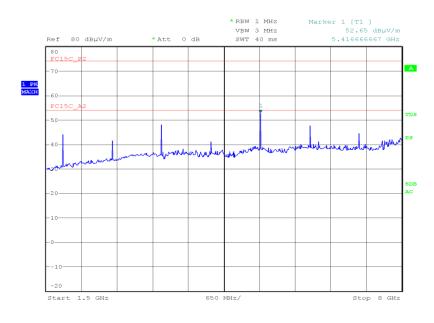

Date: 7.DEC.2015 17:46:06

Transmit, 902.2 MHz, 8 GHz to 10 GHz, Spurious Radiated Emissions Plot

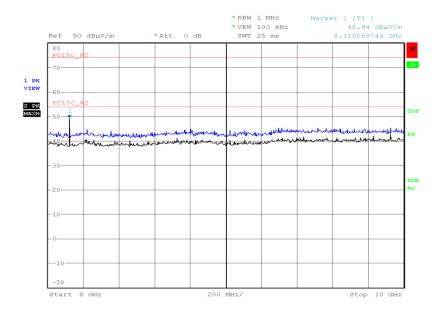


Date: 7.DEC.2015 20:53:33



Transmit, 915.0 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	QP Level (dBµV/m)	QP Margin (dBµV/m)	QP Level (μV/m)	QP Margin (μV/m)	Angle (°)	Height (m)	Polarisation
40.248	31.3	-8.7	36.7	-63.3	19	1.00	Vertical
42.572	24.6	-15.4	17.0	-83.0	36	1.00	Vertical

Transmit, 915.0 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot

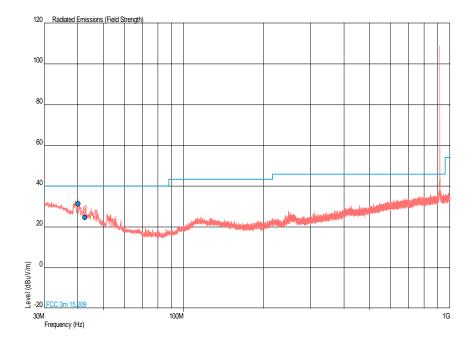




Transmit, 915.0 MHz, 1 GHz to 10 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	Final Peak (dBµV/m)	Final Average (dBµV/m)	Final Peak (μV/m)	Final Average (µV/m)	Angle (°)	Height (m)	Polarisation
3659.848	50.76	48.05	345.14	252.64	146	1.00	Vertical
7319.964	51.25	46.06	365.17	200.91	181	1.35	Horizontal

No other emissions were detected within 10 dB of the limit.


Transmit, 915.0 MHz, 1 GHz to 1.5 GHz, Spurious Radiated Emissions Plot

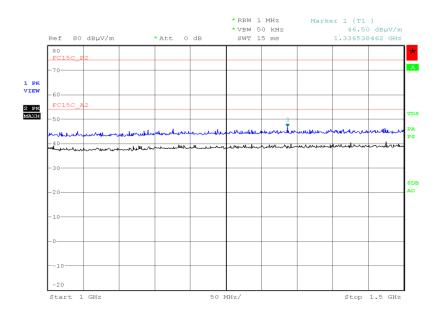

Date: 7.DEC.2015 21:21:01




Transmit, 915.0 MHz, 1.5 GHz to 8 GHz, Spurious Radiated Emissions Plot

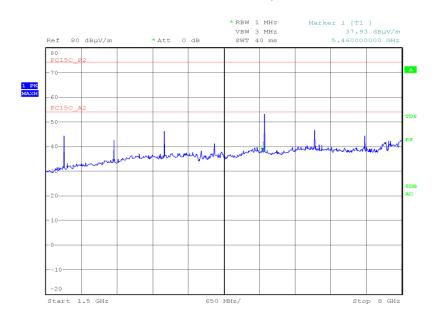

Date: 7.DEC.2015 17:53:28

Transmit, 915.0 MHz, 8 GHz to 10 GHz, Spurious Radiated Emissions Plot

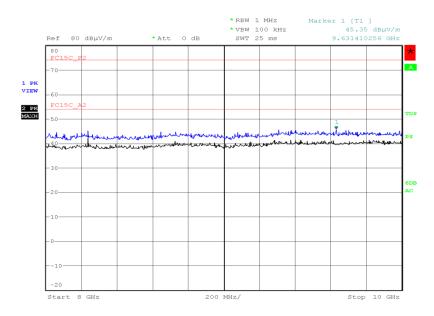


Date: 7.DEC.2015 20:49:27



Transmit, 927.8 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	QP Level (dBµV/m)	QP Margin (dBµV/m)	QP Level (μV/m)	QP Margin (μV/m)	Angle (°)	Height (m)	Polarisation
40.255	29.6	-10.4	30.2	-69.8	332	1.00	Vertical
43.226	24.9	-15.1	17.6	-82.4	55	1.00	Vertical

Transmit, 927.8 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot

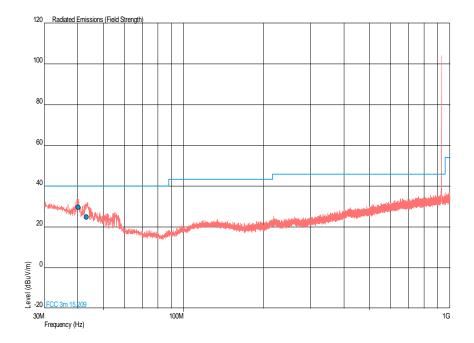




Transmit, 927.8 MHz, 1 GHz to 10 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	Final Peak (dBµV/m)	Final Average (dBµV/m)	Final Peak (μV/m)	Final Average (µV/m)	Angle (°)	Height (m)	Polarisation
7427.827	52.85	48.40	439.04	263.03	304	2.05	Vertical

No other emissions were detected within 10 dB of the limit.


Transmit, 927.8 MHz, 1 GHz to 1.5 GHz, Spurious Radiated Emissions Plot

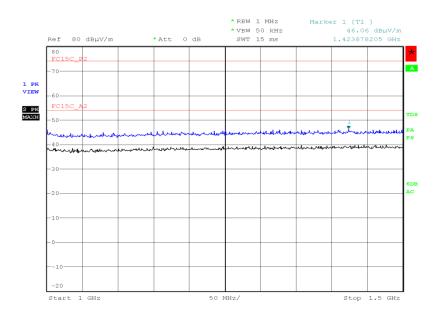

Date: 7.DEC.2015 21:24:55




Transmit, 927.8 MHz, 1.5 GHz to 8 GHz, Spurious Radiated Emissions Plot

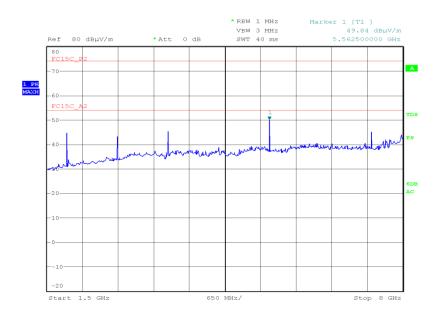

Date: 7.DEC.2015 17:43:49

Transmit, 927.8 MHz, 8 GHz to 10 GHz, Spurious Radiated Emissions Plot

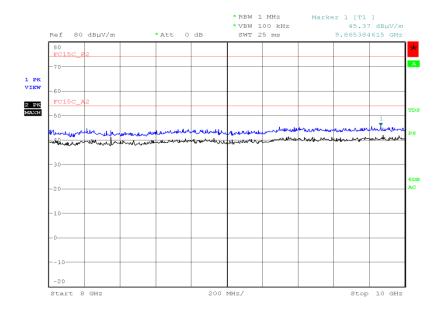

Date: 7.DEC.2015 20:45:11



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

Emissions outside the restricted bands shall be at least 20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBµV/m)	Average (dBµV/m)
Restricted Bands of Operation	74	54

FCC 47 CFR Part 15, Limit Clause 15.209

Fragues et (MIII)		Measurement		
Frequency (MHz)	(μV/m)	Average (dBµV/m)	Peak (dBµV/m)	Distance (m)
30-88	100	40.0	60.0	3
88-216	150	43.5	63.5	3
216-960	200	46.0	66.0	3
Above 960	500	54.0	74.0	3

Industry Canada RSS-247, Limit Clause, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



2.3 RESTRICTED BAND EDGES

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.205 Industry Canada RSS-GEN, Clause 8.10

2.3.2 Equipment Under Test and Modification State

Magix Pico Base Station S/N: 0964TE000051 - Modification State 0

2.3.3 Date of Test

8 December 2015

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

The test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.10.5

2.3.6 Environmental Conditions

Ambient Temperature 19.7°C Relative Humidity 46.0%




2.3.7 Test Results

12 V DC Supply

Transmit - Hopping Mode, Restricted Band Edges Results

902.2 MHz	927.8 MHz		
Measured Frequency 614 MHz	Measured Frequency 960 MHz		
dBμV/m	dBμV/m		
Final Peak	Final Peak		
38.63	42.46		


<u>Transmit - Hopping Mode, 902.2 MHz, Measured Frequency 614 MHz, Final Peak, Restricted Band Edges Plot</u>

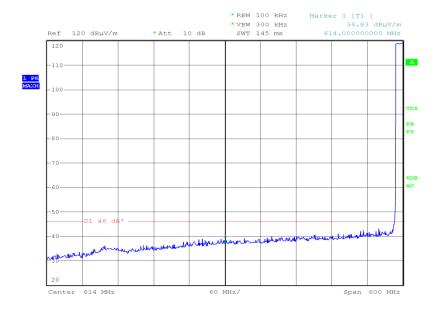

Date: 7.DEC.2015 23:32:02



<u>Transmit - Hopping Mode, 927.8 MHz, Measured Frequency 960 MHz, Final Peak, Restricted Band Edges Plot</u>

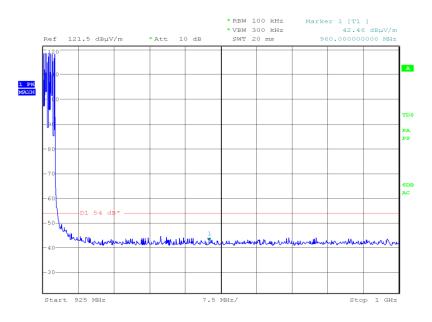

Date: 7.DEC.2015 23:30:49

FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBµV/m)	Average (dBμV/m)	
Restricted Bands of Operation	74	54	

Industry Canada RSS-GEN, Limit Clause 8.10

	Peak (dBµV/m)	Average (dBµV/m)
Restricted Bands of Operation	74	54




12 V DC Supply

Transmit - Static Mode, Restricted Band Edges Results

902.2 MHz	927.8 MHz		
Measured Frequency 614 MHz	Measured Frequency 960 MHz		
dBµV/m	dBµV/m		
Final Peak	Final Peak		
38.19	42.79		


<u>Transmit - Static Mode, 902.2 MHz, Measured Frequency 614 MHz, Final Peak, Restricted Band Edges Plot</u>

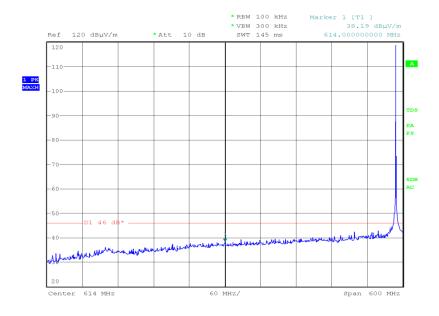

Date: 7.DEC.2015 22:57:29



<u>Transmit - Static Mode, 927.8 MHz, Measured Frequency 960 MHz, Final Peak, Restricted Band Edges Plot</u>

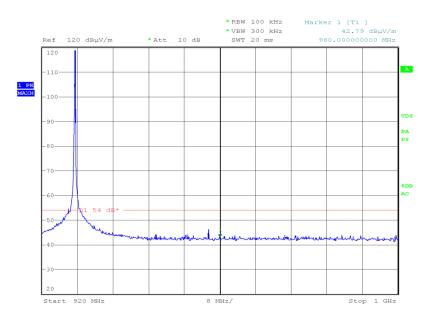

Date: 7.DEC.2015 23:21:26

FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBµV/m)	Average (dBμV/m)	
Restricted Bands of Operation	74	54	

Industry Canada RSS-GEN, Limit Clause 8.10

	Peak (dBµV/m)	Average (dBµV/m)
Restricted Bands of Operation	74	54



2.4 AUTHORISED BAND EDGES

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d) Industry Canada RSS-247, Clause 5.5

2.4.2 Equipment Under Test and Modification State

Magix Pico Base Station S/N: 0964TE000051 - Modification State 0

2.4.3 Date of Test

8 December 2015

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Procedure

The test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.10.4

2.4.6 Environmental Conditions

Ambient Temperature 19.7°C Relative Humidity 46.0%




2.4.7 Test Results

12 V DC Supply

Transmit - Hopping Mode, Authorised Band Edges Results

902.2 MHz	927.8 MHz		
Measured Frequency 902.00 MHz	Measured Frequency 928.00 MHz		
dBµV/m	dBμV/m		
Final Peak	Final Peak		
75.31	51.43		


<u>Transmit - Hopping Mode, 902.2 MHz, Measured Frequency 902.00 MHz, Final Peak, Authorised Band Edges Plot</u>

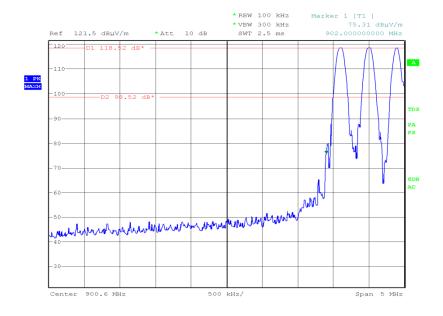

Date: 7.DEC.2015 23:34:27



<u>Transmit - Hopping Mode, 927.8 MHz, Measured Frequency 928.00 MHz, Final Peak, Authorised Band Edges Plot</u>

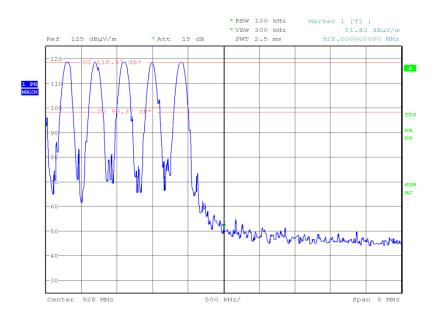

Date: 7.DEC.2015 23:29:13

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

Industry Canada RSS-247, Limit Clause 5.5

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.




12 V DC Supply

Transmit - Static Mode, Authorised Band Edges Results

902.2 MHz	927.8 MHz		
Measured Frequency 902.00 MHz	Measured Frequency 928.00 MHz		
dBμV/m	dBμV/m		
Final Peak	Final Peak		
78.47	55.74		


<u>Transmit - Static Mode, 902.2 MHz, Measured Frequency 902.00 MHz, Final Peak, Authorised Band Edges Plot</u>

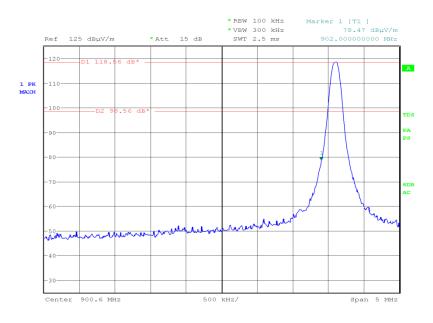

Date: 7.DEC.2015 23:03:10



<u>Transmit - Static Mode, 927.8 MHz, Measured Frequency 928.00 MHz, Final Peak, Authorised Band Edges Plot</u>

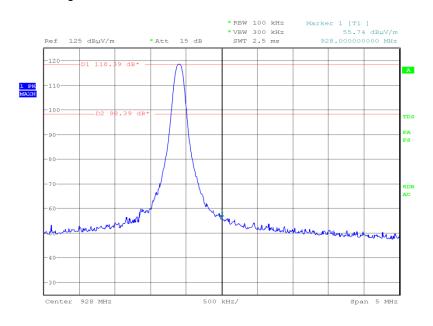

Date: 7.DEC.2015 23:12:09

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

Industry Canada RSS-247, Limit Clause 5.5

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 - Peak EIRP					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	29-Apr-2016
DC Power Supply	Hewlett Packard	6269B	742	-	TU
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Signal Generator	Rohde & Schwarz	SML01	1590	12	20-Apr-2016
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Log Periodic)	Schaffner	UPA6108	3109	12	29-Apr-2016
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
9m RF Cable (N Type)	Rhophase	NPS-2303-9000- NPS	3791	-	TU
Multimeter	Fluke	177	3833	12	16-Jun-2016
Tilt Antenna Mast	maturo Gmbh	TAM 4.0-P	3916	-	TU
Mast Controller	maturo Gmbh	NCD	3917	-	TU
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	15-Apr-2016
2m K-Type Cable (Rx)	Scott Cables	KPS-1501-2000- KPS	4527	-	TU
Section 2.2- Spurious Radiate	d Emissions				
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	29-Apr-2016
DC Power Supply	Hewlett Packard	6269B	742	-	TU
Pre-Amplifier	Phase One	PS04-0086	1533	12	30-Jul-2016
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Filter	Daden Anthony Ass	MH-1500-7SS	2778	12	5-Feb-2016
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
9m RF Cable (N Type)	Rhophase	NPS-2303-9000- NPS	3791	-	TU
Multimeter	Fluke	177	3833	12	16-Jun-2016
Tilt Antenna Mast	maturo Gmbh	TAM 4.0-P	3916	-	TU
Mast Controller	maturo Gmbh	NCD	3917	-	TU
1GHz to 8GHz Low Noise Amplifier	Wright Technologies	APS04-0085	4365	12	6-Oct-2016
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	15-Apr-2016
Suspended Substrate Highpass Filter	Advance Power Components	11SH10- 3000/X18000-O/O	4411	12	24-Mar-2016
2m K-Type Cable (Rx)	Scott Cables	KPS-1501-2000- KPS	4527	-	TU
0.5m SMA Cable (Rx)	Scott Cables	SLSLL18-SMSM- 00.50M	4528	6	19-Feb-2016



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.3- Restricted Band Edges					
DC Power Supply	Hewlett Packard	6269B	742	-	TU
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec- 2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	11-Jun-2017
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
9m RF Cable (N Type)	Rhophase	NPS-2303-9000- NPS	3791	-	TU
Multimeter	Fluke	177	3833	12	16-Jun-2016
Tilt Antenna Mast	maturo Gmbh	TAM 4.0-P	3916	-	TU
Mast Controller	maturo Gmbh	NCD	3917	-	TU
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	15-Apr-2016
2m K-Type Cable (Rx)	Scott Cables	KPS-1501-2000- KPS	4527	-	TU
Section 2.4 - Authorised Band Edges					
DC Power Supply	Hewlett Packard	6269B	742	-	TU
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	11-Jun-2017
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
9m RF Cable (N Type)	Rhophase	NPS-2303-9000- NPS	3791	-	TU
Multimeter	Fluke	177	3833	12	16-Jun-2016
Tilt Antenna Mast	maturo Gmbh	TAM 4.0-P	3916	-	TU
Mast Controller	maturo Gmbh	NCD	3917	-	TU
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	15-Apr-2016
2m K-Type Cable (Rx)	Scott Cables	KPS-1501-2000- KPS	4527	-	TU

TU - Traceability Unscheduled



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU		
Peak EIRP	30 MHz to 1 GHz: ± 5.1 dB 1 GHz to 40 GHz: ± 6.3 dB		
Authorised Band Edges	Conducted: ± 3.08 dB Radiated: 30 MHz to 1 GHz: ± 5.1 dB Radiated: 1 GHz to 40 GHz: ± 6.3 dB		
Restricted Band Edges	30 MHz to 1 GHz: ± 5.1 dB 1 GHz to 40 GHz: ± 6.3 dB		
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.1 dB 1 GHz to 40 GHz: ± 6.3 dB		



SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2016 TÜV SÜD Product Service