

2J6702B

2.4/5.0 GHz ISM and Screw Mount

Key Features

2.4/5.0 GHz ISM

- 2410-2490 MHz
- 4920-5925 MHz

Screw Mount

Anti-Rotation Mechanism

Ground Plane Independent

Customizable Cable and Connector

Certificates: IP67, IP69K,
IK09 and IK10 version possible

Dimensions 77.3 × 36.5 mm



1. Antenna and electrical specifications

Parameters	2.4/5.0 GHz ISM Antenna	
Standards	WiFi, BT, ZigBee, ISM	
Band (MHz)	2.4 GHz	5.0 GHz
Frequency (MHz)	2410-2490	4920-5925
Return Loss (dB)	~12.4	~13.4
VSWR	~1.7:1	~1.6:1
Efficiency (%)	~40.6	~21.8
Peak Gain (dBi)	~1.9	~1.6
Average Gain (dB)	~-3.9	~-6.7
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	
Connector Type	RP-SMA-Male Standard (Other Connectors Available)	
Cable Length	300cm Standard (Any Cable Length Available)	
Cable Type	D302 Standard (Others Cables Available)	

Antenna Measurement Conditions:

Mounted on 30 x 30 cm Ground Plane



200 cm D302 Cable



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2J6702B
Mounting Type	Screw Mount
Dimensions (mm)	77.3 x 36.5
Max. Tighten Torque (Nm)	6 Nm
Radome	ASA
Radome color	Black
Antenna Base	Zamak
Gasket	TPE
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67, IP69K. IK09 and IK10 version possible with different material


3. Antenna parameters

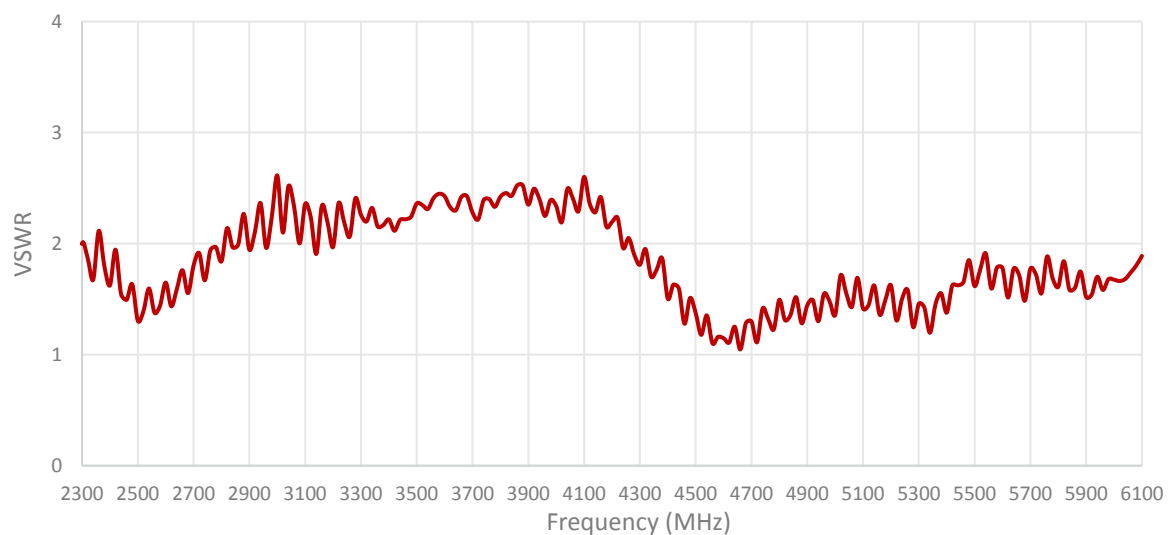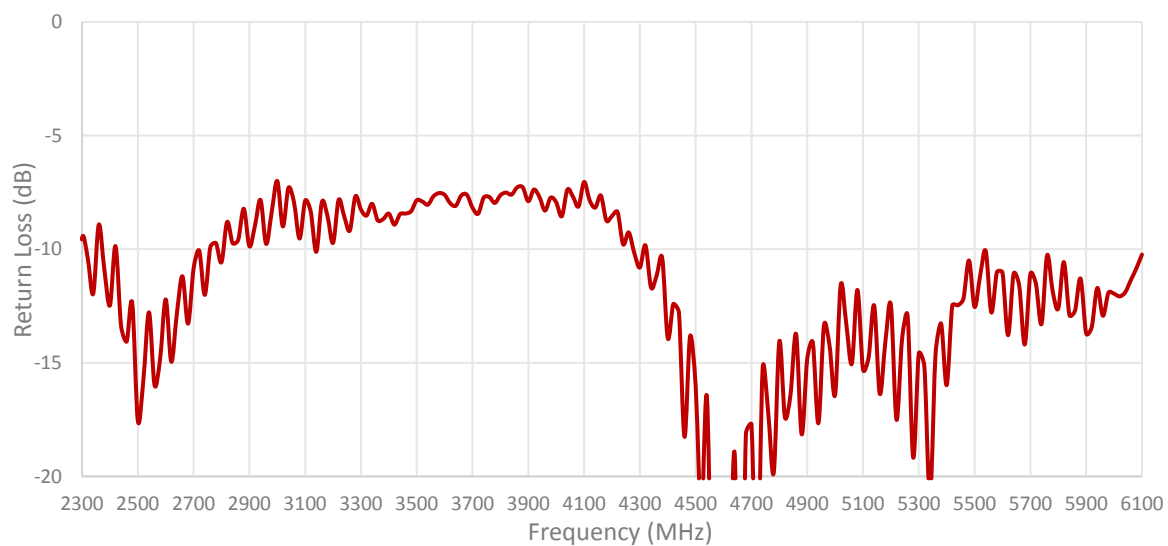

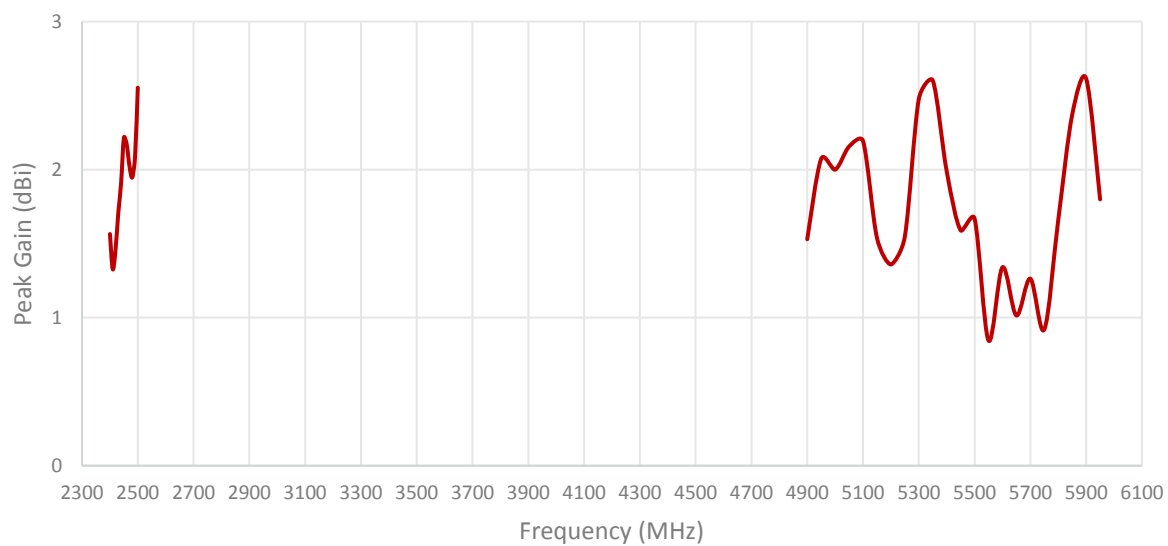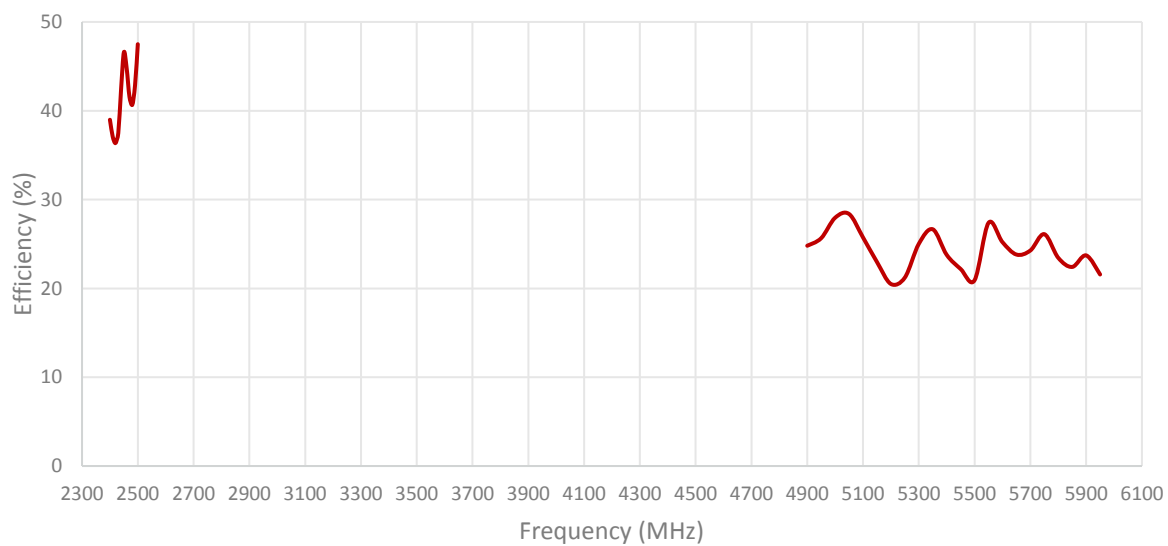



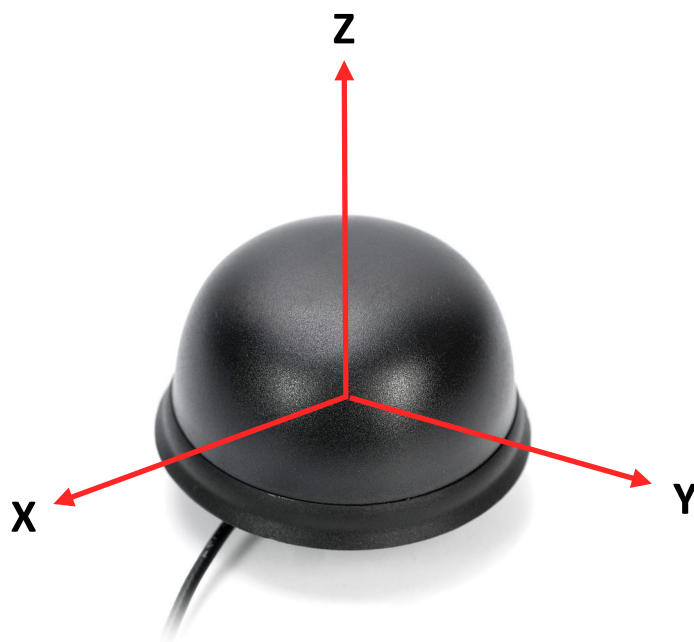
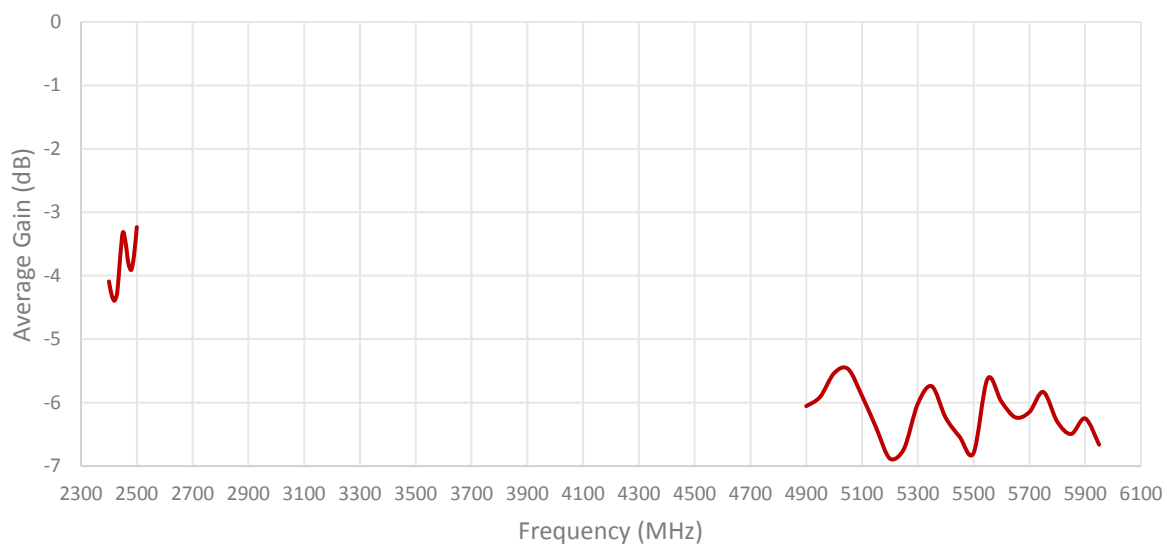


Radiation pattern reference

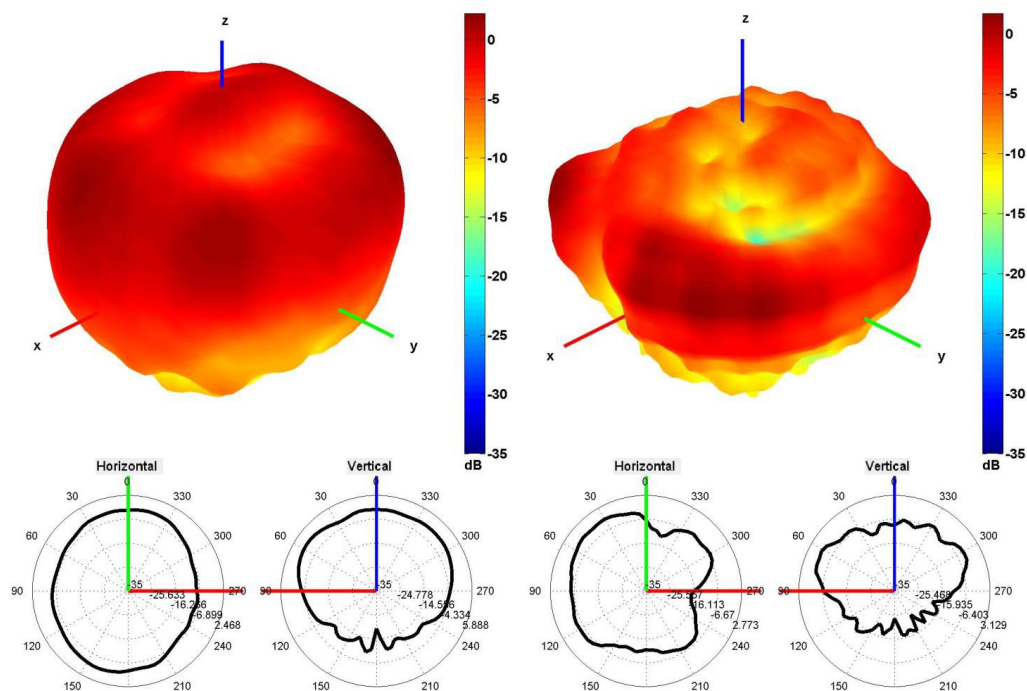

2450 and 5500 MHz Radiation pattern

4. Antenna drawings

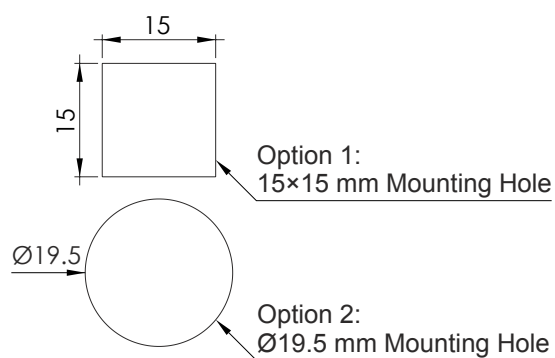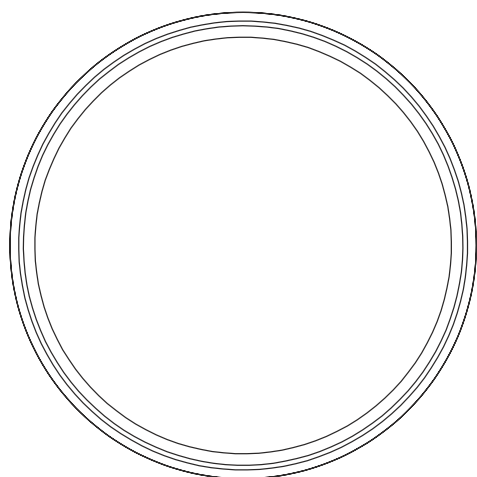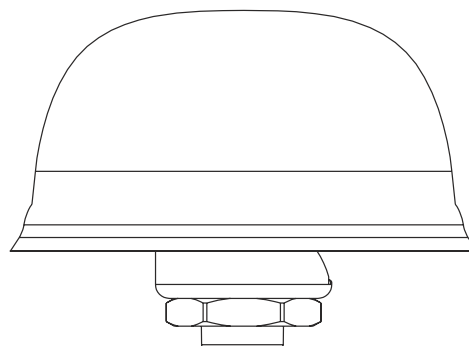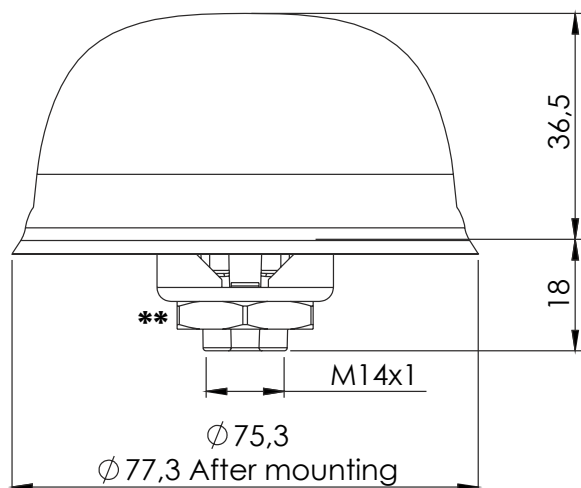

Note: Dimensions are in millimeters
***Dimensions are after mounting**
****Max. Torque= 6 Nm**

5. Antenna Images

