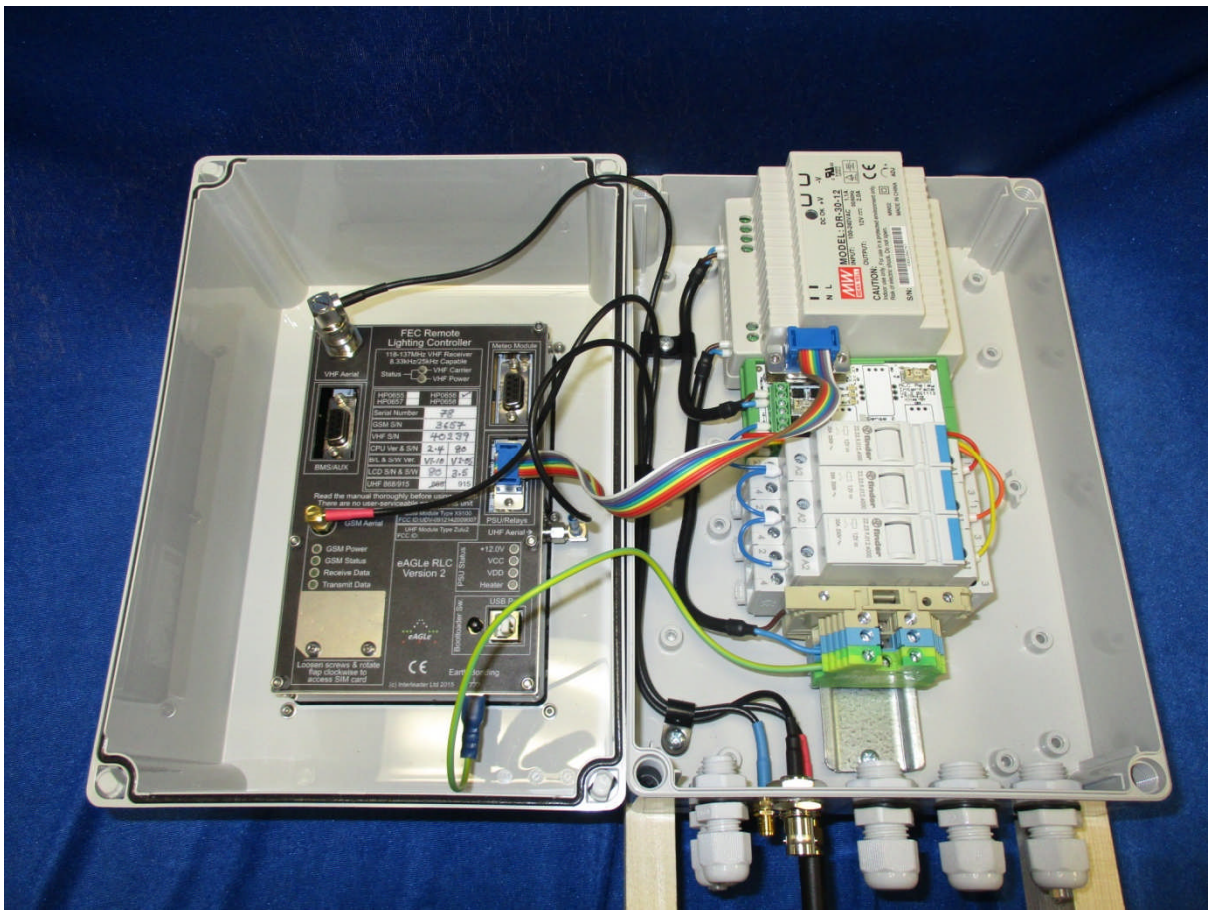

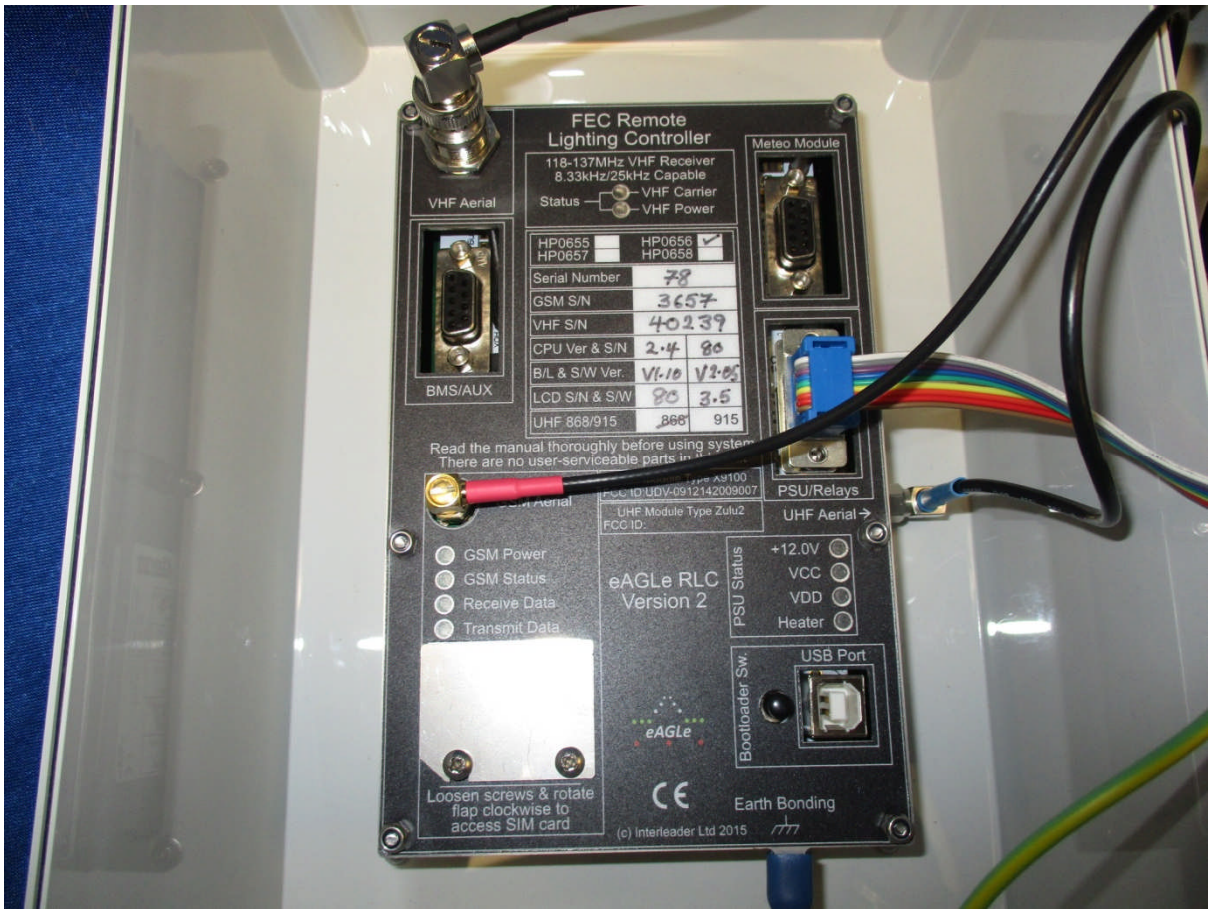
FEC Remote
Lighting Controller
118-137MHz VHF Receiver
8.33kHz/25kHz Capable
Status
VHF Carrier
VHF Power
Meteo Module
VHF Aerial
HP0655
HP0657
HP0656
HP0658
Serial Number 78
GSM S/N 3657
VHF S/N 40239
CPU Ver & S/N 2.4 80
B/L & S/W Ver. V1.10 V2.05
LCD S/N & S/W 80 3.5
UHF 868/915 868 915
BMS/AUX
Read the manual thoroughly before using system
There are no user-serviceable parts in
PSU/Relays
UHF Aerial
UHF Module Type Zulu2
FCC ID:
GSM Power
GSM Status
Receive Data
Transmit Data
eAGLe RLC
Version 2
PSU Status
+12.0V
VCC
VDD
Heater
USB Port
Bootloader Sw.
eAGLe
Loosen screws & rotate
flap clockwise to
access SIM card
CE
Earth Bonding
(c) Interleader Ltd 2015

FEC Remote
Lighting Controller
118-137MHz VHF Receiver
8.33kHz/25kHz Capable
Status
VHF Carrier
VHF Power
VHF Aerial
Meteo Module
HP0655
HP0656
HP0657
HP0658
Serial Number 77
GSM S/N SN3661
VHF S/N 40204
CPU Ver & S/N V2.4 79
B/L & S/W Ver. V1.10 V2.05
LCD S/N & S/W 78 V3.5
UHF 868/915 868 915
BMS/AUX
Read the manual thoroughly before using system
There are no user-serviceable parts in this unit
GSM Aerial
GSM Module Type X9100
FCC ID:UDV-0912142009007
UHF Module Type Zulu2
FCC ID:
PSU/Relays
UHF Aerial
GSM Power
GSM Status
Receive Data
Transmit Data
eAGLe RLC
Version 2
PSU Status
+12.0V
VCC
VDD
Heater
Bootloader Sw.
USB Port
eAGLe
Loosen screws & rotate
flap clockwise to
access SIM card
Earth Bonding
(c) Interleader Ltd 2015

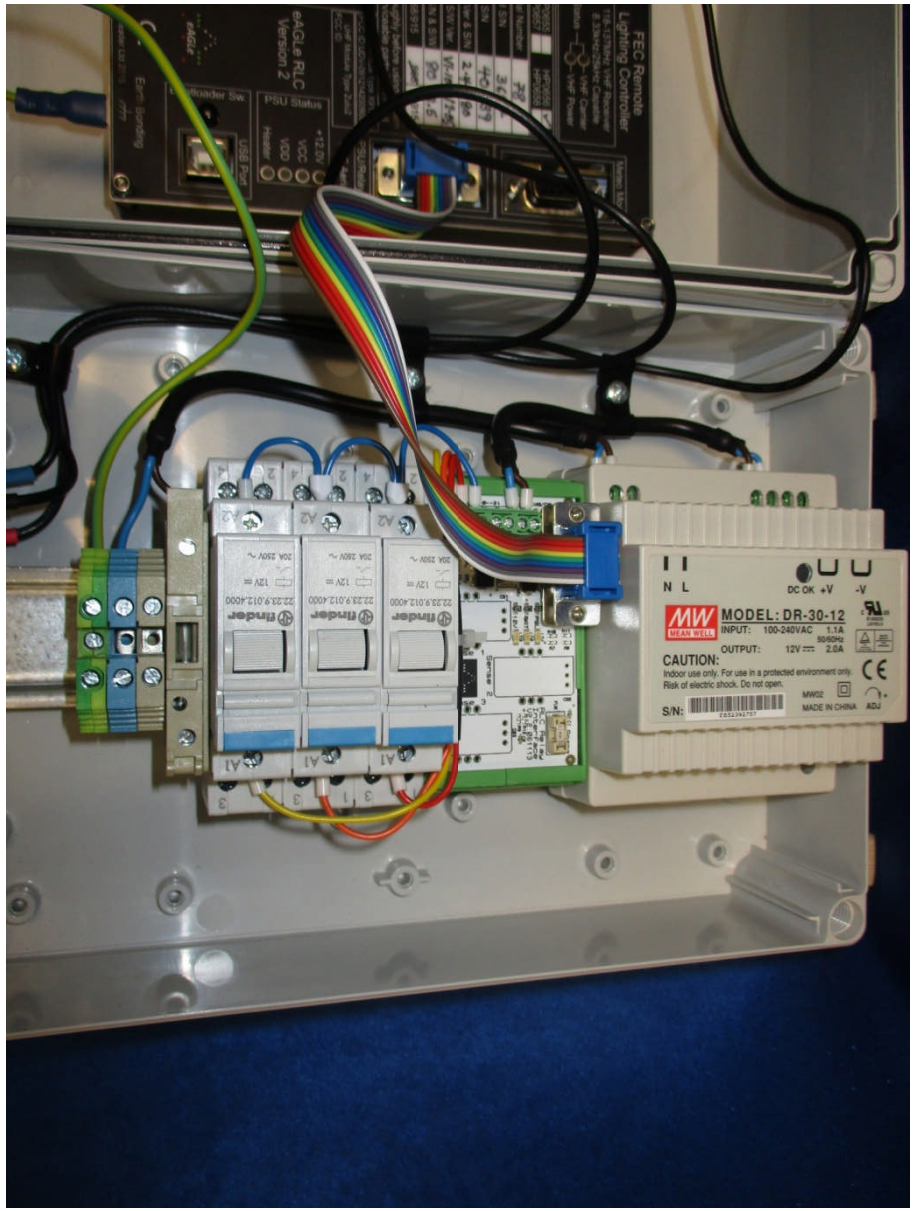
FEC Remote
Lighting Controller
eAGLe RLC
Version 2
Bootloader Sw.
PSU Status
Earth Bonding
MODEL: DR-30-12
INPUT: 100-240VAC 1.1A 50/60Hz
OUTPUT: 12V 2.0A
CAUTION:
Indoor use only. For use in a protected environment only.
Risk of electric shock. Do not open.
MADE IN CHINA
S/N:

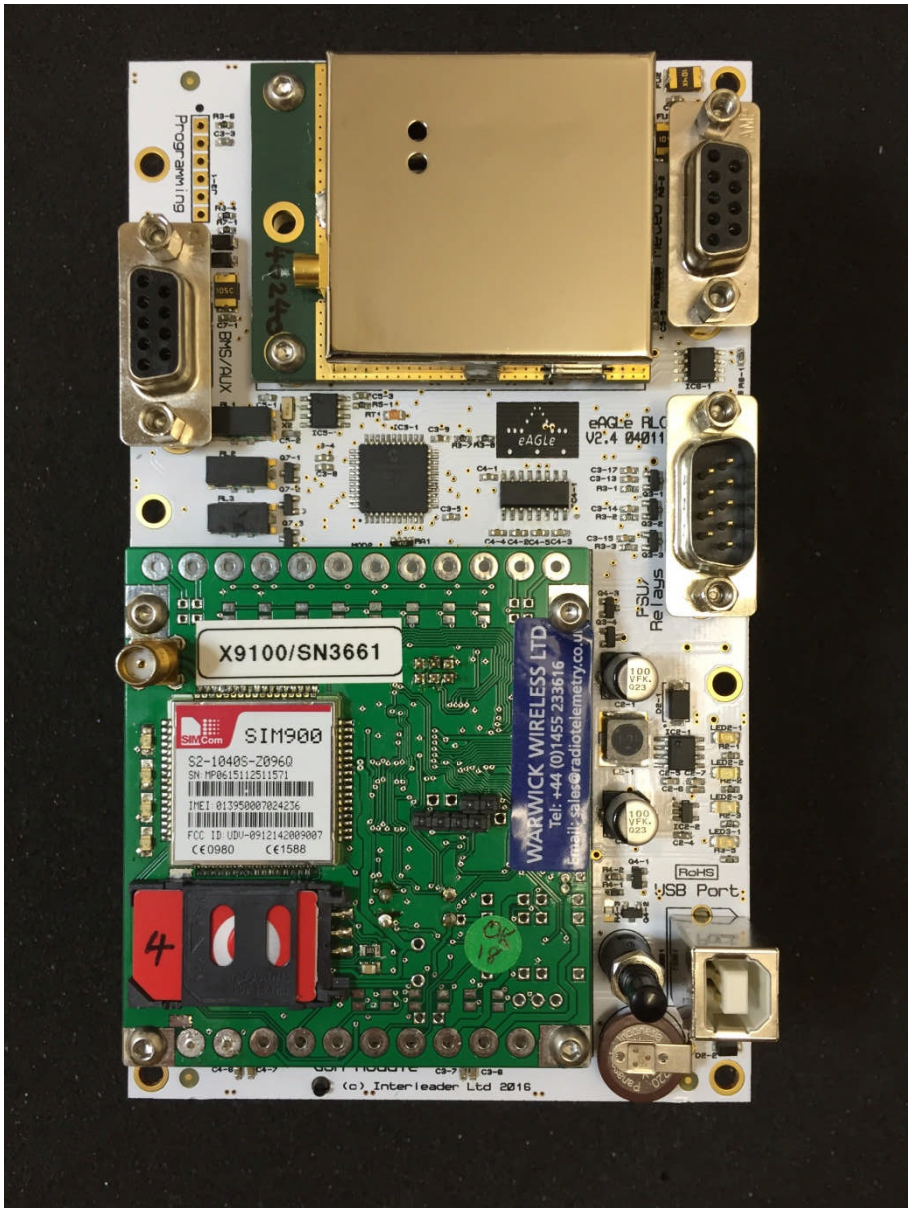
Programming
BMS/AUX
eAGLe RLC
V2.4 04011
X9100/SN3661
SIM900
S2-1040S-Z0960
IMEI: 013950007024236
FCC ID: UDV-0912142009007
WARWICK WIRELESS LTD
Tel: +44 (0)1455 233616
Email: sales@radiotelemetry.co.uk
PSU
Relays
RoHS
USB Port
(c) Interleader Ltd 2016

FEC Remote
Lighting Controller
118-137MHz VHF Receiver
8.33kHz/25kHz Capable
Status
VHF Carrier
VHF Power
Meteo Module
VHF Aerial
BMS/AUX
HP0655
HP0657
HP0656
HP0658
Serial Number
GSM S/N
VHF S/N
CPU Ver & S/N
B/L & S/W Ver.
LCD S/N & S/W
UHF 868/915
Read the manual thoroughly before using system
There are no user-serviceable parts in this unit
GSM Aerial
PSU/Relays
UHF Aerial
GSM Power
GSM Status
Receive Data
Transmit Data
eAGLe RLC
Version 2
PSU Status
+12.0V
VCC
VDD
Heater
Bootloader Sw
USB Port
Loosen screws & rotate flap clockwise to access SIM card
Earth Bonding
(c) Interleader Ltd 2015

MOD1
VHF Rx Module
Programming
BMS/AUX
Meteo
eAGLe RLC
V2.4 040111
PSU/
Relays
USB Port
RS-232
FEC Part No.
HP0656
GSM Module
(c) Interleader Ltd 2016

eAGLe CPU Programming
BMS Interface
Remote Lighting Controller
V2.4 040116
(c) Interleader Ltd 2016
FEC Part No.
HP0656
WARNING - HOT
DO NOT TOUCH
GSM Module RS-232
Auxilliary
LCD/Keypad
Bootloader switch
USB Port
Meteo Module
PSU/Relays

JHD629-204A
M12
SN:0078
SW:3.5
LCD, Keypad & UHF Interface
V3.2 240415
J2 - Storm Keypad
J4 - LCD Display
External Antenna
RoHS

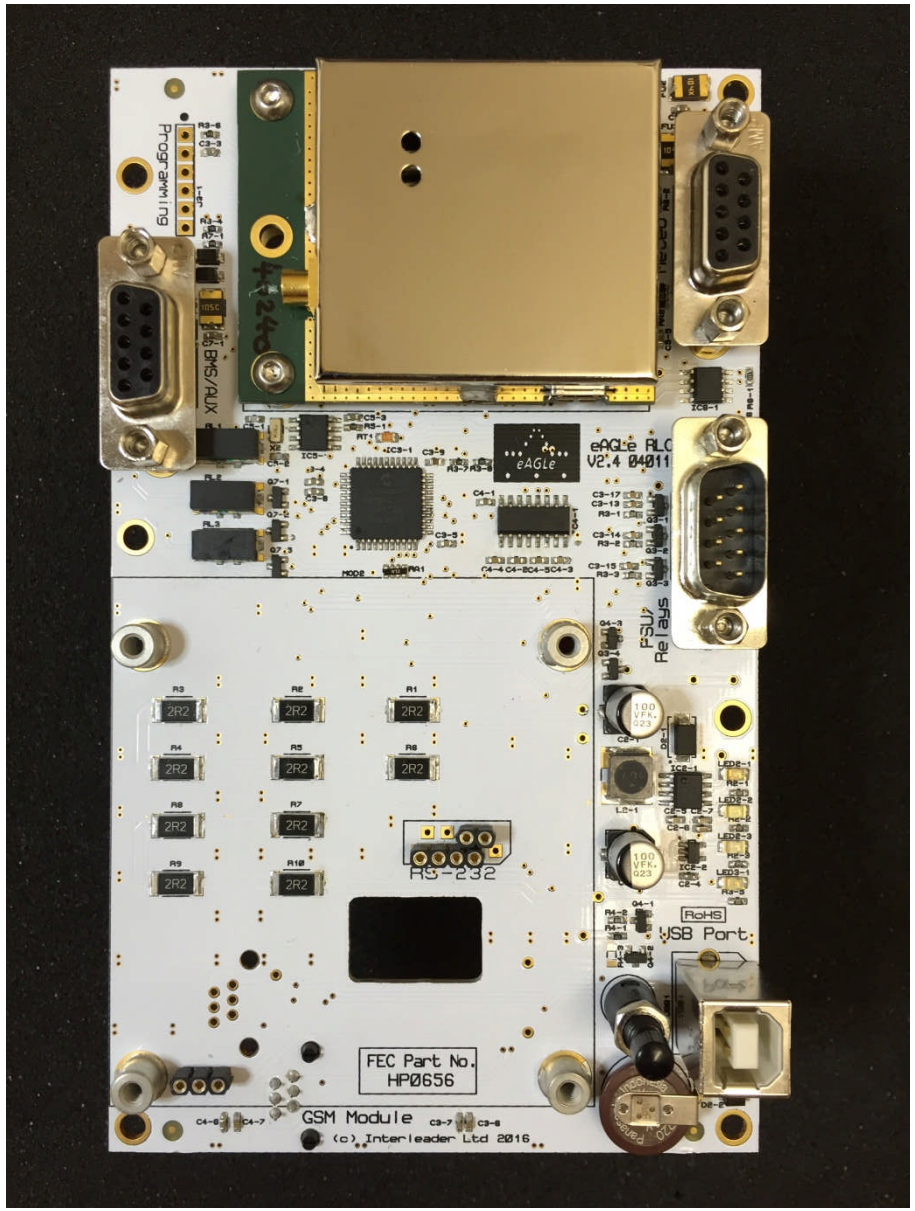
Programming
BMS/AUX
eAGLe
RS-232
USB Port
Relays
RoHS
FEC Part No.
HP0656
GSM Module
(c) Interleader Ltd 2016

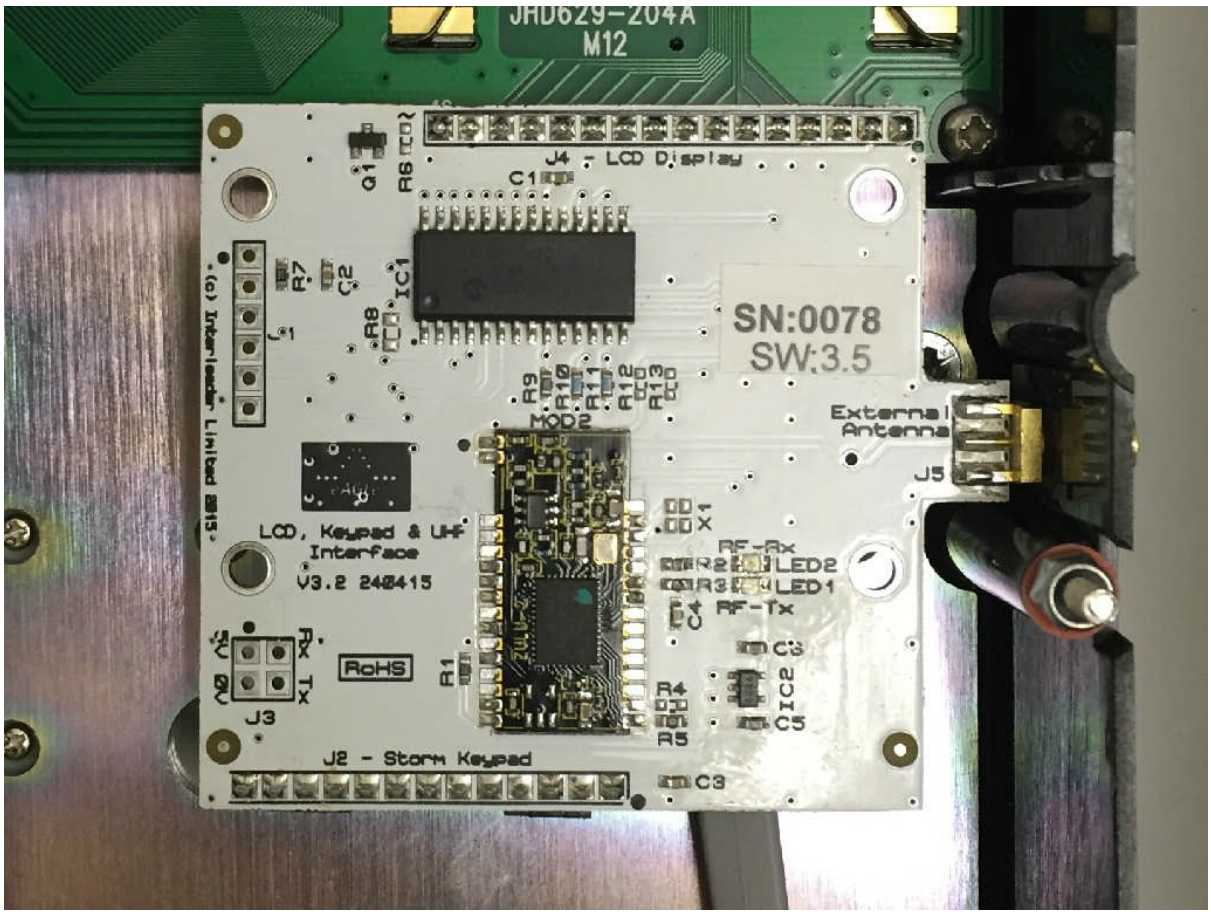
JHD629-204A
M12
J4 - LCD Display
SN:0078
SW:3.5
External Antenna
J5
LCD, Keypad & UHF Interface
V3.2 240415
RoHS
J3
J2 - Storm Keypad
RF-Rx
RF-Tx
LED2
LED1
MOD2
IC1
IC2
Q1
R6
C1
R7
C2
R8
R9
R10
R11
R12
R13
R1
R2
R3
R4
R5
C3
C4
C5
X1
J1
Rx
Tx
5V
GND
(c) Interleader Limited 2015