

## FCC TEST REPORT

For

Shenzhen Wingsland technology CO., LTD.

ViPRO H Handheld Gimbal

Model No.: VIPRO H

Prepared for : Shenzhen Wingsland technology CO., LTD.  
Address : 2F,10Building,ZhongYunTai technological&industrial park,Tangtou  
fist road,Bao' an district, Shenzhen, Guangdong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : [www.LCS-cert.com](http://www.LCS-cert.com)  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : February 26, 2016  
Number of tested samples : 1  
Serial number : S121155300010  
Date of Test : February 26, 2016 - March 08, 2016  
Date of Report : March 08, 2016

**FCC TEST REPORT**  
**FCC CFR 47 PART 15 C(15.247): 2015**

**Report Reference No.** ..... : LCS1602260596E

Date of Issue..... : March 08, 2016

**Testing Laboratory Name** ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure ..... : Full application of Harmonised standards   
Partial application of Harmonised standards   
Other standard testing method

**Applicant's Name** ..... : Shenzhen Wingsland technology CO., LTD.

Address..... : 2F,10Building,ZhongYunTai technological&industrial  
park,Tangtou fist road,Bao' an district, Shenzhen, Guangdong,  
China

**Test Specification**

Standard..... : FCC CFR 47 PART 15 C(15.247): 2015

**Test Report Form No.** ..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description** ..... : ViPRO H Handheld Gimbal

Trade Mark..... : WINGSLAND

Model/ Type reference ..... : VIPRO H

Ratings..... : DC 7.4V by Lithium ion polymer battery(850mAh)  
Recharge Voltage: DC 4.7V/1000mA

Result ..... : Positive

**Compiled by:**




Aking Jin/ File administrators

**Supervised by:**



Glin Lu / Technique principal

**Approved by:**

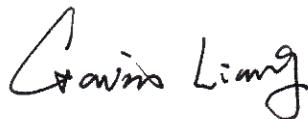

Gavin Liang/ Manager

# FCC -- TEST REPORT

**Test Report No. : LCS1602260596E**March 08, 2016

Date of issue

|                          |  |
|--------------------------|--|
| Type / Model.....        | : VIPRO H  |
| EUT.....                 | : ViPRO H Handheld Gimbal  |
| <b>Applicant.....</b>    | <b>: Shenzhen Wingsland technology CO., LTD.</b>   |
| Address.....             | : 2F,10Building,ZhongYunTai technological&industrial park,Tangtou fist road,Bao' an district, Shenzhen, Guangdong, China |
| Telephone.....           | : +86 755-23123450   |
| Fax.....                 | : +86 755-23123450   |
| <b>Manufacturer.....</b> | <b>: Shenzhen Wingsland technology CO., LTD.</b>   |
| Address.....             | : 2F,10Building,ZhongYunTai technological&industrial park,Tangtou fist road,Bao' an district, Shenzhen, Guangdong, China |
| Telephone.....           | : +86 755-23123450   |
| Fax.....                 | : +86 755-23123450   |
| <b>Factory.....</b>      | <b>: Shenzhen Wingsland technology CO., LTD.</b>   |
| Address.....             | : 2F,10Building,ZhongYunTai technological&industrial park,Tangtou fist road,Bao' an district, Shenzhen, Guangdong, China |
| Telephone.....           | : +86 755-23123450   |
| Fax.....                 | : +86 755-23123450   |

**Test Result****Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| Description.....   | Page      |
| <b>1. GENERAL INFORMATION .....</b>                        | <b>5</b>  |
| 1.1. DESCRIPTION OF DEVICE (EUT) .....                     | 5         |
| 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....      | 5         |
| 1.3. EXTERNAL I/O .....                                    | 6         |
| 1.4. DESCRIPTION OF TEST FACILITY .....                    | 6         |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....        | 7         |
| 1.6. MEASUREMENT UNCERTAINTY .....                         | 7         |
| 1.7. DESCRIPTION OF TEST MODES .....                       | 7         |
| <b>2. TEST METHODOLOGY .....</b>                           | <b>8</b>  |
| 2.1. EUT CONFIGURATION .....                               | 8         |
| 2.2. EUT EXERCISE .....                                    | 8         |
| 2.3. GENERAL TEST PROCEDURES .....                         | 8         |
| <b>3. SYSTEM TEST CONFIGURATION .....</b>                  | <b>9</b>  |
| 3.1. JUSTIFICATION .....                                   | 9         |
| 3.2. EUT EXERCISE SOFTWARE .....                           | 9         |
| 3.3. SPECIAL ACCESSORIES .....                             | 9         |
| 3.4. BLOCK DIAGRAM/SCHEMATICS .....                        | 9         |
| 3.5. EQUIPMENT MODIFICATIONS .....                         | 9         |
| 3.6. TEST SETUP .....                                      | 9         |
| <b>4. SUMMARY OF TEST RESULTS.....</b>                     | <b>10</b> |
| <b>5. SUMMARY OF TEST EQUIPMENT .....</b>                  | <b>11</b> |
| <b>6. TEST RESULT .....</b>                                | <b>12</b> |
| 6.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT .....      | 12        |
| 6.2. POWER SPECTRAL DENSITY MEASUREMENT .....              | 15        |
| 6.3. 6 dB SPECTRUM BANDWIDTH MEASUREMENT .....             | 18        |
| 6.4. RADIATED EMISSIONS MEASUREMENT .....                  | 21        |
| 6.5. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST..... | 31        |
| 6.6. POWER LINE CONDUCTED EMISSIONS .....                  | 35        |
| 6.7. ANTENNA REQUIREMENTS .....                            | 38        |

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : ViPRO H Handheld Gimbal

Hardware Version : MT\_YTS01\_V12

Software Version : MT\_YTS01-MAIN-V11

Model No. : VIPRO H

Frequency Range : 2.402-2.480GHz

Channel Number : 40 channels for Bluetooth V4.0 (DTS)

Channel frequency : 2402.00-2480.00MHz, (Channel Number: 40, Channel Frequency=2402+2(K-1), K=1, 2, 3 .....40)

Channel Spacing : 2MHz for Bluetooth V4.0 (DTS)

Modulation Type : GFSK,

Bluetooth Version : V4.0

Antenna Gain : PCB antenna, 2.21dBi (Max.)

Input Voltage : DC 7.4V by Lithium ion polymer battery(850mAh)  
Recharge Voltage: DC 4.7V/1000mA

### 1.2. Host System Configuration List and Details

| Manufacturer | Description      | Model      | Serial Number | Certificate |
|--------------|------------------|------------|---------------|-------------|
| Lenovo       | Notebook         | B470       | WB05067151    | DOC         |
| Lenovo       | AC/DC<br>ADAPTER | ADP-90DD B | 36001941      | DOC         |

### 1.3. External I/O

| I/O Port Description | Quantity | Cable |
|----------------------|----------|-------|
| USB Port             | 1        | N/A   |

### 1.4. Description of Test Facility

#### Site Description

|               |   |
|---------------|---|
| EMC Lab.      | : CNAS Registration Number. is L4595.<br>FCC Registration Number. is 899208.<br>Industry Canada Registration Number. is 9642A-1.<br>VCCI Registration Number. is C-4260 and R-3804.<br>ESMD Registration Number. is ARCB0108.<br>UL Registration Number. is 100571-492.<br>TUV SUD Registration Number. is SCN1081.<br>TUV RH Registration Number. is UA 50296516-001 |
| Name of Firm  | : Shenzhen LCS Compliance Testing Laboratory Ltd.   |
| Site Location | : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China   |

## 1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6. Measurement Uncertainty

| Test Item                | Frequency Range | Uncertainty | Note |
|--------------------------|-----------------|-------------|------|
| Radiation Uncertainty :  | 9KHz~30MHz      | 3.10dB      | (1)  |
|                          | 30MHz~200MHz    | 2.96dB      | (1)  |
|                          | 200MHz~1000MHz  | 3.10dB      | (1)  |
|                          | 1GHz~26.5GHz    | 3.80dB      | (1)  |
|                          | 26.5GHz~40GHz   | 3.90dB      | (1)  |
| Conduction Uncertainty : | 150kHz~30MHz    | 1.63dB      | (1)  |
| Power disturbance :      | 30MHz~300MHz    | 1.60dB      | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description Of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. The following operating modes were applied for the related test items.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position. During test, the EUT is set to transmit in 100% duty cycle. And its related average correction factor is 0.

All test modes were tested, only the result of the worst case was recorded in the report.

| Mode of Operations     | Frequency Range (MHz) | Data Rate (Mbps) |
|------------------------|-----------------------|------------------|
| GFSK                   | 2402                  | 1                |
|                        | 2440                  | 1                |
|                        | 2480                  | 1                |
| For Conducted Emission |                       |                  |
| Test Mode              | TX Mode               |                  |
| For Radiated Emission  |                       |                  |
| Test Mode              | TX Mode               |                  |

\*\*\*Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements of ANSI C63.10:2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, The EUT was placed on the top of the turntable 0.8 meter above ground below 1GHz and 1.5 meter above 1GHz test.. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements of ANSI C63.10-2013.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmit condition. The EUT was programmed to control Bluetooth to make it continuously transmit

#### 3.2. EUT Exercise Software

N/A

#### 3.3. Special Accessories

N/A

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C |   |           |
|---|---|-----------|
| FCC Rules                               | Description of Test                       | Result    |
| §15.247(b)                              | Maximum Conducted Output Power            | Compliant |
| §15.247(e)                              | Power Spectral Density                    | Compliant |
| §15.247(a)(2)                           | 6dB Bandwidth                             | Compliant |
| §15.247(a)                              | Occupied Bandwidth                        | Compliant |
| §15.209, §15.247(d)                     | Radiated and Conducted Spurious Emissions | Compliant |
| §15.205                                 | Emissions at Restricted Band              | Compliant |
| §15.207(a)                              | Line Conducted Emissions                  | Compliant |
| §15.203                                 | Antenna Requirements                      | Compliant |

## 5. SUMMARY OF TEST EQUIPMENT

| Instrument                    | Manufacturer   | Model No.                        | Serial No.  | Cal Date      | Due Date      |
|-------------------------------|----------------|----------------------------------|-------------|---------------|---------------|
| EMC Receiver                  | R&S            | ESCS 30                          | 100174      | June 18, 2015 | June 17, 2016 |
| Signal analyzer               | Agilent        | E4448A(External mixers to 40GHz) | US44300469  | July 16, 2015 | July 15, 2016 |
| LISN                          | MESS Tec       | NNB-2/16Z                        | 99079       | June 18, 2015 | June 17, 2016 |
| LISN (Support Unit)           | EMCO           | 3819/2NM                         | 9703-1839   | June 18, 2015 | June 17, 2016 |
| RF Cable-CON                  | UTIFLEX        | 3102-26886-4                     | CB049       | June 18, 2015 | June 17, 2016 |
| ISN                           | SCHAFFNER      | ISN ST08                         | 21653       | June 18, 2015 | June 17, 2016 |
| 3m Semi Anechoic Chamber      | SIDT FRANKONIA | SAC-3M                           | 03CH03-HY   | June 18, 2015 | June 17, 2016 |
| Amplifier                     | SCHAFFNER      | COA9231A                         | 18667       | June 18, 2015 | June 17, 2016 |
| Amplifier                     | Agilent        | 8449B                            | 3008A02120  | July 16, 2015 | July 15, 2016 |
| Amplifier                     | MITEQ          | AMF-6F-260400                    | 9121372     | July 16, 2015 | July 15, 2016 |
| Spectrum                      | Agilent        | E4407B                           | MY41440292  | July 16, 2015 | July 15, 2016 |
| Loop Antenna                  | R&S            | HFH2-Z2                          | 860004/001  | June 18, 2015 | June 17, 2016 |
| By-log Antenna                | SCHWARZBECK    | VULB9163                         | 9163-470    | June 10, 2015 | June 09, 2016 |
| Horn Antenna                  | EMCO           | 3115                             | 6741        | June 10, 2015 | June 09, 2016 |
| Horn Antenna                  | SCHWARZBECK    | BBHA9170                         | BBHA9170154 | June 10, 2015 | June 09, 2016 |
| RF Cable-R03m                 | Jye Bao        | RG142                            | CB021       | June 18, 2015 | June 17, 2016 |
| RF Cable-HIGH                 | SUHNER         | SUCOFLEX 106                     | 03CH03-HY   | June 18, 2015 | June 17, 2016 |
| Spectrum Meter                | R&S            | FSP 30                           | 100023      | July 16, 2015 | July 15, 2016 |
| Power Meter                   | R&S            | NRVS                             | 100444      | June 18, 2015 | June 17, 2016 |
| Power Sensor                  | R&S            | NRV-Z51                          | 100458      | June 18, 2015 | June 17, 2016 |
| Power Sensor                  | R&S            | NRV-Z32                          | 10057       | June 18, 2015 | June 17, 2016 |
| AC Power Source               | HPC            | HPA-500E                         | HPA-9100024 | June 18, 2015 | June 17, 2016 |
| DC power Soure                | GW             | GPC-6030D                        | C671845     | June 18, 2015 | June 17, 2016 |
| Temp. and Humidig             | Giant Force    | GTH-225-20-S                     | MAB0103-00  | June 18, 2015 | June 17, 2016 |
| RF CABLE-1m                   | JYE Bao        | RG142                            | CB034-1m    | June 18, 2015 | June 17, 2016 |
| RF CABLE-2m                   | JYE Bao        | RG142                            | CB)35-2m    | June 18, 2015 | June 17, 2016 |
| Vector signal Generator       | R&S            | SMU200A                          | 102098      | June 18, 2015 | June 17, 2016 |
| Signal Generator              | R&S            | SMR40                            | 10016       | July 16, 2015 | July 15, 2016 |
| Universal Radio Communication | R&S            | CMU200                           | 112012      | July 18, 2015 | July 17, 2016 |
| MXA Signal Analyzer           | Agilent        | N9020A                           | MY50510140  | July 18, 2015 | July 17, 2016 |
| temporary antenna connector   | LCS            | LCS-RF-2015041<br>3              | N/A         | N/A           | N/A           |

## 6. TEST RESULT

### 6.1. Maximum Conducted Output Power Measurement

#### 6.1.1. Standard Applicable

According to §15.247(b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.


#### 6.1.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

#### 6.1.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

#### 6.1.4. Test Setup Layout

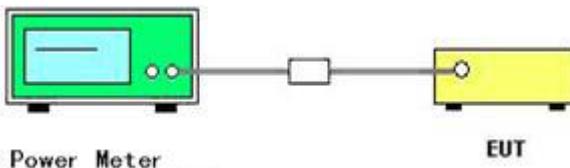

#### 6.1.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 6.1.6. Test Result of Maximum Conducted Output Power(Peak)


| Modulation | Frequency (MHz) | Output Power (dBm,Average) | Output Power (mW) | Limit (mW) | Result |
|------------|-----------------|----------------------------|-------------------|------------|--------|
| GFSK       | 2402            | -0.368                     | 0.92              | 1000       | Pass   |
|            | 2440            | 0.447                      | 1.11              | 1000       | Pass   |
|            | 2480            | -0.876                     | 0.82              | 1000       | Pass   |

100% Duty Cycle


Test Result of Low Channel:

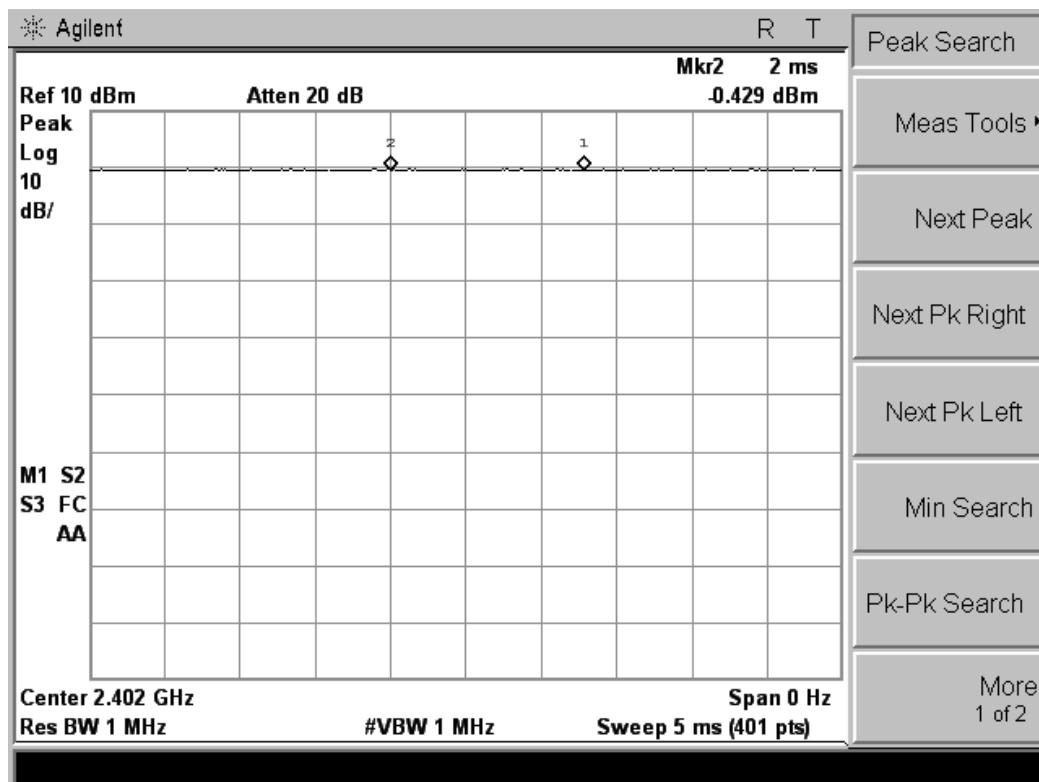

Test Result of Middle Channel:

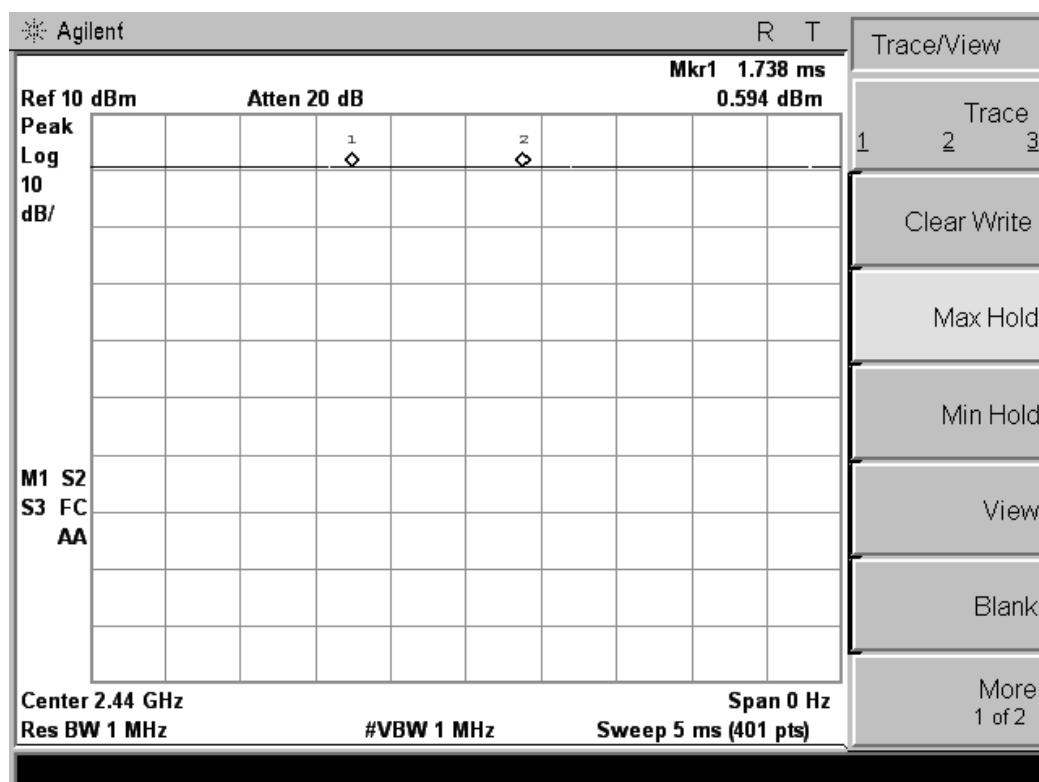

## Test Result of High Channel:

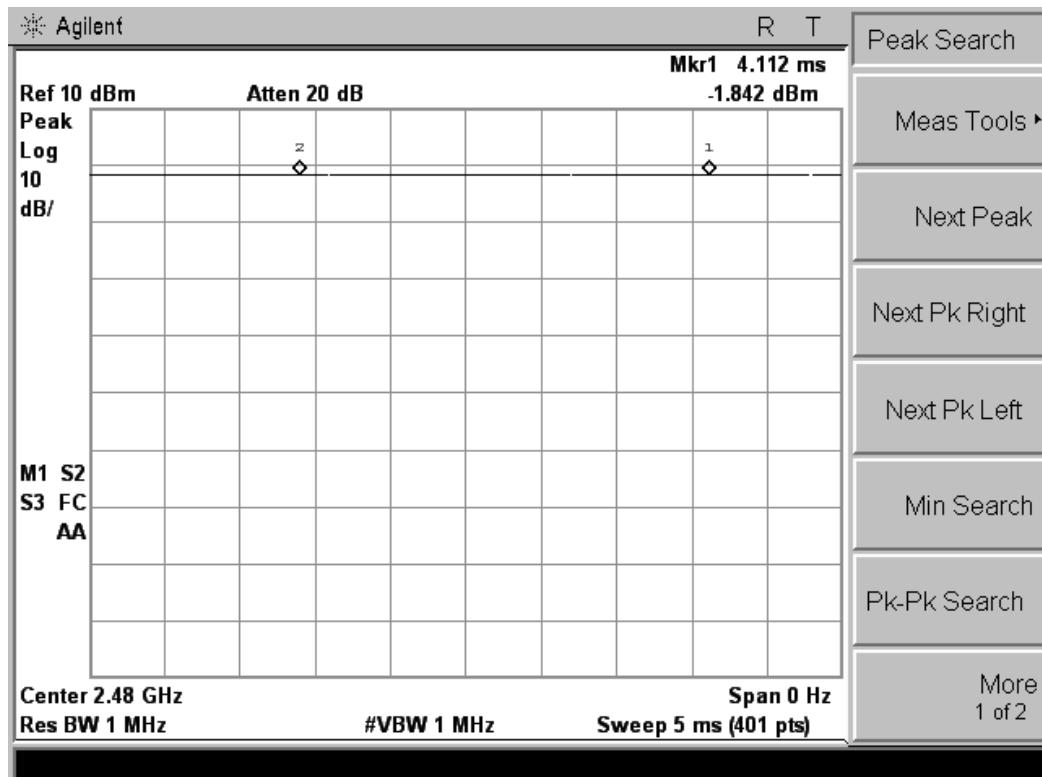

## 6.2. Power Spectral Density Measurement

### 6.2.1. Standard Applicable

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### 6.2.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

### 6.2.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 kHz.
4. Set the VBW  $\geq$  3\*RBW.
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

### 6.2.4. Test Setup Layout

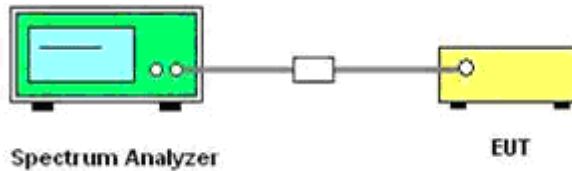

### 6.2.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 6.2.6. Test Result of Power Spectral Density


| Modulation | Frequency (MHz) | Reading Level (dBm/3KHz) | Max. Limit (dBm/3KHz) | Result |
|------------|-----------------|--------------------------|-----------------------|--------|
| GFSK       | 2402            | -15.51                   | 8                     | Pass   |
|            | 2440            | -14.25                   | 8                     | Pass   |
|            | 2480            | -17.16                   | 8                     | Pass   |

The test data refer to the following page.


Low Channel, 2402MHz

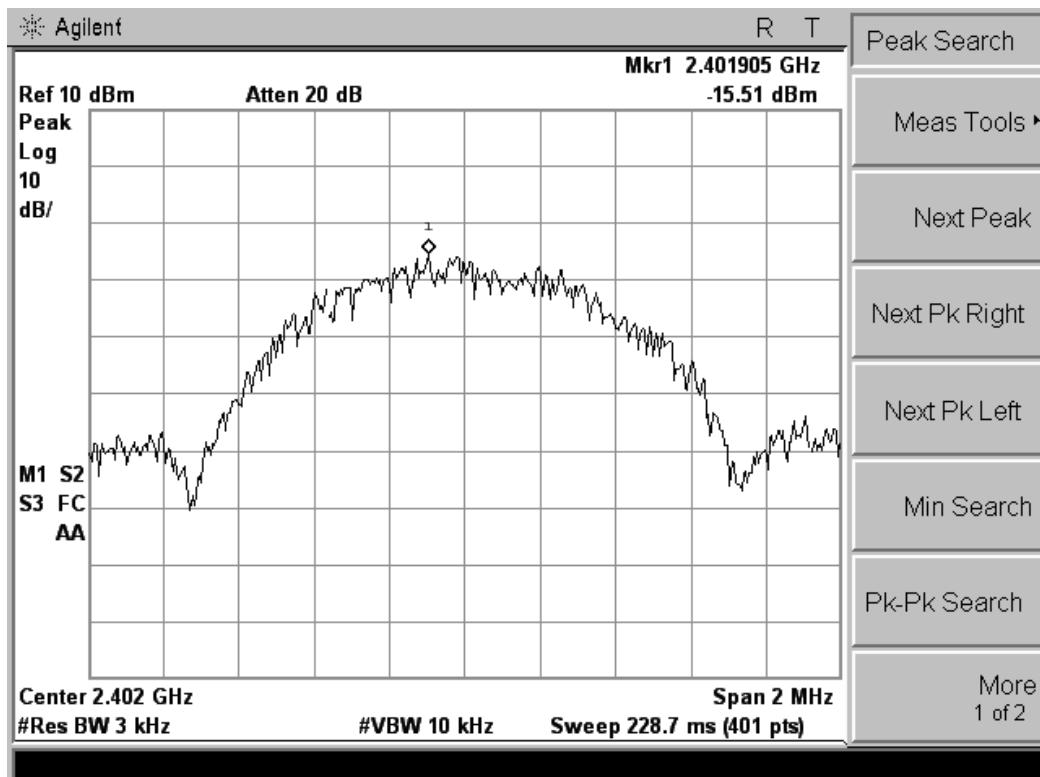

## Middle Channel, 2440MHz

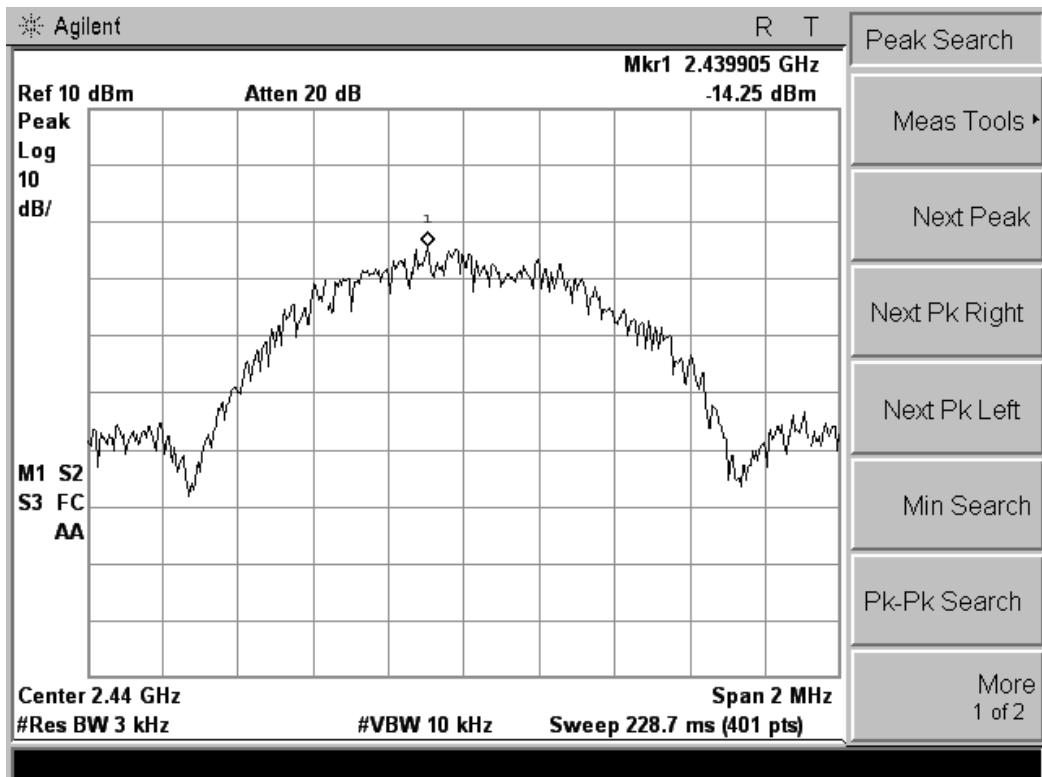

## High Channel, 2480MHz

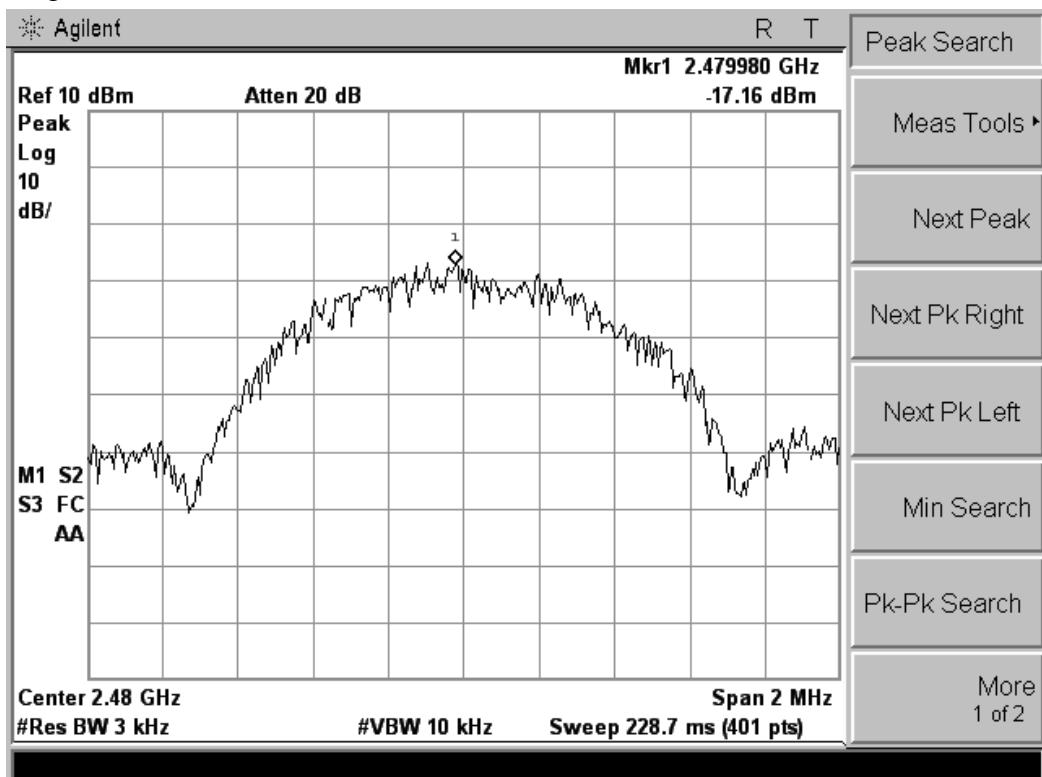

### 6.3. 6 dB Spectrum Bandwidth Measurement

#### 6.3.1. Standard Applicable

According to §15.247(a)(2) For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### 6.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameter | Setting  |
|--------------------|----------|
| Attenuation        | Auto     |
| Span Frequency     | > RBW    |
| Detector           | Peak     |
| Trace              | Max Hold |
| Sweep Time         | 100ms    |

#### 6.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to ANSI C63.10:2013 bandwidth measurement method .  
RBW=1%-5% OBW, VBW $\geq$ 3RBW
3. Measured the spectrum width with power higher than 6dB below carrier.

#### 6.3.4. Test Setup Layout

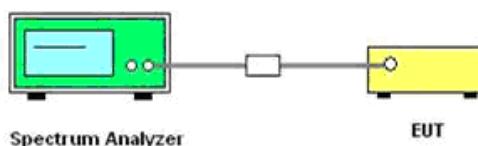

#### 6.3.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 6.3.6. Test Result of 6dB Spectrum Bandwidth


| Modulation | Frequency (MHz) | 6dB Bandwidth (KHz) | Min. Limit (KHz) | Result   |
|------------|-----------------|---------------------|------------------|----------|
| GFSK       | 2402            | 729.7               | 500              | Complies |
|            | 2440            | 740.6               | 500              | Complies |
|            | 2480            | 729.9               | 500              | Complies |

*The test data refer to the following page.*


## Low Channel, 2402MHz

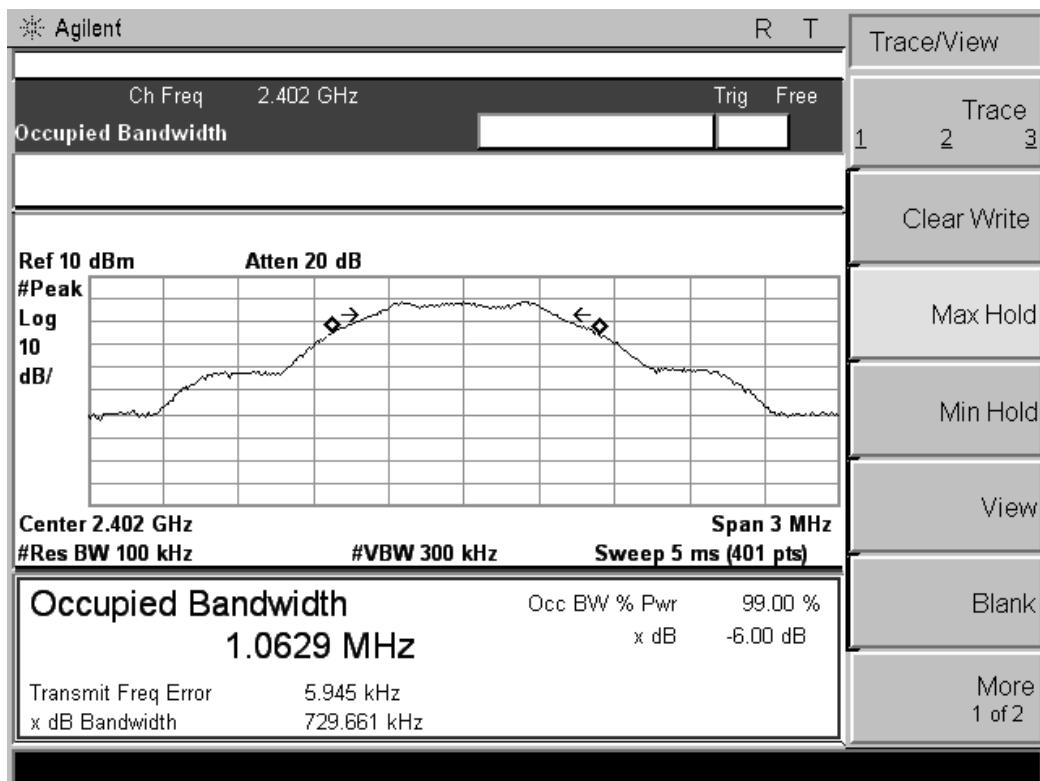

## Middle Channel, 2440MHz



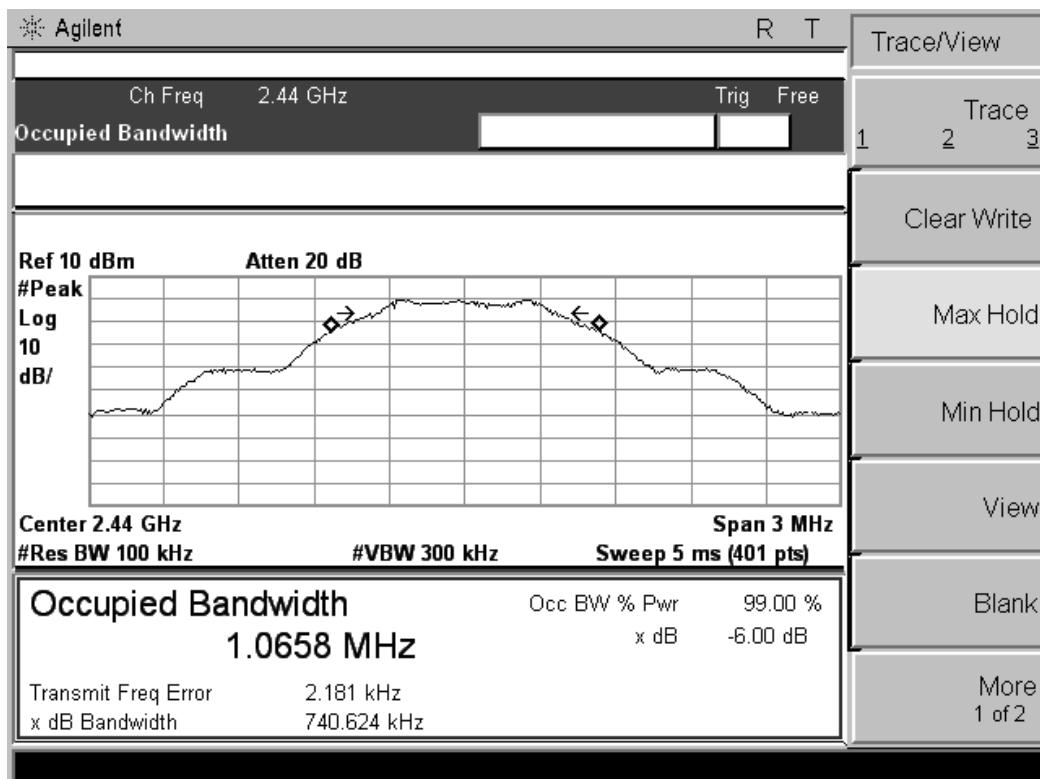


## High Channel, 2480MHz

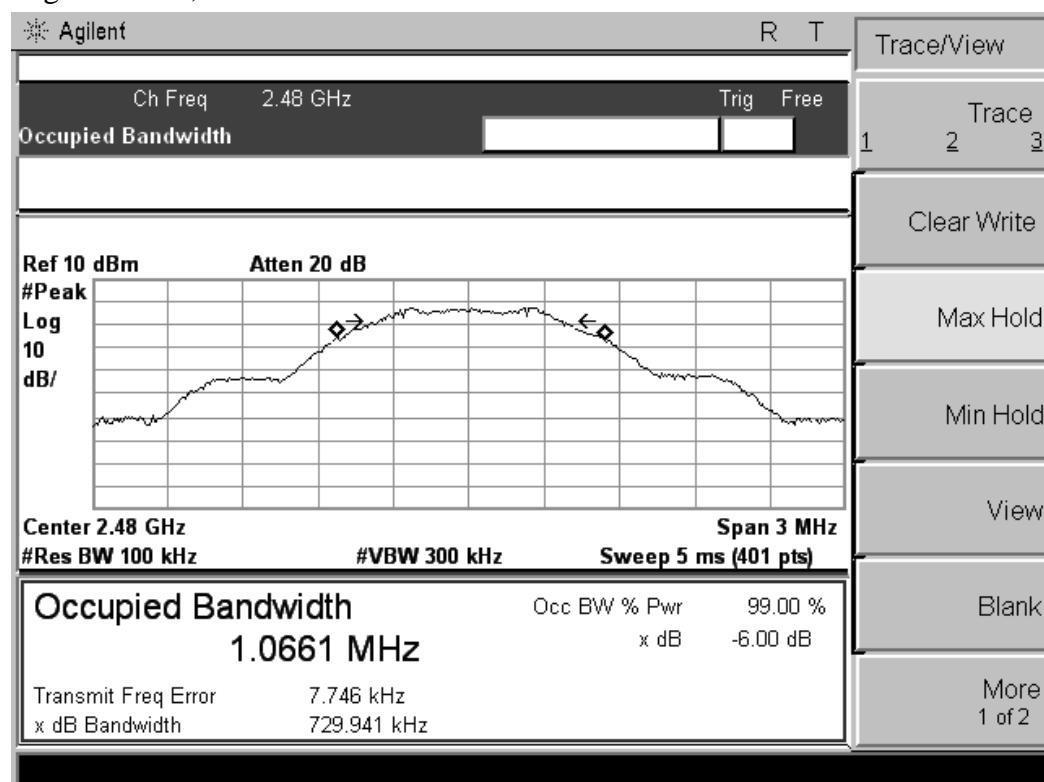

## 6.4. Radiated Emissions Measurement

### 6.4.1 Block Diagram of Test Setup

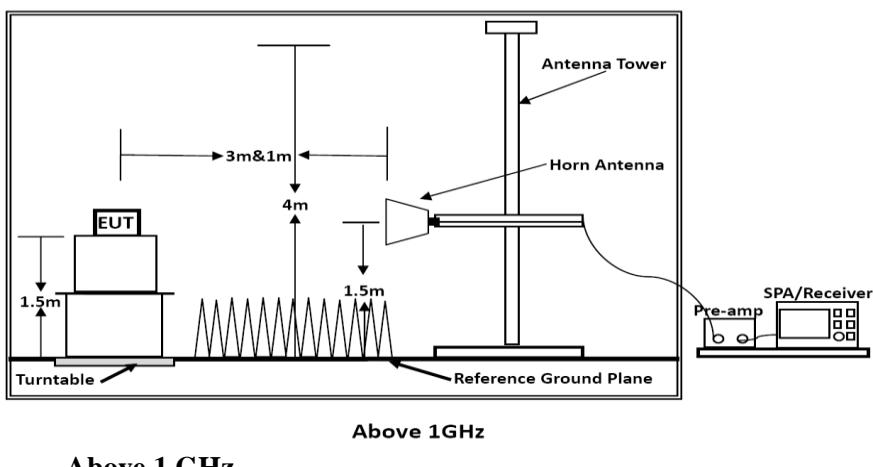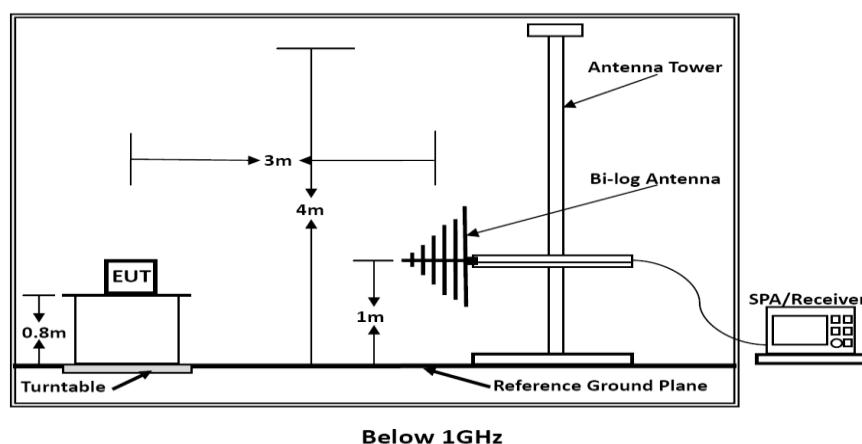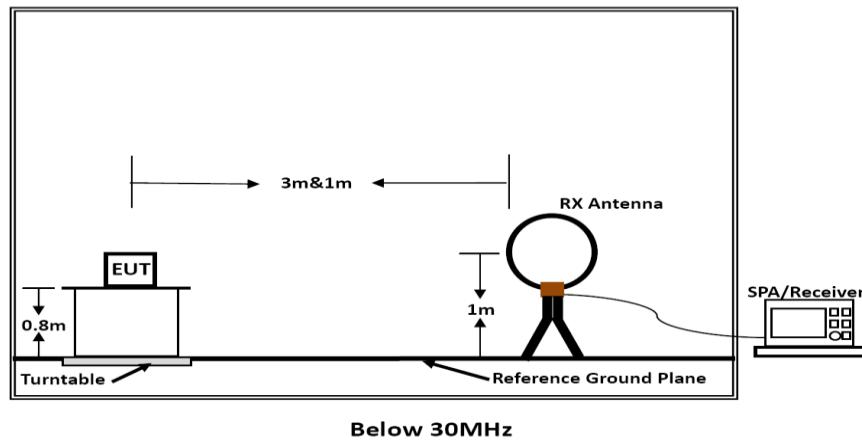

Above 1 GHz

## 6.4..2 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| \1\ 0.495-0.505   | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100**                             | 3                             |
| 88-216          | 150**                             | 3                             |
| 216-960         | 200**                             | 3                             |
| Above 960       | 500                               | 3                             |

#### 6.4.3 Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting  |
|---|--|
| Attenuation                               | Auto   |
| Start Frequency                           | 1000 MHz                                       |
| Stop Frequency                            | 10th carrier harmonic                          |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP |

#### 6.4.4 Test Procedures

##### 1) Sequence of testing 9 kHz to 30 MHz

###### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

###### **Premeasurement:**

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

###### **Final measurement:**

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### **Premeasurement:**

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### **Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45$  °) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

## 3) Sequence of testing 1 GHz to 18 GHz

## Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

## Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

## Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45$  °) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


##### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 6.4.5 Results for Radiated Emissions


PASS.

*Only record the worst test result in this report.  
The test data please refer to following page:*

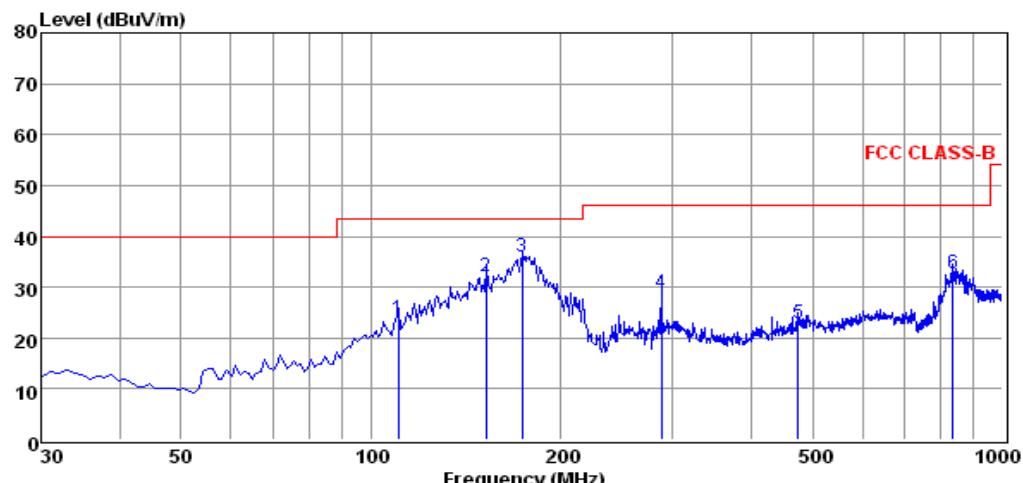

|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 110.51 | 11.17   | 0.61   | 12.16  | 23.94    | 43.50  | -19.56 | QP     |
| 2 | 152.22 | 22.91   | 0.73   | 8.35   | 31.99    | 43.50  | -11.51 | QP     |
| 3 | 173.56 | 25.88   | 0.91   | 9.22   | 36.01    | 43.50  | -7.49  | QP     |
| 4 | 288.02 | 15.00   | 1.05   | 12.83  | 28.88    | 46.00  | -17.12 | QP     |
| 5 | 475.23 | 5.76    | 1.33   | 15.96  | 23.05    | 46.00  | -22.95 | QP     |
| 6 | 836.07 | 10.41   | 1.81   | 20.43  | 32.65    | 46.00  | -13.35 | QP     |

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the offfficial limit are not reported

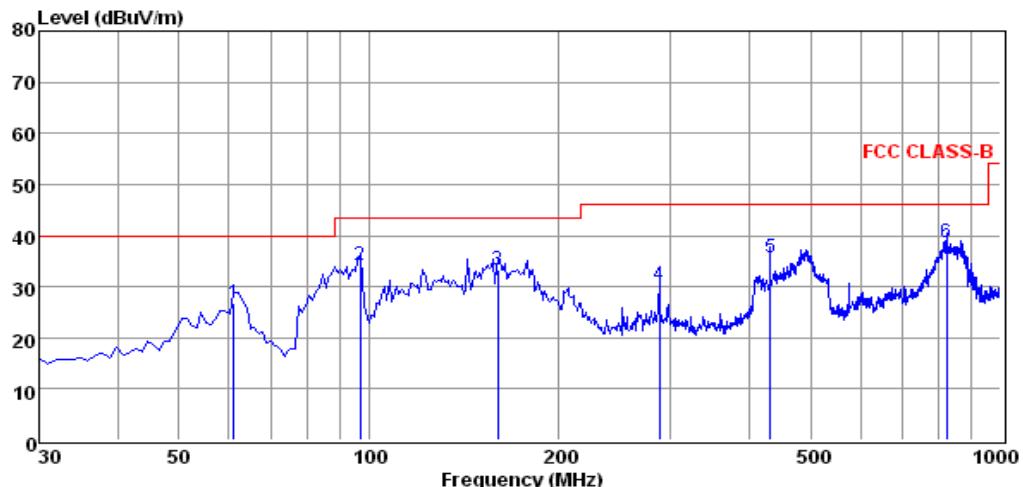

|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 61.04  | 14.04   | 0.49   | 12.28  | 26.81    | 40.00  | -13.19 | QP     |
| 2 | 96.93  | 20.64   | 0.61   | 12.96  | 34.21    | 43.50  | -9.29  | QP     |
| 3 | 159.98 | 24.02   | 0.75   | 8.67   | 33.44    | 43.50  | -10.06 | QP     |
| 4 | 288.02 | 16.55   | 1.05   | 12.83  | 30.43    | 46.00  | -15.57 | QP     |
| 5 | 431.58 | 18.84   | 1.28   | 15.52  | 35.64    | 46.00  | -10.36 | QP     |
| 6 | 821.52 | 16.47   | 1.83   | 20.28  | 38.58    | 46.00  | -7.42  | QP     |

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the offfficial limit are not reported

\*\*\*Note: Pre-scan all mode and recorded the worst case results in this report.

## 6.4.6. Results for Radiated Emissions (Above 1GHz)

Emissions that fall into restricted frequency bands was blow the emission limits in Section 15.209. Only list the worst Data results in this report.

## Channel 1

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.00   | 55.36              | 33.06          | 35.04        | 3.94         | 57.32           | 74           | -16.68    | Peak    | Horizontal |
| 4804.00   | 37.30              | 33.06          | 35.04        | 3.94         | 39.26           | 54           | -14.74    | Average | Horizontal |
| 4804.00   | 43.50              | 33.06          | 35.04        | 3.94         | 45.46           | 74           | -28.54    | Peak    | Vertical   |
| 4804.00   | 41.23              | 33.06          | 35.04        | 3.94         | 43.19           | 54           | -10.81    | Average | Vertical   |

## Channel 20

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4880.00   | 51.37              | 33.16          | 35.15        | 3.96         | 53.34           | 74           | -20.66    | Peak    | Horizontal |
| 4880.00   | 41.16              | 33.16          | 35.15        | 3.96         | 43.13           | 54           | -10.87    | Average | Horizontal |
| 4880.00   | 39.80              | 33.16          | 35.15        | 3.96         | 41.77           | 74           | -32.23    | Peak    | Vertical   |
| 4880.00   | 33.36              | 33.16          | 35.15        | 3.96         | 35.33           | 54           | -18.67    | Average | Vertical   |

## Channel 40

| Freq. MHz | Reading Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4960.00   | 52.33              | 33.26          | 35.14        | 3.98         | 54.43           | 74           | -19.57    | Peak    | Horizontal |
| 4960.00   | 27.98              | 33.26          | 35.14        | 3.98         | 30.08           | 54           | -23.92    | Average | Horizontal |
| 4960.00   | 49.35              | 33.26          | 35.14        | 3.98         | 51.45           | 74           | -22.55    | Peak    | Vertical   |
| 4960.00   | 38.31              | 33.26          | 35.14        | 3.98         | 40.41           | 54           | -13.59    | Average | Vertical   |

## Notes:

1. Measuring frequencies from 9k~10th harmonic (ex. 26GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 26GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 6.4.7. Results for Band edge Testing (Radiated)

Tx-2402

| Freq.<br>MHz | Reading<br>Level<br>dBuV | Ant.<br>Fac.<br>dB/m | Pre.<br>Fac.<br>dB | Cab.<br>Loss<br>dB | Measured<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark  | Pol.       |
|--------------|--------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2364.67      | 48.66                    | 32.89                | 35.16              | 3.51               | 49.90              | 74              | -24.10       | Peak    | Horizontal |
| 2364.50      | 35.41                    | 32.90                | 35.16              | 3.51               | 36.66              | 54              | -17.34       | Average | Horizontal |
| 2400.00      | 52.71                    | 32.92                | 35.16              | 3.54               | 54.01              | 74              | -19.99       | Peak    | Horizontal |
| 2400.00      | 37.55                    | 32.92                | 35.16              | 3.54               | 38.85              | 54              | -15.15       | Average | Horizontal |
| 2380.28      | 42.94                    | 32.89                | 35.16              | 3.51               | 44.18              | 74              | -29.82       | Peak    | Vertical   |
| 2381.86      | 39.42                    | 32.90                | 35.16              | 3.51               | 40.67              | 54              | -13.33       | Average | Vertical   |
| 2400.00      | 48.41                    | 32.92                | 35.16              | 3.54               | 49.71              | 74              | -24.29       | Peak    | Vertical   |
| 2400.00      | 41.70                    | 32.92                | 35.16              | 3.54               | 43.00              | 54              | -11.00       | Average | Vertical   |

Tx-2480

| Freq.<br>MHz | Reading<br>Level<br>dBuV | Ant.<br>Fac.<br>dB/m | Pre.<br>Fac.<br>dB | Cab.<br>Loss<br>dB | Measured<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark  | Pol.       |
|--------------|--------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2483.50      | 48.62                    | 33.06                | 35.18              | 3.60               | 50.10              | 74              | -23.90       | Peak    | Horizontal |
| 2483.50      | 35.09                    | 33.08                | 35.18              | 3.60               | 36.59              | 54              | -17.41       | Average | Horizontal |
| 2490.45      | 43.95                    | 33.08                | 35.18              | 3.62               | 45.47              | 74              | -28.53       | Peak    | Horizontal |
| 2490.54      | 35.71                    | 33.08                | 35.18              | 3.62               | 37.23              | 54              | -16.77       | Average | Horizontal |
| 2483.50      | 49.91                    | 33.06                | 35.18              | 3.60               | 51.39              | 74              | -22.61       | Peak    | Vertical   |
| 2483.50      | 31.14                    | 33.08                | 35.18              | 3.60               | 32.64              | 54              | -21.36       | Average | Vertical   |
| 2497.66      | 46.93                    | 33.08                | 35.18              | 3.62               | 48.45              | 74              | -25.55       | Peak    | Vertical   |
| 2497.71      | 38.55                    | 33.08                | 35.18              | 3.62               | 40.07              | 54              | -13.93       | Average | Vertical   |

## 6.5. Conducted Spurious Emissions And Band Edges Test

### 6.5.1. Standard Applicable

According to §15.247 (d) & A8.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 6.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                        | Setting       |
|---|---------------|
| Detector                                  | Peak          |
| Attenuation                               | Auto          |
| RB / VB (Emission in restricted band)     | 100KHz/300KHz |
| RB / VB (Emission in non-restricted band) | 100KHz/300KHz |

### 6.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### 6.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.


### 6.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


### 6.5.6. Test Results of Conducted Spurious Emissions

Emissions that fall into restricted frequency bands was blow the emission limits in Section 15.209.


## Test Result of Low Channel:

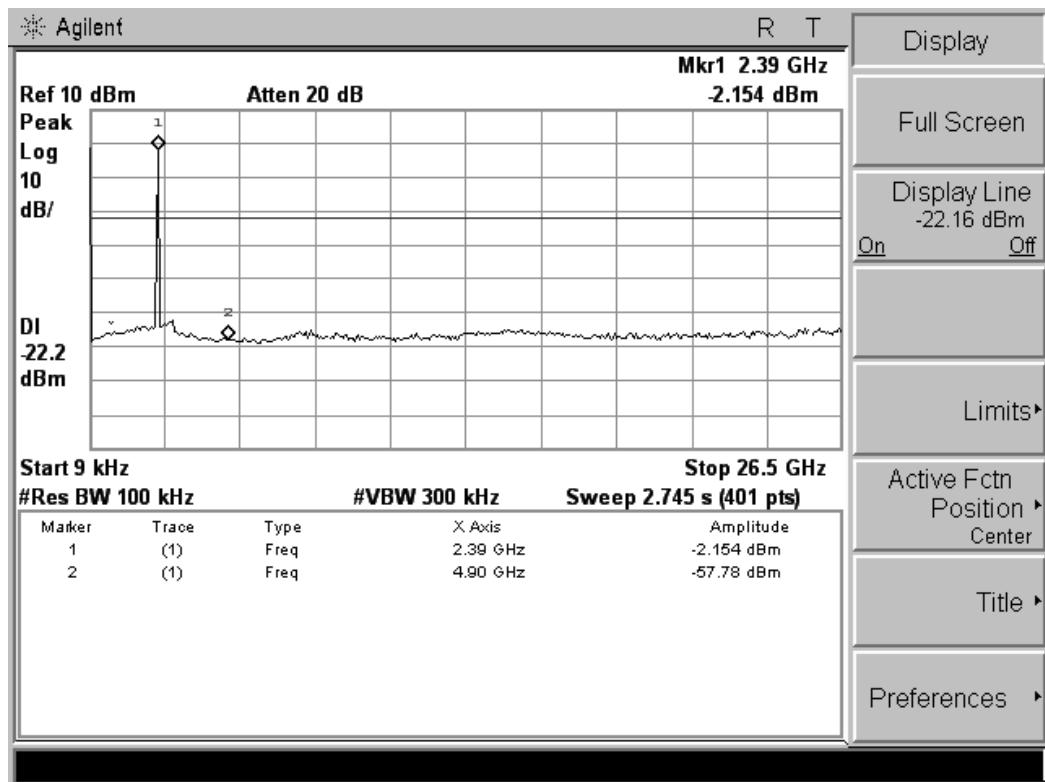



## Test Result of Middle Channel:

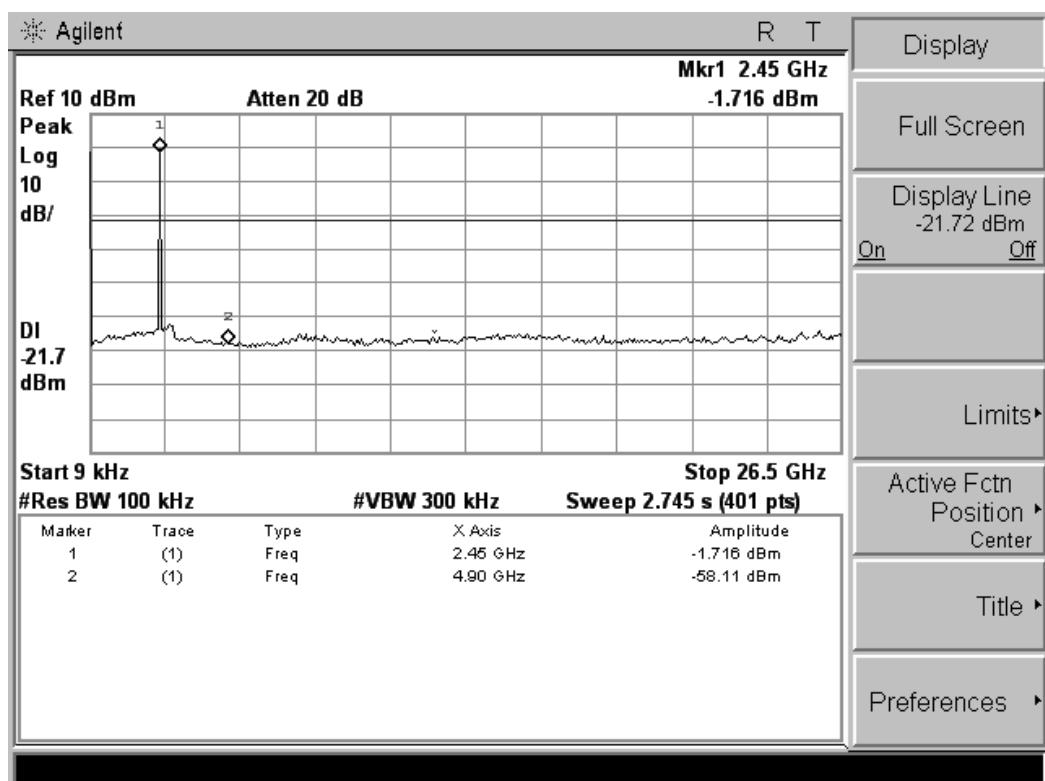

## Test Result of High Channel:

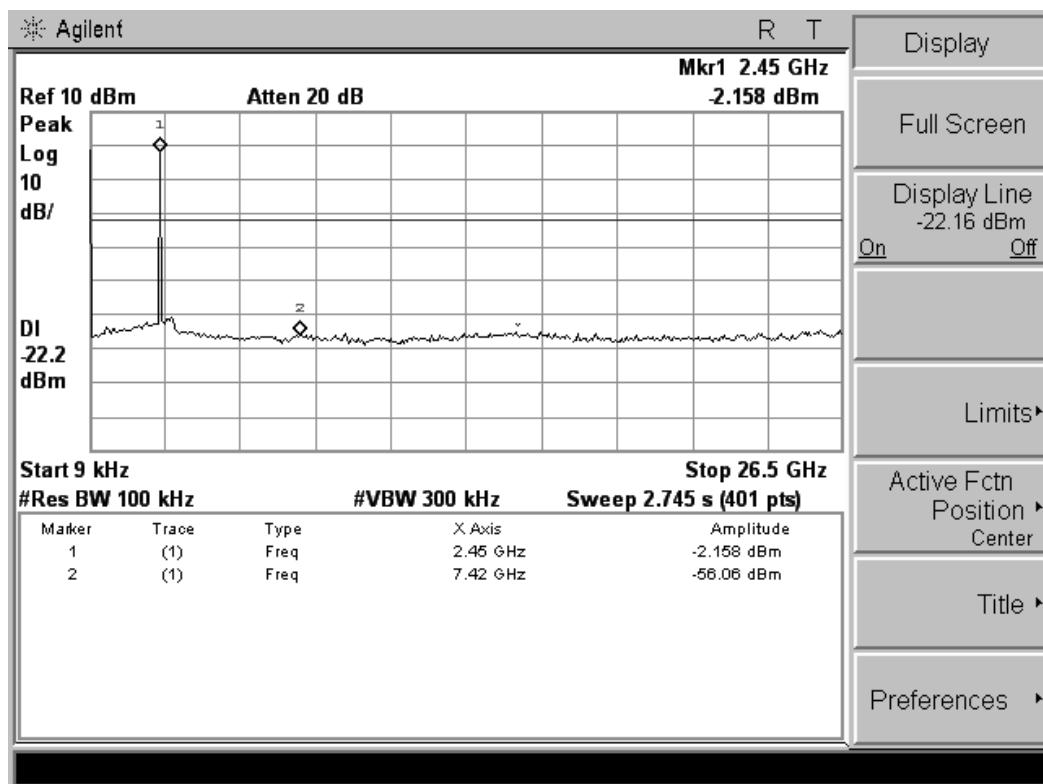

## 6.5.7. Test Results of Band Edges Test

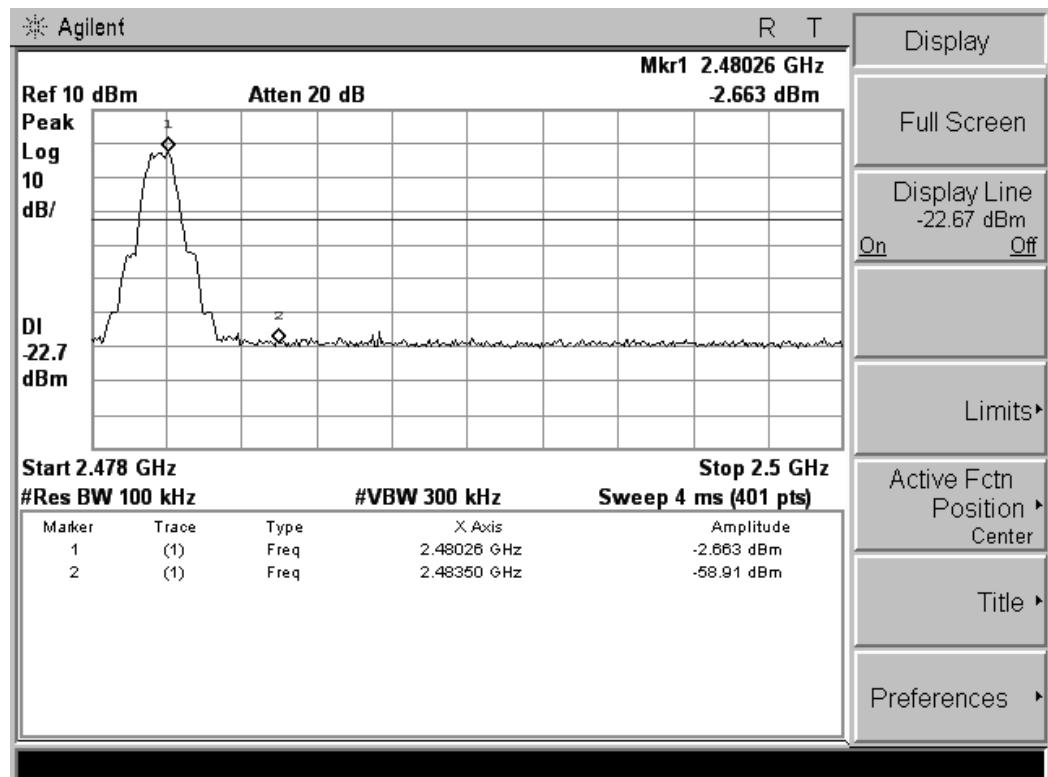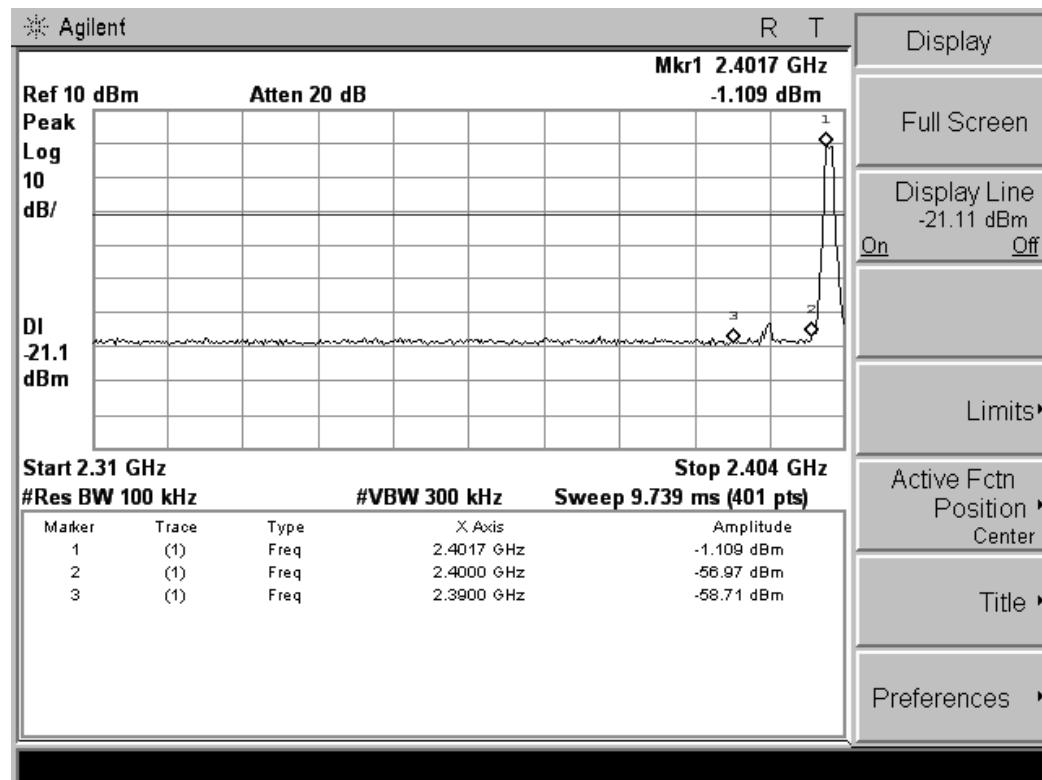


## 6.6. Power line conducted emissions

### 6.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB $\mu$ V) |          |
|-----------------------|---------------------|----------|
|                       | Quasi-peak          | Average  |
| 0.15 to 0.50          | 66 to 56            | 56 to 46 |
| 0.50 to 5             | 56                  | 46       |
| 5 to 30               | 60                  | 50       |

### 6.6.2 Block Diagram of Test Setup

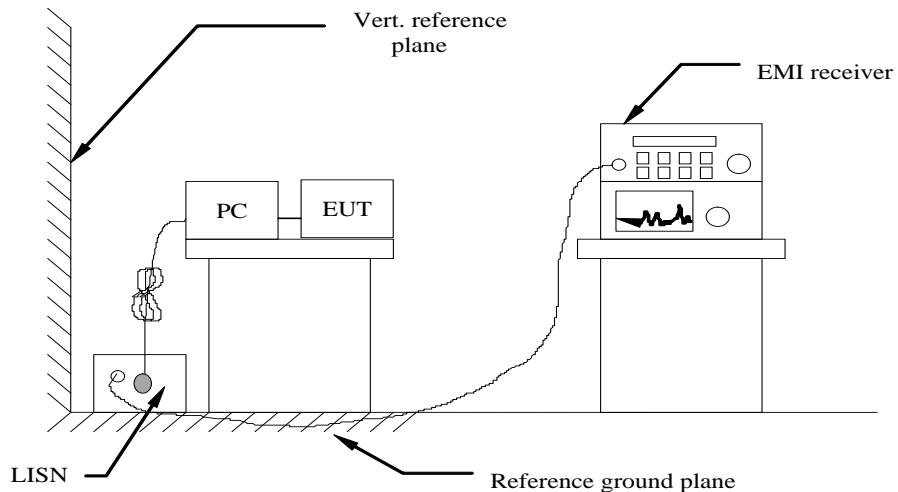


### 6.6.3 Test Results

PASS.

The test data please refer to following page.


## Test Result For Line Power Input AC 240V/60Hz

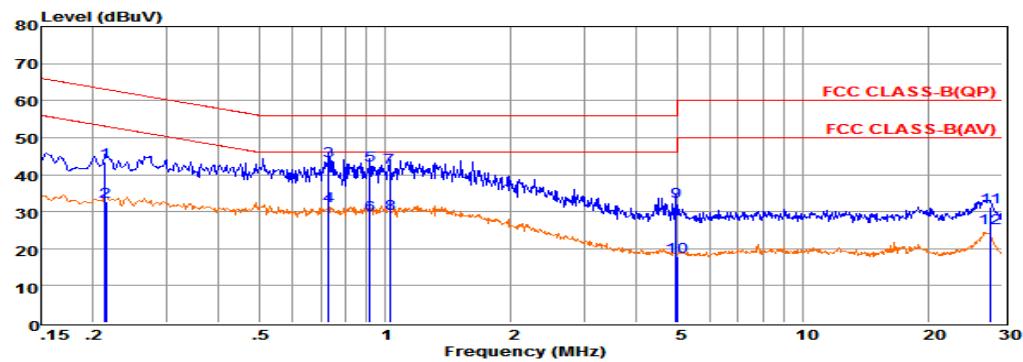

Env. Ins: 24\*/56%  
 EUT: ViPRO H Handheld Gimbal  
 M/N: ViPRO H  
 Power Rating: AC 240V/60Hz  
 Test Mode: TX-2402  
 Operator: Aking  
 Memo:  
 Pol: LINE

| Freq       | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over   | Remark  |
|------------|---------|---------|--------|-----------|----------|-------|--------|---------|
| MHz        | dBuV    | dB      | dB     | dB        | dBuV     | dBuV  | dB     |         |
| 1.0.21392  | 23.80   | 9.63    | 0.03   | 10.00     | 43.46    | 63.05 | -19.59 | QP      |
| 2.0.21402  | 12.91   | 9.63    | 0.03   | 10.00     | 32.57    | 53.05 | -20.48 | Average |
| 3.0.73131  | 24.16   | 9.64    | 0.04   | 10.00     | 43.84    | 56.00 | -12.16 | QP      |
| 4.0.73141  | 11.97   | 9.64    | 0.04   | 10.00     | 31.65    | 46.00 | -14.35 | Average |
| 5.0.91842  | 22.72   | 9.63    | 0.05   | 10.00     | 42.40    | 56.00 | -13.60 | QP      |
| 6.0.91852  | 9.34    | 9.63    | 0.05   | 10.00     | 29.02    | 46.00 | -16.98 | Average |
| 7.1.02652  | 22.19   | 9.63    | 0.05   | 10.00     | 41.87    | 56.00 | -14.13 | QP      |
| 8.1.02752  | 9.64    | 9.63    | 0.05   | 10.00     | 29.32    | 46.00 | -16.68 | Average |
| 9.4.97820  | 12.96   | 9.65    | 0.06   | 10.00     | 32.67    | 56.00 | -23.33 | QP      |
| 10.4.97920 | -1.82   | 9.65    | 0.06   | 10.00     | 17.89    | 46.00 | -28.11 | Average |
| 1128.15198 | 11.26   | 9.71    | 0.14   | 10.00     | 31.11    | 60.00 | -28.89 | QP      |
| 1228.15298 | 5.58    | 9.71    | 0.14   | 10.00     | 25.43    | 50.00 | -24.57 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

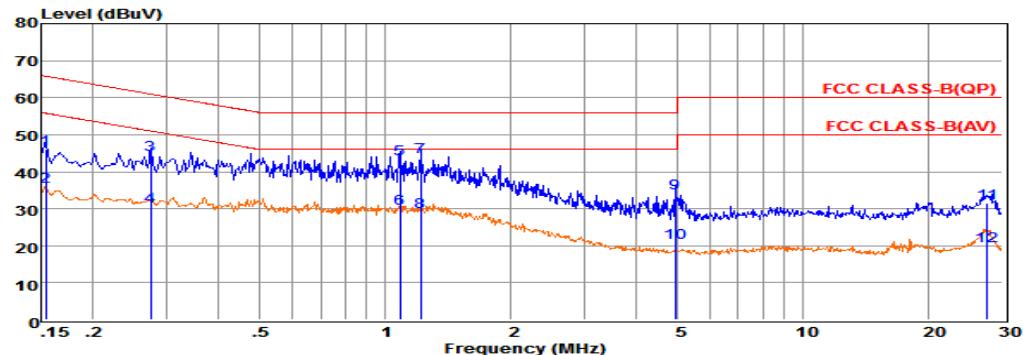


Env. Ins: 24\*/56%  
 EUT: ViPRO H Handheld Gimbal  
 M/N: ViPRO H  
 Power Rating: AC 240V/60Hz  
 Test Mode: TX-2402  
 Operator: Aking  
 Memo:  
 Pol: NEUTRAL

| Freq       | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over   | Remark  |
|------------|---------|---------|--------|-----------|----------|-------|--------|---------|
| MHz        | dBuV    | dB      | dB     | dB        | dBuV     | dBuV  | dB     |         |
| 1.0.15403  | 26.53   | 9.69    | 0.02   | 10.00     | 46.24    | 65.78 | -19.54 | QP      |
| 2.0.15413  | 16.33   | 9.69    | 0.02   | 10.00     | 36.04    | 55.77 | -19.73 | Average |
| 3.0.27442  | 24.84   | 9.60    | 0.03   | 10.00     | 44.47    | 60.98 | -16.51 | QP      |
| 4.0.27452  | 11.08   | 9.60    | 0.03   | 10.00     | 30.71    | 50.98 | -20.27 | Average |
| 5.1.08237  | 23.78   | 9.63    | 0.05   | 10.00     | 43.46    | 56.00 | -12.54 | QP      |
| 6.1.08337  | 10.36   | 9.63    | 0.05   | 10.00     | 30.04    | 46.00 | -15.96 | Average |
| 7.1.21618  | 24.31   | 9.63    | 0.05   | 10.00     | 43.99    | 56.00 | -12.01 | QP      |
| 8.1.21718  | 9.45    | 9.63    | 0.05   | 10.00     | 29.13    | 46.00 | -16.87 | Average |
| 9.4.95189  | 14.47   | 9.66    | 0.06   | 10.00     | 34.19    | 56.00 | -21.81 | QP      |
| 10.4.95289 | 1.15    | 9.66    | 0.06   | 10.00     | 20.87    | 46.00 | -25.13 | Average |
| 1127.56162 | 11.60   | 9.84    | 0.14   | 10.00     | 31.58    | 60.00 | -28.42 | QP      |
| 1227.56262 | -0.11   | 9.84    | 0.14   | 10.00     | 19.87    | 50.00 | -30.13 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.


## Test Result For Line Power Input AC 120V/60Hz

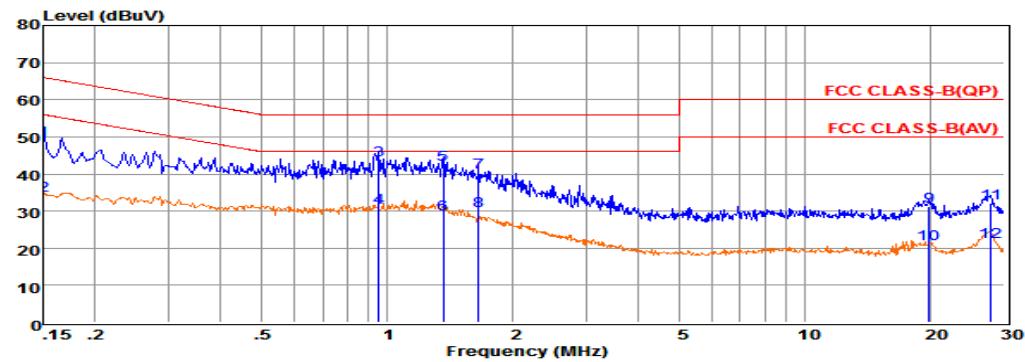

Env. Ins: 24\*/56%  
 EUT: ViPRO H Handheld Gimbal  
 M/N: ViPRO H  
 Power Rating: AC 120V/60Hz  
 Test Mode: TX-2402  
 Operator: Aking  
 Memo:  
 Pol: NEUTRAL

| Freq        | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over   | Remark  |
|-------------|---------|---------|--------|-----------|----------|-------|--------|---------|
| MHz         | dBuV    | dB      | dB     | dB        | dBuV     | dBuV  | dB     |         |
| 1.015000    | 29.42   | 9.70    | 0.02   | 10.00     | 49.14    | 66.00 | -16.86 | QP      |
| 2.015010    | 14.56   | 9.70    | 0.02   | 10.00     | 34.28    | 55.99 | -21.71 | Average |
| 3.095313    | 24.00   | 9.63    | 0.05   | 10.00     | 43.68    | 56.00 | -12.32 | QP      |
| 4.095323    | 11.28   | 9.63    | 0.05   | 10.00     | 30.96    | 46.00 | -15.04 | Average |
| 5.135931    | 22.92   | 9.63    | 0.05   | 10.00     | 42.60    | 56.00 | -13.40 | QP      |
| 6.136031    | 9.47    | 9.63    | 0.05   | 10.00     | 29.15    | 46.00 | -16.85 | Average |
| 7.165370    | 20.66   | 9.63    | 0.05   | 10.00     | 40.34    | 56.00 | -15.66 | QP      |
| 8.165470    | 10.32   | 9.63    | 0.05   | 10.00     | 30.00    | 46.00 | -16.00 | Average |
| 9.19.84453  | 11.12   | 9.88    | 0.12   | 10.00     | 31.12    | 60.00 | -28.88 | QP      |
| 10.19.84553 | 1.06    | 9.88    | 0.12   | 10.00     | 21.06    | 50.00 | -28.94 | Average |
| 11.27.85524 | 12.14   | 9.84    | 0.14   | 10.00     | 32.12    | 60.00 | -27.88 | QP      |
| 12.27.85624 | 1.71    | 9.84    | 0.14   | 10.00     | 21.69    | 50.00 | -28.31 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

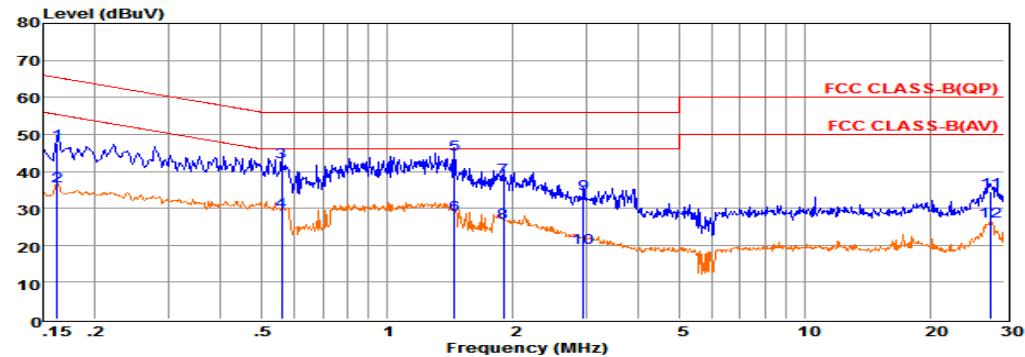

Env. Ins: 24\*/56%  
 EUT: ViPRO H Handheld Gimbal  
 M/N: ViPRO H  
 Power Rating: AC 120V/60Hz  
 Test Mode: TX-2402  
 Operator: Aking  
 Memo:  
 Pol: LINE

| Freq        | Reading | LisnFac | CabLos | Atten_Fac | Measured | Limit | Over   | Remark  |
|-------------|---------|---------|--------|-----------|----------|-------|--------|---------|
| MHz         | dBuV    | dB      | dB     | dB        | dBuV     | dBuV  | dB     |         |
| 1.016241    | 28.07   | 9.59    | 0.02   | 10.00     | 47.68    | 65.34 | -17.66 | QP      |
| 2.016251    | 16.25   | 9.59    | 0.02   | 10.00     | 35.86    | 55.33 | -19.47 | Average |
| 3.055814    | 22.97   | 9.63    | 0.04   | 10.00     | 42.64    | 56.00 | -13.36 | QP      |
| 4.055824    | 9.48    | 9.63    | 0.04   | 10.00     | 29.15    | 46.00 | -16.85 | Average |
| 5.144855    | 24.85   | 9.64    | 0.05   | 10.00     | 44.54    | 56.00 | -11.46 | QP      |
| 6.144955    | 8.43    | 9.64    | 0.05   | 10.00     | 28.12    | 46.00 | -17.88 | Average |
| 7.189795    | 18.66   | 9.64    | 0.05   | 10.00     | 38.35    | 56.00 | -17.65 | QP      |
| 8.189895    | 6.58    | 9.64    | 0.05   | 10.00     | 26.27    | 46.00 | -19.73 | Average |
| 9.2.94625   | 14.18   | 9.64    | 0.06   | 10.00     | 33.88    | 56.00 | -22.12 | QP      |
| 10.2.94725  | -0.35   | 9.64    | 0.06   | 10.00     | 19.35    | 46.00 | -26.65 | Average |
| 11.27.85524 | 14.66   | 9.71    | 0.14   | 10.00     | 34.51    | 60.00 | -25.49 | QP      |
| 12.27.85624 | 6.50    | 9.71    | 0.14   | 10.00     | 26.35    | 50.00 | -23.65 | Average |

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 6.7. Antenna Requirements

### 6.7.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 6.7.2. Antenna Connector Construction

The SMD antenna used for transmitting is 2.21dBi, and the antenna is on PCB board and no consideration of replacement. Please see EUT photo for details.

### 6.7.3. Results: Compliance.

## Measurement parameters:

| Measurement parameter |          |
|-----------------------|----------|
| Detector:             | Peak     |
| Sweep time:           | Auto     |
| Resolution bandwidth: | 3 MHz    |
| Video bandwidth:      | 3 MHz    |
| Trace-Mode:           | Max hold |

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth devices, the GFSK mode is used.

## Limits:

| FCC          | IC |
|--------------|----|
| Antenna Gain |    |
| 6dBi         |    |

**Result: -/-**

-----THE END OF REPORT-----