



ELECTRICAL TESTING
0839.01

Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

**ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 and subpart B
RSS-210 issue 9 Annex A, ICES-003 Issue 6:2016**

FOR:

Triple Plus Ltd.

CLM HUB

Model: CLM-COAMAP-1-02

FCC ID:2AFOICLMCTRL10

IC:20798-CLMCTRL10

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Test configuration.....	5
6.4	Changes made in EUT	5
6.5	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Periodic operation requirements	7
7.2	Field strength of emissions.....	11
7.3	Occupied bandwidth test	22
7.4	Conducted emissions	25
7.5	Antenna requirements	28
8	Emissions tests according to FCC 47CFR part 15 subpart B and ICES-003 requirements.....	29
8.1	Conducted emissions	29
8.2	Radiated emission measurements	33
9	APPENDIX A Test equipment and ancillaries used for tests.....	39
10	APPENDIX B Measurement uncertainties.....	41
11	APPENDIX C Test laboratory description	42
12	APPENDIX D Specification references	42
13	APPENDIX E Test equipment correction factors.....	43
14	APPENDIX F Abbreviations and acronyms.....	55

1 Applicant information

Client name: Triple Plus Ltd.
Address: 5 Hamada street, Yokneam 2069200, Israel
Telephone: +972 72 211 7711
E-mail: jacob.goren@tripleplus.io
Contact name: Mr. Jacob Goren

2 Equipment under test attributes

Product name: CLM HUB
Product type: Transceiver
Model(s): CLM-COAMAP-1-02
Serial number: Prototype
Hardware version: CLM-CTRL-0001
Software release: 1.3.2.2
Receipt date 18-Jul-16

3 Manufacturer information

Manufacturer name: Triple Plus Ltd.
Address: 5 Hamada street, Yokneam 2069200, Israel
Telephone: +972 72 211 7711
E-Mail: jacob.goren@tripleplus.io
Contact name: Mr. Jacob Goren

4 Test details

Project ID: 28549
Location: Primary: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Satellite: Hermon Laboratories Ltd. Hefetz-Haim 10, Tel Aviv 6744124, Israel
Test started: 18-Jul-16
Test completed: 03-Aug-16
Test specification(s): FCC 47CFR part 15, subpart C, §15.231 and subpart B;
RSS-210 issue 9 Annex A, RSS-Gen issue 4, ICES-003 issue 6:2016

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements	Pass
FCC Part 15, Section 231(a) / RSS-210, Section A1.2, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission	Pass
FCC Part 15, Section 203 / RSS-Gen, Section 8.3, Antenna requirements	Pass
Unintentional emissions	
FCC Part 15, Section 107 / ICES-003, Section 6.1 class B, Conducted emission at AC power port	Pass
FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2/ ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr.I. Zilberstein, test engineer	August 3, 2016	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	August 29, 2016	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	March 20, 2017	

6 EUT description

6.1 General information

The EUT is a part of CLM (Cloud Leakage Management) system. The HUB receives inputs from the various peripheral elements and sends required commands/instructions to the shut off unit. When the leak is detected, the system disconnects the water supply wirelessly by activating the shutoff units. HUB easily, securely and reliably communicates with the connected devices and tracks message delivery, allowing the understanding of devices' state.


The EUT includes a Wi-Fi limited approved module FCC ID:VPYLBYD, IC:772C-LBYD used for communicating bi-directional data between the router and system elements.

The EUT is powered by 5 V DC from AC/DC adapter, manufactured by YNQX, model YNQX09G050120VL.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	AC	Power adapter	AC mains	1	Wall mounted	NA
Power	DC	Power adapter	EUT	1	Unshielded	1 m
Telecom	Ethernet	EUT	Open circuit	1	Shielded	3 m

6.3 Test configuration

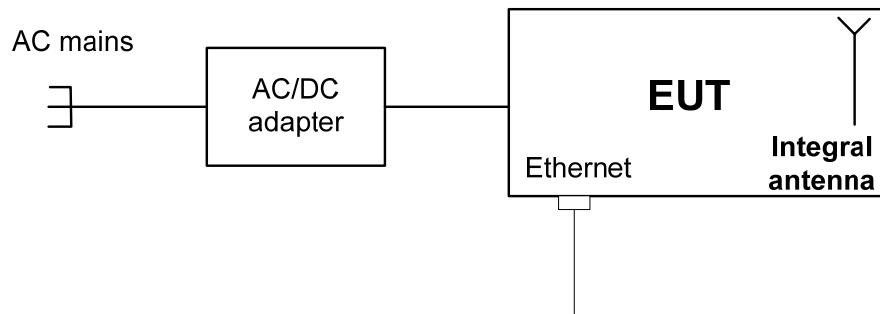

6.4 Changes made in EUT

No changes were implemented in the EUT during testing.



6.5 Transmitter characteristics

Type of equipment				
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)			
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)			
	Plug-in card (Equipment intended for a variety of host systems)			
Operating frequencies		915 MHz		
Maximum rated output power		At transmitter 50 Ω RF output connector		dBm
		Field strength at 3 m distance		98.5 dB(µV/m) -peak 72.88 dB(µV/m)-average
Is transmitter output power variable?		X	No	
		Yes	continuous variable	
			stepped variable with stepsize	dB
			minimum RF power	dBm
			maximum RF power	dBm
Antenna connection				
unique coupling	standard connector	X	integral	X with temporary RF connector without temporary RF connector
Antenna/s technical characteristics				
Type	Manufacturer	Model number		
Internal	Triple Plus	Helical		
Type of modulation		2GFSK		
Transmitter aggregate data rate/s		50 kbps		
Transmitter power source				
Battery	Nominal rated voltage		Battery type	Lithium
X DC	Nominal rated voltage	5 VDC via AC/DC adapter		
AC mains	Nominal rated voltage	VAC	Frequency	
Common power source for transmitter and receiver		X	yes	no



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance		
Date(s):	21-Jul-16		
Temperature: 23 °C	Relative Humidity: 38 %	Air Pressure: 1010 hPa	Power: 120 VAC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1.

7.1.3 Test procedure for measurements of polling / supervision transmission duration

7.1.3.1 The EUT was set up as shown in Figure 7.1.1.

7.1.3.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.3.3 The transmission time was captured and shown in Plot 7.1.2, Plot 7.1.3.

Figure 7.1.1 Setup for transmitter shut down test






HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements			
Test procedure: Supplier declaration			
Test mode: Compliance			Verdict: PASS
Date(s): 21-Jul-16			
Temperature: 23 °C	Relative Humidity: 38 %	Air Pressure: 1010 hPa	Power: 120 VAC
Remarks:			

Table 7.1.1 Periodic operation requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	NA
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	Plot 7.1.2, Plot 7.1.3	Comply
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	Supplier declaration	Comply

Plot 7.1.1 Transmitter shut down test result

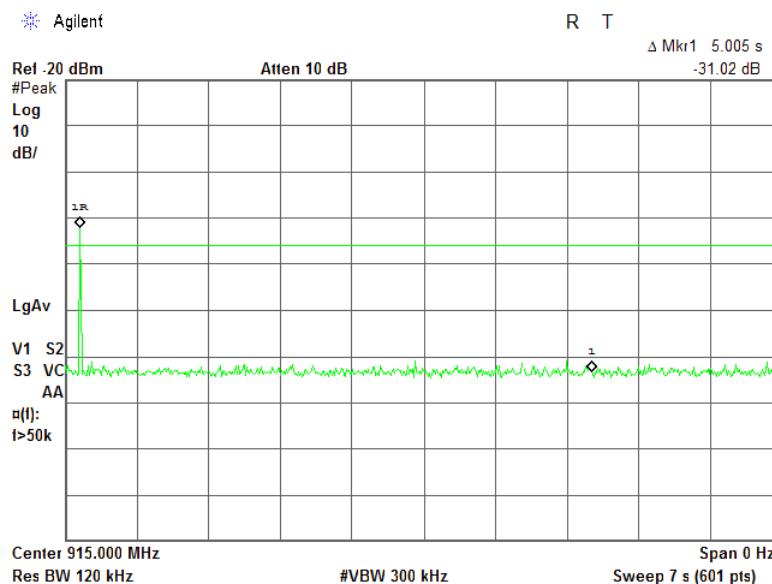



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements				
Test procedure: Supplier declaration				
Test mode: Compliance			Verdict: PASS	
Date(s): 21-Jul-16				
Temperature: 23 °C	Relative Humidity: 38 %	Air Pressure: 1010 hPa	Power: 120 VAC	
Remarks:				

Plot 7.1.2 Polling / supervision transmission duration


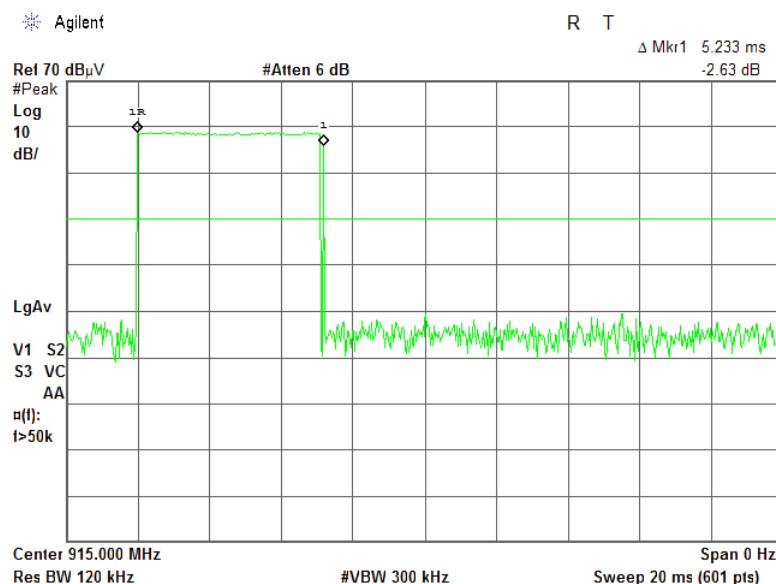


Table 7.1.2 Total duration of polling / supervision transmissions



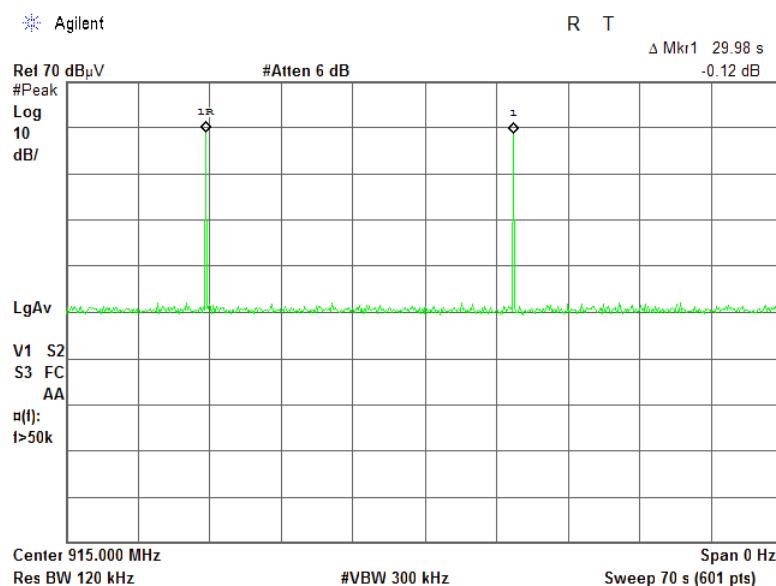

HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(a) / RSS-210, Section A1.1, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance		
Date(s):	21-Jul-16		
Temperature: 23 °C	Relative Humidity: 38 %	Air Pressure: 1010 hPa	Power: 120 VAC
Remarks:			

Table 7.1.3 Total duration of polling / supervision transmissions

Duration, ms	Repetition period, s	Maximum number of transmissions within 1 hour	Total duration within 1 hour, ms
5.233	30	120	628

Reference numbers of test equipment used

HL 3818							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance	Verdict: PASS	PASS
Date(s): 21-Jul-16		
Temperature: 25.5 °C	Relative Humidity: 49 %	Air Pressure: 1006 hPa
Remarks:		

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
915.0	102	82

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**		
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 21-Jul-16		
Temperature: 25.5 °C	Relative Humidity: 49 %	Air Pressure: 1006 hPa
Remarks:		Power: 120 VAC


7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.
- 7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.2.3.1 The EUT was set up as shown in Figure 7.2.2, Figure 7.2.3, energized and the performance check was conducted.
- 7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

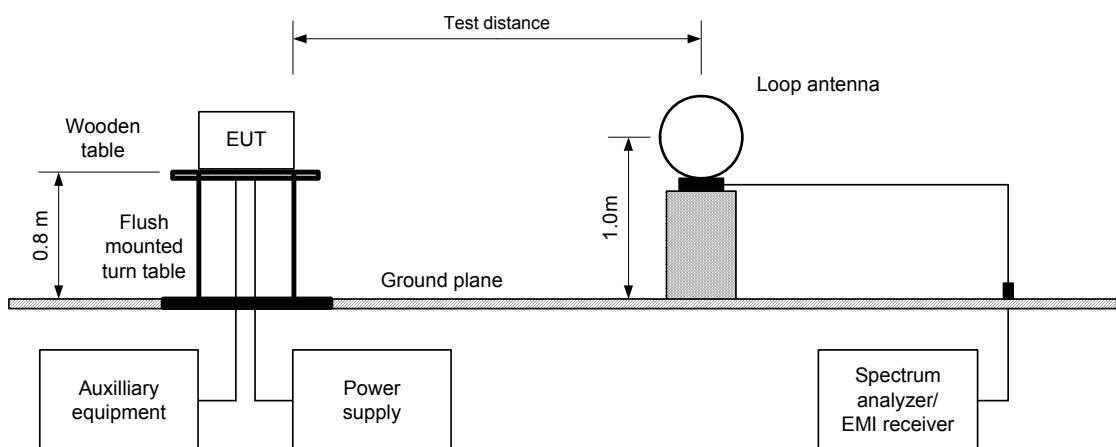



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6	
Test mode:	Compliance	
Date(s):	21-Jul-16	Verdict: PASS
Temperature: 25.5 °C	Air Pressure: 1006 hPa	Power: 120 VAC
Remarks:		

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz


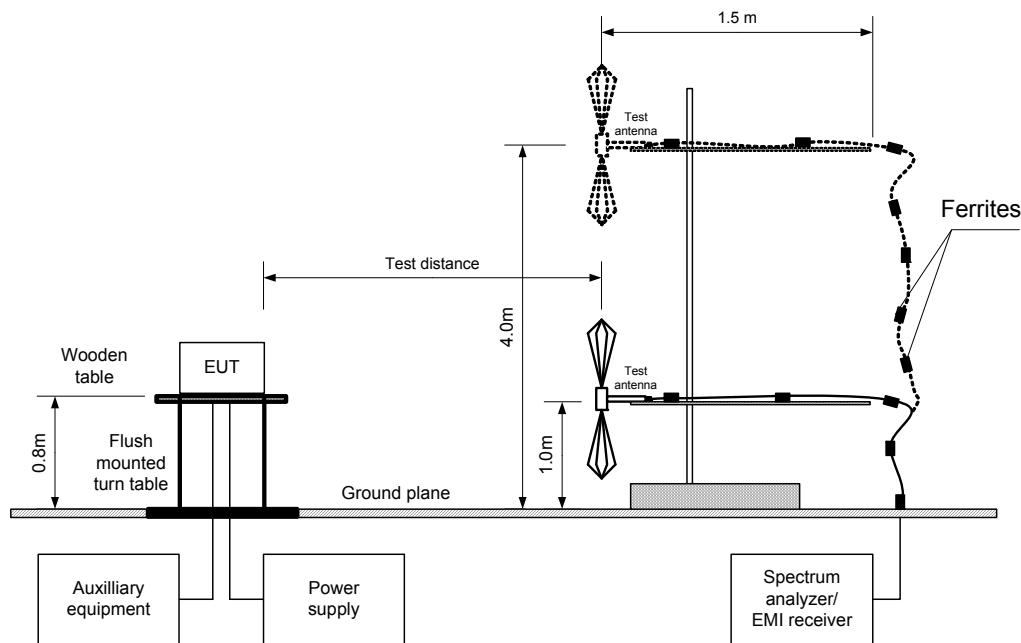


Figure 7.2.3 Setup for spurious emission field strength measurements above 1000 MHz



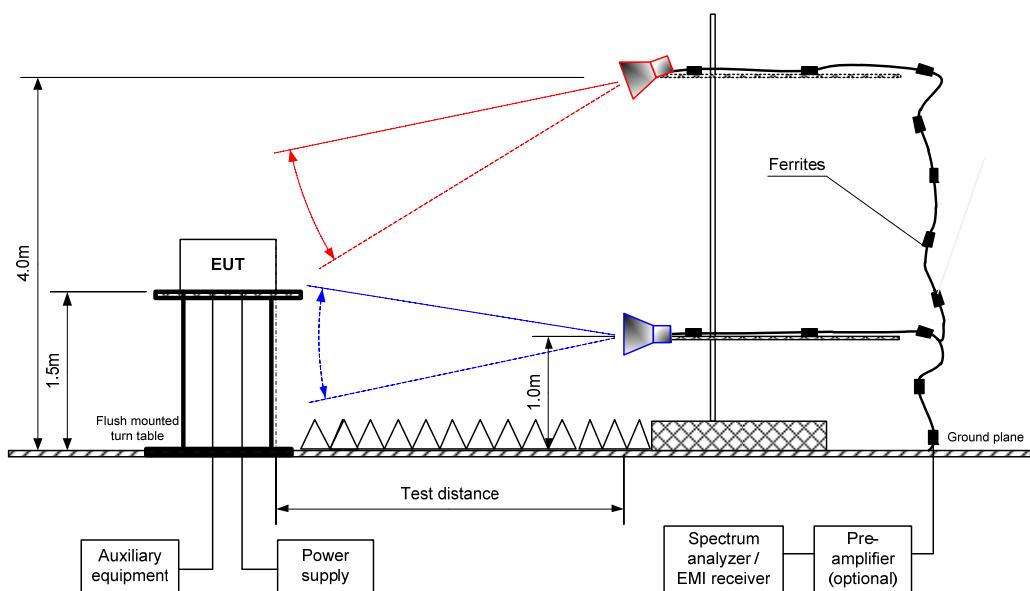

HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s):	21-Jul-16	
Temperature: 25.5 °C	Relative Humidity: 49 %	Air Pressure: 1006 hPa
Remarks:		

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Vertical)
MODULATION:	GFSK
BIT RATE:	50 kbps
TRANSMITTER OUTPUT POWER:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 -9500 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict	
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)		
Fundamental emission***											
914.977	V	1.2	150	98.50	102	-3.5	98.50	72.88	82	-9.12	Pass
Spurious emissions											
1830.000	H	1.27	160	43.44	82	-38.56	43.44	17.82	62	-44.18	Pass
3660.000	H	1.45	160	42.46	74	-31.54	42.46	16.84	54	-37.16	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m)

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Pulse quantity in 100 ms	Duration, ms	Period, ms		
5.233	1	N/A	N/A	N/A	-25.62

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 1984	HL 2780	HL 4932		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions	
Test procedure:	ANSI C63.10 sections 6.5, 6.6
Test mode:	Compliance
Date(s):	21-Jul-16
Temperature: 25.5 °C	Relative Humidity: 49 %
	Air Pressure: 1006 hPa
	Power: 120 VAC
Remarks:	

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE:	3 m
EUT POSITION:	Typical (Vertical)
MODULATION:	2GFSK
BIT RATE:	50 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 - 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
No signals were found								

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2780	HL 4932			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions					
Test procedure: ANSI C63.10 sections 6.5, 6.6					
Test mode: Compliance			Verdict: PASS		
Date(s): 21-Jul-16					
Temperature: 25.5 °C		Relative Humidity: 49 %	Air Pressure: 1006 hPa	Power: 120 VAC	
Remarks:					

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.2.7 Restricted bands according to RSS-Gen, Table 3

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6



HERMON LABORATORIES


Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6	
Test mode:	Compliance	Verdict: PASS
Date(s):	21-Jul-16	
Temperature: 25.5 °C	Relative Humidity: 49 %	Air Pressure: 1006 hPa
Power: 120 VAC		
Remarks:		

Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 914.9775 MHz
98.50 dB μ V/m

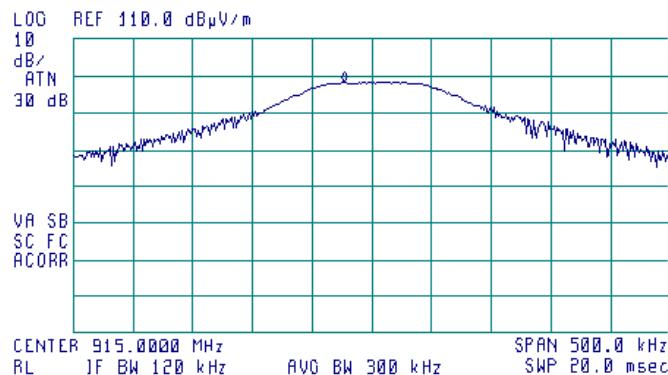


Plot 7.2.2 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 914.9750 MHz
91.93 dB μ V/m

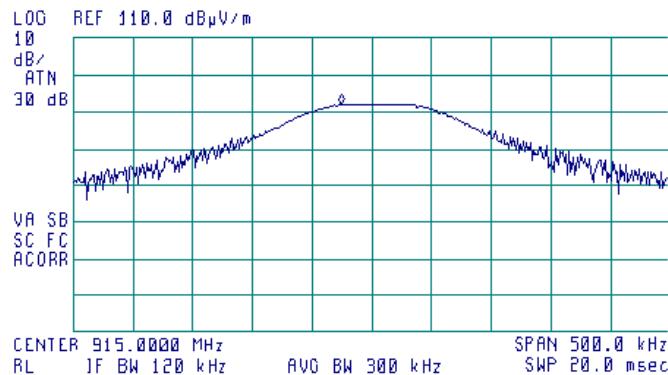




HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance		Verdict: PASS
Date(s): 21-Jul-16		
Temperature: 25.5 °C	Relative Humidity: 49 %	Air Pressure: 1006 hPa
Remarks:		


Plot 7.2.3 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Fully anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

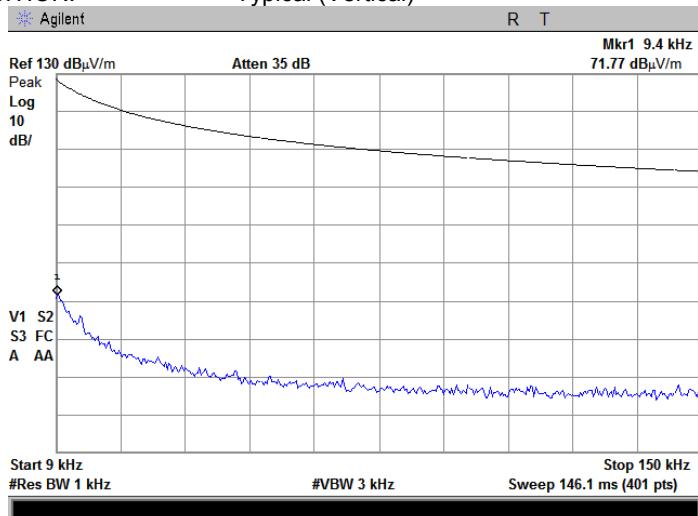

Plot 7.2.4 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Fully anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

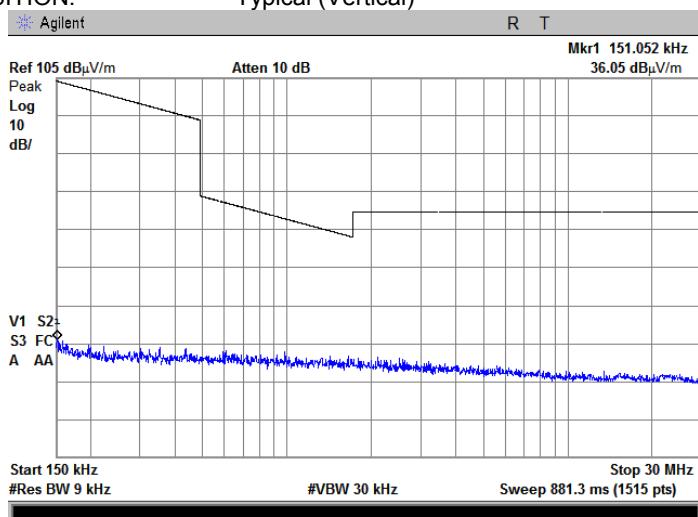



HERMON LABORATORIES


Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance	Verdict: PASS	
Date(s): 21-Jul-16		
Temperature: 25.5 °C	Relative Humidity: 49 %	Air Pressure: 1006 hPa
Remarks:		

Plot 7.2.5 Radiated emission measurements from 30 to 1000 MHz



TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: Typical (Vertical orthogonal (X))



ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 914.2 MHz
 64.17 dB μ V/m

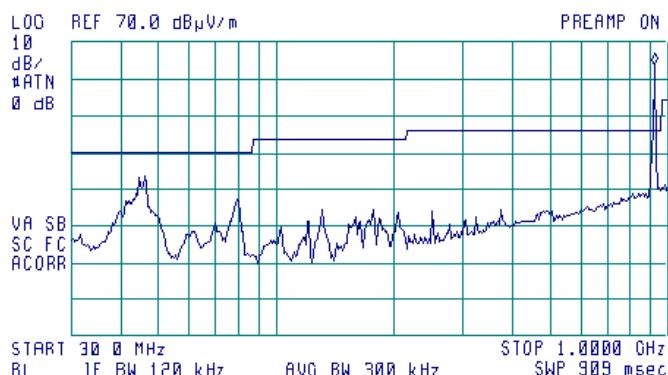**Plot 7.2.6 Radiated emission measurements from 1000 to 9500 MHz**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: Typical (Vertical)

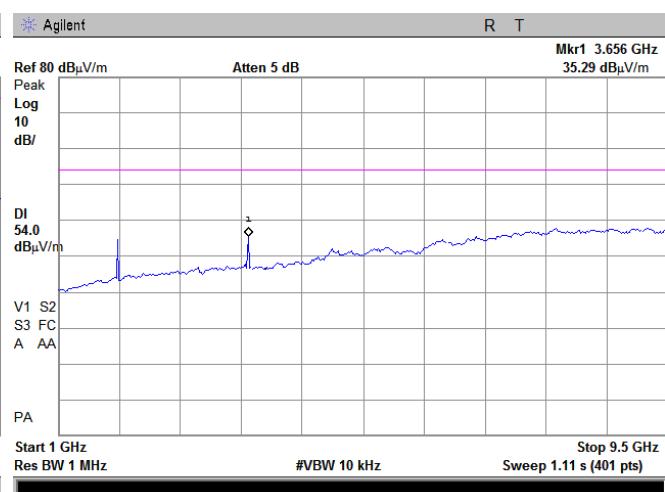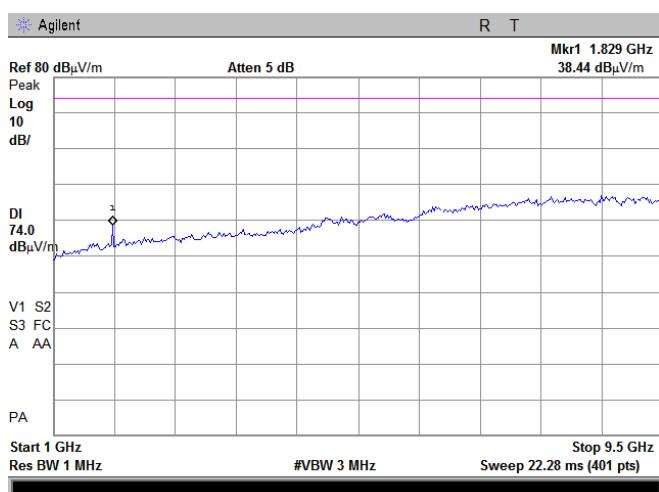




HERMON LABORATORIES


Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions		
Test procedure: ANSI C63.10 sections 6.5, 6.6		
Test mode: Compliance	Verdict: PASS	
Date(s): 21-Jul-16		
Temperature: 25.5 °C	Relative Humidity: 49 %	Air Pressure: 1006 hPa
Remarks:		

Plot 7.2.7 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical/Horizontal
 EUT POSITION: Typical (Vertical)

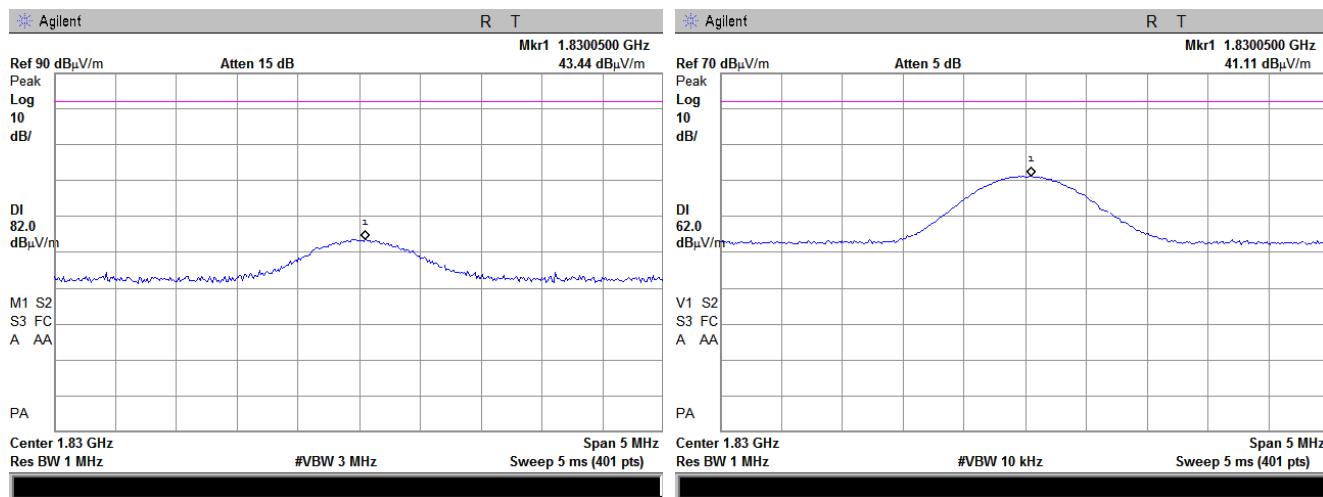**Plot 7.2.8 Radiated emission measurements at the third harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical/Horizontal
 EUT POSITION: Typical (Vertical)

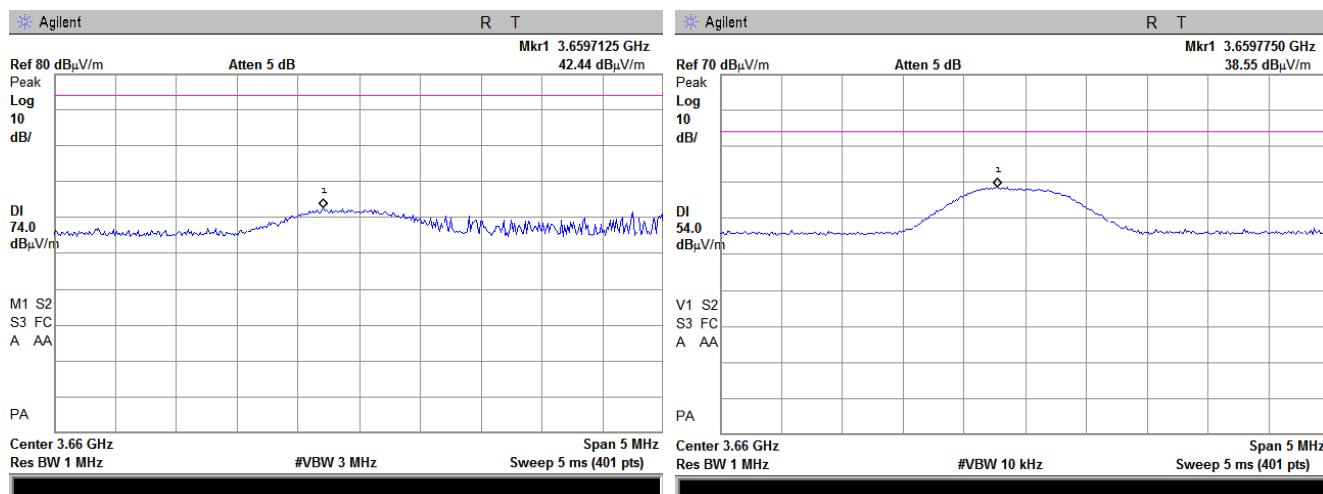





HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(b) / RSS-210, Section A1.2, Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance			Verdict: PASS
Date(s): 21-Jul-16			
Temperature: 25.5 °C	Relative Humidity: 49 %	Air Pressure: 1006 hPa	Power: 120 VAC
Remarks:			

Plot 7.2.9 Transmission pulse duration

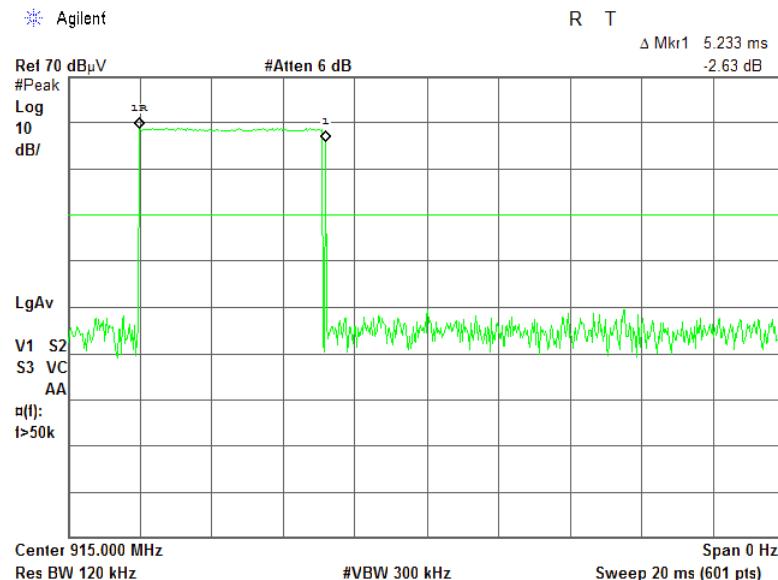

Plot 7.2.10 Transmission pulse period

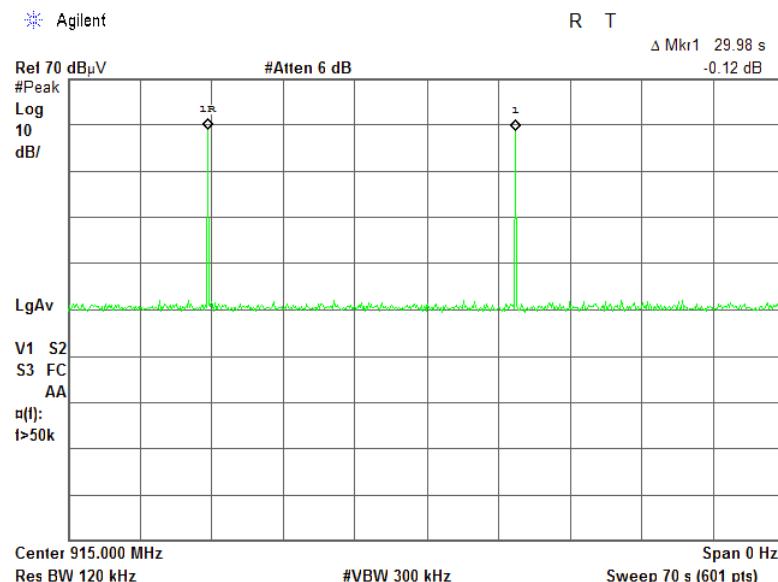



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth			
Test procedure:	ANSI C63.10 section 6.9.2		
Test mode:	Compliance		
Date(s):	18-Jul-16		
Temperature: 24.4 °C	Relative Humidity: 46 %	Air Pressure: 1006 hPa	Power: 120 VAC
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900		0.25
Above 900	20.0	0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT was set to transmit modulated carrier.
- 7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and the associated plot.

Figure 7.3.1 Occupied bandwidth test setup





HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth					
Test procedure:	ANSI C63.10 section 6.9.2				
Test mode:	Compliance			Verdict:	PASS
Date(s):	18-Jul-16				
Temperature: 24.4 °C	Relative Humidity: 46 %	Air Pressure: 1006 hPa			Power: 120 VAC
Remarks:					

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION: GFSK
 BIT RATE: 50 kbps

MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
915.0	184.426	0.5	457.5	-273.074	Pass

MODULATION ENVELOPE REFERENCE POINTS: 99 %

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
915.0	131.49	0.5	457.5	-326.01	Pass

Reference numbers of test equipment used

HL 3818							
---------	--	--	--	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC Part 15, Section 231(c) / RSS-210, Section A1.3, Occupied bandwidth			
Test procedure:	ANSI C63.10 section 6.9.2		
Test mode:	Compliance		
Date(s):	18-Jul-16		
Temperature: 24.4 °C	Relative Humidity: 46 %	Air Pressure: 1006 hPa	Power: 120 VAC
Remarks:			

Plot 7.3.1 Occupied bandwidth test result

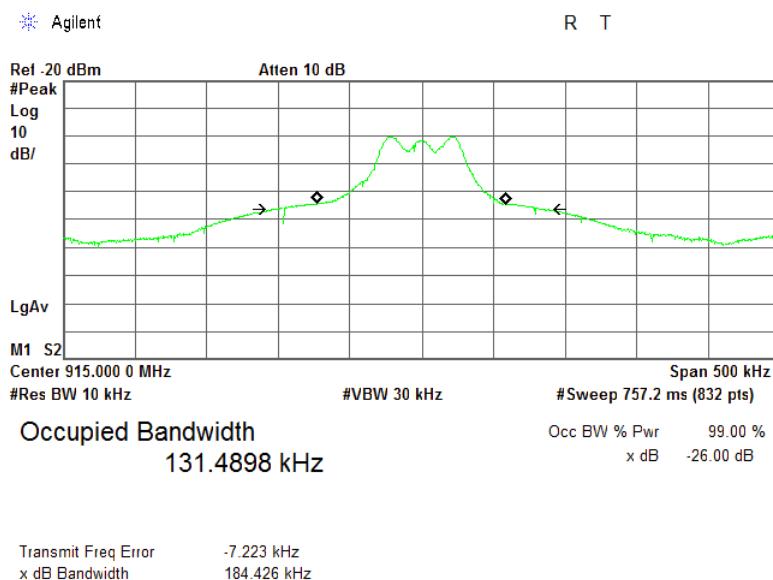



HERMON LABORATORIES

Test specification: FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission		
Test procedure: ANSI C63.10 section 6.2		
Test mode: Compliance		Verdict: PASS
Date(s): 20-Jul-16		
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1005 hPa
Remarks:		

7.4 Conducted emissions

7.4.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(μ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* - The limit decreases linearly with the logarithm of frequency.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1 and associated photographs, energized and the performance check was conducted.
- 7.4.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer while unused coaxial connector of the LISN was terminated with 50 Ohm.
- 7.4.2.3 The position of the device cables was varied to determine maximum emission level.
- 7.4.2.4 The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.

Figure 7.4.1 Setup for conducted emission measurements, table-top equipment

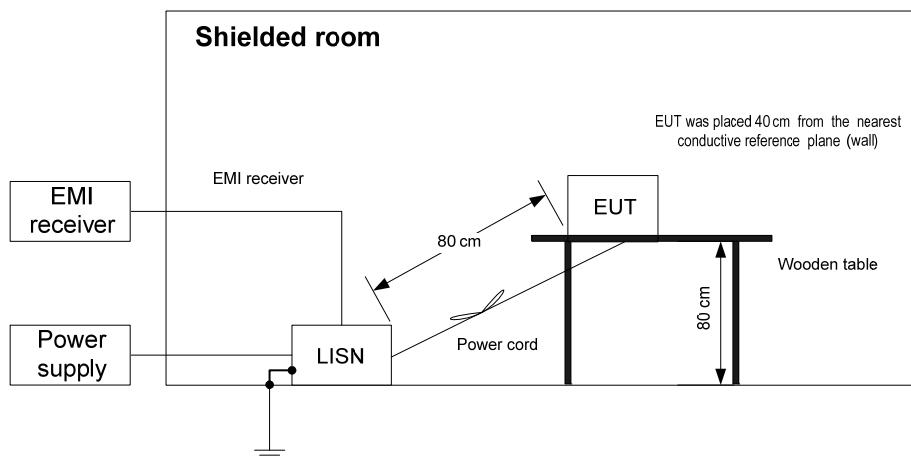



HERMON LABORATORIES

Test specification: FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission	
Test procedure: ANSI C63.10 section 6.2	
Test mode: Compliance	Verdict: PASS
Date(s): 20-Jul-16	
Temperature: 24 °C	Relative Humidity: 48 %
Air Pressure: 1005 hPa	
Power: 120 VAC	
Remarks:	

Table 7.4.2 Conducted emission test results

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.156696	59.39	52.34	65.67	-13.33	35.64	55.67	-20.03	L1	Pass
0.242204	47.99	46.00	62.03	-16.03	29.83	52.03	-22.20		
0.364141	43.99	37.11	58.69	-21.58	20.75	48.69	-27.94		
0.687446	34.04	30.69	56.00	-25.31	14.53	46.00	-31.47		
0.944104	31.75	27.41	56.00	-28.59	15.08	46.00	-30.92		
16.374773	45.14	39.85	60.00	-20.15	24.20	50.00	-25.80		
0.150000	61.69	55.66	66.00	-10.34	37.43	56.00	-18.57		
0.162274	61.53	53.39	65.40	-12.01	36.88	55.40	-18.52		
0.194599	57.63	49.45	63.86	-14.41	34.27	53.86	-19.59		
0.546808	42.32	38.65	56.00	-17.35	33.29	46.00	-12.71		
16.168288	45.74	38.77	60.00	-21.23	26.44	50.00	-23.56		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 0787	HL 1205	HL 1513	HL 3223	HL 3612	HL 4778	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification: FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission		
Test procedure: ANSI C63.10 section 6.2		
Test mode: Compliance		Verdict: PASS
Date(s): 20-Jul-16		
Temperature: 24 °C	Relative Humidity: 48 %	Air Pressure: 1005 hPa
Remarks:		

Plot 7.4.1 Conducted emission measurements

LINE: L1
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 160 kHz
54.19 dB μ V

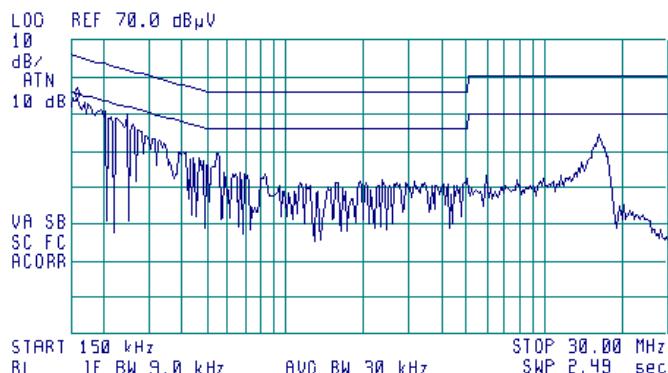


Plot 7.4.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 200 kHz
54.73 dB μ V

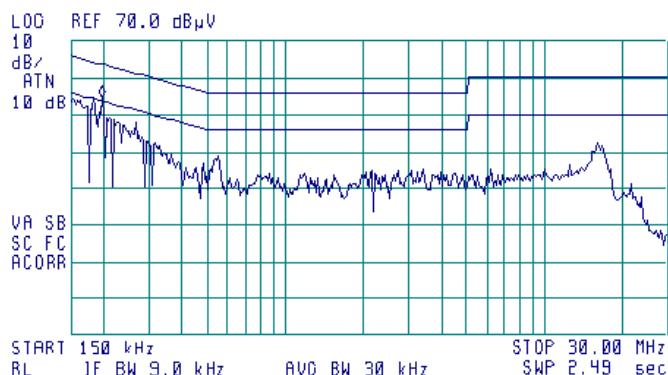



HERMON LABORATORIES

Test specification: FCC Part 15, Section 203 / RSS-Gen, Section 8.3, Antenna requirements			
Test procedure: Visual inspection / supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s):	03-Aug-16		
Temperature: 26 °C	Relative Humidity: 53 %	Air Pressure: 1007 hPa	Power: 120 VAC
Remarks:			

7.5 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.5.1.

Table 7.5.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Pass	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.5.1 Antenna assembly

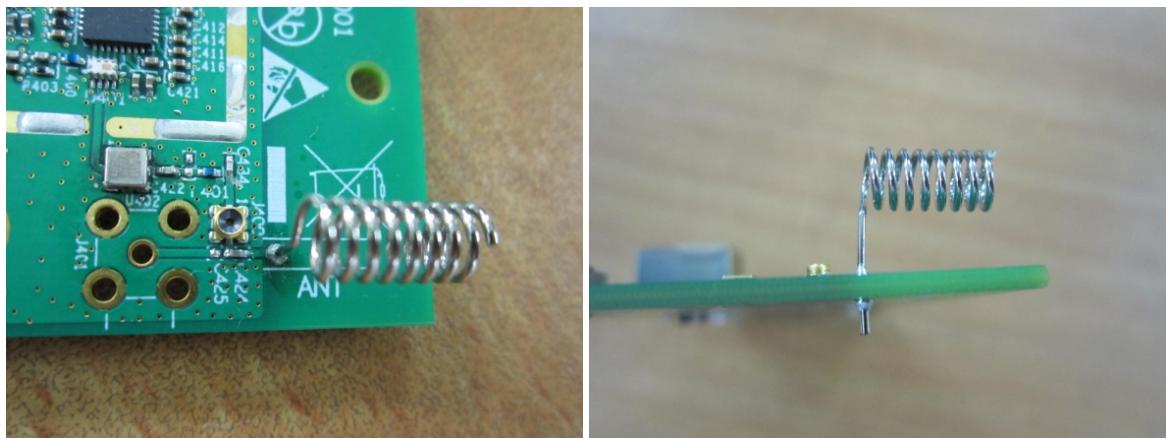



HERMON LABORATORIES

Test specification:	FCC 47 CFR, Section 15.107 / ICES-003, Section 6.1, Class B, AC power lines conducted emissions		
Test procedure:	ANSI C63.4, Section 7.3 and 12.2.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	01-Aug-16		
Temperature: 27.1 °C	Relative Humidity: 36 %	Air Pressure: 1006 hPa	Power: 120 VAC
Remarks:			

8 Emissions tests according to FCC 47CFR part 15 subpart B and ICES-003 requirements

8.1 Conducted emissions

8.1.1 General

This test was performed to measure the common mode conducted emissions at the EUT power port. The specification test limits are given in Table 8.1.1.

Table 8.1.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(µV)		Class A limit, dB(µV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

* - The limit decreases linearly with the logarithm of frequency.

8.1.2 Test procedure


- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and the associated photographs, energized and the EUT performance was checked.
- 8.1.2.2 The measurements were performed at the EUT power terminals with the LISN connected to the EMI receiver in the frequency range referred to in Table 8.1.2. The unused coaxial connector of the LISN was terminated with 50 Ohm.
- 8.1.2.3 The position of the EUT cables was varied to find the highest emission.
- 8.1.2.4 The worst test results with respect to the limits were recorded in Table 8.1.2 and shown in the associated plots.



HERMON LABORATORIES

Test specification:	FCC 47 CFR, Section 15.107 / ICES-003, Section 6.1, Class B, AC power lines conducted emissions		
Test procedure:	ANSI C63.4, Section 7.3 and 12.2.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	01-Aug-16		
Temperature: 27.1 °C	Relative Humidity: 36 %	Air Pressure: 1006 hPa	Power: 120 VAC
Remarks:			

Figure 8.1.1 Setup for conducted emission measurements, table-top EUT

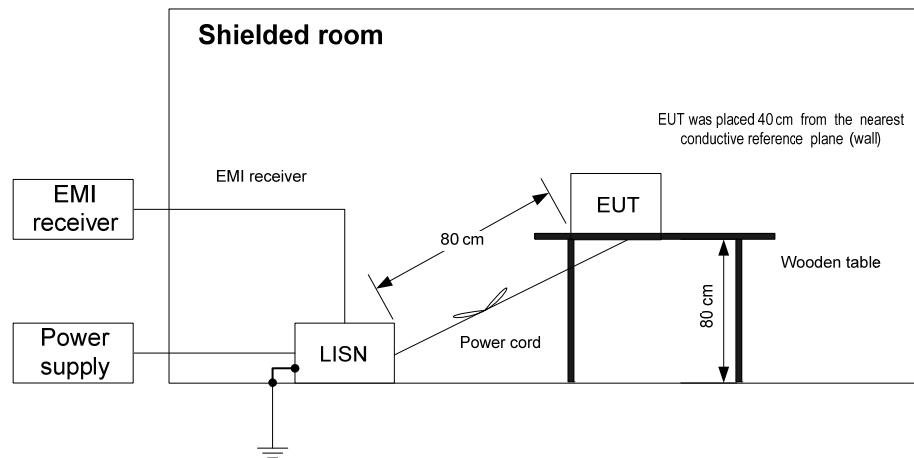

Photograph 8.1.1 Setup for conducted emission measurements





HERMON LABORATORIES

Test specification:		FCC 47 CFR, Section 15.107 / ICES-003, Section 6.1, Class B, AC power lines conducted emissions				
Test procedure:		ANSI C63.4, Section 7.3 and 12.2.4				
Test mode:	Compliance		Verdict:			PASS
Date(s):	01-Aug-16					
Temperature: 27.1 °C	Relative Humidity: 36 %		Air Pressure: 1006 hPa		Power: 120 VAC	
Remarks:						

Table 8.1.2 Conducted emission test results

LINE: AC mains
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.152550	61.69	55.36	65.88	-10.52	36.89	55.88	-18.99	L1	Pass
0.332825	53.87	45.32	59.43	-14.11	27.55	49.43	-21.88		
0.490050	51.76	44.68	56.19	-11.51	28.52	46.19	-17.67		
0.604663	53.56	43.60	56.00	-12.40	28.90	46.00	-17.10		
1.100100	52.60	45.05	56.00	-10.95	29.42	46.00	-16.58		
1.252000	53.06	42.78	56.00	-13.22	27.50	46.00	-18.50		
3.658613	45.48	33.40	56.00	-22.60	18.39	46.00	-27.61		
0.475038	56.08	47.41	56.47	-9.06	36.92	46.47	-9.55	L2	Pass
0.572675	55.37	46.21	56.00	-9.79	35.75	46.00	-10.25		
0.765338	56.15	47.07	56.00	-8.93	36.96	46.00	-9.04		
0.979625	54.59	47.48	56.00	-8.52	37.33	46.00	-8.67		
1.068250	52.33	47.80	56.00	-8.20	37.90	46.00	-8.10		
1.321513	54.82	47.41	56.00	-8.59	36.88	46.00	-9.12		
1.623113	52.42	46.29	56.00	-9.71	35.91	46.00	-10.09		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 1513	HL 3612	HL 3779	HL 4527			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC 47 CFR, Section 15.107 / ICES-003, Section 6.1, Class B, AC power lines conducted emissions		
Test procedure:	ANSI C63.4, Section 7.3 and 12.2.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	01-Aug-16		
Temperature: 27.1 °C	Relative Humidity: 36 %	Air Pressure: 1006 hPa	Power: 120 VAC
Remarks:			


Plot 8.1.1 Conducted emission measurements

LINE:
LIMIT:
DETECTOR:

L1
QUASI-PEAK, AVERAGE
PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 150 kHz
57.71 dB μ V

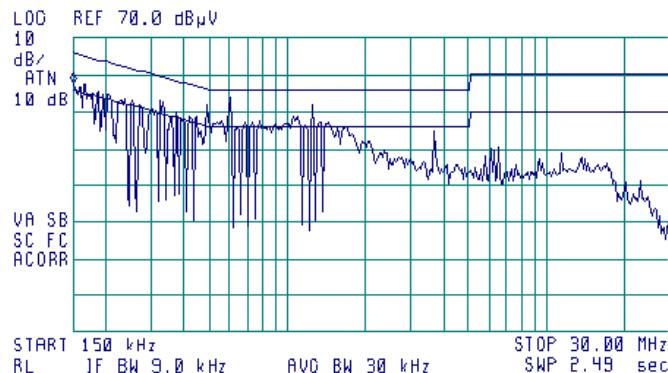


Plot 8.1.2 Conducted emission measurements

LINE:
LIMIT:
DETECTOR:

L2
QUASI-PEAK, AVERAGE
PEAK



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 150 kHz
54.99 dB μ V

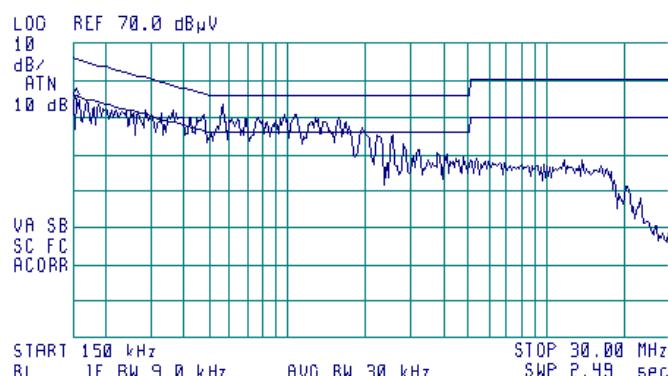



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission		
Test procedure:	ANSI C63.4, Sections 8.3 and 12.2.5		
Test mode:	Compliance		
Date(s):	24-Jul-16 - 31-Jul-16	Verdict:	PASS
Temperature: 24.5 °C	Relative Humidity: 49 %	Air Pressure: 1005 hPa	Power: 120 VAC
Remarks:			

8.2 Radiated emission measurements

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. The specification test limits are given in Table 8.2.1, Table 8.2.2.

Table 8.2.1 Radiated emission test limits according to FCC Part 15, Section 109 and ICES-003, Section 6.2

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* - The limit for a test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – the standard defined and the test distance respectively in meters.

Table 8.2.2 Radiated emission limits according to RSS-Gen, Section 7.1.2

Frequency, MHz	Field strength limit at 3 m test distance, dB(µV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 5 th harmonic**	54.0

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

8.2.2 Test procedure


- 8.2.2.1 The EUT was set up as shown in Figure 8.2.1 and the associated photographs, energized and the EUT performance was checked.
- 8.2.2.2 The preliminary measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. The EUT cables position was varied to maximize emission.
- 8.2.2.3 The EUT was set up as shown in Figure 8.2.2 and the associated photograph, energized and the EUT performance was checked.
- 8.2.2.4 The final measurements were performed at the open area test site at 3 m test distance with the antenna connected to the EMI receiver. The EUT wires and cables were arranged to produce the highest emission as it was found during the preliminary measurements. The frequencies, produced the highest emissions with respect to the limits during the preliminary test were investigated. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations.
- 8.2.2.5 The worst test results with respect to the limits were recorded in Table 8.2.3 and shown in the associated plots.




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission		
Test procedure:	ANSI C63.4, Sections 8.3 and 12.2.5		
Test mode:	Compliance		
Date(s):	24-Jul-16 - 31-Jul-16		
Temperature: 24.5 °C	Relative Humidity: 49 %	Air Pressure: 1005 hPa	Power: 120 VAC
Remarks:			

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber, table-top EUT

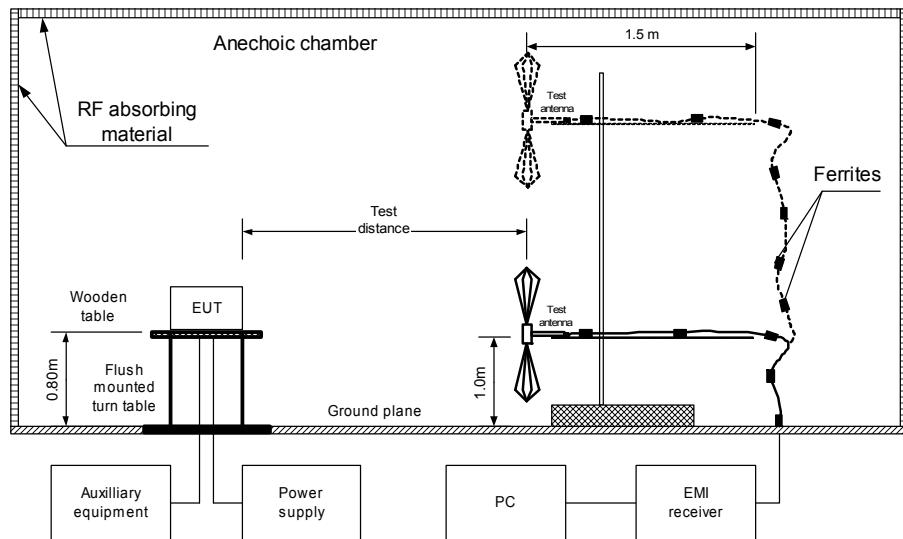

Photograph 8.2.1 Setup for radiated emission measurements

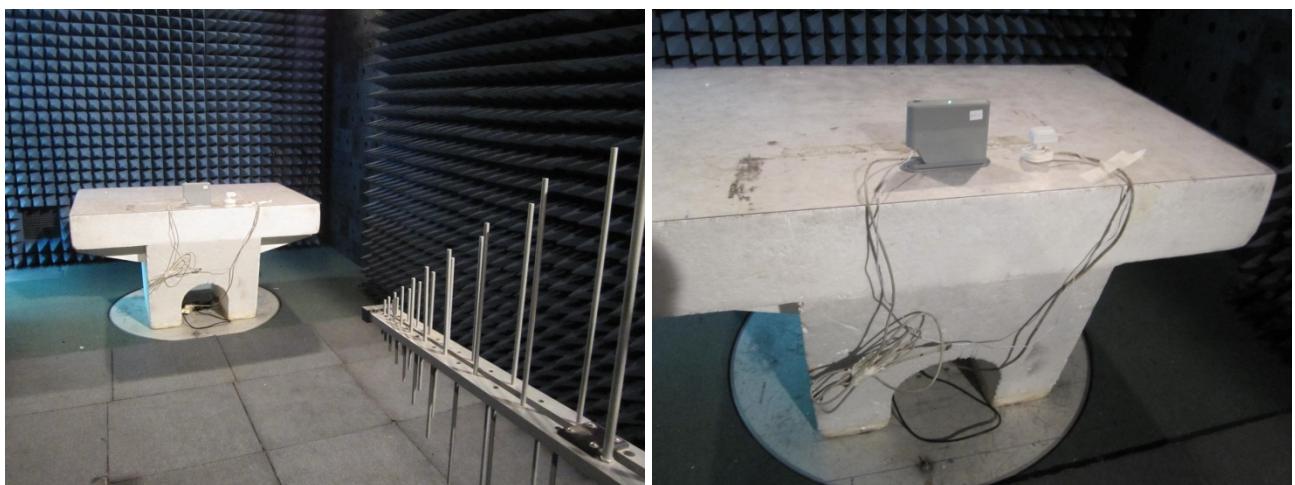




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission		
Test procedure:	ANSI C63.4, Sections 8.3 and 12.2.5		
Test mode:	Compliance		
Date(s):	24-Jul-16 - 31-Jul-16	Verdict:	PASS
Temperature: 24.5 °C	Relative Humidity: 49 %	Air Pressure: 1005 hPa	Power: 120 VAC
Remarks:			

Figure 8.2.2 Setup for radiated emission measurements at OATS, table-top EUT

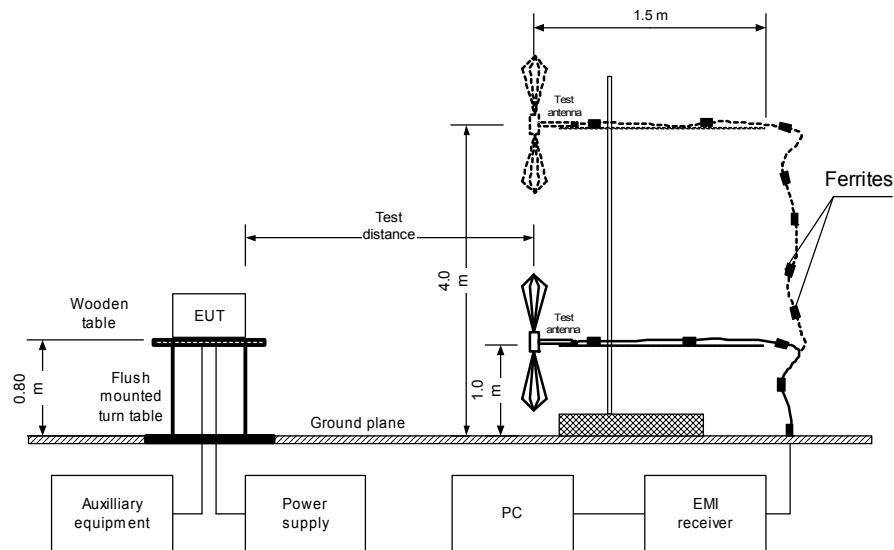

Photograph 8.2.2 Setup for radiated emission measurements, general view





HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission								
Test procedure:		ANSI C63.4, Sections 8.3 and 12.2.5						
Test mode:		Compliance				Verdict:		
Date(s):		24-Jul-16 - 31-Jul-16		Verdict:		PASS		
Temperature: 24.5 °C		Relative Humidity: 49 %		Air Pressure: 1005 hPa		Power: 120 VAC		
Remarks:								

Table 8.2.3 Radiated emission test results

EUT SET UP:

TABLE-TOP

TEST SITE:

OATS

TEST DISTANCE:

3 m

DETECTORS USED:

PEAK / QUASI-PEAK

FREQUENCY RANGE:

30 MHz – 1000 MHz

RESOLUTION BANDWIDTH:

120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
47.00	25.44	22.47	40.0	-17.53	H	1.6	0	Pass
208.94	29.19	25.29	43.5	-18.21	H	1.2	80	
325.04	31.85	30.99	46.0	-15.01	V	1.0	350	
500.05	34.82	33.45	46.0	-12.55	H	1.0	40	
625.07	26.51	24.51	46.0	-21.49	H	1.2	360	
750.09	26.98	24.29	46.0	-21.71	H	1.0	20	

TEST SITE:

OATS

TEST DISTANCE:

3 m

DETECTORS USED:

PEAK / AVERAGE

FREQUENCY RANGE:

1000 MHz – 6000 MHz

RESOLUTION BANDWIDTH:

1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
3660	40.78	74.0	-33.22	26.01	54.0	-27.99	Vert	1.10	10	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 3818	HL 3901	HL 4295	HL 4535	HL 4541	HL 4542	HL 4543	HL 4549
HL 4551	HL 4575	HL 4603	HL 4604	HL 4933			

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance			Verdict: PASS
Date(s): 24-Jul-16 - 31-Jul-16			
Temperature: 24.5 °C	Relative Humidity: 49 %	Air Pressure: 1005 hPa	Power: 120 VAC
Remarks:			


Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

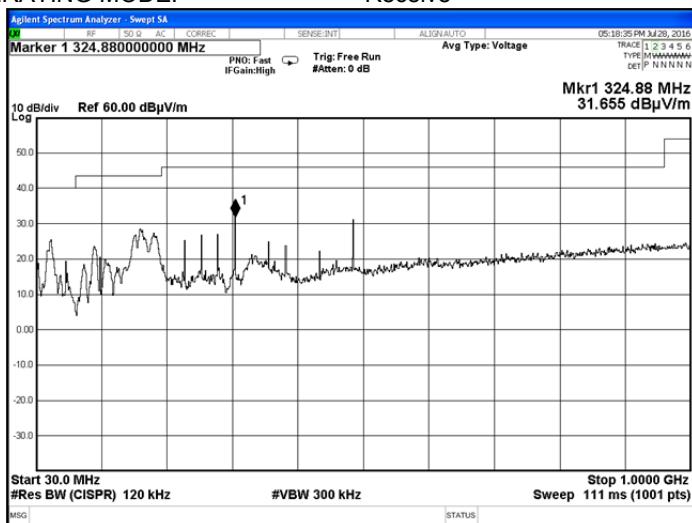

Plot 8.2.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization

TEST SITE: Anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

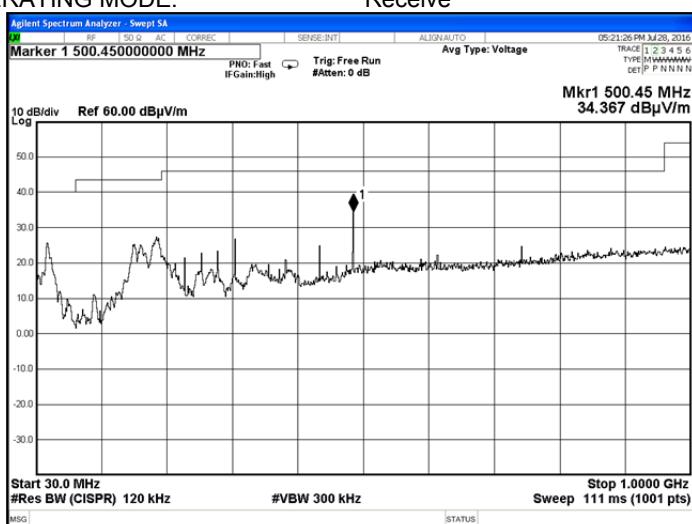




HERMON LABORATORIES

Test specification: FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission			
Test procedure: ANSI C63.4, Sections 8.3 and 12.2.5			
Test mode: Compliance	Verdict: PASS		
Date(s): 24-Jul-16 - 31-Jul-16			
Temperature: 24.5 °C	Relative Humidity: 49 %	Air Pressure: 1005 hPa	Power: 120 VAC
Remarks:			

Plot 8.2.3 Radiated emission measurements above 1000 MHz, vertical antenna polarization


TEST SITE:
LIMIT:
TEST DISTANCE:
EUT OPERATING MODE:

Anechoic chamber
Class B
3 m
Receive

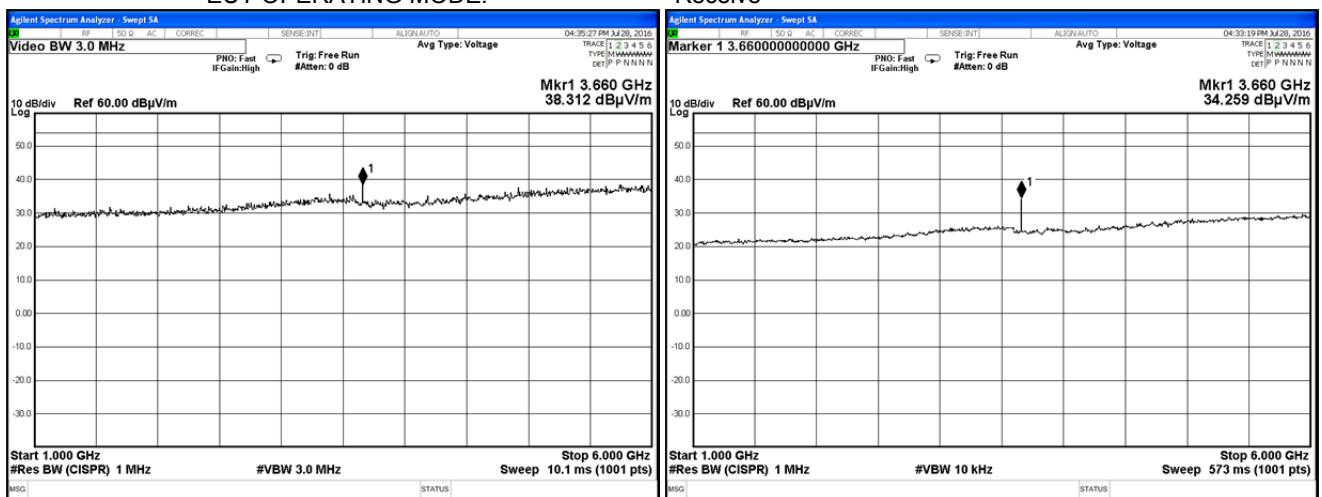**Plot 8.2.4 Radiated emission measurements above 1000 MHz, horizontal antenna polarization**

TEST SITE:
LIMIT:
TEST DISTANCE:
EUT OPERATING MODE:

Anechoic chamber
Class B
3 m
Receive

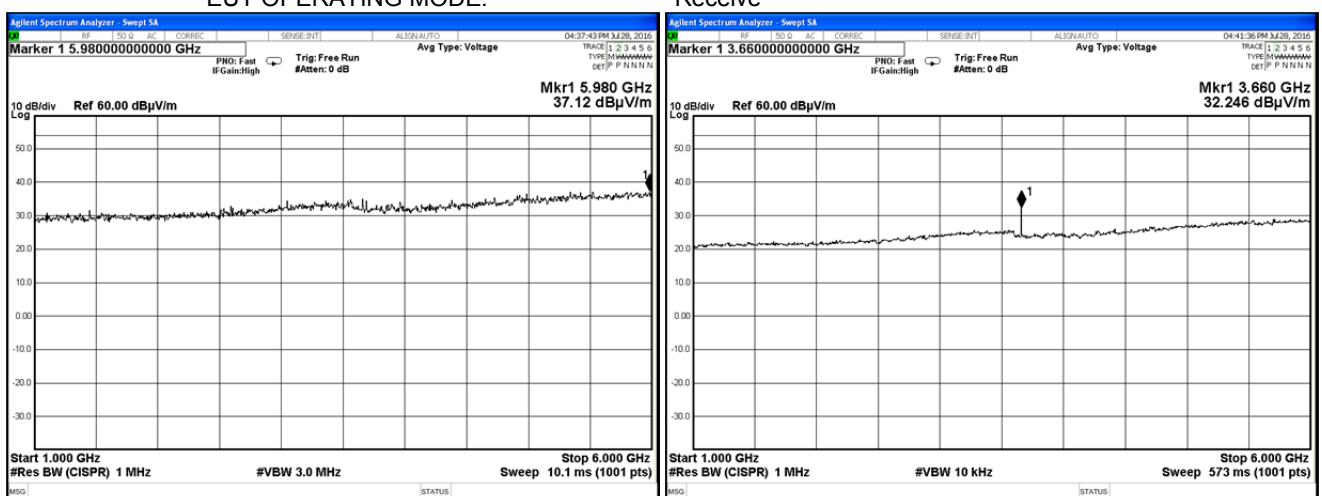



HERMON LABORATORIES

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	13-Oct-15	13-Oct-16
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-15	27-Oct-16
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	12-Oct-15	12-Oct-16
1205	One phase voltage regulator, 2kVA, 0-250V	Hermon Laboratories	TDGC-2	109	21-Mar-16	21-Mar-17
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	08-Sep-15	08-Sep-16
1984	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz, 300 W	EMC Test Systems	3115	9911-5964	28-Mar-16	28-Mar-17
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	08-Sep-15	08-Sep-16
3223	Load 50 Ohm, 35 W, DC-1 GHz	Telewave	TWL-35	NA	20-Jul-16	20-Jul-17
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	07-Dec-15	07-Dec-16
3779	Attenuator, N-type, 10 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N10W5+	NA	31-May-16	31-May-17
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	03-May-16	03-May-17
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLEX 102A	1225/2A	15-Feb-16	15-Feb-17
4295	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	15-Dec-15	15-Dec-16
4527	DC block , 50 Ohm, 10 MHz to 6 GHz	Mini-Circuits	BLK-6-N+	NA	13-Jan-15	13-Jan-17
4535	Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	30-May-16	30-May-17
4541	Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	26-Aug-16	26-Aug-17
4542	Amplifier, 9 kHz to 1 GHz, 32 dB gain	Sonoma Instrument	310	0002A056 39	10-Mar-16	10-Mar-17
4543	Broadband preamplifier, 0.5 to 18 GHz, 35 dB gain	Schwarzbeck mess-elektronik	BBV 9718	9718-134	03-Mar-16	03-Mar-17
4549	Cable RF, 6.8 m, N/N - type, up to 3 GHz	Suhner Switzerland	NA	07262	10-Mar-16	10-Mar-17
4551	Cable RF, 6.6 m, N/N - type, up to 18 GHz	Suhner Switzerland	Sucoflex 104E	22200/4E	10-Mar-16	10-Mar-17
4575	EXA Signal Analyzer, 9 kHz - 26.5 GHz	Agilent Technologies	N9010A	MY480301 10	17-Feb-16	17-Mar-17



HERMON LABORATORIES

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
4603	Horn Antenna, 1 - 18 GHz	Schwarzbeck mess-elektronik	BBHA 9120 D	9120D-611	18-Jun-16	18-Aug-17
4604	Biconilog Antenna, 26 - 2000 MHz	EMCO	3142B	9909-1421	10-May-16	10-May-17
4778	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL4777	Hewlett Packard	8542E	30807A00 262, 3427A001 23	05-Nov-15	05-Nov-16
4932	Microwave preamplifier, 500 MHz to 18 GHz, 40 dB Gain	Com-Power Corporation	PAM-118A	551029	19-Nov-15	19-Nov-16
4933	Active Horn Antenna, 1 GHz to 18 GHz	Com-Power Corporation	AHA-118	701046	04-Sep-15	04-Sep-16



HERMON LABORATORIES

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports). The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

47CFR part 15: 2015	Radio Frequency Devices.
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 9: 2016	Licence- Exempt Radio Apparatus:Category I Equipment
RSS-Gen Issue 4: 2014	General Requirements for Compliance of Radio Apparatus
ICES-003: 2016, Issue 6	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement



HERMON LABORATORIES

13 APPENDIX E Test equipment correction factors

Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories, HL 0447

Frequency, kHz	L1, dB	L2, dB
150	0.11	0.09
170	0.10	0.08
200	0.09	0.07
250	0.08	0.07
300	0.07	0.06
350	0.07	0.06
400	0.08	0.05
500	0.07	0.05
600	0.07	0.05
700	0.06	0.06
800	0.07	0.05
900	0.07	0.05
1000	0.07	0.05
1200	0.08	0.05
1500	0.08	0.06
2000	0.08	0.06
2500	0.08	0.06
3000	0.09	0.07
4000	0.09	0.06
5000	0.10	0.08
7000	0.11	0.09
10000	0.14	0.12
15000	0.19	0.17
20000	0.26	0.24
30000	0.45	0.45

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



HERMON LABORATORIES

**Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor

Horn antenna

Schwarzbeck mess-elektronik, Model BBHA 9120 D, serial number: 9120D-611, HL 4603

Frequency, MHz	Measured antenna factor, dB/m
1000	25.2
1500	25.7
2000	26.1
2500	27.5
3000	28.3
3500	29.0
4000	30.0
4500	30.8
5000	31.9
5500	32.2
6000	33.1
6500	34.6
7000	35.9
7500	36.6
8000	37.2
8500	36.6
9000	36.9
9500	37.5
10000	38.4
10500	39.5
11000	40.3
11500	40.0
12000	39.2
12500	38.7
13000	39.6
13500	40.8
14000	41.6
14500	42.1
15000	41.2
15500	39.1
16000	38.5
16500	39.9
17000	41.0
17500	44.1
18000	55.6

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

Antenna factor
Biconilog Antenna, 26 - 2000 MHz
EMCO, Model 3142B, serial number: 9909-1421, HL 4604

Frequency, MHz	Measured, dB/m
30	17.9
35	14.8
40	12.1
45	10.0
50	8.7
60	8.1
70	7.3
80	6.6
90	7.6
100	7.9
120	7.0
140	7.7
160	9.6
180	10.0
200	10.2
250	12.7
300	13.4
400	16.7
500	18.2
600	20.2
700	22.0
800	22.7
900	24.1
1000	25.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m



HERMON LABORATORIES

Antenna factor, HL 4933

**Active Horn Antenna Factor Calibration**

1 GHz to 18 GHz

Equipment:	ACTIVE HORN ANTENNA				
Model:	AHA-118				
Serial Number:	701046				
Calibration Distance:	3 Meter				
Polarization:	Horizontal				
Calibration Date:	11/12/2014				
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			
Calibration according to ARP 958					
Antenna Factor to be added to receiver reading:					
Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)					



HERMON LABORATORIES

Cable loss
Cable coaxial, RG-214/U, N type-N type, 17 m
Teldor, HL 3612

Frequency, MHz	Measured, dB
0.10	0.04
10.0	0.37
20.0	0.54
30.0	0.69
40.0	0.80
50	0.91
60	1.00
70	1.08
80	1.16
90	1.24
100	1.31
150	1.63
200	1.90
250	2.15
300	2.38
350	2.60
400	2.80
450	3.00
500	3.18
550	3.36
600	3.54
650	3.71
700	3.87
750	4.04
800	4.20
850	4.35
900	4.51
950	4.66
1000	4.81



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52



HERMON LABORATORIES

Cable loss
**Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner, S/N 4295,
Sucoflex P103, HL 4295**

Frequency, MHz	Cable loss, dB						
10	0.11	5000	2.09	10200	2.97	15400	3.63
30	0.18	5100	2.12	10300	3.01	15500	3.65
50	0.23	5200	2.13	10400	3.00	15600	3.63
100	0.31	5300	2.16	10500	3.05	15700	3.64
200	0.38	5400	2.19	10600	3.09	15800	3.64
300	0.43	5500	2.21	10700	3.05	15900	3.66
400	0.52	5600	2.21	10800	3.09	16000	3.71
500	0.60	5700	2.24	10900	3.10	16100	3.67
600	0.67	5800	2.24	11000	3.08	16200	3.71
700	0.72	5900	2.25	11100	3.11	16300	3.70
800	0.78	6000	2.27	11200	3.12	16400	3.71
900	0.83	6100	2.25	11300	3.12	16500	3.72
1000	0.89	6200	2.29	11400	3.20	16600	3.84
1100	0.94	6300	2.34	11500	3.16	16700	3.78
1200	0.98	6400	2.37	11600	3.16	16800	3.85
1300	1.03	6500	2.33	11700	3.20	16900	3.88
1400	1.06	6600	2.34	11800	3.19	17000	3.85
1500	1.11	6700	2.39	11900	3.21	17100	3.88
1600	1.14	6800	2.46	12000	3.28	17200	3.92
1700	1.19	6900	2.45	12100	3.23	17300	3.90
1800	1.22	7000	2.44	12200	3.26	17400	4.00
1900	1.26	7100	2.43	12300	3.30	17500	4.02
2000	1.30	7200	2.44	12400	3.25	17600	4.00
2100	1.34	7300	2.51	12500	3.26	17700	3.96
2200	1.37	7400	2.54	12600	3.30	17800	4.01
2300	1.40	7500	2.49	12700	3.26	17900	4.02
2400	1.44	7600	2.52	12800	3.34	18000	4.08
2500	1.47	7700	2.59	12900	3.37		
2600	1.50	7800	2.57	13000	3.30		
2700	1.55	7900	2.55	13100	3.35		
2800	1.58	8000	2.57	13200	3.31		
2900	1.60	8100	2.58	13300	3.33		
3000	1.63	8200	2.64	13400	3.42		
3100	1.64	8300	2.70	13500	3.43		
3200	1.67	8400	2.65	13600	3.40		
3300	1.69	8500	2.66	13700	3.47		
3400	1.73	8600	2.68	13800	3.45		
3500	1.74	8700	2.70	13900	3.43		
3600	1.76	8800	2.74	14000	3.52		
3700	1.79	8900	2.74	14100	3.51		
3800	1.82	9000	2.76	14200	3.54		
3900	1.85	9100	2.82	14300	3.55		
4000	1.87	9200	2.79	14400	3.52		
4100	1.90	9300	2.82	14500	3.52		
4200	1.92	9400	2.83	14600	3.56		
4300	1.93	9500	2.83	14700	3.55		
4400	1.94	9600	2.86	14800	3.55		
4500	1.97	9700	2.93	14900	3.59		
4600	1.99	9800	2.89	15000	3.56		
4700	2.01	9900	2.91	15100	3.59		
4800	2.02	10000	2.94	15200	3.59		
4900	2.04	10100	2.94	15300	3.59		



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type
Suhner Switzerland, HL 4535

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.10	1700	1.79	4400	3.53
15	0.13	1800	1.86	4500	3.60
20	0.15	1900	1.93	4600	3.72
30	0.18	2000	2.00	4700	3.80
40	0.21	2100	2.06	4800	3.87
50	0.24	2200	2.13	4900	3.94
60	0.26	2300	2.19	5000	3.99
70	0.29	2400	2.25	5100	4.06
80	0.31	2500	2.32	5200	4.12
90	0.33	2600	2.38	5300	4.17
100	0.35	2700	2.45	5400	4.25
150	0.43	2800	2.51	5500	4.31
200	0.50	2900	2.57	5600	4.40
300	0.63	3000	2.64	5700	4.47
400	0.74	3100	2.73	5800	4.54
500	0.85	3200	2.79	5900	4.64
600	0.94	3300	2.86	6000	4.73
700	1.03	3400	2.91	6100	4.79
800	1.12	3500	2.97	6200	4.89
900	1.20	3600	3.02	6300	5.00
1000	1.28	3700	3.07	6400	5.06
1100	1.35	3800	3.14	6500	5.13
1200	1.43	3900	3.20		
1300	1.50	4000	3.25		
1400	1.58	4100	3.32		
1500	1.65	4200	3.38		
1600	1.72	4300	3.46		



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type
Suhner Switzerland, HL 4541

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.02	1700	0.45
15	0.03	1800	0.46
20	0.03	1900	0.48
30	0.04	2000	0.49
40	0.04	2100	0.52
50	0.05	2200	0.54
60	0.06	2300	0.55
70	0.06	2400	0.56
80	0.07	2500	0.58
90	0.07	2600	0.59
100	0.08	2700	0.61
150	0.10	2800	0.63
200	0.12	2900	0.64
300	0.15	3000	0.67
400	0.18	3100	0.70
500	0.20	3200	0.74
600	0.23	3300	0.77
700	0.25	3400	0.80
800	0.28	3500	0.82
900	0.30	3600	0.86
1000	0.31	3700	0.88
1100	0.33	3800	0.94
1200	0.35	3900	0.95
1300	0.37	4000	0.99
1400	0.39		
1500	0.41		
1600	0.43		



HERMON LABORATORIES

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT