

# TEST REPORT

**ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (DTS) and subpart B,  
RSS-247 issue 1, ICES-003 Issue 6:2016**

FOR:

**Triple Plus Ltd.  
Shut Off actuator of  
Cloud Leak Management system  
Models: ZBS-SHAMAP-1-20,  
SOV1  
FCC ID:2AFOIZBSASOU20  
IC:20798-ZBSASOU20**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT .....	5
6.4	EUT test positions .....	6
6.5	Transmitter characteristics .....	7
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements .....	8
7.1	Minimum 6 dB bandwidth .....	8
7.2	Peak output power .....	12
7.3	Field strength of spurious emissions .....	18
7.4	Band edge radiated emissions .....	40
7.5	Maximum power spectral density (PSD) .....	44
7.6	Antenna requirements .....	49
8	Unintentional emissions .....	50
8.1	Radiated emission measurements .....	50
9	APPENDIX A Test equipment and ancillaries used for tests.....	54
10	APPENDIX B Measurement uncertainties.....	55
11	APPENDIX C Test laboratory description .....	56
12	APPENDIX D Specification references .....	56
13	APPENDIX E Test equipment correction factors.....	57
14	APPENDIX F Abbreviations and acronyms .....	67
15	APPENDIX G Manufacturer's declaration .....	68

## 1 Applicant information

**Client name:** Triple Plus Ltd.  
**Address:** 5 Hamada street, Yokneam 2069200, Israel  
**Telephone:** +972 72 211 7711  
**Fax:** +972 221 1379  
**E-mail:** jacob.goren@tripleplus.io  
**Contact name:** Mr. Jacob Goren

## 2 Equipment under test attributes

**Product name:** Shut off actuator of Cloud Leak Management system  
**Product type:** Transceiver operating in 2.4 GHz band  
**Model(s):** ZBS-SHAMAP-1-20  
**Serial number:** 90-7A-F1-00-52-3A-01-C7  
**Hardware version:** 1.0  
**Software release:** 1.0.0.12  
**Receipt date** 21-Feb-17

## 3 Manufacturer information

**Manufacturer name:** Triple Plus Ltd.  
**Address:** 5 Hamada street, Yokneam 2069200, Israel  
**Telephone:** +972 72 211 7711  
**Fax:** +972 221 1379  
**E-Mail:** jacob.goren@tripleplus.io  
**Contact name:** Mr. Jacob Goren

## 4 Test details

**Project ID:** 29260  
**Location:** Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel  
**Test started:** 21-Feb-17  
**Test completed:** 05-Mar-17  
**Test specification(s):** FCC 47CFR part 15 subpart C § 15.247 (DTS) and subpart B;  
RSS-247 issue 1, RSS-Gen issue 4, ICES-003 issue 6:2016



## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
FCC section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	Pass
FCC section 15.247(b)3/ RSS-247 section 5.4(4), Peak output power	Pass
FCC section 15.247(i) / RSS-102 section 2.5.2, RF exposure	Pass, the exhibit to the application of certification is provided
FCC section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
FCC section 15.247(d)/ RSS-247 section 5.5, Emissions at band edges	Pass
FCC section 15.247(e) / RSS-247 section 5.2(2), Peak power density	Pass
FCC section 15.203 / RSS-Gen section 8.3, Antenna requirement	Pass
FCC section 15.207(a) / RSS-Gen section 8.8, Conducted emission	Not required
<b>Unintentional emissions</b>	
FCC section 15.107 / ICES-003, Section 6.1 class B, Conducted emission at AC power port	Not required
FCC section 15.109 / RSS-Gen, Section 7.1.2/ ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. K. Zushchyk, test engineer	March 5, 2017	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	March 19, 2017	
Approved by:	Mr. M. Nikishin, EMC and radio group leader	March 28, 2017	


## 6 EUT description

### 6.1 General information

The EUT, shut off actuator transceiver, is a part of Cloud Leakage Management (CLM) system. The EUT, installed on a water valve, shuts off the water pipe when receives a command from the HUB. The unit is powered by a battery and utilizes the integral antenna.

According to manufacturer's declaration provided in Appendix G of the test report, both devices, model ZBS-SHAMAP-1-20 and model SOV1 are electrically/electronically identical. That is why only ZBS-SHAMAP-1-20 was tested.

### 6.2 Test configuration

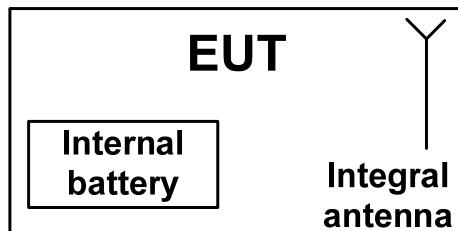

### 6.3 Changes made in EUT

No changes were implemented in the EUT during testing.

## 6.4 EUT test positions

Photograph 6.4.1 EUT in X-axis orthogonal position



Photograph 6.4.2 EUT in Y-axis orthogonal position



Photograph 6.4.3 EUT in Z-axis orthogonal position



## 6.5 Transmitter characteristics

Type of equipment									
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)								
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)								
	Plug-in card (Equipment intended for a variety of host systems)								
Intended use	Condition of use								
fixed	Always at a distance more than 2 m from all people								
<input checked="" type="checkbox"/>	mobile								
portable	Always at a distance more than 20 cm from all people								
May operate at a distance closer than 20 cm to human body									
Assigned frequency range	2400-2483.5 MHz								
Operating frequency range	2405 – 2480 MHz								
Maximum rated output power	At transmitter 50 Ω RF output connector			NA					
	Peak output power			18.09 dBm					
Is transmitter output power variable?		X	No						
				continuous variable					
		Yes		stepped variable with stepsize					
				dB					
				minimum RF power					
				dBm					
				maximum RF power					
				dBm					
Antenna connection									
unique coupling	standard connector			X	integral				
					with temporary RF connector				
					without temporary RF connector				
Antenna/s technical characteristics									
Type	Manufacturer	Model number	Gain						
Internal	Johanson Technology	P/N 2450AT18D0100	1.5 dBi						
Type of modulation	OQPSK								
Modulating test signal (baseband)	PRBS								
Transmitter power source									
X	Battery	Nominal rated voltage	6.0 VDC	Battery type	4 x 3V batteries (CR123)				
	DC	Nominal rated voltage	VDC						
	AC mains	Nominal rated voltage	VAC	Frequency					



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth		
<b>Test procedure:</b> ANSI C63.10 section 11.8.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 26-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

## 7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247 requirements

### 7.1 Minimum 6 dB bandwidth

#### 7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0		
2400.0 – 2483.5	6.0	
5725.0 – 5850.0		500.0

\* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

#### 7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier.
- 7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 The 6 dB bandwidth test setup





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth				
<b>Test procedure:</b>	ANSI C63.10 section 11.8.1			
<b>Test mode:</b>	Compliance			
<b>Date(s):</b>	26-Feb-17		<b>Verdict:</b>	PASS
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1019 hPa	<b>Power:</b>	Battery
<b>Remarks:</b>				

**Table 7.1.2 The 6 dB bandwidth test results**

ASSIGNED FREQUENCY BAND: 2400.0 – 2483.5 MHz  
 DETECTOR USED: Peak  
 SWEEP TIME: Auto  
 RESOLUTION BANDWIDTH: 100 kHz  
 VIDEO BANDWIDTH: 300 kHz  
 MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc  
 MODULATION: OQPSK  
 MODULATING SIGNAL: PRBS

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
2405.00	1658.00	500.00	1158.00	PASS
Mid frequency				
2440.00	1655.00	500.00	1155.00	PASS
High frequency				
2480.00	1655.00	500.00	1155.00	PASS

**Reference numbers of test equipment used**

HL 3818	HL 4114	HL 5111				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth		
<b>Test procedure:</b> ANSI C63.10 section 11.8.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 26-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

**Plot 7.1.1 The 6 dB bandwidth test result at low frequency**

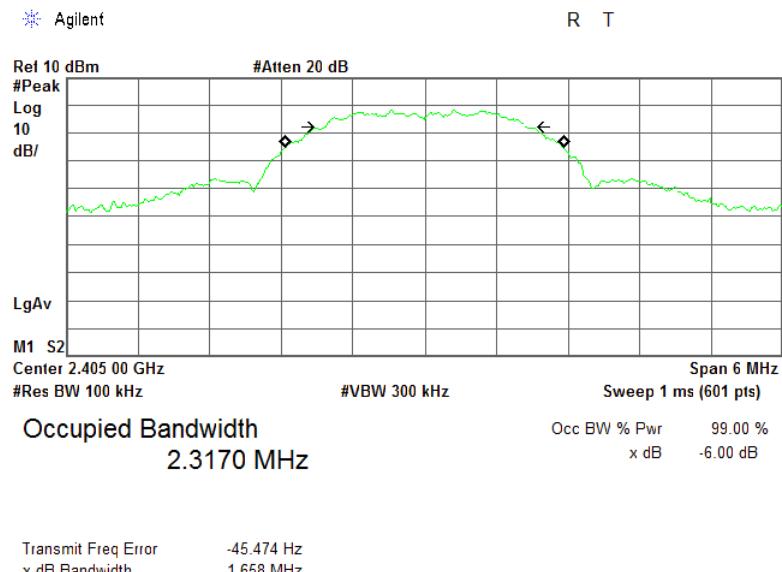

**Plot 7.1.2 The 6 dB bandwidth test result at mid frequency**

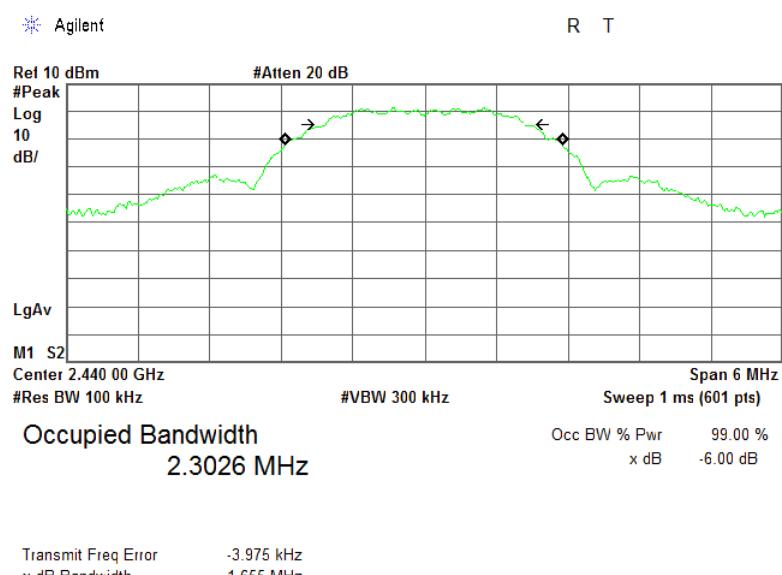




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth		
<b>Test procedure:</b> ANSI C63.10 section 11.8.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 26-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Plot 7.1.3 The 6 dB bandwidth test result at high frequency

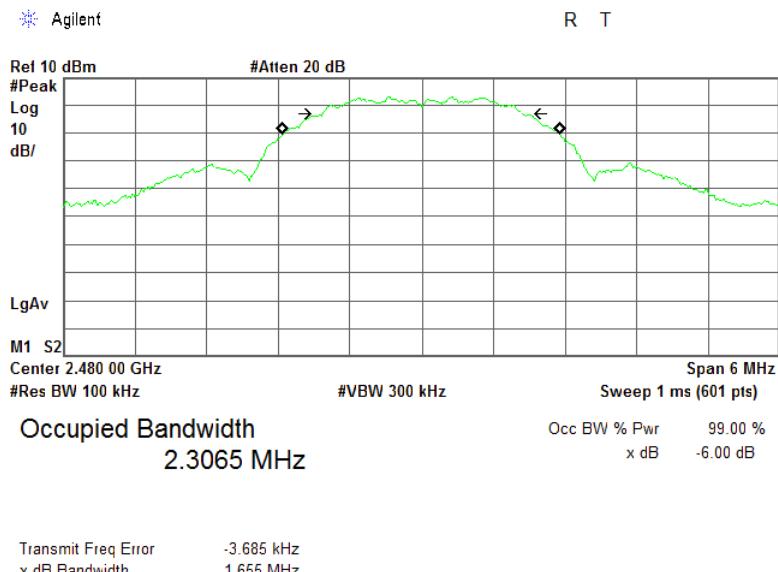



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

## 7.2 Peak output power

### 7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)**
		W	dBm	
902.0 – 928.0				
2400.0 – 2483.5	6.0	1.0	30.0	131.2
5725.0 – 5850.0				

\*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;

without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;

by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

\*\*- Equivalent field strength limit was calculated from the peak output power as follows:  $E = \sqrt{30 \times P \times G} / r$ , where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

### 7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V}/\text{m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$


7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Figure 7.2.1 Setup for carrier field strength measurements

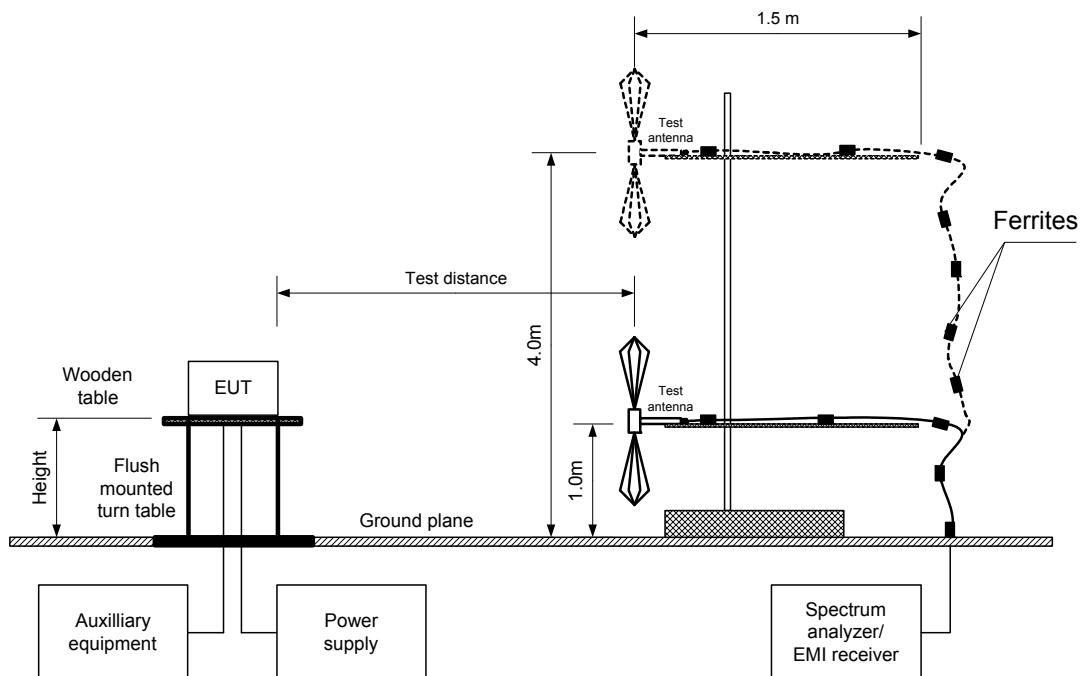



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		

**Table 7.2.2 Peak output power test results**

ASSIGNED FREQUENCY:	2400 – 2483.5 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT HEIGHT:	1.5 m
DETECTOR USED:	Peak
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
MODULATION:	OQPSK
MODULATING SIGNAL:	PRBS
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
EUT 6 dB BANDWIDTH:	Low – 1658.00 kHz Mid – 1655.00 kHz High – 1655.00 kHz
RESOLUTION BANDWIDTH:	3 MHz
VIDEO BANDWIDTH:	10 MHz

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2405.00	114.15	Horizontal	1.13	245	1.5	17.45	30.00	-11.05	Pass
2440.00	114.75	Horizontal	1.27	49	1.5	18.05	30.00	-10.45	Pass
2480.00	114.79	Horizontal	1.27	77	1.5	18.09	30.00	-10.41	Pass

\*- EUT front panel refer to 0 degrees position of turntable.

\*\*- Peak output power was calculated from the field strength of carrier as follows:  $P = (E \times d)^2 / (30 \times G)$ , where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB

\*\*\*- Margin = Peak output power – specification limit.

**Reference numbers of test equipment used**

HL 1984	HL 4353	HL 4360	HL 5103					
---------	---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Plot 7.2.1 Field strength of carrier at low frequency (X-axis EUT position)

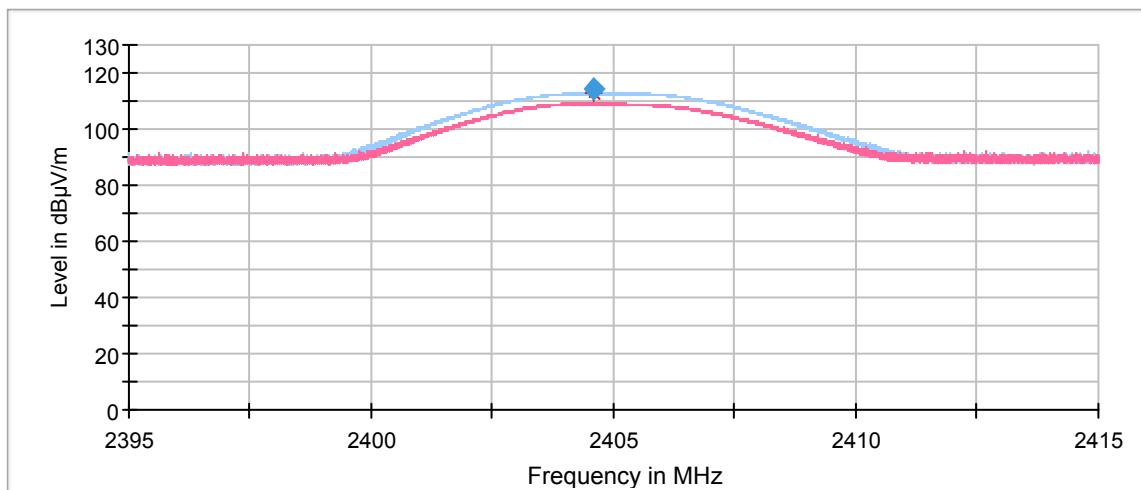

Plot 7.2.2 Field strength of carrier at low frequency (Y-axis EUT position)

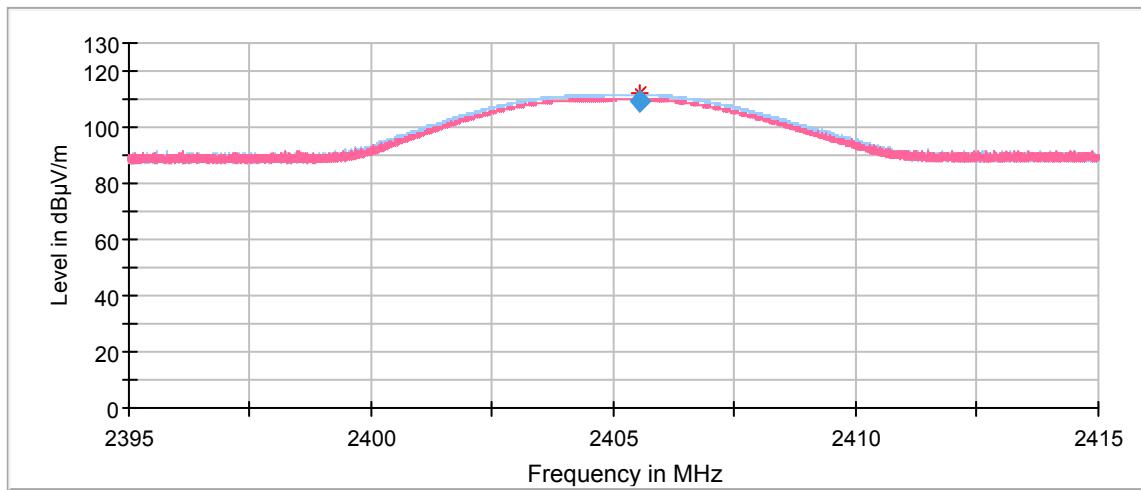





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Plot 7.2.3 Field strength of carrier at low frequency (Z-axis EUT position)

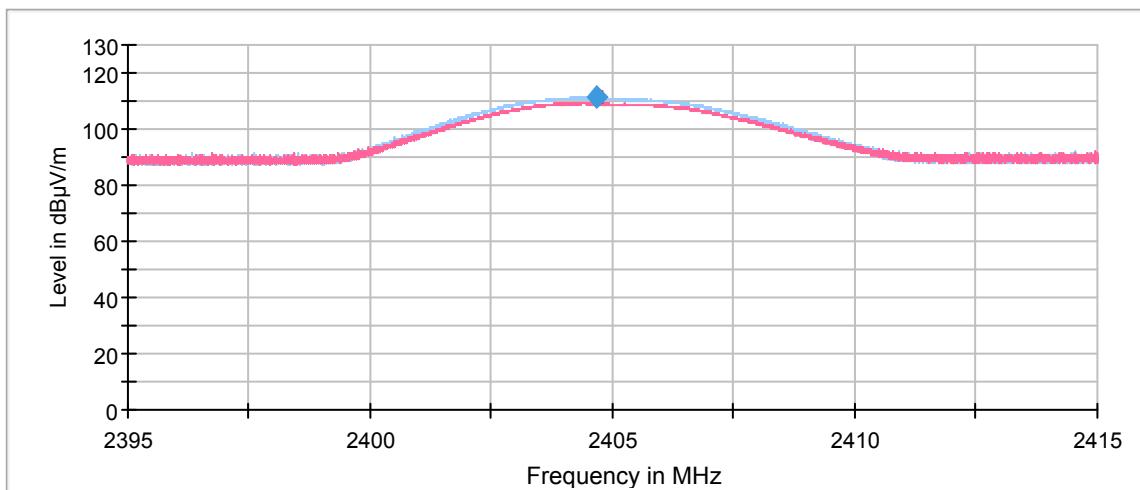

Plot 7.2.4 Field strength of carrier at mid frequency (X-axis EUT position)

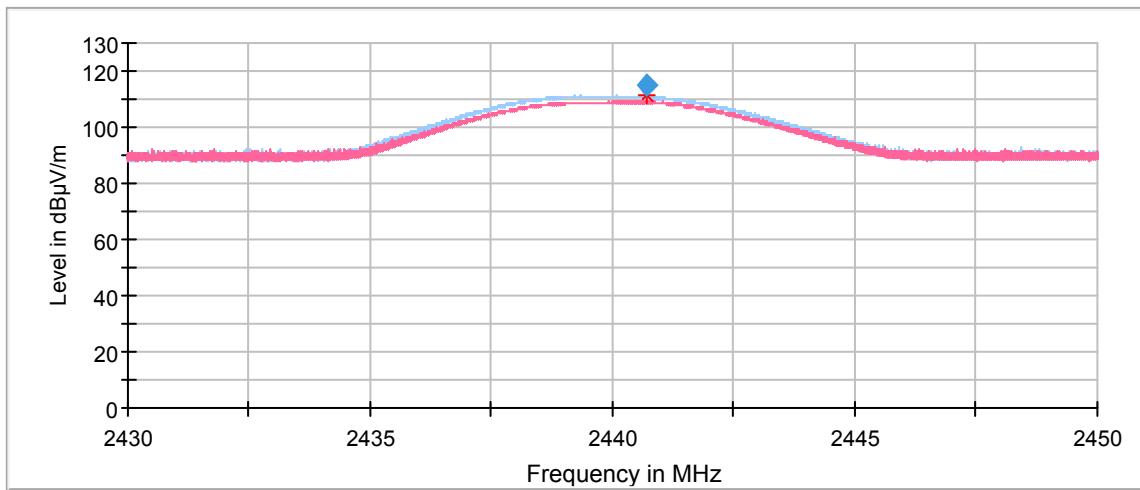




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power		
<b>Test procedure:</b> ANSI C63.10 section 11.9.1.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 21-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 42 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Plot 7.2.5 Field strength of carrier at high frequency (X-axis EUT position)

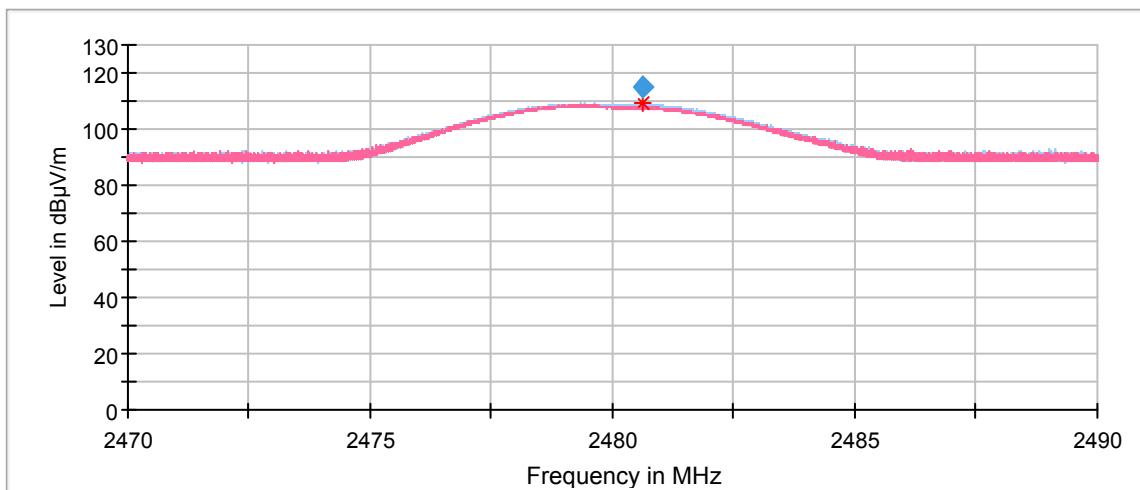



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		

## 7.3 Field strength of spurious emissions

### 7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***	
	Peak	Quasi Peak	Average		
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0	
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
1000 – 10 <sup>th</sup> harmonic	74.0	NA	54.0		

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:  

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2)$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\*- The limit decreases linearly with the logarithm of frequency.

\*\*\* - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

### 7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

### 7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, Figure 1.1.3, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz

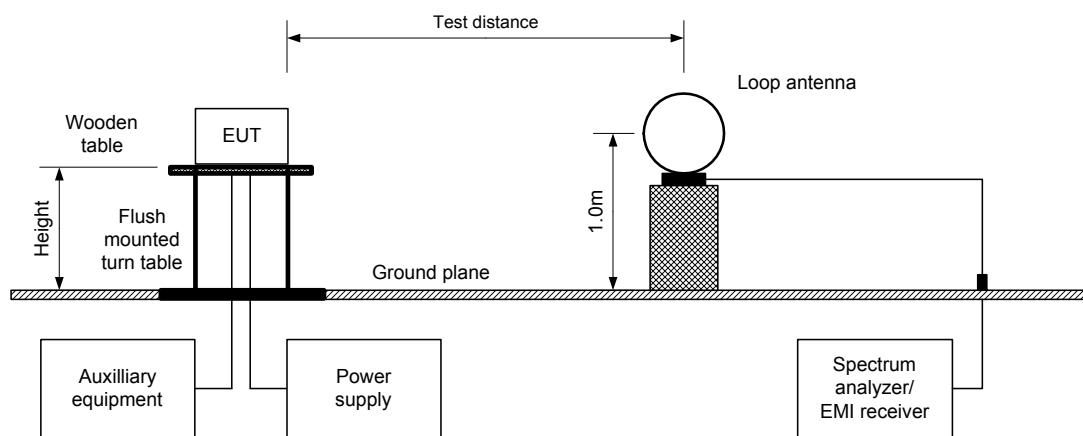



HERMON LABORATORIES

<b>Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions</b>		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Figure 7.3.2 Setup for spurious emission field strength measurements in 30 -1000 MHz


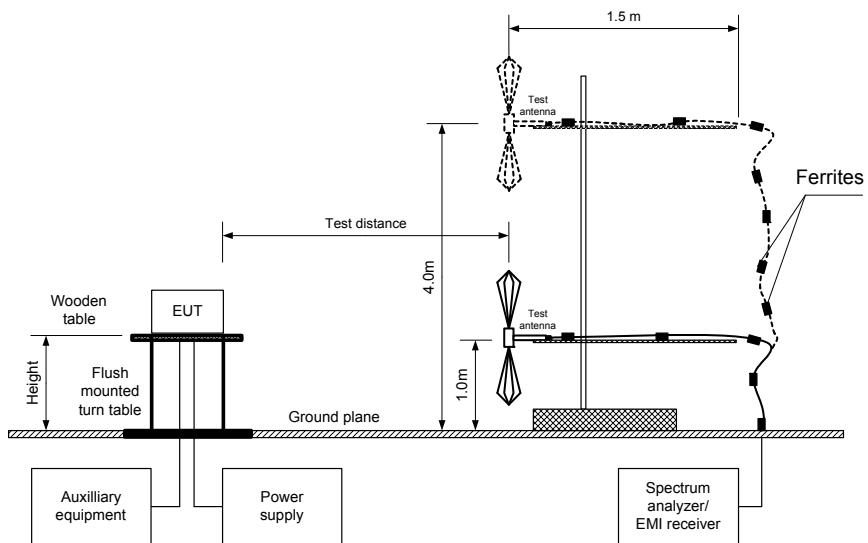


Figure 7.3.3 Setup for spurious emission field strength measurements above 1000 MHz



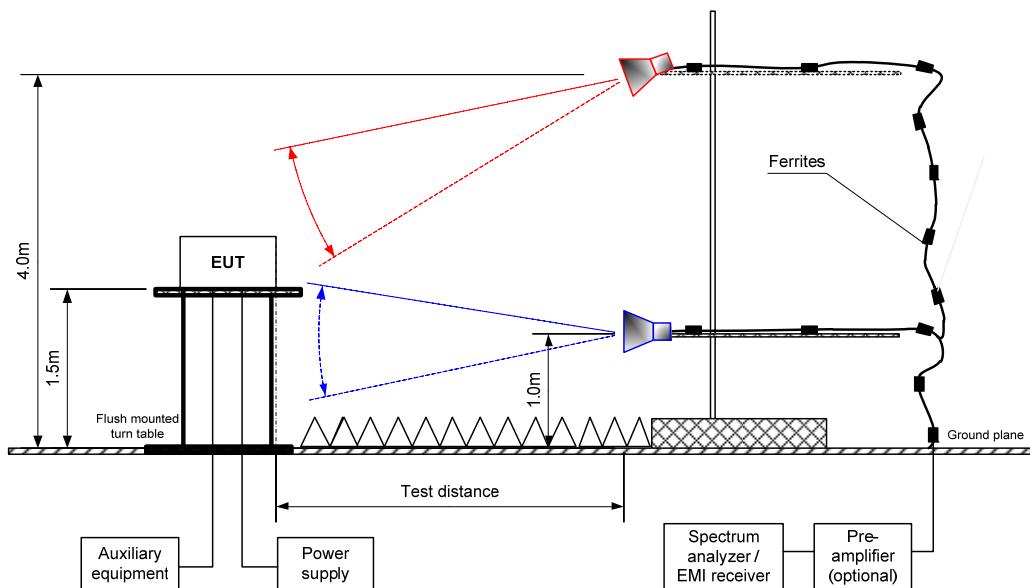

HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

**Table 7.3.2 Field strength of emissions outside restricted bands**

ASSIGNED FREQUENCY:	2400 – 2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 25000 MHz
TEST DISTANCE:	3 m
MODULATION:	OQPSK
MODULATING SIGNAL:	PRBS
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
TRANSMITTER OUTPUT POWER:	18.45 dBm at low carrier frequency 19.15 dBm at mid carrier frequency 19.19 dBm at high carrier frequency
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
<b>Low carrier frequency</b>									
7216.57	43.37	Vertical	2.5	315	107.41	64.04	20.00	44.04	Pass
<b>Mid carrier frequency</b>									
No emissions were found									
<b>High carrier frequency</b>									
No emissions were found									

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		

**Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands**

ASSIGNED FREQUENCY:	2400 – 2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 25000 MHz
TEST DISTANCE:	3 m
MODULATION:	OQPSK
MODULATING SIGNAL:	PRBS
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
TRANSMITTER OUTPUT POWER:	18.45 dBm at low carrier frequency 19.15 dBm at mid carrier frequency 19.19 dBm at high carrier frequency
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1000 kHz
TEST ANTENNA TYPE:	Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)			Verdict	
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)		
<b>Low carrier frequency</b>											
4811.22	Vertical	2.0	330	54.20	74.00	-19.80	54.20	21.24	54.00	-32.76	Pass
<b>Mid carrier frequency</b>											
4881.23	Horizontal	2.0	0	55.04	74.00	-18.96	55.04	22.08	54.00	-31.92	Pass
7321.63	Vertical	1.9	10	51.57	74.00	-22.43	51.57	18.61	54.00	-35.39	
<b>High carrier frequency</b>											
4958.98	Vertical	1.7	45	55.79	74.00	-18.21	55.79	22.83	54.00	-31.17	Pass
7441.77	Vertical	1.8	0	51.77	74.00	-22.23	51.77	18.81	54.00	-35.19	

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin = Measured field strength - specification limit.

\*\*\*- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

**Table 7.3.4 Average factor calculation**

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
2.25	1001.00	NA	NA	NA	-32.96

\*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b>	23-Feb-17	
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		<b>Power:</b> Battery

**Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands**

ASSIGNED FREQUENCY:	2400 – 2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	OQPSK
MODULATING SIGNAL:	PRBS
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
TRANSMITTER OUTPUT POWER:	18.45 dBm at low carrier frequency 19.15 dBm at mid carrier frequency 19.19 dBm at high carrier frequency
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict			
<b>Low carrier frequency</b>											
No emissions were found											
<b>Mid carrier frequency</b>											
No emissions were found											
<b>High carrier frequency</b>											
No emissions were found											

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 0604	HL 3818	HL 3901	HL 4353	HL 4360	HL 4933	HL 4956
HL 5103							

Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions					
<b>Test procedure:</b> ANSI C63.10 section 11.12.1					
<b>Test mode:</b> Compliance			<b>Verdict:</b>		PASS
<b>Date(s):</b> 23-Feb-17					
<b>Temperature:</b> 25 °C		<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa		<b>Power:</b> Battery
<b>Remarks:</b>					

**Table 7.3.6 Restricted bands according to FCC section 15.205**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

**Table 7.3.7 Restricted bands according to RSS-Gen**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		


**Plot 7.3.1 Radiated emission measurements at the low carrier frequency**

TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

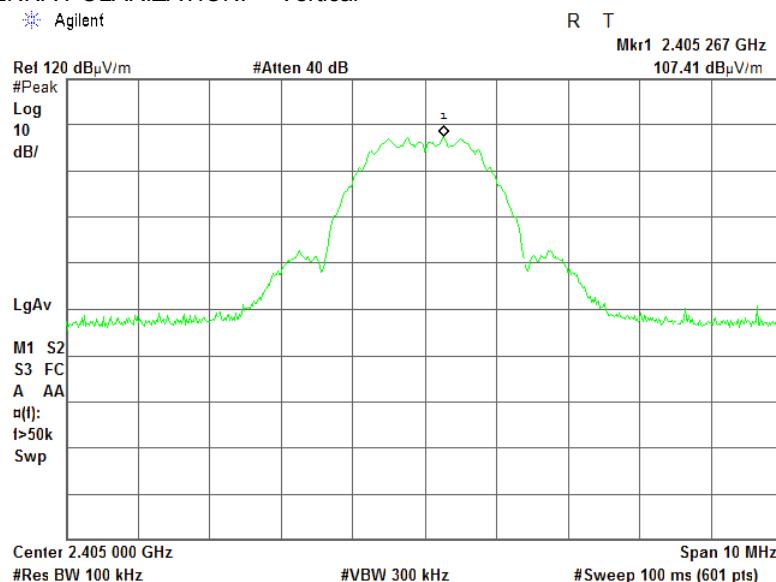

**Plot 7.3.2 Radiated emission measurements at the low carrier frequency**

TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

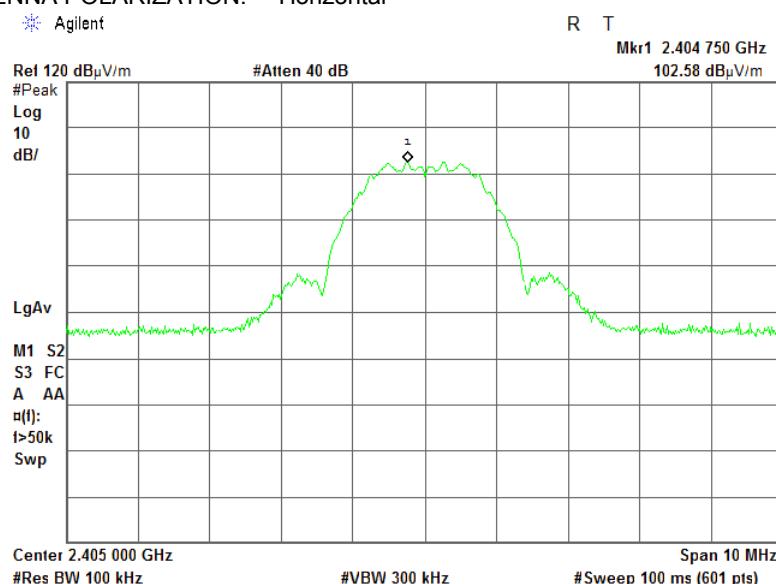





HERMON LABORATORIES

<b>Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions</b>			
<b>Test procedure:</b> ANSI C63.10 section 11.12.1			
<b>Test mode:</b> Compliance			<b>Verdict:</b> <b>PASS</b>
<b>Date(s):</b> 23-Feb-17			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Plot 7.3.3 Radiated emission measurements at the mid carrier frequency**

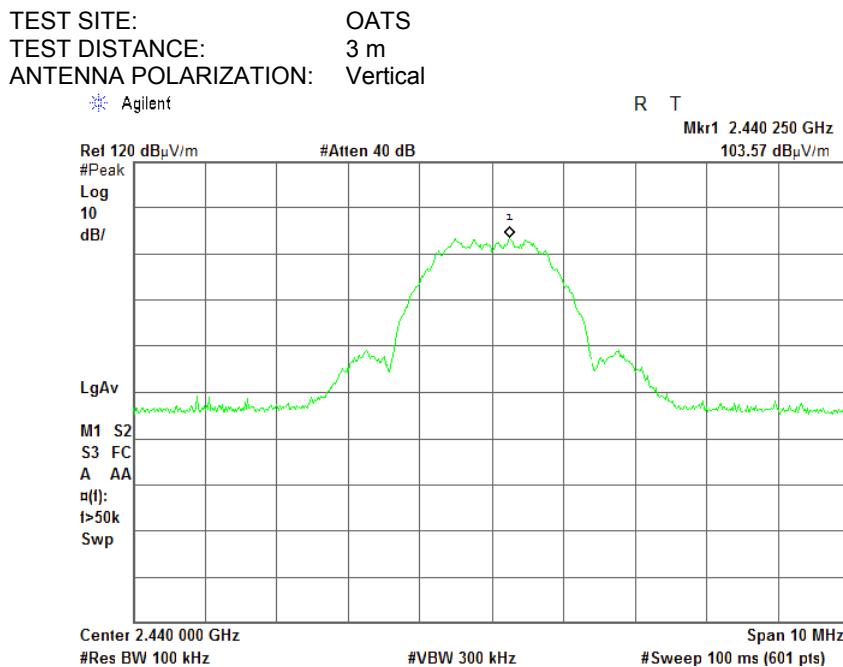

**Plot 7.3.4 Radiated emission measurements at the mid carrier frequency**

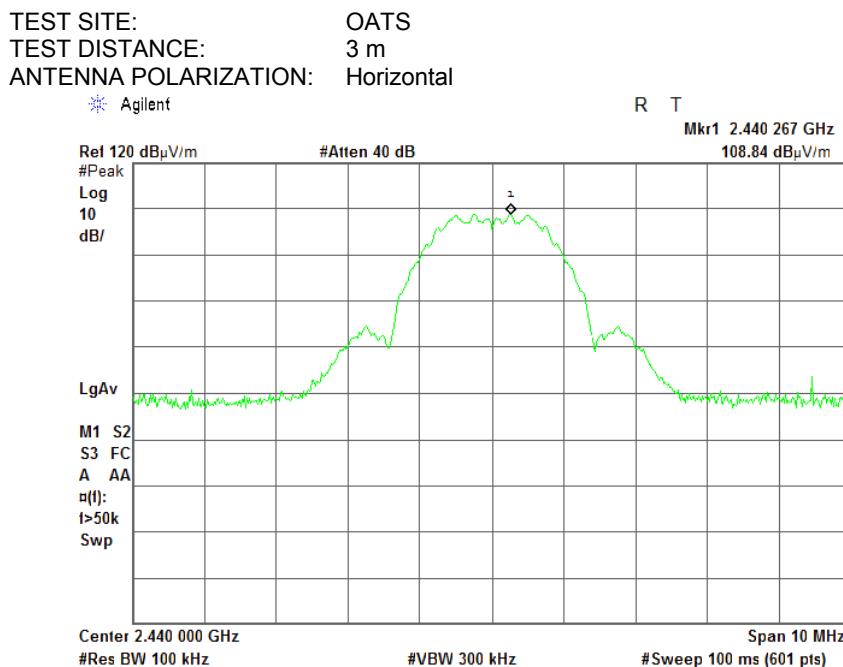




HERMON LABORATORIES

<b>Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions</b>			
<b>Test procedure:</b> ANSI C63.10 section 11.12.1			
<b>Test mode:</b> Compliance			<b>Verdict:</b> <b>PASS</b>
<b>Date(s):</b> 23-Feb-17			
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			


**Plot 7.3.5 Radiated emission measurements at the high carrier frequency**

TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical

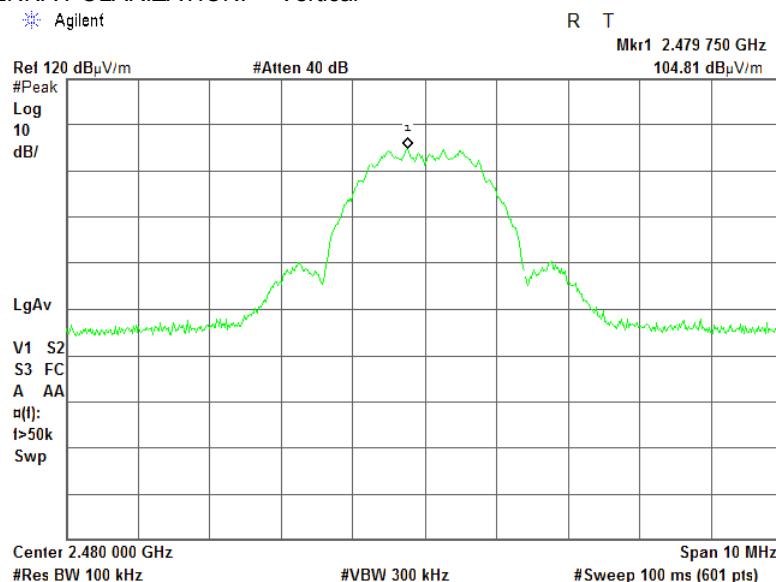

**Plot 7.3.6 Radiated emission measurements at the high carrier frequency**

TEST SITE: OATS  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Horizontal

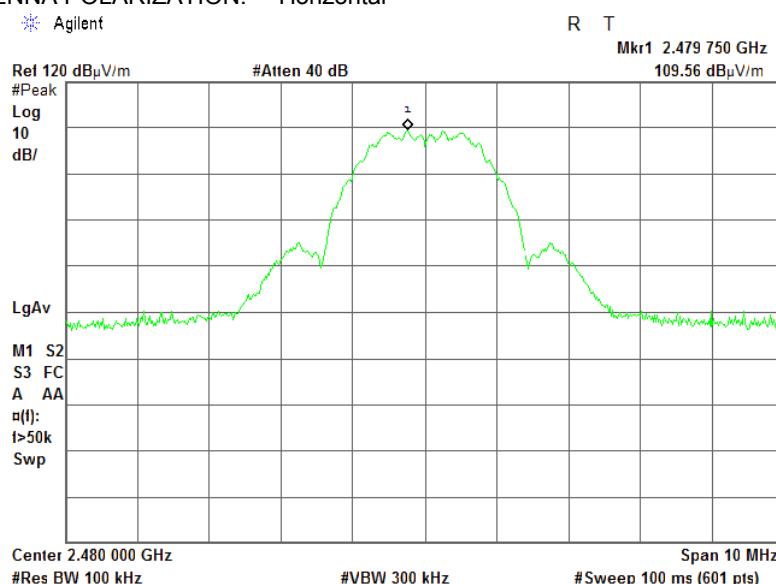




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		


Plot 7.3.7 Radiated emission measurements from 0.009 to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

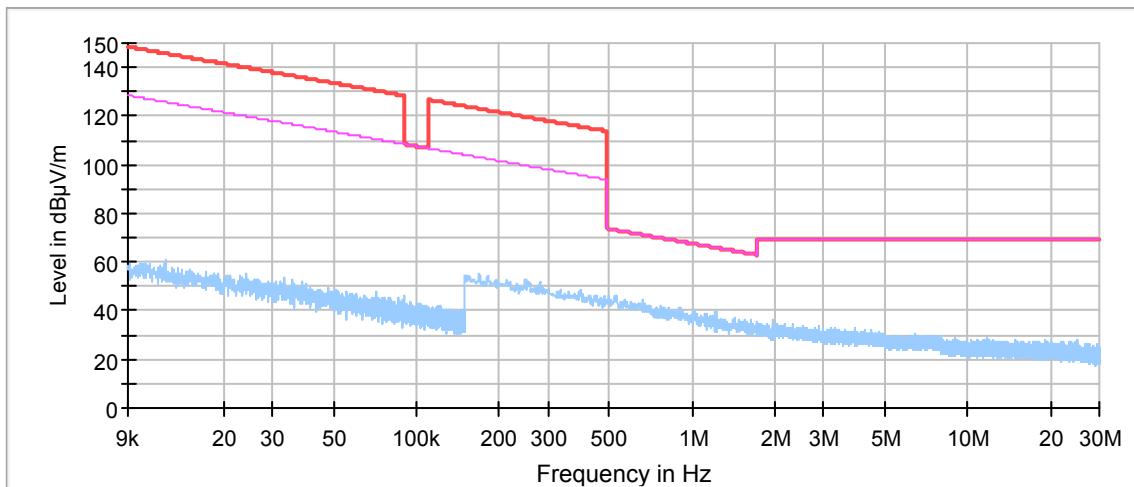

Plot 7.3.8 Radiated emission measurements from 0.009 to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

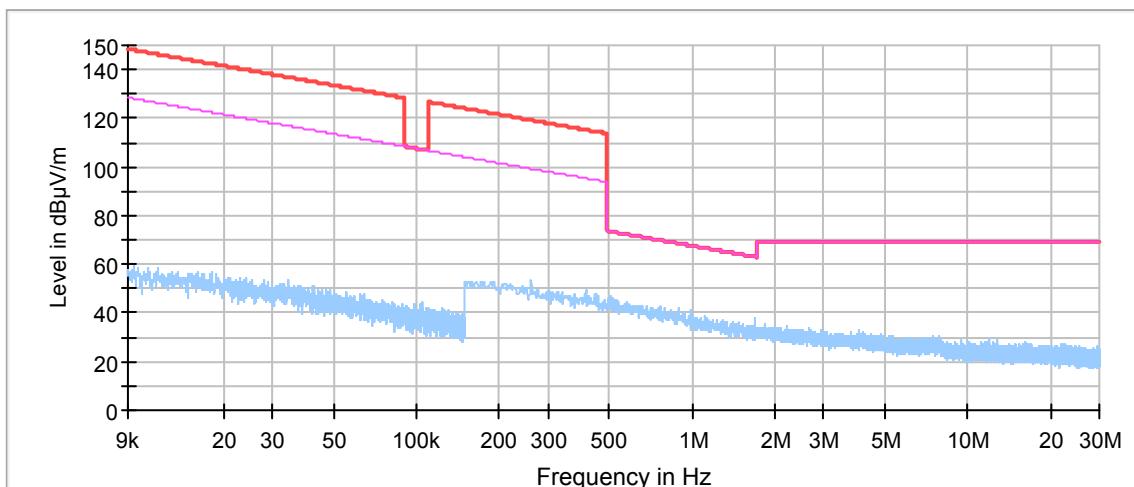




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		


Plot 7.3.9 Radiated emission measurements from 0.009 to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m

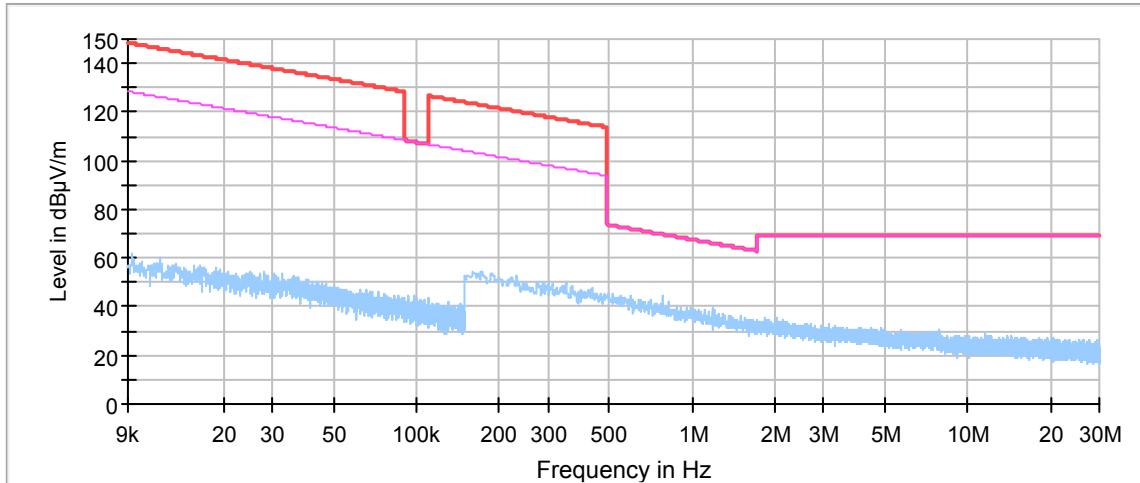

Plot 7.3.10 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

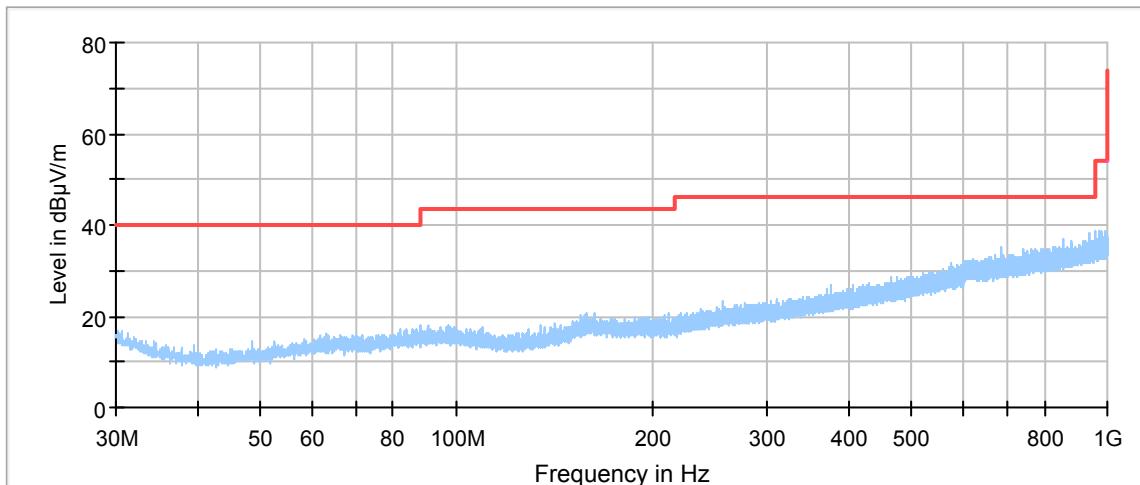




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		


Plot 7.3.11 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

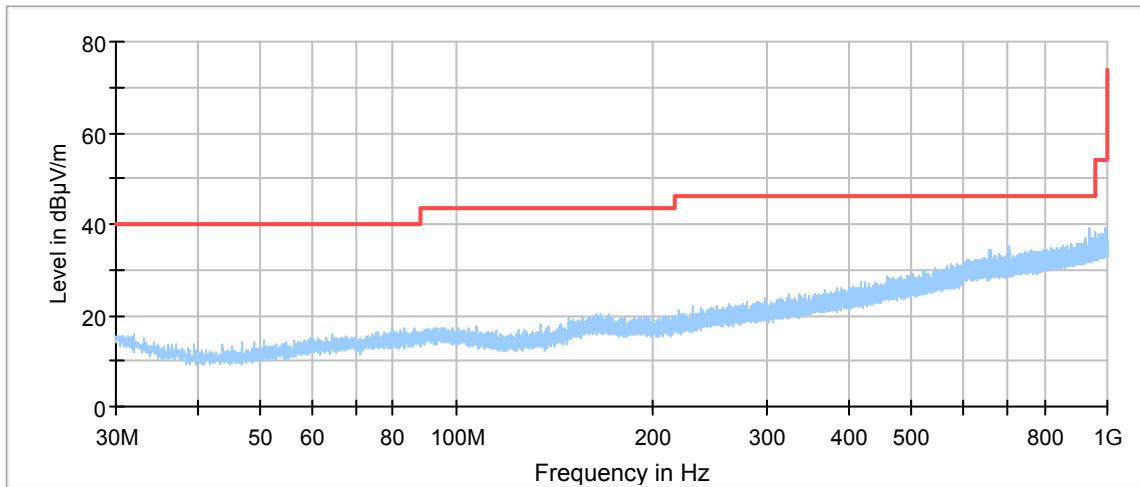

Plot 7.3.12 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

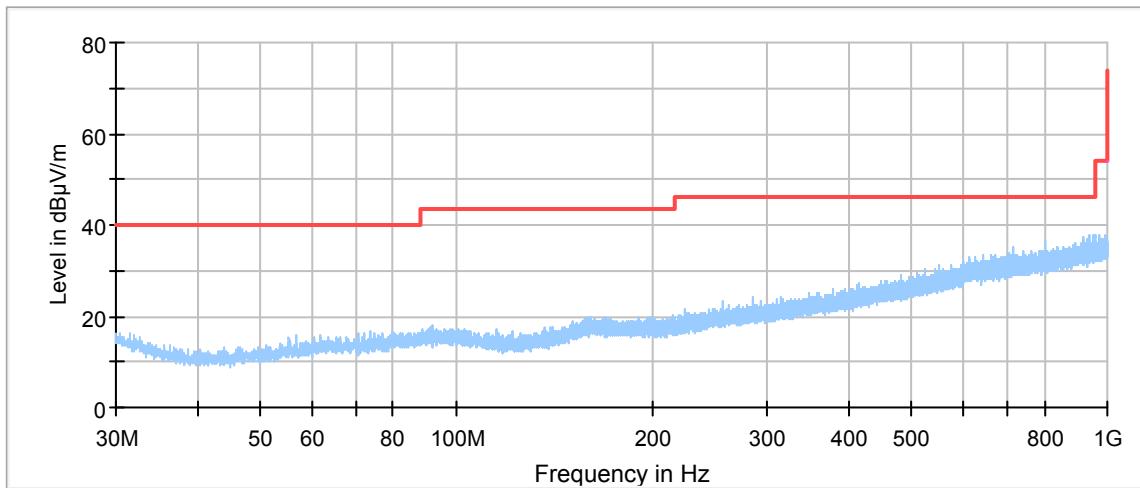




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		


Plot 7.3.13 Radiated emission measurements from 1000 to 3000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

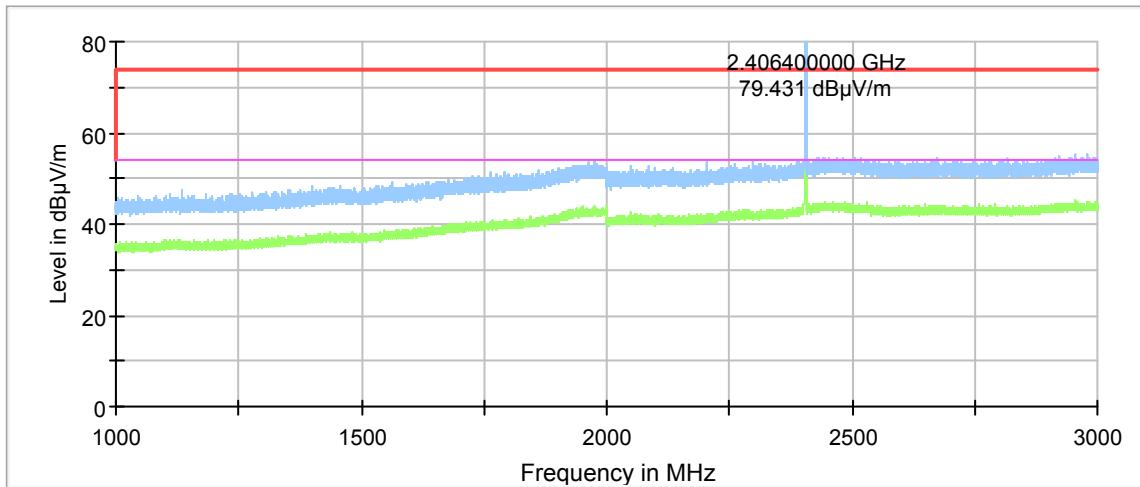

Plot 7.3.14 Radiated emission measurements from 1000 to 3000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

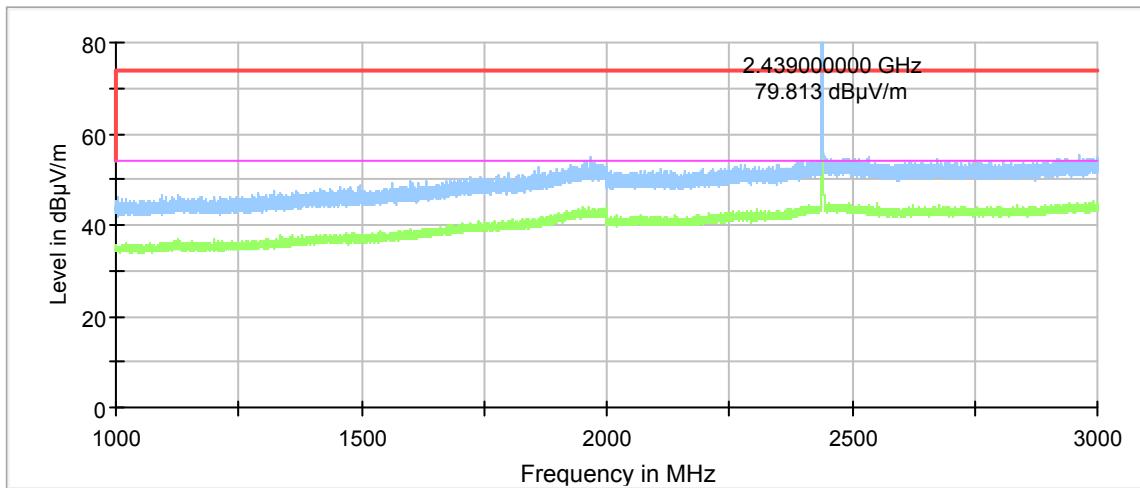




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		


Plot 7.3.15 Radiated emission measurements from 1000 to 3000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

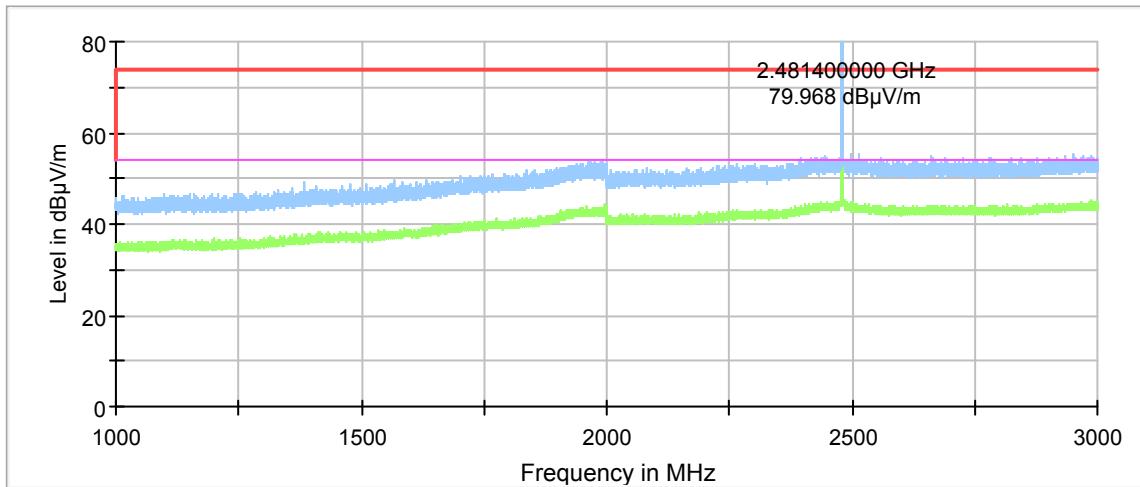

Plot 7.3.16 Radiated emission measurements from 3000 to 18000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

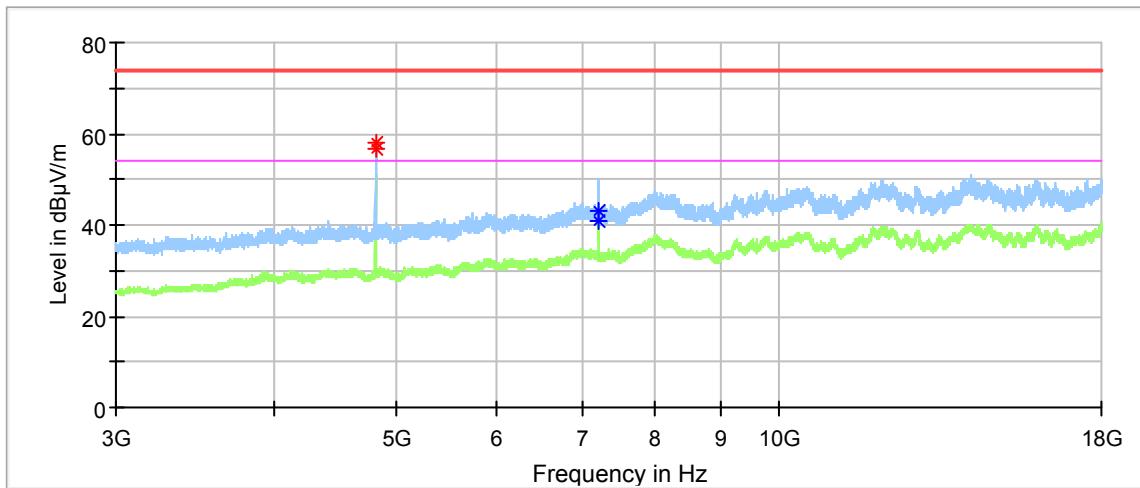




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		


Plot 7.3.17 Radiated emission measurements from 3000 to 18000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

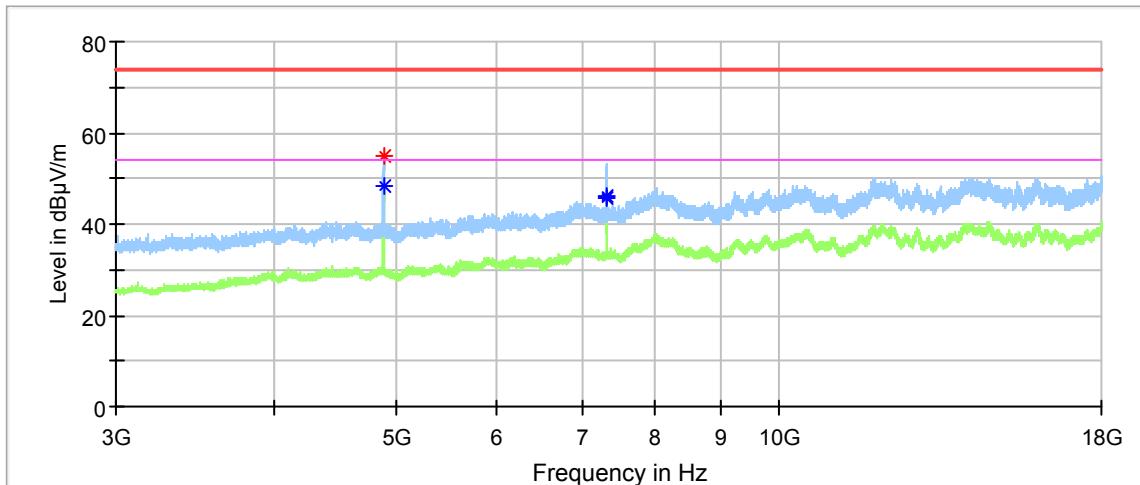

Plot 7.3.18 Radiated emission measurements from 3000 to 18000 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal

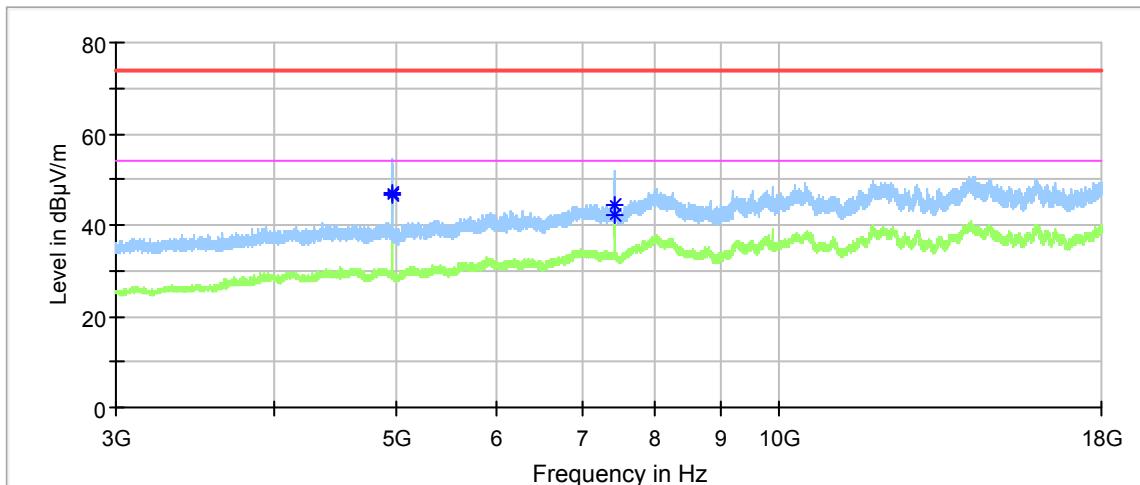




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

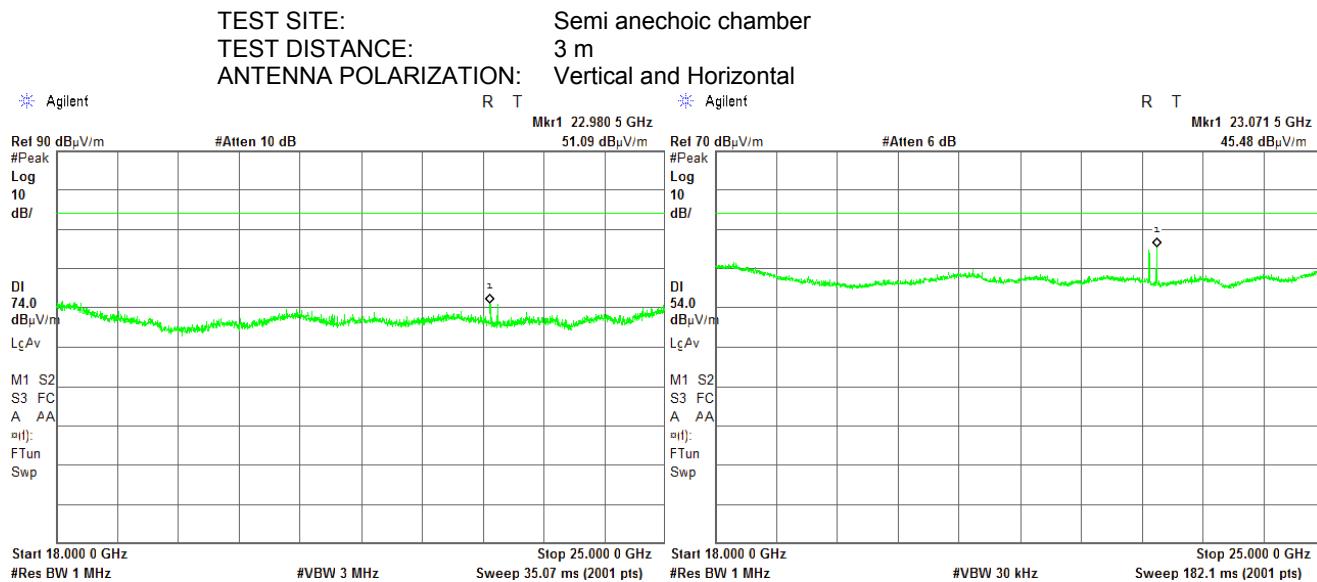**Plot 7.3.19 Radiated emission measurements from 18000 to 25000 MHz at the low carrier frequency**

22.9805 GHz, 23.0715 GHz – ambient

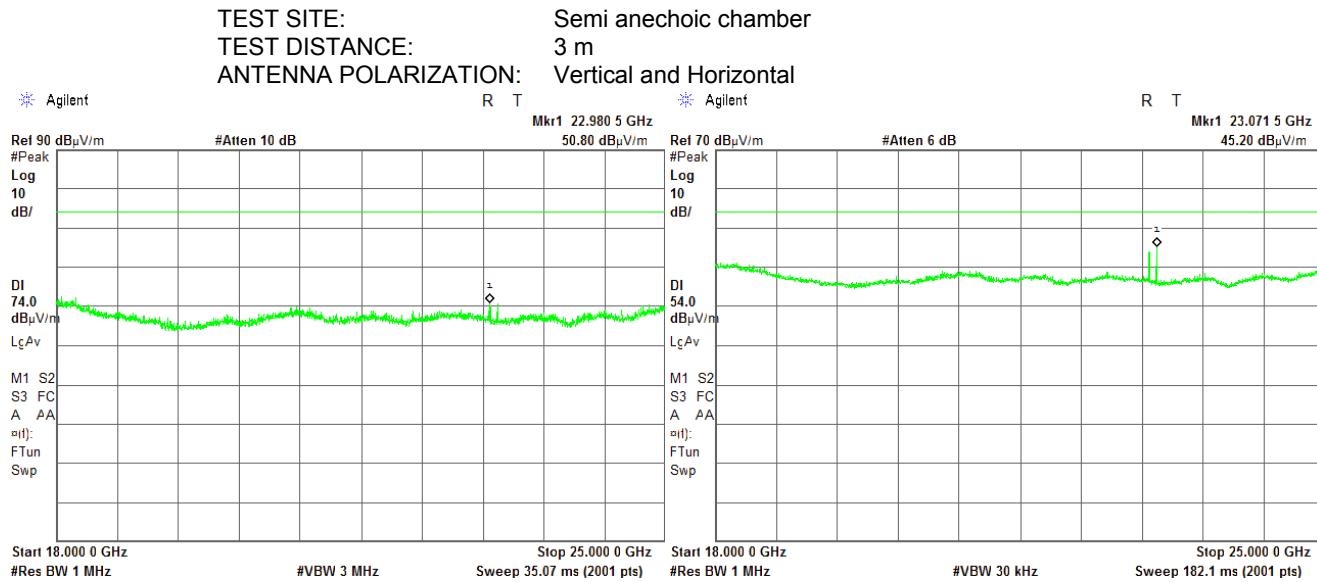
**Plot 7.3.20 Radiated emission measurements from 18000 to 25000 MHz at the mid carrier frequency**

22.9805 GHz, 23.0715 GHz – ambient




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

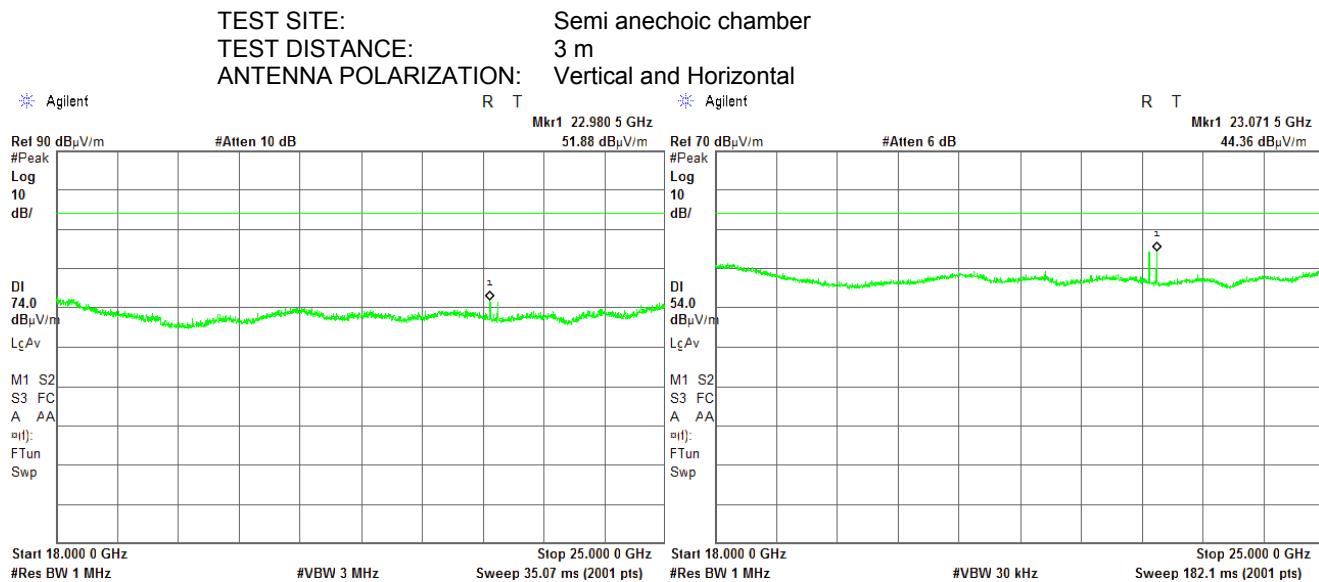**Plot 7.3.21 Radiated emission measurements from 18000 to 25000 MHz at the high carrier frequency**



22.9805 GHz, 23.0715 GHz – ambient

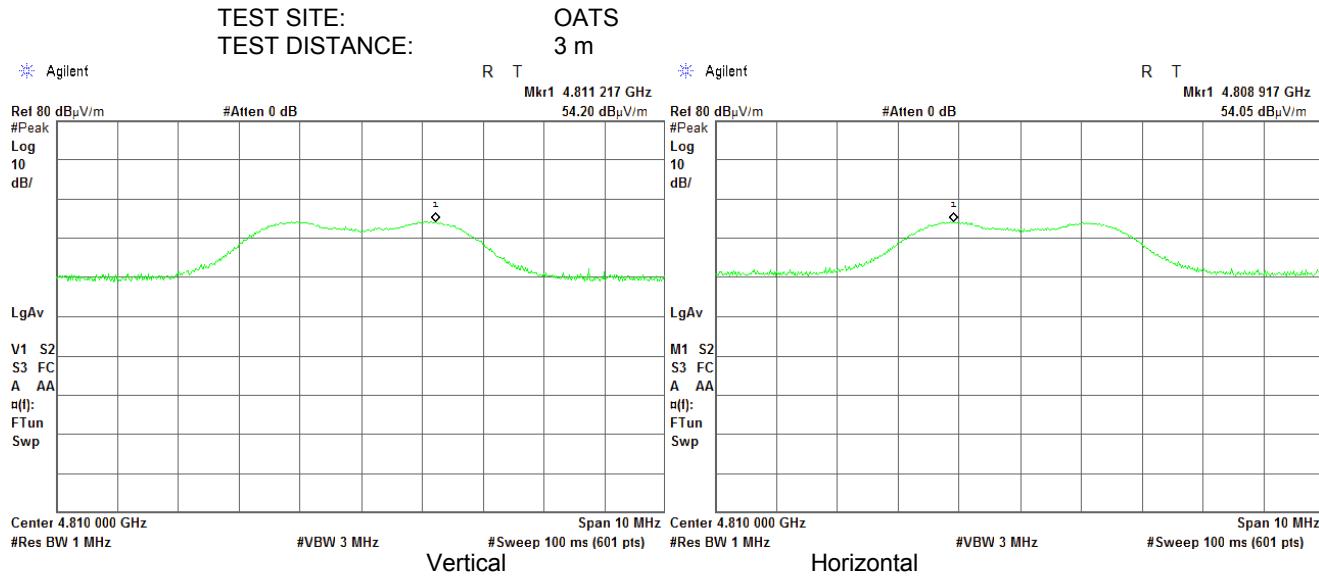**Plot 7.3.22 Radiated emission measurements at the second harmonic of low carrier frequency**



HERMON LABORATORIES



<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		

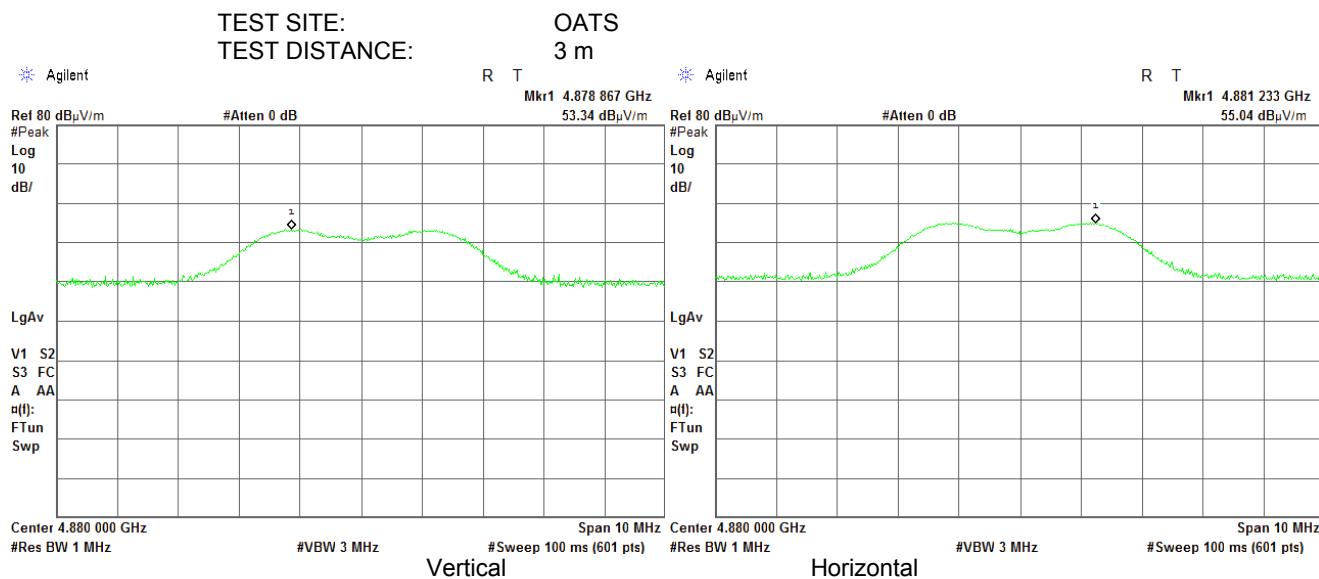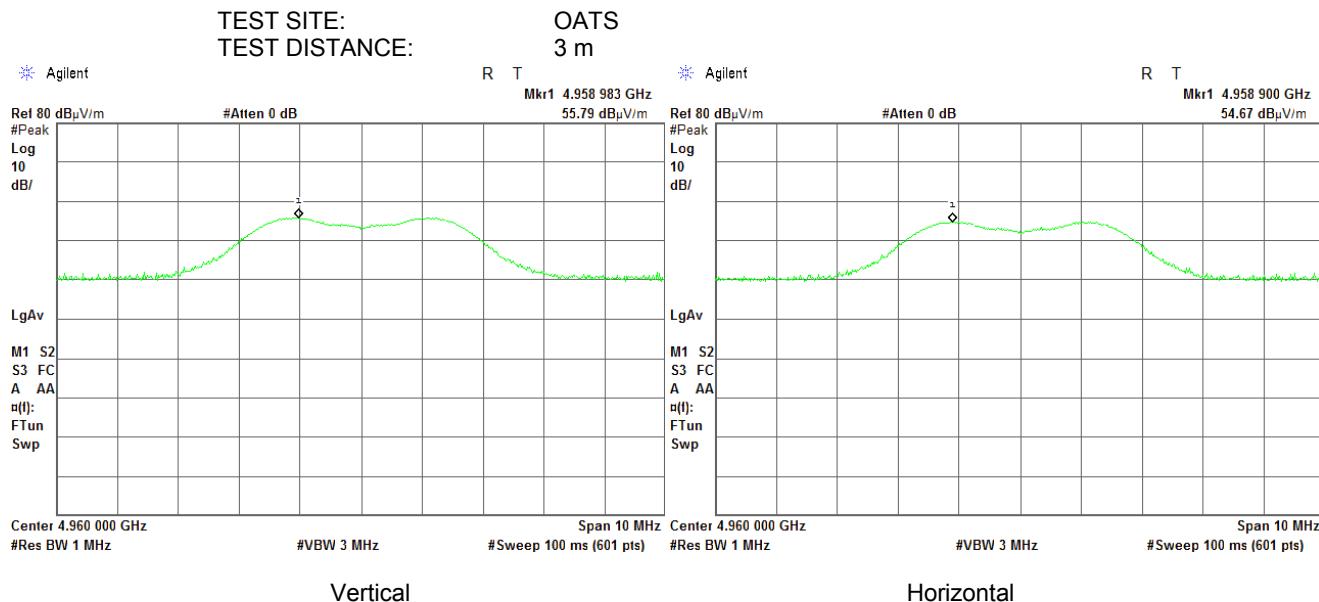**Plot 7.3.23 Radiated emission measurements at the second harmonic of mid carrier frequency****Plot 7.3.24 Radiated emission measurements at the second harmonic of high carrier frequency**



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS	
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

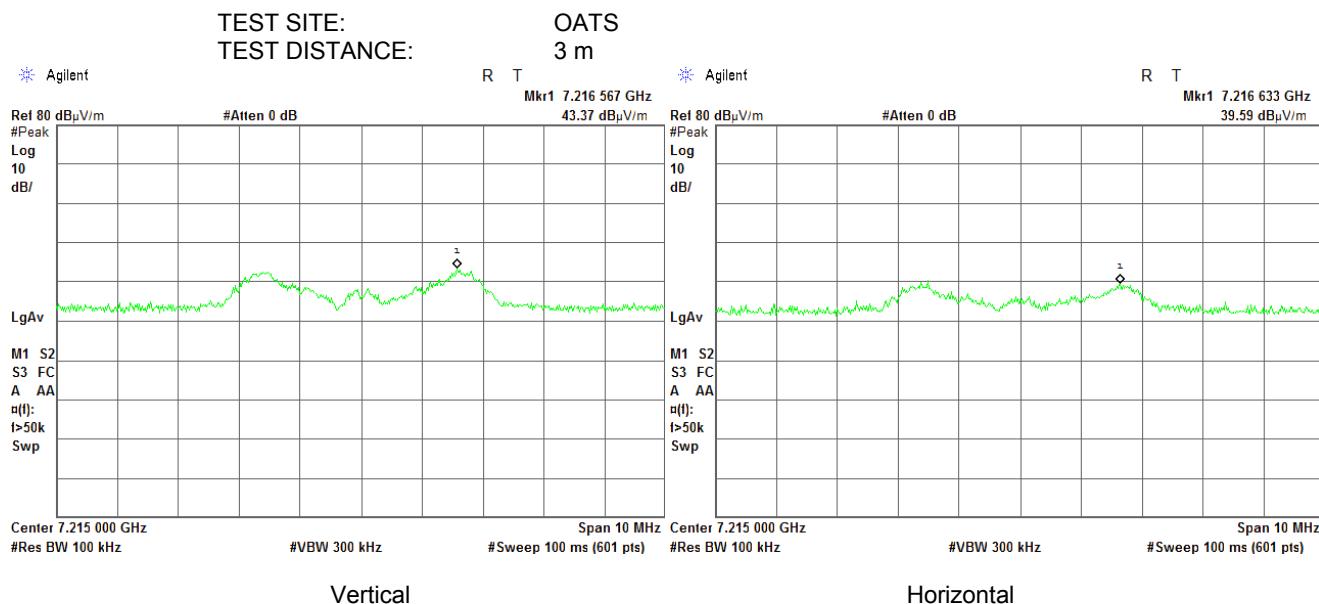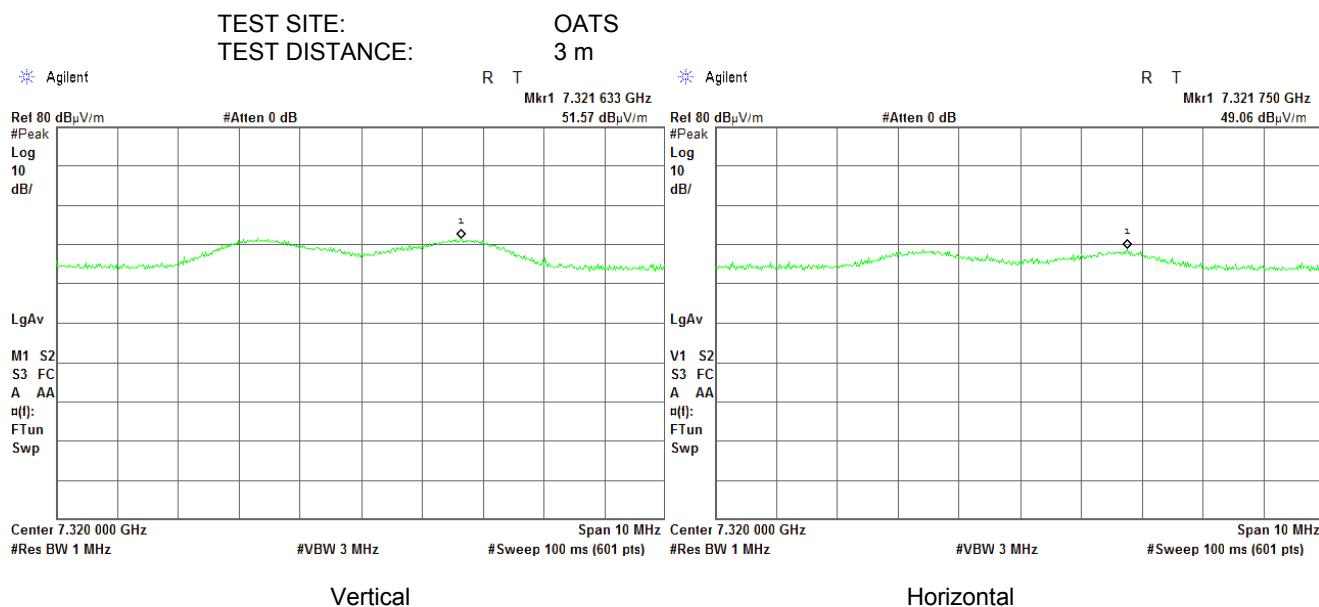
**Plot 7.3.25 Radiated emission measurements at the third harmonic of low carrier frequency****Plot 7.3.26 Radiated emission measurements at the third harmonic of mid carrier frequency**



HERMON LABORATORIES

<b>Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions</b>		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> <b>PASS</b>
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

**Plot 7.3.27 Radiated emission measurements at the third harmonic of high carrier frequency**

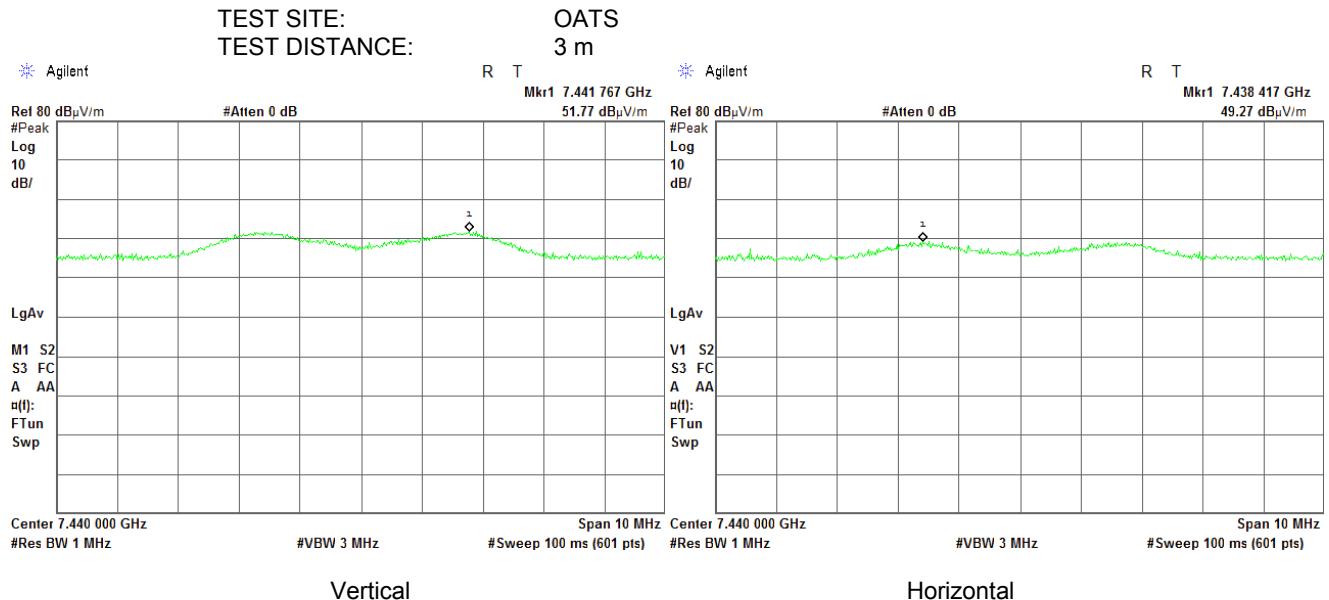





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		

Plot 7.3.28 Transmission pulse duration

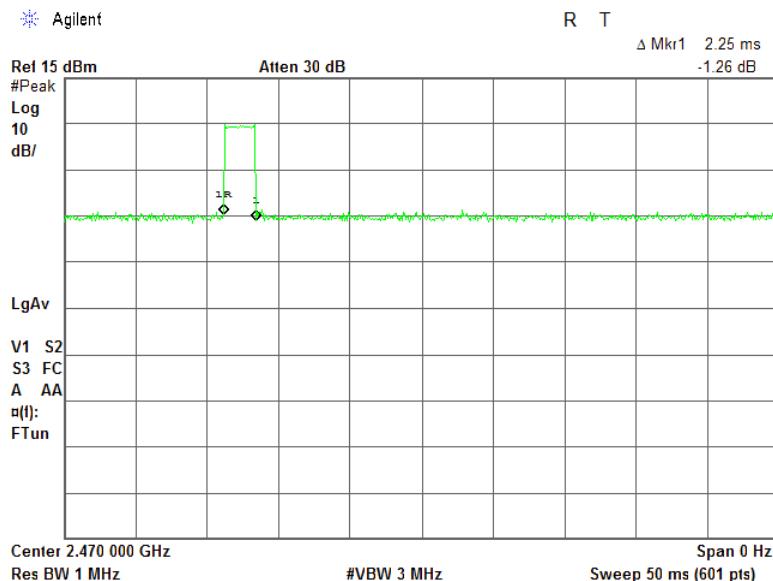

Plot 7.3.29 Transmission pulse period

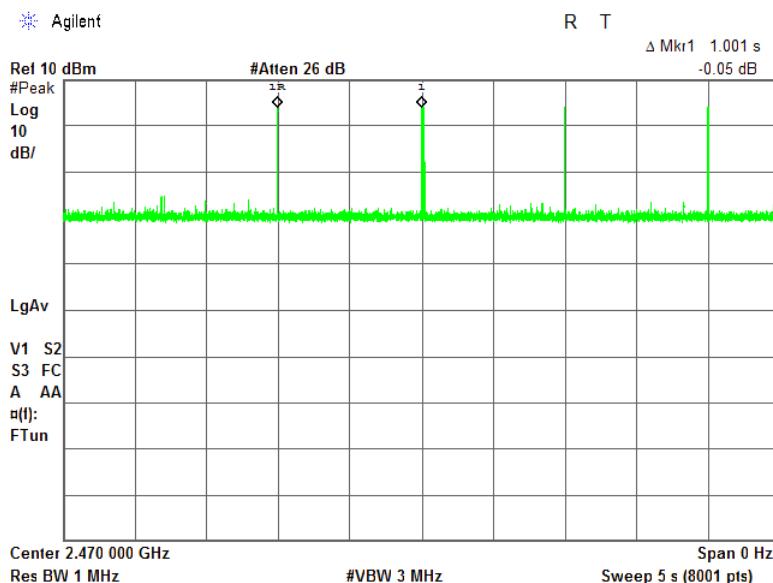



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Band edge emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 02-Mar-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

## 7.4 Band edge radiated emissions

### 7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			
Averaged over a time interval	902.0 – 928.0	30.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			

\* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

### 7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.

Figure 7.4.1 Band edge emission test setup





HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Band edge emissions						
<b>Test procedure:</b> ANSI C63.10 section 11.12.1						
<b>Test mode:</b> Compliance		<b>Verdict:</b> <b>PASS</b>				
<b>Date(s):</b> 02-Mar-17						
<b>Temperature:</b> 25 °C		<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa	<b>Power:</b> Battery		
<b>Remarks:</b>						

**Table 7.4.2 Band edge emission test results outside restricted bands**

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz  
 DETECTOR USED: Peak  
 MODULATION: OQPSK  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 TRANSMITTER OUTPUT POWER: 18.45 dBm at low carrier frequency  
 19.19 dBm at high carrier frequency

Frequency, MHz	Band edge emission, dB(µV/m)	Emission at carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Peak power						
2400.00	68.85	104.26	-35.41	20.0	-15.41	Pass
Averaged over a time interval power						
2400.00	58.44	93.59	-35.15	30.0	-5.15	Pass

\*- Margin = Attenuation below carrier – specification limit.

**Table 7.4.3 Band edge emission test results within restricted bands**

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz  
 DETECTOR USED: Peak  
 MODULATION: OQPSK  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 TRANSMITTER OUTPUT POWER: 18.45 dBm at low carrier frequency  
 19.19 dBm at high carrier frequency

Frequency, MHz	Peak band edge emission			Average band edge emission				Verdict
	Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB***	
2483.56	73.56	74.00	-0.44	73.56	40.6	54.00	-13.40	Pass

\*- EUT front panel refers to 0 degrees position of turntable.

\*\*- Margin = Measured field strength - specification limit.

\*\*\*- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

**Table 7.4.4 Average factor calculation**

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
2.25	1001.00	NA	NA	NA	-32.96

\*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left( \frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

#### Reference numbers of test equipment used



HL 3818	HL 4114	HL 5111				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Band edge emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 02-Mar-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Remarks:</b>		

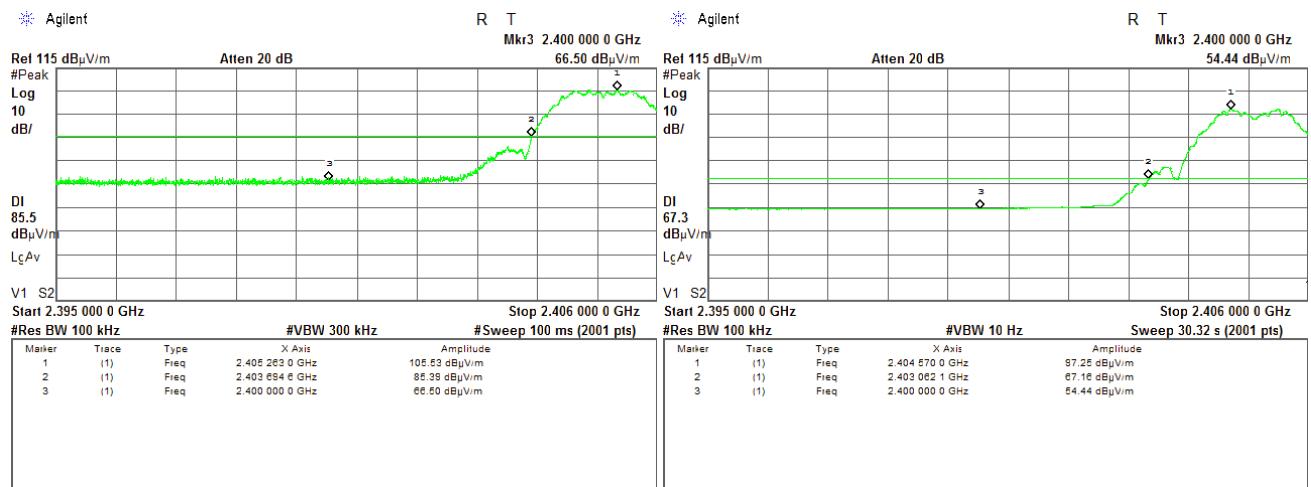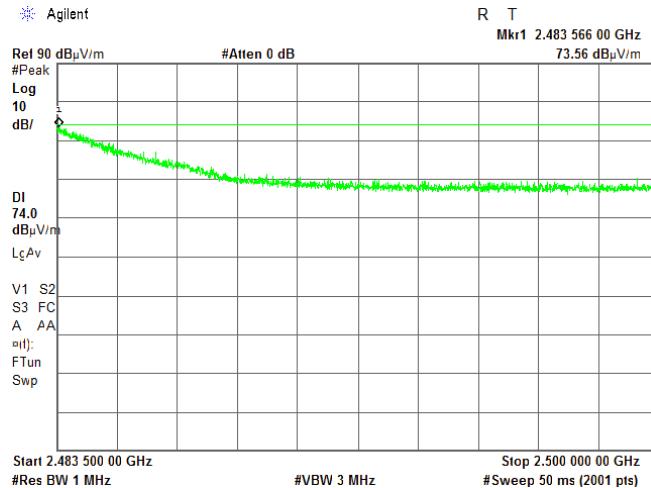
**Plot 7.4.1 The highest emission level within the assigned band at low carrier frequency****Plot 7.4.2 The highest emission level within the assigned band at high carrier frequency**




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(d) / RSS-247 section 5.5, Band edge emissions		
<b>Test procedure:</b> ANSI C63.10 section 11.12.1		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 02-Mar-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Remarks:</b>		

Plot 7.4.3 Transmission pulse duration

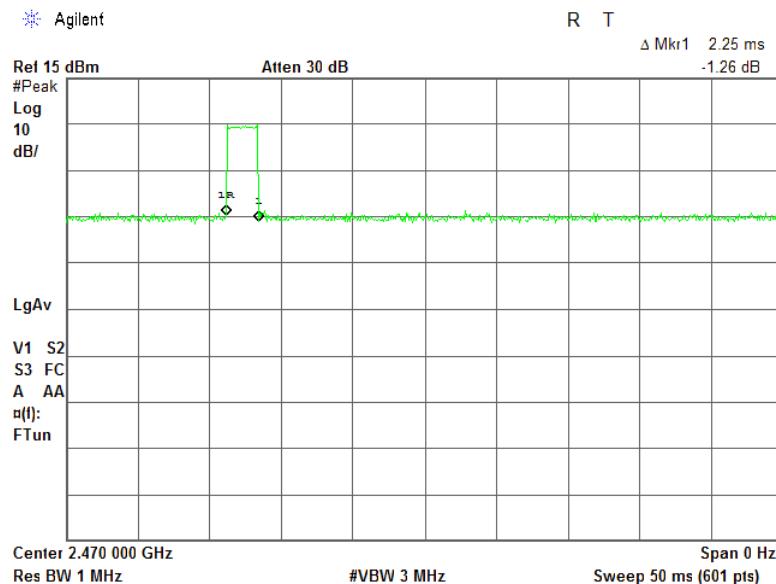

Plot 7.4.4 Transmission pulse period

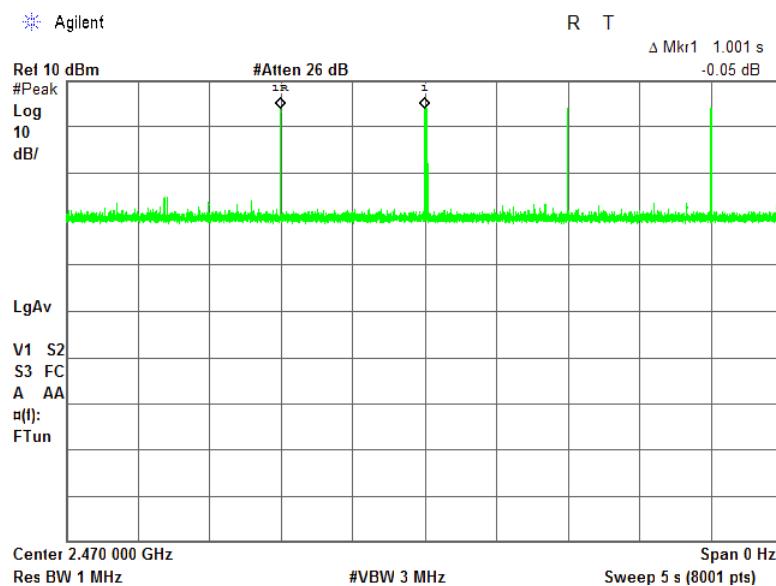



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 27-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		

## 7.5 Maximum power spectral density (PSD)

### 7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(µV/m)*
902.0 – 928.0			
2400.0 – 2483.5	3.0	8.0	103.2
5725.0 – 5850.0			

\* - Equivalent field strength limit was calculated from the peak spectral power density as follows:  $E = \sqrt{30 \times P} / r$ , where P is peak spectral power density and r is antenna to EUT distance in meters.

### 7.5.2 Test procedure for field strength measurements


- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization.
- 7.5.2.5 Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and the associated plots.



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 27-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1019 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

Figure 7.5.1 Setup for carrier field strength measurements

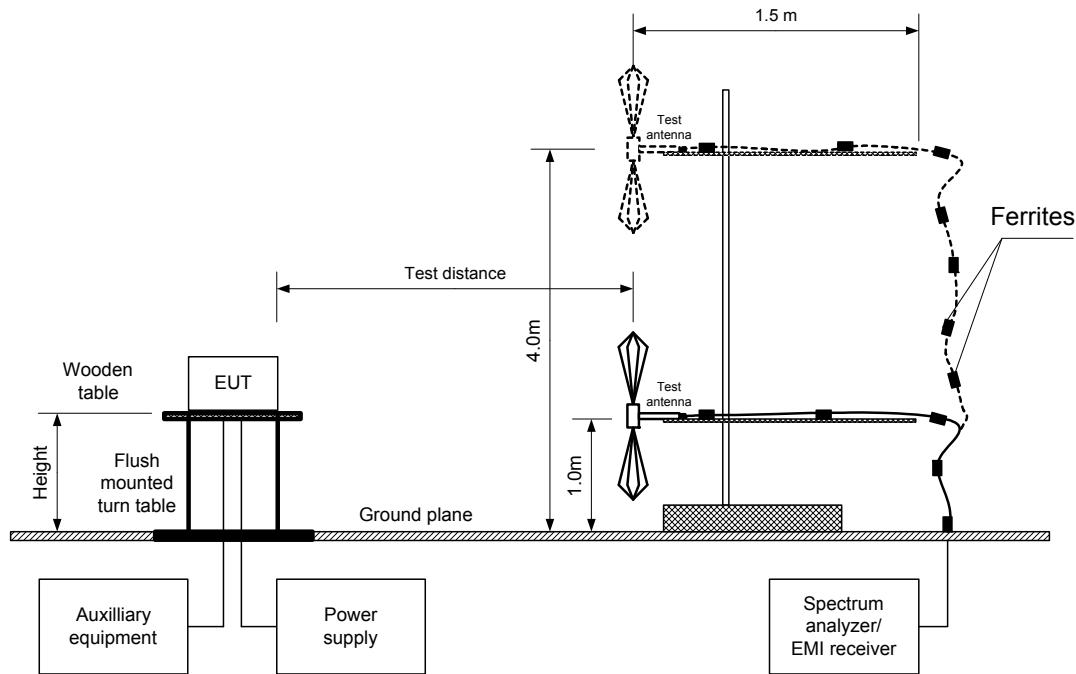



HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 27-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		

**Table 7.5.2 Field strength measurement of peak spectral power density**

ASSIGNED FREQUENCY:	2400 – 2483.5 MHz
TEST DISTANCE:	3 m
TEST SITE:	OATS
EUT HEIGHT:	1.5 m
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	3 kHz
VIDEO BANDWIDTH:	10 kHz
TEST ANTENNA TYPE:	Double ridged guide (above 1000 MHz)
MODULATION:	OQPSK
MODULATING SIGNAL:	PRBS
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
TRANSMITTER OUTPUT POWER:	18.45 dBm at low carrier frequency 19.15dBm at mid carrier frequency 19.19dBm at high carrier frequency

Frequency, MHz	Field strength, dB(µV/m)	EUT antenna gain, dBi	Limit, dB(µV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
2405.00	96.53	0.5	103.20	-7.17	Horizontal	1.13	245
2440.00	96.38	0.5	103.20	-7.32	Horizontal	1.27	49
2480.00	98.05	0.5	103.20	-5.65	Horizontal	1.27	77

\*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 3818	HL 4114	HL 5111					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 27-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		

Plot 7.5.1 Peak spectral power density at low frequency

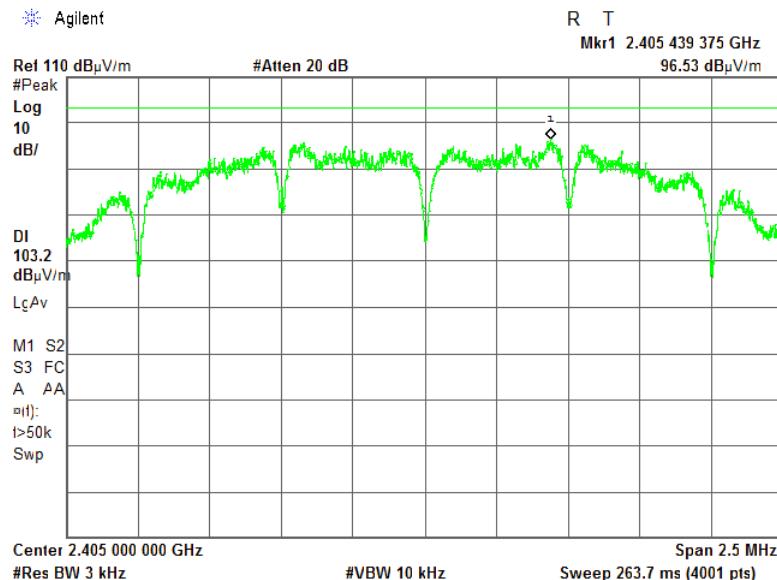

Plot 7.5.2 Peak spectral power density at mid frequency

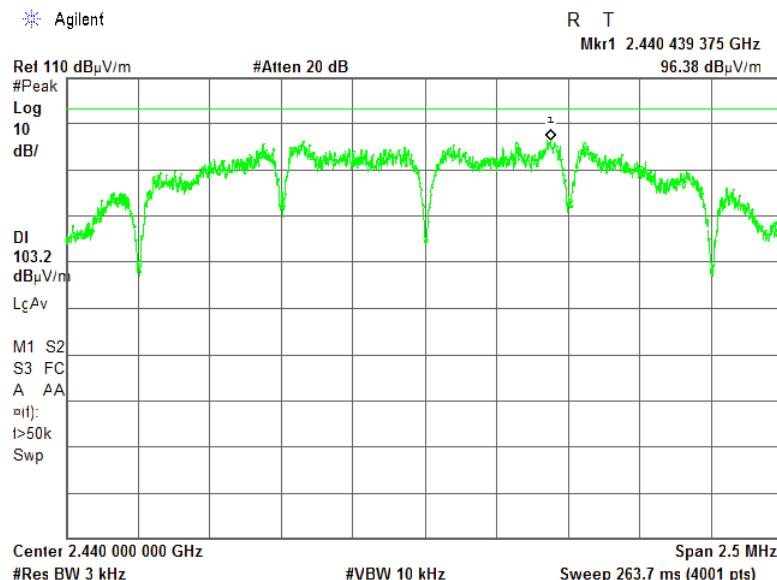




HERMON LABORATORIES

<b>Test specification:</b> Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density		
<b>Test procedure:</b> ANSI C63.10 section 11.10.2		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 27-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1019 hPa
<b>Remarks:</b>		

Plot 7.5.3 Peak spectral power density at high frequency

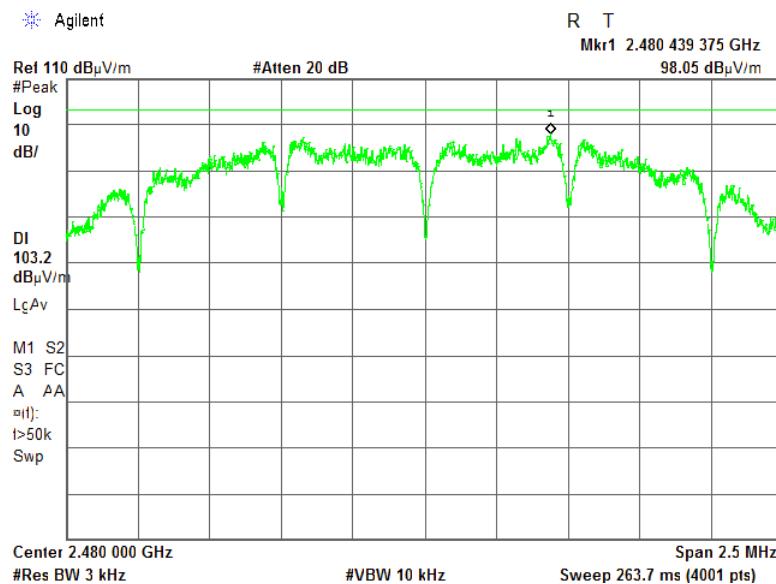



HERMON LABORATORIES

<b>Test specification:</b> Section 15.203, Antenna requirements		
<b>Test procedure:</b> Visual inspection		
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS
<b>Date(s):</b> 5-Mar-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1013 hPa
<b>Power:</b> Battery		
<b>Remarks:</b>		

## 7.6 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.6.1 Antenna assembly

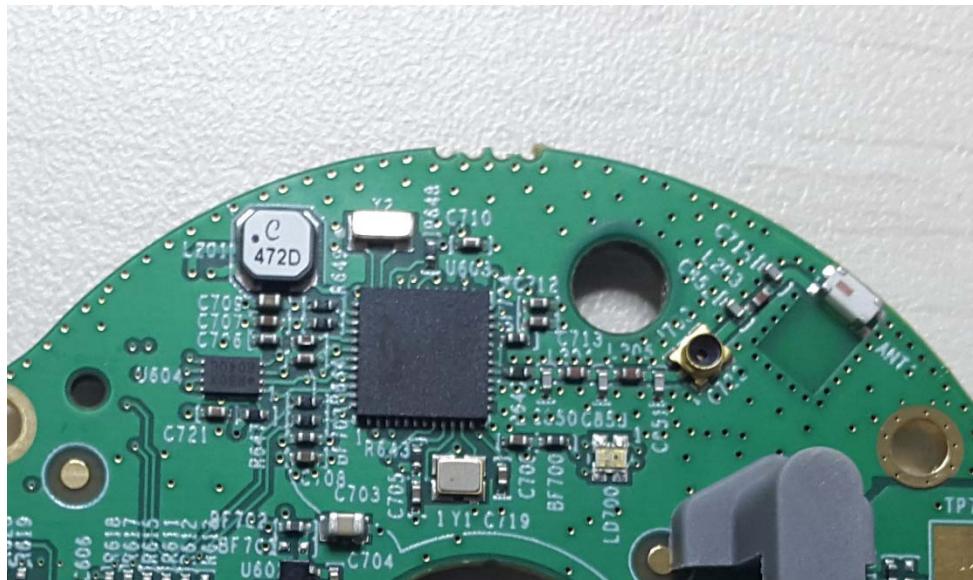



HERMON LABORATORIES

<b>Test specification:</b> FCC 47 CFR, Section 15.109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 8.3 and 12.2.5			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 23-Feb-17			
Temperature: 25 °C	Relative Humidity: 35 %	Air Pressure: 1019 hPa	Power: Battery
<b>Remarks:</b>			

## 8 Unintentional emissions

### 8.1 Radiated emission measurements

#### 8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. The specification test limits are given in Table 8.1.1, Table 8.1.2.

**Table 8.1.1 Radiated emission limits according to FCC Part 15, Section 109 and ICES-003, Section 6.2**

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 <sup>th</sup> harmonic**	43.5*	54.0	49.5	60.0*

\* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $Lim_{S2} = Lim_{S1} + 20 \log (S_1/S_2)$ , where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

**Table 8.1.2 Radiated emission limits according to RSS-Gen, Section 7.1.2**

Frequency, MHz	Field strength limit at 3 m test distance, dB(µV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 5 <sup>th</sup> harmonic**	54.0

\*\* - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

#### 8.1.2 Test procedure

#### 8.1.3 Test procedure

8.1.3.1 The EUT was set up as shown in Figure 8.1.1 and the associated photograph/s, energized and the EUT performance was checked.

8.1.3.2 The measurements were performed in the anechoic chamber at 3 m test distance. The specified frequency range was investigated with the antenna connected to the EMI receiver. To find the highest emission the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal polarizations. The EUT cables position was varied to maximize emission.


8.1.3.3 The worst test results with respect to the limits were recorded in Table 8.1.3 and shown in the associated plots.



HERMON LABORATORIES

<b>Test specification:</b>	<b>FCC 47 CFR, Section 15.109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission</b>		
<b>Test procedure:</b>	<b>ANSI C63.4, Sections 8.3 and 12.2.5</b>		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			

**Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment**

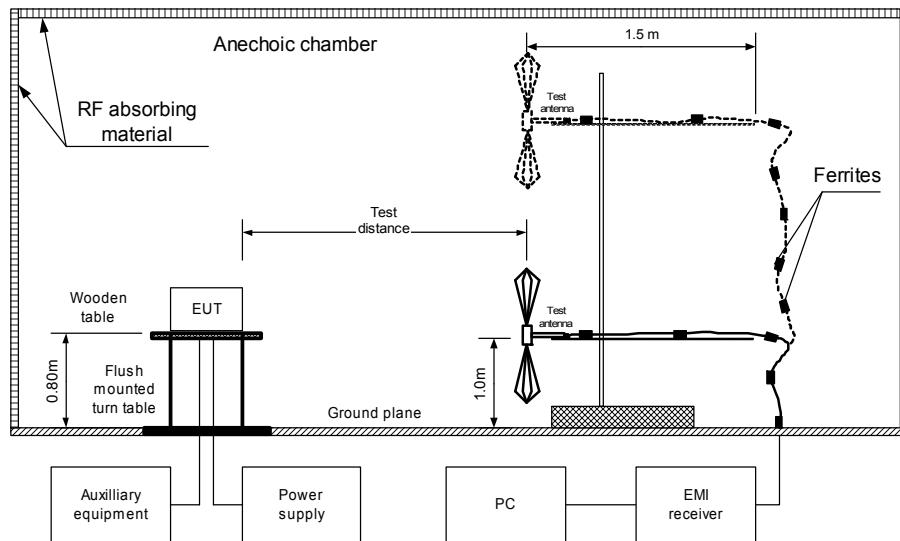

**Photograph 8.1.1 Setup for radiated emission measurements**





HERMON LABORATORIES

<b>Test specification:</b> FCC 47 CFR, Section 15.109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission	
<b>Test procedure:</b> ANSI C63.4, Sections 8.3 and 12.2.5	
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS
<b>Date(s):</b> 23-Feb-17	
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %
<b>Air Pressure:</b> 1019 hPa	<b>Power:</b> Battery
<b>Remarks:</b>	

**Table 8.1.3 Radiated emission test results**

EUT SET UP: TABLE-TOP  
 LIMIT: Class B  
 EUT OPERATING MODE: Receive  
 TEST SITE: SEMI ANECHOIC CHAMBER  
 TEST DISTANCE: 3 m  
 DETECTORS USED: PEAK / QUASI-PEAK  
 FREQUENCY RANGE: 30 MHz – 1000 MHz  
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found								

TEST SITE: SEMI ANECHOIC CHAMBER  
 TEST DISTANCE: 3 m  
 DETECTORS USED: PEAK / AVERAGE  
 FREQUENCY RANGE: 1000 MHz – 18000 MHz  
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found										

\*- Margin = Measured emission - specification limit.

\*\*- EUT front panel refers to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0604	HL 4353	HL 4360	HL 4933	HL 5103			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

<b>Test specification:</b>	<b>FCC 47 CFR, Section 15.109 / RSS-Gen, Section 7.1.2 / ICES-003, Radiated emission</b>		
<b>Test procedure:</b>	<b>ANSI C63.4, Sections 8.3 and 12.2.5</b>		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date(s):</b>	23-Feb-17		
<b>Temperature:</b> 25 °C	<b>Relative Humidity:</b> 35 %	<b>Air Pressure:</b> 1019 hPa	<b>Power:</b> Battery
<b>Remarks:</b>			


**Plot 8.1.1 Radiated emission measurements in 30 – 1000 MHz range, vertical and horizontal antenna polarization**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m

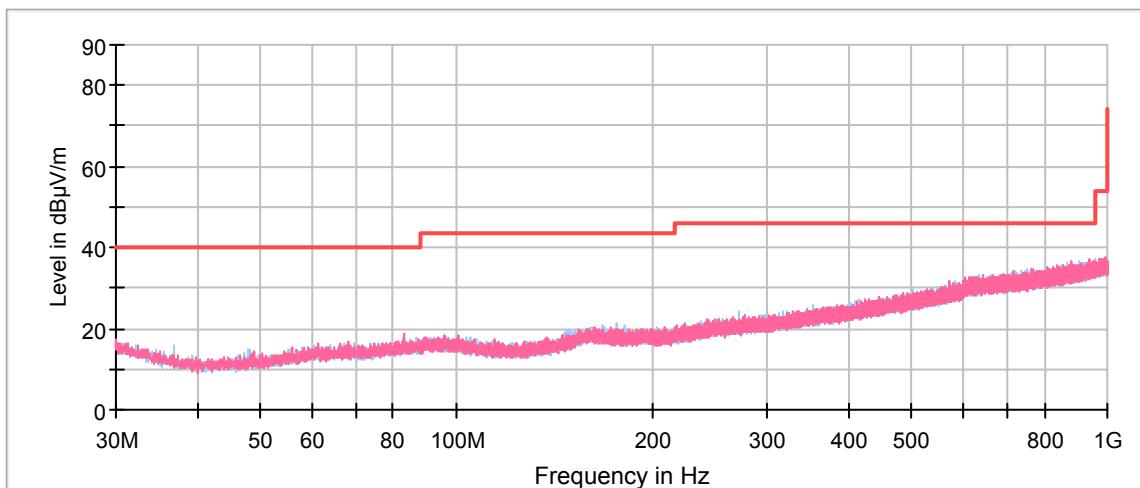

**Plot 8.1.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization**

TEST SITE: Anechoic chamber  
TEST DISTANCE: 3 m

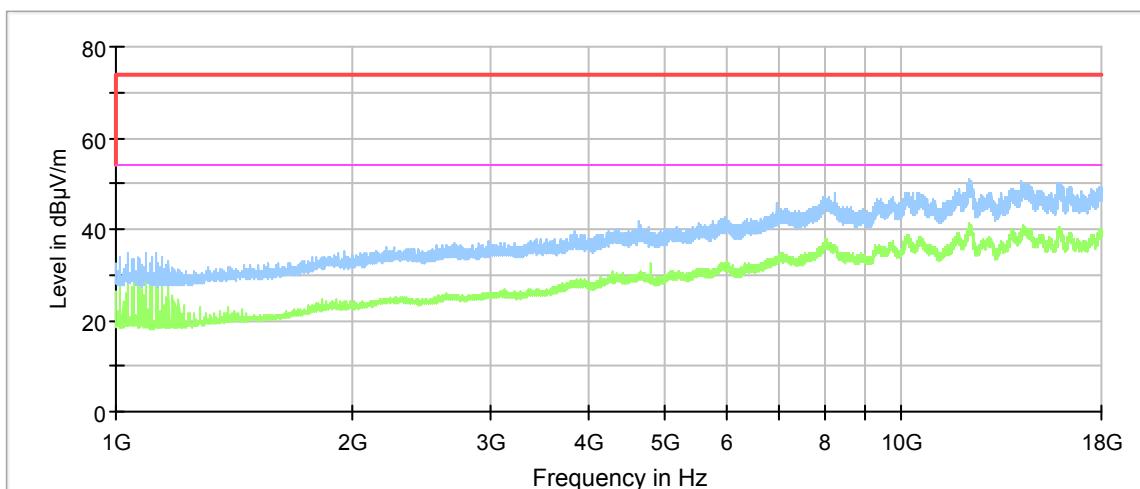



HERMON LABORATORIES

## 9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 kHz – 30 MHz	EMCO	6502	2857	19-Jan-17	19-Jan-18
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 – 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
1984	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz, 300 W	EMC Test Systems	3115	9911-5964	13-Nov-16	13-Nov-17
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	03-May-16	03-May-17
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLEX 102A	1225/2A	20-Feb-17	20-Feb-18
4114	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz	ETS Lindgren	3117	00123515	17-Jan-17	17-Jan-18
4353	Low Loss Armored Test Cable, DC – 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244 003	12025101	15-Mar-17	15-Mar-18
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	04-Dec-16	04-Dec-17
4933	Active Horn Antenna, 1 GHz to 18 GHz	Com-Power Corporation	AHA-118	701046	14-Oct-16	14-Oct-17
4956	Active horn antenna, 18 to 40 GHz	Com-Power Corporation	AHA-840	105004	17-Jan-17	17-Jan-18
5103	RF cable, 18 GHz, 6 m, N-type	Huber-Suhner	SF106A/1 1N/11N/6 000MM	500849/6A	26-Jul-16	26-Jul-17
5111	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/ 11SK/11S K/5500M M	502493/2EA	26-Jul-16	26-Jul-17



HERMON LABORATORIES

## 10 APPENDIX B Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: $\pm 1.7$ dB 12.4 GHz to 40 GHz: $\pm 2.3$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Occupied bandwidth	$\pm 8.0$ %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB
Vertical polarization	

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

## 11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site and T-1606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

## 12 APPENDIX D Specification references

FCC 47CFR part 15: 2016	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-247 Issue 1: 2015	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 4: 2014	General Requirements for Compliance of Radio Apparatus



HERMON LABORATORIES

## 13 APPENDIX E Test equipment correction factors

Antenna factor  
Active loop antenna  
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



HERMON LABORATORIES

**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



HERMON LABORATORIES

**Antenna factor**  
**Double-ridged wave guide horn antenna**  
**Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



HERMON LABORATORIES

**Antenna factor**  
**Double-ridged waveguide horn antenna**  
**ETS Lindgren, Model 3117, serial number: 00123515, HL 4114**

Frequency, MHz	Antenna factor, dB/m		
	Measured	Manufacturer	Deviation
1000	28.0	28.4	-0.4
1500	28.0	27.4	0.6
2000	31.2	30.9	0.3
2500	32.5	33.4	-0.9
3000	32.9	32.6	0.3
3500	32.7	32.8	-0.1
4000	33.1	33.4	-0.3
4500	33.8	33.9	-0.1
5000	33.8	34.1	-0.3
5500	34.4	34.5	-0.1
6000	35.0	35.2	-0.2
6500	35.4	35.5	-0.1
7000	35.7	35.7	0.0
7500	35.9	35.7	0.2
8000	35.8	35.8	0.0
8500	35.9	35.8	0.1
9000	36.3	36.2	0.1
9500	36.6	36.6	0.0
10000	37.1	37.1	0.0
10500	37.6	37.5	0.1
11000	37.9	37.7	0.2
11500	38.5	38.1	0.4
12000	39.2	38.7	0.5
12500	39.0	38.9	0.1
13000	39.1	39.1	0.0
13500	38.9	38.8	0.1
14000	39.0	38.8	0.2
14500	39.6	39.9	-0.3
15000	39.9	39.7	0.2
15500	39.9	40.1	-0.2
16000	40.7	40.8	-0.1
16500	41.3	41.8	-0.5
17000	42.5	42.1	0.4
17500	41.3	41.2	0.1
18000	41.4	40.9	0.5

Antenna factor is to be added to receiver meter reading in dB( $\mu$ V) to convert to field strength in dB( $\mu$ V/meter)



HERMON LABORATORIES

Antenna factor, HL 4933

**Active Horn Antenna Factor Calibration**

1 GHz to 18 GHz

<b>Equipment:</b>	<b>ACTIVE HORN ANTENNA</b>				
<b>Model:</b>	AHA-118				
<b>Serial Number:</b>	701046				
<b>Calibration Distance:</b>	3 Meter				
<b>Polarization:</b>	Horizontal				
<b>Calibration Date:</b>	11/12/2014				
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			
Calibration according to ARP 958					
<b>Antenna Factor to be added to receiver reading:</b>					
Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)					



HERMON LABORATORIES

Antenna factor, HL 4956



## Active Horn Antenna Factor Calibration

18 GHz to 40 GHz

Equipment:		ACTIVE HORN ANTENNA			
Model:	<th data-cs="4" data-kind="parent">AHA-840</th> <th data-kind="ghost"></th> <th data-kind="ghost"></th> <th data-kind="ghost"></th>	AHA-840			
Serial Number:		105004			
Calibration Distance:		3 meter			
Polarization:		Horizontal			
Calibration Date:		1/26/2015			
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21
Calibration per ANSI C63.5: 2006 Standard Site Method, Equations 1-6 (3-antenna)					
Corrected Reading (dB $\mu$ V/m) = Meter Reading (dB $\mu$ V) + AFE(dB/m)					



HERMON LABORATORIES

**Cable loss**  
**Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A**  
**HL 3901**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52



HERMON LABORATORIES

**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244S/N 12025101 003,**  
**HL 4353**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

**Cable loss**  
**RF Cable, Huber-Suhner, 18 GHz, 6 m, N- type,**  
**SF106A/11N/11N/6000MM, S/N 500849/6A**  
**HL 5103**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	2.43
50	0.22	6000	2.54
100	0.31	6500	2.66
200	0.43	7000	2.76
300	0.53	7500	2.87
400	0.62	8000	2.97
500	0.69	8500	3.07
600	0.76	9000	3.17
700	0.82	9500	3.27
800	0.88	10000	3.36
900	0.94	10500	3.45
1000	0.99	11000	3.54
1100	1.04	11500	3.62
1200	1.08	12000	3.71
1300	1.13	12500	3.79
1400	1.17	13000	3.88
1500	1.21	13500	3.97
1600	1.26	14000	4.05
1700	1.30	14500	4.13
1800	1.33	15000	4.22
1900	1.37	15500	4.30
2000	1.41	16000	4.38
2500	1.59	16500	4.45
3000	1.75	17000	4.52
3500	1.90	17500	4.61
4000	2.04	18000	4.72
4500	2.17		
5000	2.30		



HERMON LABORATORIES

**Cable loss**  
**RF Cable, Huber-Suhner, 40 GHz, 5.5 m, K type,**  
**SF102EA/11SK/11SK/5500MM, S/N 502493/2EA**  
**HL 5111**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
100	0.69	20500	10.18
200	0.97	21000	10.32
300	1.18	21500	10.47
500	1.52	22000	10.60
1000	2.14	22500	10.75
1500	2.62	23000	10.87
2000	3.03	23500	11.00
2500	3.40	24000	11.12
3000	3.73	24500	11.23
3500	4.04	25000	11.35
4000	4.33	25500	11.52
4500	4.60	26000	11.64
5000	4.86	26500	11.73
5500	5.10	27000	11.84
6000	5.34	27500	11.93
6500	5.57	28000	12.05
7000	5.79	28500	12.19
7500	6.00	29000	12.33
8000	6.21	29500	12.44
8500	6.43	30000	12.53
9000	6.62	30500	12.58
9500	6.82	31000	12.71
10000	7.01	31500	12.86
10500	7.17	32000	13.00
11000	7.34	32500	13.11
11500	7.51	33000	13.24
12000	7.68	33500	13.33
12500	7.84	34000	13.44
13000	8.00	34500	13.58
13500	8.16	35000	13.69
14000	8.32	35500	13.81
14500	8.48	36000	13.93
15000	8.63	36500	14.05
15500	8.77	37000	14.24
16000	8.92	37500	14.28
16500	9.08	38000	14.38
17000	9.23	38500	14.50
17500	9.37	39000	14.61
18000	9.51	39500	14.70
18500	9.66	40000	14.83
19000	9.78		
19500	9.92		
20000	10.07		



HERMON LABORATORIES

## 14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million ( $10^{-6}$ )
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF TEST REPORT

15 APPENDIX G Manufacturer's declaration



**Declaration of Identity**

We, the undersigned,

Company: Triple+  
Address: 5 Hamada Street, Yoqneam, 2069200  
Country: Israel  
Telephone number: +972 722211370  
Fax number: +972 49593991

declare under our sole responsibility that the following equipment:

Brand/Item	Type/Model	Short Product description
Triple+ CLM™	ZBS-SHAMAP-1-20	Wireless actuator

is electronically/electrically/mechanically identical to the following equipment (including Software/Hardware version(s)):

Brand/Item	Type/Model	Short Product description
Triple+ CLM™	SOVI	Wireless actuator

The reason for name change is: **branding considerations. 2 pieces of equipment are absolutely identical.**

.....March 21, 2017.....  
.....Michael Isakov.....  
.....CEO.....  
(company stamp)

**END OF DOCUMENT**