

Test Report

Report No.: MTi220629014-24E1

Date of issue: 2022-12-06

Applicant: WIRELESS-TAG TECHNOLOGY CO., LIMITED

Product: WIFI BLE Module

Model(s): WT018684-S5, WT018684-S5U, WT018684-S6, WT018684-S6U

FCC ID: 2AFOS-WT018684-S5

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions


1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	6
2	Measurement uncertainty	8
3	Summary of Test Result	9
4	Test Laboratory	10
5	Equipment List	11
6	Test Result.....	12
6.1	Antenna requirement	12
6.2	AC power line conducted emissions.....	13
6.3	Radiated spurious emission.....	18
6.4	DTS bandwidth	32
6.5	Maximum conducted output power.....	33
6.6	Power spectral density.....	34
6.7	Band edge (Conducted).....	35
6.8	Conducted spurious emissions.....	36
6.9	Duty Cycle.....	37
Appendix A: DTS Bandwidth		38
Appendix B: Maximum conducted output power.....		42
Appendix C: Maximum power spectral density.....		49
Appendix D: Band edge measurements		53
Appendix E: Conducted Spurious Emission.....		55
Appendix F: Duty Cycle		64
Photographs of the Test Setup.....		66
Photographs of the EUT.....		67


Test Result Certification	
Applicant:	WIRELESS-TAG TECHNOLOGY CO., LIMITED
Address:	801, Block A, Building 6, Shenzhen International Innovation Valley, Dashi Road, Xili Community, Xili Street, Nanshan District, Shenzhen
Manufacturer:	WIRELESS-TAG TECHNOLOGY CO., LIMITED
Address:	801, Block A, Building 6, Shenzhen International Innovation Valley, Dashi Road, Xili Community, Xili Street, Nanshan District, Shenzhen
Product description	
Product name:	WIFI BLE Module
Trademark:	Wireless-tag
Model name:	WT018684-S5
Serial Model:	WT018684-S5U, WT018684-S6, WT018684-S6U
Standards:	FCC Part 15.247
Test procedure:	ANSI C63.10-2013 KDB 558074 D01 D15.247 Meas Guidance v05r02
Date of Test	
Date of test:	2022-11-10 ~ 2022-11-25
Test result:	Pass

Test Engineer :



(David Lee)

Reviewed By :



(Leon Chen)

Approved By :



(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	WIFI BLE Module
Model name:	WT018684-S5
Series Model:	WT018684-S5U, WT018684-S6, WT018684-S6U
Model difference:	WT018684-S6, WT018684-S6U are the same function and module, except the layout, package and model name are different from WT018684-S5 WT018684-S5, WT018684-S5U are the same circuit and module, except the model name. WT018684-S6, WT018684-S6U are the same circuit and module, except the model name.
Electrical rating:	Input: DC 3.3V/0.5A
Hardware version:	v1.0
Software version:	v1.0
Accessories:	N/A
Test sample(s) number:	MTi220629014-24S1001
RF specification:	
Operation frequency:	802.11b/g/n20:2412~2462 MHz
Modulation type:	IEEE 802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n (HT20): OFDM (64QAM, 16QAM, QPSK, BPSK)
Date Rate:	802.11b: 1/2/5.5/11 Mbit/s 802.11g: 6/9/12/18/24/36/48/54 Mbit/s 802.11n(20MHz) use 800 ns GI: 6.5/13/19.5/26/39/52/58.5/65 Mbit/s
Antenna(s) information:	PCB antenna, antenna Gain: 1.7 dBi

1.2 Description of test modes


1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	/	

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:		EspRFTTestTool_v2.9	
802.112b		802.11g	
Channel	Power setting	Channel	Power setting
1	7	1	16
6	9	6	16
11	9	11	10
802.112n (HT20)		802.112n (HT40)	
Channel	Power setting	Channel	Power setting
1	11	3	10
6	7	6	11
11	7	9	10

The test software:

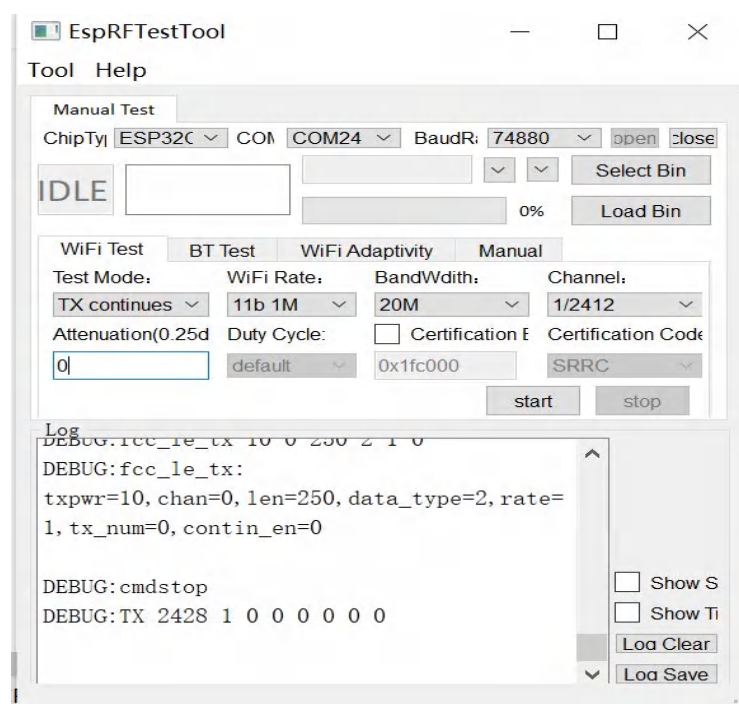

1.3 Environmental conditions for testing

Environment of test site:

Temperature:	15°C~35°C
Humidity:	20 % RH ~ 75 % RH

1.4 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
Notebook	XMA1D01	00128190	Redmi
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Measurement uncertainty
AC power line conducted emission (9 kHz~30 MHz)	± 2.5 dB
Occupied Bandwidth	± 3 %
Conducted RF output power	± 0.16 dB
Conducted spurious emissions	± 0.21 dB
Radiated emission (9 kHz ~ 30 MHz)	± 4.0 dB
Radiated emission (30 MHz~1 GHz)	± 4.2 dB
Radiated emission (above 1 GHz)	± 4.3 dB

Note: the measurement uncertainty is calculated and correspond to a factor $k = 2$ (which provide confidence levels of 95.45 %)

3 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	§ 15.247(d)	Radiated spurious emissions	Pass
4	15.247(a)(2)	DTS bandwidth	Pass
5	15.247(b)(3)	Maximum conducted output power	Pass
6	15.247(e)	Power Spectral Density	Pass
7	15.247(d)	Band edge (Conducted)	Pass
8	15.247(d)	Conducted spurious emissions	Pass
9	/	Duty Cycle	Pass

4 Test Laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

5 Equipment List

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2022/05/05	2023/05/04
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127#841	2022/05/05	2023/05/04
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2022/05/05	2023/05/04
MTi-E043	EMI test receiver	R&S	ESCI7	101166	2022/05/05	2023/05/04
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00044	2021/05/30	2023/05/29
MTi-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2023/05/29
MTi-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D-2278	2021/05/30	2023/05/29
MTi-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2022/05/05	2023/05/04
MTi-E048	Pre-amplifier	Agilent	8449B	3008A01120	2022/05/05	2023/05/04
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30	2023/05/29
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2022/04/15	2023/04/14
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2022/05/05	2023/05/04
MTi-E135	Horn antenna	Schwarzbeck	BBHA 9170	00987	2021/05/30	2023/05/29
MTi-E136	Pre-amplifier	Space-Dtronics	EWLAN1840 G-G45	210405001	2022/05/05	2023/05/04
MTi-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2022/05/05	2023/05/04
MTi-E067	RF Control Unit	Tonscend	JS0806-1	19D8060152	2022/05/05	2023/05/04
MTi-E068	RF Control Unit	Tonscend	JS0806-2	19D8060153	2022/05/05	2023/05/04
MTi-E069	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2022/05/05	2023/05/04
MTi-E010S	EMI Measurement Software	Farad	EZ-EMC Ver. EMEC-3A1	/	/	/
MTi-E014S	RF Test System	Tonscend	TS@JS1120 V2.6.88.0330	/	/	/

Note: the calibration interval of the test equipment is 12 or 24 months and the calibrations are traceable to international system unit(SI)

6 Test Result

6.1 Antenna requirement

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Description of the antenna of EUT

The antenna of the EUT is permanently attached.

Conclusion:

The EUT complies with the requirement of § 15.203.

6.2 AC power line conducted emissions

6.2.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

6.2.2 Test Procedures

- Test method: ANSI C63.10-2013 Section 6.2.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

6.2.3 Test setup

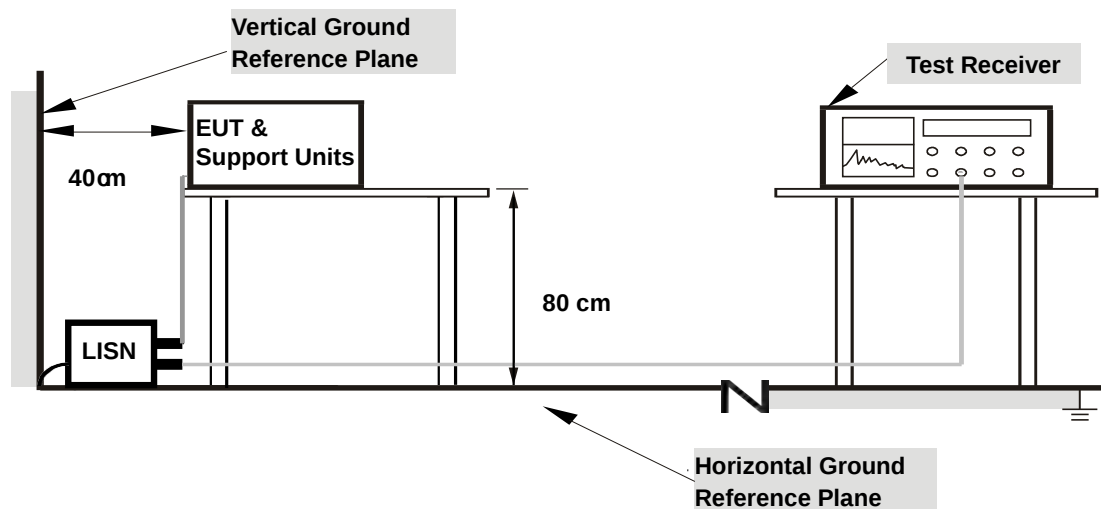

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.2.4 Test Result

Notes:

All modes of operation of the EUT were investigated, and only the worst-case(worst case: TX -802.11b) results are reported.


Calculation formula:

Measurement (dB μ V) = Reading Level (dB μ V) + Correct Factor (dB)

Over (dB) = Measurement (dB μ V) – Limit (dB μ V)


Model: WT018684-S5

Test mode:	TX – 802.11b	Phase:	L
Power supply:	AC120V/60Hz	Test site:	CE chamber 1

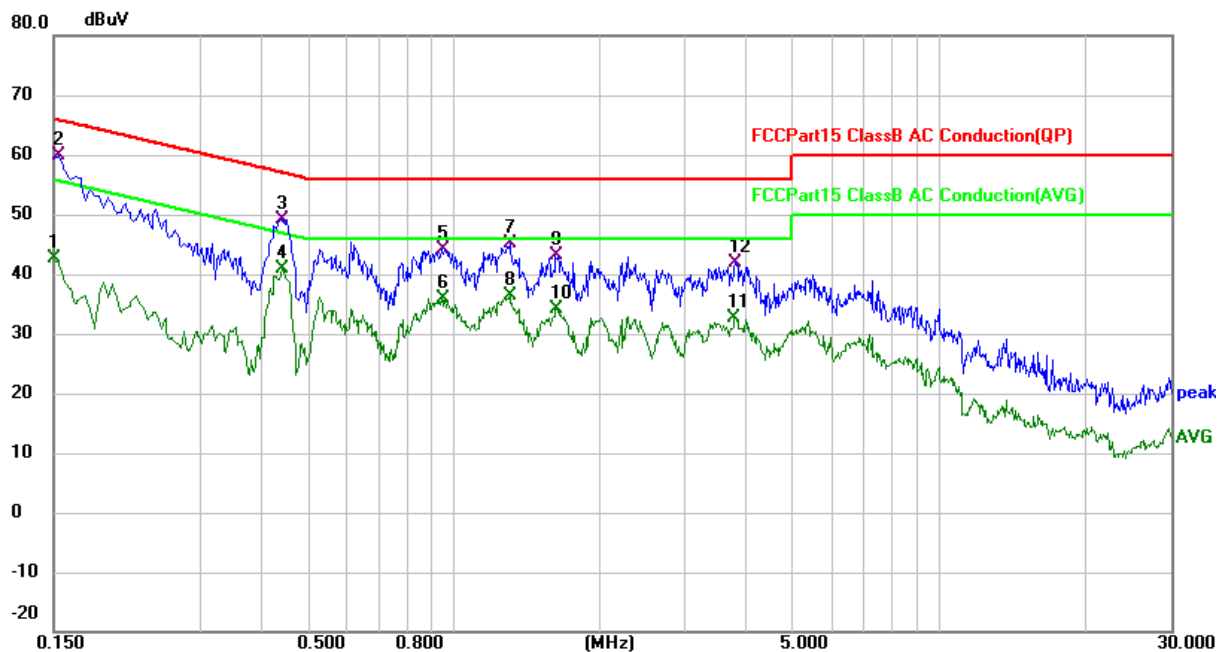

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	32.39	10.28	42.67	56.00	-13.33	AVG
2	*	0.1539	49.70	10.28	59.98	65.79	-5.81	QP
3		0.4420	38.04	11.19	49.23	57.02	-7.79	QP
4		0.4420	29.70	11.19	40.89	47.02	-6.13	AVG
5		0.9460	31.82	12.31	44.13	56.00	-11.87	QP
6		0.9460	23.60	12.31	35.91	46.00	-10.09	AVG
7		1.3060	32.25	12.91	45.16	56.00	-10.84	QP
8		1.3060	23.52	12.91	36.43	46.00	-9.57	AVG
9		1.6260	29.78	13.41	43.19	56.00	-12.81	QP
10		1.6300	20.69	13.41	34.10	46.00	-11.90	AVG
11		3.7900	22.34	10.27	32.61	46.00	-13.39	AVG
12		3.8140	31.50	10.27	41.77	56.00	-14.23	QP


Test mode:	TX – 802.11b	Phase:	N
Power supply:	AC120V/60Hz	Test site:	CE chamber 1

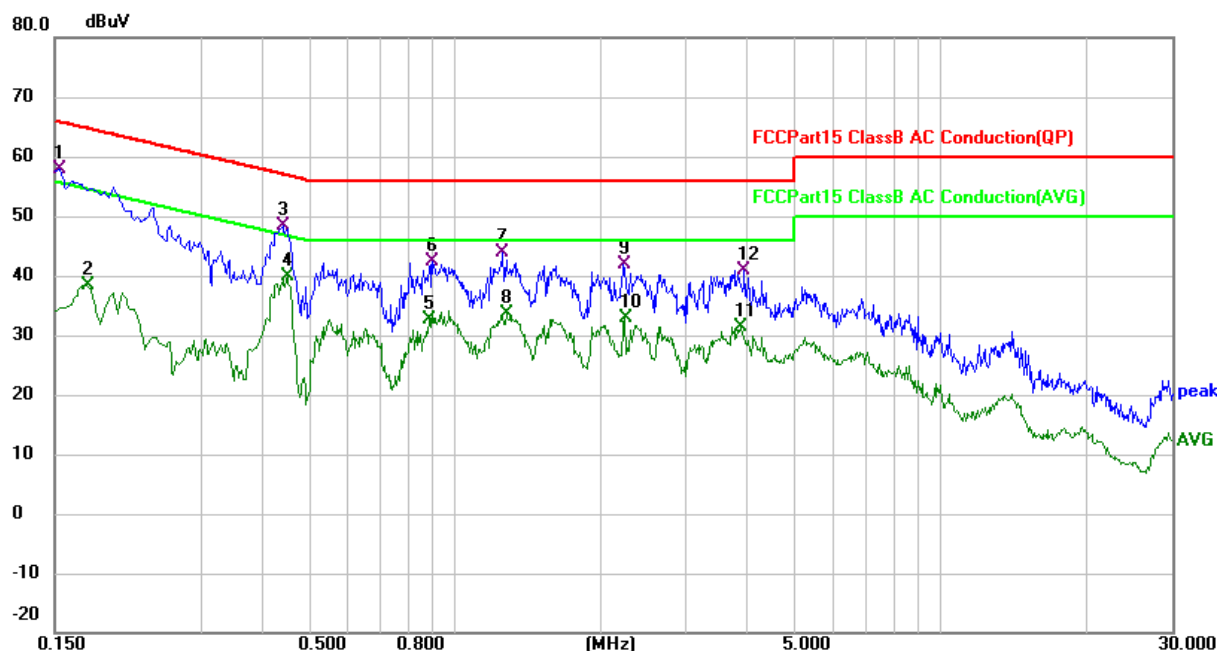

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	47.64	10.28	57.92	65.79	-7.87	QP
2		0.1740	28.22	10.25	38.47	54.77	-16.30	AVG
3		0.4420	37.25	11.16	48.41	57.02	-8.61	QP
4	*	0.4500	28.65	11.18	39.83	46.88	-7.05	AVG
5		0.8860	20.58	12.13	32.71	46.00	-13.29	AVG
6		0.9020	30.18	12.15	42.33	56.00	-13.67	QP
7		1.2620	30.87	12.89	43.76	56.00	-12.24	QP
8		1.2780	20.62	12.93	33.55	46.00	-12.45	AVG
9		2.2340	31.40	10.43	41.83	56.00	-14.17	QP
10		2.2380	22.33	10.43	32.76	46.00	-13.24	AVG
11		3.8980	21.17	10.28	31.45	46.00	-14.55	AVG
12		3.9500	30.64	10.28	40.92	56.00	-15.08	QP


Model: WT018684-S6

Test mode:	TX – 802.11b	Phase:	L
Power supply:	AC120V/60Hz	Test site:	CE chamber 1

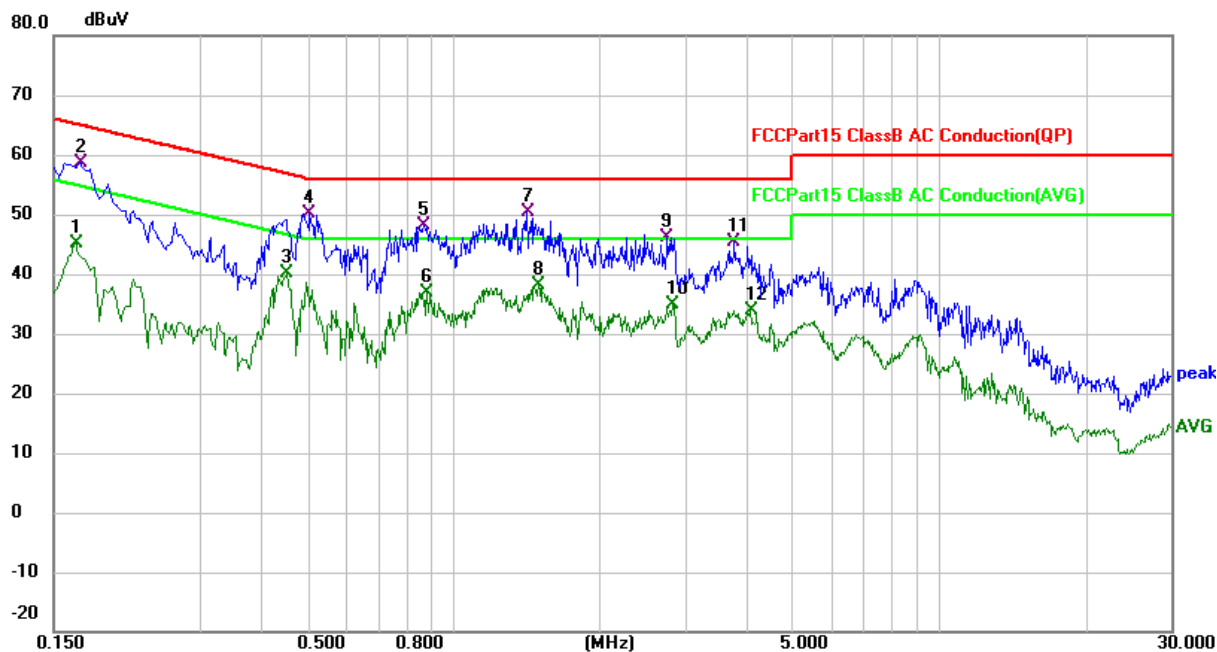

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1660	34.85	10.28	45.13	55.16	-10.03	AVG
2		0.1700	48.34	10.28	58.62	64.96	-6.34	QP
3		0.4540	28.86	11.22	40.08	46.80	-6.72	AVG
4		0.5060	38.68	11.34	50.02	56.00	-5.98	QP
5		0.8700	35.89	12.13	48.02	56.00	-7.98	QP
6		0.8820	24.76	12.15	36.91	46.00	-9.09	AVG
7	*	1.4180	37.33	13.08	50.41	56.00	-5.59	QP
8		1.5020	24.91	13.20	38.11	46.00	-7.89	AVG
9		2.7620	35.99	10.21	46.20	56.00	-9.80	QP
10		2.8300	24.76	10.23	34.99	46.00	-11.01	AVG
11		3.7900	35.18	10.27	45.45	56.00	-10.55	QP
12		4.0780	23.55	10.27	33.82	46.00	-12.18	AVG

Test mode:	TX – 802.11b	Phase:	N
Power supply:	AC120V/60Hz	Test site:	CE chamber 1

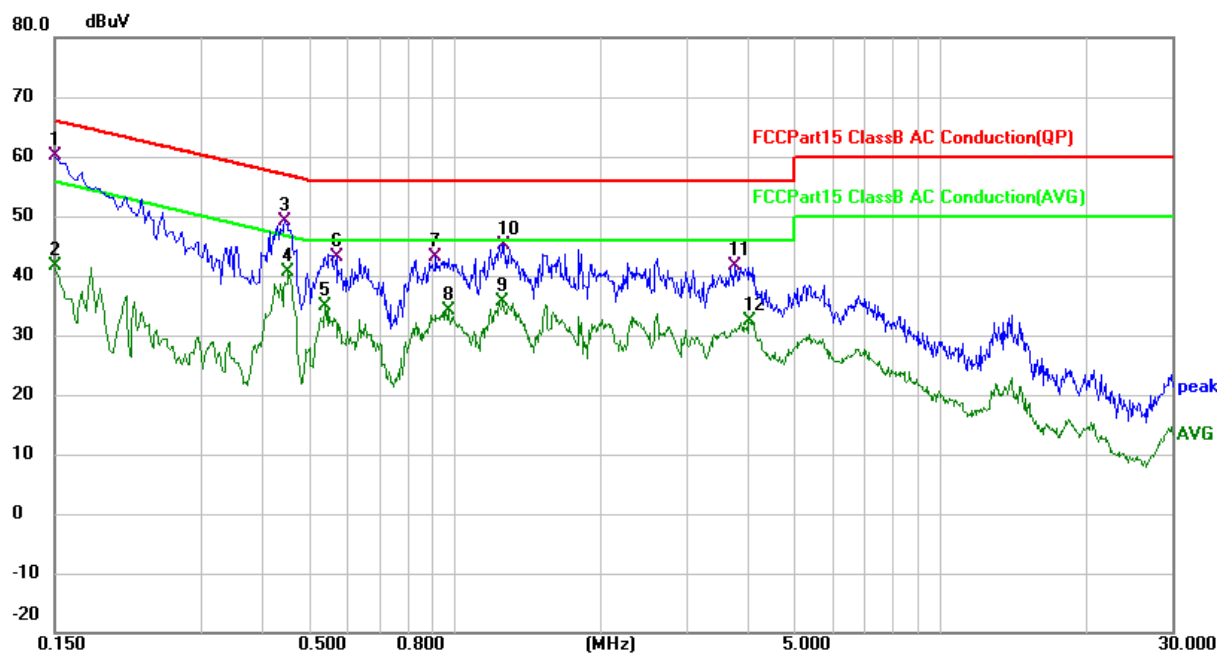

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1500	49.87	10.29	60.16	66.00	-5.84	QP
2		0.1500	31.45	10.29	41.74	56.00	-14.26	AVG
3		0.4460	37.89	11.18	49.07	56.95	-7.88	QP
4		0.4540	29.48	11.19	40.67	46.80	-6.13	AVG
5		0.5420	23.42	11.41	34.83	46.00	-11.17	AVG
6		0.5700	31.52	11.49	43.01	56.00	-12.99	QP
7		0.9140	30.89	12.16	43.05	56.00	-12.95	QP
8		0.9700	21.73	12.28	34.01	46.00	-11.99	AVG
9		1.2620	22.75	12.89	35.64	46.00	-10.36	AVG
10		1.2660	32.31	12.91	45.22	56.00	-10.78	QP
11		3.7620	31.43	10.28	41.71	56.00	-14.29	QP
12		4.0460	22.08	10.29	32.37	46.00	-13.63	AVG

6.3 Radiated spurious emission

6.3.1 Limits

§ 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

§ 15.209 Radiated emission limits at restricted bands:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device


Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Frequency range of measurements for unlicensed wireless device with digital device


Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

6.3.2 Test setup


Below 30MHz:

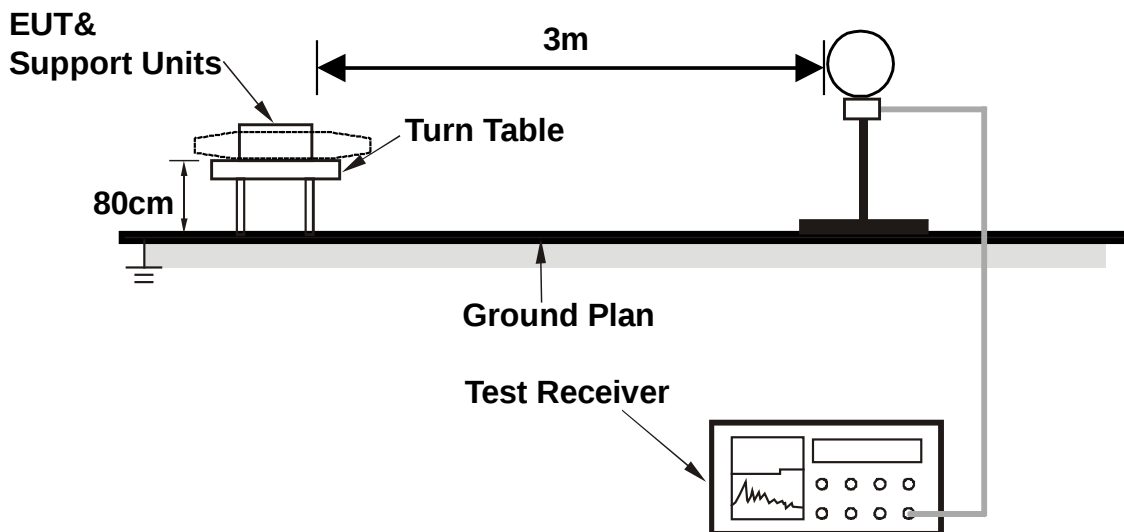

30MHz~1GHz:

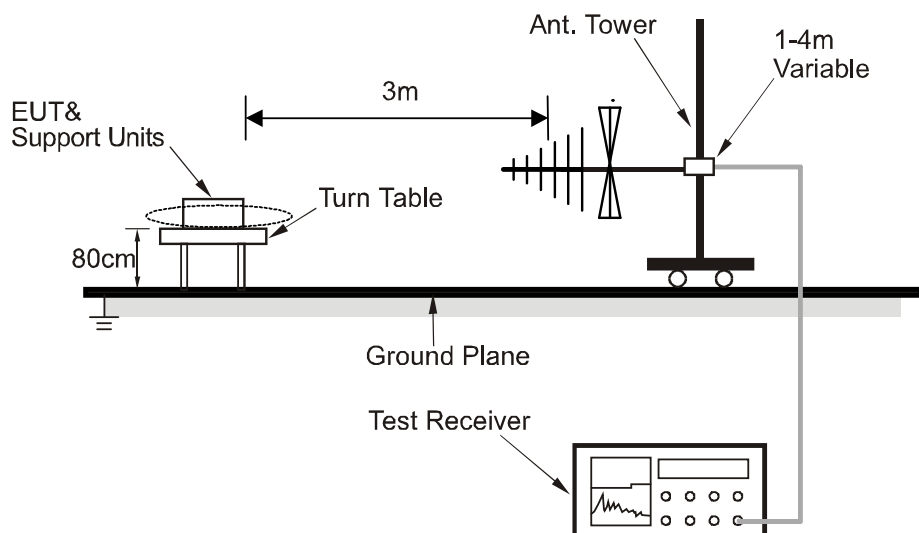

Above 1GHz:

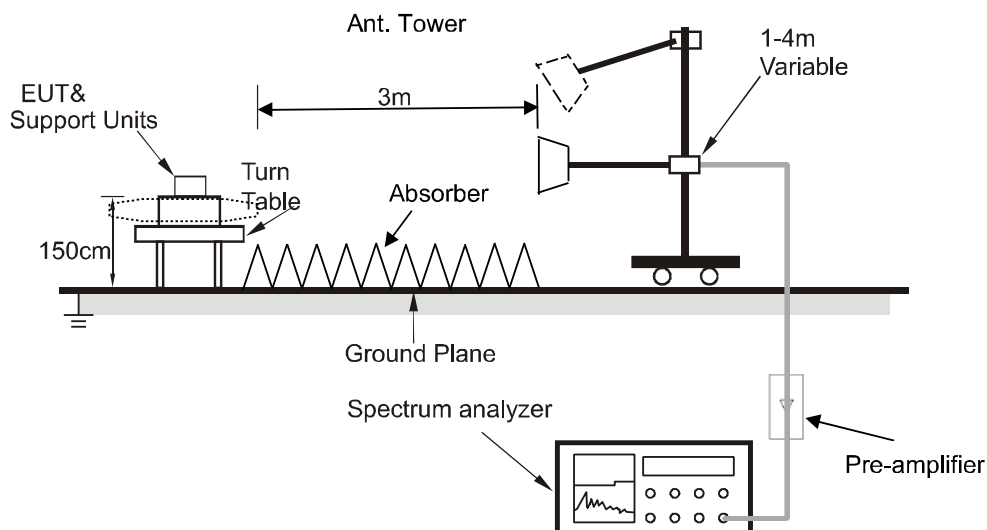

For the actual test configuration, please refer to the related item – Photographs of the test setup.

6.3.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 6.3, 6.4, 6.5, 6.6, 11.11, 11.12, 11.13.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission blew 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 3MHz, Average detector

6.3.4 Test results

Notes:

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.


Calculation formula:

Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)

Model: WT018684-S5
Radiated emissions between 30MHz – 1GHz


Test mode:	TX – 802.11b 2412MHz	Polarization:	Horizontal
Power supply:	DC 3.3V	Test site:	RE chamber 2

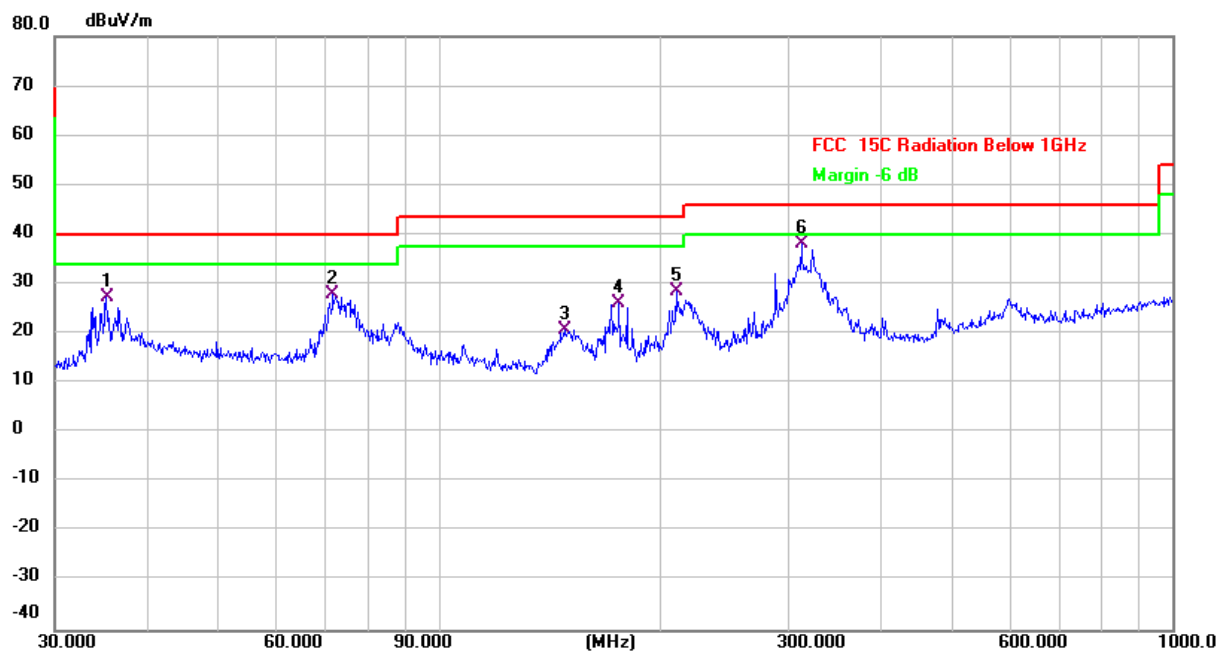

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		35.2512	37.35	-9.96	27.39	40.00	-12.61	QP
2		71.8320	39.65	-11.58	28.07	40.00	-11.93	QP
3		148.4410	33.35	-12.45	20.90	43.50	-22.60	QP
4		176.2686	37.47	-11.21	26.26	43.50	-17.24	QP
5		210.7860	38.07	-9.52	28.55	43.50	-14.95	QP
6	*	312.1794	45.68	-7.60	38.08	46.00	-7.92	QP

Radiated emissions between 30MHz – 1GHz

Test mode:	TX – 802.11b 2412MHz	Polarization:	Vertical
Power supply:	DC 3.3V	Test site:	RE chamber 2

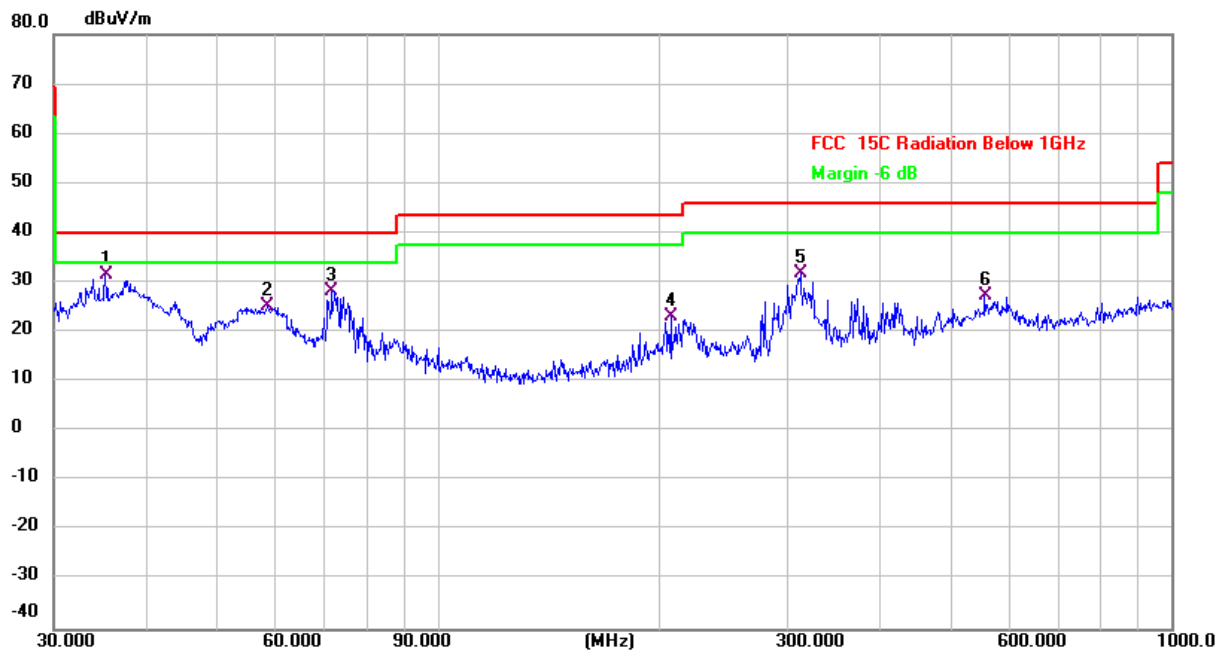

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	35.2512	41.44	-9.96	31.48	40.00	-8.52	QP
2		58.6126	36.05	-10.89	25.16	40.00	-14.84	QP
3		71.8320	39.94	-11.58	28.36	40.00	-11.64	QP
4		207.8501	32.65	-9.58	23.07	43.50	-20.43	QP
5		312.1794	39.39	-7.60	31.79	46.00	-14.21	QP
6		556.7744	31.12	-3.82	27.30	46.00	-18.70	QP

Radiated emissions 1 GHz ~ 25 GHz

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
TX 802.11b 2412MHz							
4804	50.45	0.91	51.36	74.00	-22.64	Peak	V
4804	47.19	0.91	48.10	54.00	-5.90	AVG	V
7206	39.47	5.77	45.24	74.00	-28.76	Peak	V
7206	33.35	5.77	39.12	54.00	-14.88	AVG	V
9608	41.00	6.29	47.29	74.00	-26.71	Peak	V
9608	34.94	6.29	41.23	54.00	-12.77	AVG	V
4804	52.87	0.91	53.78	74.00	-20.22	Peak	H
4804	49.43	0.91	50.34	54.00	-3.66	AVG	H
7206	40.60	5.77	46.37	74.00	-27.63	Peak	H
7206	34.38	5.77	40.15	54.00	-13.85	AVG	H
9608	40.88	6.29	47.17	74.00	-26.83	Peak	H
9608	34.81	6.29	41.10	54.00	-12.90	AVG	H
TX 802.11b 2437MHz							
4880	50.17	1.14	51.31	74.00	-22.69	Peak	V
4880	45.98	1.14	47.12	54.00	-6.88	AVG	V
7320	39.22	5.55	44.77	74.00	-29.23	Peak	V
7320	32.84	5.55	38.39	54.00	-15.61	AVG	V
9760	40.45	6.22	46.67	74.00	-27.33	Peak	V
9760	34.06	6.22	40.28	54.00	-13.72	AVG	V
4880	53.60	1.14	54.74	74.00	-19.26	Peak	H
4880	49.10	1.14	50.24	54.00	-3.76	AVG	H
7320	39.96	5.55	45.51	74.00	-28.49	Peak	H
7320	33.78	5.55	39.33	54.00	-14.67	AVG	H
9760	40.80	6.22	47.02	74.00	-26.98	Peak	H
9760	34.88	6.22	41.10	54.00	-12.90	AVG	H


Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	Peak/AVG	H/V
TX 802.11b 2462MHz							
4960	51.30	1.37	52.67	74.00	-21.33	Peak	V
4960	46.88	1.37	48.25	54.00	-5.75	AVG	V
7440	39.99	5.32	45.31	74.00	-28.69	Peak	V
7440	33.83	5.32	39.15	54.00	-14.85	AVG	V
9920	40.49	6.14	46.63	74.00	-27.37	Peak	V
9920	34.21	6.14	40.35	54.00	-13.65	AVG	V
4960	52.45	1.37	53.82	74.00	-20.18	Peak	H
4960	48.01	1.37	49.38	54.00	-4.62	AVG	H
7440	40.97	5.32	46.29	74.00	-27.71	Peak	H
7440	34.83	5.32	40.15	54.00	-13.85	AVG	H
9920	40.72	6.14	46.86	74.00	-27.14	Peak	H
9920	34.40	6.14	40.54	54.00	-13.46	AVG	H

Radiated emissions at band edge

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	Peak/AVG	H/V
TX 802.11b 2412MHz							
(MHz)	(dB μ V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)	Peak/AVG	H/V
2310	44.45	-8.20	36.25	74.00	-37.75	Peak	V
2310	35.21	-8.20	27.01	54.00	-26.99	AVG	V
2390	51.16	-7.83	43.33	74.00	-30.67	Peak	V
2390	42.39	-7.83	34.56	54.00	-19.44	AVG	V
2310	53.64	-8.20	45.44	74.00	-28.56	Peak	H
2310	43.78	-8.20	35.58	54.00	-18.42	AVG	H
2390	58.82	-7.83	50.99	74.00	-23.01	Peak	H
2390	49.01	-7.83	41.18	54.00	-12.82	AVG	H
TX 802.11b 2462MHz							
2483.5	52.00	-7.39	44.61	74.00	-29.39	Peak	V
2483.5	43.65	-7.39	36.26	54.00	-17.74	AVG	V
2500	49.59	-7.32	42.27	74.00	-31.73	Peak	V
2500	41.06	-7.32	33.74	54.00	-20.26	AVG	V
2483.5	59.05	-7.39	51.66	74.00	-22.34	Peak	H
2483.5	50.71	-7.39	43.32	54.00	-10.68	AVG	H
2500	57.91	-7.32	50.59	74.00	-23.41	Peak	H
2500	48.24	-7.32	40.92	54.00	-13.08	AVG	H

Model: WT018684-S6
Radiated emissions between 30MHz – 1GHz


Test mode:	TX – 802.11b 2412MHz	Polarization:	Horizontal
Power supply:	DC 3.3V	Test site:	RE chamber 2

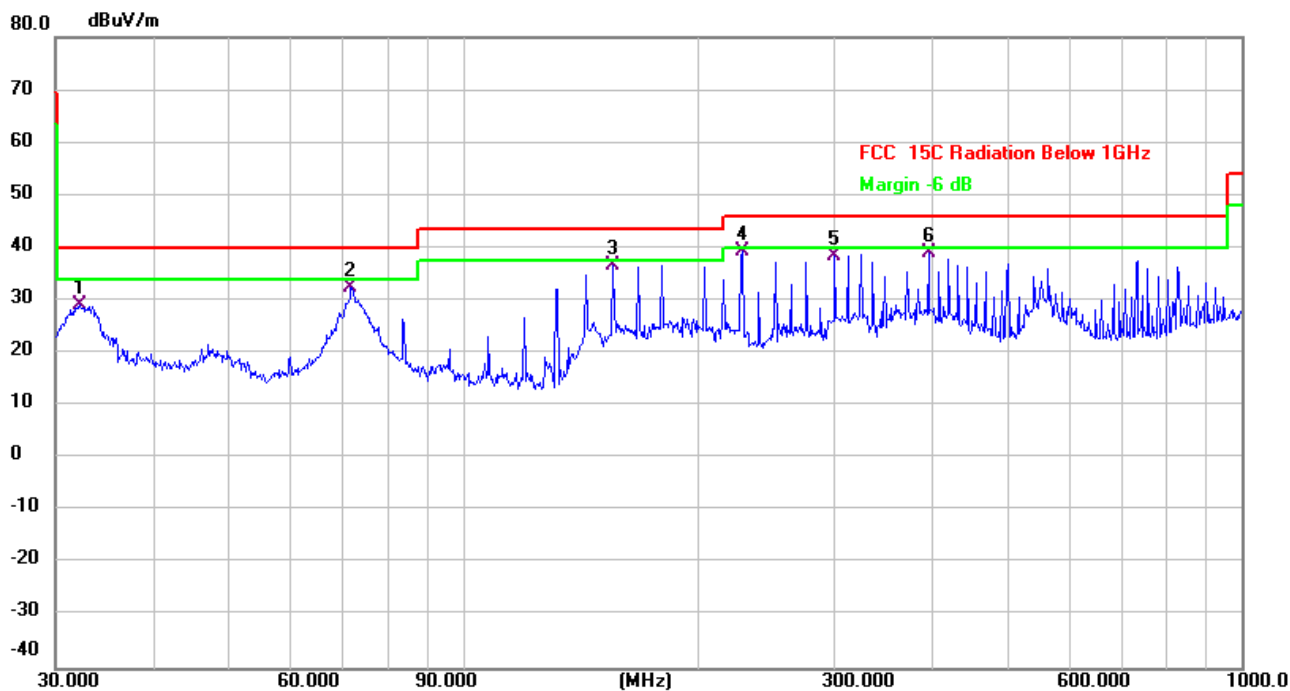

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		32.1795	39.69	-10.40	29.29	40.00	-10.71	QP
2		71.8320	43.95	-11.58	32.37	40.00	-7.63	QP
3		155.9101	48.81	-12.08	36.73	43.50	-6.77	QP
4	*	228.4904	48.33	-9.03	39.30	46.00	-6.70	QP
5		300.3672	46.74	-8.21	38.53	46.00	-7.47	QP
6		396.2415	45.97	-7.01	38.96	46.00	-7.04	QP

Radiated emissions between 30MHz – 1GHz

Test mode:	TX – 802.11b 2412MHz	Polarization:	Vertical
Power supply:	DC 3.3V	Test site:	RE chamber 2

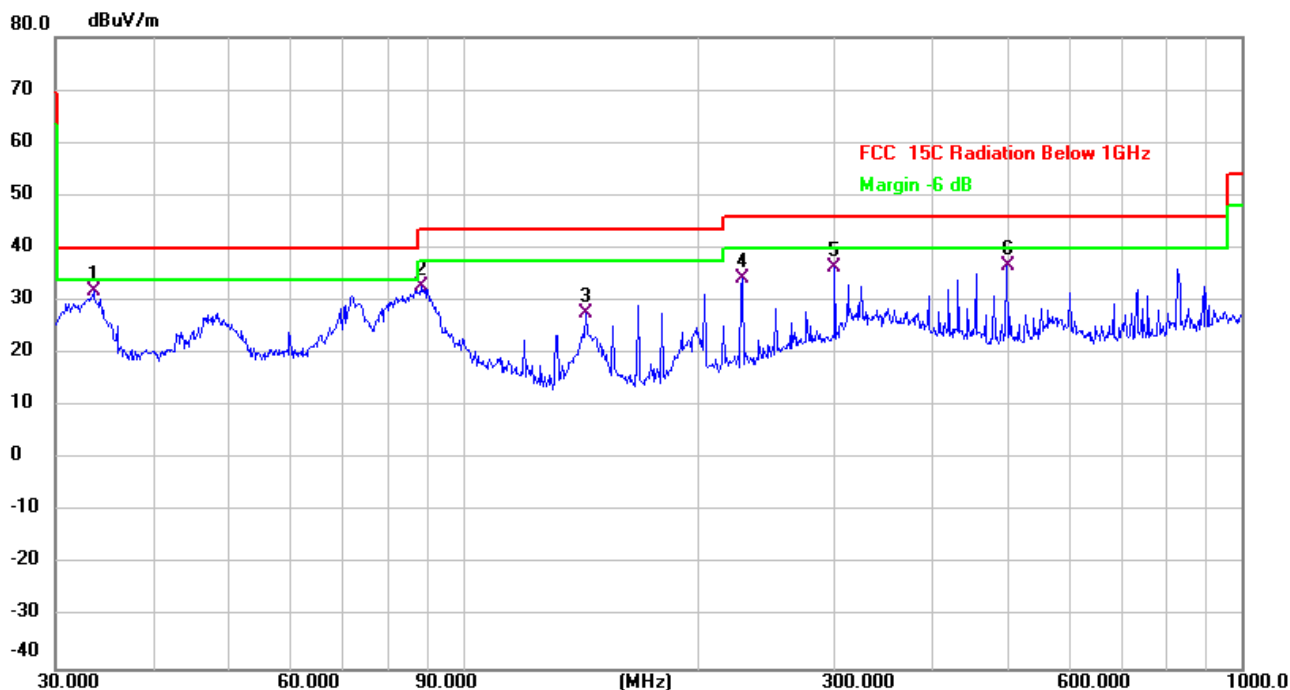

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	33.5624	42.09	-10.18	31.91	40.00	-8.09	QP
2		88.3421	43.63	-10.80	32.83	43.50	-10.67	QP
3		143.8295	40.30	-12.69	27.61	43.50	-15.89	QP
4		228.4904	43.22	-9.03	34.19	46.00	-11.81	QP
5		300.3672	44.55	-8.21	36.34	46.00	-9.66	QP
6		499.4247	41.71	-4.92	36.79	46.00	-9.21	QP

Radiated emissions 1 GHz ~ 25 GHz

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
TX 802.11b 2412MHz							
4804	53.96	0.91	54.87	74.00	-19.13	Peak	V
4804	52.56	0.91	53.47	54.00	-0.53	AVG	V
7206	40.46	5.77	46.23	74.00	-27.77	Peak	V
7206	34.38	5.77	40.15	54.00	-13.85	AVG	V
9608	39.93	6.29	46.22	74.00	-27.78	Peak	V
9608	33.82	6.29	40.11	54.00	-13.89	AVG	V
4804	58.81	0.91	59.72	74.00	-14.28	Peak	H
4804	56.53	0.91	57.44	54.00	3.44	AVG	H
7206	38.45	5.77	44.22	74.00	-29.78	Peak	H
7206	32.33	5.77	38.10	54.00	-15.90	AVG	H
9608	39.86	6.29	46.15	74.00	-27.85	Peak	H
9608	33.76	6.29	40.05	54.00	-13.95	AVG	H
TX 802.11b 2437MHz							
4880	54.57	1.14	55.71	74.00	-18.29	Peak	V
4880	53.22	1.14	54.36	54.00	0.36	AVG	V
7320	39.04	5.55	44.59	74.00	-29.41	Peak	V
7320	32.70	5.55	38.25	54.00	-15.75	AVG	V
9760	41.17	6.22	47.39	74.00	-26.61	Peak	V
9760	34.93	6.22	41.15	54.00	-12.85	AVG	V
4880	58.60	1.14	59.74	74.00	-14.26	Peak	H
4880	56.31	1.14	57.45	54.00	3.45	AVG	H
7320	40.69	5.55	46.24	74.00	-27.76	Peak	H
7320	34.60	5.55	40.15	54.00	-13.85	AVG	H
9760	41.56	6.22	47.78	74.00	-26.22	Peak	H
9760	35.11	6.22	41.33	54.00	-12.67	AVG	H

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
TX 802.11b 2462MHz							
4960	54.24	1.37	55.61	74.00	-18.39	Peak	V
4960	52.87	1.37	54.24	54.00	0.24	AVG	V
7440	39.90	5.32	45.22	74.00	-28.78	Peak	V
7440	33.78	5.32	39.10	54.00	-14.90	AVG	V
9920	39.91	6.14	46.05	74.00	-27.95	Peak	V
9920	33.96	6.14	40.10	54.00	-13.90	AVG	V
4960	55.11	1.37	56.48	74.00	-17.52	Peak	H
4960	53.77	1.37	55.14	54.00	1.14	AVG	H
7440	43.27	5.32	48.59	74.00	-25.41	Peak	H
7440	37.03	5.32	42.35	54.00	-11.65	AVG	H
9920	41.04	6.14	47.18	74.00	-26.82	Peak	H
9920	34.98	6.14	41.12	54.00	-12.88	AVG	H

Radiated emissions at band edge


Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
TX 802.11b 2412MHz							
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
2310	50.61	-8.20	42.41	74.00	-31.59	Peak	V
2310	41.59	-8.20	33.39	54.00	-20.61	AVG	V
2390	56.02	-7.83	48.19	74.00	-25.81	Peak	V
2390	46.82	-7.83	38.99	54.00	-15.01	AVG	V
2310	53.77	-8.20	45.57	74.00	-28.43	Peak	H
2310	44.35	-8.20	36.15	54.00	-17.85	AVG	H
2390	59.96	-7.83	52.13	74.00	-21.87	Peak	H
2390	51.11	-7.83	43.28	54.00	-10.72	AVG	H
TX 802.11b 2462MHz							
2483.5	58.00	-7.39	50.61	74.00	-23.39	Peak	V
2483.5	49.63	-7.39	42.24	54.00	-11.76	AVG	V
2500	54.54	-7.32	47.22	74.00	-26.78	Peak	V
2500	45.74	-7.32	38.42	54.00	-15.58	AVG	V
2483.5	63.28	-7.39	55.89	74.00	-18.11	Peak	H
2483.5	55.01	-7.39	47.62	54.00	-6.38	AVG	H
2500	59.73	-7.32	52.41	74.00	-21.59	Peak	H
2500	51.43	-7.32	44.11	54.00	-9.89	AVG	H

6.4 DTS bandwidth

6.4.1 Limits

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4.2 Test setup



6.4.3 Test procedures

Test method: ANSI C63.10-2013 Section 11.8.1

6.4.4 Test results


Note: See the appendix A

6.5 Maximum conducted output power

6.5.1 Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

6.5.2 Test setup



6.5.3 Test procedure

Test method for peak power: ANSI C63.10-2013 Section 11.9.1.3 PKPM1 Peak power meter method

Test method for average power: ANSI C63.10-2013 Section 11.9.2.3.1 Method AVGPM

6.5.4 Test results


Note: see the appendix B

6.6 Power spectral density

6.6.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.6.2 Test setup



6.6.3 Test Procedure

Test method: ANSI C63.10-2013 Section 11.10.2

6.6.4 Test Results


Note: see the appendix C

6.7 Band edge (Conducted)

6.7.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.7.2 Test setup



6.7.3 Test procedure

Test method: ANSI C63.10-2013 Section 11.13

6.7.4 Test results


Note: see the appendix D

6.8 Conducted spurious emissions

6.8.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.8.2 Test setup



6.8.3 Test procedure

Test method: ANSI C63.10-2013 Section 11.13

6.8.4 Test results


Note: see the appendix E

6.9 Duty Cycle

6.9.1 Limits

None, for reporting purposes only.

6.9.2 Test setup



6.9.3 Test procedure

Test method: KDB 558074 section 6, zero-span spectrum analyzer method.

6.9.4 Test Results


Note: see the appendix F

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.080	0.5	PASS
		2437	9.120	0.5	PASS
		2462	9.080	0.5	PASS
11G	Ant1	2412	16.320	0.5	PASS
		2437	16.280	0.5	PASS
		2462	16.280	0.5	PASS
11N20SISO	Ant1	2412	17.160	0.5	PASS
		2437	17.280	0.5	PASS
		2462	16.880	0.5	PASS

Test Graphs

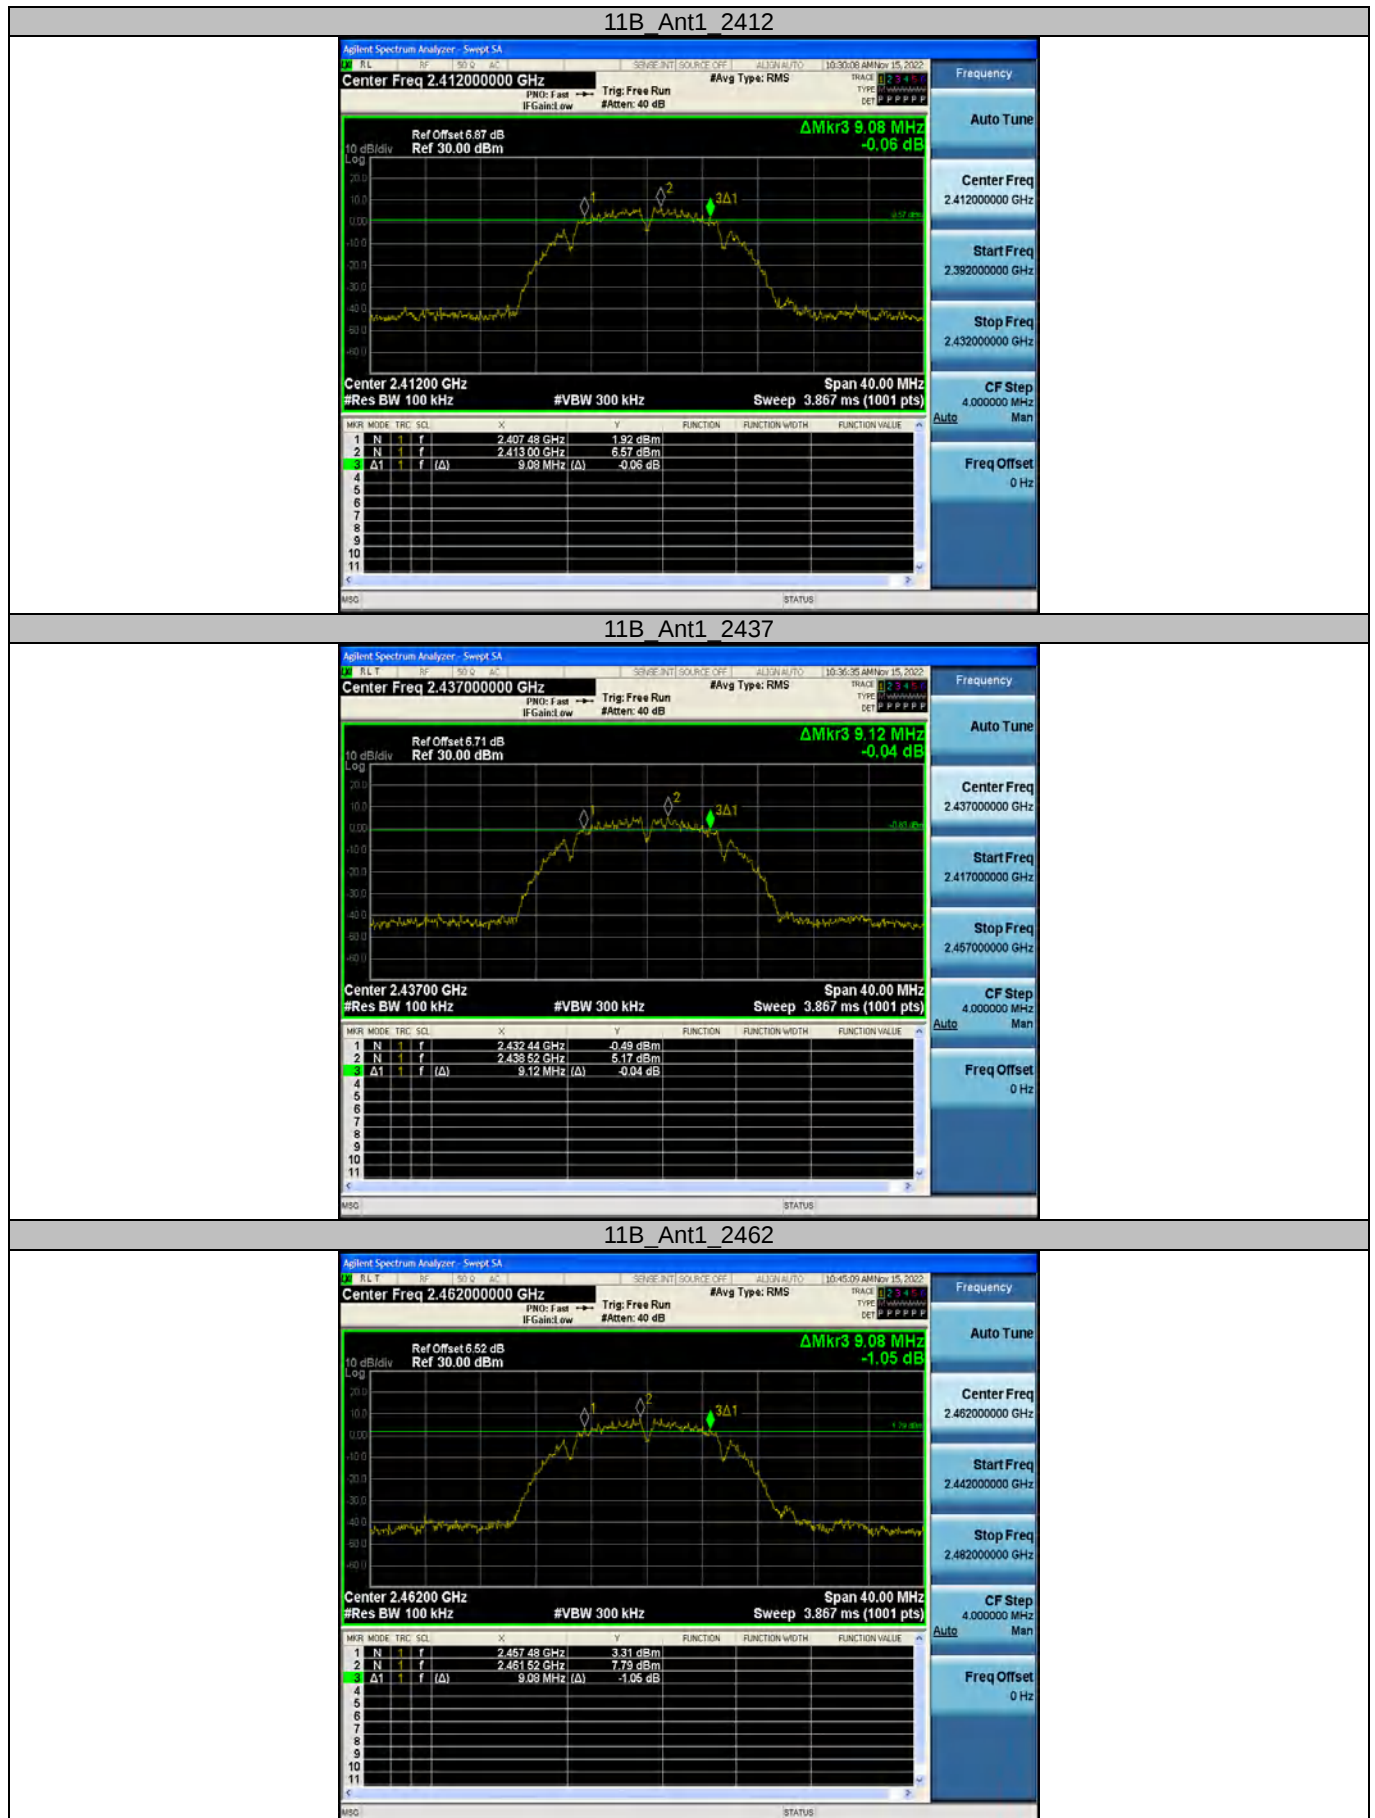

11G_Ant1_2412



11G_Ant1_2437



11G_Ant1_2462



11N20SISO_Ant1_2412



11N20SISO_Ant1_2437



11N20SISO_Ant1_2462



Appendix B: Maximum conducted output power

Test Result Peak


Model: WT018684-S5

Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	19.13	≤20.97	PASS
		2437	19.69	≤20.97	PASS
		2462	19.38	≤20.97	PASS
11G	Ant1	2412	16.23	≤20.97	PASS
		2437	16.06	≤20.97	PASS
		2462	16.01	≤20.97	PASS
11N20SISO	Ant1	2412	16.51	≤20.97	PASS
		2437	16.09	≤20.97	PASS
		2462	16.32	≤20.97	PASS


Model: WT018684-S6

Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	19.31	≤20.97	PASS
		2437	19.47	≤20.97	PASS
		2462	19.19	≤20.97	PASS
11G	Ant1	2412	16.44	≤20.97	PASS
		2437	16.21	≤20.97	PASS
		2462	16.06	≤20.97	PASS
11N20SISO	Ant1	2412	16.78	≤20.97	PASS
		2437	16.42	≤20.97	PASS
		2462	16.31	≤20.97	PASS


Test Graphs Peak- Model: WT018684-S5

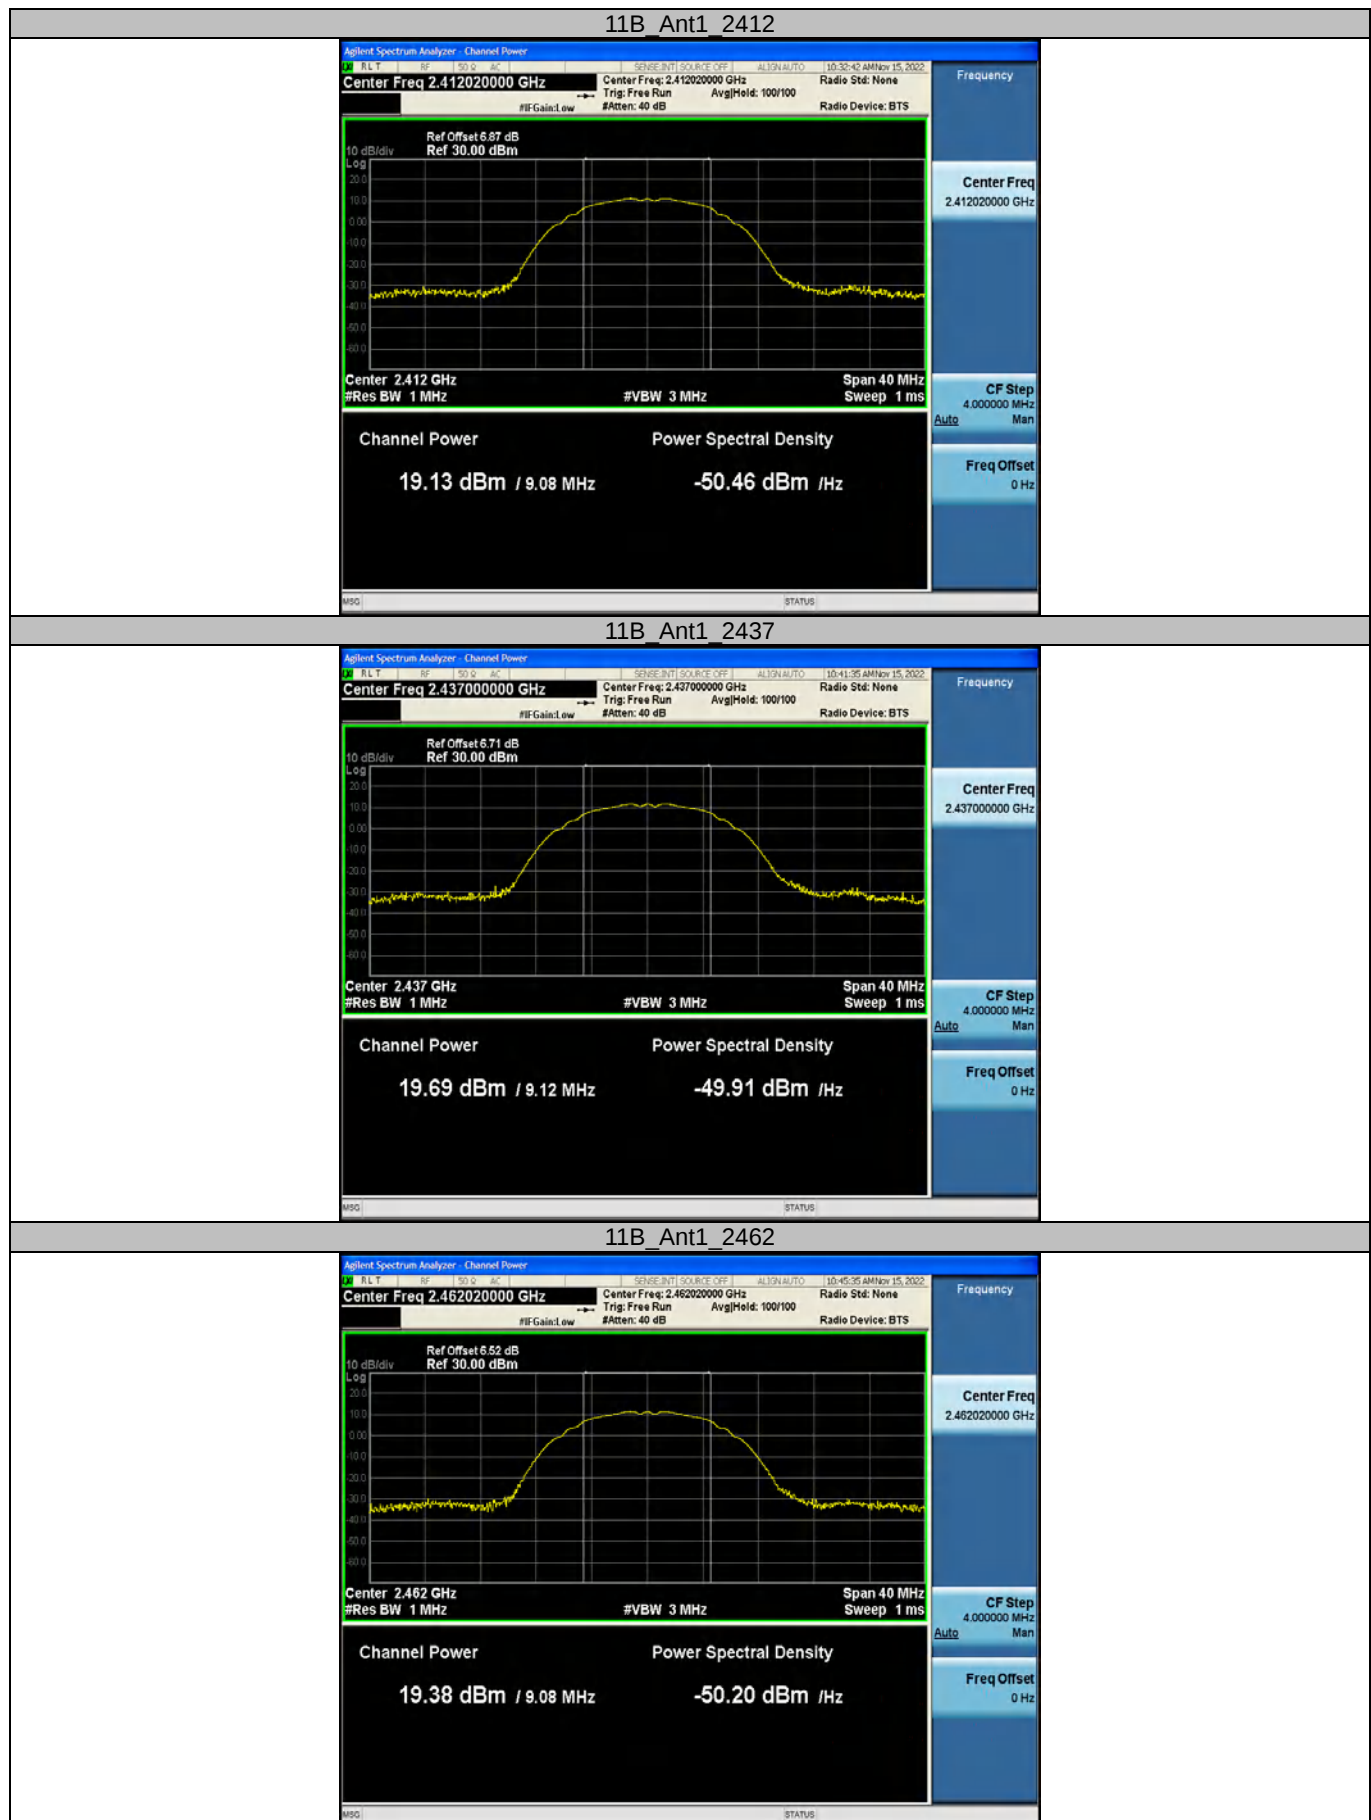


11G_Ant1_2412

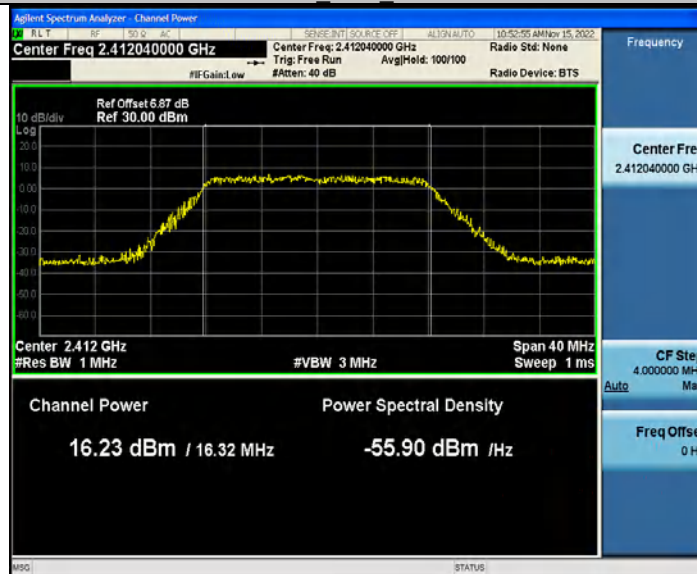


11G_Ant1_2437

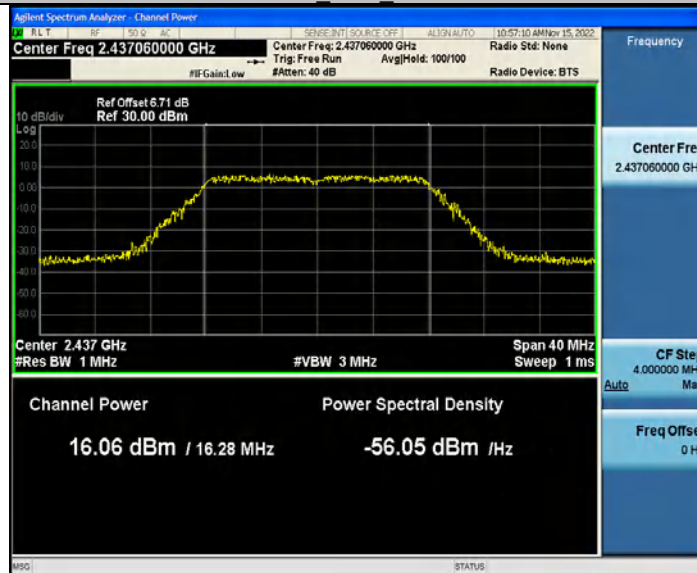


11G_Ant1_2462

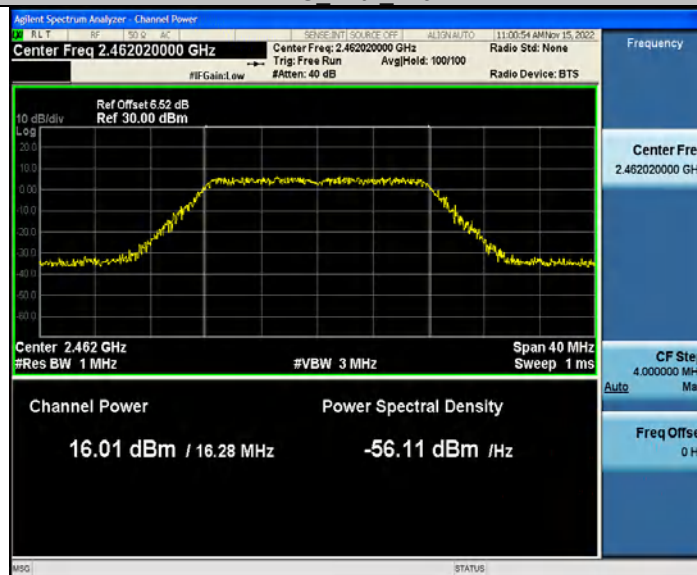

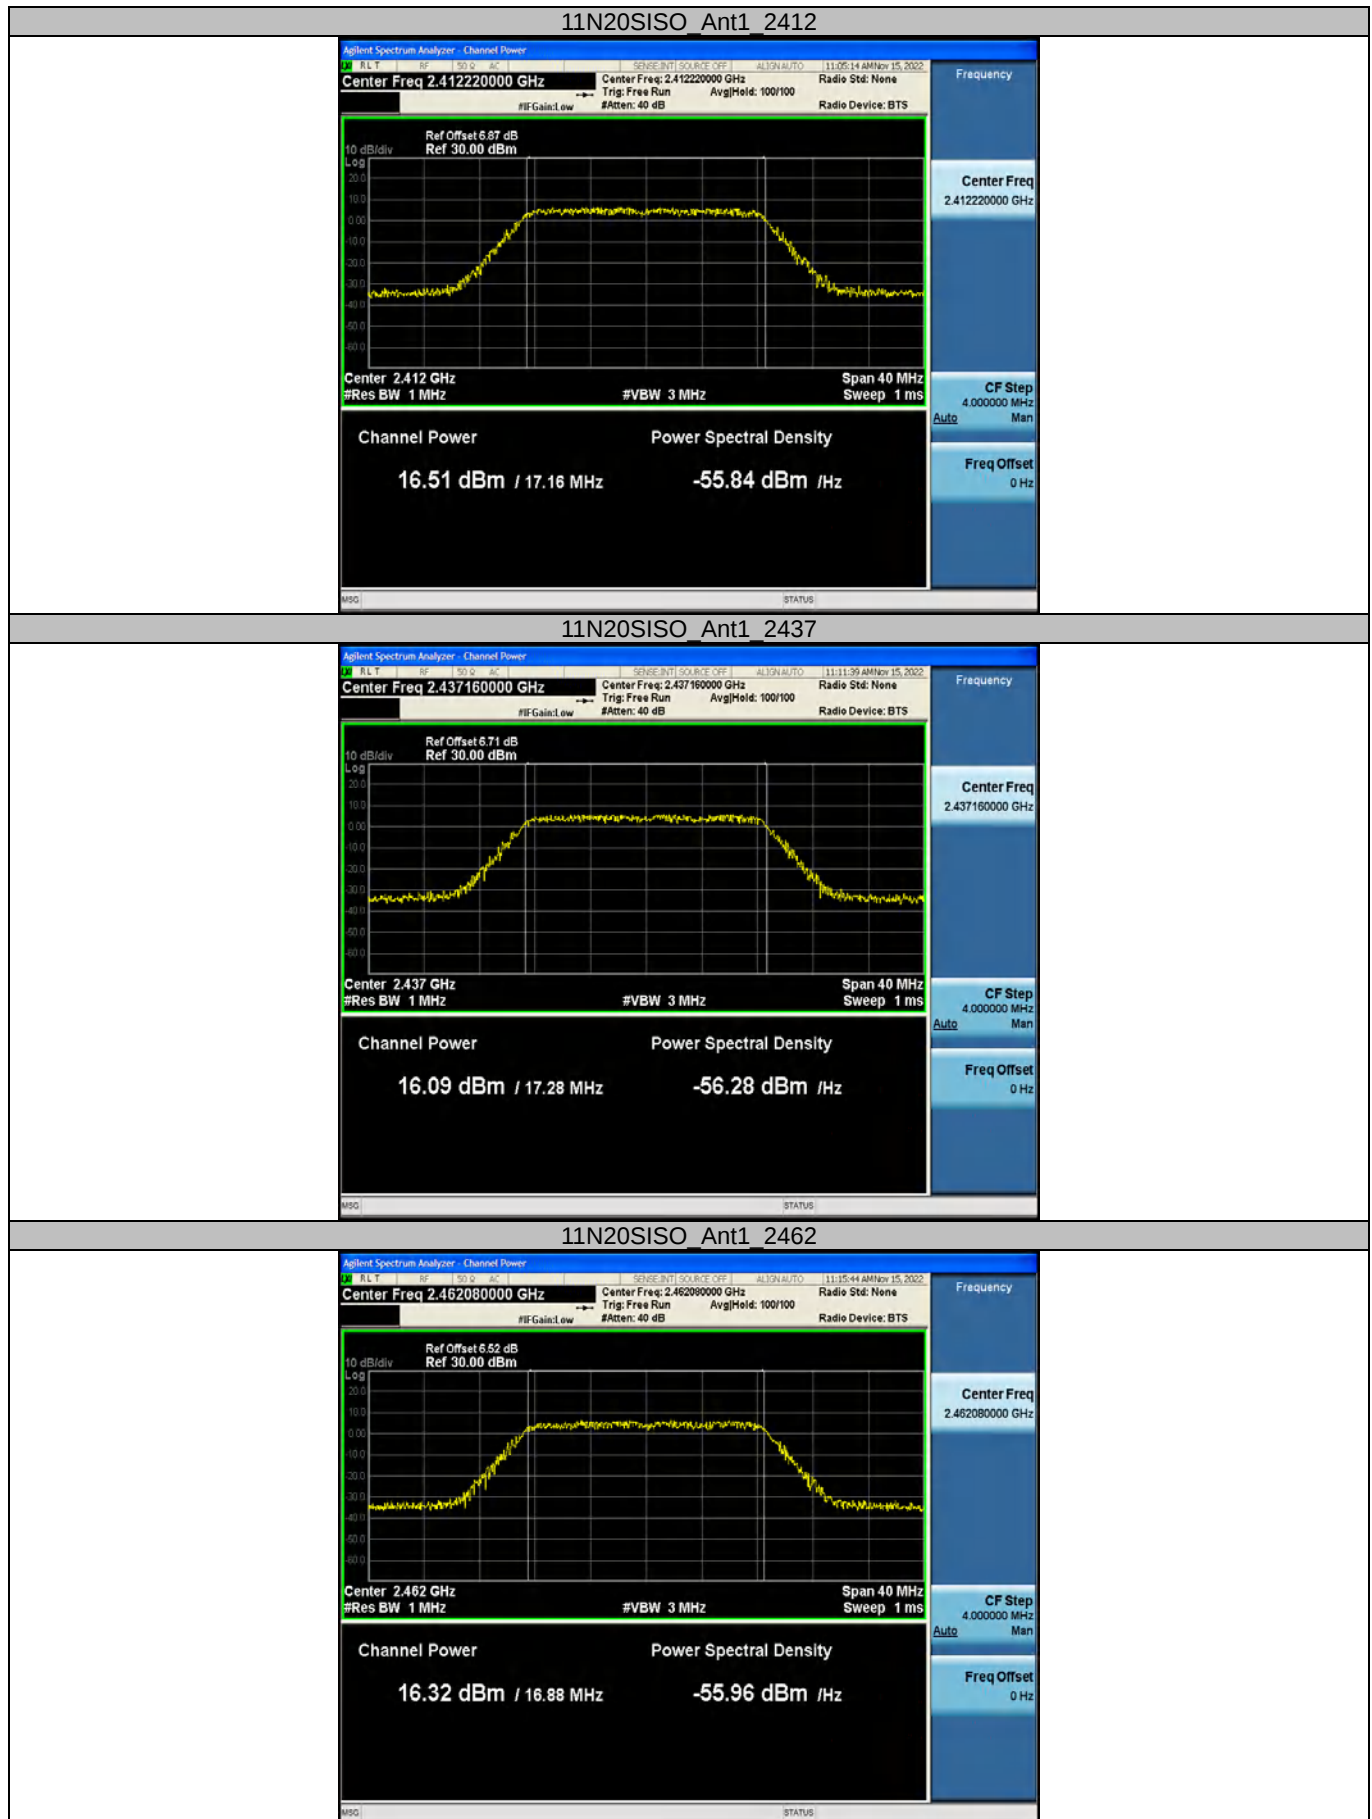

Test Graphs Peak- Model: WT018684-S6



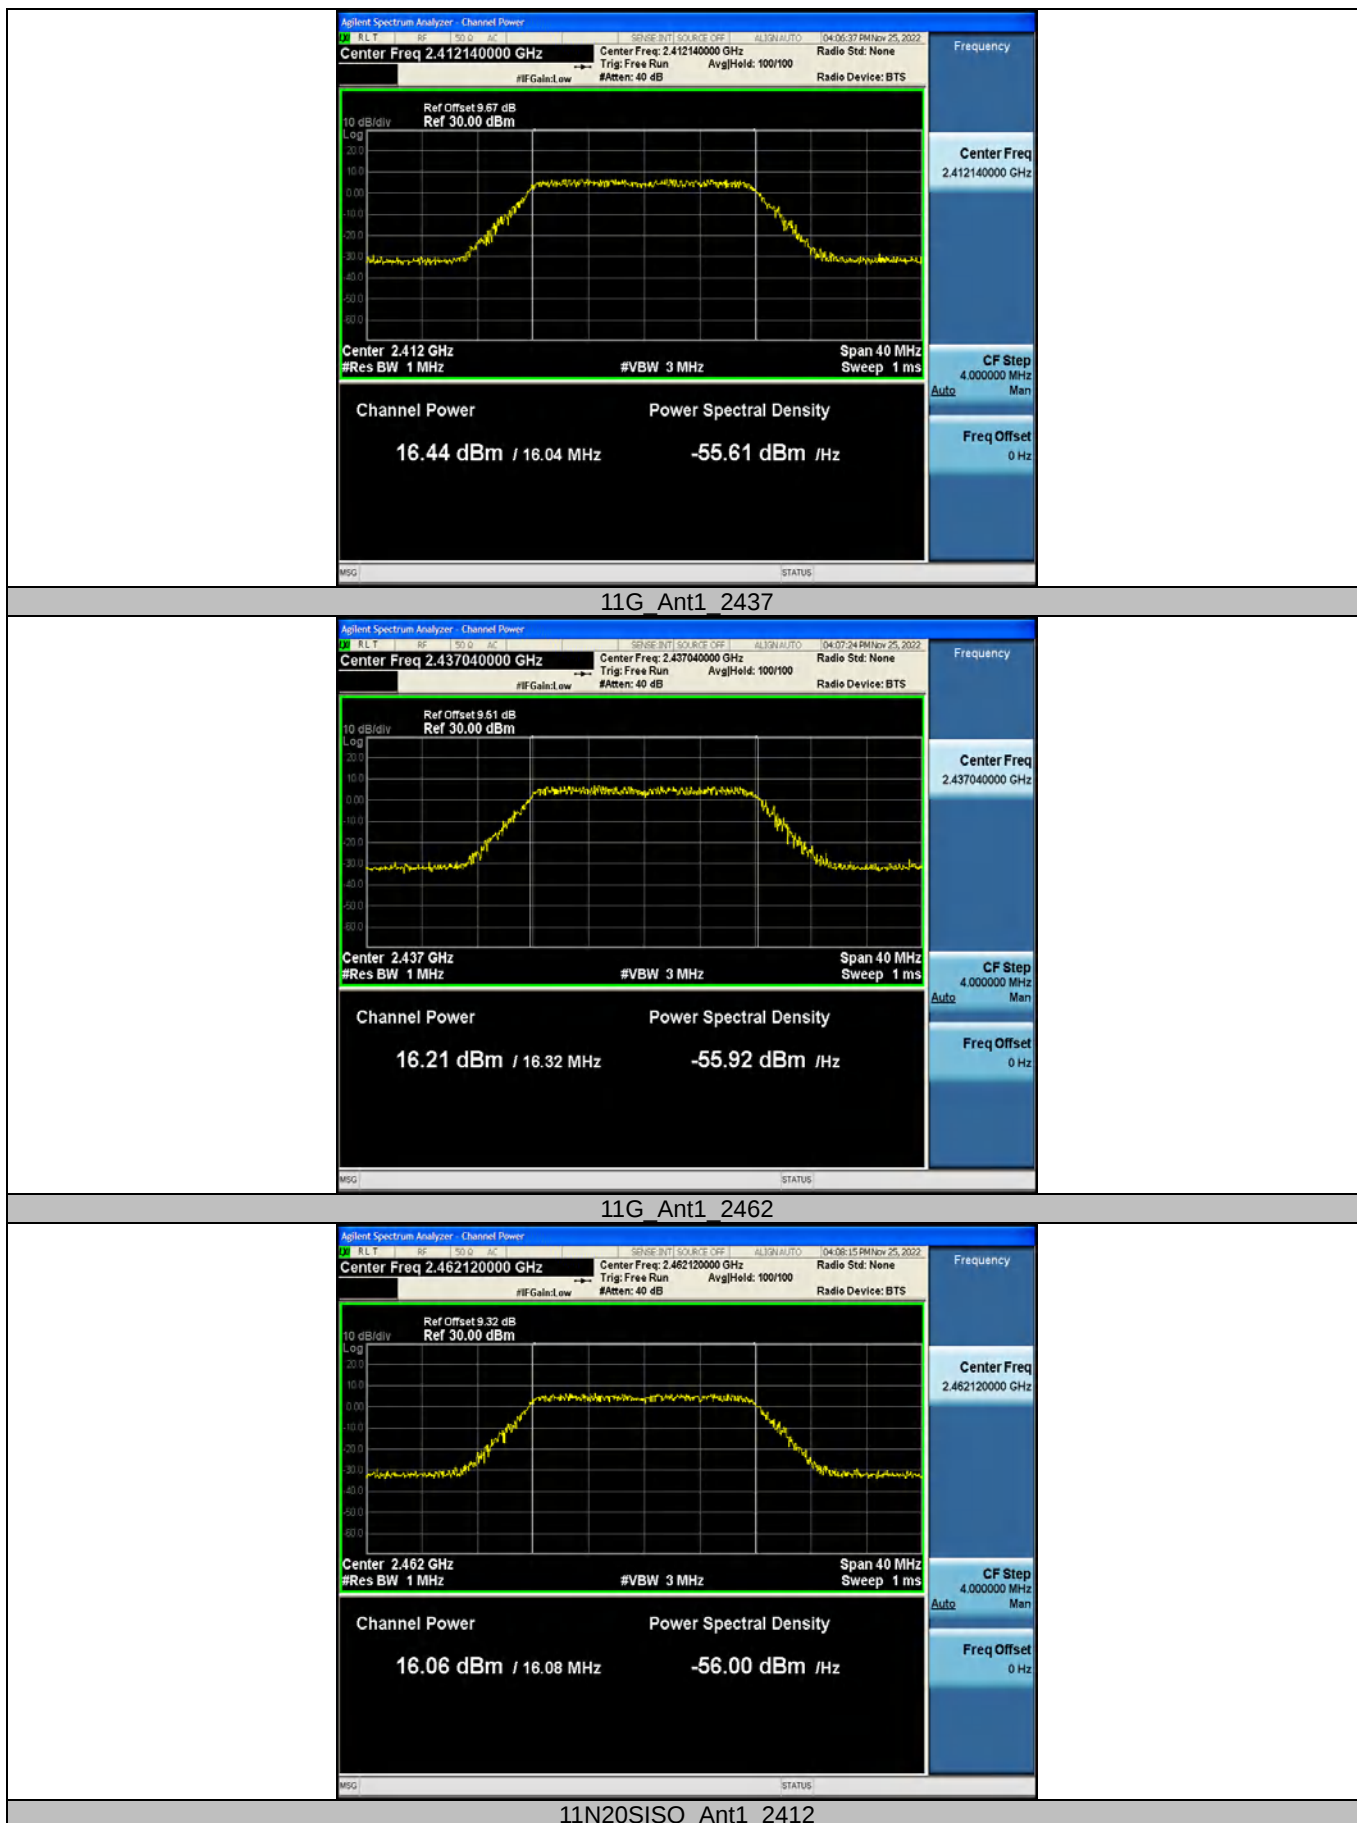




Appendix C: Maximum power spectral density


Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	2.32	≤8.00	PASS
		2437	2.86	≤8.00	PASS
		2462	2.75	≤8.00	PASS
11G	Ant1	2412	-5.63	≤8.00	PASS
		2437	-6.5	≤8.00	PASS
		2462	-6.29	≤8.00	PASS
11N20SISO	Ant1	2412	-6.43	≤8.00	PASS
		2437	-6.1	≤8.00	PASS
		2462	-5.97	≤8.00	PASS


Test Graphs

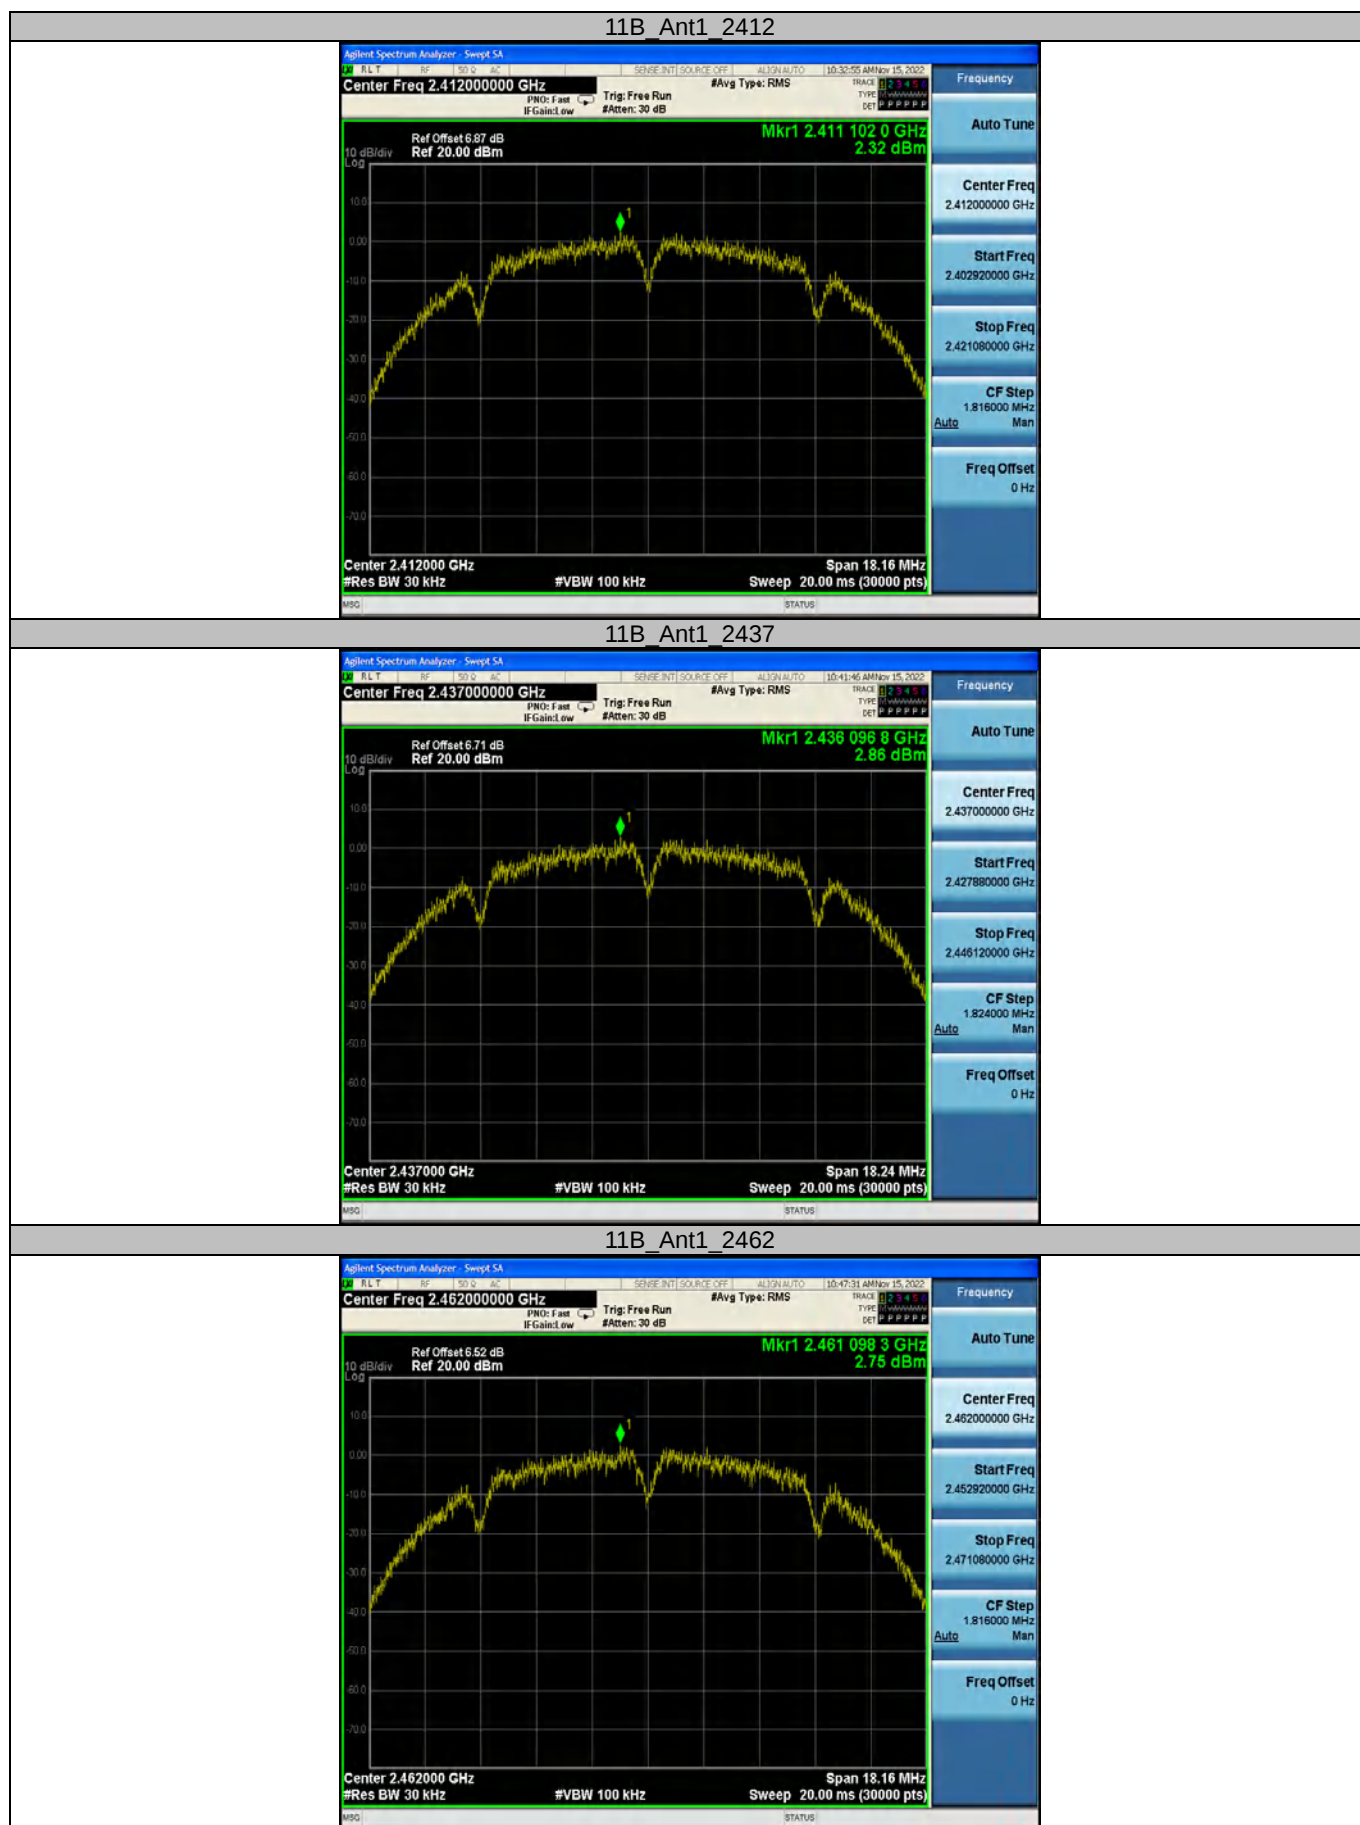


11G_Ant1_2412

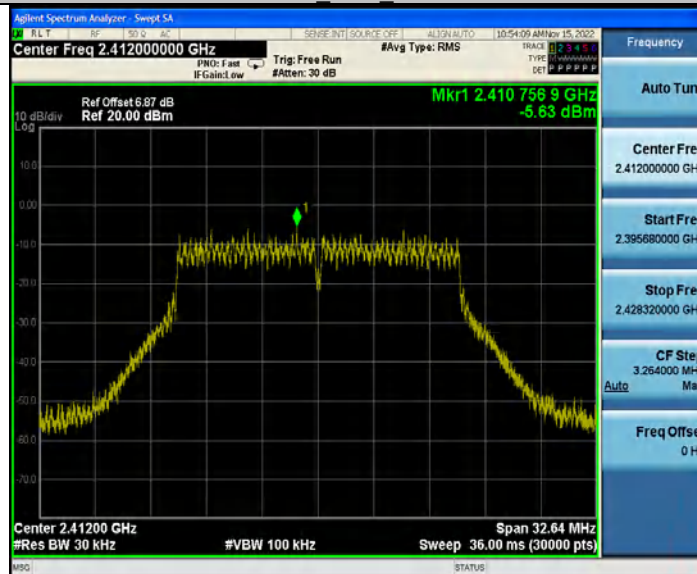


11G_Ant1_2437

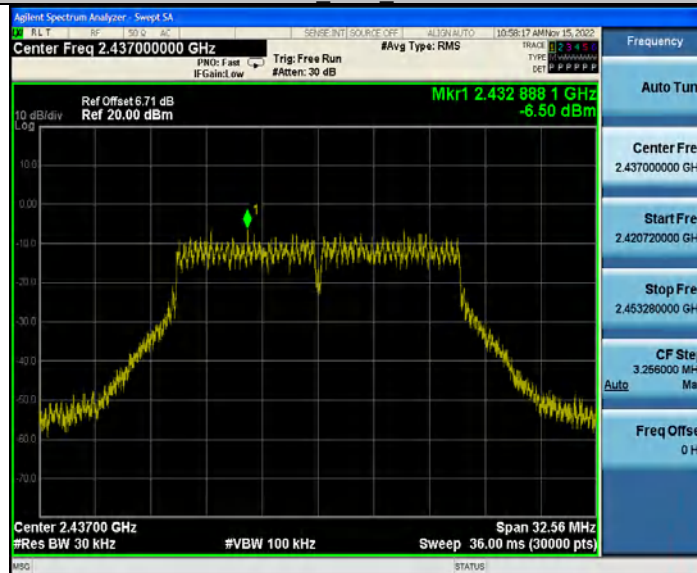

11G_Ant1_2462

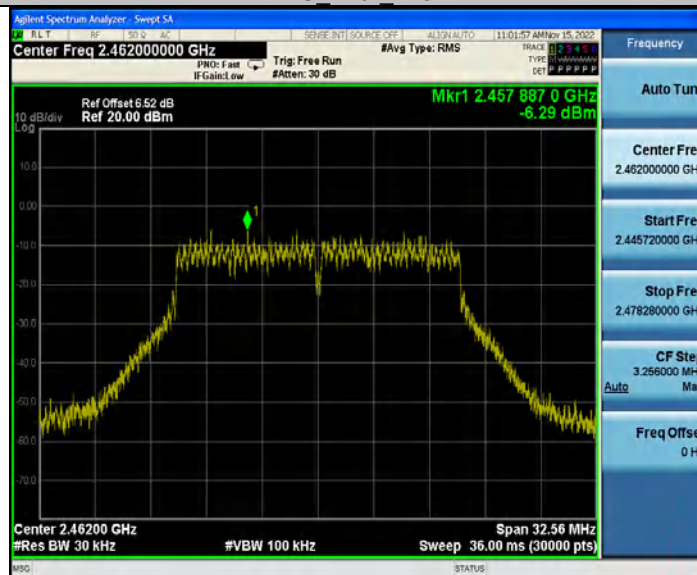

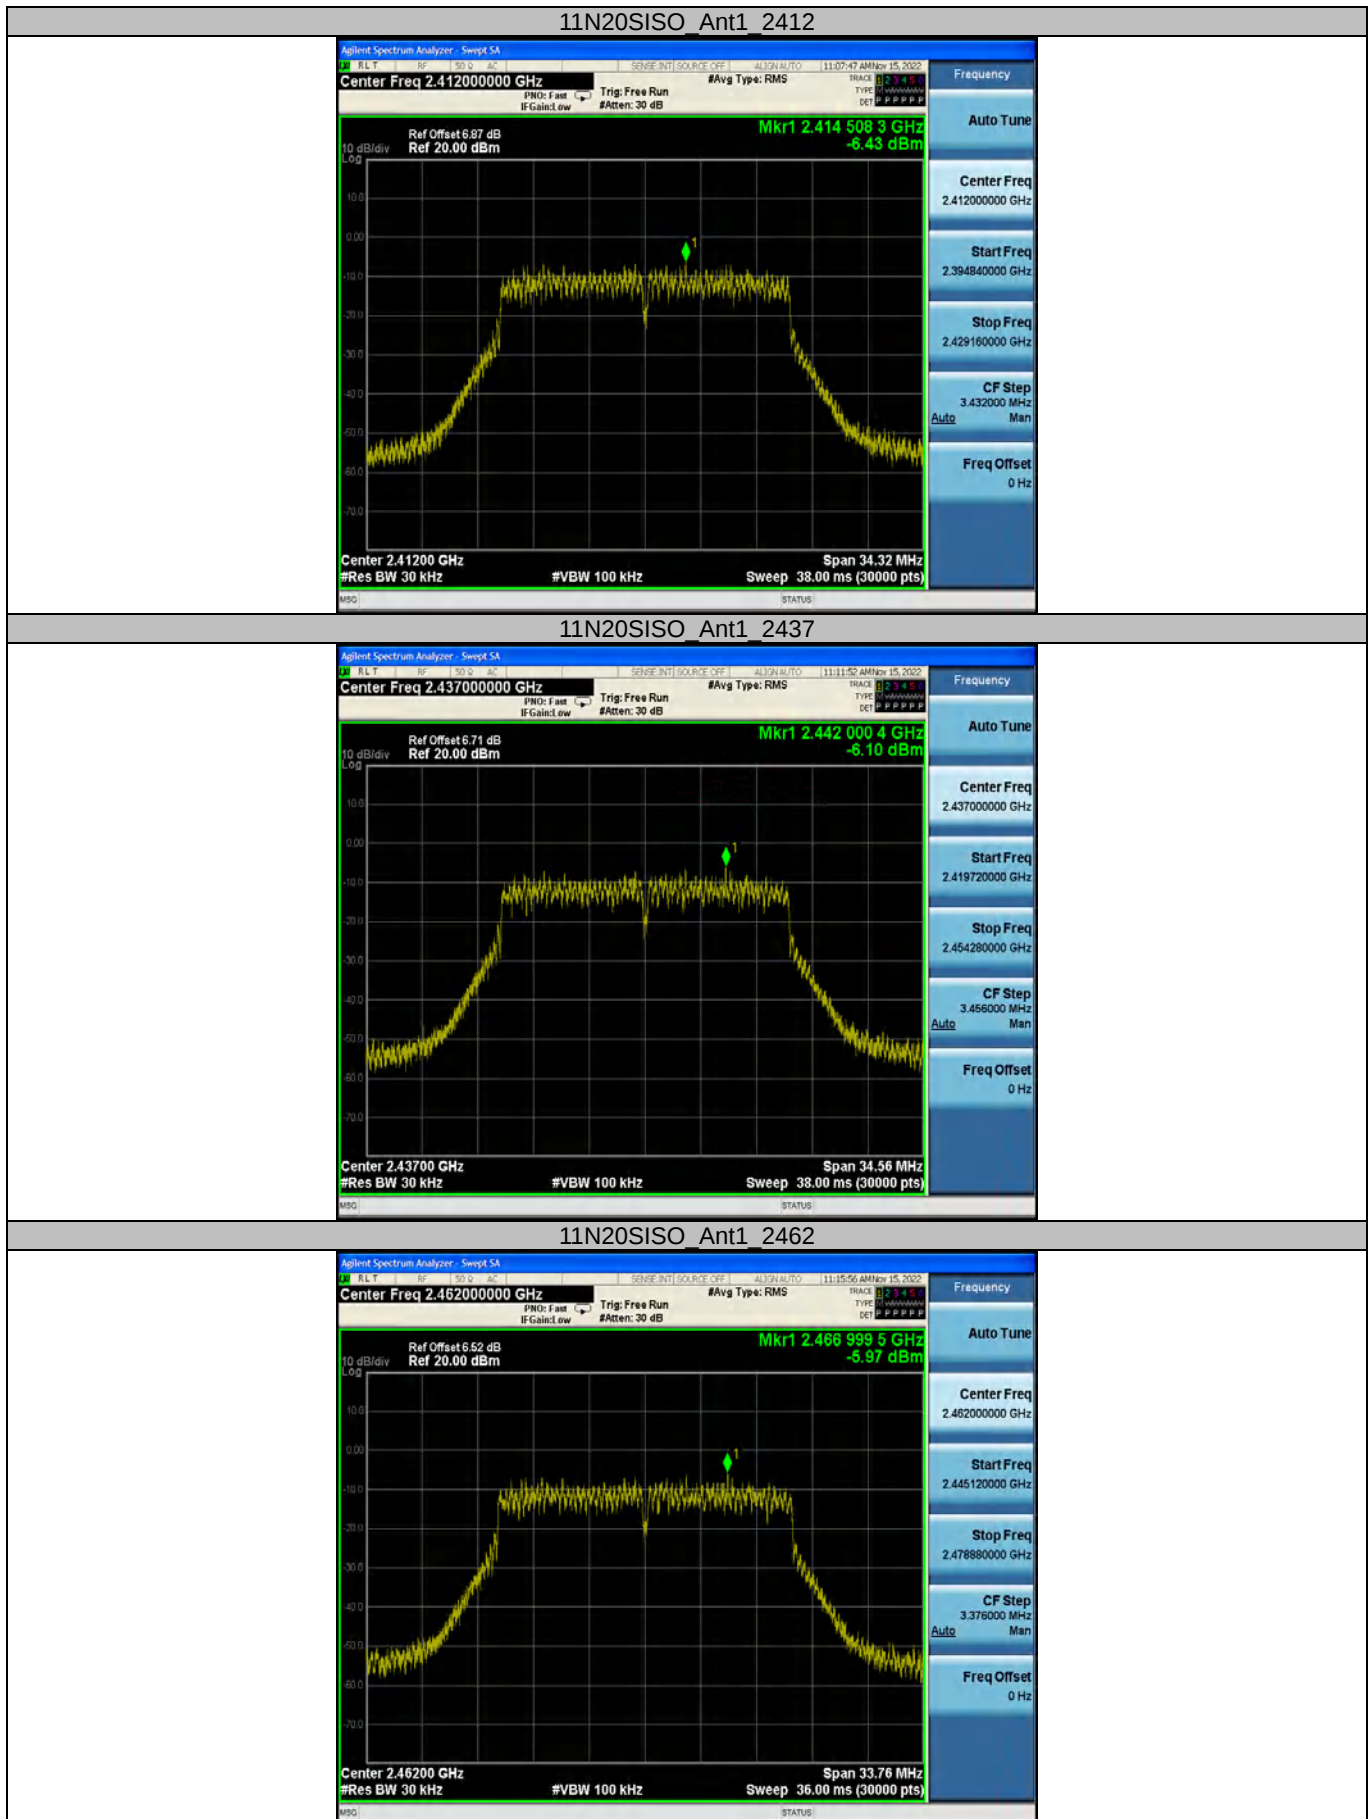

Appendix D: Band edge measurements





Appendix E: Conducted Spurious Emission






11B_Ant1_2462_0-Reference



11B_Ant1_2462_30-1000

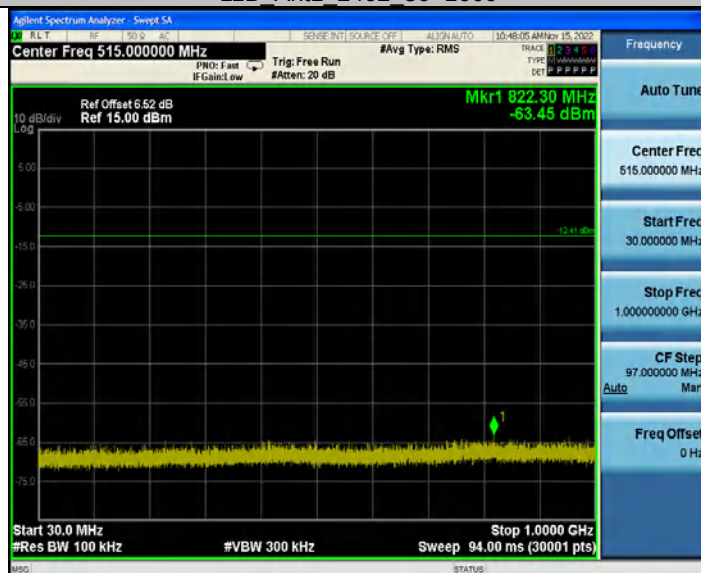

11B_Ant1_2462_1000-26500












11N20SISO Ant1 2412 0~Reference

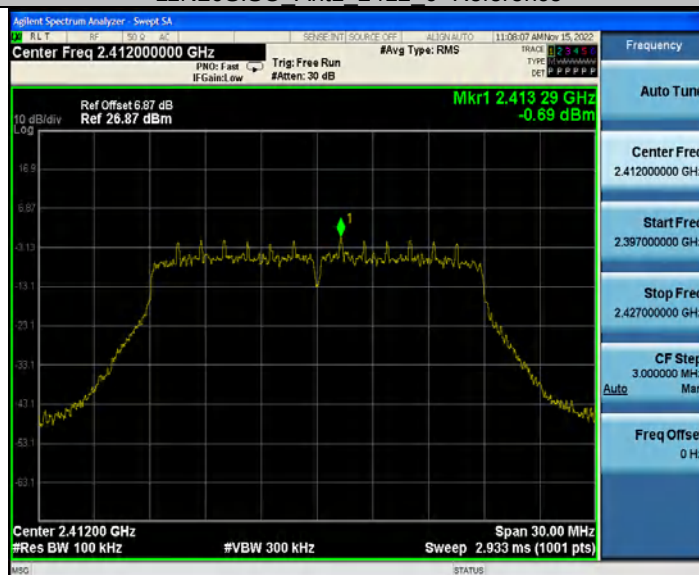

11N20SISO Ant1 2412 30~1000

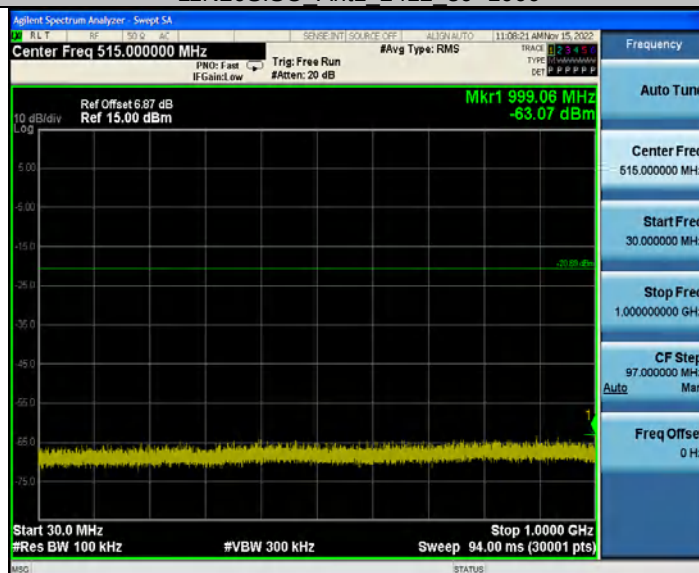


11N20SISO Ant1 2412 1000~26500

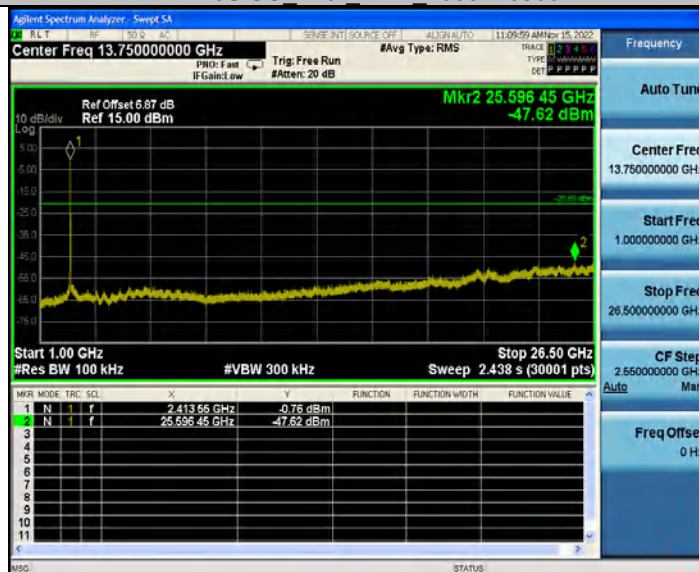


11N20SISO Ant1 2437 0~Reference



11N20SISO Ant1 2437 30~1000

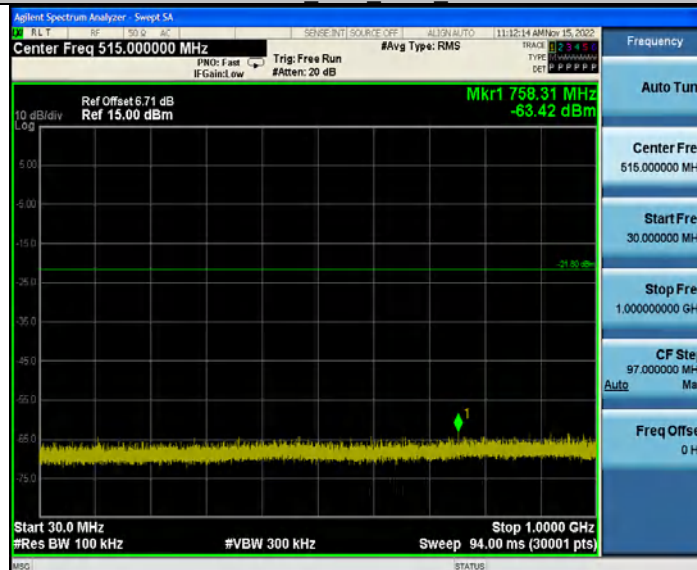

11N20SISO Ant1 2437 1000~26500

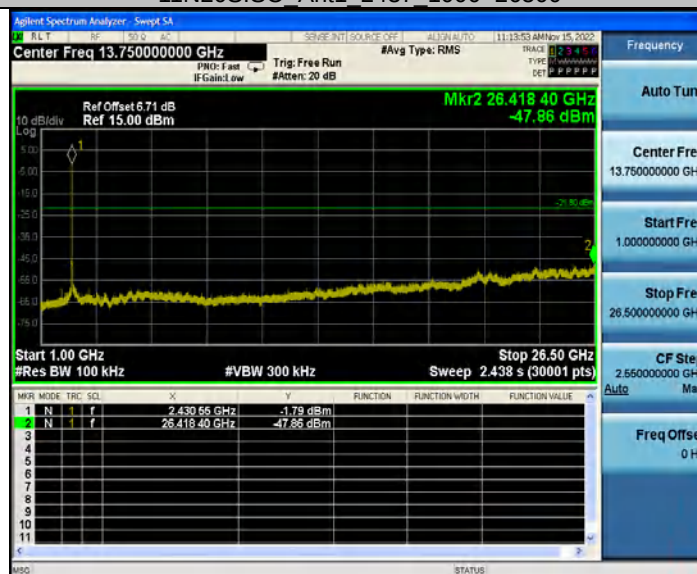

11N20SISO Ant1 2462 0~Reference



Appendix F: Duty Cycle

Test Result


Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2437	0.59	1.80	32.78	4.84
11G	Ant1	2437	0.58	1.80	32.22	4.92
11N20SISO	Ant1	2437	0.56	1.77	31.64	5.00

Notes:

Duty Cycle [%] = Transmission Duration [ms] / Transmission Period [ms] * 100

Factor = 10 * log (Duty Cycle)

Test Graphs

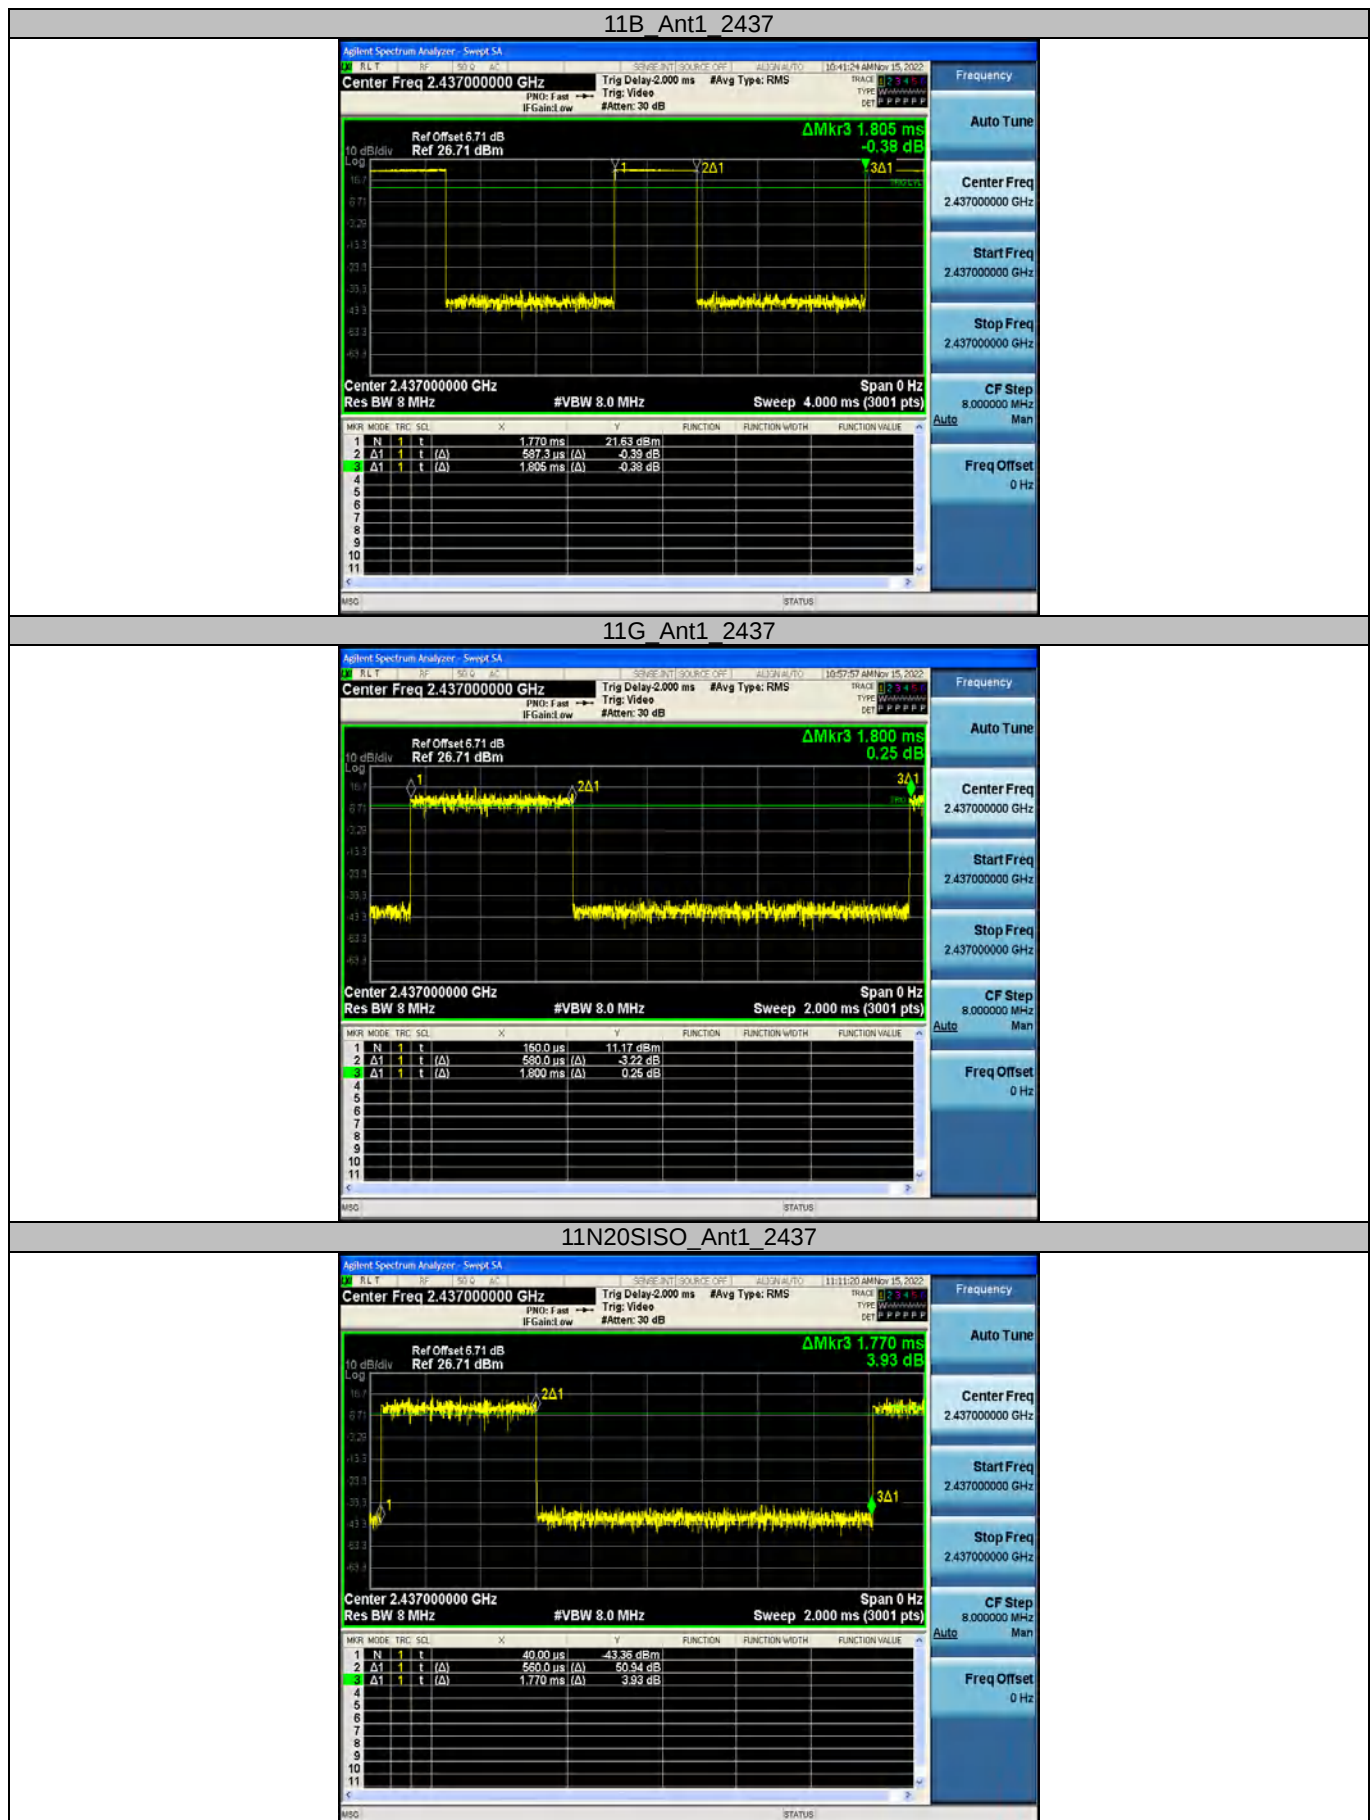

Photographs of the Test Setup

See the Appendix – Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----