

TEST REPORT

Reference No. : WTS15S0832655-2E
FCC ID..... : 2AFOYL553AN
Applicant..... : Le Shi Zhi Xin Electronic Technology (Tian jin) Limited
Address : 201-427 2F B1 District, Anime building, No.126 Anime Middle Road,
Eco-city Tianjin, China
Manufacturer : TPV Technology(Qingdao) Co.,Ltd
Address : NO.99 Huoju Road, High-tech Industrial Development Zone, Qingdao
City, Shandong Province, China(PRC)
Product Name : Letv Super TV
Model No. : L553AN, L55***(* can be A to Z(a-z), 0 to 9, "+", "-", ".", or blank, series
model name is same to each other except for model designation for
market issue.)
Brand : Letv
Standards..... : FCC CFR47 Part 15 C Section 15.407:2014
Date of Receipt sample..... : Aug. 27, 2015
Date of Test..... : Aug. 28, 2015 – Sep. 14, 2015
Date of Issue : Sep.15, 2015
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	--
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	6
4.3 CHANNEL LIST	6
4.4 TEST FACILITY	7
5 EQUIPMENT USED DURING TEST	8
5.1 EQUIPMENTS LIST	8
5.2 DESCRIPTION OF SUPPORT UNITS	9
5.3 MEASUREMENT UNCERTAINTY	9
5.4 TEST EQUIPMENT CALIBRATION	9
6 CONDUCTED EMISSION	10
6.1 E.U.T. OPERATION	10
6.2 EUT SETUP	10
6.3 MEASUREMENT DESCRIPTION	10
6.4 CONDUCTED EMISSION TEST RESULT	11
7 RADIATED EMISSIONS.....	13
7.1 EUT OPERATION.....	13
7.2 TEST SETUP	14
7.3 SPECTRUM ANALYZER SETUP	15
7.4 TEST PROCEDURE	16
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
7.6 SUMMARY OF TEST RESULTS	17
8 DUTY CYCLE.....	31
8.1 SUMMARY OF TEST RESULTS	31
9 BAND EDGE	44
9.1 TEST PRODUCE.....	44
9.2 TEST RESULT	45
10 6 DB BANDWIDTH.....	69
10.1 TEST PROCEDURE:.....	69
10.2 TEST RESULT:	69
11 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	84
11.1 TEST PROCEDURE:.....	84
11.2 TEST RESULT:	85
12 CONDUCTED OUTPUT POWER	114
12.1 TEST PROCEDURE:.....	114
12.2 TEST RESULT :	115
13 POWER SPECTRAL DENSITY	144
13.1 TEST PROCEDURE:.....	144
13.2 TEST RESULT:	145
14 ANTENNA REQUIREMENT	174
15 RF EXPOSURE.....	175
15.1 REQUIREMENTS.....	175

15.2	THE PROCEDURES / LIMIT	175
15.3	MPE CALCULATION METHOD	176

4 General Information

4.1 General Description of E.U.T.

Product Name:	Letv Super TV
Model No.:	L553AN, L55***(* can be A to Z(a-z), 0 to 9, "+", "-", "." or blank, series model name is same to each other except for model designation for market issue.)
Model Description:	Only the model names are different, The L553AN is tested model.
Operation Frequency:	IEEE 802.11b/g/n(HT20):2412MHz ~ 2462MHz IEEE 802.11n(HT40):2422MHz~2452MHz IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5150MHz to 5250MHz IEEE 802.11a/ n(HT20/40)/ac(HT20/40/80): 5725MHz to 5850MHz BT: 2402-2480MHz SRD: 2402-2480MHz
The Lowest Oscillator:	12MHz
Antenna Gain:	2.4GHz WIFI:3.2 dBi 5.2GHz WIFI:2.8 dBi 5.8GHz WIFI:4.5 dBi 2.4GHz BT:3.1 dBi 2.4GHz SRD:3.1 dBi
Type of modulation:	IEEE 802.11b DSSS(CCK/QPSK/BPSK) IEEE 802.11g OFDM(BPSK/QPSK/16QAM/64QAM) IEEE 802.11n OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11a: OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11n : OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11ac : OFDM(BPSK/QPSK/16QAM/64QAM/256QAM) BT: GFSK,PI/4-DQPSK,8DPSK SRD: GFSK
Number of transmitter chains	WIFI:2*2 (MIMO) BT: 1 SRD: 1

The device supports MIMO 2*2, and the MIMO works with STBC(Space-Time Block Coding).The antenna is omnidirectional, does not support any directional gain in any modes.

MIMO rate, antennas use two different streams, from this side, if RX side need to decode MIMO, data between the two stream should be corelated.

TX power for MIMO rate, the wifi chip has a power/rate table that controls TX power from chipout, it's preset in nvram, FW don't need to calculate it again when MIMO rate is fixed. Of course the real radiation power is also related to antenna efficient.

4.2 Details of E.U.T.

Technical Data: AC 120V~60Hz, 155W

4.3 Channel List

Band I (5.15-5.25GHz)		Band IV (5.725-5.85GHz)	
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5775
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(HT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11 ac(HT80):

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210	155	5775

4.4 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A-1, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2014	Sep.14,2015
2.	LISN	R&S	ENV216	101215	Sep.15,2014	Sep.14,2015
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2014	Sep.14,2015
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2014	Sep.14,2015
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2014	Sep.14,2015
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2014	Sep.14,2015
4.	Cable	LARGE	RF300	-	Sep.15,2014	Sep.14,2015
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2014	Sep.14,2015
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2015	Apr.18,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2014	Sep.14,2015
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2015	Apr.18,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2015	Apr.18,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2015	Mar.16,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2015	Apr.09,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.15,2014	Sep.14,2015
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2014	Sep.14,2015
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2014	Sep.14,2015
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2014	Sep.14,2015
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2.	Spectrum Analyzer (9k~6GHz)	R&S	FSL6	100959	Sep.15,2014	Sep.14,2015
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2014	Sep.14,2015

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

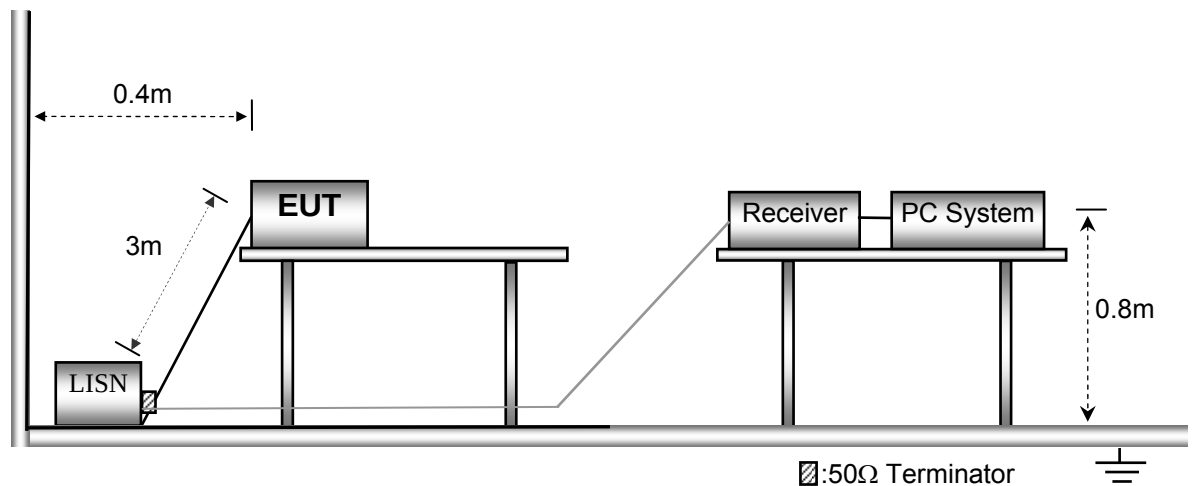


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.

Live line:

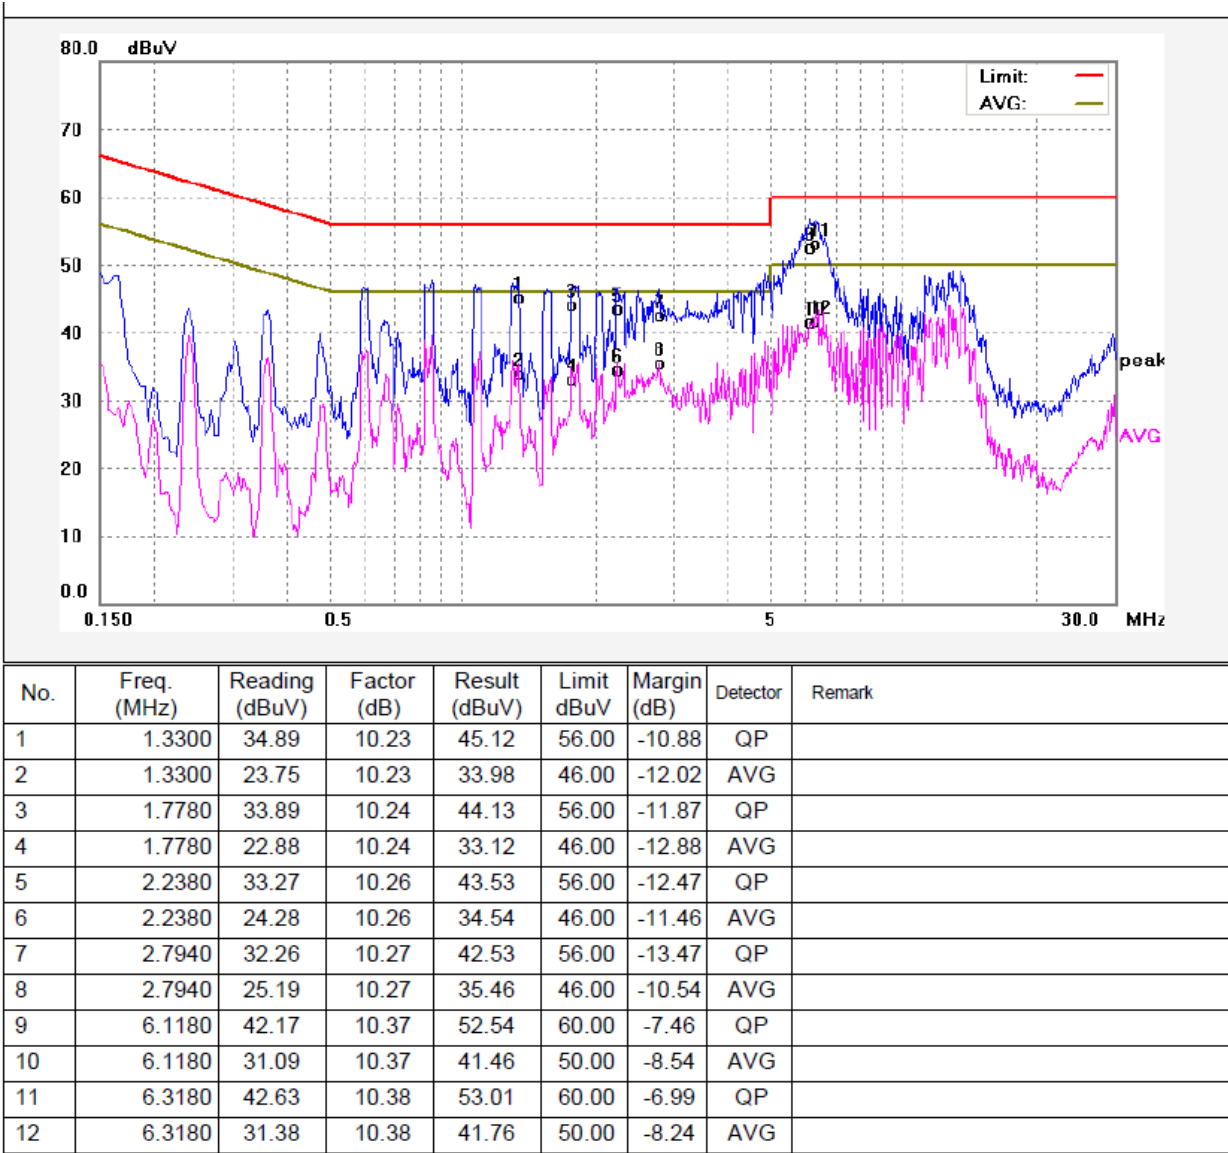

Neutral line:

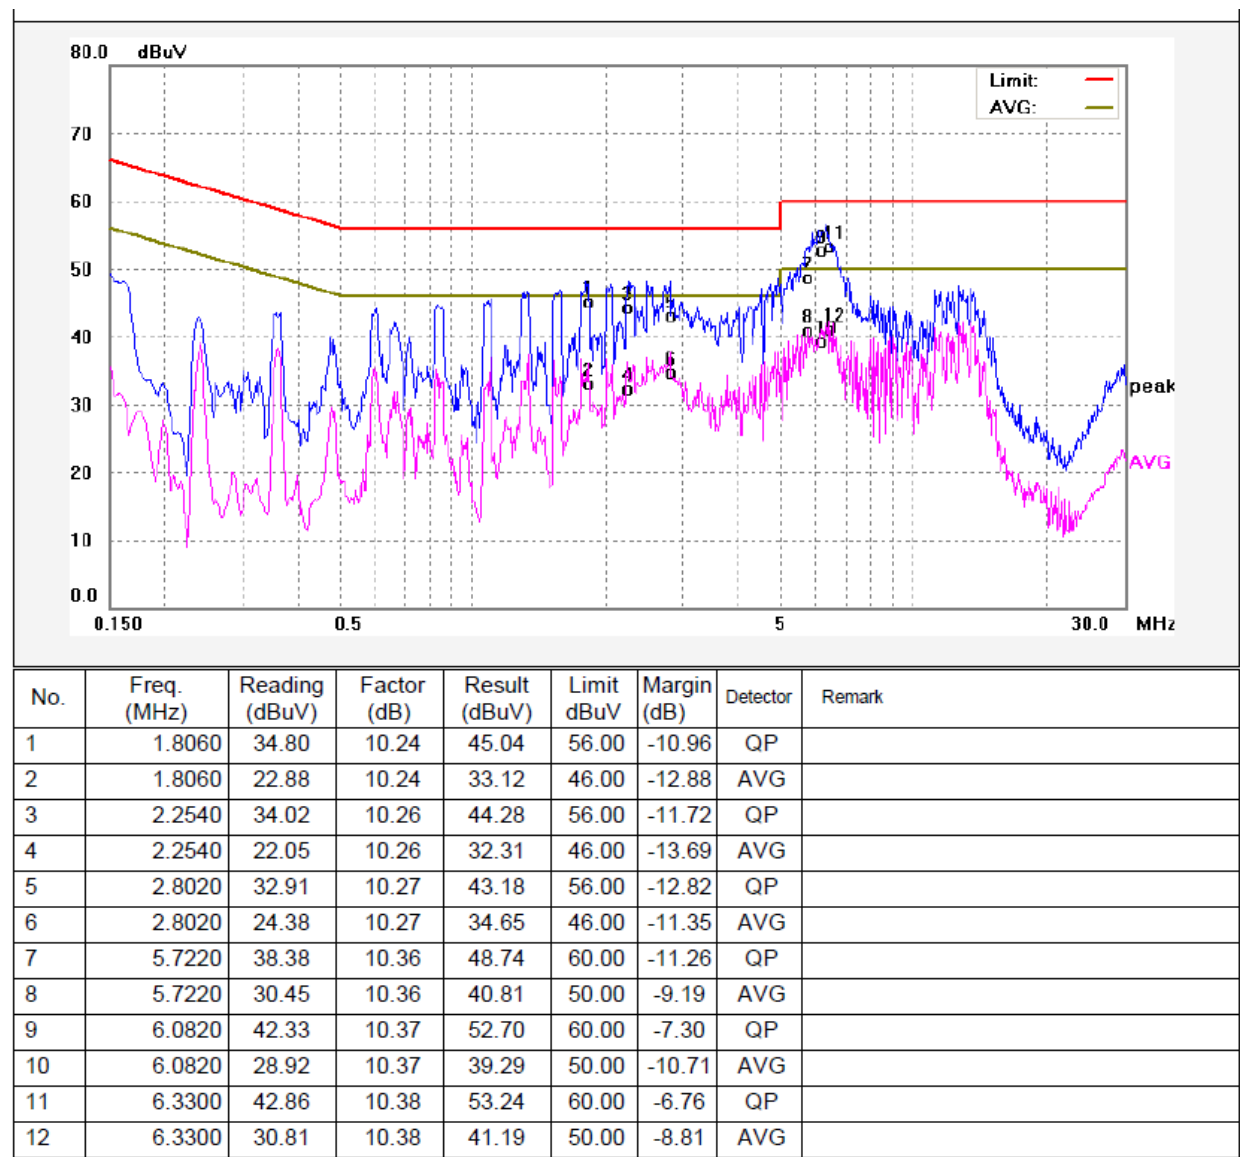

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.4:2003

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

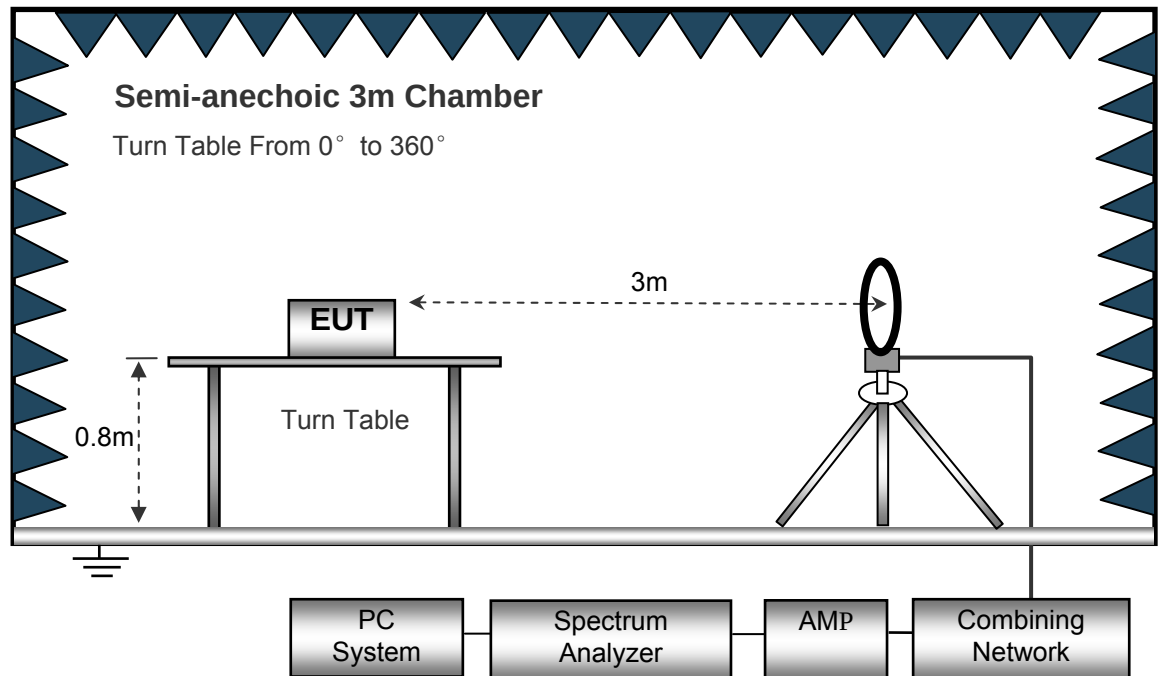

The test setup for emission measurement from 30 MHz to 1 GHz.

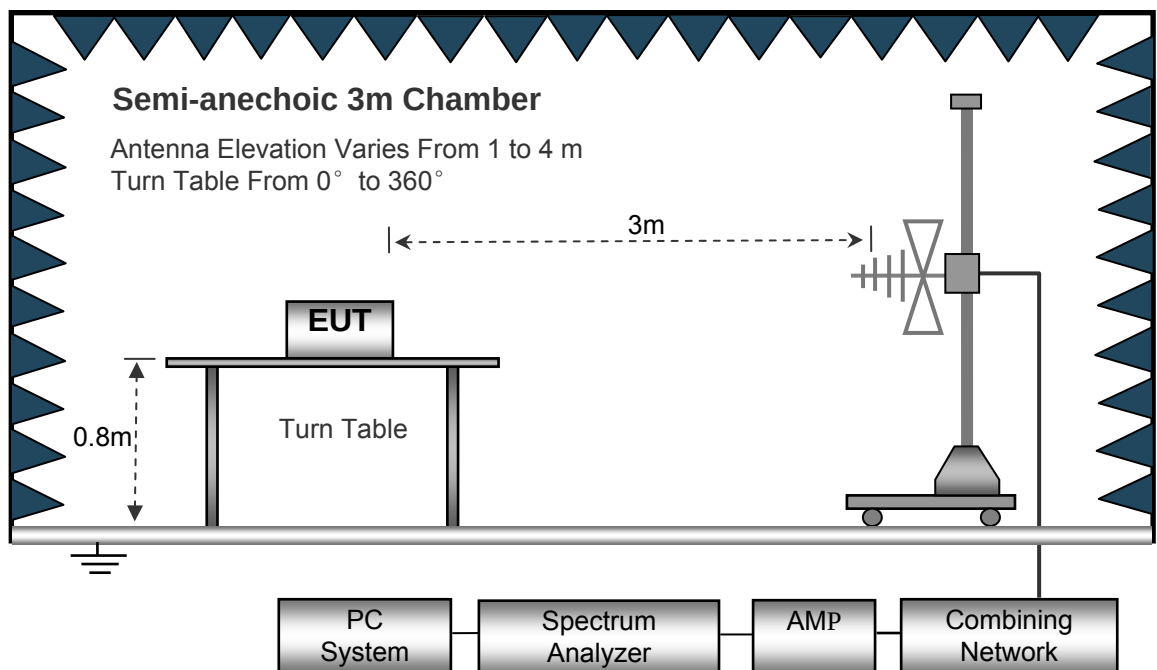

The test setup for emission measurement above 1 GHz.

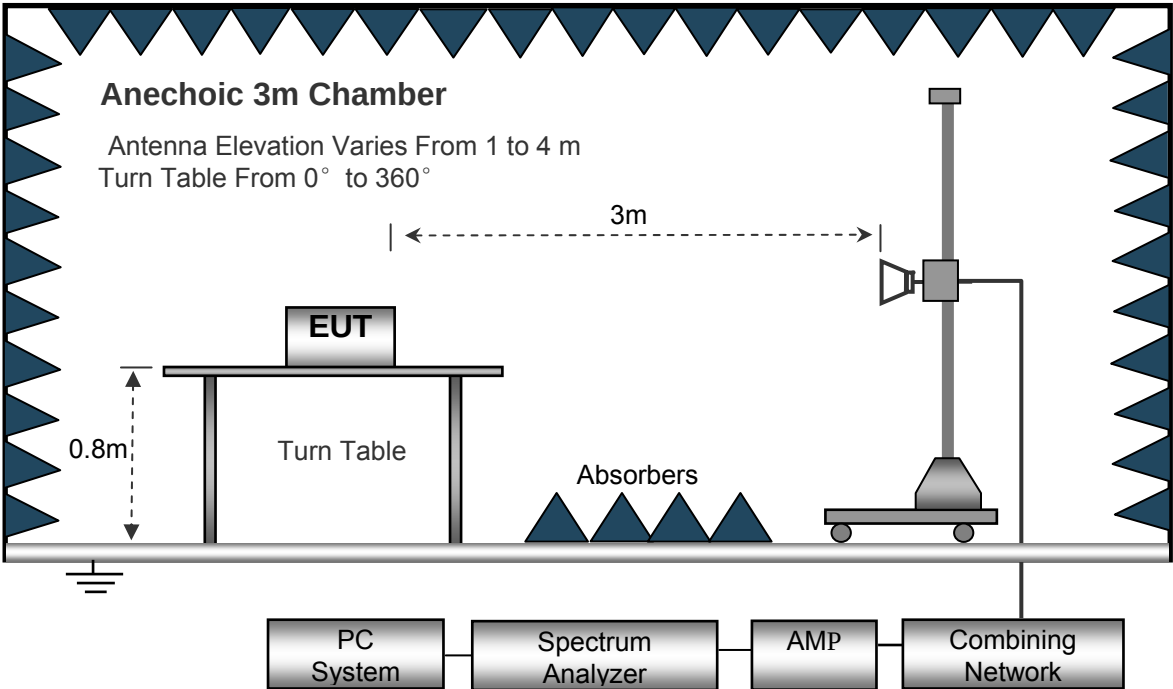

7.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed Auto
- IF Bandwidth.....10kHz
- Video Bandwidth.....10kHz
- Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....100kHz
- Video Bandwidth.....300kHz

Above 1GHz

- Sweep Speed Auto
- DetectorPK
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....3MHz
- DetectorAve.
- Resolution Bandwidth.....1MHz
- Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a band I Low Channel 5180MHz									
223.46	41.07	QP	281	1.3	H	-11.62	29.45	46.00	-16.55
223.46	36.26	QP	240	1.6	V	-11.62	24.64	46.00	-21.36
4534.24	50.49	PK	353	1.9	H	-2.03	48.46	74.00	-25.54
4534.24	46.32	Ave	353	1.9	H	-2.03	44.29	54.00	-9.71
10360.00	41.08	PK	141	1.3	H	5.33	46.41	74.00	-27.59
10360.00	36.85	Ave	141	1.3	H	5.33	42.18	54.00	-11.82
5366.48	42.51	PK	202	1.9	H	-1.04	41.47	74.00	-32.53
5366.48	37.56	Ave	202	1.9	H	-1.04	36.52	54.00	-17.48
802.11a band I middle channel 5200MHz									
223.46	40.93	QP	21	1.3	H	-11.62	29.31	46.00	-16.69
223.46	36.16	QP	242	1.3	V	-11.62	24.54	46.00	-21.46
4521.80	51.70	PK	183	1.7	H	-1.94	49.76	74.00	-24.24
4521.80	47.21	Ave	183	1.7	H	-1.94	45.27	54.00	-8.73
10400.00	39.86	PK	241	1.1	H	5.21	45.07	74.00	-28.93
10400.00	38.28	Ave	241	1.1	H	5.21	43.49	54.00	-10.51
5371.36	46.84	PK	219	2.0	H	-1.06	45.78	74.00	-28.22
5371.36	39.25	Ave	219	2.0	H	-1.06	38.19	54.00	-15.81

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a band I High channel 5240MHz									
223.46	42.39	QP	260	1.7	H	-11.62	30.77	46.00	-15.23
223.46	36.99	QP	280	1.4	V	-11.62	25.37	46.00	-20.63
4504.19	52.22	PK	359	1.4	H	-2.24	49.98	74.00	-24.02
4504.19	47.53	Ave	359	1.4	H	-2.24	45.29	54.00	-8.71
10480.00	42.08	PK	114	1.8	H	5.14	47.22	74.00	-26.78
10480.00	35.49	Ave	114	1.8	H	5.14	40.63	54.00	-13.37
5373.61	46.57	PK	358	1.3	H	-1.08	45.49	74.00	-28.51
5373.61	37.90	Ave	358	1.3	H	-1.08	36.82	54.00	-17.18
802.11a band IV low Channel 5745MHz									
223.46	43.09	QP	144	1.1	H	-11.62	31.47	46.00	-14.53
223.46	37.58	QP	135	1.1	V	-11.62	25.96	46.00	-20.04
4516.77	51.31	PK	118	1.8	H	-2.06	49.25	74.00	-24.75
4516.77	48.26	Ave	118	1.8	H	-2.06	46.20	54.00	-7.80
11490.00	41.81	PK	227	1.3	H	5.93	47.74	74.00	-26.26
11490.00	35.46	Ave	227	1.3	H	5.93	41.39	54.00	-12.61
5361.85	46.56	PK	27	2.0	H	-1.15	45.41	74.00	-28.59
5361.85	37.22	Ave	27	2.0	H	-1.15	36.07	54.00	-17.93

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a band IV middle channel 5785MHz									
223.46	42.04	QP	24	1.2	H	-11.62	30.42	46.00	-15.58
223.46	38.92	QP	138	1.4	V	-11.62	27.30	46.00	-18.70
4501.29	50.23	PK	62	1.2	H	-2.03	48.20	74.00	-25.80
4501.29	47.40	Ave	62	1.2	H	-2.03	45.37	54.00	-8.63
11570.00	42.21	PK	193	1.8	H	5.81	48.02	74.00	-25.98
11570.00	37.51	Ave	193	1.8	H	5.81	43.32	54.00	-10.68
5370.17	46.27	PK	348	1.2	H	-1.22	45.05	74.00	-28.95
5370.17	38.28	Ave	348	1.2	H	-1.22	37.06	54.00	-16.94
802.11a band IV High channel 5825MHz									
223.46	42.91	QP	191	1.9	H	-11.62	31.29	46.00	-14.71
223.46	37.99	QP	213	1.7	V	-11.62	26.37	46.00	-19.63
4527.80	50.01	PK	209	1.5	H	-1.84	48.17	74.00	-25.83
4527.80	46.20	Ave	209	1.5	H	-1.84	44.36	54.00	-9.64
11650.00	40.26	PK	359	1.4	H	5.84	46.10	74.00	-27.90
11650.00	38.03	Ave	359	1.4	H	5.84	43.87	54.00	-10.13
5354.91	45.19	PK	41	1.0	H	-1.30	43.89	74.00	-30.11
5354.91	39.26	Ave	41	1.0	H	-1.30	37.96	54.00	-16.04

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) band I low Channel 5180MHz									
223.46	44.37	QP	244	1.2	H	-11.62	32.75	46.00	-13.25
223.46	39.47	QP	6	1.0	V	-11.62	27.85	46.00	-18.15
4536.27	51.10	PK	213	1.3	H	-2.14	48.96	74.00	-25.04
4536.27	46.63	Ave	213	1.3	H	-2.14	44.49	54.00	-9.51
10360.00	42.46	PK	210	1.4	H	5.33	47.79	74.00	-26.21
10360.00	36.54	Ave	210	1.4	H	5.33	41.87	54.00	-12.13
5385.11	45.08	PK	208	1.1	H	-1.26	43.82	74.00	-30.18
5385.11	39.15	Ave	208	1.1	H	-1.26	37.89	54.00	-16.11
802.11n(HT20) band I middle channel 5200MHz									
223.46	45.19	QP	90	1.1	H	-11.62	33.57	46.00	-12.43
223.46	40.91	QP	183	1.9	V	-11.62	29.29	46.00	-16.71
4517.44	51.58	PK	296	1.1	H	-2.12	49.46	74.00	-24.54
4517.44	46.93	Ave	296	1.1	H	-2.12	44.81	54.00	-9.19
10400.00	40.37	PK	203	1.2	H	5.21	45.58	74.00	-28.42
10400.00	35.60	Ave	203	1.2	H	5.21	40.81	54.00	-13.19
5383.44	45.27	PK	262	1.7	H	-1.07	44.20	74.00	-29.80
5383.44	39.04	Ave	262	1.7	H	-1.07	37.97	54.00	-16.03

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) band I High channel 5240MHz									
223.46	44.95	QP	125	1.4	H	-11.62	33.33	46.00	-12.67
223.46	40.93	QP	140	1.7	V	-11.62	29.31	46.00	-16.69
4523.57	52.58	PK	62	1.5	H	-1.96	50.62	74.00	-23.38
4523.57	48.15	Ave	62	1.5	H	-1.96	46.19	54.00	-7.81
10480.00	41.49	PK	7	1.3	H	5.14	46.63	74.00	-27.37
10480.00	37.45	Ave	7	1.3	H	5.14	42.59	54.00	-11.41
5355.17	46.75	PK	283	1.0	H	-1.10	45.65	74.00	-28.35
5355.17	39.84	Ave	283	1.0	H	-1.10	38.74	54.00	-15.26
802.11n(HT20) band IV low Channel 5745MHz									
223.46	44.69	QP	128	1.5	H	-11.62	33.07	46.00	-12.93
223.46	40.00	QP	201	1.6	V	-11.62	28.38	46.00	-17.62
4525.93	50.18	PK	218	1.4	H	-1.85	48.33	74.00	-25.67
4525.93	45.36	Ave	218	1.4	H	-1.85	43.51	54.00	-10.49
11490.00	39.38	PK	226	1.1	H	5.93	45.31	74.00	-28.69
11490.00	34.46	Ave	226	1.1	H	5.93	40.39	54.00	-13.61
5359.05	45.61	PK	20	1.3	H	-1.01	44.60	74.00	-29.40
5359.05	37.83	Ave	20	1.3	H	-1.01	36.82	54.00	-17.18

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) band IV middle channel 5785MHz									
223.46	44.95	QP	245	1.5	H	-11.62	33.33	46.00	-12.67
223.46	40.35	QP	288	1.1	V	-11.62	28.73	46.00	-17.27
4515.20	50.63	PK	23	1.9	H	-1.89	48.74	74.00	-25.26
4515.20	44.43	Ave	23	1.9	H	-1.89	42.54	54.00	-11.46
11570.00	40.62	PK	309	2.0	H	5.81	46.43	74.00	-27.57
11570.00	35.95	Ave	309	2.0	H	5.81	41.76	54.00	-12.24
5380.50	46.06	PK	201	2.0	H	-1.04	45.02	74.00	-28.98
5380.50	37.87	Ave	201	2.0	H	-1.04	36.83	54.00	-17.17
802.11n(HT20) band IV High channel 5825MHz									
223.46	44.03	QP	153	1.4	H	-11.62	32.41	46.00	-13.59
223.46	40.12	QP	11	1.9	V	-11.62	28.50	46.00	-17.50
4525.29	49.91	PK	128	1.5	H	-1.97	47.94	74.00	-26.06
4525.29	43.52	Ave	128	1.5	H	-1.97	41.55	54.00	-12.45
11650.00	40.21	PK	65	1.5	H	5.84	46.05	74.00	-27.95
11650.00	36.61	Ave	65	1.5	H	5.84	42.45	54.00	-11.55
5379.95	45.85	PK	310	1.2	H	-1.12	44.73	74.00	-29.27
5379.95	38.28	Ave	310	1.2	H	-1.12	37.16	54.00	-16.84

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT20) band I low Channel 5180MHz									
223.46	43.28	QP	226	1.4	H	-11.62	31.66	46.00	-14.34
223.46	40.03	QP	56	1.8	V	-11.62	28.41	46.00	-17.59
4520.26	48.51	PK	100	1.4	H	-1.86	46.65	74.00	-27.35
4520.26	42.14	Ave	100	1.4	H	-1.86	40.28	54.00	-13.72
10360.00	38.45	PK	280	1.3	H	5.33	43.78	74.00	-30.22
10360.00	34.88	Ave	280	1.3	H	5.33	40.21	54.00	-13.79
5361.95	46.12	PK	163	1.6	H	-1.06	45.06	74.00	-28.94
5361.95	39.04	Ave	163	1.6	H	-1.06	37.98	54.00	-16.02
802.11ac(HT20) band I middle channel 5200MHz									
223.46	44.21	QP	59	1.3	H	-11.62	32.59	46.00	-13.41
223.46	40.63	QP	305	1.4	V	-11.62	29.01	46.00	-16.99
4532.38	48.16	PK	269	1.5	H	-1.82	46.34	74.00	-27.66
4532.38	41.94	Ave	269	1.5	H	-1.82	40.12	54.00	-13.88
10400.00	41.24	PK	277	1.8	H	5.21	46.45	74.00	-27.55
10400.00	37.38	Ave	277	1.8	H	5.21	42.59	54.00	-11.41
5359.73	45.71	PK	250	1.3	H	-1.09	44.62	74.00	-29.38
5359.73	39.93	Ave	250	1.3	H	-1.09	38.84	54.00	-15.16

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT20) band I High channel 5240MHz									
223.46	44.84	QP	243	1.9	H	-11.62	33.22	46.00	-12.78
223.46	40.68	QP	269	1.3	V	-11.62	29.06	46.00	-16.94
4512.24	47.25	PK	285	1.2	H	-1.81	45.44	74.00	-28.56
4512.24	42.47	Ave	285	1.2	H	-1.81	40.66	54.00	-13.34
10480.00	40.23	PK	236	1.6	H	5.14	45.37	74.00	-28.63
10480.00	37.67	Ave	236	1.6	H	5.14	42.81	54.00	-11.19
5360.41	45.09	PK	335	1.9	H	-1.04	44.05	74.00	-29.95
5360.41	37.05	Ave	335	1.9	H	-1.04	36.01	54.00	-17.99
802.11ac(HT20) band IV low Channel 5745MHz									
223.46	45.48	QP	338	1.5	H	-11.62	33.86	46.00	-12.14
223.46	39.35	QP	70	1.5	V	-11.62	27.73	46.00	-18.27
4506.71	45.29	PK	252	1.4	H	-1.92	43.37	74.00	-30.63
4506.71	40.48	Ave	252	1.4	H	-1.92	38.56	54.00	-15.44
11490.00	38.79	PK	174	1.8	H	5.93	44.72	74.00	-29.28
11490.00	34.82	Ave	174	1.8	H	5.93	40.75	54.00	-13.25
5388.02	46.49	PK	98	1.7	H	-1.03	45.46	74.00	-28.54
5388.02	37.21	Ave	98	1.7	H	-1.03	36.18	54.00	-17.82

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT20) band IV middle channel 5785MHz									
223.46	44.71	QP	295	1.2	H	-11.62	33.09	46.00	-12.91
223.46	38.90	QP	230	1.2	V	-11.62	27.28	46.00	-18.72
4531.05	44.46	PK	326	1.4	H	-1.97	42.49	74.00	-31.51
4531.05	41.01	Ave	326	1.4	H	-1.97	39.04	54.00	-14.96
11570.00	40.27	PK	161	1.5	H	5.81	46.08	74.00	-27.92
11570.00	37.35	Ave	161	1.5	H	5.81	43.16	54.00	-10.84
5388.51	46.53	PK	178	1.7	H	-1.05	45.48	74.00	-28.52
5388.51	39.34	Ave	178	1.7	H	-1.05	38.29	54.00	-15.71
802.11ac(HT20) band IV High channel 5825MHz									
223.46	44.53	QP	111	1.9	H	-11.62	32.91	46.00	-13.09
223.46	38.19	QP	189	1.7	V	-11.62	26.57	46.00	-19.43
4534.48	44.03	PK	266	1.6	H	-1.88	42.15	74.00	-31.85
4534.48	40.10	Ave	266	1.6	H	-1.88	38.22	54.00	-15.78
11650.00	40.57	PK	189	1.9	H	5.84	46.41	74.00	-27.59
11650.00	36.79	Ave	189	1.9	H	5.84	42.63	54.00	-11.37
5361.05	46.28	PK	246	1.3	H	-1.06	45.22	74.00	-28.78
5361.05	39.14	Ave	246	1.3	H	-1.06	38.08	54.00	-15.92

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) band I low Channel 5190MHz									
223.46	45.16	QP	58	1.4	H	-11.62	33.54	46.00	-12.46
223.46	39.26	QP	81	1.2	V	-11.62	27.64	46.00	-18.36
4518.49	42.64	PK	24	1.2	H	-1.89	40.75	74.00	-33.25
4518.49	38.35	Ave	24	1.2	H	-1.89	36.46	54.00	-17.54
10380.00	38.64	PK	301	1.7	H	5.26	43.90	74.00	-30.10
10380.00	35.43	Ave	301	1.7	H	5.26	40.69	54.00	-13.31
5359.87	46.96	PK	182	2.0	H	-1.03	45.93	74.00	-28.07
5359.87	38.87	Ave	182	2.0	H	-1.03	37.84	54.00	-16.16
802.11n(HT40) band I High channel 5230MHz									
223.46	44.93	QP	193	1.3	H	-11.62	33.31	46.00	-12.69
223.46	38.26	QP	318	1.6	V	-11.62	26.64	46.00	-19.36
4508.90	43.48	PK	240	2.0	H	-1.94	41.54	74.00	-32.46
4508.90	37.62	Ave	240	2.0	H	-1.94	35.68	54.00	-18.32
10460.00	42.00	PK	220	1.6	H	5.28	47.28	74.00	-26.72
10480.00	37.76	Ave	220	1.6	H	5.28	43.04	54.00	-10.96
5367.18	46.84	PK	301	1.9	H	-1.05	45.79	74.00	-28.21
5367.18	39.21	Ave	301	1.9	H	-1.05	38.16	54.00	-15.84

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) band IV low Channel 5755MHz									
223.46	44.17	QP	153	1.1	H	-11.62	32.55	74.00	-41.45
223.46	37.26	QP	190	1.5	V	-11.62	25.64	74.00	-48.36
4519.86	41.24	PK	339	1.1	H	-1.96	39.28	74.00	-34.72
4519.86	36.53	Ave	339	1.1	H	-1.96	34.57	54.00	-19.43
11510.00	38.49	PK	244	1.2	H	5.88	44.37	74.00	-29.63
11510.00	34.93	Ave	244	1.2	H	5.88	40.81	54.00	-13.19
5359.92	46.79	PK	296	1.9	H	-1.01	45.78	74.00	-28.22
5359.92	38.38	Ave	296	1.9	H	-1.01	37.37	54.00	-16.63
802.11n(HT40) band IV High channel 5795MHz									
223.46	43.24	QP	198	1.5	H	-11.62	31.62	74.00	-42.38
223.46	38.03	QP	255	1.2	V	-11.62	26.41	74.00	-47.59
4534.11	40.32	PK	5	1.3	H	-1.92	38.40	74.00	-35.60
4534.11	36.18	Ave	5	1.3	H	-1.92	34.26	54.00	-19.74
11590.00	40.32	PK	198	1.0	H	5.63	45.95	74.00	-28.05
11590.00	36.19	Ave	198	1.0	H	5.63	41.82	54.00	-12.18
5367.96	45.22	PK	246	1.3	H	-1.04	44.18	74.00	-29.82
5367.96	37.72	Ave	246	1.3	H	-1.04	36.68	54.00	-17.32

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT40) band I low Channel 5190MHz									
223.46	43.13	QP	131	2.0	H	-11.62	31.51	74.00	-42.49
223.46	39.02	QP	58	1.9	V	-11.62	27.40	74.00	-46.60
4519.74	38.27	PK	130	1.4	H	-1.91	36.36	74.00	-37.64
4519.74	33.50	Ave	130	1.4	H	-1.91	31.59	54.00	-22.41
10380.00	38.48	PK	250	2.0	H	5.26	43.74	74.00	-30.26
10380.00	34.99	Ave	250	2.0	H	5.26	40.25	54.00	-13.75
5360.73	45.55	PK	288	1.6	H	-1.03	44.52	74.00	-29.48
5360.73	37.34	Ave	288	1.6	H	-1.03	36.31	54.00	-17.69
802.11ac(HT40) band I High channel 5230MHz									
223.46	42.45	QP	153	1.9	H	-11.62	30.83	74.00	-43.17
223.46	39.46	QP	220	1.6	V	-11.62	27.84	74.00	-46.16
4510.01	38.40	PK	336	1.1	H	-1.93	36.47	74.00	-37.53
4510.01	34.03	Ave	336	1.1	H	-1.93	32.10	54.00	-21.90
10460.00	41.77	PK	90	1.6	H	5.28	47.05	74.00	-26.95
10480.00	36.29	Ave	90	1.6	H	5.28	41.57	54.00	-12.43
5366.04	45.47	PK	29	1.4	H	-1.04	44.43	74.00	-29.57
5366.04	38.64	Ave	29	1.4	H	-1.04	37.60	54.00	-16.40

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT40) band IV low Channel 5755MHz									
223.46	41.76	QP	323	1.1	H	-11.62	30.14	74.00	-43.86
223.46	39.51	QP	89	1.3	V	-11.62	27.89	74.00	-46.11
4539.93	37.06	PK	194	1.5	H	-1.92	35.14	74.00	-38.86
4539.93	32.49	Ave	194	1.5	H	-1.92	30.57	54.00	-23.43
11510.00	39.50	PK	30	1.9	H	5.88	45.38	74.00	-28.62
11510.00	34.81	Ave	30	1.9	H	5.88	40.69	54.00	-13.31
5352.93	45.41	PK	19	1.1	H	-1.07	44.34	74.00	-29.66
5352.93	37.49	Ave	19	1.1	H	-1.07	36.42	54.00	-17.58
802.11ac(HT40) band IV High channel 5795MHz									
223.46	42.37	QP	175	1.6	H	-11.62	30.75	74.00	-43.25
223.46	40.32	QP	315	2.0	V	-11.62	28.70	74.00	-45.30
4527.17	36.57	PK	69	1.8	H	-1.86	34.71	74.00	-39.29
4527.17	31.97	Ave	69	1.8	H	-1.86	30.11	54.00	-23.89
11590.00	41.44	PK	139	1.4	H	5.63	47.07	74.00	-26.93
11590.00	36.63	Ave	139	1.4	H	5.63	42.26	54.00	-11.74
5372.08	46.88	PK	132	1.6	H	-1.03	45.85	74.00	-28.15
5372.08	38.77	Ave	132	1.6	H	-1.03	37.74	54.00	-16.26

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT80) band I low Channel 5210MHz									
223.46	39.97	QP	330	1.3	H	-11.62	28.35	54.00	-25.65
4527.17	36.81	QP	36	1.4	V	-11.62	25.19	54.00	-28.81
4523.26	31.80	PK	117	1.1	H	-1.88	29.92	74.00	-44.08
4523.26	41.73	Ave	117	1.1	H	-1.88	39.85	54.00	-14.15
10420.00	40.84	PK	316	1.6	H	4.65	45.49	74.00	-28.51
10420.00	36.39	Ave	316	1.6	H	4.65	41.04	54.00	-12.96
5362.77	45.39	PK	320	1.5	H	-1.13	44.26	74.00	-29.74
5362.77	39.41	Ave	320	1.5	H	-1.13	38.28	54.00	-15.72
802.11ac(HT80) band IV low Channel 5775MHz									
4527.17	37.09	QP	332	2.0	H	-11.62	25.47	74.00	-48.53
4523.26	32.00	QP	219	1.4	V	-11.62	20.38	74.00	-53.62
4536.67	41.16	PK	198	1.2	H	-1.85	39.31	74.00	-34.69
4536.67	40.27	Ave	198	1.2	H	-1.85	38.42	54.00	-15.58
11550.00	40.61	PK	50	1.0	H	4.83	45.44	74.00	-28.56
11550.00	37.37	Ave	50	1.0	H	4.83	42.20	54.00	-11.80
5350.85	46.75	PK	170	1.7	H	-1.14	45.61	74.00	-28.39
5350.85	38.98	Ave	170	1.7	H	-1.14	37.84	54.00	-16.16

Test Frequency: 18GHz~40GHz

The measurements were more than 20 dB below the limit and not reported.

8 Duty cycle

Test Requirement:	47 CFR Part 15C 15.407 and 789033 D02 General UNII Test Procedures New Rules v01, Section (B)
Test Method:	ANSI C63.10: 2009
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, and found 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.


8.1 Summary of Test Results

802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11ac(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT80) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
42	100	100	100
155	100	100	100


Test result plots shown as follows:

ANT0


802.11a band I Low channel

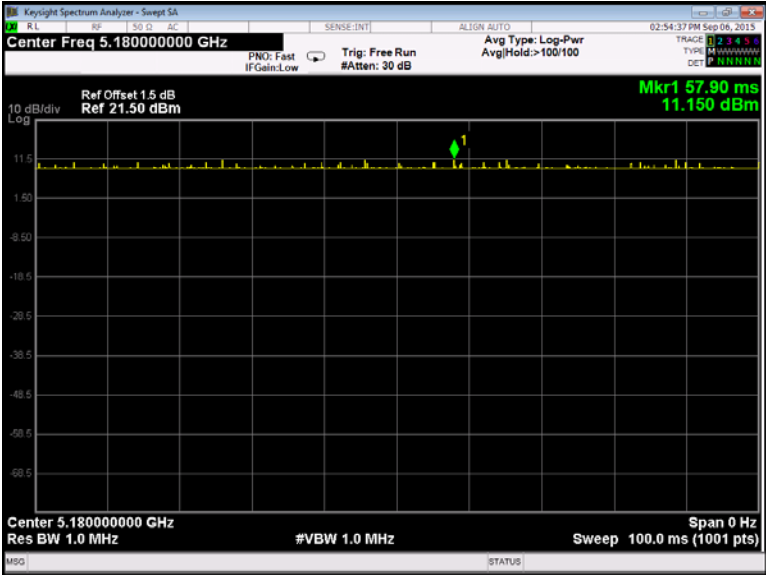


802.11n(HT20) band I Low channel

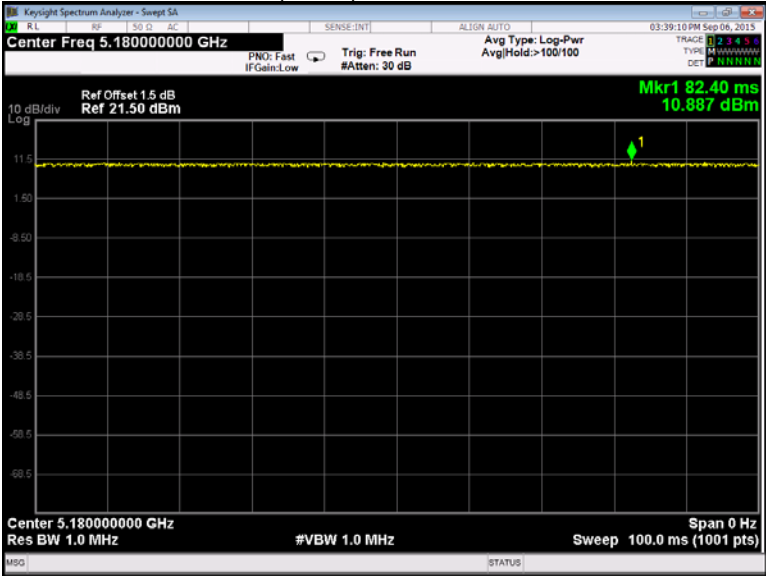


802.11n(HT40) band I Low channel

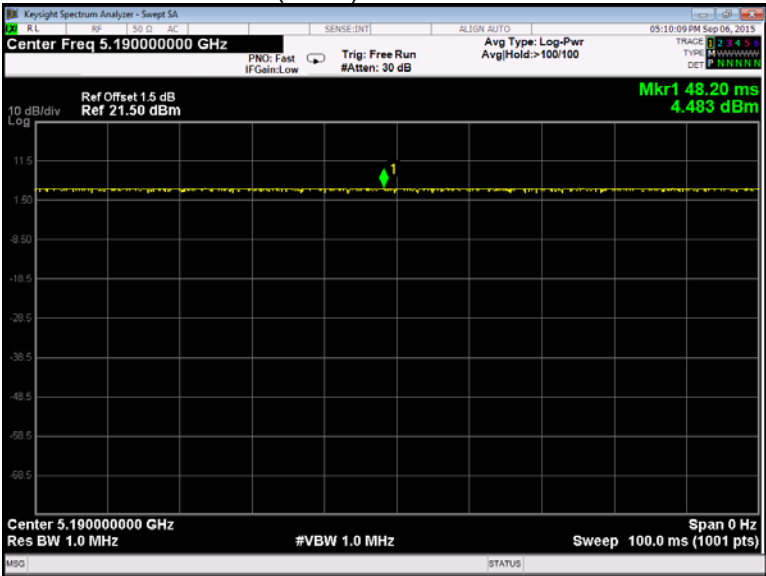


802.11ac(HT20) band I Low channel

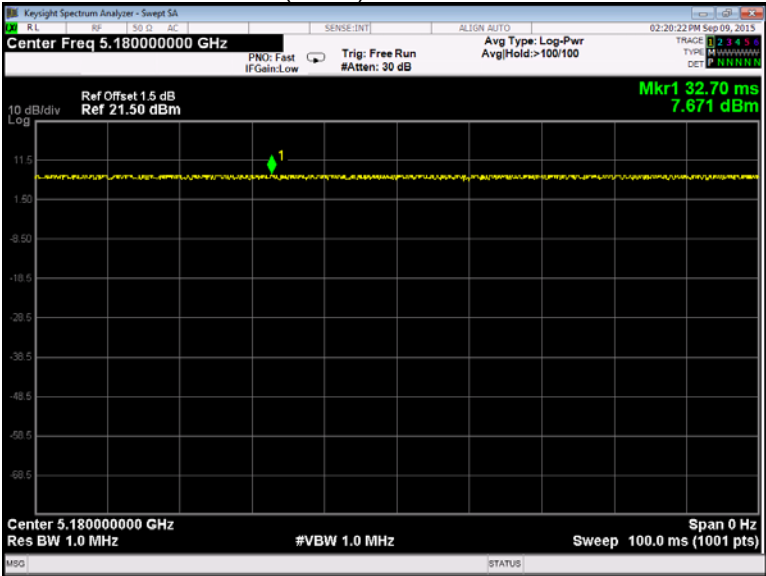


802.11ac(HT40) band I Low channel

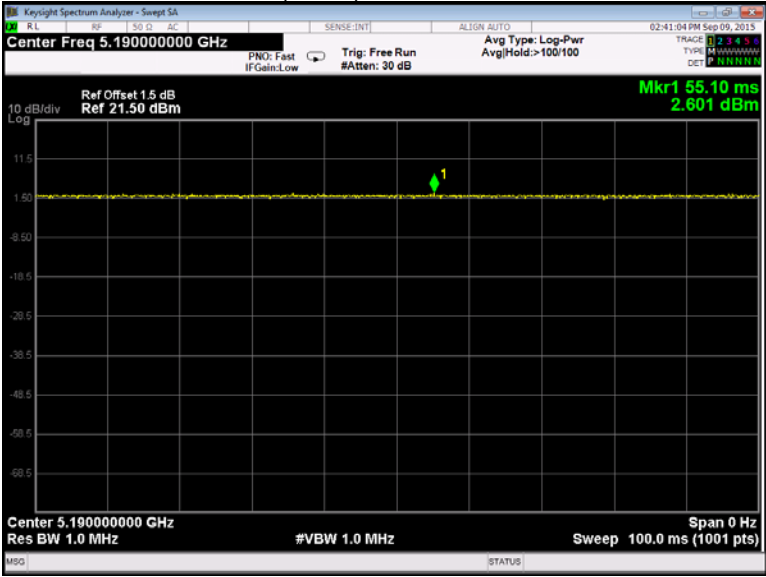


802.11ac(HT80) band I Low channel

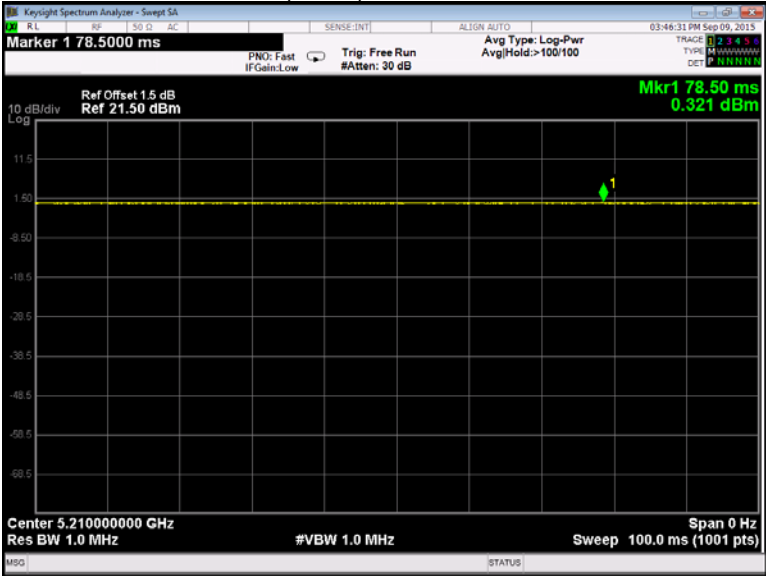


802.11a band IV Low channel

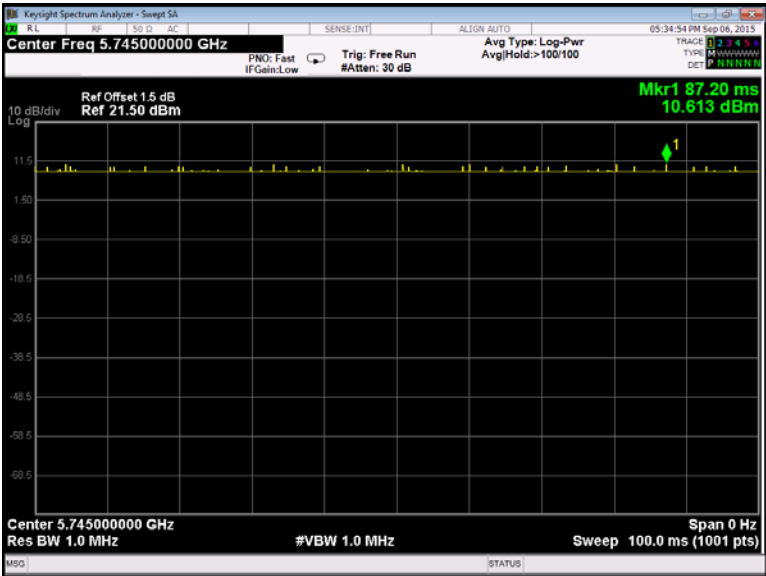


802.11n(HT20) band IV Low channel

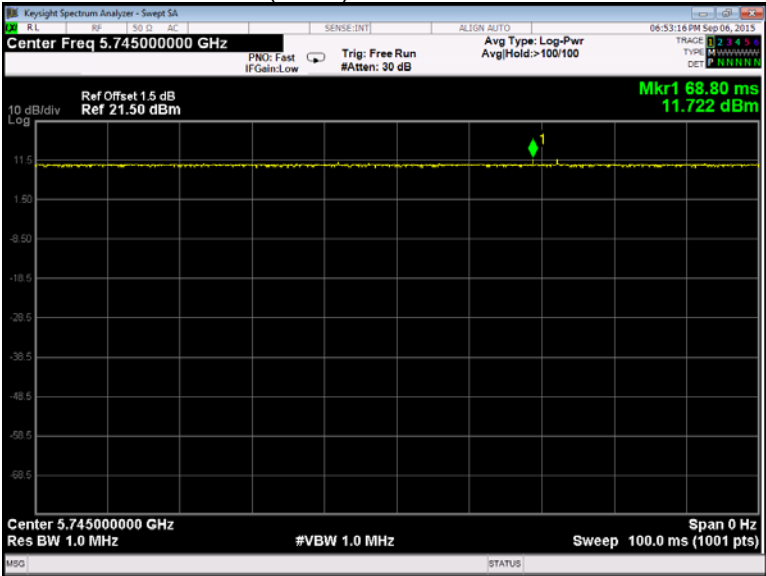


802.11n(HT40) band IV Low channel

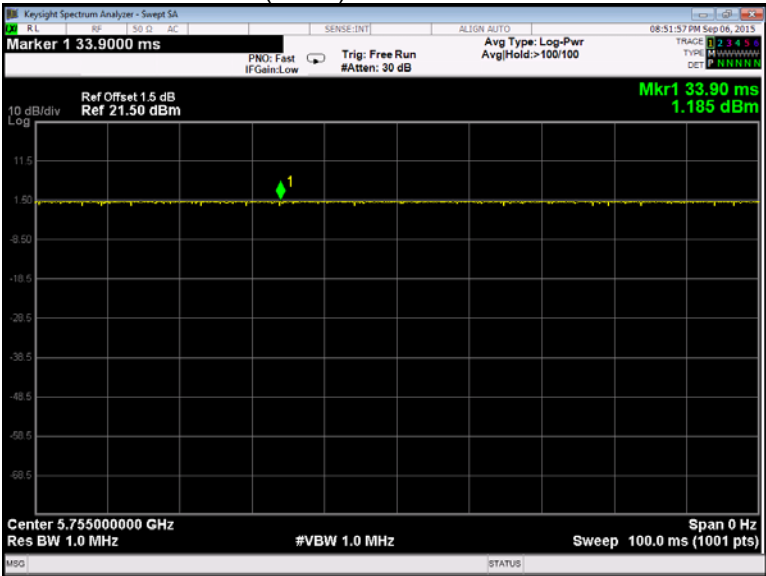


802.11ac(HT20) band IV Low channel

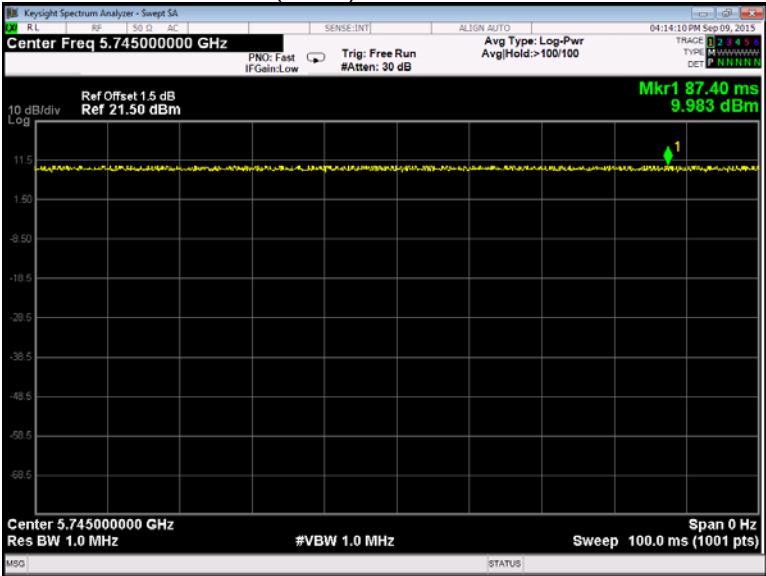

802.11ac(HT40) band IV Low channel

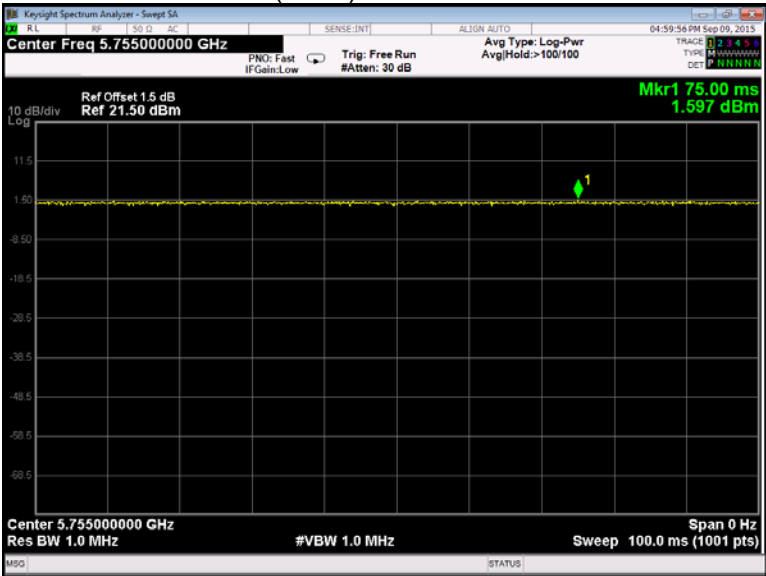


802.11ac(HT80) band IV Low channel

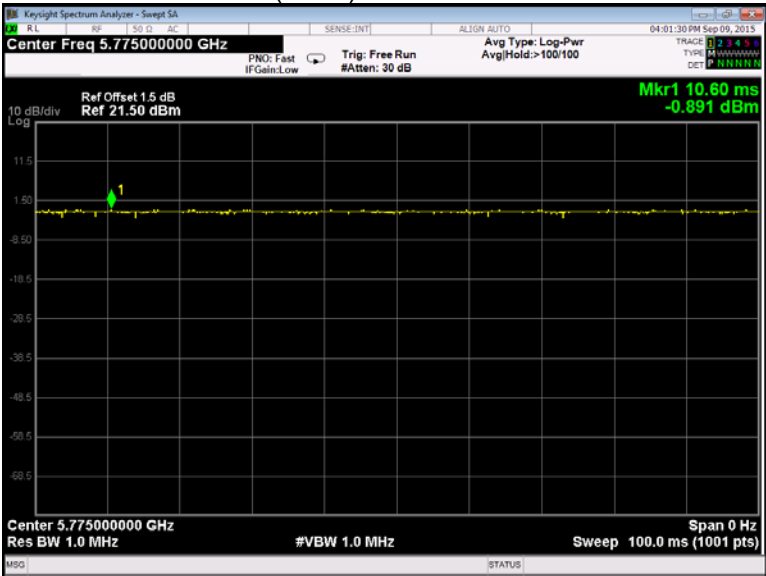


ANT1


802.11a band I Low channel

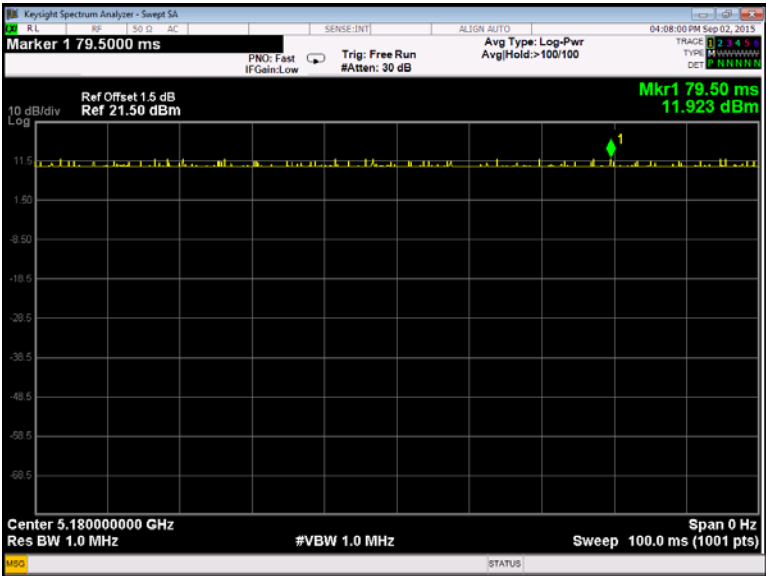


802.11n(HT20) band I Low channel

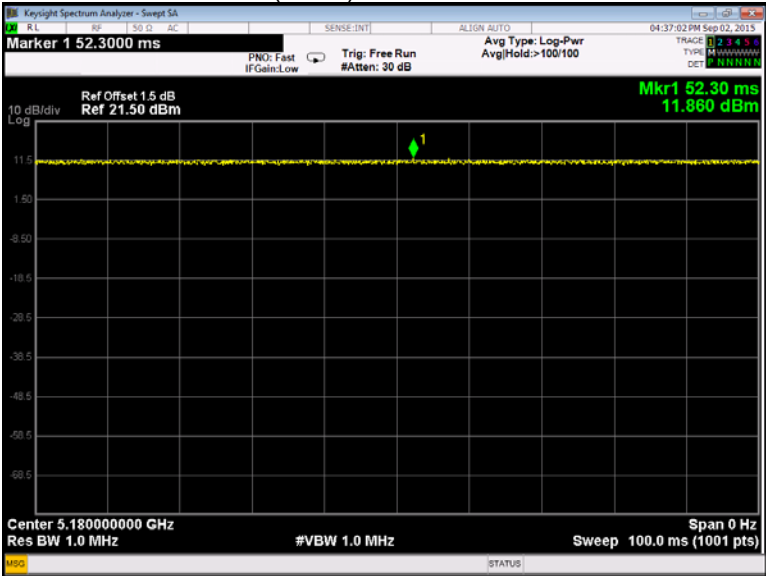


802.11n(HT40) band I Low channel

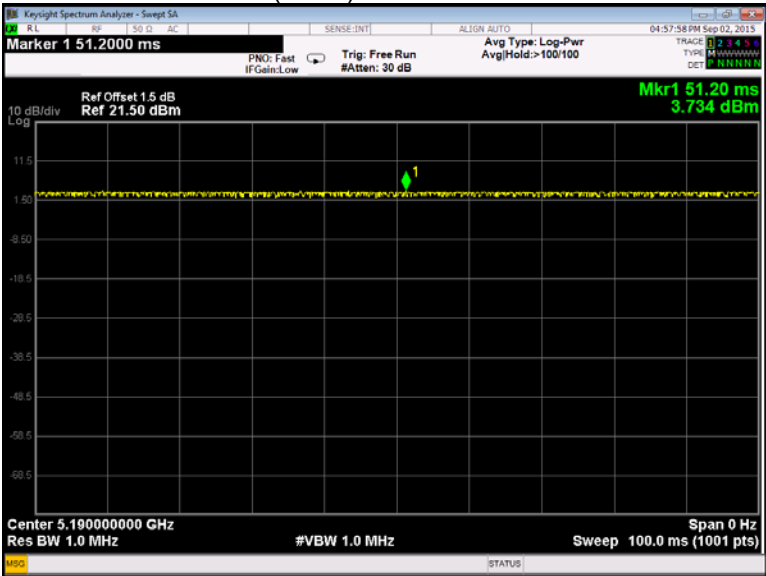


802.11ac(HT20) band I Low channel

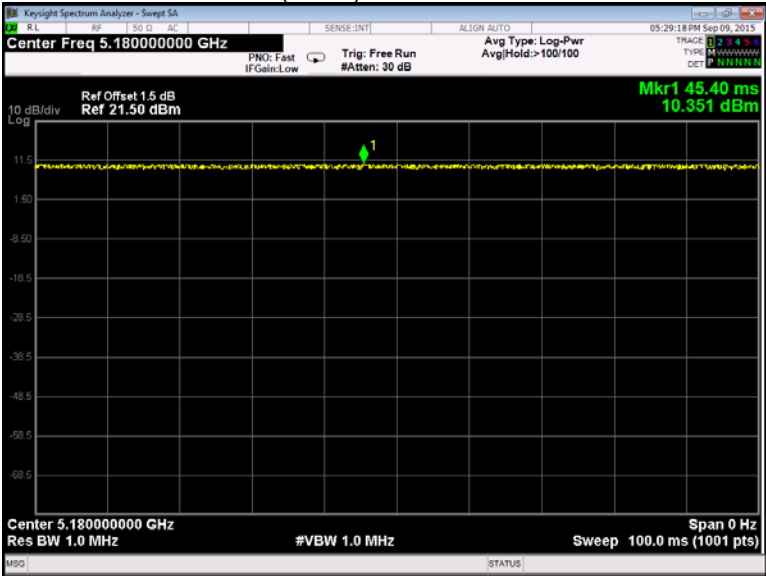


802.11ac(HT40) band I Low channel

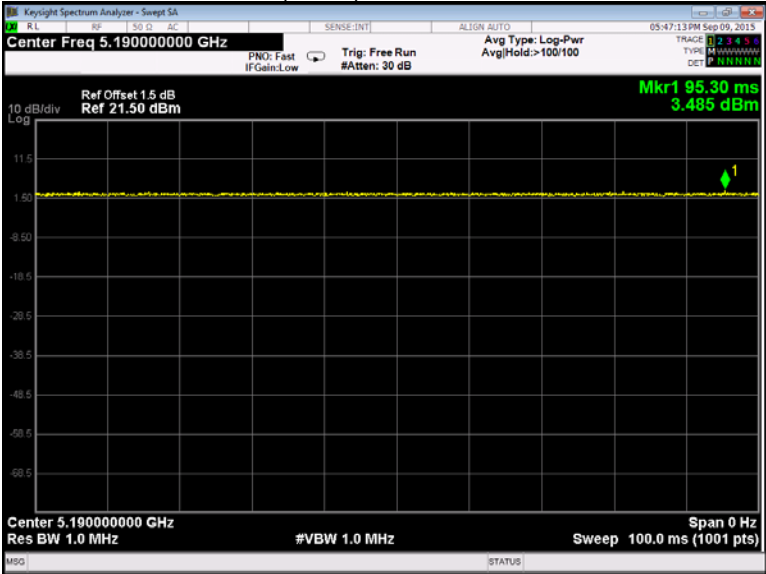


802.11ac(HT80) band I Low channel

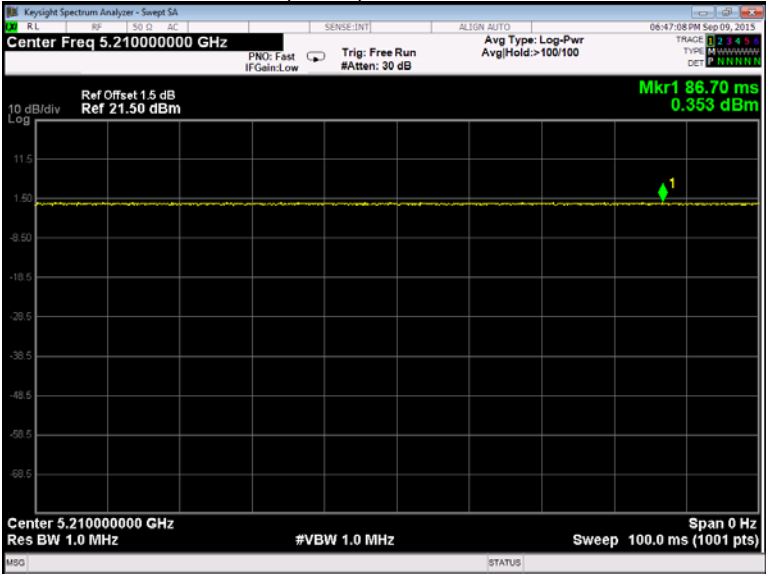


802.11a band IV Low channel

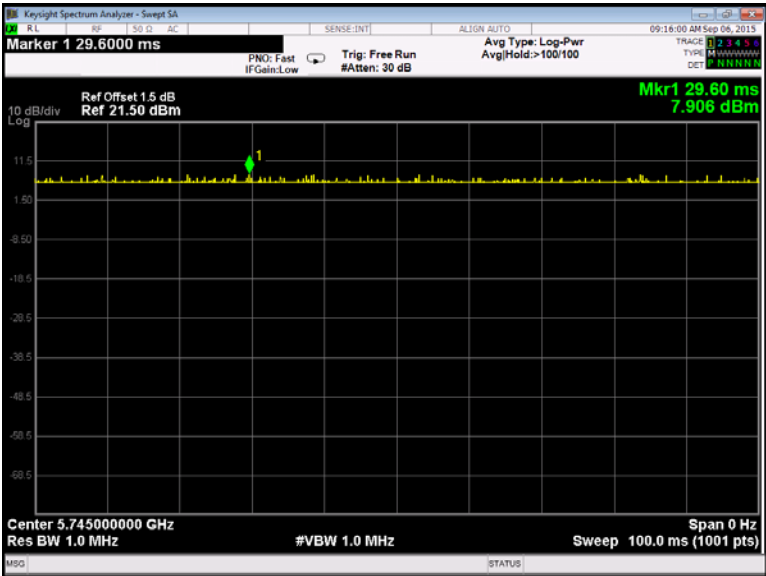


802.11n(HT20) band IV Low channel

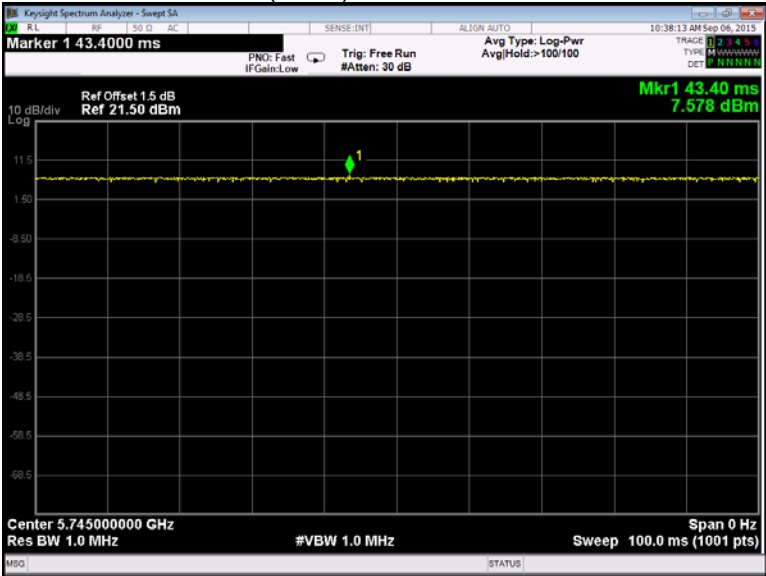


802.11n(HT40) band IV Low channel

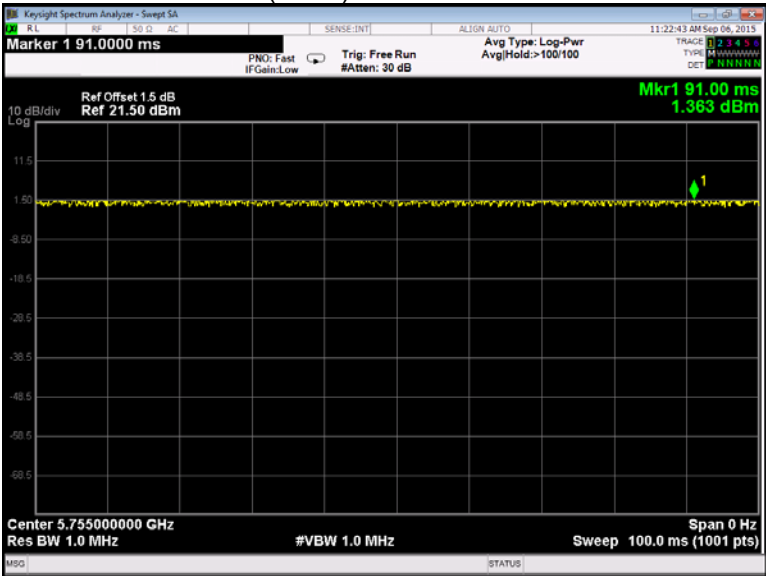


802.11ac(HT20) band IV Low channel

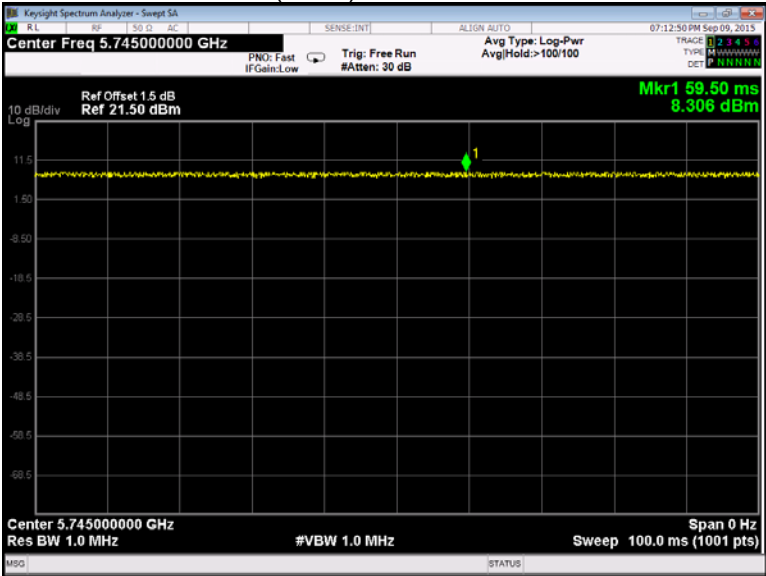

802.11ac(HT40) band IV Low channel

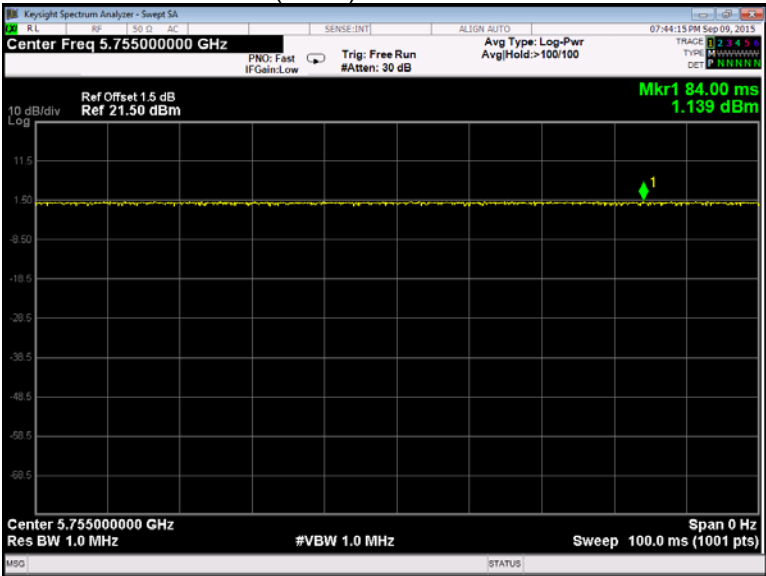

802.11ac(HT80) band IV Low channel

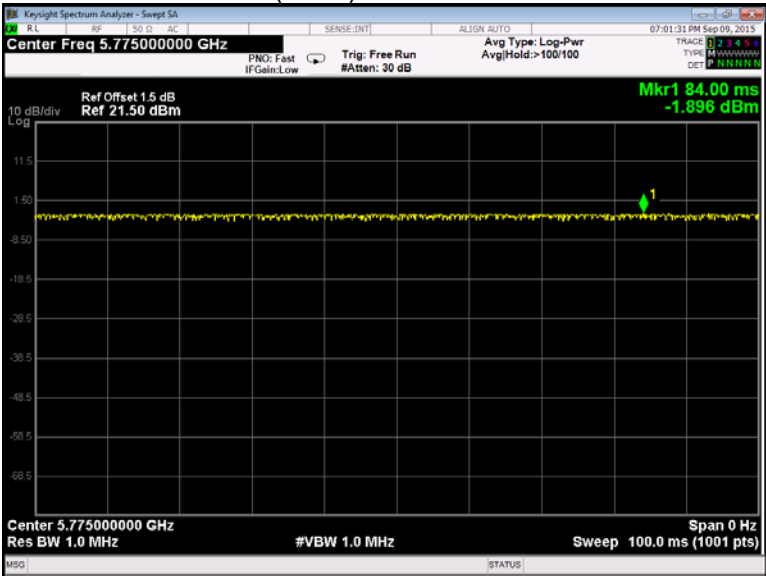

9 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2009
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27dBm/MHz. (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
Test Result:	PASS

9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Result

Test result plots shown as follows:

ANTO


802.11a band I Band edge-left side

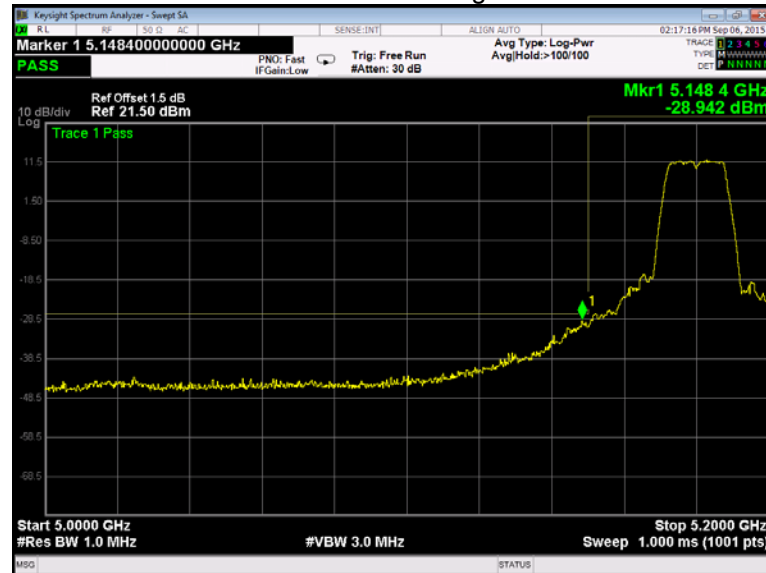


802.11a band I Band edge-right side




802.11a band IV Band edge-left side

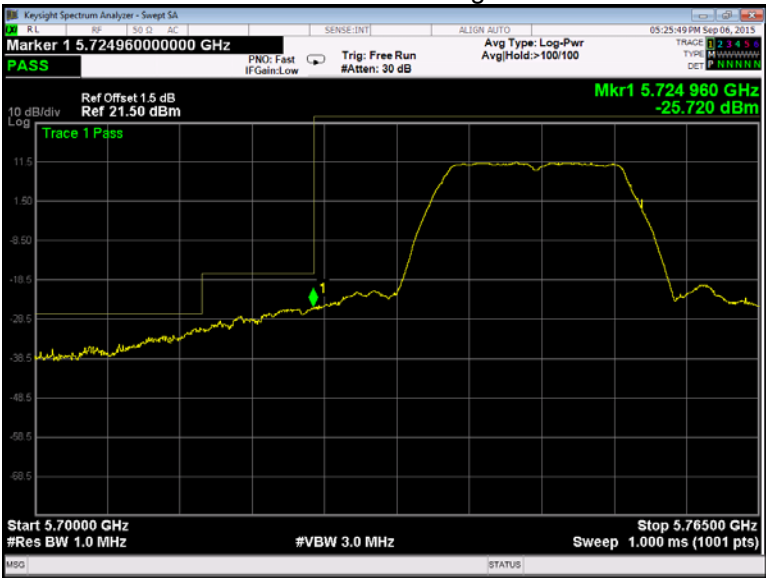


802.11a band IV Band edge-right side

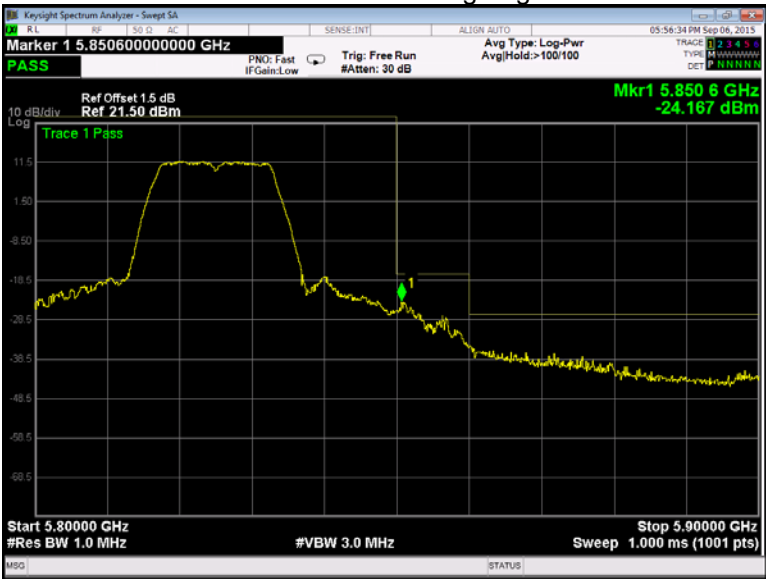


802.11n(HT20) band I Band edge-left side

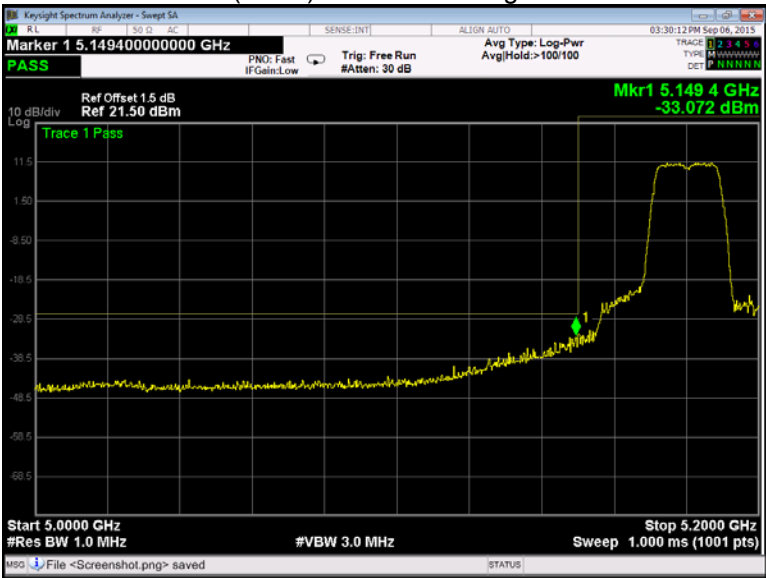


802.11n(HT20) band I Band edge-right side

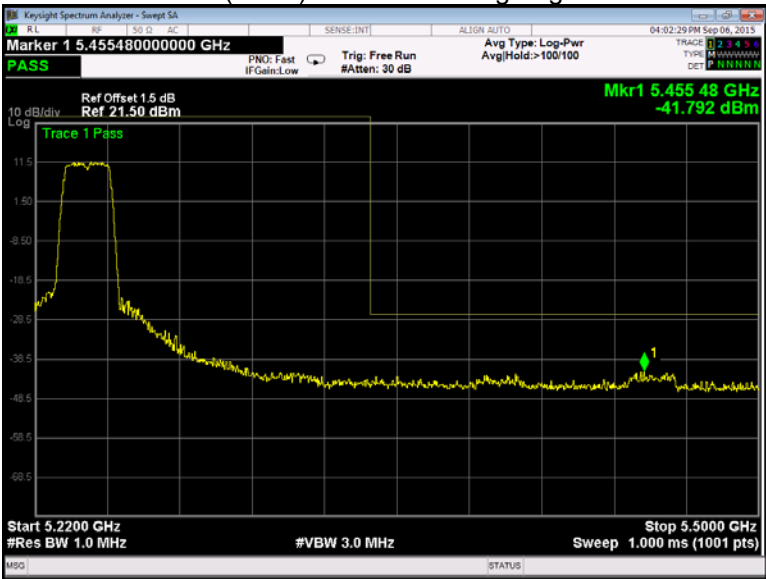


802.11n(HT20) band IV Band edge-left side

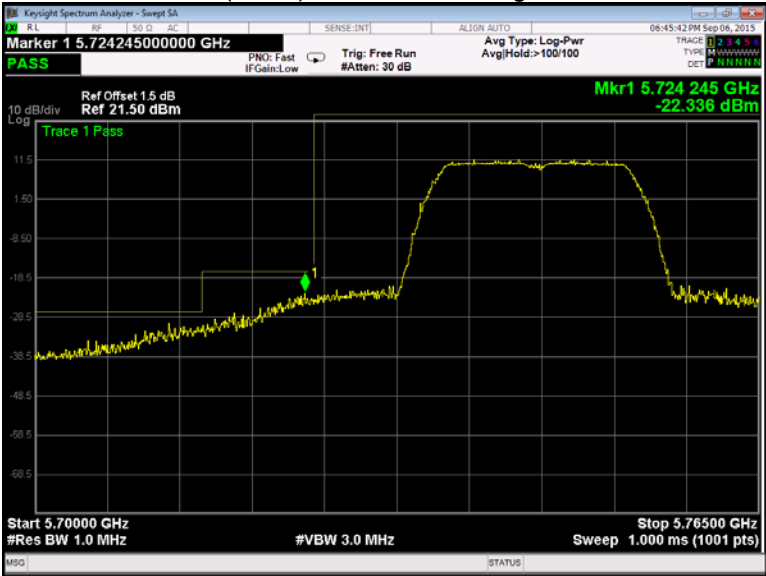


802.11n(HT20) band IV Band edge-right side

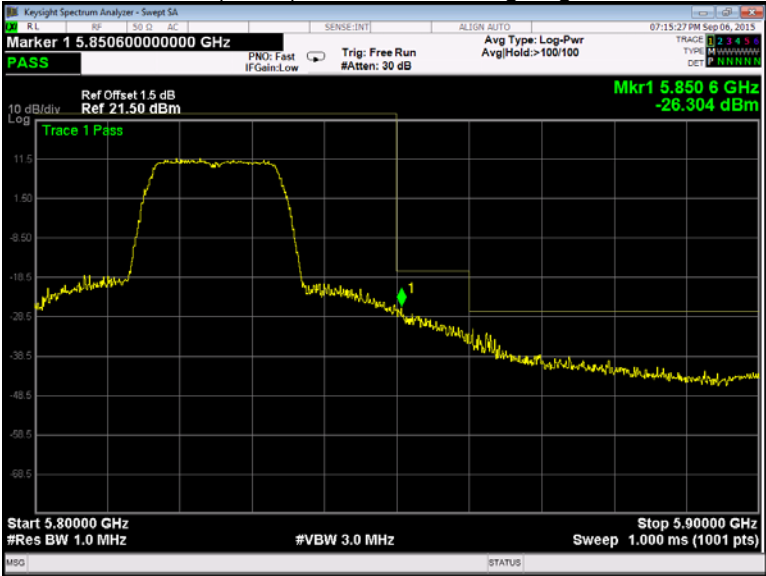


802.11n(HT40) band I Band edge-left side

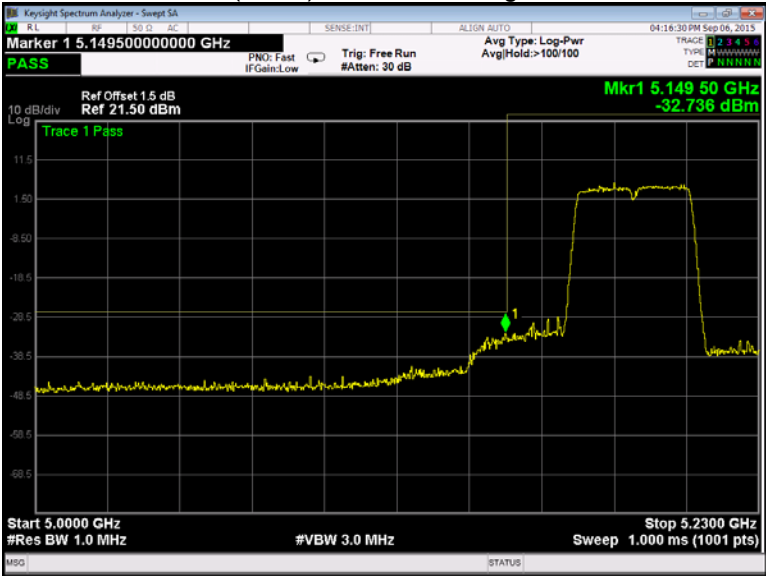


802.11n(HT40) band I Band edge-right side

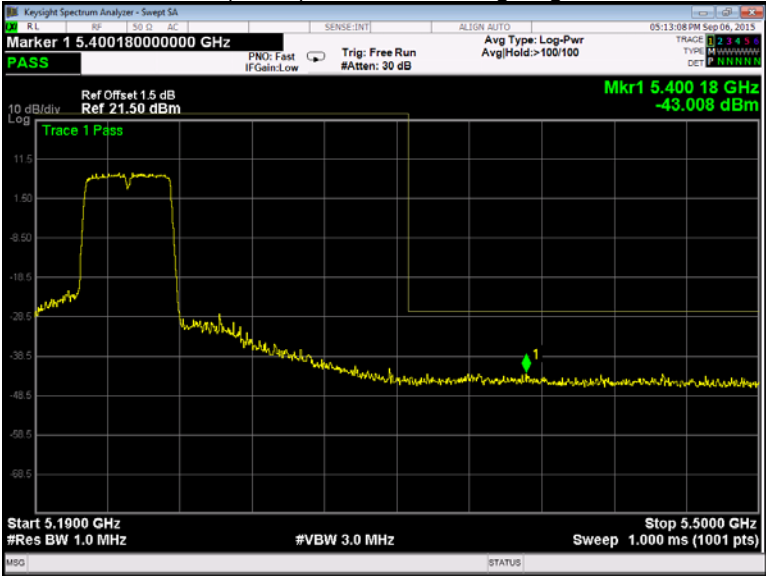


802.11n(HT40) band IV Band edge-left side

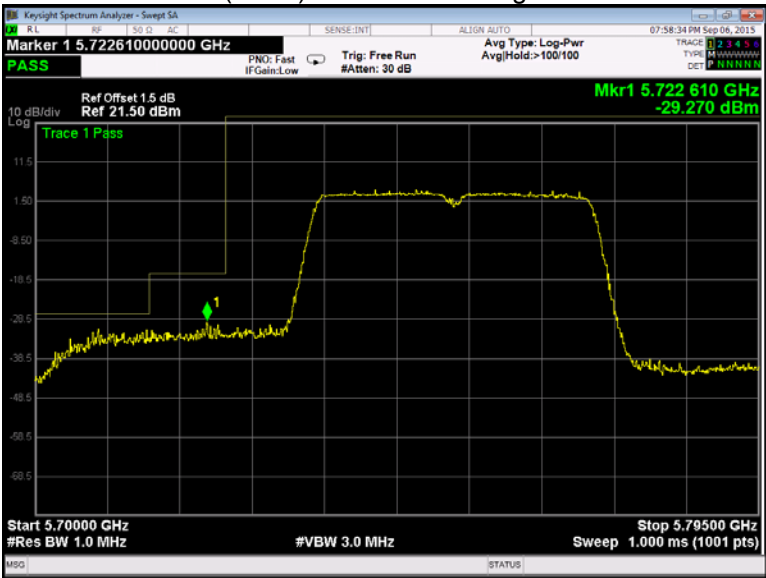


802.11n(HT40) band IV Band edge-right side

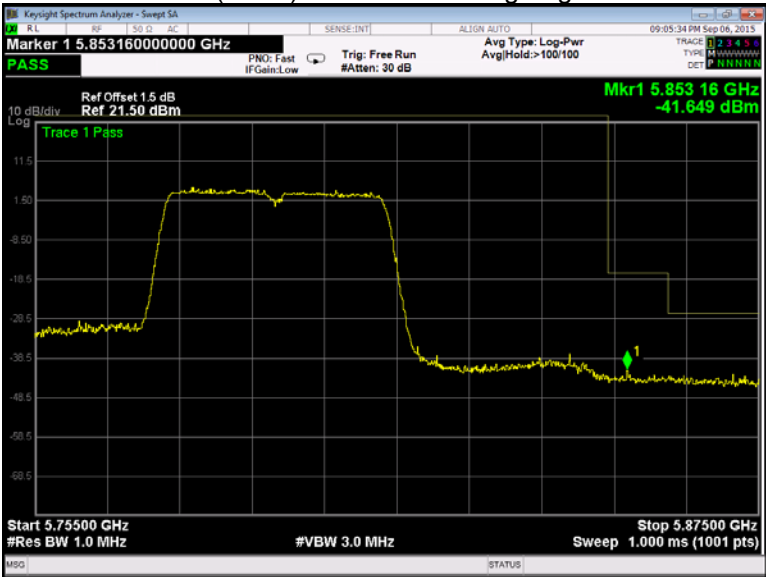


802.11ac(HT20) band I Band edge-left side

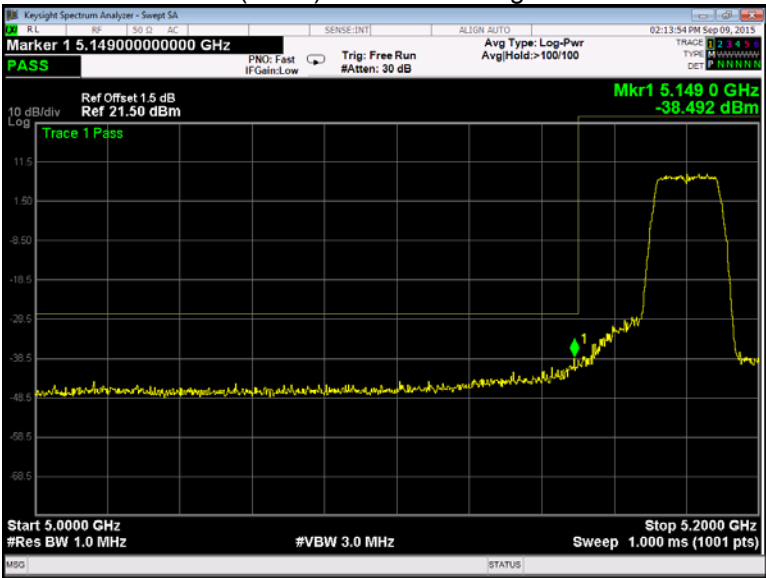


802.11ac(HT20) band I Band edge-right side

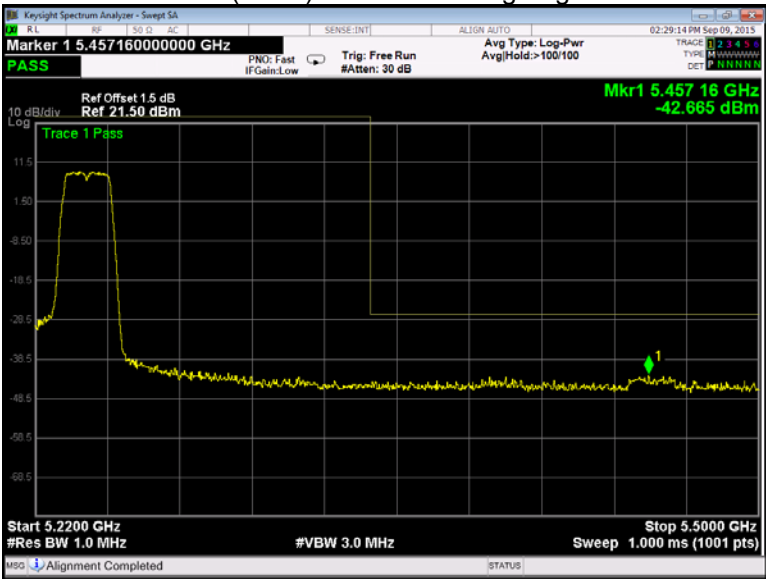


802.11ac(HT20) band IV Band edge-left side

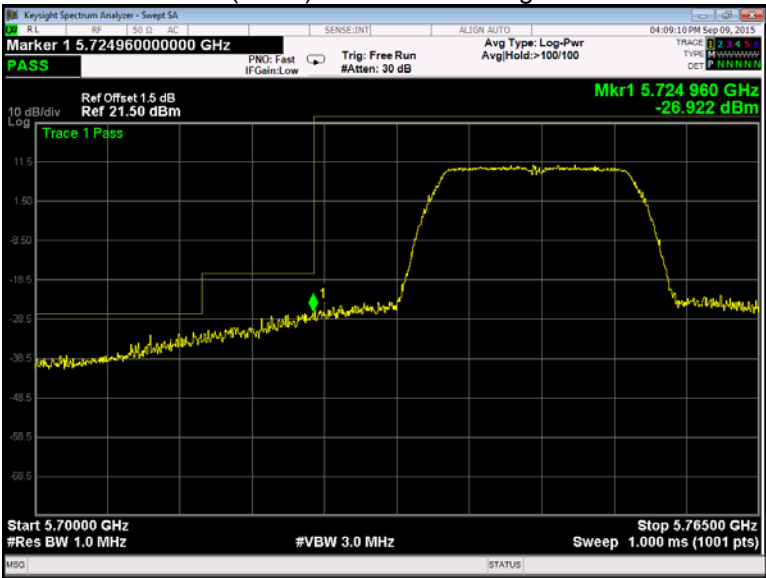


802.11ac(HT20) band IV Band edge-right side

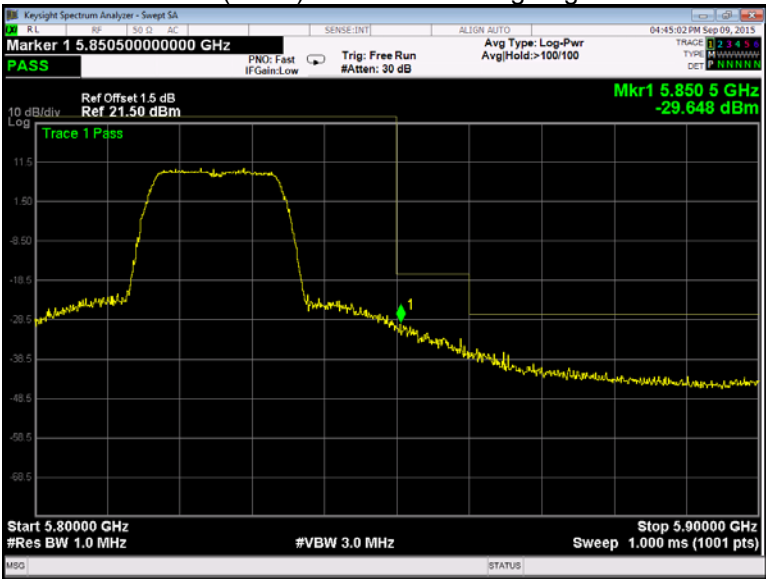


802.11ac(HT40) band I Band edge-left side

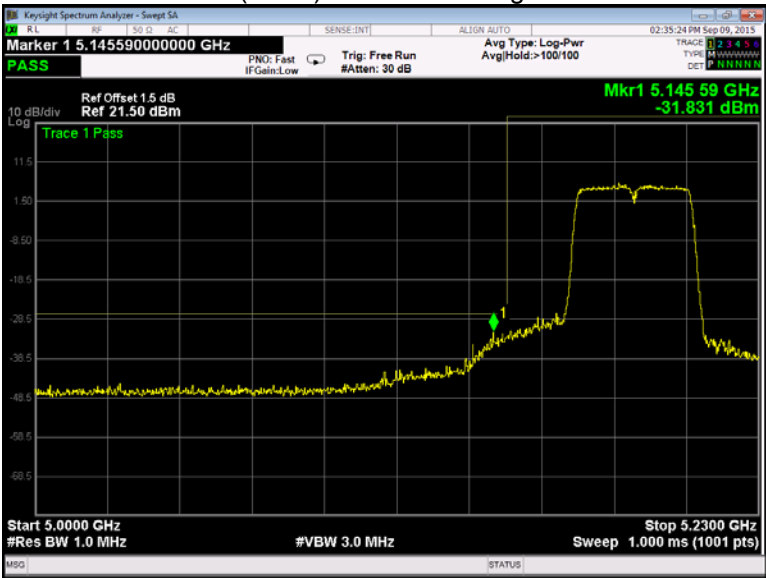


802.11ac(HT40) band I Band edge-right side

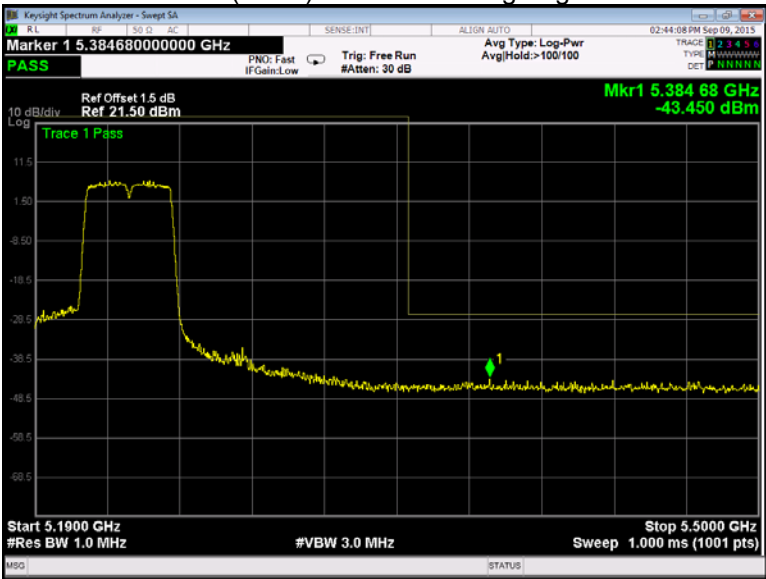


802.11ac(HT40) band IV Band edge-left side

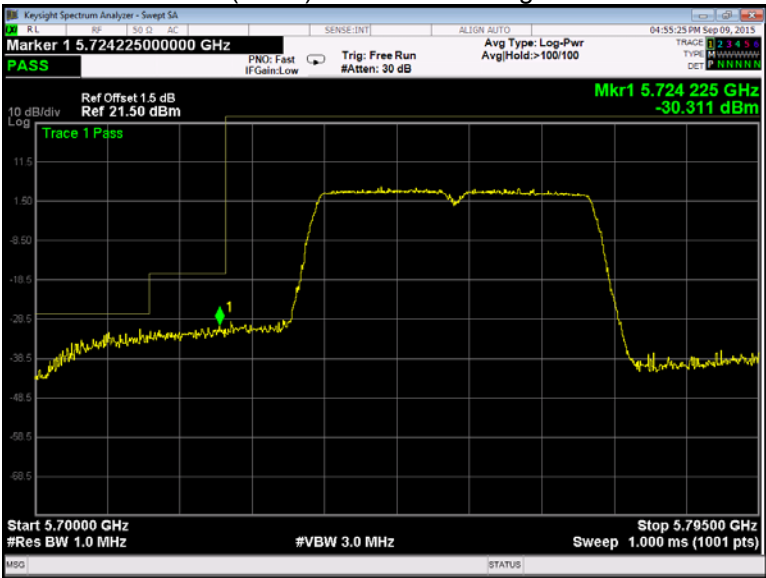


802.11ac(HT40) band IV Band edge-right side

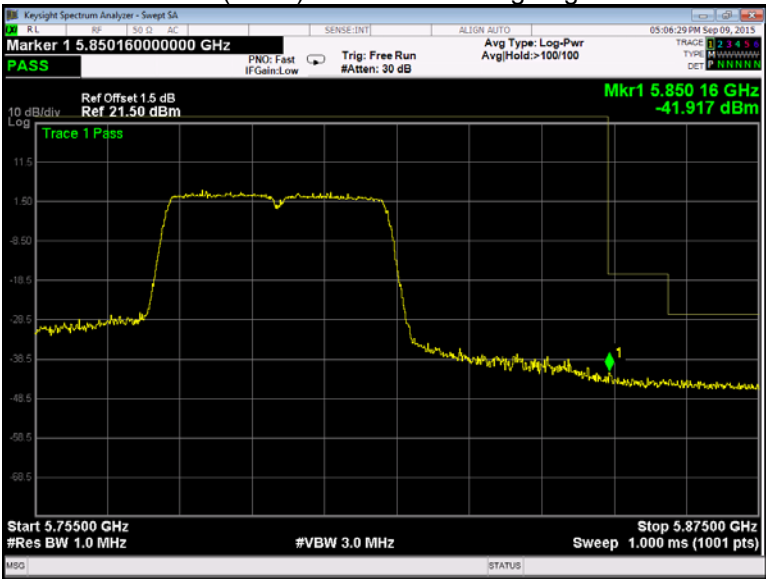


802.11ac(HT80) band I Band edge-left side

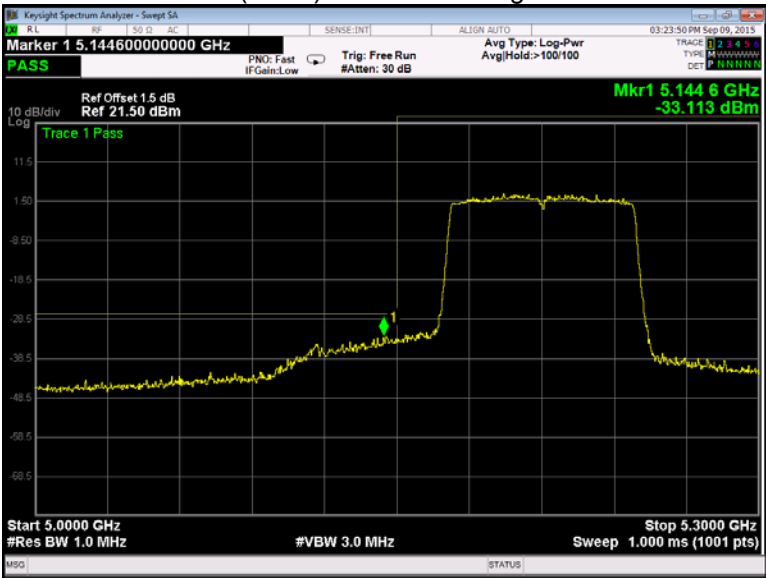


802.11ac(HT80) band I Band edge-right side

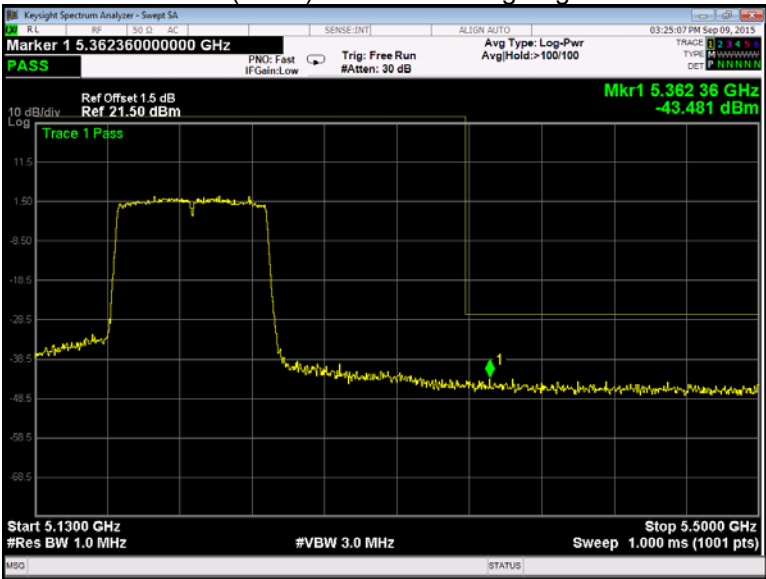

802.11ac(HT80) band IV Band edge-left side

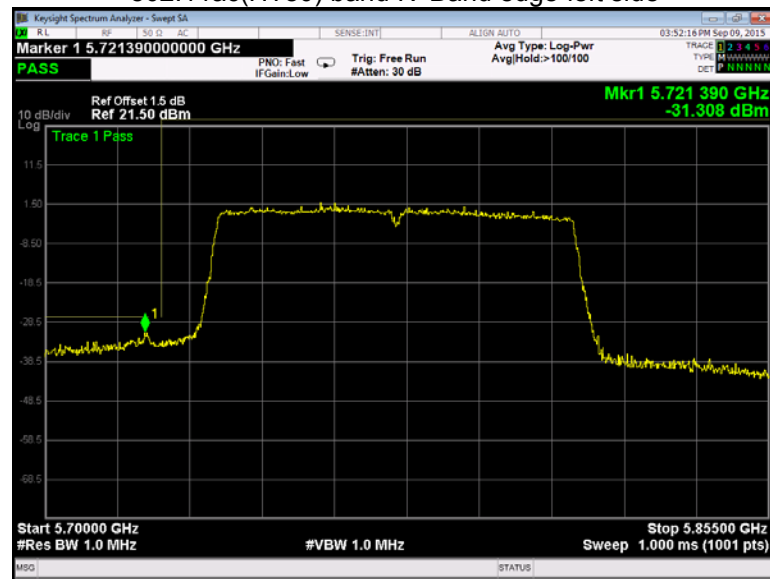


802.11ac(HT80) band IV Band edge-right side

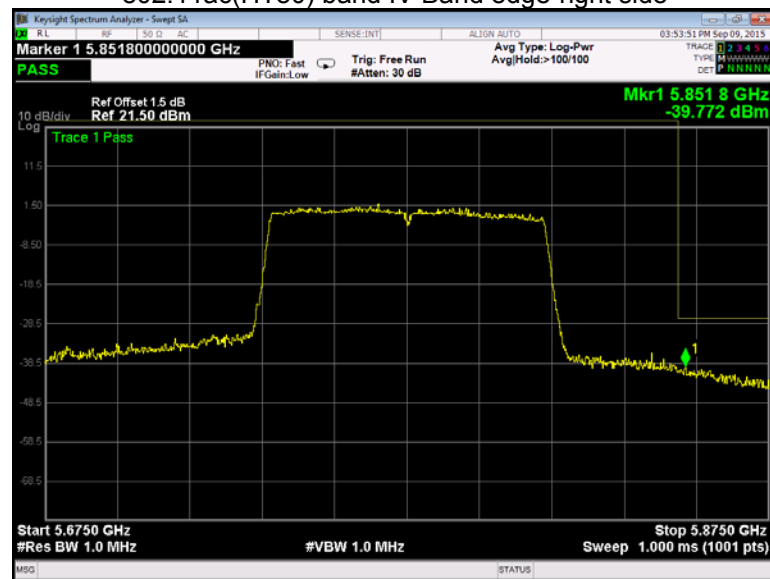


ANT1


802.11a band I Band edge-left side

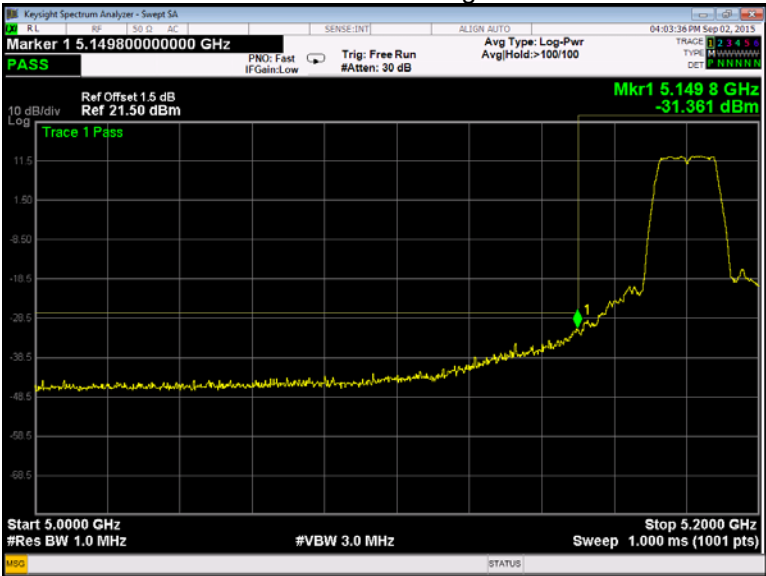


802.11a band I Band edge-right side

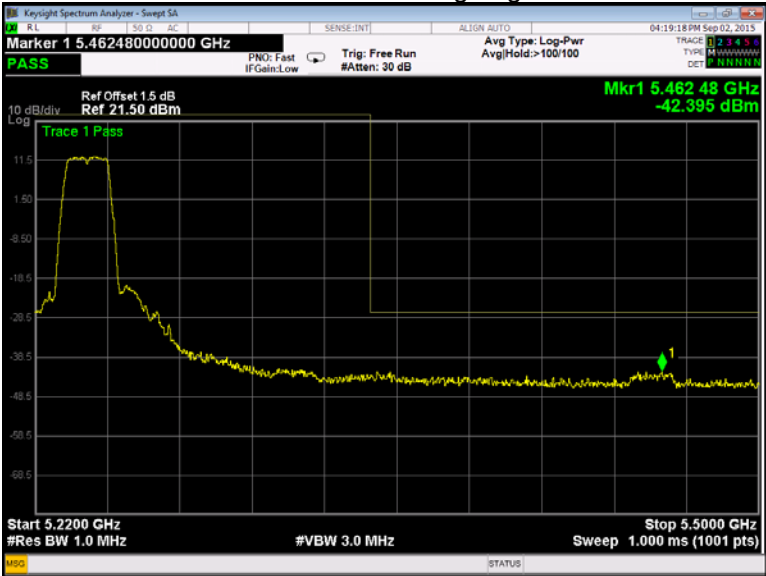


802.11a band IV Band edge-left side

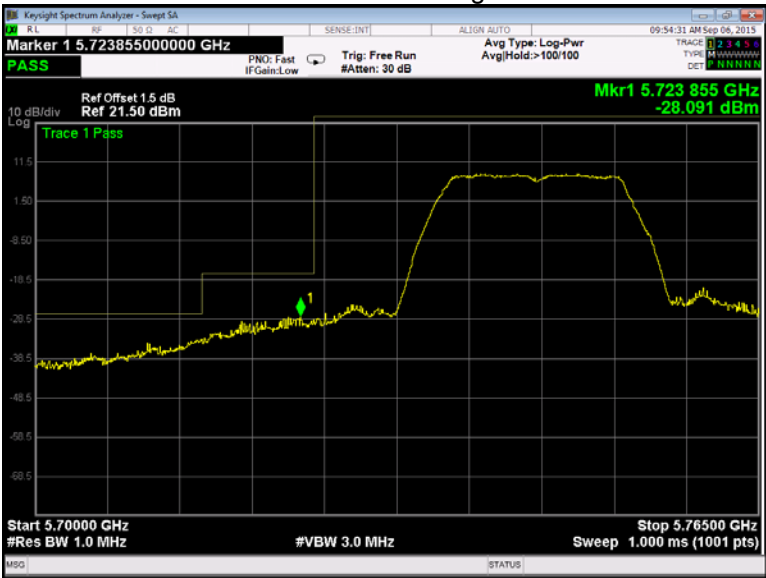


802.11a band IV Band edge-right side

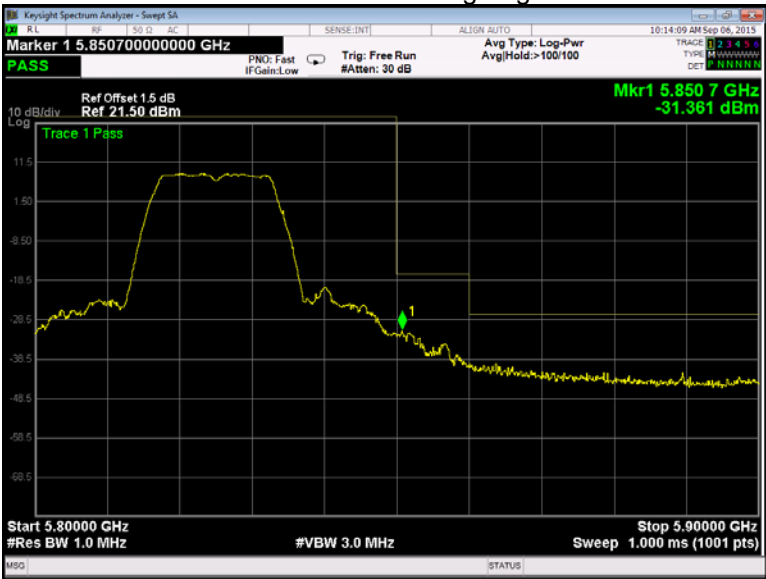


802.11n(HT20) band I Band edge-left side

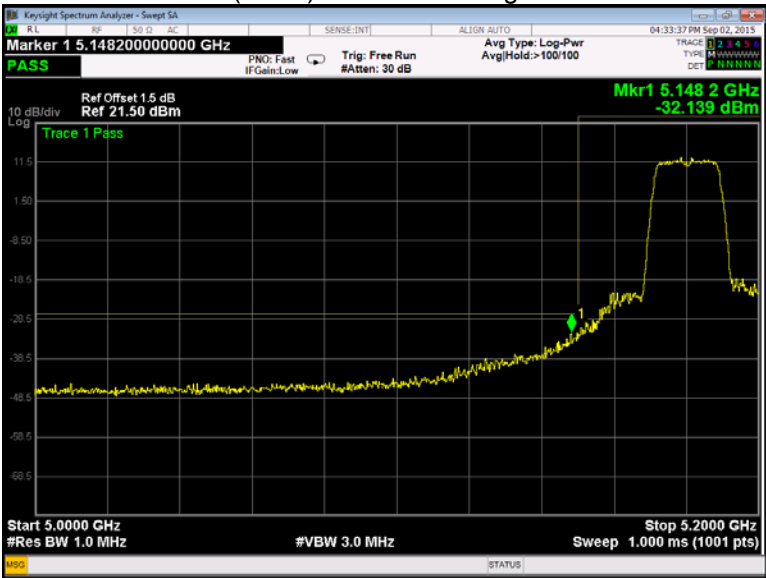


802.11n(HT20) band I Band edge-right side

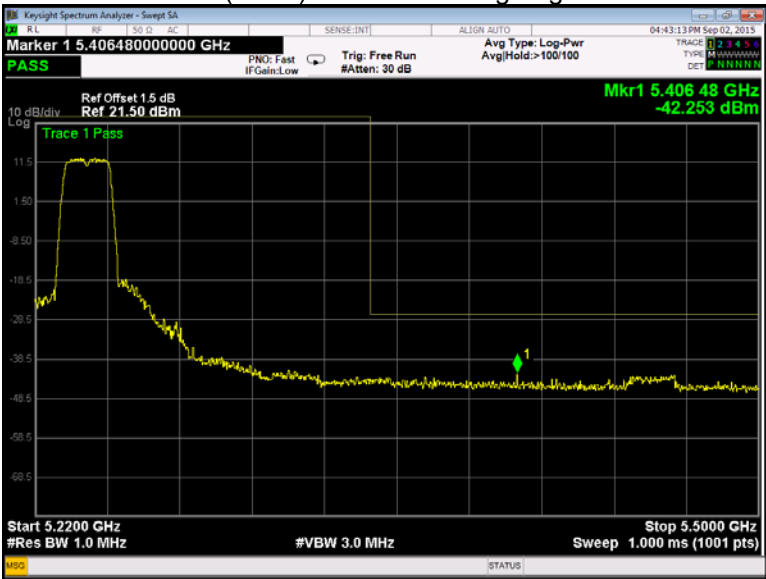


802.11n(HT20) band IV Band edge-left side

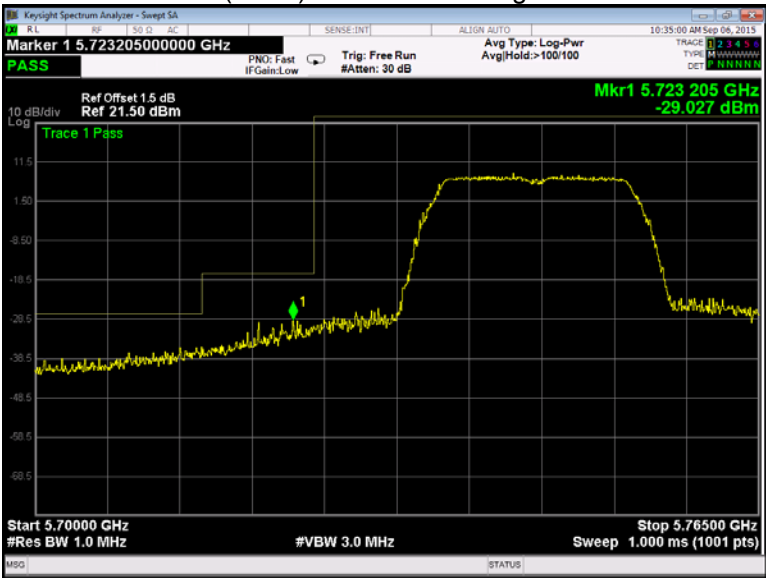


802.11n(HT20) band IV Band edge-right side

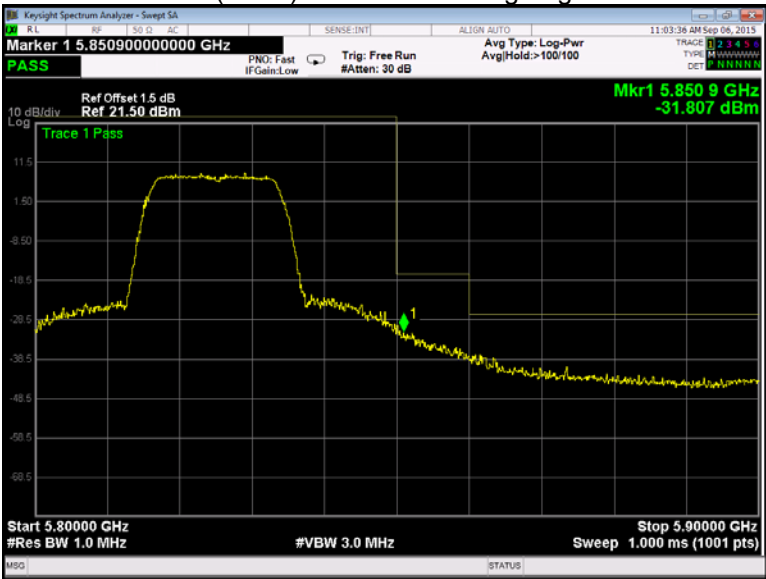


802.11n(HT40) band I Band edge-left side

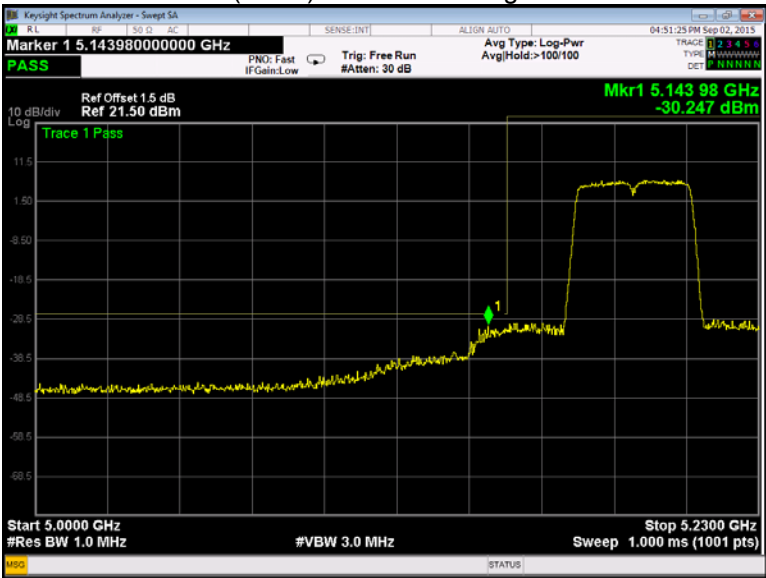


802.11n(HT40) band I Band edge-right side

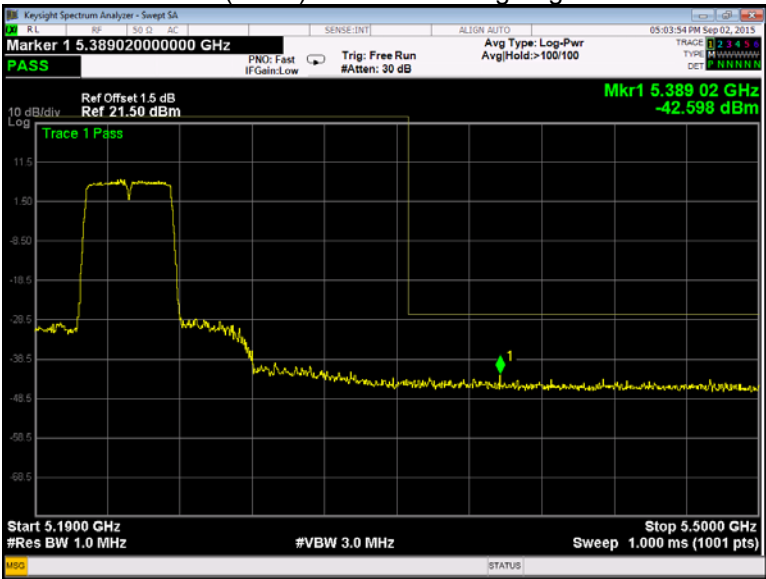


802.11n(HT40) band IV Band edge-left side

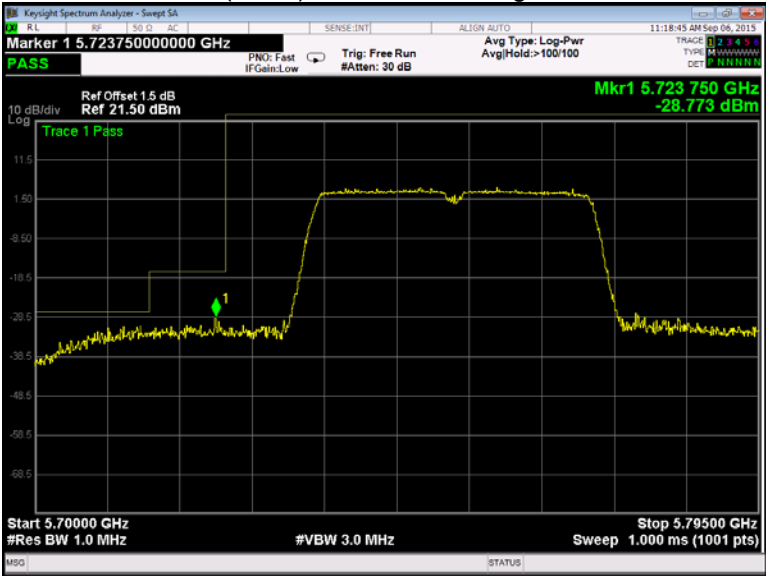


802.11n(HT40) band IV Band edge-right side

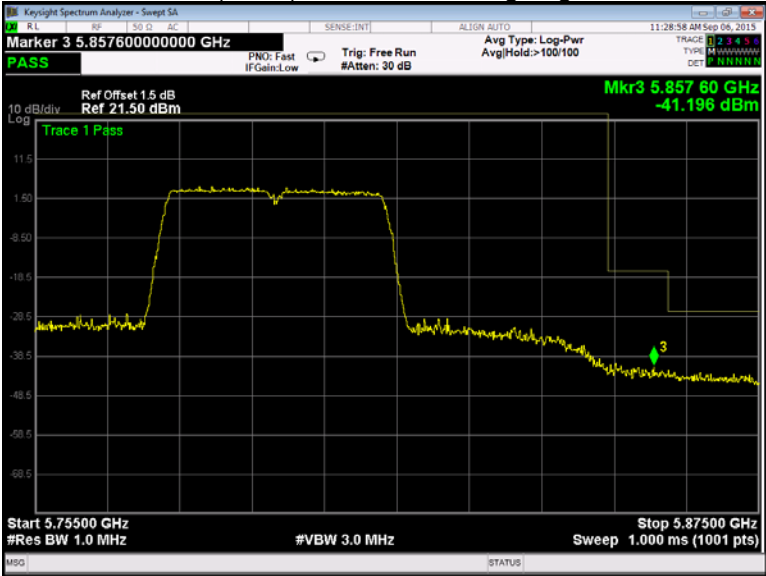


802.11ac(HT20) band I Band edge-left side

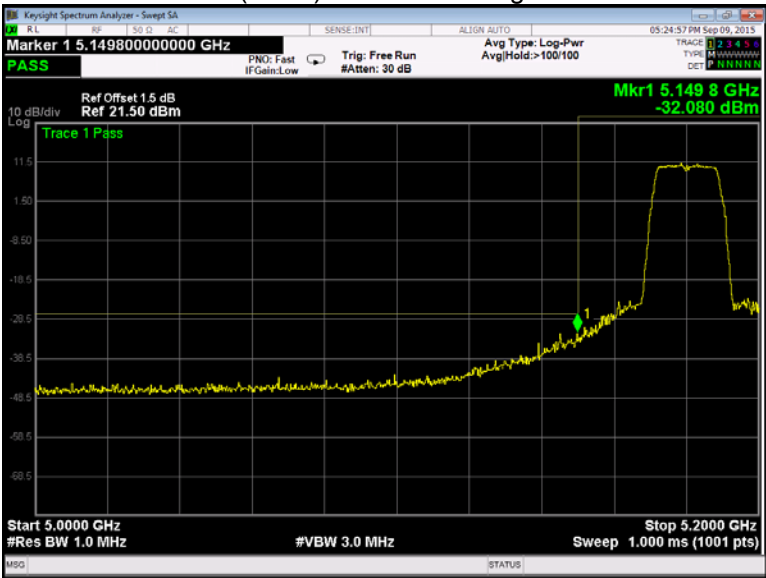


802.11ac(HT20) band I Band edge-right side

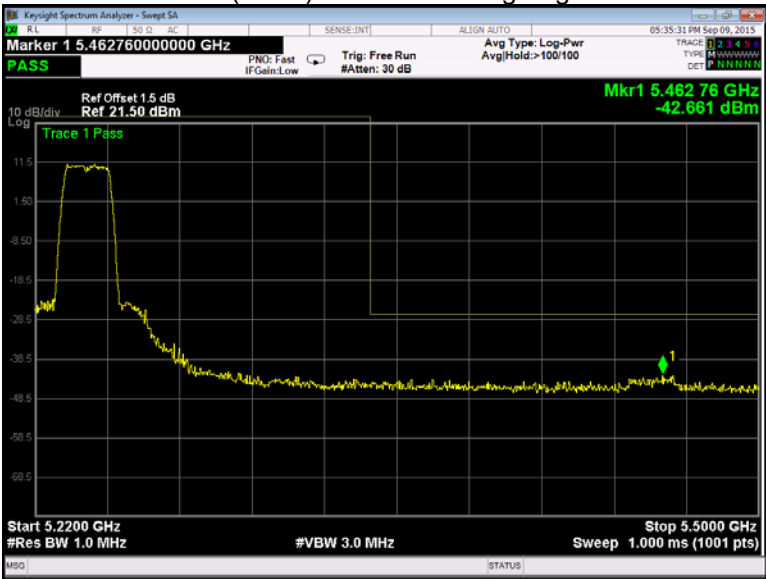


802.11ac(HT20) band IV Band edge-left side

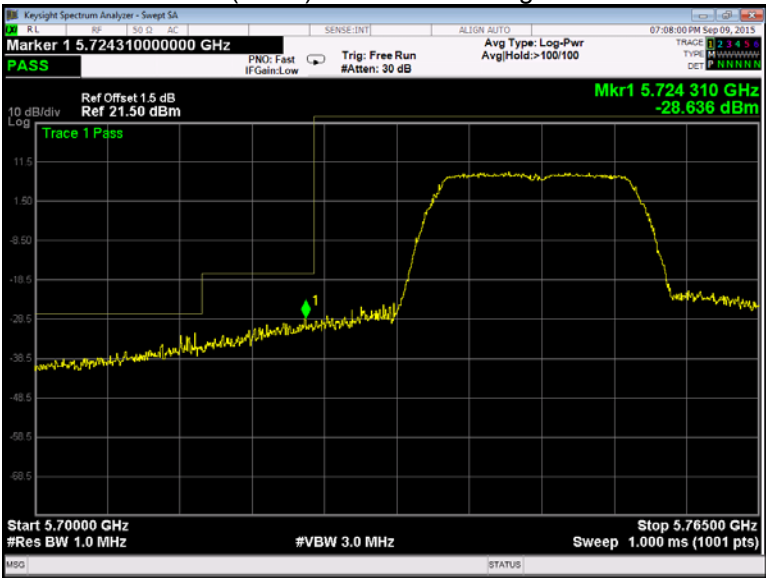


802.11ac(HT20) band IV Band edge-right side

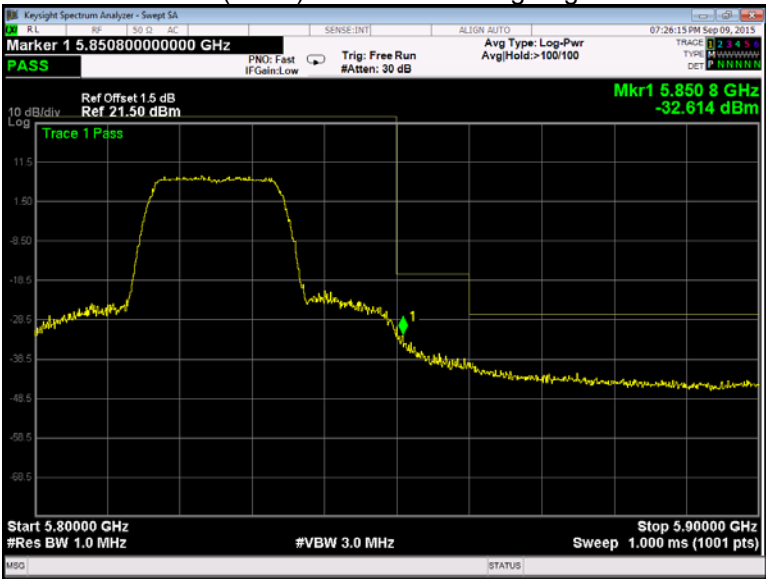


802.11ac(HT40) band I Band edge-left side

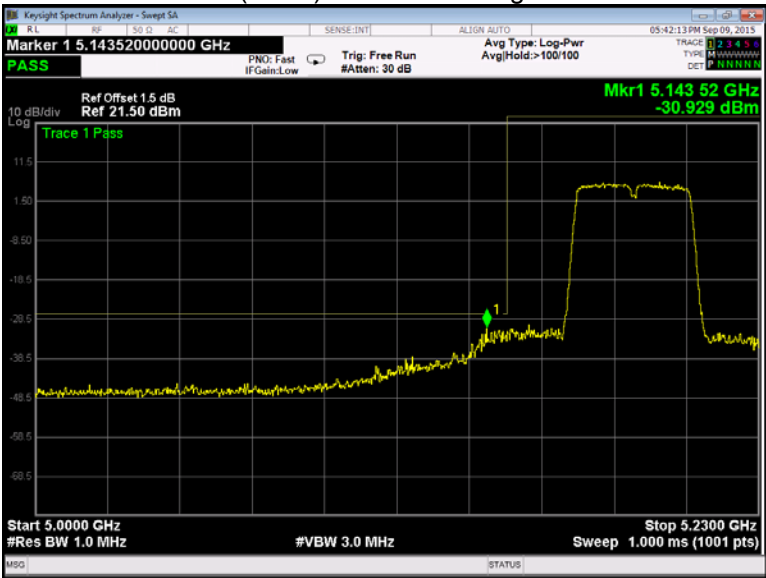


802.11ac(HT40) band I Band edge-right side

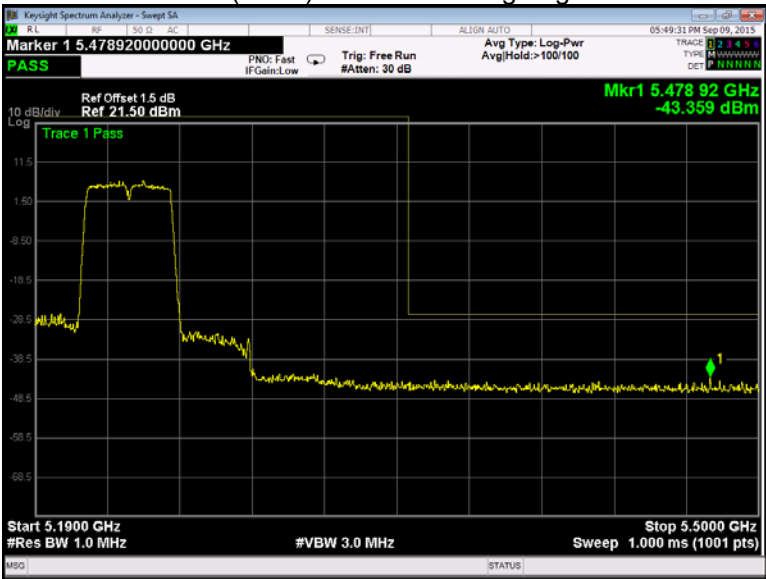


802.11ac(HT80) band I Band edge-left side

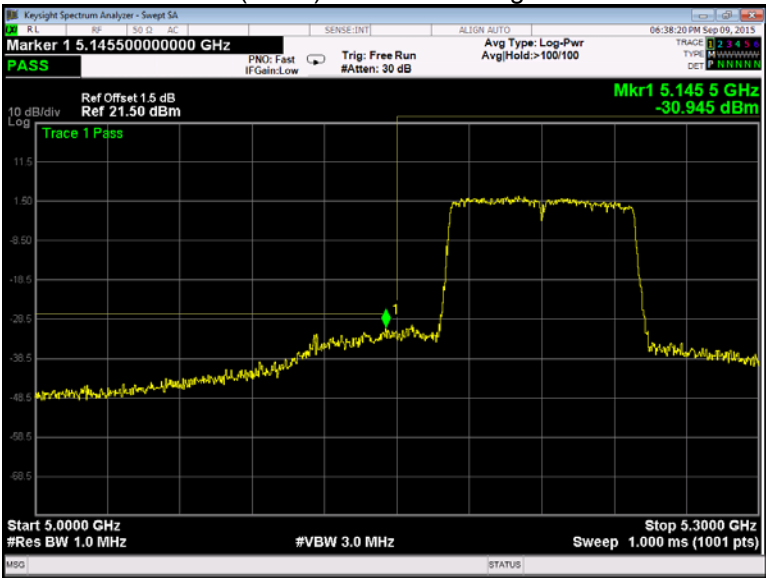


802.11ac(HT80) band I Band edge-right side

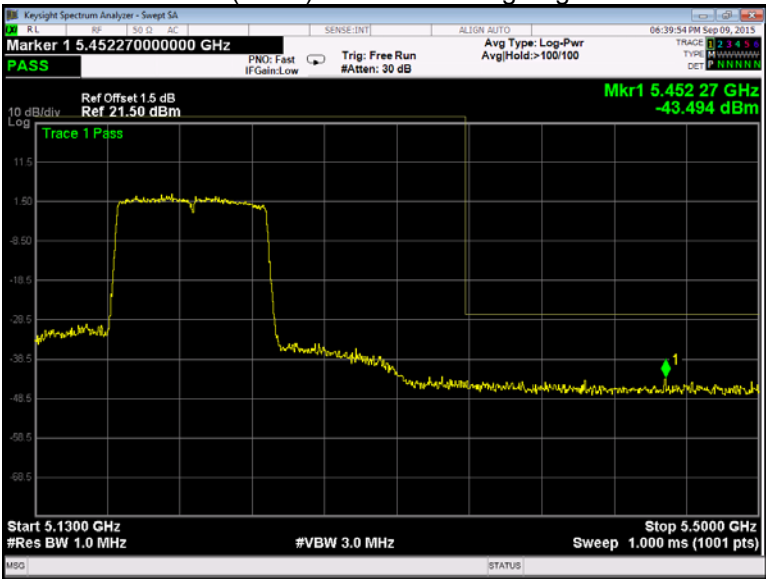

802.11ac(HT80) band IV Band edge-left side

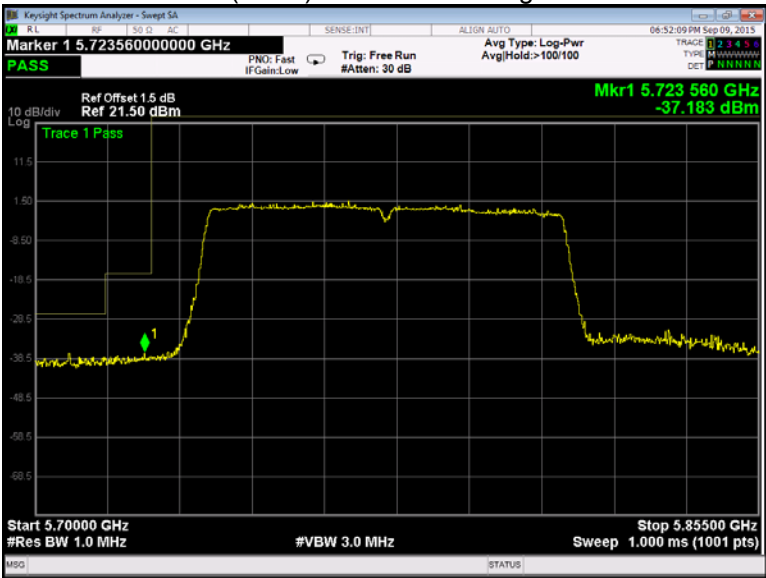

802.11ac(HT80) band IV Band edge-right side

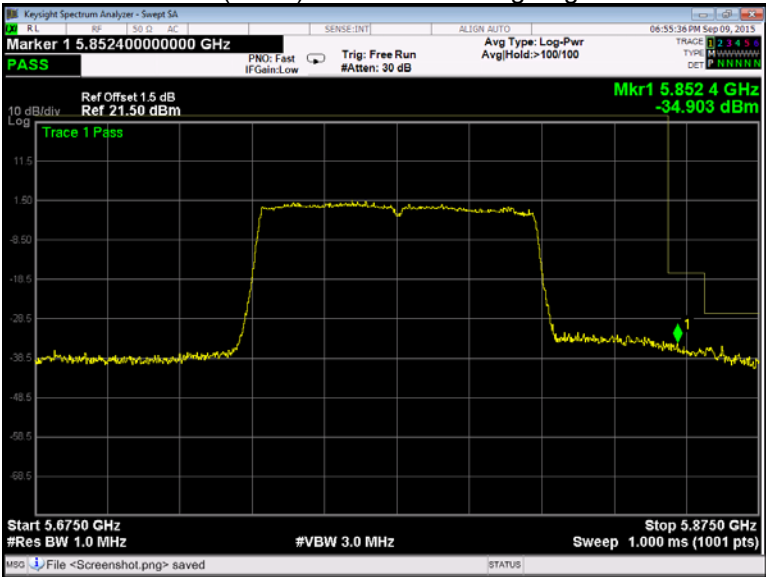

10 6 dB Bandwidth

Test Requirement: FCC CFR47 Part 15 Section 15.407(e)
 KDB662911 D01 Multiple Transmitter Output v02r01
 Test Method: KDB789033 D02 General UNII Test Procedures New Rules v01
 Section C
 Test Limit: ≥ 500 kHz
 Test Result: PASS

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 50kHz

10.2 Test Result:

Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
ANT0 Band IV	802.11a	16.44	16.41	16.41
	802.11n(HT20)	17.64	17.61	17.64
	802.11n(HT40)	36.42	/	36.42
	802.11ac(HT20)	17.64	17.61	17.64
	802.11ac(HT40)	36.36	/	36.42
	802.11ac(HT80)	75.84	/	/
ANT1 Band IV	802.11a	16.41	16.41	16.41
	802.11n(HT20)	17.61	17.61	17.64
	802.11n(HT40)	36.42	/	36.42
	802.11ac(HT20)	17.64	17.61	17.61
	802.11ac(HT40)	36.24	/	36.48
	802.11ac(HT80)	75.96	/	/

Test result plots shown as follows:

ANT0


802.11a band IV Low channel




802.11a band IV Middle channel




802.11a band IV High channel

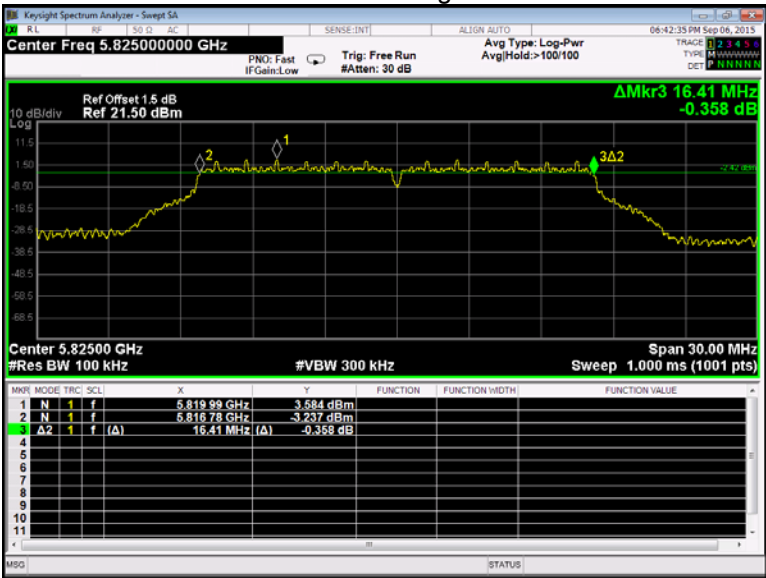


802.11n(HT20) band IV Low channel

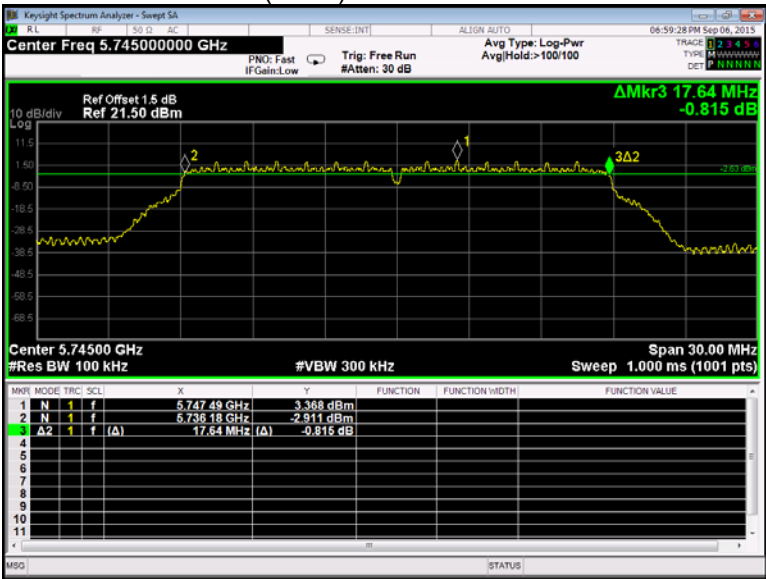


802.11n(HT20) band IV Middle channel

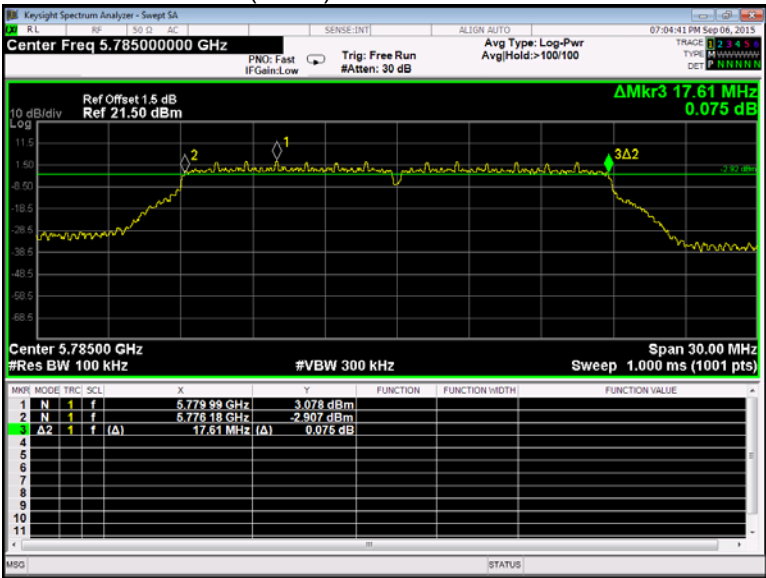


802.11n(HT20) band IV High channel

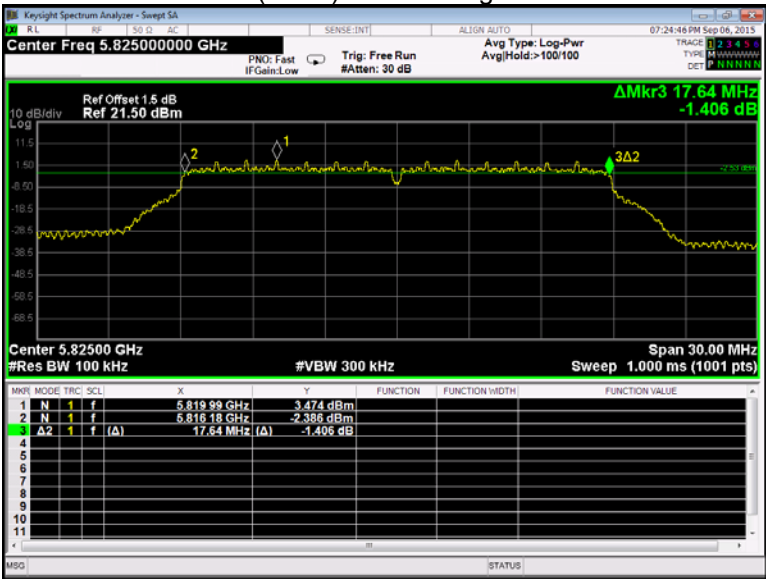


802.11n(HT40) band IV Low channel

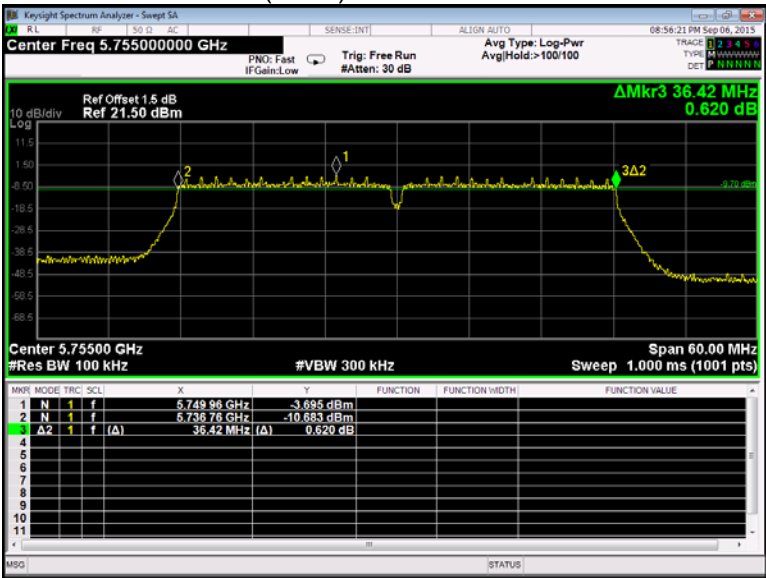


802.11n(HT40) band IV High channel

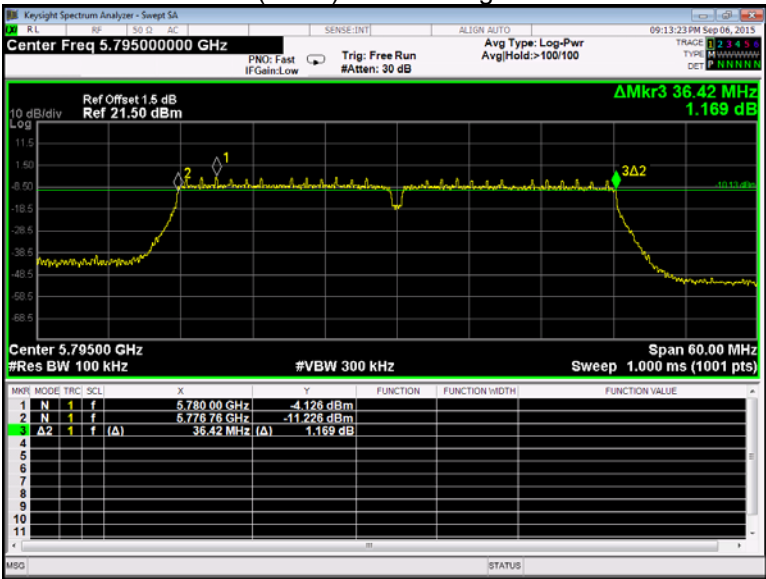


802.11ac(HT20) band IV Low channel

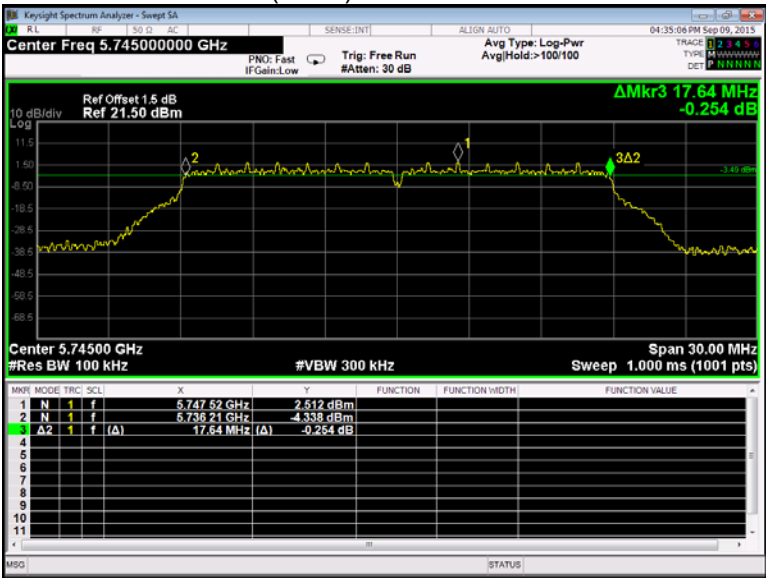


802.11ac(HT20) band IV Middle channel

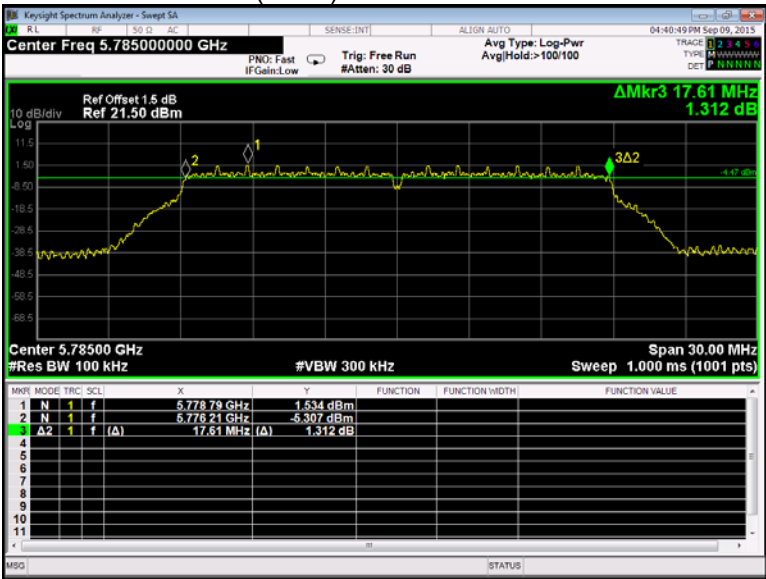


802.11ac(HT20) band IV High channel

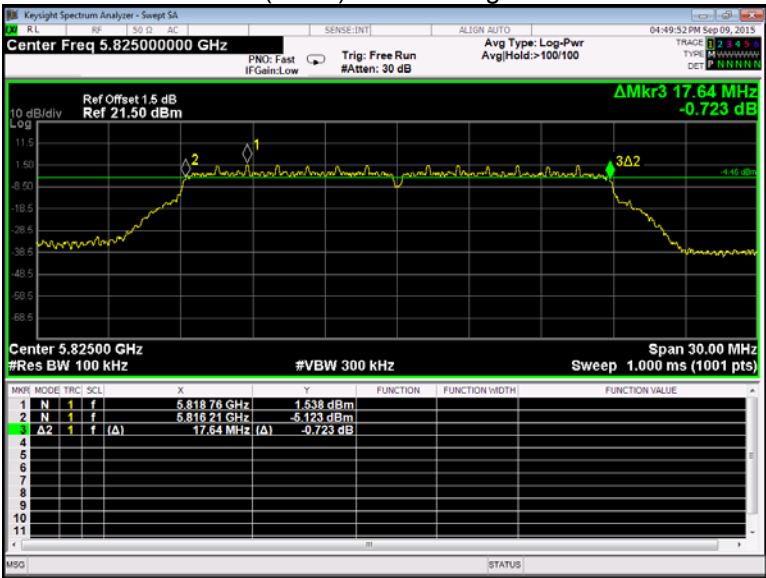


802.11ac(HT40) band IV Low channel

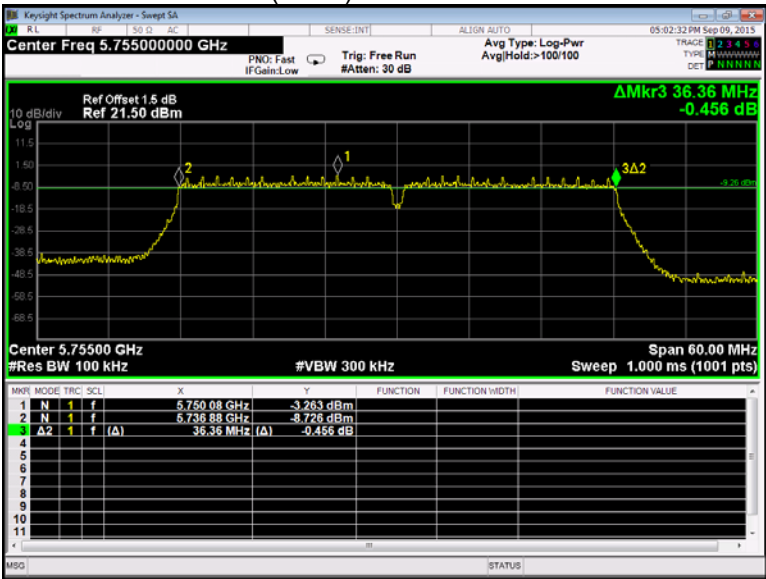

802.11n(HT40) band IV High channel

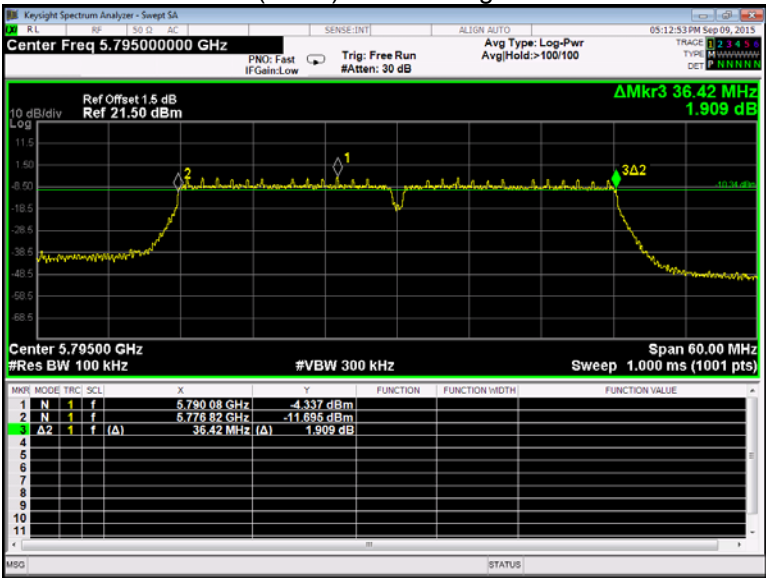

802.11ac(HT80) band IV Low channel

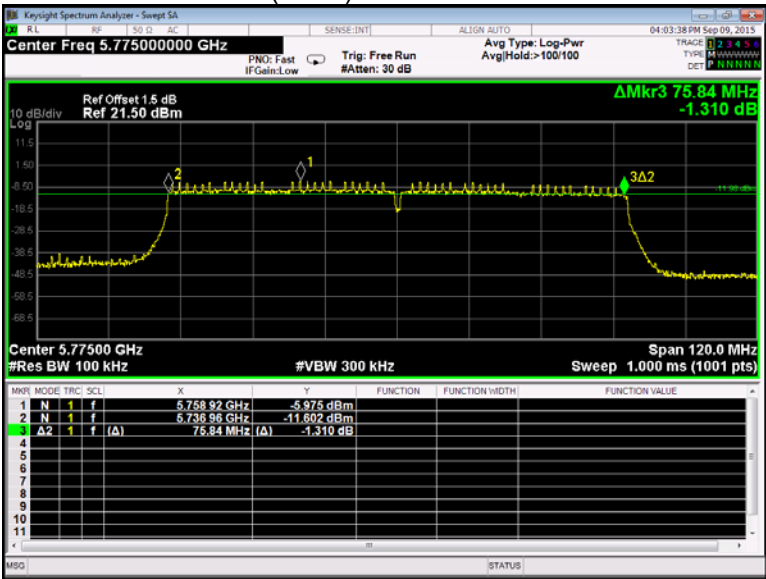

ANT1


802.11a band IV Low channel



802.11a band IV Middle channel



802.11a band IV High channel

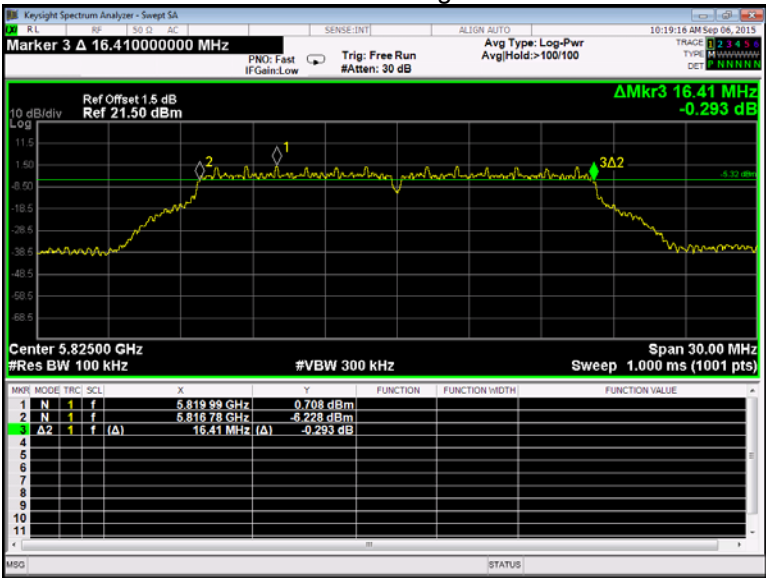

802.11n(HT20) band IV Low channel

