



TEST REPORT

APPLICANT : Fell Technology AS
PRODUCT NAME : Hub Move
MODEL NAME : W3706
BRAND NAME : Fell Technology AS
FCC ID : 2AFOZW3701
STANDARD(S) : 47 CFR Part 15 Subpart C
RECEIPT DATE : 2024-03-04
TEST DATE : 2024-06-05 to 2024-09-26
ISSUE DATE : 2025-05-12

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. The Channel Number and Frequency	4
1.4. Test Standards and Results	4
1.5. Environmental Conditions	5
2. 47 CFR Part 15C Requirements	6
2.1. Antenna Requirement	6
2.2. Bandwidth	7
2.3. Conducted Emission	10
2.4. Field Strength of Fundamental	14
2.5. Radiated Emission and Field Strength of Harmonics	16
Annex A Test Uncertainty	23
Annex B Testing Laboratory Information	24

Change History		
Version	Date	Reason for change
1.0	2025-05-12	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Fell Technology AS
Applicant Address:	Bragernes Torg 2 3017 Drammen Norway
Manufacturer:	Fell Technology AS
Manufacturer Address:	Bragernes Torg 2 3017 Drammen Norway

1.2. Equipment Under Test (EUT) Description

Product Name:	Hub Move
Sample No.:	1#, 22#, 24#
Hardware Version:	E3
Software Version:	3.5.16
Modulation Type:	2-GFSK
Operating Frequency Range:	906.5MHz-922.5MHz
Channel Number:	5
Antenna Type:	Fixed Internal Antenna
Antenna Gain:	1.40dBi

Note 1: This is a variant report of original report (Report No.: SZ22020094W03, FCC ID: 2AFOZW3701), based on the similarity between before, change the appearance and power supply method, and adjust the PCB layout accordingly. Enable GPS by software. Change the product name, model, hardware and software version information. There is no other change, in addition to the above, all other RF parameters and circuits remain the same as before. The changes only affect the results of radiated test items in this report.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. The Channel Number and Frequency

Channel	Frequency (MHz)
1	906.5
2	910.5
3	914.5
4	918.5
5	922.5

1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS _{Note1}	No deviation
2	15.215	Bandwidth	Mar. 21 2022	Zou Yuantao	PASS _{Note1}	No deviation
3	15.207	Conducted Emission	Jun. 05, 2024	Wang Deyong	PASS	No deviation
4	15.249	Field strength	Jun. 05, 2024	Wang Deyong	PASS	No deviation
5	15.209, 15.249	Radiated Emission and field strength of harmonics	Jun. 08, 2024	Li Hanbin	PASS	No deviation

Note 1: The test results of these test items in this report refer to the test report (Report No.: SZ22020094W03).

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in



the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Bandwidth

2.2.1. Requirement

Refer to FCC 15.215

2.2.2. Test Description

Test Setup:

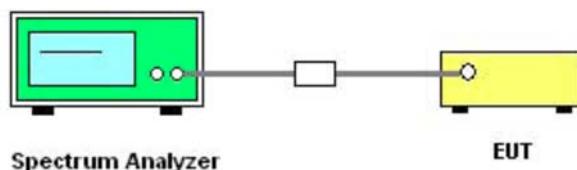

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) in the range of 1% to 5% of the measured bandwidth and video bandwidth (VBW) shall be approximately three times RBW.

2.2.3. Test Result

A. Test Verdict:

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	Result
1	906.5	102.2	PASS
3	914.5	101.6	PASS
5	922.5	101.8	PASS

B. Test Plot:


(Channel 1, 906.5MHz)



(Channel 3, 914.5MHz)



REPORT No.: SZ24020115W02



(Channel 5, 922.5MHz)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Fax: 86-755-36698525
Http://www.morlab.cn
E-mail: service@morlab.cn

2.3. Conducted Emission

2.3.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.3.2. Test Description

Test Setup:

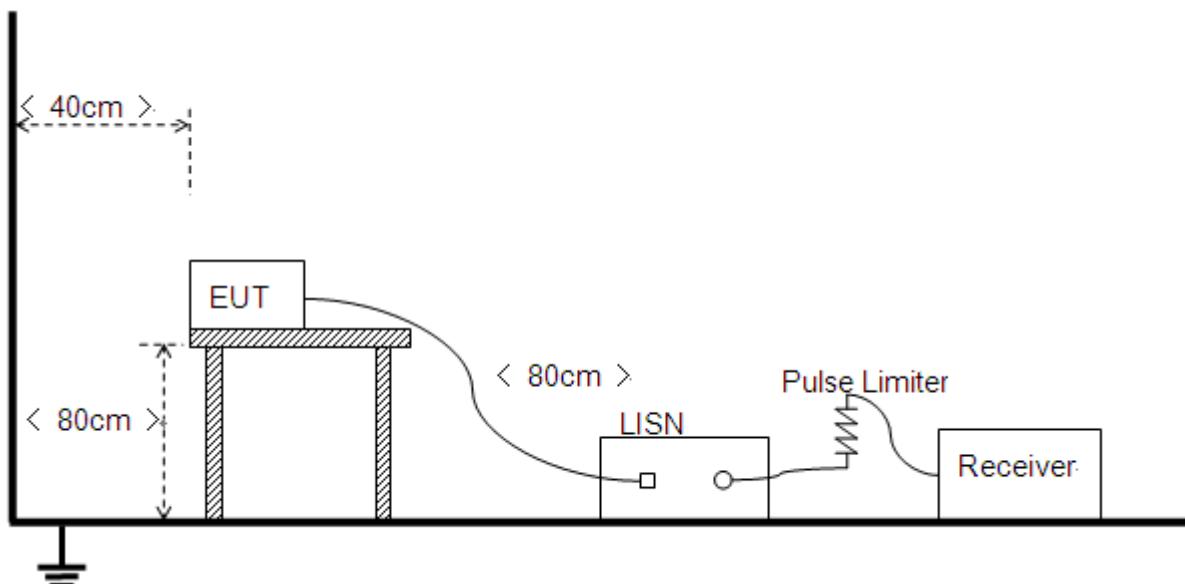

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.3.1. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + DC source + Antenna + Test board + PC + 915 TX


Test voltage: AC 120V/60Hz

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}}$$


U_R : Receiver Reading

A_{Factor} : Voltage division factor of LISN

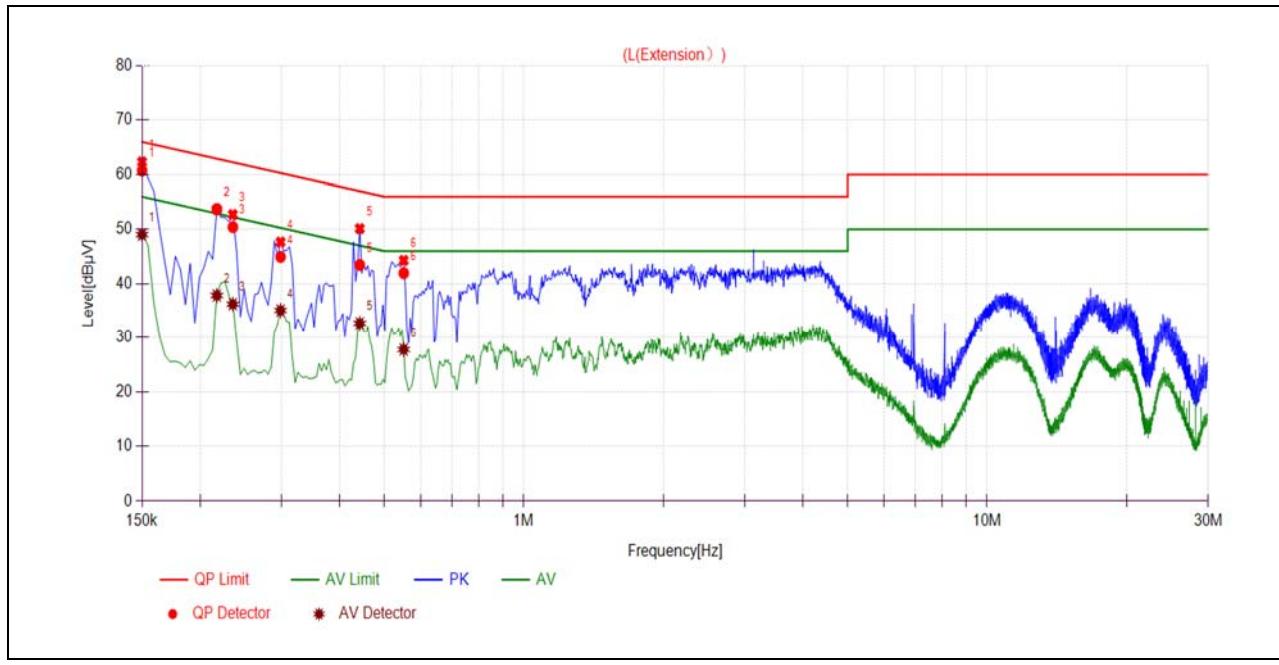B. Test Plot:


(L Phase)

No.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1500	60.73	49.05	66.00	56.00	Line	PASS
2	0.2175	53.73	37.83	62.91	52.91		PASS
3	0.2355	50.43	36.23	62.25	52.25		PASS
4	0.2985	44.95	35.05	60.28	50.28		PASS
5	0.4425	43.46	32.68	57.01	47.01		PASS
6	0.5505	41.95	27.75	56.00	46.00		PASS

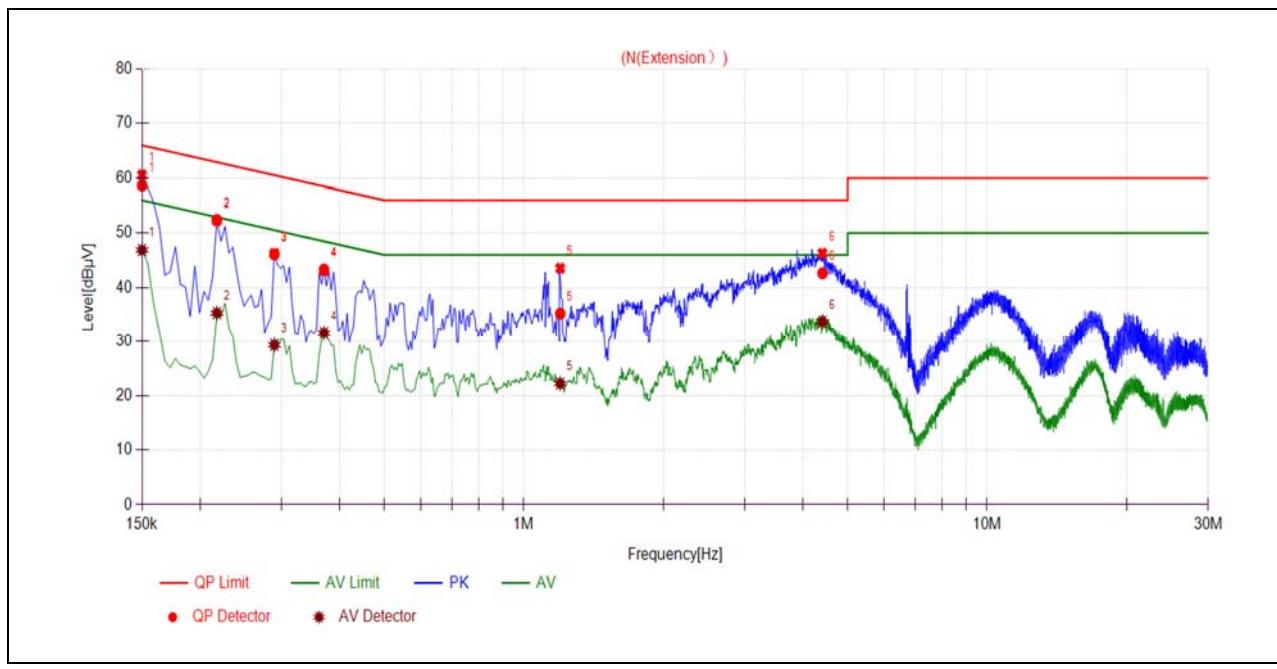

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1500	58.69	46.90	66.00	56.00	Neutral	PASS
2	0.2175	52.40	35.32	62.91	52.91		PASS
3	0.2895	46.09	29.33	60.54	50.54		PASS
4	0.3705	43.32	31.63	58.49	48.49		PASS
5	1.1985	35.23	22.19	56.00	46.00		PASS
6	4.4115	42.64	33.72	56.00	46.00		PASS

2.4. Field Strength of Fundamental


2.4.1. Requirement

According to FCC section 15.249(a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

2.4.2. Test Description

Test Setup:

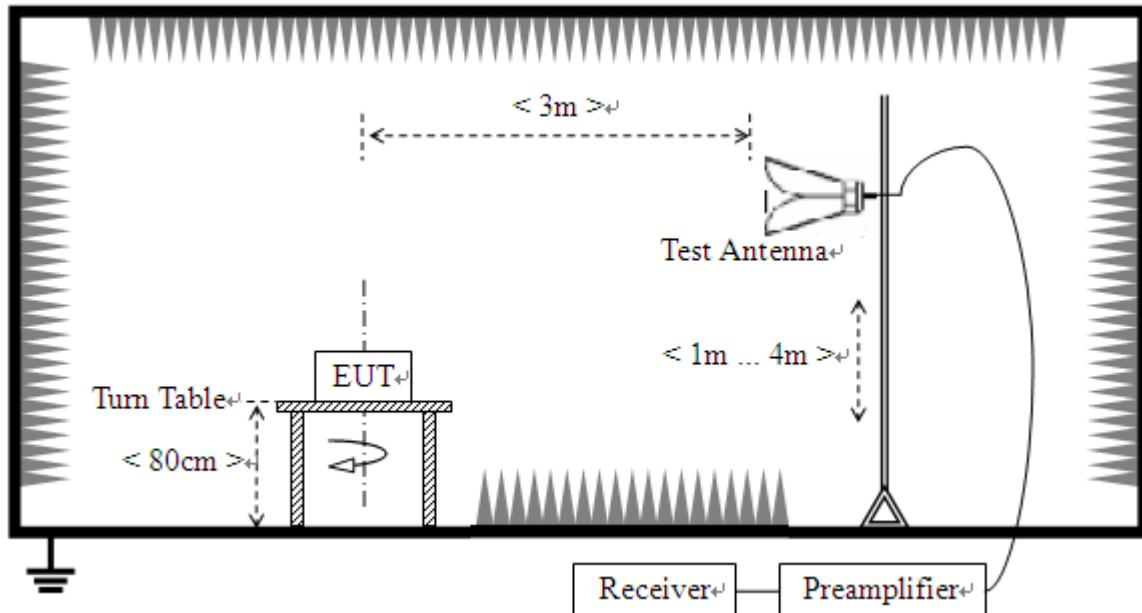

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 120 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.4.4. Test Result

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report

A. Test Verdict:

Frequency (MHz)	Detector	ANT	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	AV Limit (dB μ V/m)	Verdict
906.5	QP	H	58.62	6.75	22.20	87.57	93.97	PASS
	QP	V	52.81	6.75	22.20	81.76	93.97	PASS
914.5	QP	H	57.98	6.75	22.20	86.93	93.97	PASS
	QP	V	52.54	6.75	22.20	81.49	93.97	PASS
922.5	QP	H	56.74	6.75	22.20	85.69	93.97	PASS
	QP	V	52.36	6.75	22.20	81.31	93.97	PASS



2.5. Radiated Emission and Field Strength of Harmonics

2.5.1. Requirement

According to section 15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

According to section 15.249(d), Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)	Field Strength Limitation at 3m Measurement Distance	
			(μ V/m)	(dBuV/m)
0.009 - 0.490	2400/F(kHz)	300	10000* 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 - 1.705	24000/F(kHz)	30	100* 2400/F(KHz)	20log 2400/F(KHz) + 40
1.705 - 30.0	30	30	100*30	20log 30 + 40
30 - 88	100	3	100	20log 100
88 - 216	150	3	150	20log 150
216 - 960	200	3	200	20log 200
Above 960	500	3	500	20log 500

According to section 15.249(e), for frequencies above 1000MHz, the above field strength limits are based on average limits. The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Note:


- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level(μ V/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example: F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as $Ld1 = L1 = 30uV/m * (10)^2 = 100 * 30uV/m$


2.5.2. Test Description

A. Test Setup:


1) For radiated emissions from 9kHz to 30MHz

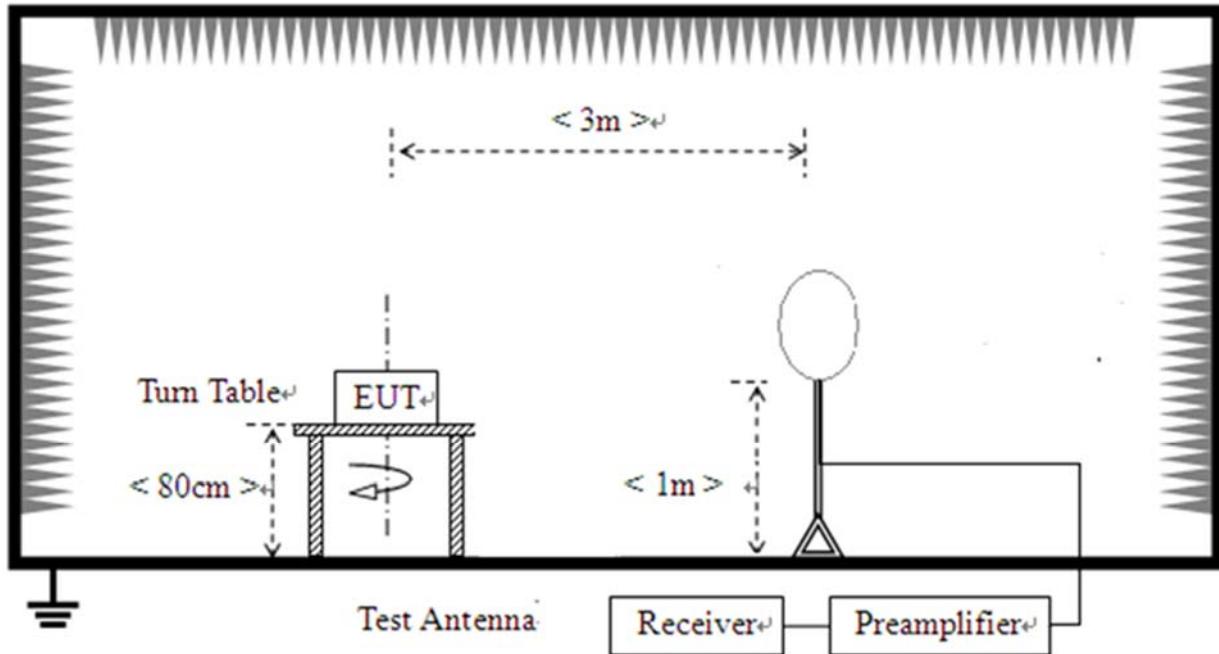

2) For radiated emissions from 30MHz to 1GHz

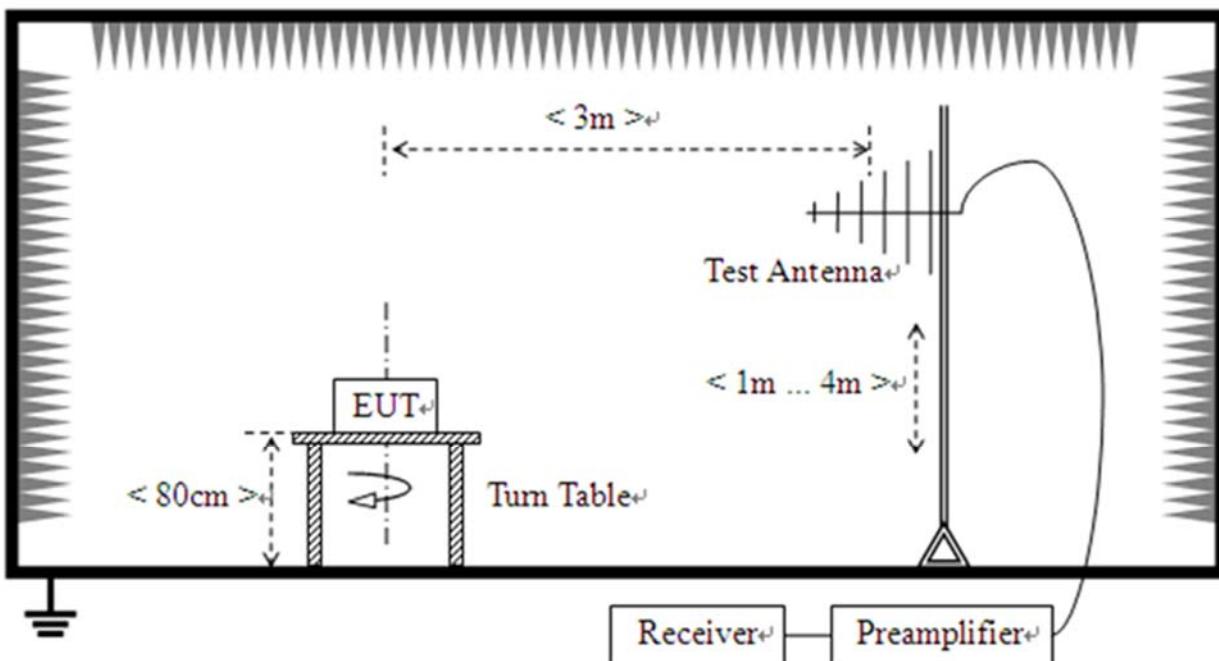

3) For radiated emissions above 1GHz

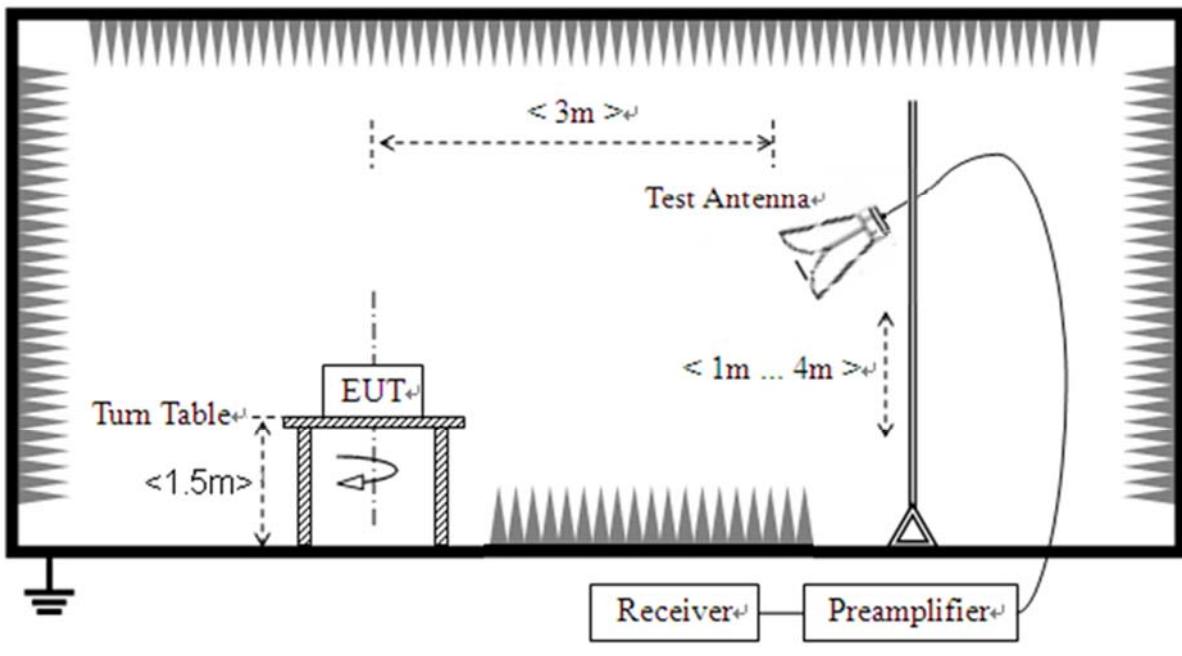

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.



2.5.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note 1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note 2: The low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


Note 3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Plot for 906.5MHz

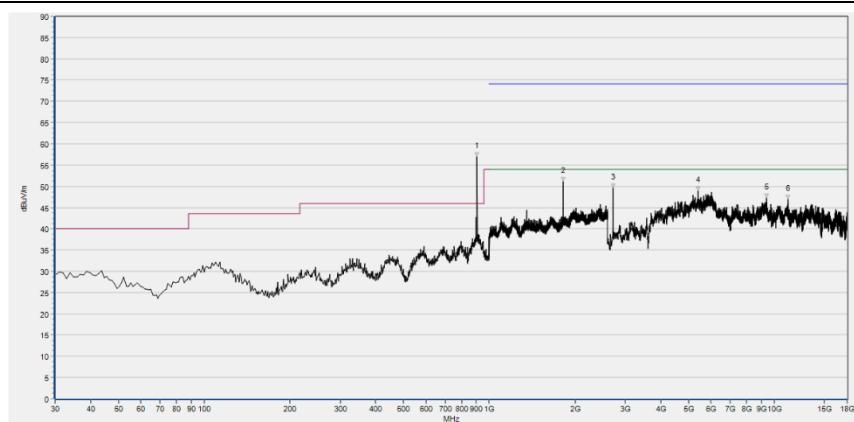

Fre. (MHz)	Pk (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
906.880	56.96	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1812.800	51.18	N/A	50.20	74.00	N/A	54.00	Horizontal	PASS
2720.120	49.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5390.480	48.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9366.760	47.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11143.920	46.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 10GHz)

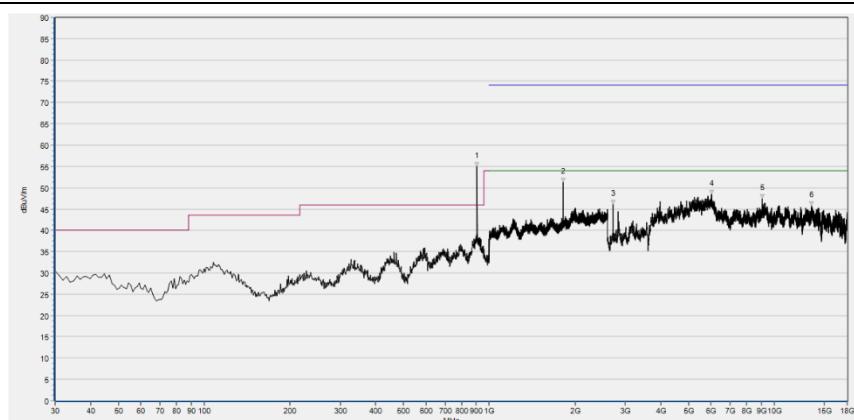

Fre. (MHz)	Pk (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
906.880	55.00	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1812.800	51.21	N/A	49.68	74.00	N/A	54.00	Vertical	PASS
2720.120	46.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6006.480	48.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9083.400	47.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13472.400	45.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 10GHz)

Plot for 914.5MHz

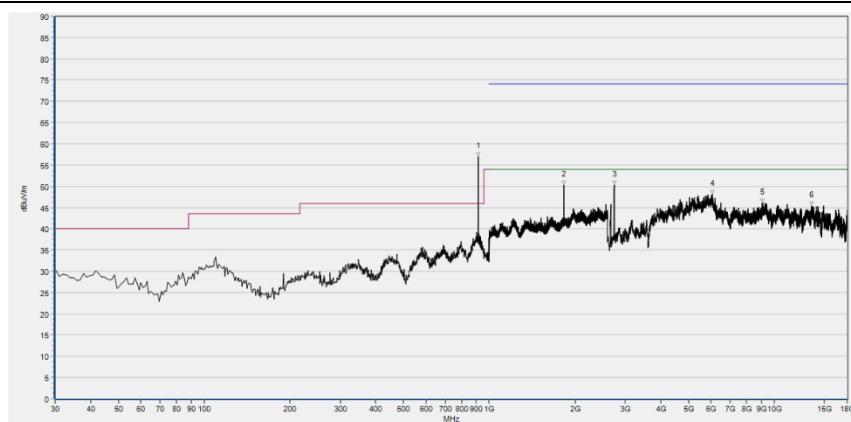

Fre. (MHz)	Pk (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
914.640	56.91	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1828.800	50.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2744.760	50.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6068.080	48.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9089.560	46.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13475.480	45.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 10GHz)

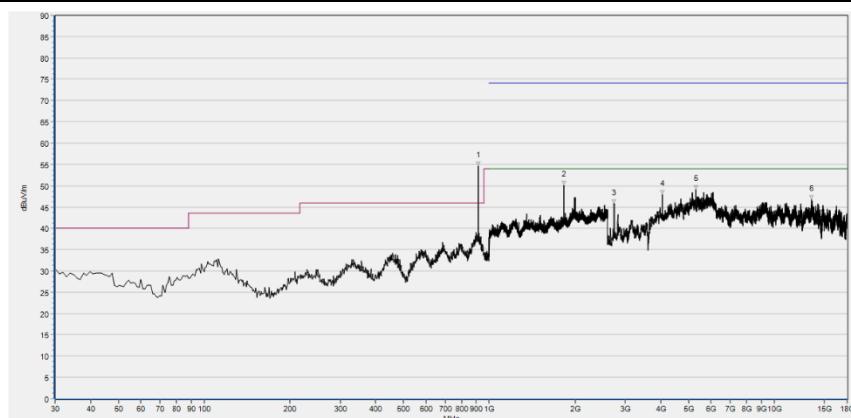

Fre. (MHz)	Pk (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
914.640	54.59	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1828.800	50.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2741.680	45.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4050.680	48.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5310.400	49.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13497.040	46.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 10GHz)

Plot for 922.5MHz



Fre. (MHz)	Pk (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
922.400	57.87	N/A	N/A	N/A	46.00	N/A	Horizontal	N/A
1844.800	49.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2766.320	50.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5797.040	48.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9089.560	46.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10968.360	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 10GHz)

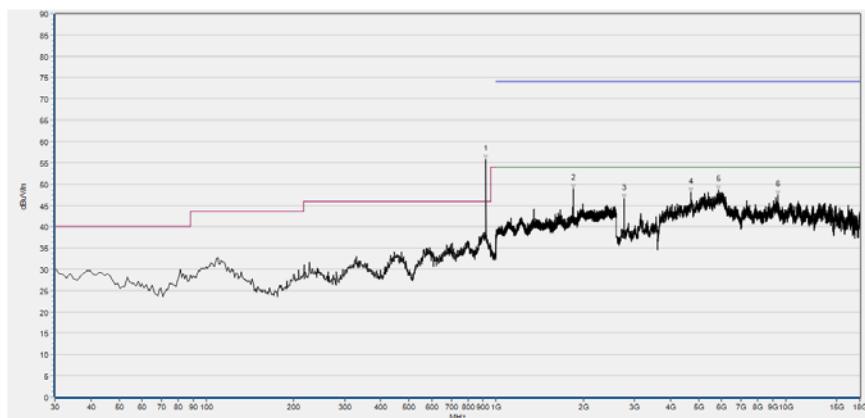

Fre. (MHz)	Pk (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
922.400	55.77	N/A	N/A	N/A	46.00	N/A	Vertical	N/A
1844.800	48.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2766.320	46.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4706.720	48.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5849.400	48.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9372.920	47.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 10GHz)



REPORT No.: SZ24020115W02

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Bandwidth	±5%
Radiated Emission	±2.95dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipment Utilized

4.1 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2024.05.30	2025.05.29
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

4.2 Radiated Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2024.05.30	2025.05.29
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop				2024.06.22	2025.06.21
Test Antenna - Horn	1519-022	FMZB1519	Schwarzbeck	2024.06.03	2025.06.02
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Horn				2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2024.07.03	2025.07.02



REPORT No.: SZ24020115W02

RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2024.07.03	2025.07.02
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09

———— END OF REPORT ————

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn