

# FCC Part 15C Test Report FCC ID: 2AFSCSK-H001B

Product Name:	Bluetooth Hat & Bluetooth Earmuffs
Trademark:	N/A
Model Name :	SK-H001B SK-H003B, SK-H004B, SK-H007B, SK-H008B, SK-H009B, SK-SK-H031B, SK-H032B, SK-H033B, SK-H034B, SK-H035B, SK-H036B, SK-H101B, SK-H103B, SK-H104B,SK-B001B, SK-B002B, SK-B003B, SK-M205B, SK-M105B
Prepared For :	Seekas Technology Co., Ltd.
Address :	2F, Building A, 5# East Zone, Shangxue Industrial Park, Bantian, Buji, Shenzhen, China, 518129
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101, Yousong Road, Longhua New District, Shenzhen, China
Test Date:	Aug. 28 - Sep. 04, 2015
Date of Report :	Sep. 04, 2015
Report No.:	BCTC-15090252



### **VERIFICATION OF COMPLIANCE**

Applicant's name:	Seekas Technology Co., Ltd.					
Address:	2F, Building A, 5# East Zone, Shangxue Industrial Park,					
Manufacturo's Namo	Bantian, Buji, Shenzhen, China, 518129 Seekas Technology Co., Ltd.					
	2F, Building A, 5# East Zone, Shangxue Industrial Park,					
Add 633	Bantian, Buji, Shenzhen, China, 518129					
Product description						
Product name:	Bluetooth Hat & Bluetooth Earmuffs					
Trademark:	N/A					
Model Name:	SK-H001B					
Test procedure	FCC Part15.249					
Standards	ANSI C63.10-2013					
	as been tested by BCTC, and the test results show that the in compliance with the FCC requirements. And it is applicable only in the report.					
·	iced except in full, without the written approval of BCTC, this vised by BCTC, personal only, and shall be noted in the revision of					
Test Result	: Pass					
Testing Engineer	Evic Yang					
	(Eric Yang)					
Technical Manager	Sophie Lu					
	(Sophia Lee)					
Authorized Signatory	ADDROVED S					

(Carson. Zhang)



**Table of Contents Page** 1. SUMMARY OF TEST RESULTS 5 1.1 TEST FACILITY 5 1.2 MEASUREMENT UNCERTAINTY 5 2. GENERAL INFORMATION 6 2.1 GENERAL DESCRIPTION OF EUT 6 2.2 DESCRIPTION OF TEST MODES 7 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 8 2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) 8 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS 9 3. EMC EMISSION TEST 9 3.1 CONDUCTED EMISSION MEASUREMENT 9 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS 10 3.1.2 TEST PROCEDURE 11 3.1.3 DEVIATION FROM TEST STANDARD 11 3.1.4 TEST SETUP 11 3.1.5 EUT OPERATING CONDITIONS 11 3.1.6 TEST RESULTS 12 3.2 RADIATED EMISSION MEASUREMENT 14 3.2.1 RADIATED EMISSION LIMITS 14 3.2.2 TEST PROCEDURE 15 3.2.3 DEVIATION FROM TEST STANDARD 15 3.2.4 TEST SETUP 16 3.2.5 EUT OPERATING CONDITIONS 17 3.2.6 TEST RESULTS 18 4. BANDWIDTH TEST 23 **4.1 APPLIED PROCEDURES / LIMIT** 23 **4.1.1 TEST PROCEDURE** 23 4.1.2 DEVIATION FROM STANDARD 23 4.1.3 TEST SETUP 23 4.1.4 EUT OPERATION CONDITIONS 23 **4.1.5 TEST RESULTS** 24 5.100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 29 **5.1 DEVIATION FROM STANDARD** 30 **5.2 TEST SETUP** 30



	Shenzhen BCTC Technology Co., Ltd.	Report No.: BCTC-15090252
Table of Contents		Page
5.3 EUT OPERA 5.4 TEST RESU	ATION CONDITIONS ILTS	30 30
6 . ANTENNA REQU	IREMENT	31
6.1 STANDARD RE	EQUIREMENT	31
6.2 EUT ANTENNA	<b>A</b>	31
7 . EUT TEST PHOT	0	32
O FUT DUOTO		24



### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C					
Standard Section	Test Item	Judgment	Remark		
15.207	Conducted Emission	PASS			
15.249	Fundamental &Radiated Spurious Emission Measurement	PASS			
15.249	Bandwidth	PASS			
15.205	Band Edge Emission	PASS			
15.203	Antenna Requirement	PASS			

### NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

### 1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registration No.:187086

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $\mathbf{y} \pm \mathbf{U}$ , where expended uncertainty  $\mathbf{U}$  is based on a standard uncertainty multiplied by a coverage factor of  $\mathbf{k=2}$ , providing a level of confidence of approximately 95 %  $^{\circ}$ 

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%



### 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth Hat & Bluetooth Earmuffs			
Trade Name	N/A			
Model Name	SK-H001B			
	SK-H003B, SK-H004B, SK-H007B, SK-H008B, SK-H009B,			
Serial Model	SK-SK-H031B, SK-H032B, SK-H033B, SK-H034B, SK-H035B,			
Seriai Model	SK-H036B, SK-H101B, SK-H103B, SK-H104B,SK-B001B,			
	SK-B002B, SK-B003B,SK-M205B, SK-M105B			
Model Difference	All the same,Only model name is different.			
Product Description	Operation Frequency: 2402~2480 MHz Modulation Type: GFSK,PI/4 DPSK,8DPSK Bit Rate of Transmitter 1M/2M/3Mbps Number Of Channel 79 CH Antenna Designation: Please see Note 3.  Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.			
Channel List	Please refer to the Note 2.			
Adapter	N/A			
Battery	DC 3.7V			
Connecting I/O Port(s)	Please refer to the User's Manual			
hardware version				
Software version				
Serial number				

### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462

**FCC Report** 

Tel: 400-788-9558 0755-33019988

Web:Http//www.bctc-lab.com



Shenzhen BCTC Technology Co., Ltd. Report No.: BCTC-15090252

07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	N/A	0	

### 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type	
Mode 1	CH00		
Mode 2	CH39	GFSK,PI/4 DPSK,8DPSK	
Mode 3	CH78		
Mode 4	Link mode(conducted emission and Radiated emission)		

### Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test



### 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Shenzhen BCTC Technology Co., Ltd.


Frequency	2402 MHz	2441 MHz	2480 MHz
Channel	Low	Middle	High

### 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

E-1 EUT

Conducted Emission Test



### 2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Bluetooth Hat &	N/A	SK-H001B	N/A	EUT
E-2	Notebook	N/A	X550C	N/A	
E-3	Adapter	N/A	AD887520	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	
C2	NO	NO	1.5M	

### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length\_"</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



### 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Test equipment

00.10	Kind of				1	Calibratad	Calibratia
Item	Kind of	Manufactu	Type No.	Serial No.	Last	Calibrated	Calibratio
ItCIII	Equipment	rer	Type IVO.	Ochai ivo.	calibration	until	n period
1	Test Receiver	R&S	ESCI	1166.5950K 03-101165-	2015.06.06	2016.06.05	1 year
	1000110001101	1100	200.	ha	2010.00.00	2010.00.00	. you.
2	LISN	R&S	NSLK81	812646	2015.08.24	2016.08.23	1 year
	LIOIV	Nao	26	6	2013.00.24	2010.00.20	i yeai
3	LISN	R&S	NSLK81	812648	2015.08.24	2016.08.23	1 year
	21011	1100	26	7	2010.00.21	2010.00.20	ı you
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 7	2015.06.07	2016.06.06	1 year
5	RF cables	R&S	R204	R20X	2015.07.06	2016.07.05	1 year

Radiation test, Band-edge test and 20db bandwith test quipment

Radia	Radiation test, Band-edge test and 200b bandwith test quipment							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibratio n period	
1	Spectrum Analyzer	Agilent	E4407B	MY4510804 0	2015.07.06	2016.07.05	1 year	
2	Test Receiver	R&S	ESPI	101318	2015.06.07	2016.06.06	1 year	
3	Bilog Antenna	R&S	VULB 9168	VULB91 68-438	2015.07.06	2016.07.05	1 year	
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 6	2015.06.07	2016.06.06	1 year	
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2015.06.07	2016.06.06	1 year	
6	Horn Antenna	R&S	HF906	10027	2015.07.06	2016.07.05	1 year	
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05	1 year	
8	Amplifier	R&S	BBV9743	9743-01 9	2014.12.22	2015.12.21	1 year	
9	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.08	2016.06.07	1 year	
10	RF cables	R&S	R203	R20X	2015.07.06	2016.07.05	1 year	
11	Antenna connector	Florida RFLa bs	Lab-Fle	RF 01#	2015.07.06	2016.07.05	1 year	

### 3. EMC EMISSION TEST

### 3.1 CONDUCTED EMISSION MEASUREMENT



### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard	
FREQUENCY (MIDZ)	Quasi-peak	Average	Quas -peak	Average	Standard	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR	
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR	
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR	

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

### Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




#### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

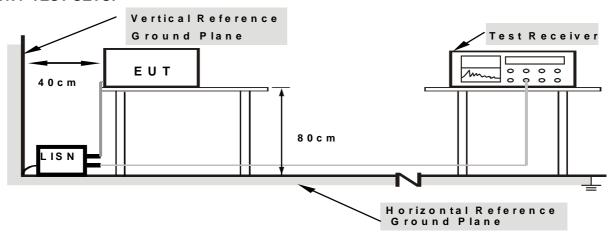

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.




### 3.1.6 TEST RESULTS

I-UI .	Bluetooth Hat & Bluetooth Earmuffs	Model Name :	SK-H001B
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC120V from laptop	Test Mode:	Mode 1(Worst Mode)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Detector Type
0.1780	43.27	10.06	53.33	64.57	-11.24	QP
0.1780	23.96	10.06	34.02	54.57	-20.55	AVG
0.6060	24.36	10.13	34.49	56.00	-21.51	QP
0.6060	17.95	10.13	28.08	46.00	-17.92	AVG
1.6180	14.18	10.18	24.36	56.00	-31.64	QP
1.6180	5.42	10.18	15.60	46.00	-30.40	AVG
4.1260	20.63	10.16	30.79	56.00	-25.21	QP
4.1260	10.45	10.16	20.61	46.00	-25.39	AVG
13.6180	37.99	10.14	48.13	60.00	-11.87	QP
13.6180	28.63	10.14	38.77	50.00	-11.23	AVG
26.6620	18.91	10.21	29.12	60.00	-30.88	QP
26.6620	10.69	10.21	20.90	50.00	-29.10	AVG

### Remark:

- 1. All readings are Quasi-Peak and Average values.

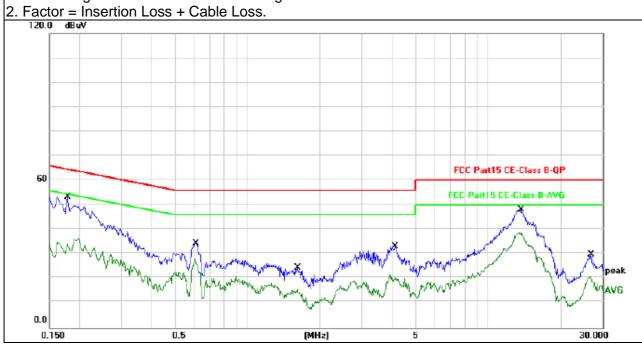




FUI.	Bluetooth Hat & Bluetooth Earmuffs	Model Name :	SK-H001B
Temperature:	<b>26</b> ℃	Relative Humidity:	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V from laptop	Test Mode:	Mode 1(Worst Mode)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Time
(MHz)	(dBµV)	(dB)	(dBµV)	(dBµV)	(dB)	Detector Type
0.1500	44.11	10.05	54.16	65.99	-11.83	QP
0.1500	30.94	10.05	40.99	55.99	-15.00	AVG
0.3100	27.60	10.09	37.69	59.97	-22.28	QP
0.3100	15.60	10.09	25.69	49.97	-24.28	AVG
0.5940	24.99	10.12	35.11	56.00	-20.89	QP
0.5940	17.65	10.12	27.77	46.00	-18.23	AVG
2.2740	12.50	10.18	22.68	56.00	-33.32	QP
2.2740	0.55	10.18	10.73	46.00	-35.27	AVG
3.9940	25.98	10.16	36.14	56.00	-19.86	QP
3.9940	14.08	10.16	24.24	46.00	-21.76	AVG
13.4460	35.41	10.14	45.55	60.00	-14.45	QP
13.4460	26.05	10.14	36.19	50.00	-13.81	AVG

### Remark:



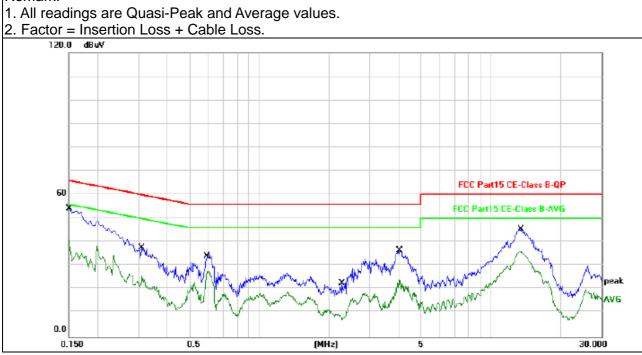



### 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)		
PREQUENCY (MINZ)	PEAK	AVERAGE	
Above 1000	74	54	

### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	1000 MHz	
Stop Frequency	10th carrier harmonic	
RB / VB (emission in restricted	4 Mile / 4 Mile for Dools 4 Mile / 40He for Average	
band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average	

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 1.5 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
  - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


### 3.2.3 DEVIATION FROM TEST STANDARD

No deviation




### 3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

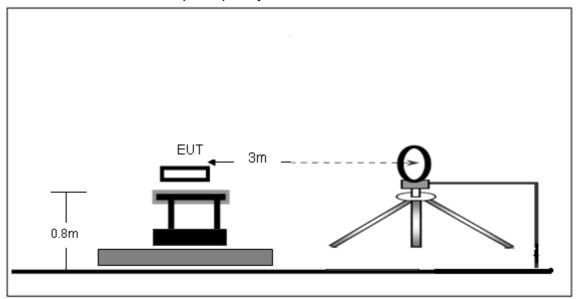


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

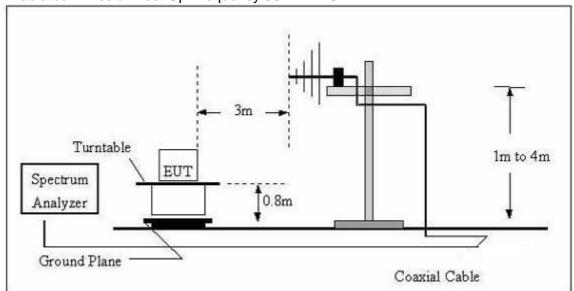



### (C) Radiated Emission Test-Up Frequency Above 1GHz

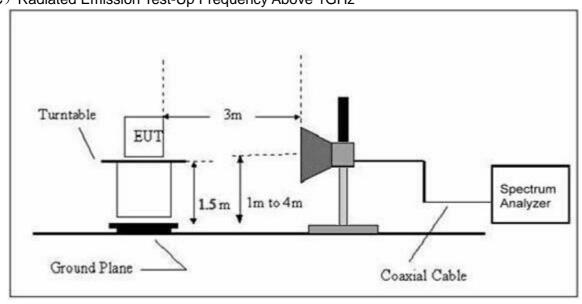

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.6 TEST RESULTS

Radiated Spurious Emission (Below 30MHz)

EUT:	Bluetooth Hat & Bluetooth Earmuffs	Model Name :	SK-H001B
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Polarization:	
Test Voltage :	DC3.7V		
Test Mode :	TX		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
				PASS

### NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



### Radiated Spurious Emission (Between 30MHz - 1GHz)


EUT:	Bluetooth Hat & Bluetooth Earmuffs	Model Name :	SK-H001B
Temperature :	26 ℃	Relative Humidity:	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	By Battery		
Test Mode : (Worst)	TX Low Channel		

Shenzhen BCTC Technology Co., Ltd.

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
53.8818	32.16	-10.93	21.23	40.00	-18.77	QP
71.8320	32.38	-15.19	17.19	40.00	-22.81	QP
166.0680	40.83	-13.23	27.60	43.50	-15.90	QP
233.3487	44.39	-14.87	29.52	46.00	-16.48	QP
324.4561	44.12	-11.95	32.17	46.00	-13.83	QP
584.7895	32.04	-6.15	25.89	46.00	-20.11	QP

### Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All interfaces was connected, and BT TX mode was link.

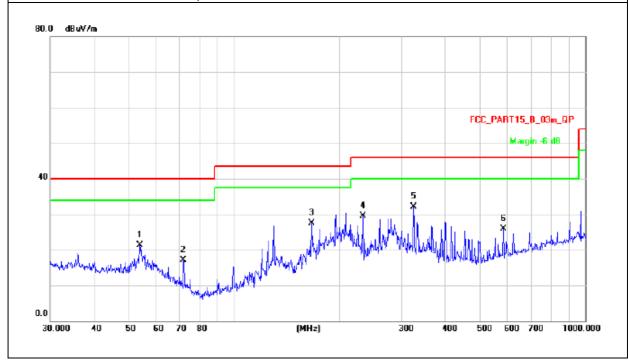




EUT:	Bluetooth Hat & Bluetooth Earmuffs	Model Name :	SK-H001B
Temperature:	26 ℃	Relative Humidity:	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC3.7V		
Test Mode : (Worst)	TX Low Channel		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
72.0843	31.99	-15.28	16.71	40.00	-23.29	QP
129.9226	33.50	-14.11	19.39	43.50	-24.11	QP
197.2001	38.20	-16.04	22.16	43.50	-21.34	QP
324.4561	33.32	-11.95	21.37	46.00	-24.63	QP
554.8254	37.93	-6.96	30.97	46.00	-15.03	QP
972.3374	30.59	-0.39	30.20	54.00	-23.80	QP

### Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All interfaces was connected, and BT TX mode was link.

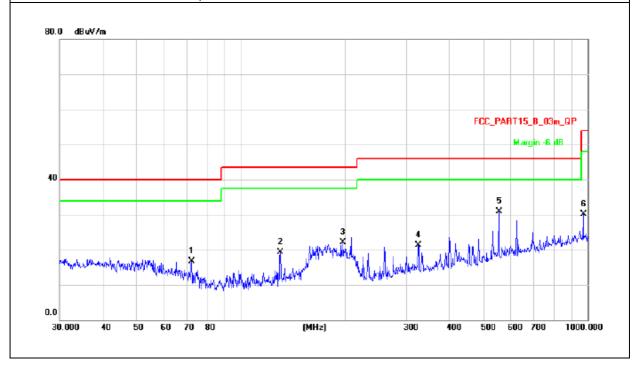



Shenzhen BCTC Technology Co., Ltd.

# Radiated Spurious Emission ( 1GHz to $10^{\text{th}}$ harmonics) GFSK

	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Result
	(MHz)	(dBµV)	(PK/QP/Ave)	(H/V)	(dB)	(dBµV/m)	(dBµV/m)	
	2402	100.05	PK	Н	1.31	101.36	114	Pass
	2402	87.62	Ave	Н	1.31	88.93	94	Pass
Lower Channel	4804	55.82	PK	Н	-1.06	54.76	74	Pass
2402MHz	4804	47.55	Ave	Н	-1.06	46.49	54	Pass
	2402	101.21	PK	V	1.31	102.52	114	Pass
	2402	87.56	Ave	V	1.31	88.87	94	Pass
	4804	57.26	PK	V	-1.06	56.2	74	Pass
	4804	46.85	Ave	V	-1.06	45.79	54	Pass
	2441	101.23	PK	Н	0.85	102.08	114	Pass
	2441	87.84	Ave	Н	0.85	88.69	94	Pass
	4882	54.59	PK	Н	-0.62	53.97	74	Pass
Middle	4882	45.37	Ave	Н	-0.62	44.75	54	Pass
Channel 2441MHz	2441	102.12	PK	V	0.85	102.97	114	Pass
	2441	88.21	Ave	V	0.85	89.06	94	Pass
	4882	53.97	PK	V	-0.62	53.35	74	Pass
	4882	45.86	Ave	V	-0.62	45.24	54	Pass
	2480	102.03	PK	Н	0.53	102.56	114	Pass
	2480	87.68	Ave	Н	0.53	88.21	94	Pass
	4960	54.34	PK	Н	-0.24	54.1	74	Pass
Upper	4960	44.23	Ave	Н	-0.24	43.99	54	Pass
Channel 2480MHz	2480	101.46	PK	V	0.53	101.99	114	Pass
	2480	87.07	Ave	V	0.53	87.6	94	Pass
	4960	54.36	PK	V	-0.24	54.12	74	Pass
	4960	45.22	Ave	V	-0.24	44.98	54	Pass

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.





### 8DPSK

8DP3K	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Result
	(MHz)	(dBµV)	(PK/QP/Ave)	(H/V)	(dB)	(dBµV/m)	(dBµV/m)	rtoouit
 	2402.00	101.14	PK	Н	1.31	102.45	114	Pass
	2402.00	87.68	Ave	Н	1.31	88.99	94	Pass
Lower Channel 2402MHz	4804.00	55.45	PK	Н	-1.06	54.39	74	Pass
2402MHz	4804.00	47.78	Ave	Н	-1.06	46.72	54	Pass
	2402.00	100.81	PK	V	1.31	102.12	114	Pass
	2402.00	86.77	Ave	V	1.31	88.08	94	Pass
	4804.00	56.29	PK	V	-1.06	55.23	74	Pass
	4804.00	46.56	Ave	V	-1.06	45.5	54	Pass
	2441.00	101.23	PK	Н	0.85	102.08	114	Pass
	2441.00	87.84	Ave	Н	0.85	88.69	94	Pass
	4882.00	54.59	PK	Н	-0.62	53.97	74	Pass
Middle Channel	4882.00	45.37	Ave	Н	-0.62	44.75	54	Pass
2441MHz	2441.00	102.12	PK	V	0.85	102.97	114	Pass
	2441.00	88.21	Ave	V	0.85	89.06	94	Pass
	4882.00	53.97	PK	V	-0.62	53.35	74	Pass
	4882.00	44.54	Ave	V	-0.62	43.92	54	Pass
	2480.00	101.91	PK	Н	0.53	102.44	114	Pass
	2480.00	87.37	Ave	Н	0.53	87.9	94	Pass
	4960.00	54.54	PK	Н	-0.24	54.3	74	Pass
Upper	4960.00	44.72	Ave	Н	-0.24	44.48	54	Pass
Channel 2480MHz	2480.00	101.32	PK	V	0.53	101.85	114	Pass
	2480.00	88.24	Ave	V	0.53	88.77	94	Pass
	4960.00	54.78	PK	V	-0.24	54.54	74	Pass
	4960.00	45.69	Ave	V	-0.24	45.45	54	Pass

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



### 4. BANDWIDTH TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C								
Section	Test Item	Frequency Range (MHz)	Result					
15.249	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS				


Spectrum Parameter	Setting	
Attenuation	Auto	
Span Frequency > Measurement Bandwidth or Channel Separation		
RB	30KHz	
VB	≥RBW	
Detector	Peak	
Trace	Max Hold	
Sweep Time	Auto	

### 4.1.1 TEST PROCEDURE

### 4.1.2 DEVIATION FROM STANDARD

No deviation.

### 4.1.3 TEST SETUP



### **4.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b. Spectrum Setting : RBW= 100KHz, VBW≥ RBW, Sweep time = Auto.



### 4.1.5 TEST RESULTS


<b> -</b>	Bluetooth Hat & Bluetooth Earmuffs	Model Name :	SK-H001B
Temperature :	<b>25</b> ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC3.7V
Test Mode :	CH00 / CH39 /C78		

	Frequency	20dB Bandwidth (kHz)	Result	
GFSK	2402 MHz	705.875	PASS	
	2441 MHz	722.859	PASS	
	2480 MHz	734.523	PASS	
PI/4 DPSK	2402 MHz	1.121	PASS	
	2441 MHz	1.102	PASS	
	2480 MHz	1.132	PASS	
8DPSK	2402 MHz	1.135	PASS	
	2441 MHz	1.090	PASS	
	2480 MHz	1.129	PASS	




### **GFSK**



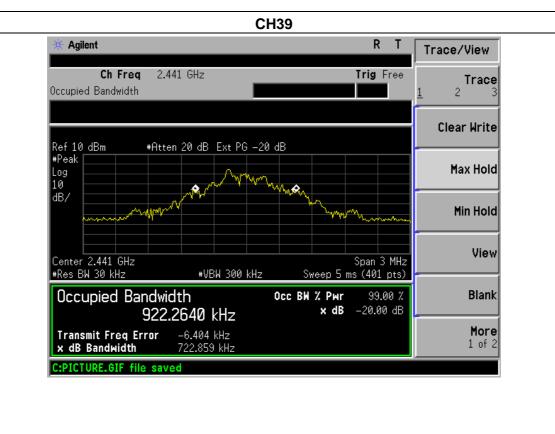



Shenzhen BCTC Technology Co., Ltd.

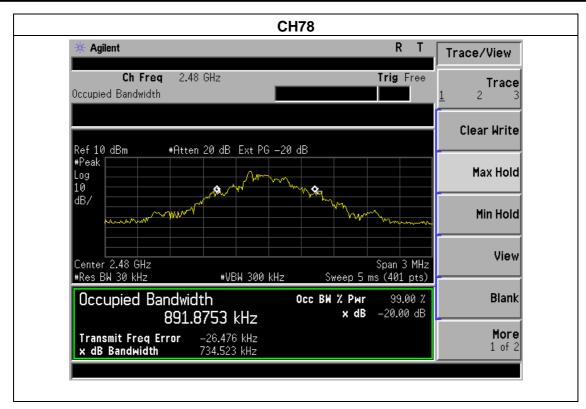




### 8DPSK





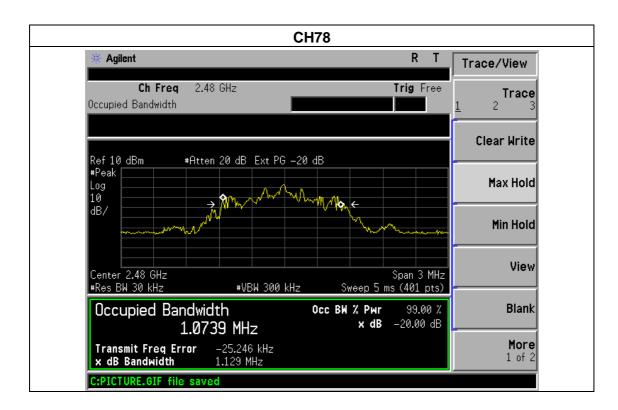

Shenzhen BCTC Technology Co., Ltd.



## 5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **TEST PROCEDURE**

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 1.5 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
  - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
  - The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



### 5.1 DEVIATION FROM STANDARD

No deviation.

### **5.2 TEST SETUP**

### 5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### **5.4 TEST RESULTS**

IFUI :	Bluetooth Hat & Bluetooth Earmuffs	Model Name :	SK-H001B
Temperature:	<b>25</b> ℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC3.7V
Test Mode :	CH00/ CH78		

		Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m) PK	Band ed (dBu)	_	Result Pass
		<2400	Н	49.53	74.00	54.00	Pass
GFSK	Hopping	<2400	V	48.60	74.00	54.00	Pass
		>2483.5	Н	49.41	74.00	54.00	Pass
		>2483.5	V	48.80	74.00	54.00	Pass
GFSK		<2400	Н	49.73	74.00	54.00	Pass
	Unhopping	<2400	V	48.37	74.00	54.00	Pass
		>2483.5	Н	49.91	74.00	54.00	Pass
		>2483.5	V	48.42	74.00	54.00	Pass
8DPSK	Hopping	<2400	Н	49.61	74.00	54.00	Pass
		<2400	V	48.38	74.00	54.00	Pass
		>2483.5	Н	49.48	74.00	54.00	Pass
		>2483.5	V	48.53	74.00	54.00	Pass
	Unhopping .	<2400	Н	49.18	74.00	54.00	Pass
		<2400	V	48.57	74.00	54.00	Pass
		>2483.5	Н	49.63	74.00	54.00	Pass
		>2483.5	V	48.32	74.00	54.00	Pass

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



### **6. ANTENNA REQUIREMENT**

### **6.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


### **6.2 EUT ANTENNA**


The EUT antenna is PCB antenna. It complies with the standard requirement.



### 7. EUT TEST PHOTO



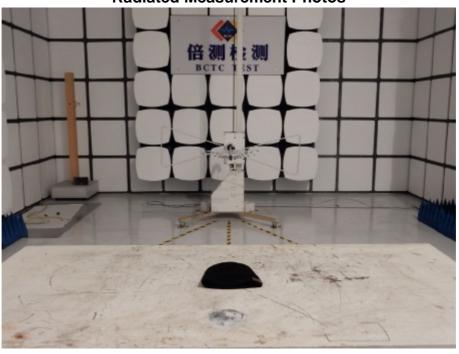

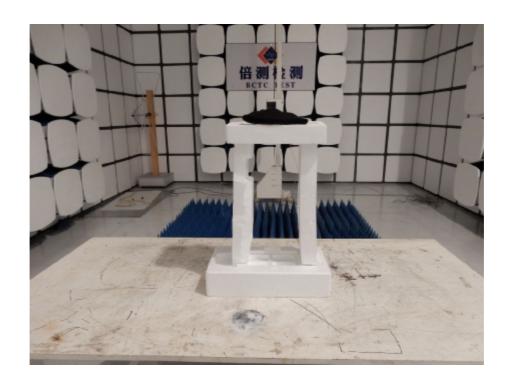









### 8. EUT PHOTO





\*\*\* \*\* END OF REPORT \*\*\*\*