

FCC

SAR

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
handset

ISSUED TO
HIPAD INTELLIGENT TECHNOLOGY COMPANY LIMITED

NO.2366 ChangXi Avenue Economic -Technological Development Area
NanChang Jiangxi.



Tested by: Tu Lang
Tu Lang
(Engineer)

Date Oct. 9, 2015

Approved by: Wei Yanguan
Wei Yanguan
(Chief Engineer)

Date Oct. 9, 2015

Report No.: BL-SZ1590048-701

EUT Type: handset

Model Name: E3240

Brand Name: movilnet

FCC ID: 2AFSPE3240

Test Standard: FCC 47 CFR Part 2.1093

ANSI C95.1: 1992

IEEE 1528: 2013

Maximum SAR: Head (1 g): 0.138 W/kg

Body (1 g): 0.474 W/kg

Test Conclusion: Pass

Test Date: Sep. 22, 2015

Date of Issue: Oct. 9, 2015

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Sep. 30, 2015</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Oct. 9, 2015</u>	<u>Second Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION.....	4
1.1 Identification of the Testing Laboratory.....	4
1.2 Identification of the Responsible Testing Location.....	4
1.3 Test Environment Condition.....	4
1.4 Announce.....	5
2 PRODUCT INFORMATION.....	6
2.1 Applicant.....	6
2.2 Manufacturer.....	6
2.3 Factory Information.....	6
2.4 General Description for Equipment under Test (EUT).....	6
2.5 Ancillary Equipment.....	7
2.6 Technical Information.....	7
3 SUMMARY OF TEST RESULT.....	8
3.1 Test Standards.....	8
3.2 Device Category and SAR Limit.....	8
3.3 Test Result Summary.....	10
3.4 Test Uncertainty.....	11
4 MEASUREMENT SYSTEM.....	15
4.1 Specific Absorption Rate (SAR) Definition.....	15
4.2 DASY SAR System.....	16
5 SYSTEM VERIFICATION.....	23
5.1 Purpose of System Check.....	23
5.2 System Check Setup.....	23
6 TEST POSITION CONFIGURATIONS.....	24
6.1 Head Exposure Conditions.....	24
6.2 Body-worn Position Conditions.....	26
6.3 Hotspot Mode Exposure Position Conditions.....	27

7 MEASUREMENT PROCEDURE.....	28
7.1 Measurement Process Diagram.....	28
7.2 SAR Scan General Requirement.....	29
7.3 Measurement Procedure.....	30
7.4 Area & Zoom Scan Procedure.....	30
8 CONDUCTED RF OUPUT POWER.....	31
9 TEST EXCLUSION CONSIDERATION.....	32
9.1 SAR Test Exclusion Consideration Table.....	33
9.2 10g Extremity Exposure Consideration.....	34
10 TEST RESULT.....	35
10.1 Head SAR (1 g Value).....	35
10.2 Body-worn SAR (10mm Separation).....	36
10.3 SAR Measurement Variability.....	37
11 SIMULTANEOUS TRANSMISSION.....	38
11.1 Simultaneous Transmission Mode Consideration.....	38
11.2 Estimated SAR Calculation.....	38
11.3 Sum SAR of Simultaneous Transmission.....	39
12 TEST EQUIPMENTS LIST.....	40
ANNEX A SIMULATING LIQUID VERIFICA TIONRESULT.....	41
ANNEX B SYSTEM CHECK RESULT.....	42
ANNEX C TEST DATA.....	45
ANNEX D EUT EXTERNAL PHOTOS.....	59
ANNEX E SAR TEST SETUP PHOTOS.....	59
ANNEX F CALIBRATION REPORT.....	60
F.1 E-Field Probe.....	60
F.2 Data Acquisition Electronics.....	71
F.3 835MHz Dipole.....	76

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China.
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China.
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625. The laboratory has met the requirements of the IAS Accreditation Criteria for Testing Laboratories (AC89), has demonstrated compliance with ISO/IEC Standard 17025:2005. The accreditation certificate number is TL-588. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Test Environment Condition

Ambient Temperature	21 to 23℃
Ambient Relative Humidity	40 to 50%
Ambient Pressure	100 to 102KPa

1.4 Announce

- (1) The test report reference to the report template version v1.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant

Applicant	HIPAD INTELLIGENT TECHNOLOGY COMPANY LIMITED
Address	NO.2366 ChangXi Avenue Economic -Technological Development Area NanChang Jiangxi.

2.2 Manufacturer

Manufacturer	HIPAD INTELLIGENT TECHNOLOGY COMPANY LIMITED
Address	NO.2366 ChangXi Avenue Economic -Technological Development Area NanChang Jiangxi.

2.3 Factory Information

Factory	HIPAD INTELLIGENT TECHNOLOGY COMPANY LIMITED
Address	NO.2366 ChangXi Avenue Economic -Technological Development Area NanChang Jiangxi.

2.4 General Description for Equipment under Test (EUT)

EUT Type	handset
EUT Model Name Under Test	E3240
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	SP
Software Version	E3240-S052
Dimensions (Approx)	112 × 60 × 11 mm
Weight (Approx)	92.4 g (with battery)
Network and Wireless connectivity	3G Network CDMA BC0, EVDO; Bluetooth

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	movilnet
	Model No.	BL-5C
	Serial No.	N/A
	Capacitance	1000 mAh
	Rated Voltage	3.7 V
	Limit Charge Voltage	4.2 V
Ancillary Equipment 2	Charger	
	Brand Name	movilnet
	Model No.	NBT-005A-173C
	Serial No.	N/A
	Rated Input	100-300 V~, 0.15 A, 50/60 Hz
	Rated Output	5 V=, 0.5 A
Ancillary Equipment 3	Earphone	
	Length (Approx)	1.2 m
Ancillary Equipment 4	USB Data Cable	
	Length (Approx)	1.0 m

2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	CDMA BC 0; Bluetooth		
Frequency Range	CDMA BC 0	TX: 824 MHz ~ 849 MHz	RX: 869 MHz ~ 894 MHz
	Bluetooth	2400 MHz~2483.5 MHz	
DTM	Not Support		
Hotspot Function	Not Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	☒ Production unit		☐ Identical prototype

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v05r02	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 941225 D01 v03	3G SAR MEAUREMENT PROCEDURES
6	FCC KDB 941225 D05 v02r03	SAR Evaluation Considerations for LTE Devices
7	FCC KDB 941225 D06 v01r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
8	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
9	FCC KDB 865664 D02 v01r01	RF Exposure Reporting
10	FCC KDB 648474 D04 v01r02	SAR Evaluation Considerations for Wireless Handsets

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

Position	Band	Maximum Report SAR (W/kg)	Limit (W/kg)	Verdict
Head	CDMA BC0	0.138	1.6	Pass
Body-worn	CDMA BC0	0.474	1.6	Pass

3.3.2 Highest Simultaneous SAR

Position	Simultaneous Configuration	Simultaneous SAR (W/kg)	Limit	Verdict
Head	CDMA BC0 Voice+Bluetooth	0.207	1.6	Pass
Body-worn	CDMA BC0 DATA +Bluetooth	0.501	1.6	Pass

3.4 Test Uncertainty

3.4.1 Measurement uncertainty evaluation for SAR test

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

System Measurement Uncertainty (frequency range from 300 MHz to 3 GHz)

Uncertainty Component	Tol (+/- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+/-%)	10g Ui (+/-%)	V _i
Measurement System								
Probe calibration	6.0	N	1	1	1	6.00	6.00	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.90	3.90	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Readout Electronics	0.3	N	1	1	1	0.30	0.30	∞
Reponse Time	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1	1.50	1.50	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Probe positioner Mechanical Tolerance	0.4	R	$\sqrt{3}$	1	1	0.20	0.20	∞
Probe positioning with respect to Phantom Shell	2.9	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.0	R	$\sqrt{3}$	1	1	1.20	1.20	∞
Test sample Related								
Test sample positioning	2.9	N	1	1	1	2.90	2.90	N-1
Device Holder Uncertainty	3.6	N	1	1	1	3.60	3.60	N-1
Output power Variation - SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.90	2.90	∞
SAR scaling	0.0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	3.50	3.50	∞
SAR correction	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.78	0.71	1.10	1.00	∞
Liquid permittivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.26	0.26	0.30	0.40	∞
Liquid conductivity - temperature uncertainty	3.4	N	$\sqrt{3}$	0.78	0.71	1.50	1.40	∞
Liquid permittivity - temperature uncertainty	0.4	N	$\sqrt{3}$	0.26	0.26	0.10	0.10	∞
Combined Standard Uncertainty		RSS				13.1	13.0	
Expanded Uncertainty (95% Confidence interval)		K=2				26.1	26.1	

System Measurement Uncertainty (frequency range from 3 GHz to 6 GHz)

Uncertainty Component	Tol (+ - %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System								
Probe calibration	6.55	N	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.90	3.90	∞
Boundary effect	2.0	R	$\sqrt{3}$	1	1	1.20	1.20	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Readout Electronics	0.3	N	1	1	1	0.30	0.30	∞
Reponse Time	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1	1.50	1.50	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Probe positioner Mechanical Tolerance	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Probe positioning with respect to Phantom Shell	6.7	R	$\sqrt{3}$	1	1	3.90	3.90	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	4.0	R	$\sqrt{3}$	1	1	2.30	2.30	∞
Test sample Related								
Test sample positioning	2.9	N	1	1	1	2.90	2.90	N-1
Device Holder Uncertainty	3.6	N	1	1	1	3.60	3.60	N-1
Output power Variation - SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.90	2.90	∞
SAR scaling	0.0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	6.6	R	$\sqrt{3}$	1	1	3.80	3.80	∞
SAR correction	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.78	0.71	1.10	1.00	∞
Liquid permittivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.26	0.26	0.30	0.40	∞
Liquid conductivity - temperature uncertainty	3.4	N	$\sqrt{3}$	0.78	0.71	1.50	1.40	∞
Liquid permittivity - temperature uncertainty	0.4	N	$\sqrt{3}$	0.26	0.26	0.10	0.10	∞
Combined Standard Uncertainty		RSS				14.0	14.0	
Expanded Uncertainty (95% Confidence interval)		K=2				28.1	28.0	

3.4.2 Measurement uncertainty evaluation for system check

This measurement uncertainty budget is suggested by IEEE 1528. The break down of the individual uncertainties is as follows:

1) System Measurement Uncertainty (frequency range from 300 MHz to 3 GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System								
Probe calibration	6.0	N	1	1	1	6.00	6.00	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.90	3.90	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Readout Electronics	0.3	N	1	1	1	0.30	0.30	∞
Reponse Time	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1	1.50	1.50	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Probe positioner Mechanical Tolerance	0.4	R	$\sqrt{3}$	1	1	0.20	0.20	∞
Probe positioning with respect to Phantom Shell	2.9	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.0	R	$\sqrt{3}$	1	1	1.20	1.20	∞
Dipole								
Deviation of experimental dipole	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Dipole axis to liquid distance	2.0	R	1	1	1	1.20	1.20	∞
Power drift	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	3.50	3.50	∞
SAR correction	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.78	0.71	1.10	1.00	∞
Liquid permittivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.26	0.26	0.30	0.40	∞
Liquid conductivity - temperature uncertainty	3.4	N	$\sqrt{3}$	0.78	0.71	1.50	1.40	∞
Liquid permittivity - temperature uncertainty	0.4	N	$\sqrt{3}$	0.26	0.26	0.10	0.10	∞
Combined Standard Uncertainty		RSS				10.56	10.52	
Expanded Uncertainty (95% Confidence interval)		K=2				21.12	21.04	

2) System Measurement Uncertainty (frequency range from 3 GHz to 6 GHz)

Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System								
Probe calibration	6.55	N	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0.7	0.7	3.90	3.90	∞
Boundary effect	2.0	R	$\sqrt{3}$	1	1	1.20	1.20	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.60	0.60	∞
Readout Electronics	0.3	N	1	1	1	0.30	0.30	∞
Reponse Time	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Integration Time	2.6	R	$\sqrt{3}$	1	1	1.50	1.50	∞
RF ambient Conditions - Noise	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
RF ambient Conditions - Reflections	3.0	R	$\sqrt{3}$	1	1	1.70	1.70	∞
Probe positioner Mechanical Tolerance	0.8	R	$\sqrt{3}$	1	1	0.50	0.50	∞
Probe positioning with respect to Phantom Shell	6.7	R	$\sqrt{3}$	1	1	3.90	3.90	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	4.0	R	$\sqrt{3}$	1	1	2.30	2.30	∞
Dipole								
Deviation of experimental dipole	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	∞
Dipole axis to liquid distance	2.0	R	1	1	1	1.20	1.20	∞
Power drift	4.7	R	$\sqrt{3}$	1	1	2.70	2.70	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (Shape and thickness tolerances)	6.6	R	$\sqrt{3}$	1	1	3.80	3.80	∞
SAR correction	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞
Liquid conductivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.78	0.71	1.10	1.00	∞
Liquid permittivity - measurement uncertainty	2.5	N	$\sqrt{3}$	0.26	0.26	0.30	0.40	∞
Liquid conductivity - temperature uncertainty	3.4	N	$\sqrt{3}$	0.78	0.71	1.50	1.40	∞
Liquid permittivity - temperature uncertainty	0.4	N	$\sqrt{3}$	0.26	0.26	0.10	0.10	∞
Combined Standard Uncertainty		RSS				11.75	11.72	
Expanded Uncertainty (95% Confidence interval)		K=2				23.50	23.44	

4 MEASUREMENT SYSTEM

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 DASY SAR System

4.2.1 DASY SAR System Diagram

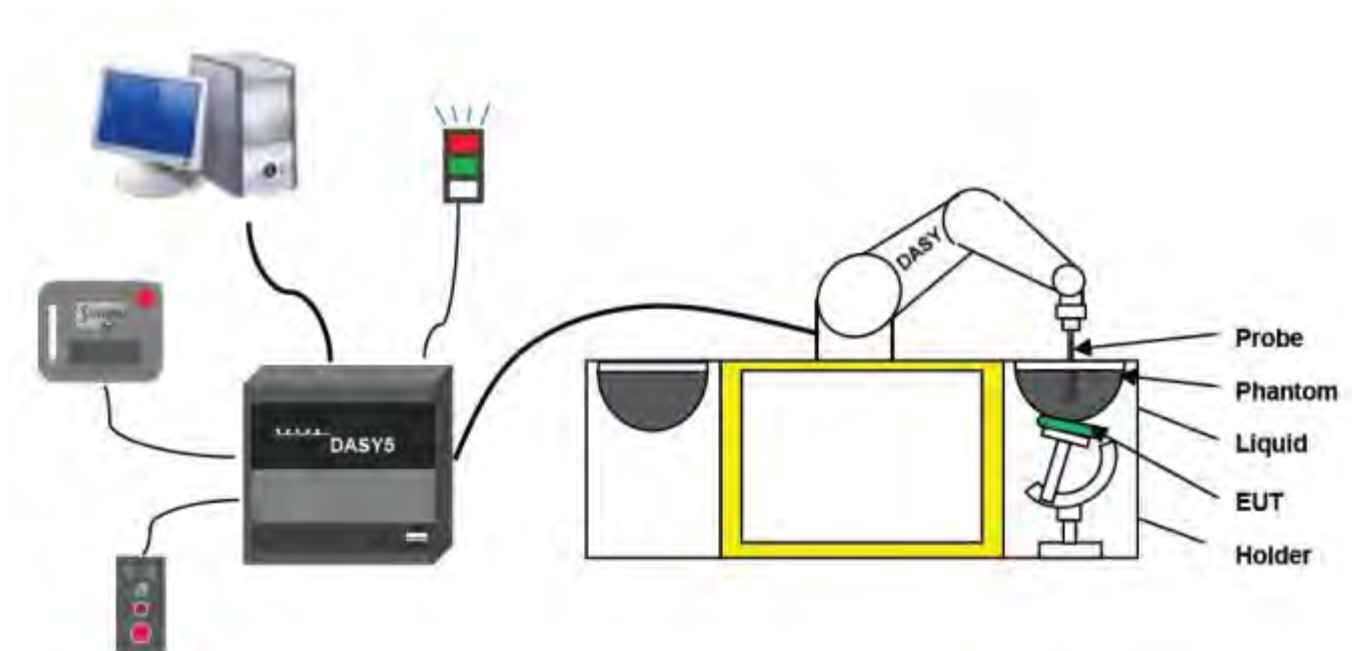

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASYS5 measurement server.
6. The DASYS5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASYS5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core. Built-in optical fiber for surface detection system. For the 6-axis controller system, Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision
(repeatability ± 0.02 mm)
- High reliability
(industrial design)
- Low maintenance costs
(virtually maintenancefree due to direct drive gears; no belt drives)
- Jerk-free straight movements
(brushless synchron motors; no stepper motors)
- Low ELF interference
(motor control _elds shielded via the closed metallic constructionshields)

4.2.3 E-FieldProbe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN:7340 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection systemBuilt-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ; ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, withCALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.

4.2.4 Data Acquisition Electronics


The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200M Ω m
- The Inputs: Symmetrical and Floating
- Common Mode Rejection: Above 80dB

4.2.5 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

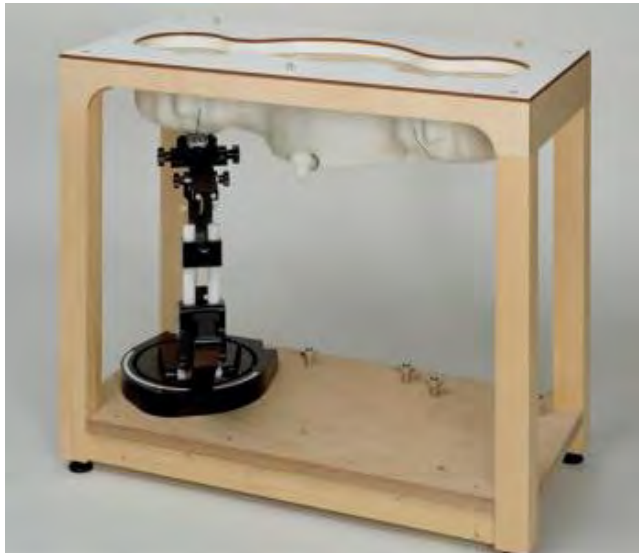

- Left hand
- Right hand
- Flat phantom

Photo of Phantom SN1857


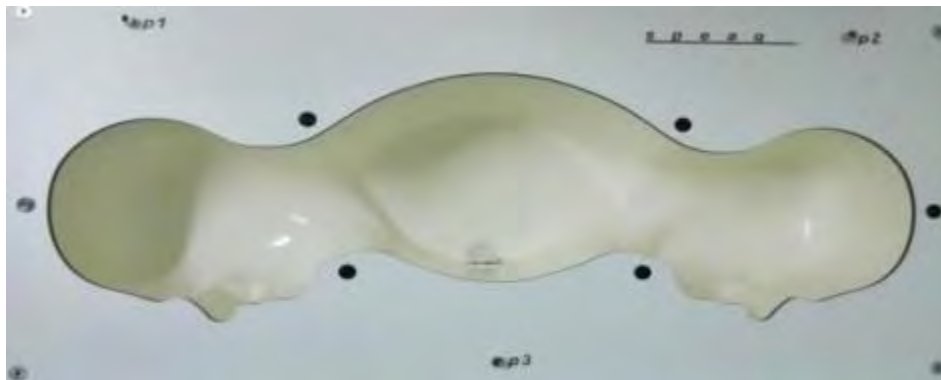


Photo of Phantom SN1859

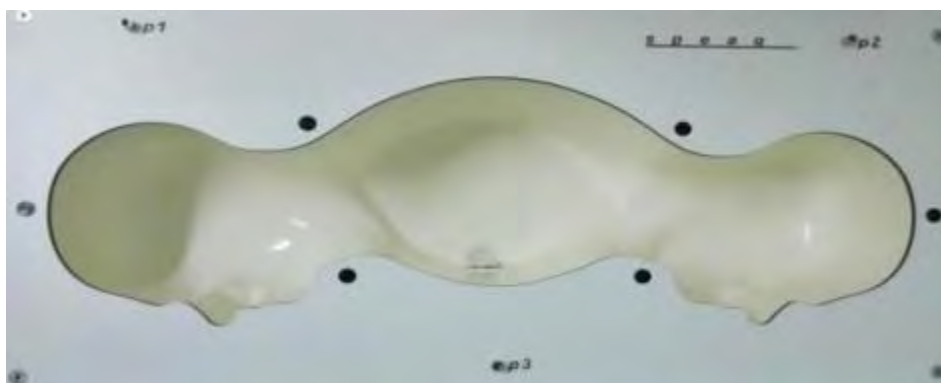

Serial Number	Material	Length	Height
SN 1857 SAM1	Vinylester, glass fiber reinforced	1000	500
SN 1859 SAM2	Vinylester, glass fiber reinforced	1000	500

4.2.6 Device Holder


The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used. Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

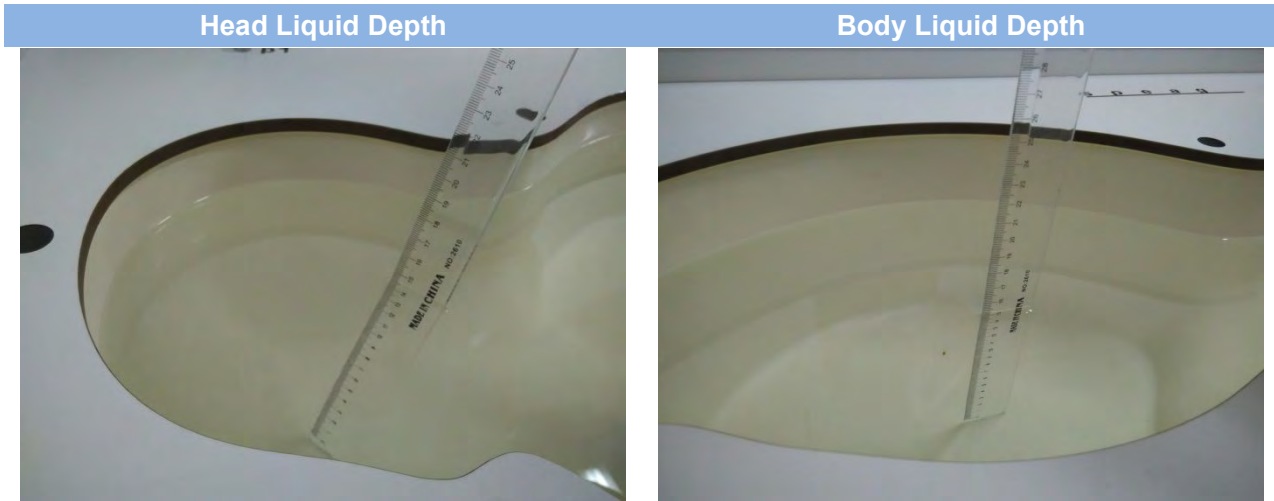

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water	Sugar	Cellulose	Salt	Preventol	DGBE	Conductivity	Permittivity
	%	%	%	%	%	%	σ	ϵ
Head(Reference IEEE1528)								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Body(From instrument manufacturer: SPEAG)								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5


5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

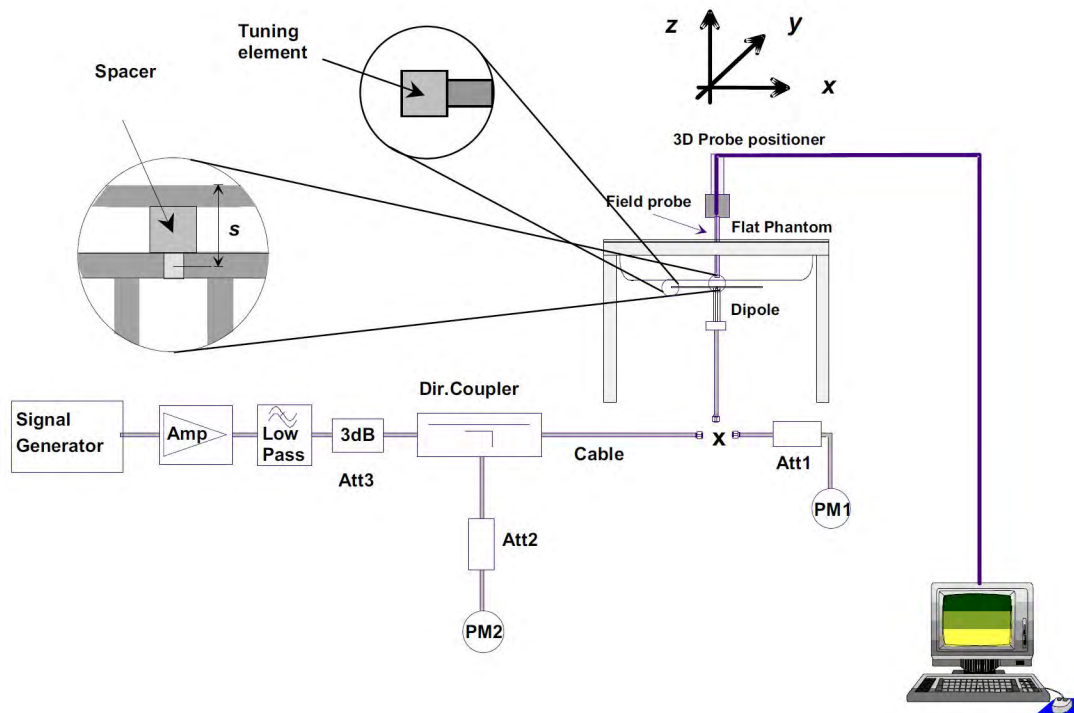

6 TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset v01r02, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2003 using the SAM phantom illustrated as below.


6.1.1 Two Imaginary Lines on the Handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

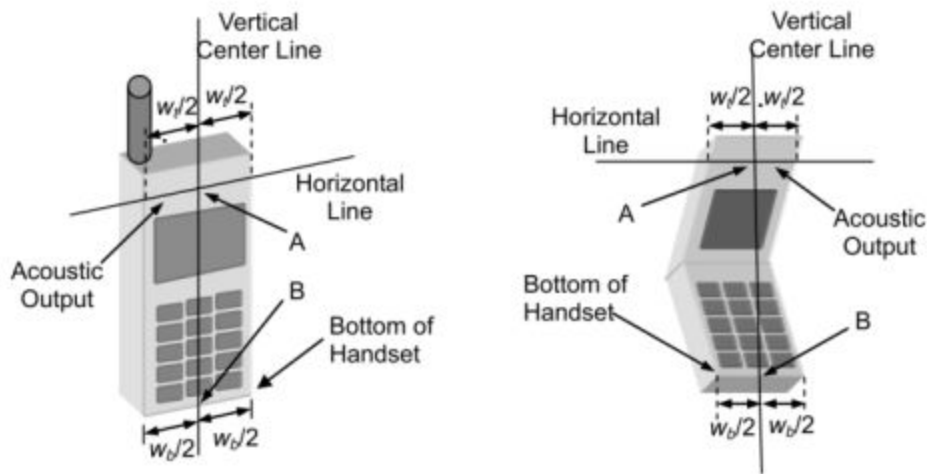

6.1.2 Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

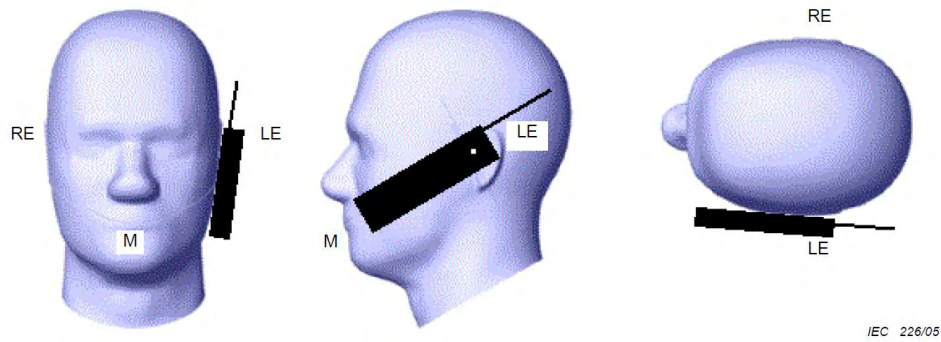

6.1.3 Tilted Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in EN 62209-2 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

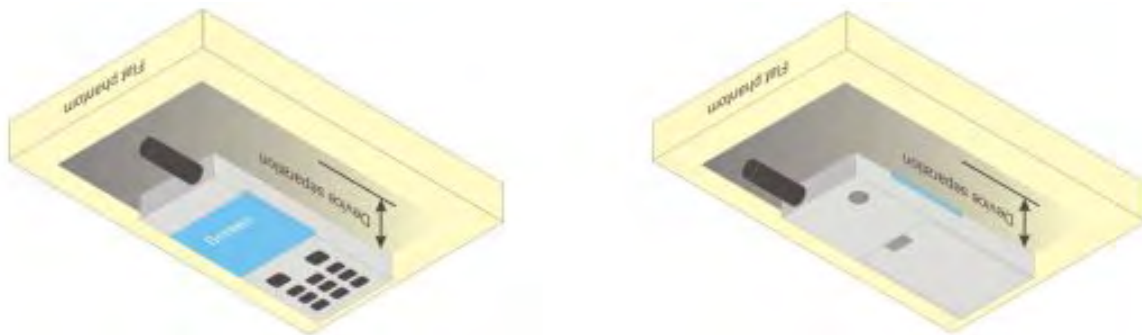


6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

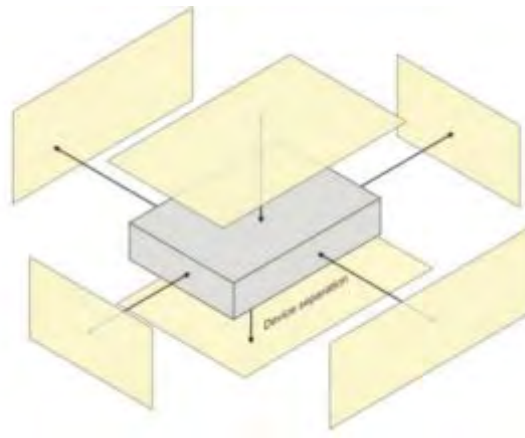

7 MEASUREMENT PROCEDURE

7.1 Measurement Process Diagram

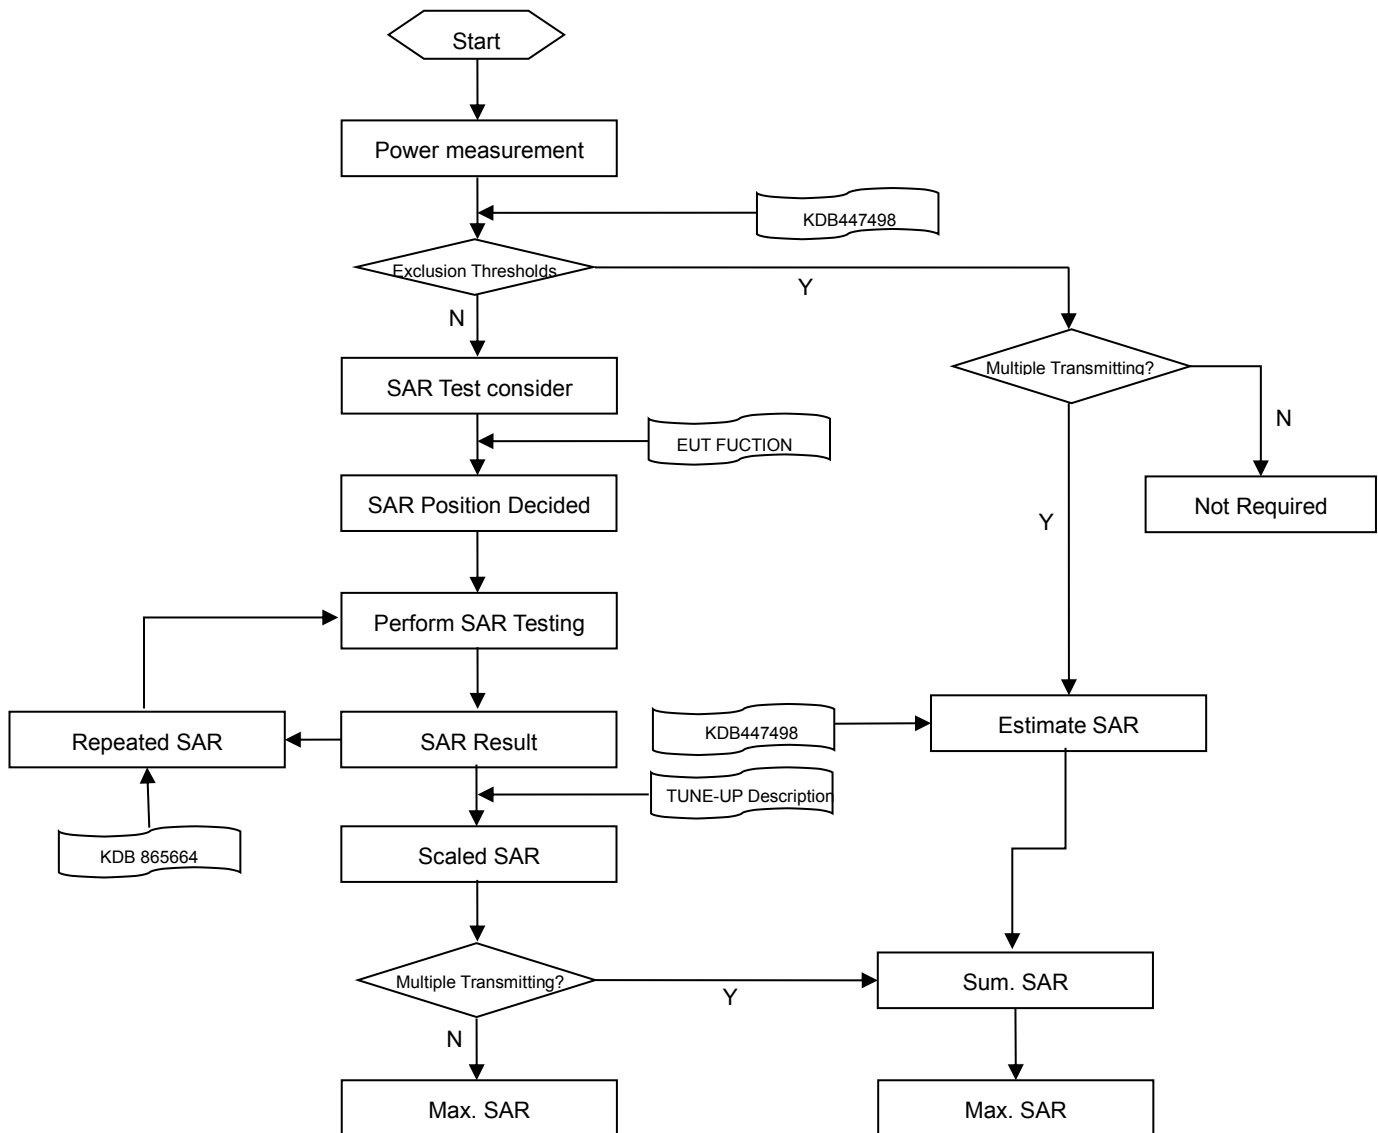

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
			Δz Zoom (n>1): between subsequent points	≤ 1.5·Δz Zoom (n-1)
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm

Note:

- δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.
- * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.


When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8 CONDUCTED RF OUPUT POWER

CDMA BC0			
Channel	1013	384	777
Frequency (MHz)	824.7	836.5	848.3
Mode	CDMA BC0		
Peak Power (dBm)	27.64	27.66	26.82
Mode	EVDO Rel A		
Peak Power (dBm)	27.56	27.71	27.08

BLUETOOTH						
Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Peak Power (dBm)	-0.01	0.97	1.06	-0.43	0.40	0.60
Mode	8-DPSK			BLE		
Channel	0	39	78	N/A	N/A	N/A
Frequency (MHz)	2402	2441	2480	-	-	-
Peak Power (dBm)	-1.07	-0.25	0.00	-	-	-

9 TEST EXCLUSION CONSIDERATION

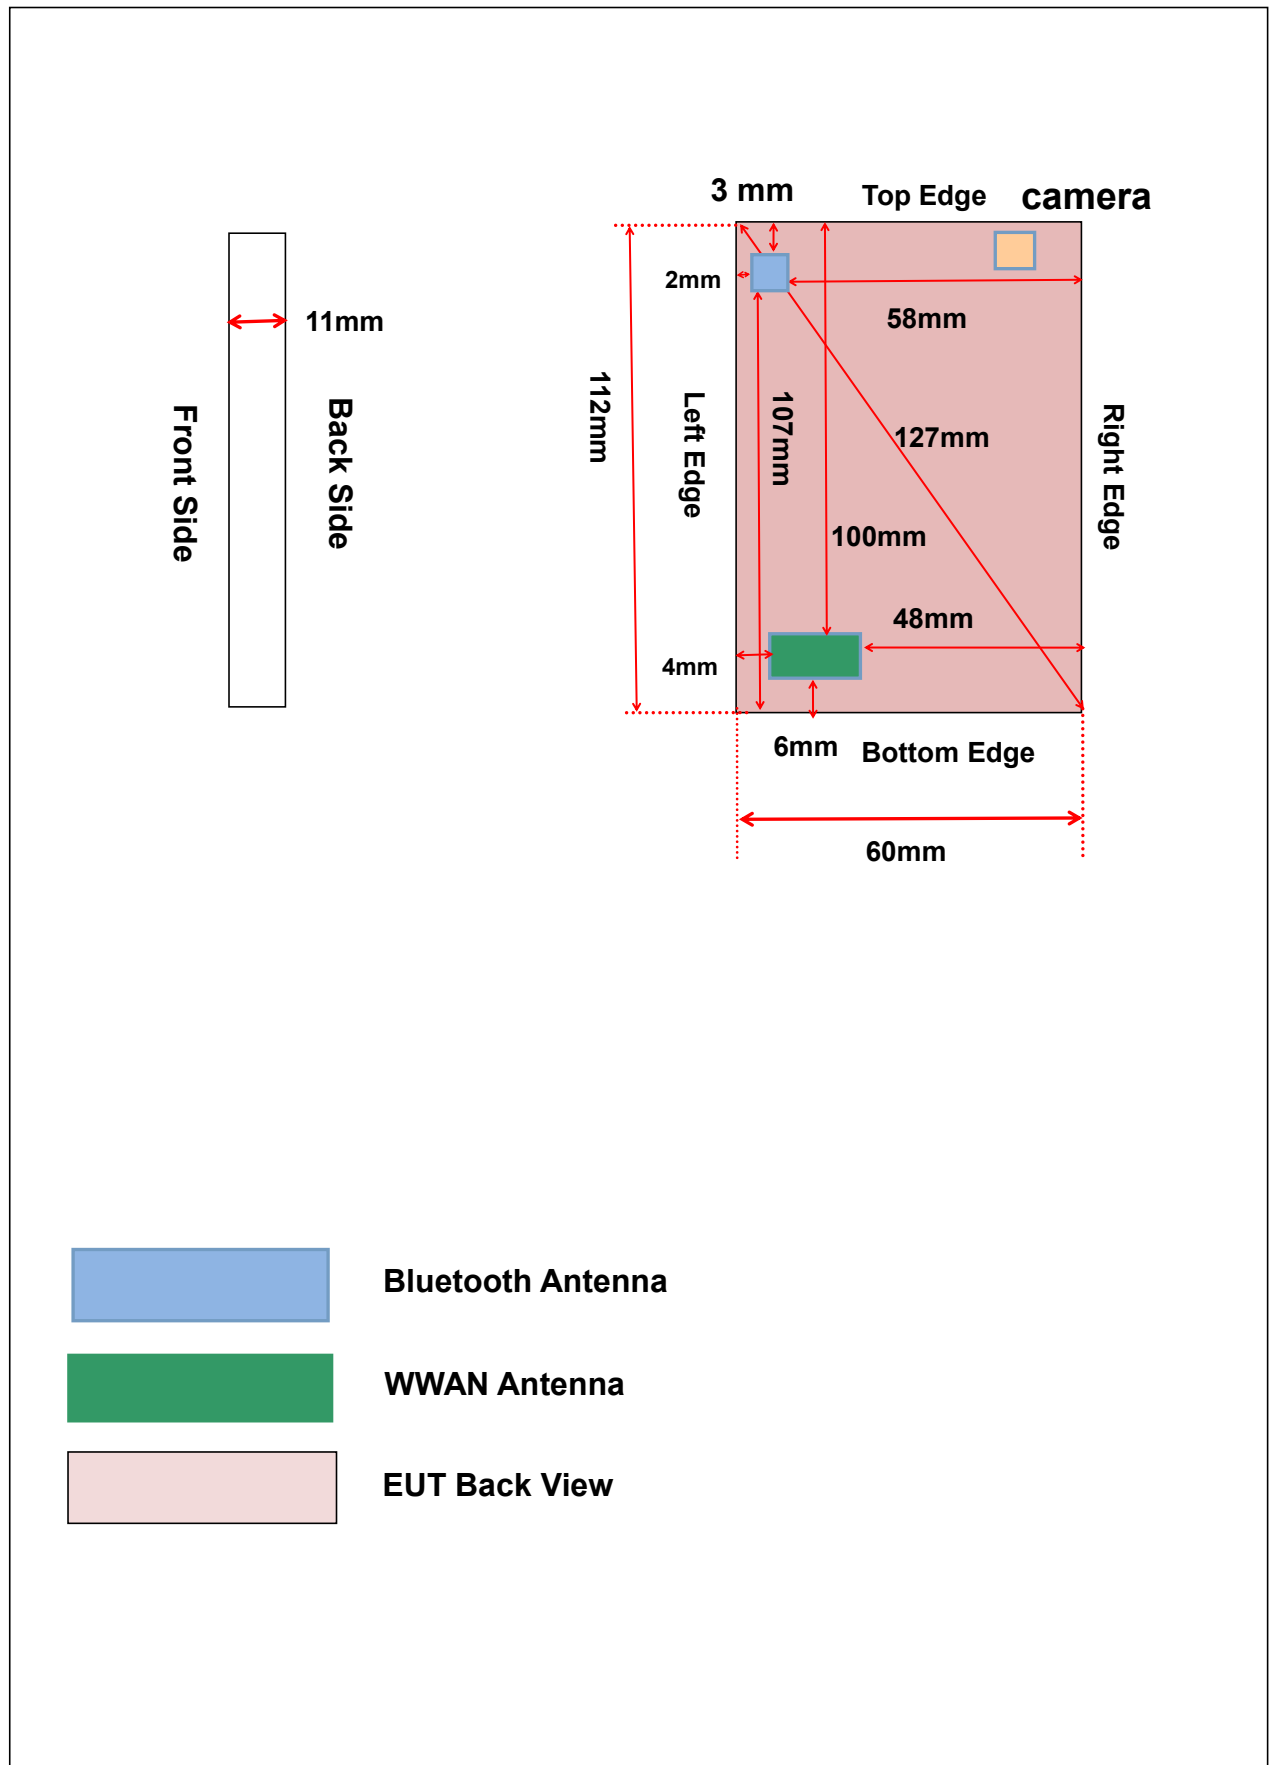

9.1 SAR Test Exclusion Consideration Table

According with FCC KDB 447498 D01v05r02, Appendix A, <SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm> Table, this Device SAR test configurations consider as following :

Band	Mode	Max. Peak Power		Test Position Configurations					
		dBm	mW	Head	Front/ Back	Left Edge	Right Edge	Top Edge	Bottom Edge
CDMA BC0	Distance to User			<5mm	<5mm	4mm	48mm	100mm	6mm
	Voice	27.66	583.45	Yes	Yes	Yes	Yes	No	Yes
	EVDO Rel A	27.71	590.20	Yes	Yes	Yes	Yes	No	Yes
Bluetooth	Distance to User			<5mm	<5mm	<5mm	58mm	<5mm	107mm
	Bluetooth	1.06	1.28	No	No	No	No	No	No

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - $f(\text{GHz})$ is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
 - For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.
This formula is $[3.0] / [\sqrt{f(\text{GHz})}] \cdot [(\text{min. test separation distance, mm})] = \text{exclusion threshold of mW}$.
- Per KDB 447498 D01v05r02, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz
- Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC12.2Kbps, or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/kg}$, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
- Per KDB 248227 D01 v02, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
- Apply the test exclusion rule in KDB 248227 D01 v02 11g, 11n-HT20 and HT40 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

9.2 10g Extremity Exposure Consideration

According with FCC KDB 648474 D04 v01r02, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

Conclusion:

The EUT overall diagonal dimension is 12.7cm, which is less than 16.0 cm, 10 g extremity SAR is not required.

10 TEST RESULT

10.1 Head SAR (1 g Value)

Band	Mode	Position	Ch.	Freq. (MHz)	Power Drift (dB)	Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	Scaled SAR(W/Kg)	Meas. No.
CDMA BC0	Voice	Left Cheek	384	836.5	-0.04	0.137	27.66	27.70	1.009	0.138	1#
		Left Tilt	384	836.5	0.12	0.079	27.66	27.70	1.009	0.080	2#
		Right Cheek	384	836.5	0.18	0.077	27.66	27.70	1.009	0.078	3#
		Right Tilt	384	836.5	0.13	0.046	27.66	27.70	1.009	0.046	4#

Note 1: Refer to ANNEX C for the detailed test data for each test configuration.

10.2 Body-worn SAR (10mm Separation)

Band	Mode	Position	Ch.	Freq. (MHz)	Power Drift (dB)	Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	Scaled SAR(W/Kg)	Meas. No.
CDMA BC0	Voice	Front Side	384	836.5	-0.10	0.178	27.66	27.70	1.009	0.180	5#
		Back Side	384	836.5	-0.03	0.412	27.66	27.70	1.009	0.416	6#
		Left Edge	384	836.5	-0.09	0.044	27.66	27.70	1.009	0.044	7#
		Right Edge	384	836.5	-0.07	0.097	27.66	27.70	1.009	0.098	8#
		BottomEdge	384	836.5	-0.12	0.048	27.66	27.70	1.009	0.048	9#
	EVDO Rel A (DATA)	Front Side	384	836.5	-0.04	0.154	27.71	27.80	1.021	0.157	10#
		Back Side	384	836.5	-0.13	0.464	27.71	27.80	1.021	0.474	11#
		Left Edge	384	836.5	-0.12	0.128	27.71	27.80	1.021	0.131	12#
		Right Edge	384	836.5	0.20	0.182	27.71	27.80	1.021	0.186	13#
		BottomEdge	384	836.5	-0.10	0.048	27.71	27.80	1.021	0.049	14#

Note 1: Refer to ANNEX C for the detailed test data for each test configuration.

10.3 SAR Measurement Variability

According to KDB 865664 D01 v01r03, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Note:

The highest measured SAR is 0.464 W/kg, which is less than 0.80 W/kg, repeated measurement is not required.

11 SIMULTANEOUS TRANSMISSION

11.1 Simultaneous Transmission Mode Consideration

Simultaneous Transmitting (Yes/NO)	Bluetooth	EVDO Rel A	CDMA BC0 Voice
CDMA BC0 Voice	Yes		-
EVDO Rel A	Yes-		-
Bluetooth			

11.2 Estimated SAR Calculation

According to KDB 447498 D01v05r02, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of ≤ 0.4 W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune Up Power(mw)}}{\text{Min Test Separation Distance}} * \frac{\sqrt{f_{\text{GHz}}}}{x} \text{ (where } x = 7.5 \text{ for 1-g SAR)}$$

If the minimum test separation distance is < 5 mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is > 50 mm, the 0.4 W/kg is used for SAR-1g.

Band	Mode	Position	Antenna To user (mm)	SAR Testing	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Frequency (GHz)	Calculation Distance/Gap (mm)	Estimated SAR (W/kg)
Bluetooth	GFSK	Right Cheek	5	NO	1.1	1.29	2.441	5	0.054
		Left Cheek	5	NO	1.1	1.29	2.441	5	0.054
		Front side	10	NO	1.1	1.29	2.441	10	0.027
		Back Side	10	NO	1.1	1.29	2.441	10	0.027
		Right Edge	10	NO	1.1	1.29	2.441	10	0.027
		Top Edge	10	NO	1.1	1.29	2.441	10	0.027

11.3 Sum SAR of Simultaneous Transmission

Simultaneous Mode	Position	Mode	Max. 1 g SAR (W/kg)	1 g Sum SAR (W/kg)
CDMA BC0 Voice+ Bluetooth	Head	CDMA BC0 Voice	0.138	0.192
		Bluetooth	0.054	
	Body-worn	CDMA BC0 Voice	0.180	0.207
		Bluetooth	0.027	
EVDO Rel A+Bluetooth	Body-worn	EVDO Rel A	0.474	0.501
		Bluetooth	0.027	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

12 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
835MHz Validation Dipole	Speag	D835V2	SN: 4d187	2014/11/26	2015/11/25
E-Field Probe	Speag	EX3DV4	SN: 7340	2014/12/02	2015/12/01
Phantom1	Speag	SAM	SN: 1859	N/A	N/A
Phantom2	Speag	SAM	SN: 1857	N/A	N/A
Data acquisition electronics	Speag	DAE4	SN: 1454	2014/12/01	2015/11/30
Signal Generator	R&S	SMBV100A	260592	2015/07/16	2016/07/15
Power Meter	Agilent	E4419B	GB40201833	2015/07/21	2016/07/20
Power Sensor	R&S	NRP-Z21	103971	2015/07/21	2016/07/20
Power Amplifier	SATIMO	6552B	22374	2015/05/20	2016/05/19
Dielectric Probe Kit	SATIMO	SCLMP	SN 25/13 OCPG56	2015/08/17	2016/08/16
Wireless Communications Test Set	R&S	CMW 500	138884	2015/07/16	2016/07/15
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SATIMO SCLMP Dielectric Probe Kit

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ)	Meas. Permittivity (ϵ)	Target Conductivity (σ)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2015.09.22	Head	835	21.8	0.87	40.90	0.90	41.50	-3.33	-1.45
2015.09.22	Body	835	21.8	0.93	54.20	0.97	55.20	-4.12	-1.81

Note: The tolerances limit of Conductivity and Permittivity is $\pm 5\%$.

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g).

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)	Targeted SAR (W/kg)	Tolerance (%)
2015.09.22	Head	835	100	0.912	9.12	9.15	-0.33	9.56	-4.60
2015.09.22	Body	835	100	0.920	9.20	9.17	0.33	9.56	-3.77
Note: The tolerance limit of System validation $\pm 10\%$.									

System Performance Check Data (835MHz Head)

835-HEAD-2015-9-22

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.1 Liquid Temperature: 21.8

Phantom section: Flat Section

Probe: EX3DV4-SN: 7340; ConvF(9.91, 9.91, 9.91)

Configuration/CW 835 100mW HEAD/Area Scan (61x81x1):

Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$

Reference Value = 31.45 V/m; Power Drift = 0.05 dB

Fast SAR: SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.554 W/kg

Maximum value of SAR (interpolated) = 0.893 W/kg

Configuration/CW 835 100mW HEAD/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.45 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.556 W/kg

Maximum value of SAR (measured) = 0.998 W/kg

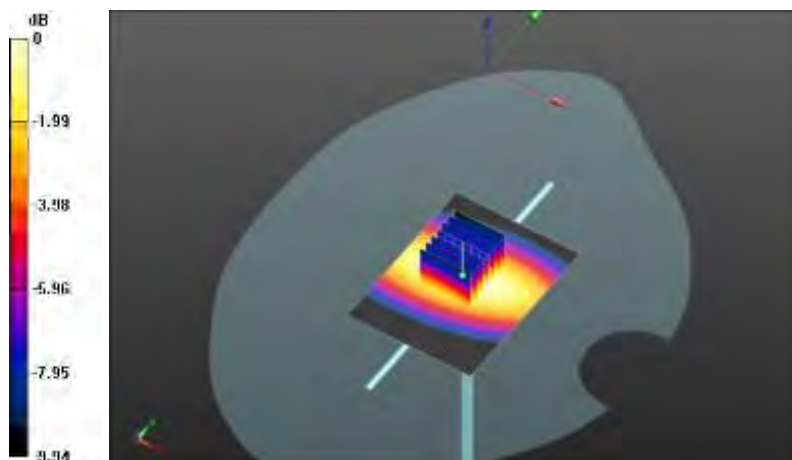

0 dB = 0.998 W/kg = -0.009 dBW/kg

System Performance Check Data (835MHz Body)

835-Body-2015-9-22

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz;

Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ S/m; ϵ_r 100 = 54.20; $\rho = 0$ kg/m³

Ambient Temperature:22.1 Liquid Temperature:21.8

Phantom section: Flat Section

Probe: EX3DV4-SN: 7340; ConvF(9.97, 9.97, 9.97)

Configuration/CW 835 100mW HEAD/Area Scan (61x81x1):

Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Reference Value = 31.35 V/m; Power Drift = 0.05 dB

Fast SAR: SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.595 W/kg

Maximum value of SAR (interpolated) = 0.959 W/kg

Configuration/CW 835 100mW HEAD/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 31.35 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.920 W/kg; SAR(10 g) = 0.597 W/kg

Maximum value of SAR (measured) = 0.964 W/kg

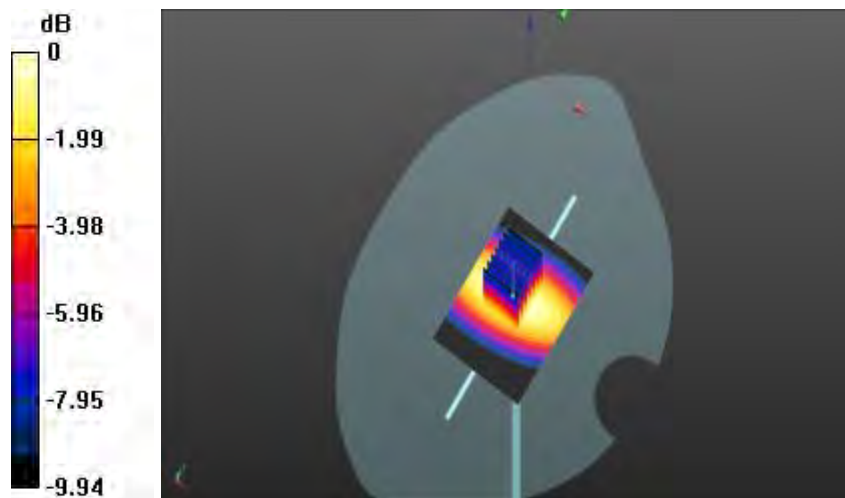

0 dB = 0.964 W/kg = -0.16 dBW/kg

ANNEX C TEST DATA

MEAS.1 Left Head with Cheek on Middle Channel in CDMA BC0 mode

Date/Time: 9/22/2015

Communication System Band: BC 0; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 41.63$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.91, 9.91, 9.91); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CDMA 2000 Head Left Cheek/Area Scan (81x71x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.142 W/kg

Configuration/CDMA 2000 Head Left Cheek /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 4.491 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.143 W/kg

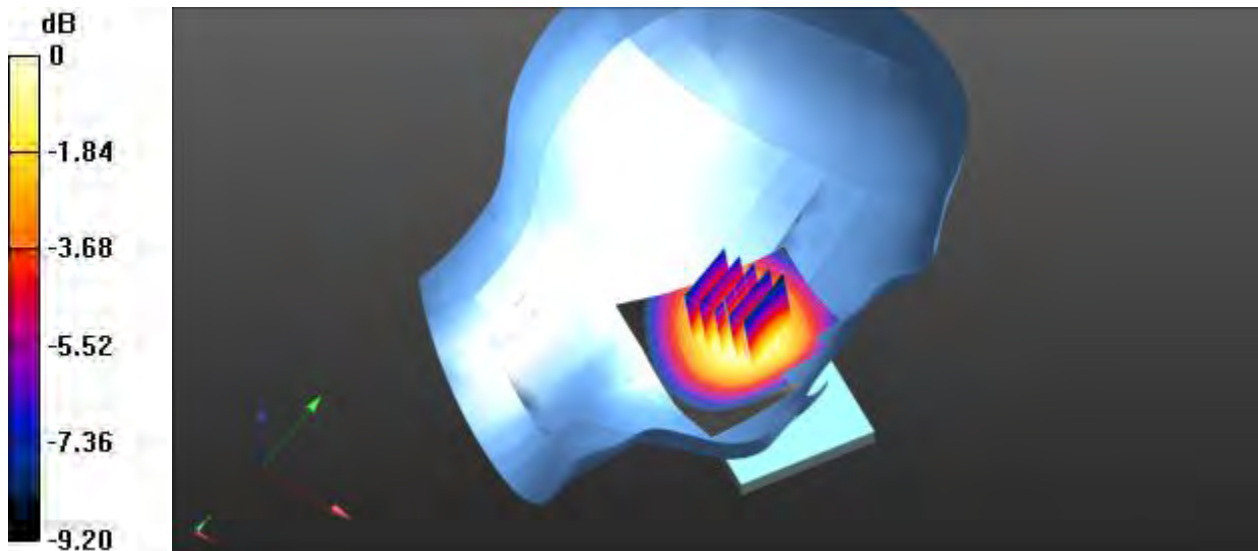

0 dB = 0.143 W/kg = -8.45 dBW/kg

MEAS.2 Left Head with Tilt on Middle Channel in CDMA BC0 mode

Date/Time: 9/22/2015

Communication System Band: BC 0; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 41.63$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.91, 9.91, 9.91); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CDMA 2000 Head Left Tilt/Area Scan (81x71x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0828 W/kg

Configuration/CDMA 2000 Head Left Tilt/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 6.076 V/m ; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.079 W/kg ; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.0831 W/kg

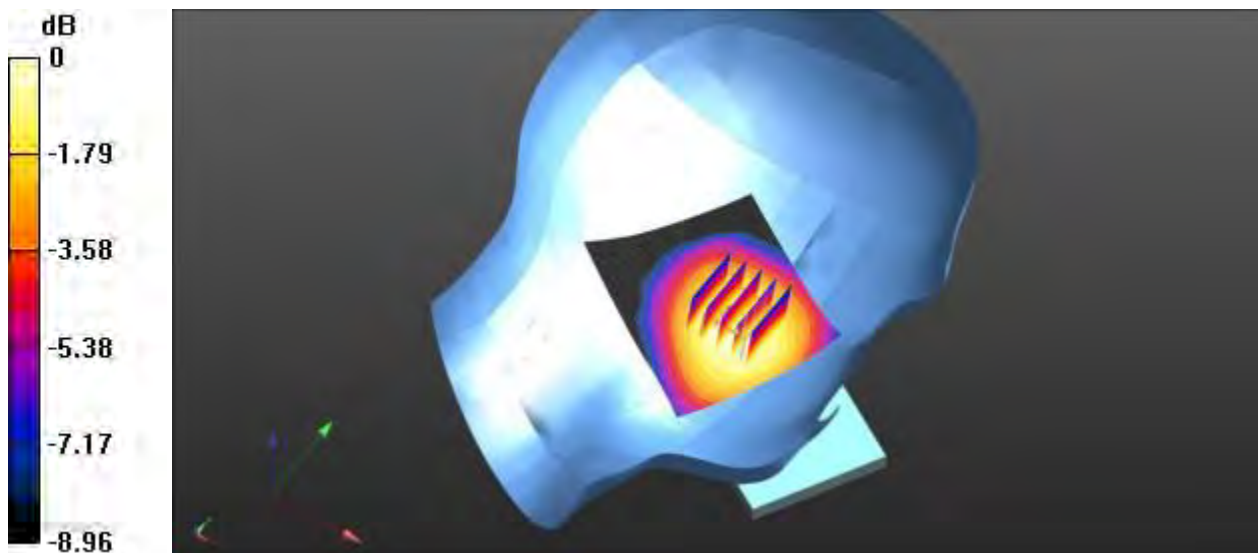

0 dB = 0.0831 W/kg = -10.80 dBW/kg

MEAS.3 Right Head with Cheek on Middle Channel in CDMA BC0 mode

Date/Time: 9/22/2015

Communication System Band: BC 0; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 41.63$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.91, 9.91, 9.91); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CDMA 2000 Head Right Cheek /Area Scan (81x71x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0850 W/kg

Configuration/CDMA 2000 Head Right Cheek /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 2.985 V/m ; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.077 W/kg ; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.0807 W/kg

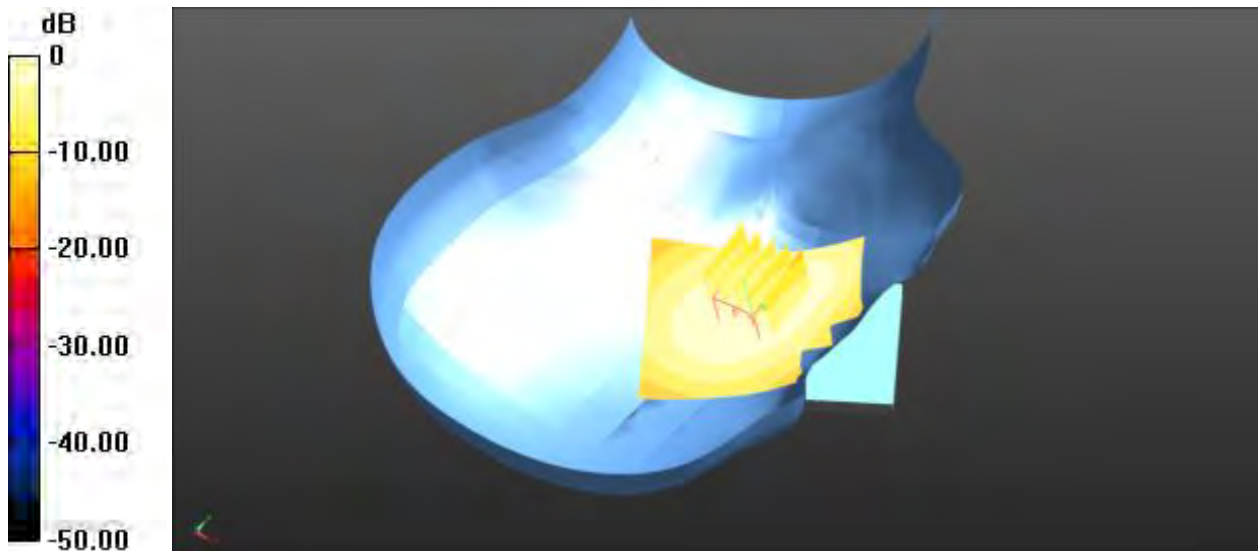

$0 \text{ dB} = 0.0850 \text{ W/kg} = -10.71 \text{ dBW/kg}$

MEAS.4 Right Head with Tilt on Middle Channel in CDMA BC0 mode

Date/Time: 9/22/2015

Communication System Band: BC 0; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 41.63$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.91, 9.91, 9.91); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CDMA 2000 Head Right Tilt/Area Scan (81x71x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0470 W/kg

Configuration/CDMA 2000 Head Right Tilt /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 5.597 V/m ; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.046 W/kg ; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0474 W/kg

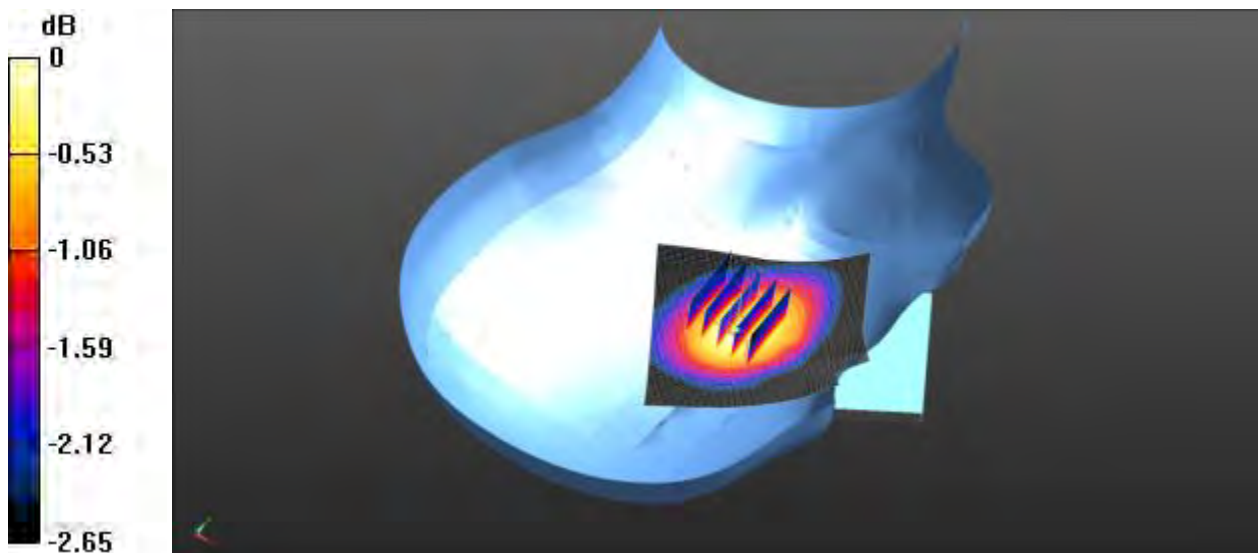

0 dB = 0.0474 W/kg = -13.24 dBW/kg

MEAS.5 Body Plane with Front Side on Middle Channel in CDMA BC0 mode

Date/Time: 9/22/2015

Communication System Band: BC 0; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CDMA 2000 Body Front Side /Area Scan (71x81x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.190 W/kg

Configuration/CDMA 2000 Body Front Side /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 13.15 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.178 W/kg ; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

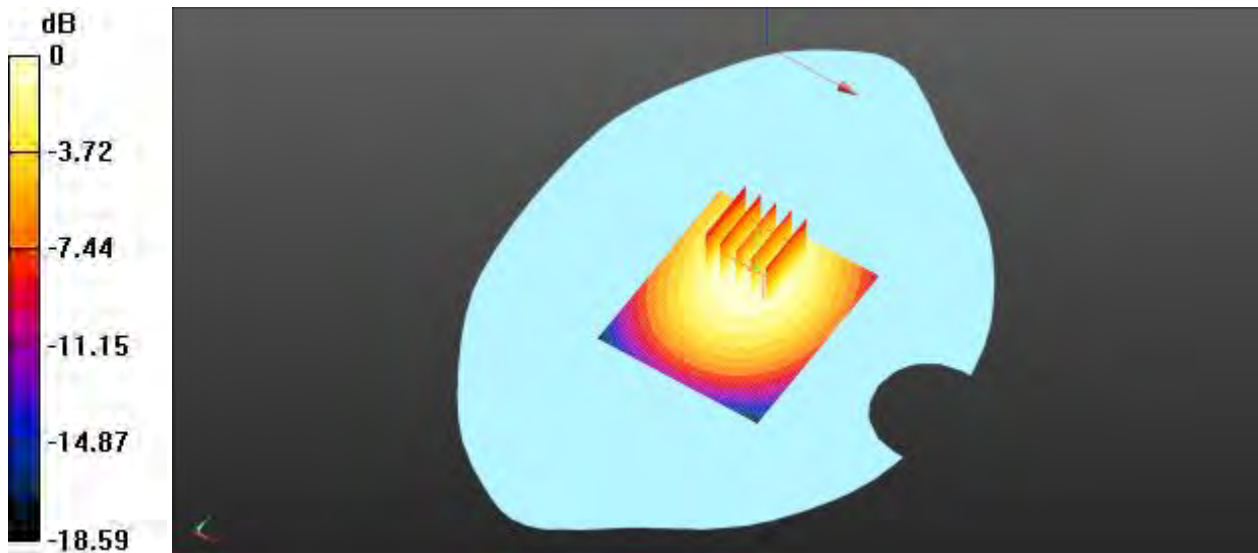

0 dB = 0.190 W/kg = -7.21 dBW/kg

MEAS.6 Body Plane with Back Side on Middle Channel in CDMA BC0 mode

Date/Time: 9/22/2015

Communication System Band: BC 0; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CDMA 2000 Body Back /Area Scan (71x81x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.476 W/kg

Configuration/CDMA 2000 Body Back /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 18.22 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.804 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.436 W/kg

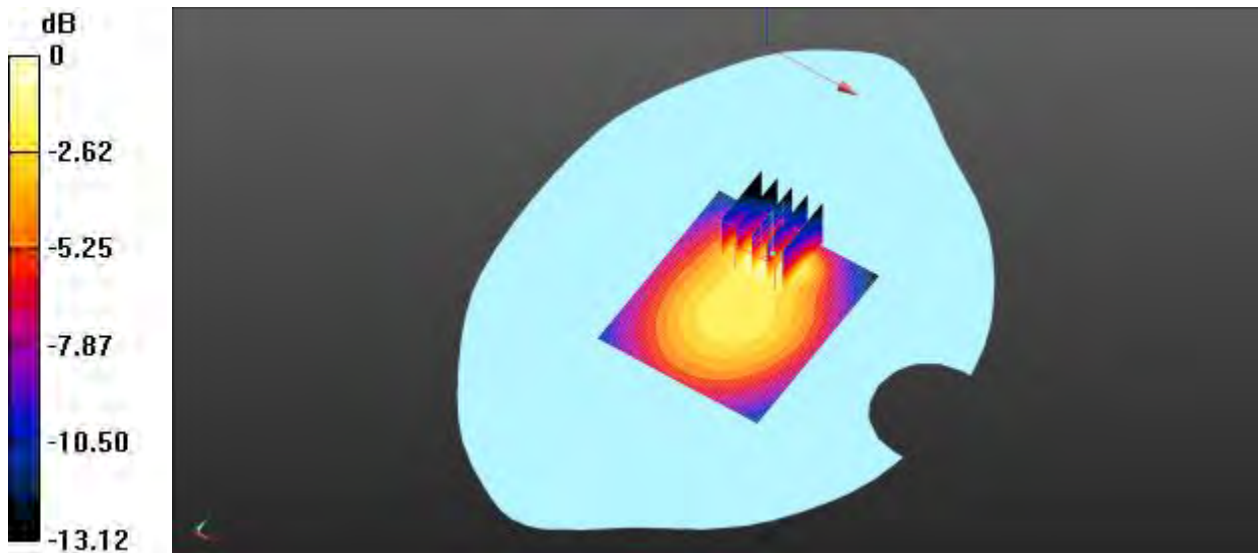

0 dB = 0.476 W/kg = -3.22 dBW/kg

MEAS.7 Body Plane with Left Edge on Middle Channel in CDMA BC0 mode

Date/Time: 9/22/2015

Communication System Band: BC 0; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CDMA 2000 Body Left /Area Scan (71x81x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0494 W/kg

Configuration/CDMA 2000 Body Left /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 7.219 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.044 W/kg ; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0458 W/kg

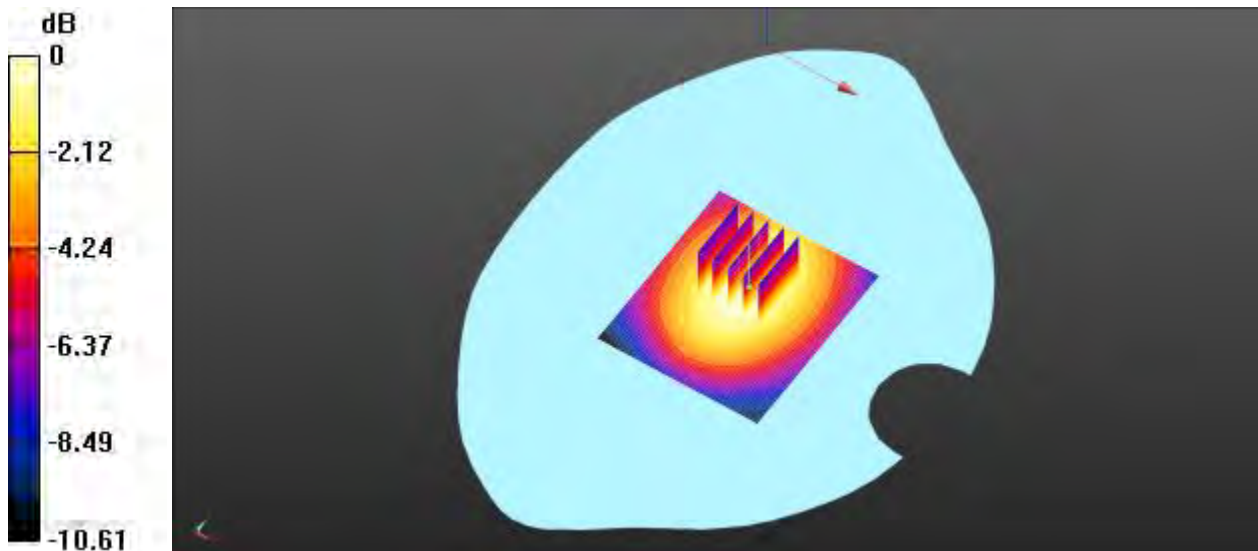

0 dB = 0.0494 W/kg = -13.06 dBW/kg

MEAS.8 Body Plane with Right Edge on Middle Channel in CDMA BC0 mode

Date/Time: 9/22/2015

Communication System Band: BC 0; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CDMA 2000 Body Right /Area Scan (71x81x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.103 W/kg

Configuration/CDMA 2000 Body Right /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 9.815 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.097 W/kg ; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

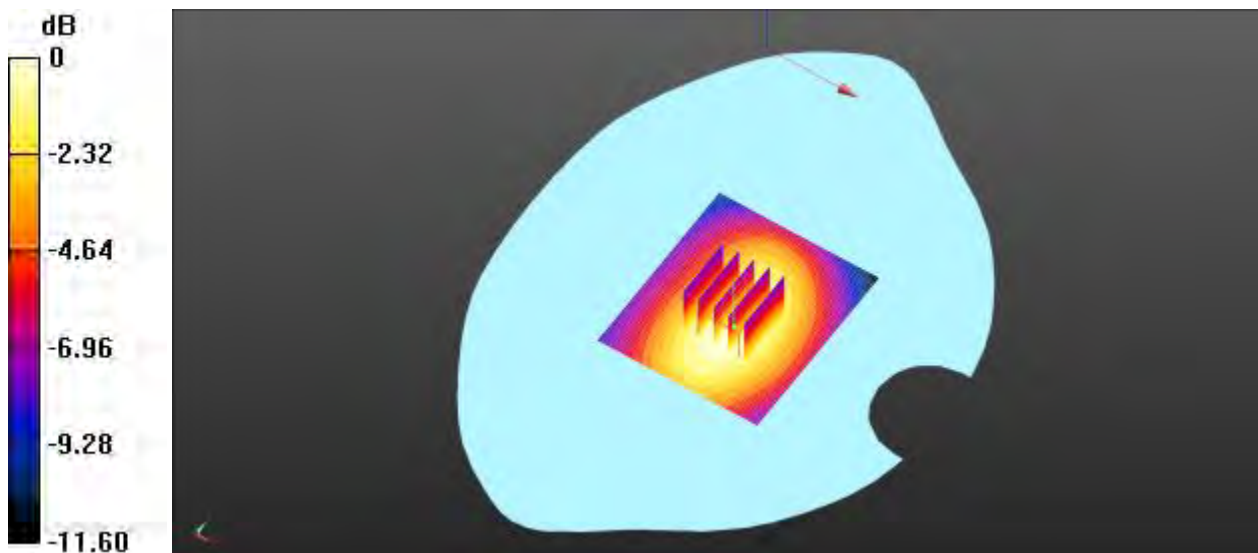

0 dB = 0.103 W/kg = -9.87 dBW/kg

MEAS.9 Body Plane with Bottom Edge on Middle Channel in CDMA BC0 mode

Date/Time: 9/22/2015

Communication System Band: BC 0; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CDMA 2000 Body Bottom /Area Scan (71x81x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0535 W/kg

Configuration/CDMA 2000 Body Bottom /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 6.083 V/m ; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0900 W/kg

SAR(1 g) = 0.048 W/kg ; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0515 W/kg

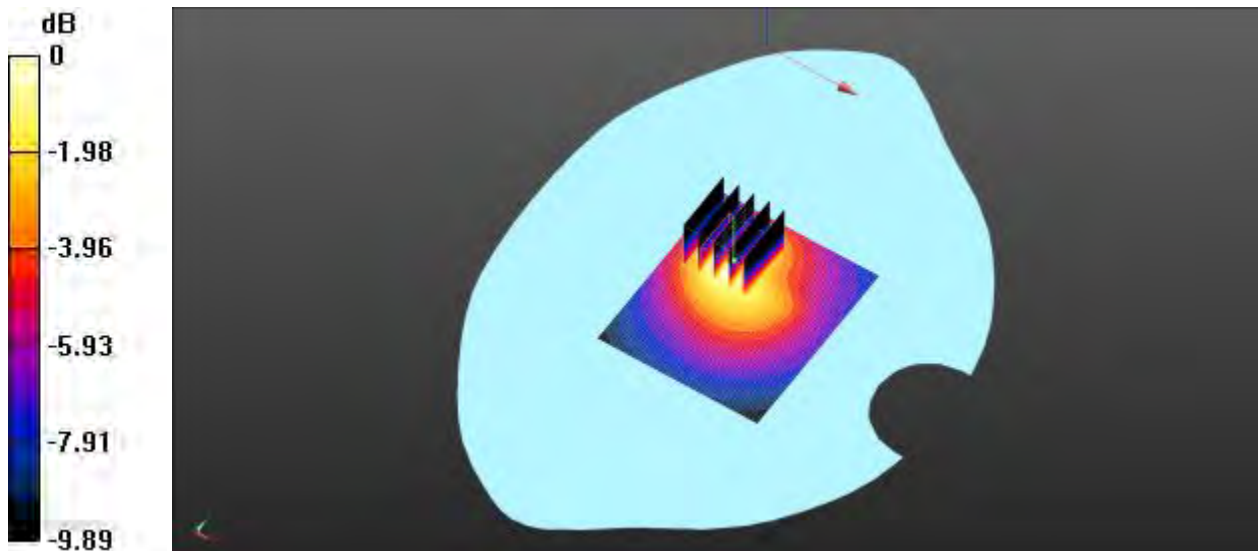

0 dB = 0.0535 W/kg = -12.72 dBW/kg

MEAS.10 Body Plane with Front Side on Middle Channel in CDMA EVDO RelA mode

Date/Time: 9/22/2015

Communication System Band: ECDO; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5\text{MHz}$; $\sigma = 0.95\text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/EVDO Rel A Body Front /Area Scan (71x81x1):

Interpolated grid: $dx=1.200\text{ mm}$, $dy=1.200\text{ mm}$

Maximum value of SAR (interpolated) = 0.163 W/kg

Configuration/EVDO Rel A Body Front /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.06 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.154 W/kg ; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

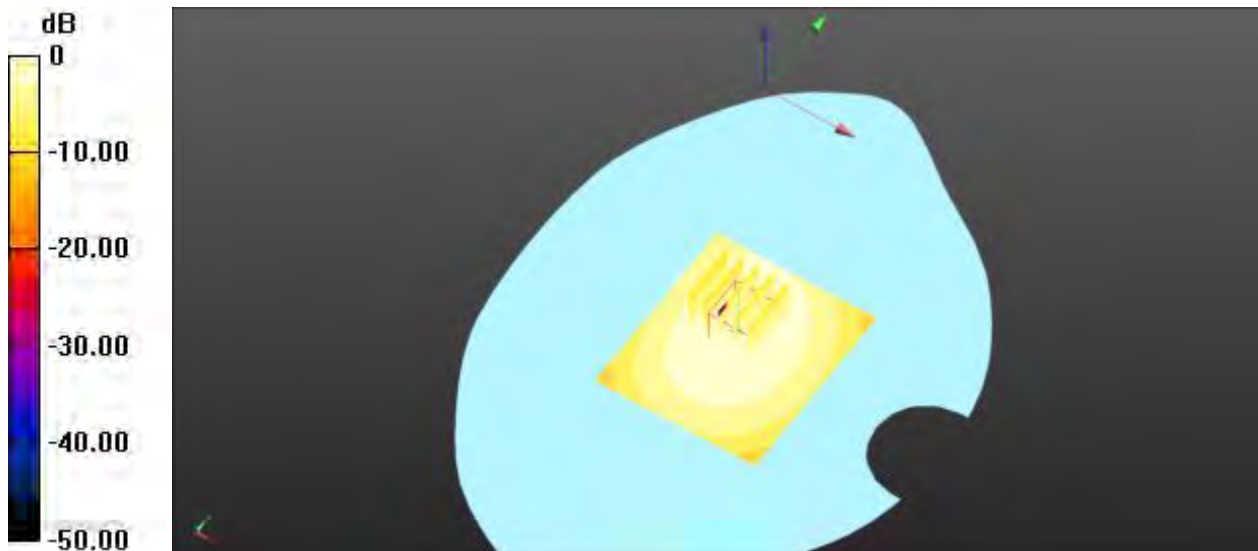

0 dB = 0.162 W/kg = -7.90 dBW/kg

MEAS.11 Body Plane with Back Side on Middle Channel in CDMA EVDO RelA mode

Date/Time: 9/22/2015

Communication System Band: ECDO; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5 \text{ MHz}$; $\sigma = 0.95 \text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/EVDO Rel A Body Back /Area Scan (71x81x1):

Interpolated grid: $dx = 1.200 \text{ mm}$, $dy = 1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.567 W/kg

Configuration/EVDO Rel A Body Back /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8 \text{ mm}$, $dy = 8 \text{ mm}$, $dz = 5 \text{ mm}$

Reference Value = 20.89 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.919 W/kg

SAR(1 g) = 0.464 W/kg ; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.505 W/kg

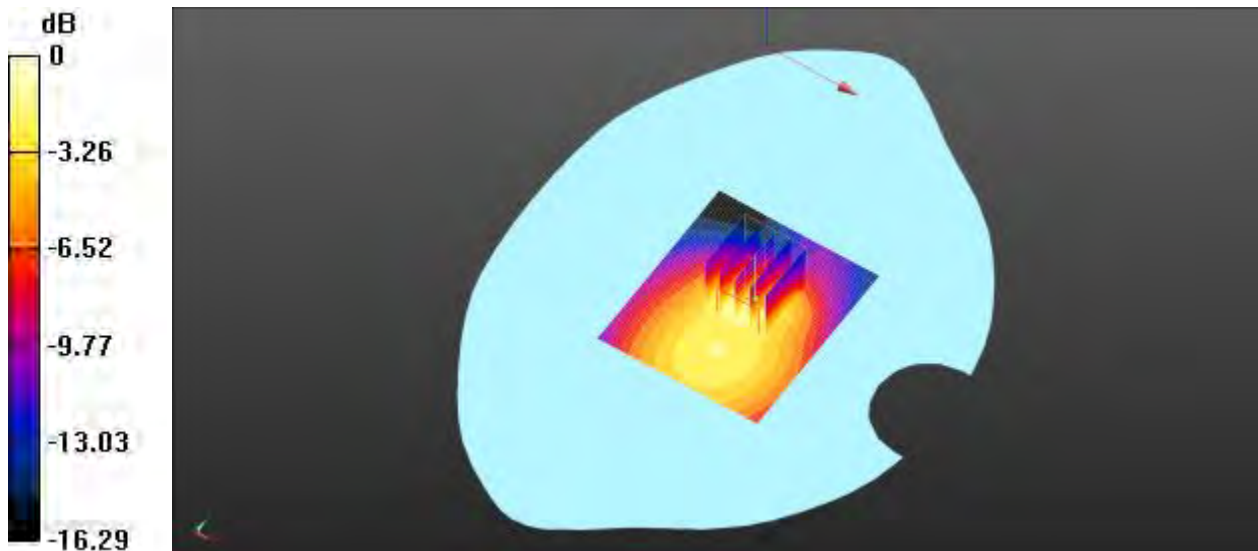

0 dB = 0.567 W/kg = -2.46 dBW/kg

MEAS.12 Body Plane with Left Edge on Middle Channel in CDMA EVDO RelA mode

Date/Time: 9/22/2015

Communication System Band: ECDO; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5\text{MHz}$; $\sigma = 0.95\text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/EVDO Rel A Body Left /Area Scan (71x81x1):

Interpolated grid: $dx = 1.200\text{ mm}$, $dy = 1.200\text{ mm}$

Maximum value of SAR (interpolated) = 0.137 W/kg

Configuration/EVDO Rel A Body Left /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8\text{mm}$, $dy = 8\text{mm}$, $dz = 5\text{mm}$

Reference Value = 11.23 V/m ; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.128 W/kg ; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.137 W/kg

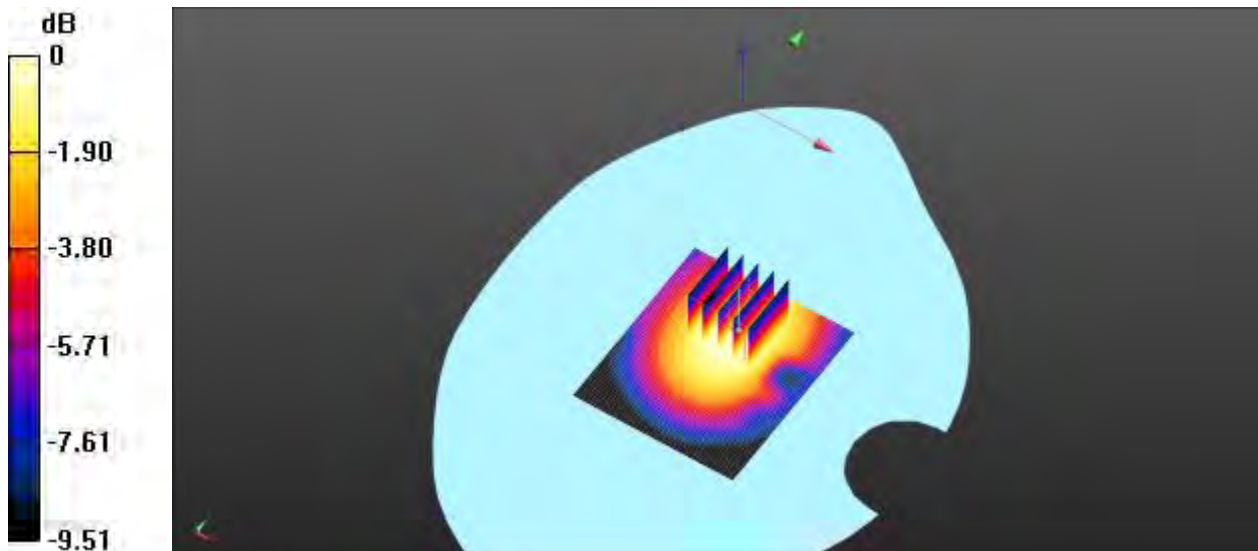

0 dB = 0.137 W/kg = -8.63 dBW/kg

MEAS.13 Body Plane with Right Edge on Middle Channel in CDMA EVDO RelA mode

Date/Time: 9/22/2015

Communication System Band: ECDO; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5\text{MHz}$; $\sigma = 0.95\text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/EVDO Rel A Body Right /Area Scan (71x81x1):

Interpolated grid: $dx=1.200\text{ mm}$, $dy=1.200\text{ mm}$

Maximum value of SAR (interpolated) = 0.197 W/kg

Configuration/EVDO Rel A Body Right /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.91 V/m ; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.182 W/kg ; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

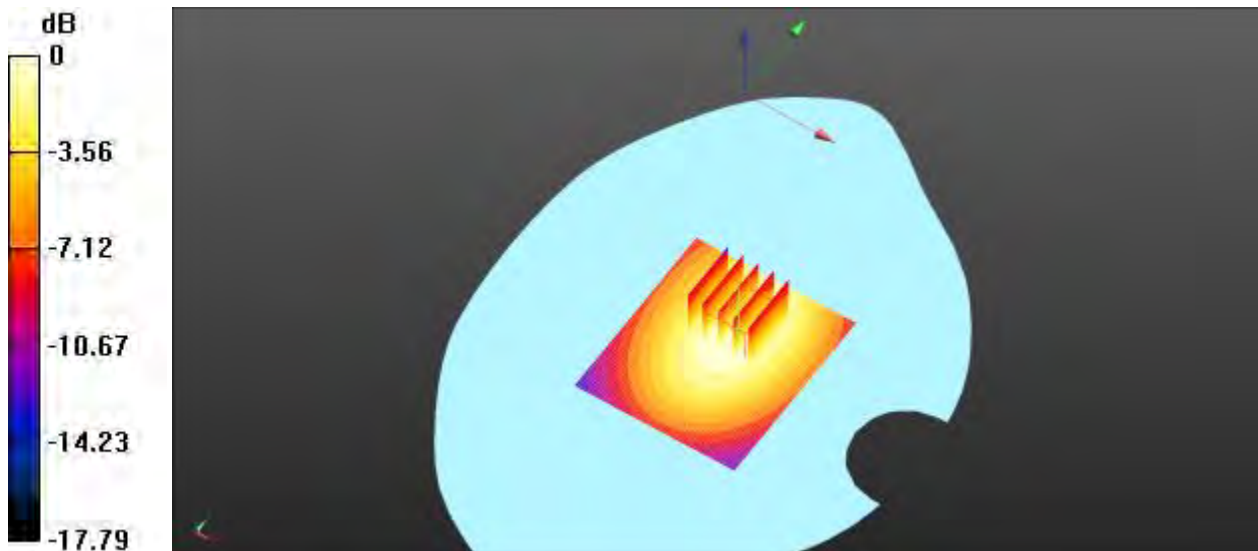

0 dB = 0.193 W/kg = -7.14 dBW/kg

MEAS.14 Body Plane with Bottom Edge on Middle Channel in CDMA EVDO

RelA mode

Date/Time: 9/22/2015

Communication System Band: ECDO; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5\text{MHz}$; $\sigma = 0.95\text{ S/m}$; $\epsilon_r = 55.96$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(9.97, 9.97, 9.97); Calibrated: 12/2/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 12/1/2014
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/EVDO Rel A Body Bottom /Area Scan (71x81x1):

Interpolated grid: $dx=1.200\text{ mm}$, $dy=1.200\text{ mm}$

Maximum value of SAR (interpolated) = 0.0559 W/kg

Configuration/EVDO Rel A Body Bottom /Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.983 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0900 W/kg

SAR(1 g) = 0.048 W/kg ; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0554 W/kg

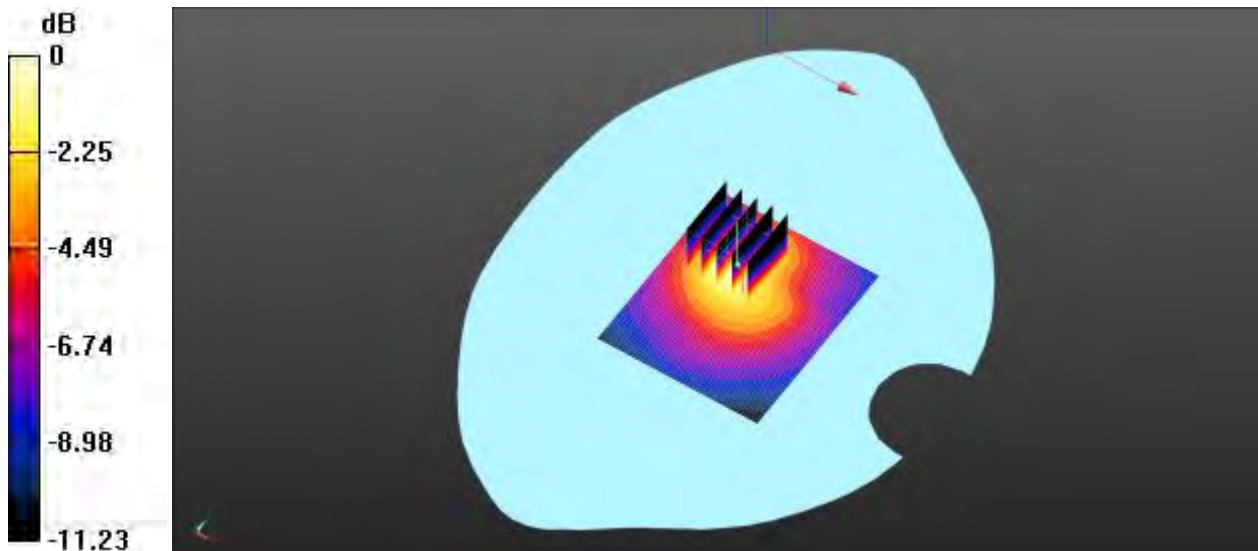

0 dB = 0.0559 W/kg = -12.53 dBW/kg

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document “Annex No.:BL-SZ1590048-AW.pdf”.

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document “Annex No.:BL-SZ1590048-AS.pdf”.

ANNEX F CALIBRATION REPORT

F.1 E-Field Probe

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Dgiele (Vitec)**

Certificate No: **EX3-7340_Dec14**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7340**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **December 2, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	03-Apr-14 (No. 217-01911)	Apr-15
Power sensor E4412A	MY41498087	03-Apr-14 (No. 217-01911)	Apr-15
Reference 3 dB Attenuator	SN: S5054 (3c)	03-Apr-14 (No. 217-01915)	Apr-15
Reference 20 dB Attenuator	SN: S5277 (20x)	03-Apr-14 (No. 217-01919)	Apr-15
Reference 30 dB Attenuator	SN: S5129 (30b)	03-Apr-14 (No. 217-01920)	Apr-15
Reference Probe ES3DV2	SN: 3013	30-Dec-13 (No. ES3-3013_Dec13)	Dec-14
DAE4	SN: 660	13-Dec-13 (No. DAE4-660_Dec13)	Dec-14
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by:	Name Leif Klysner	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 
Issued: December 2, 2014			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:7340

December 2, 2014

Probe EX3DV4

SN:7340

Manufactured: July 23, 2014
Calibrated: December 2, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:7340

December 2, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7340

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.53	0.49	0.46	± 10.1 %
DCP (mV) ^B	100.7	91.3	102.1	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	166.9	±3.3 %
		Y	0.0	0.0	1.0		162.2	
		Z	0.0	0.0	1.0		149.8	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4– SN:7340

December 2, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7340

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth (mm) ^G	Unct. (k=2)
835	41.5	0.90	9.91	9.91	9.91	0.52	0.80	± 12.0 %
1750	40.1	1.37	9.13	9.13	9.13	0.55	0.75	± 12.0 %
1900	40.0	1.40	8.77	8.77	8.77	0.46	0.78	± 12.0 %
2450	39.2	1.80	7.83	7.83	7.83	0.41	0.86	± 12.0 %
2600	39.0	1.96	7.64	7.64	7.64	0.41	0.87	± 12.0 %
5200	36.0	4.66	5.28	5.28	5.28	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.75	4.75	4.75	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.72	4.72	4.72	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4– SN:7340

December 2, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7340

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
835	55.2	0.97	9.97	9.97	9.97	0.69	0.68	± 12.0 %
1750	53.4	1.49	8.53	8.53	8.53	0.41	0.93	± 12.0 %
1900	53.3	1.52	8.18	8.18	8.18	0.80	0.58	± 12.0 %
2450	52.7	1.95	7.55	7.55	7.55	0.80	0.50	± 12.0 %
2600	52.5	2.16	7.11	7.11	7.11	0.80	0.50	± 12.0 %
5200	49.0	5.30	4.62	4.62	4.62	0.45	1.90	± 13.1 %
5600	48.5	5.77	4.10	4.10	4.10	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.31	4.31	4.31	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:7340

December 2, 2014

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)


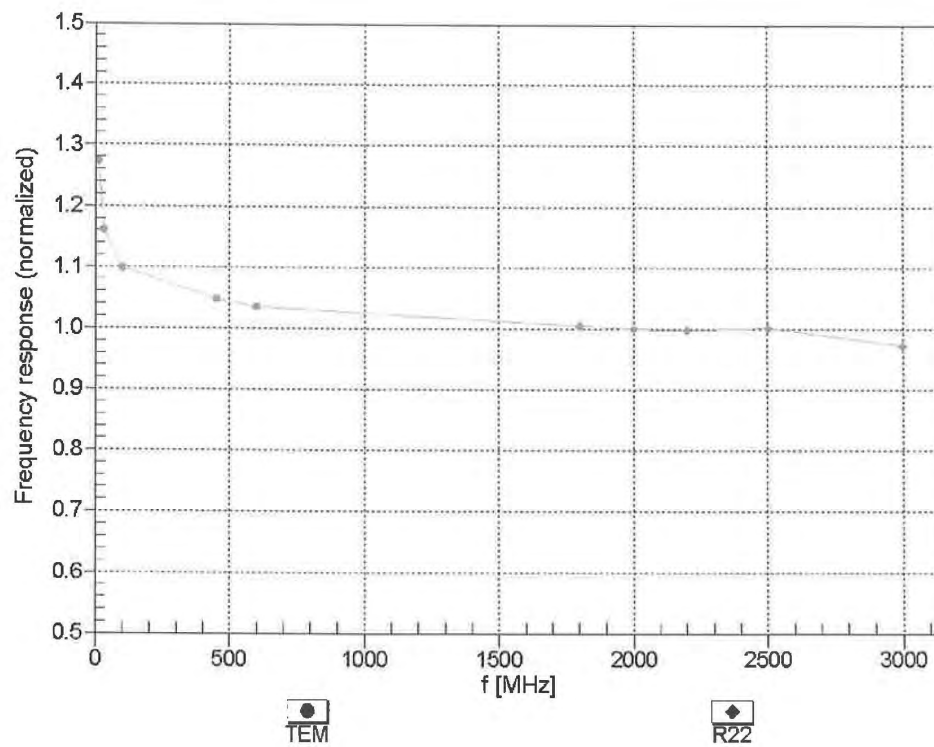


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX3DV4— SN:7340

December 2, 2014


Receiving Pattern (ϕ), $\theta = 0^\circ$

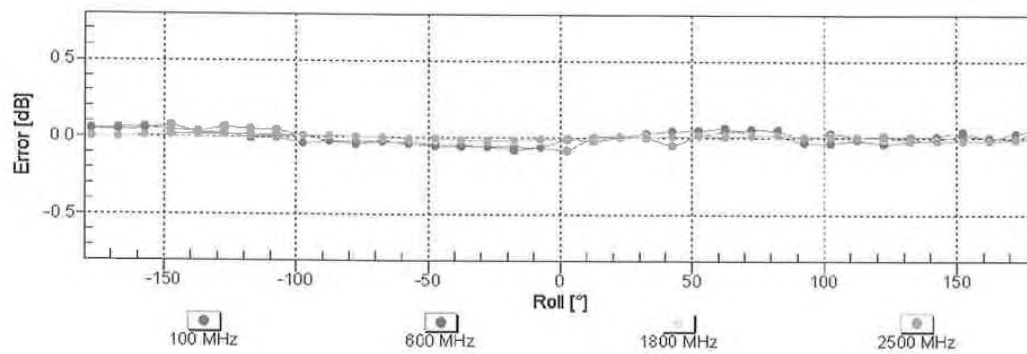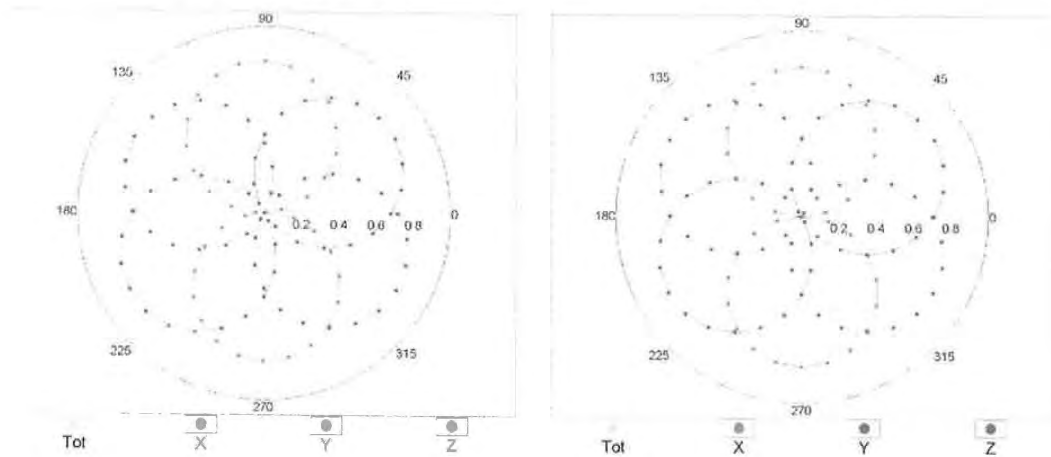 $f=600\text{ MHz, TEM}$
 $f=1800\text{ MHz, R22}$

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4- SN:7340

December 2, 2014

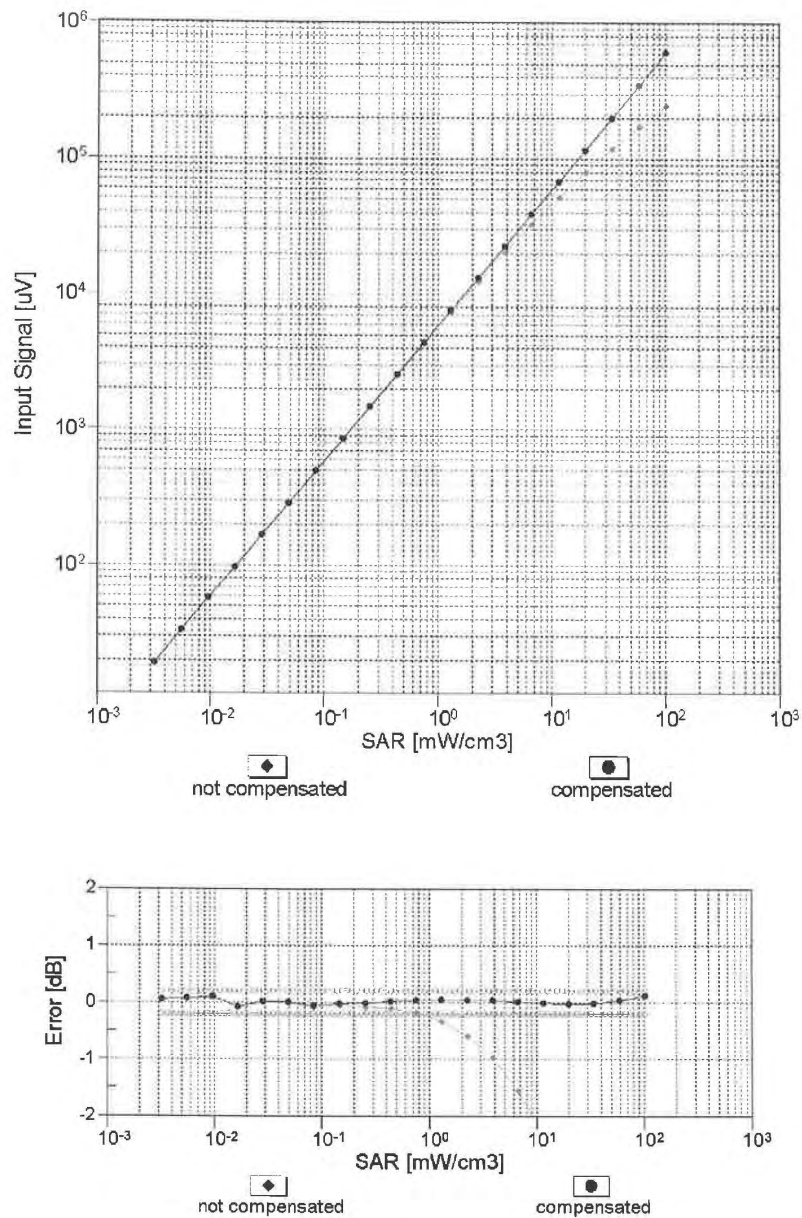Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)




Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)


EX3DV4- SN:7340

December 2, 2014

Conversion Factor Assessment

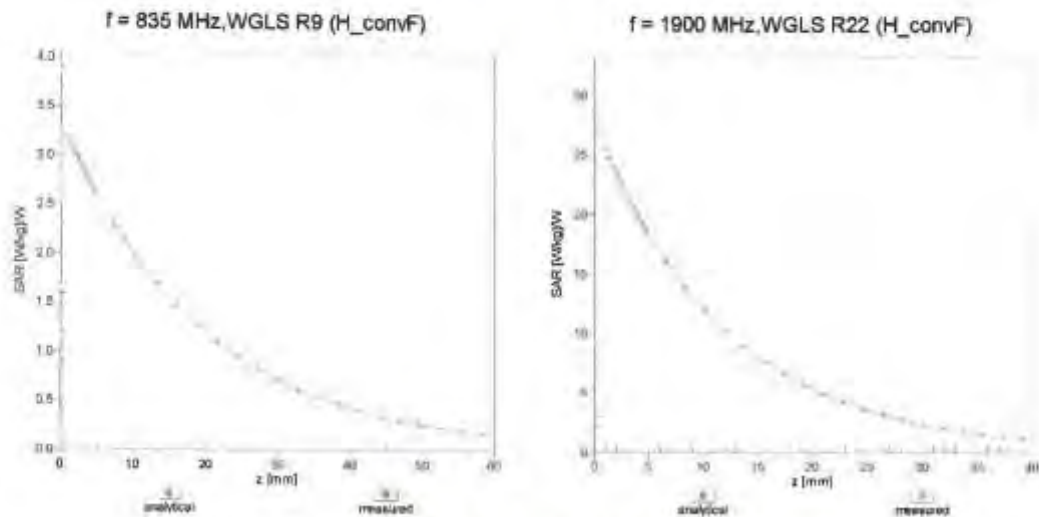

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

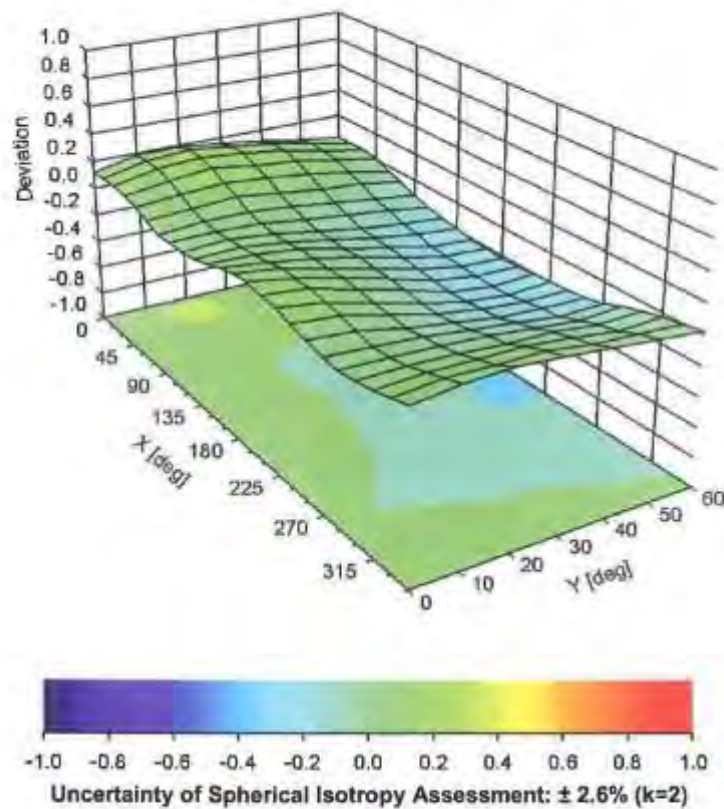

EX3DV4- SN:7340

December 2, 2014

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7340

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-47.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

F.2 Data Acquisition Electronics

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Dgieie (Vitec)**

Certificate No: **DAE4-1454_Dec14**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BM - SN: 1454**

Calibration procedure(s) **QA CAL-06.v28**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **December 01, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	03-Oct-14 (No:15573)	Oct-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	07-Jan-14 (in house check)	In house check: Jan-15
Calibrator Box V2.1	SE UMS 006 AA 1002	07-Jan-14 (in house check)	In house check: Jan-15

Calibrated by: **Name**
Dominique Steffen **Function**
Technician

Signature



Approved by: **Fin Bornholt** **Deputy Technical Manager**



Issued: December 1, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.134 $\pm$ 0.02% (k=2)	403.641 $\pm$ 0.02% (k=2)	403.713 $\pm$ 0.02% (k=2)
Low Range	4.01178 $\pm$ 1.50% (k=2)	3.98989 $\pm$ 1.50% (k=2)	3.99971 $\pm$ 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	316.5 ° $\pm$ 1 °
---	-------------------

Appendix (Additional assessments outside the scope of SCS108)

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200031.80	-0.26	-0.00
Channel X + Input	20001.23	-2.68	-0.01
Channel X - Input	-20003.35	1.70	-0.01
Channel Y + Input	200039.44	7.23	0.00
Channel Y + Input	20000.28	-3.57	-0.02
Channel Y - Input	-20006.44	-1.22	0.01
Channel Z + Input	200040.26	7.92	0.00
Channel Z + Input	20000.97	-2.84	-0.01
Channel Z - Input	-20007.52	-2.33	0.01

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2000.65	0.03	0.00
Channel X + Input	200.83	0.05	0.02
Channel X - Input	-198.91	0.45	-0.23
Channel Y + Input	2000.46	-0.10	-0.01
Channel Y + Input	199.94	-0.66	-0.33
Channel Y - Input	-199.92	-0.45	0.23
Channel Z + Input	2000.59	0.10	0.01
Channel Z + Input	199.12	-1.46	-0.73
Channel Z - Input	-200.88	-1.43	0.72

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-14.55	-16.51
	- 200	17.71	16.60
Channel Y	200	-22.05	-22.66
	- 200	22.22	21.96
Channel Z	200	-12.87	-12.55
	- 200	10.00	9.91

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	-2.55	-2.28
Channel Y	200	4.25	-	-1.65
Channel Z	200	9.93	2.36	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16115	16385
Channel Y	16297	16505
Channel Z	16059	16142

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	-0.24	-1.34	0.92	0.37
Channel Y	-0.07	-1.28	0.82	0.40
Channel Z	-1.81	-2.74	-0.39	0.48

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

F.3 835MHz Dipole

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Dgieie (Vitec)**

Certificate No: **D835V2-4d187_Nov14**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d187**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **November 26, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	03-Apr-14 (No. 217-01918)	Apr-15
Type-N mismatch combination	SN: 5047.2 / 06327	03-Apr-14 (No. 217-01921)	Apr-15
Reference Probe ES3DV3	SN: 3205	30-Dec-13 (No. ES3-3205_Dec13)	Dec-14
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** **Function** **Signature**
Jeton Kastrati **Laboratory Technician** 

Approved by: **Katja Pokovic** **Technical Manager** 

Issued: November 28, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D835V2-4d187_Nov14

Page 1 of 8

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.2 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.31 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.15 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.50 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.95 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.5 $\pm$ 6 %	1.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.37 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.17 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.04 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS108)**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	51.5 Ω - 3.6 j Ω
Return Loss	- 28.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.9 Ω - 4.9 j Ω
Return Loss	- 24.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.394 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 24, 2014

DASY5 Validation Report for Head TSL

Date: 26.11.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d187

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.22, 6.22, 6.22); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.30 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 2.31 W/kg; SAR(10 g) = 1.5 W/kg

Maximum value of SAR (measured) = 2.71 W/kg

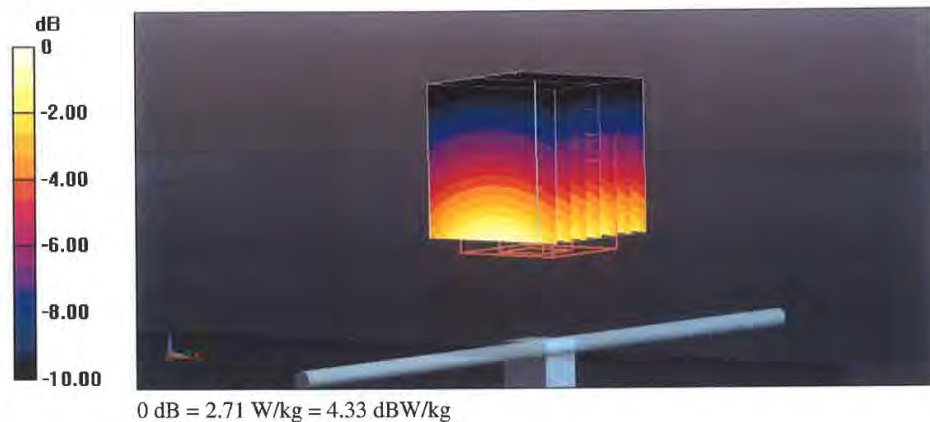

Impedance Measurement Plot for Head TSL

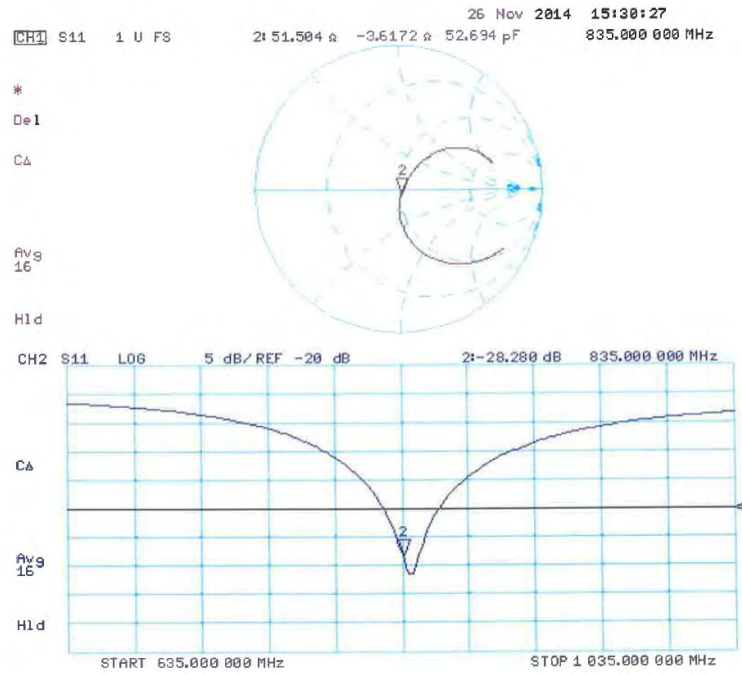

DASY5 Validation Report for Body TSL

Date: 26.11.2014

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d187

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.09, 6.09, 6.09); Calibrated: 30.12.2013;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.07 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 3.48 W/kg

SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 2.77 W/kg

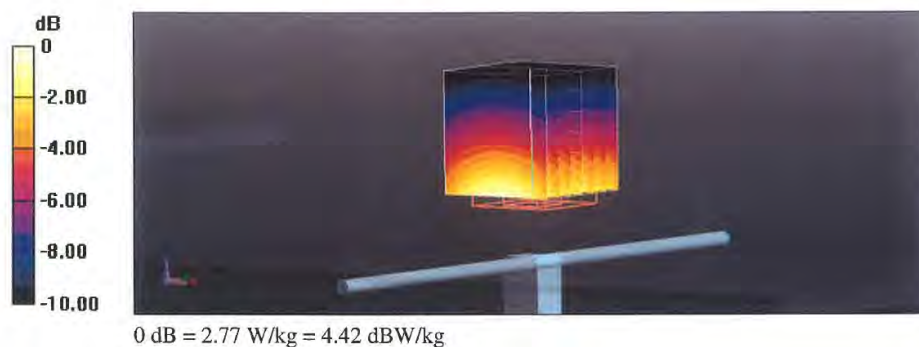

Impedance Measurement Plot for Body TSL

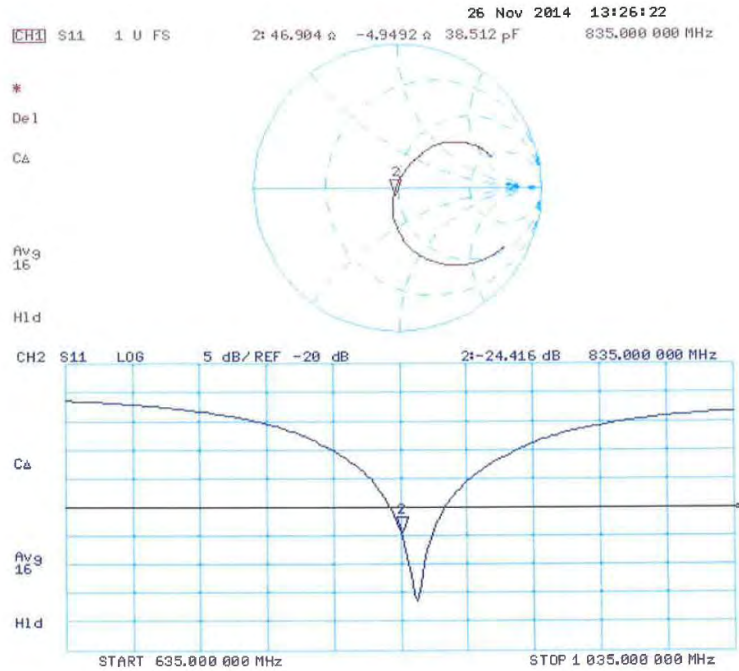

--END OF REPORT--