

FCC TEST REPORT
For
SHENZHEN KINGFEI Technologies Co.,Ltd.
MediaSwitch/SmartPanel
Test Model: SmartPanel 62
List Model No.: MediaSwitch 6S

Prepared for : SHENZHEN KINGFEI Technologies Co.,Ltd.
Address : 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE,
NANSHAN, SHENZHEN, GUANGDONG, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 17, 2017
Number of tested samples : 1
Serial number : Prototype
Date of Test : April 17, 2017~July 10, 2017
Date of Report : July 10, 2017

FCC TEST REPORT**FCC CFR 47 PART 15C(15.231): 2014****Report Reference No. : LCS170417060AE**

Date of Issue : July 10, 2017

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards Partial application of Harmonised standards Other standard testing method **Applicant's Name..... : SHENZHEN KINGFEI Technologies Co.,Ltd.**

Address : 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE, NANSHAN, SHENZHEN, GUANGDONG, China

Test Specification

Standard : FCC CFR 47 PART 15 Subpart C: 2014; ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : MediaSwitch/SmartPanel

Trade Mark : N/A

Test Model : MediaSwitch 6S; SmartPanel 62


Ratings : AC 100V-240V, 50/60Hz, 6A Max

Result : Positive**Compiled by:**

Ada Liang/ File administrators

Supervised by:

Dick Su/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC/IC TEST REPORT

Test Report No. : LCS170417060AE	<u>July 10, 2017</u> Date of issue
---	---------------------------------------

EUT..... : MediaSwitch/SmartPanel

Type / Model..... : MediaSwitch 6S; SmartPanel 62

Applicant..... : SHENZHEN KINGFEI Technologies Co.,Ltd.

Address..... : 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE,
NANSHAN, SHENZHEN, GUANGDONG, China

Telephone..... : /

Fax..... : /

Manufacturer..... : SHENZHEN KINGFEI Technologies Co.,Ltd.

Address..... : 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE,
NANSHAN, SHENZHEN, GUANGDONG, China

Telephone..... : /

Fax..... : /

Factory..... : SHENZHEN KINGFEI Technologies Co.,Ltd.

Address..... : 2-20C HAIHUAJU, The WORLD GARDEN, SHAHE,
NANSHAN, SHENZHEN, GUANGDONG, China

Telephone..... : /

Fax..... : /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	July 10, 2017	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. OBJECTIVE	7
1.3. ENVIRONMENTAL CONDITIONS	7
1.4. SUPPORT EQUIPMENT LIST	8
1.5. EXTERNAL I/O PORT	8
1.6. DESCRIPTION OF TEST FACILITY	8
1.7. STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
2. TEST METHODOLOGY	9
2.1. EUT CONFIGURATION	9
2.2. EUT EXERCISE	9
2.3. GENERAL TEST PROCEDURES	9
2.4. INSTRUMENT CALIBRATION	9
2.5. TEST MODE	10
3. SYSTEM TEST CONFIGURATION	11
3.1. JUSTIFICATION	11
3.2. EUT EXERCISE SOFTWARE	11
3.3. SPECIAL ACCESSORIES	11
3.4. BLOCK DIAGRAM/SCHEMATICS	11
3.5. EQUIPMENT MODIFICATIONS	11
3.6. TEST SETUP	11
4. SUMMARY OF TEST RESULTS.....	12
5. TEST ITEMS AND RESULTS.....	13
5.1. TRANSMISSION CEASE TIME	13
5.2. TRANSMITTER FIELD STRENGTH OF EMISSIONS	15
5.3. AC POWER LINE CONDUCTED EMISSIONS	26
5.4. 20dB BANDWIDTH EMISSIONS	29
5.5. DUTY CYCLE	31
5.6. ANTENNA REQUIREMENT	35
6. LIST OF MEASURING EQUIPMENTS.....	36
7. PHOTOGRAPHS OF TEST SETUP	37

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: MediaSwitch/SmartPanel
Test Model	: SmartPanel 62
List Model No.	: MediaSwitch 6S
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Power Supply	: AC 100V-240V, 50/60Hz, 6A Max
Hardware version	: V37
Software version	: Android 4.x/5.x
Bluetooth Operation frequency	: 2402MHz-2480MHz
Bluetooth Version	: V4.0
Bluetooth Channel Number	: 79 Channels for Bluetooth V3.0(DSS) 40 Channels for Bluetooth 4.0(DTS)
Bluetooth Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V3.0(DSS) GFSK for Bluetooth V4.0(DTS)
Antenna Description	: Internal Antenna, 1.0dBi(Max.)
WLAN	: Supported 802.11b/802.11g/802.11n
WLAN FCC Operation Frequency	: IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz
WLAN Channel Number	: 11 Channels for WIFI 20MHz Bandwidth(802.11b/g/n-HT20) 7 Channels for WIFI 40MHz Bandwidth(802.11n-HT40)
WLAN Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)
Antenna Description	: Internal Antenna, 1.0dBi(Max.)
Transmit Frequency	: 315MHz
Number of Channels	: 6(314.60MHz, 314.80MHz, 315.00MHz, 315.20MHz, 315.40MHz, 315.60MHz)
Modulation Type	: GFSK
Antenna Description	: Internal Antenna, 2.0dBi(Max.)

1.2. Objective

The primary objective of the manufacturer is compliance with Subpart C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators and Industry Canada RSS-210 for Low Power, License-Exempt Radio Communication Devices. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules and Industry Canada Radio Standards Procedure RSP-100.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

1.3. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106kPa

1.4. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

1.5. External I/O Port

I/O Port Description	Quantity	Cable
TF/Micro-SD Card Slot	1	--
USB	2	--

1.6. Description of Test Facility

Site Description

EMC Lab.

- : CNAS Registration Number. is L4595.
- FCC Registration Number. is 899208.
- Industry Canada Registration Number. is 9642A-1.
- ESMD Registration Number. is ARCB0108.
- UL Registration Number. is 100571-492.
- TUV SUD Registration Number. is SCN1081.
- TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.7. Statement of The Measurement Uncertainty

ISO Guide 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±4.20dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the normal operating mode. The TX frequency that was fixed which was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.231 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions(N/A)

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10:

2.4. Instrument Calibration

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

2.5. Test Mode

The EUT has been tested under engineering mode. Software supplied by the applicant to control the EUT in continuously transmitting and select each of channel.

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The worst case of X axis was reported.

***Note: The active time of the transmitter is depended on the time how long the user pressed the button.

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

STM32CODE-MS6SSP62-V2

3.3. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	ADAPTER for notebook	ADP-90DD B	36001941	FCC
Lenovo	Notebook	B470	WB05067151	FCC

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Bands Of Operation	Compliant
§15.209	Radiated Emission Limits, General Requirements.	Compliant
§15.231 (b)	Field Strength Of Fundamental And Harmonics	Compliant
§15.231 (c)	20dB Bandwidth	Compliant
§15.231 (a)(1)	Transmission Cease Time	Compliant
§15.207	Conducted Emissions	Compliant

Note: All buttons have been taken into consideration and only worst case reported.

5. TEST ITEMS AND RESULTS

5.1. Transmission Cease Time

FCC 15.231 (a) (1)

5.1.1. Limit


A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

5.1.2. Test Procedure


Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. The antenna was all opened.

5.1.3. Test Results


Frequency (MHz)	Deactivation Time (s)	Limit: not more than 5 seconds of being released (s)	Conclusion
314.6	0.0313	5	PASS
315	0.0313	5	PASS
315.6	0.0314	5	PASS

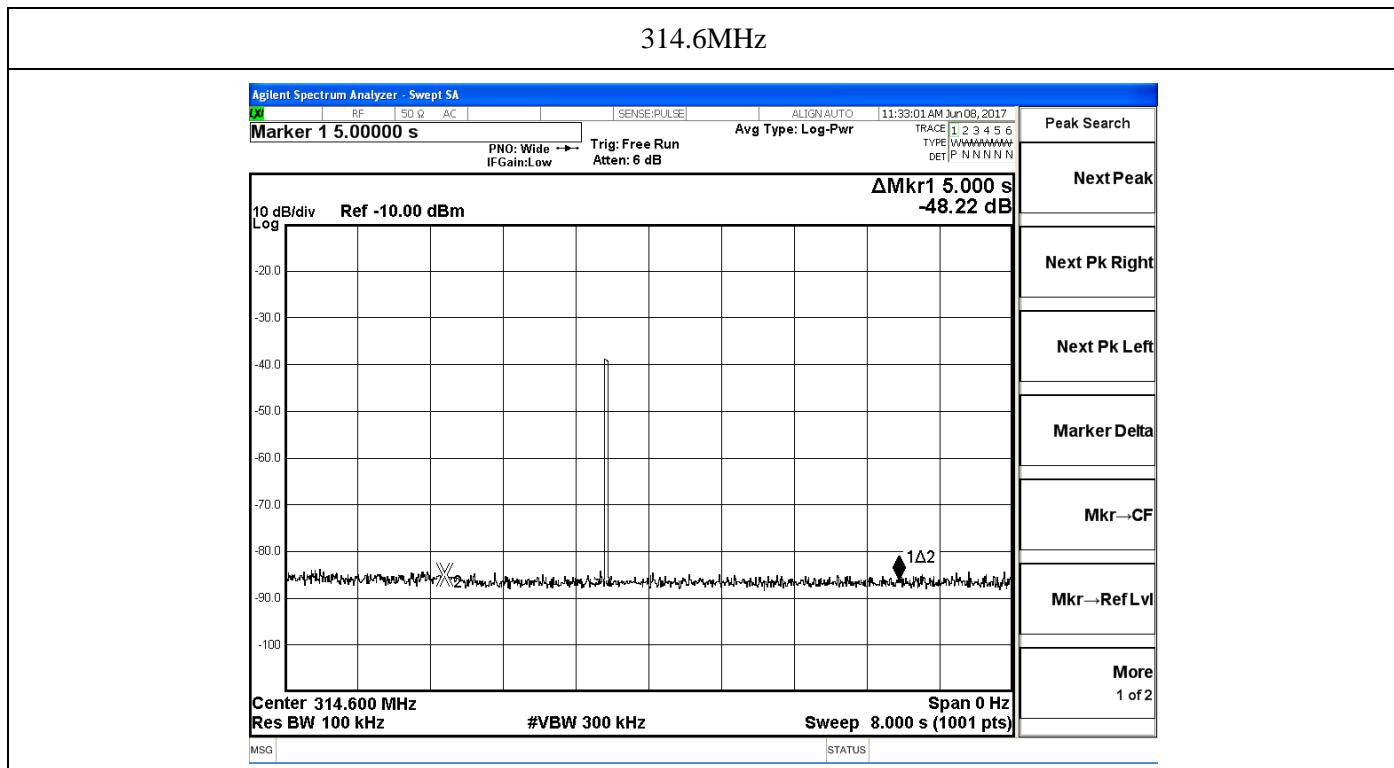

315MHz

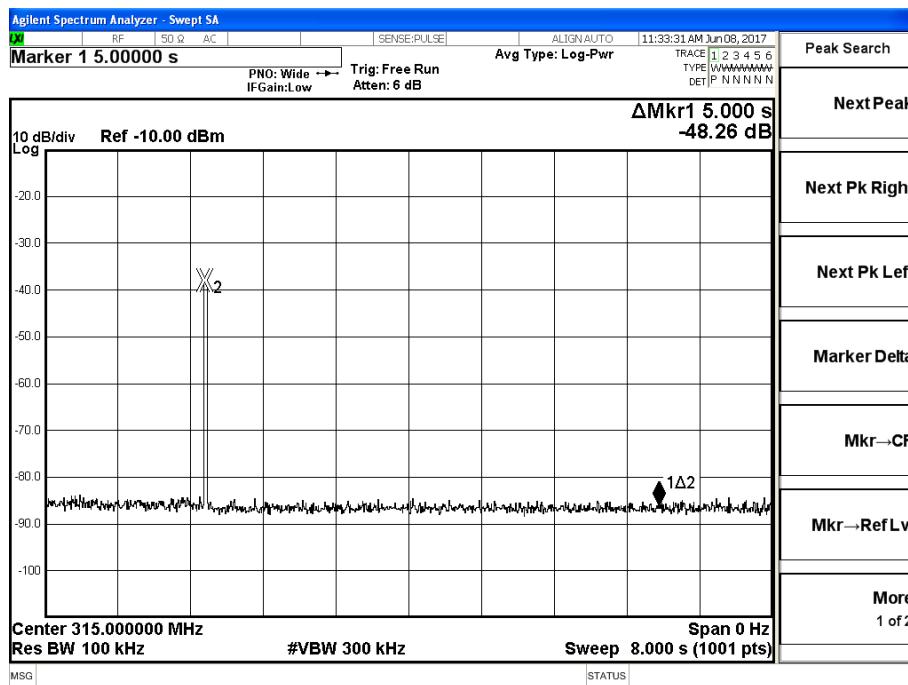

315.6MHz

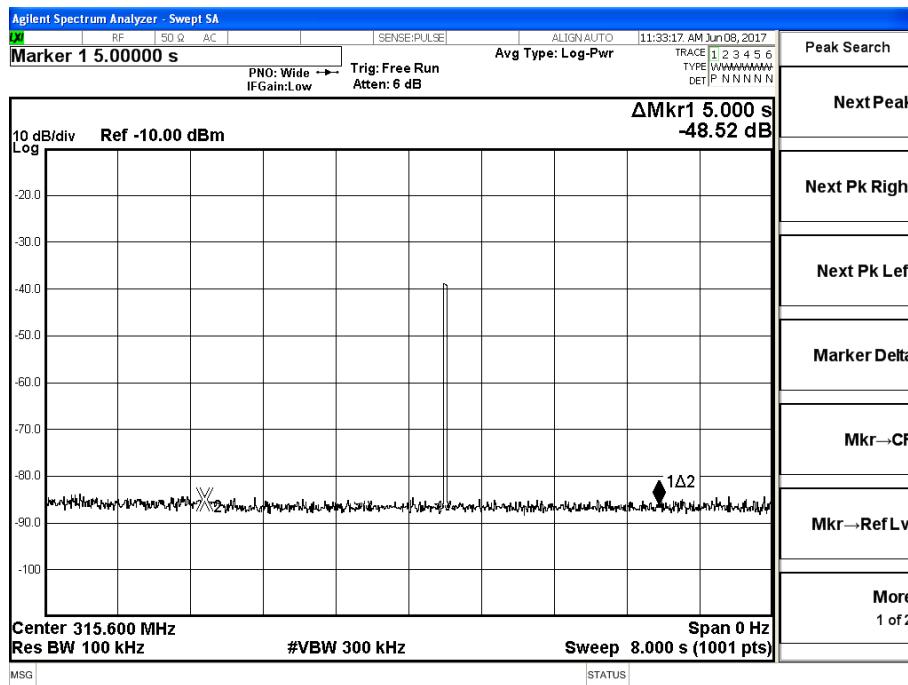

5.2. Transmitter Field Strength of Emissions

5.2.1. Limit

FCC §15.231 (b)

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (microvolt/meter)	Field Strength of spurious emissions (microvolt/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,370	125 to 375
174-260	3,750	375
260-470	3,750 to 12,500	375 to 1,250
Above 470	12,500	1,250

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

5.2.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.2.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 12.75 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum found antenna polarisation and turntable position of the premeasurement the software maximizes the peaks by rotating the turntable position (0° to 360°). This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps). This procedure is repeated for both antenna polarisations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 12.75 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.



Premeasurement:


- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and RMS detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.2.4. Test Setup Layout

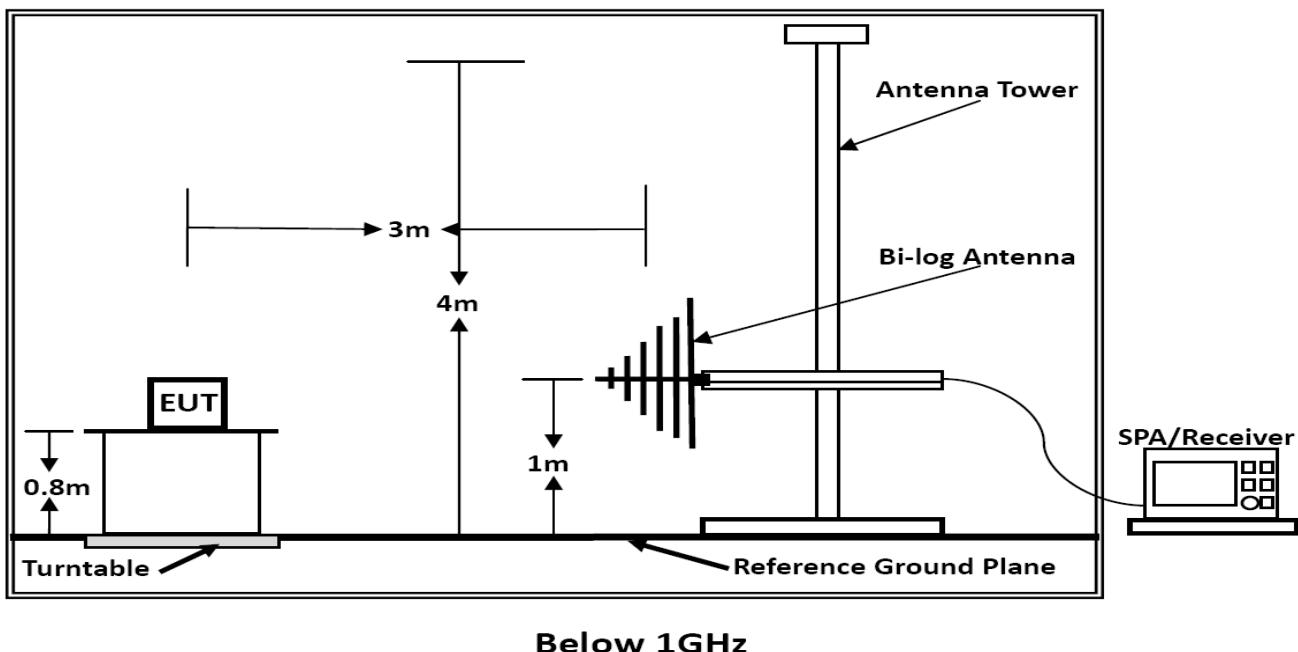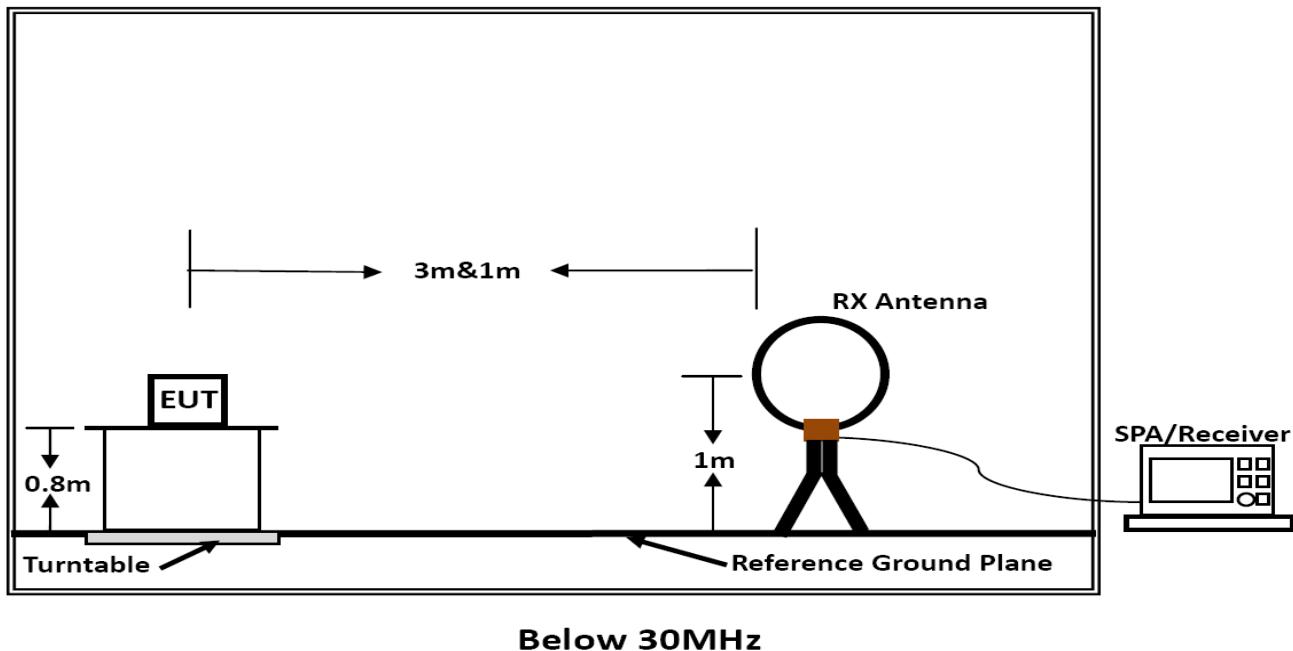

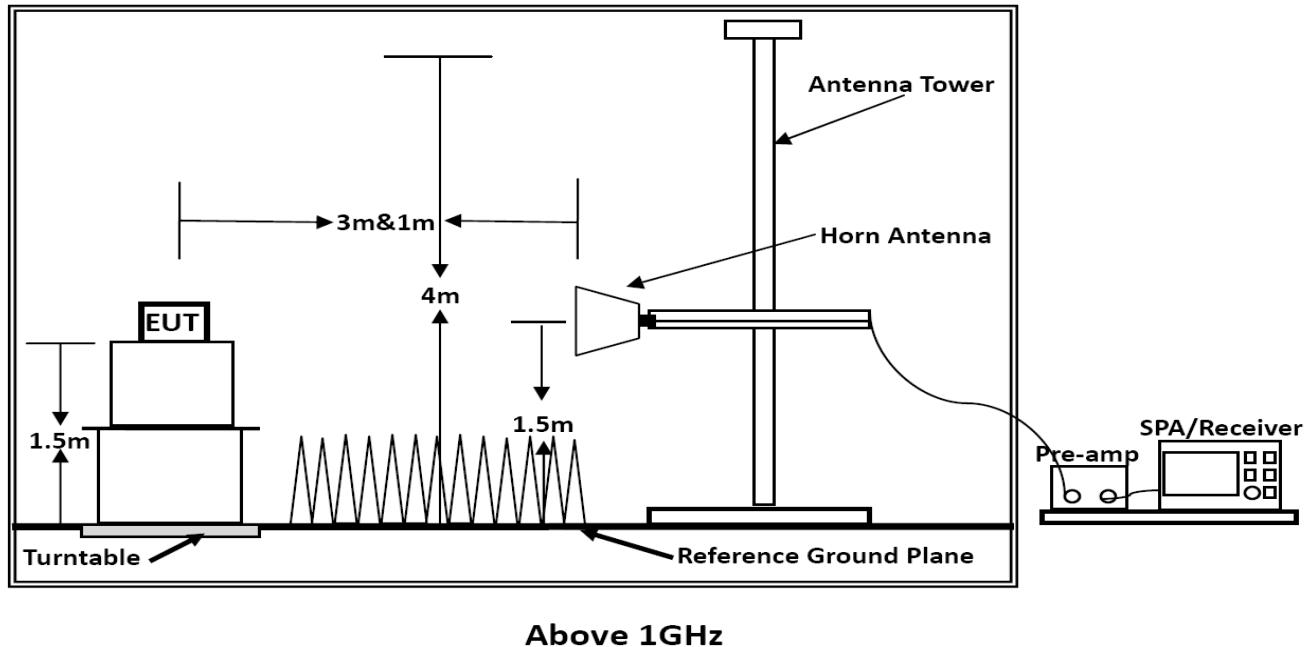

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.3°C	Humidity	48.3%
Test Engineer	Chaz Liu	Configurations	Automatically

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:


The low frequency, which started from 9KHz to 30MHz, was pre-scan and the result was 20dB lower than the limit line per 15.31(o) was not reported.

Note: Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.2.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.3°C	Humidity	48.3%
Test Engineer	CHAZ LIU	Configurations	Radiated Emissions

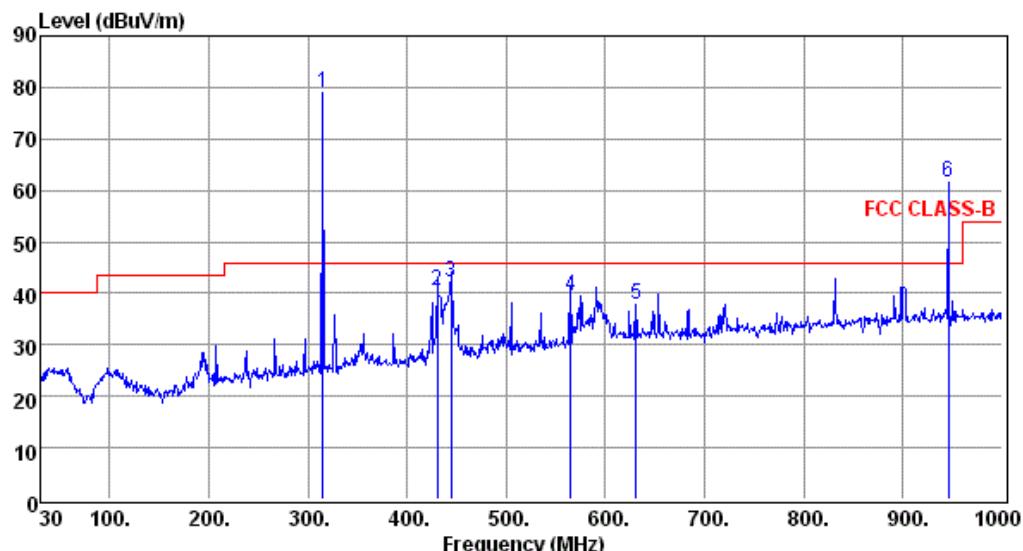

pol: HORIZONTAL

Freq	Reading	CabLos	Antfac	Measured		Limit	Over	Remark	
				MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m
1	315.00	64.66	1.09	13.26	79.01	46.00	33.01	Peak	
2	430.61	23.79	1.28	15.52	40.59	46.00	-5.41	QP	
3	444.19	25.30	1.25	15.57	42.12	46.00	-3.88	QP	
4	564.47	20.31	1.47	17.79	39.57	46.00	-6.43	QP	
5	630.00	17.57	1.60	18.56	37.73	46.00	-8.27	QP	
6	945.00	38.39	1.95	21.39	61.73	46.00	15.73	Peak	


Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that ate 20db blow the official limit are not reported

Fundamental and Harmonics Average Result

Frequency (MHz)	Peak Level (dB μ V/m)	AV Factor(dB μ V/m) (see Section 5.5)	Average Level (dB μ V/m)	Limit(dB μ V/m) (average)	Conclusion
315.00	79.01	-10.06	68.95	75.62	PASS
945.00	61.73	-10.06	51.67	55.62	PASS

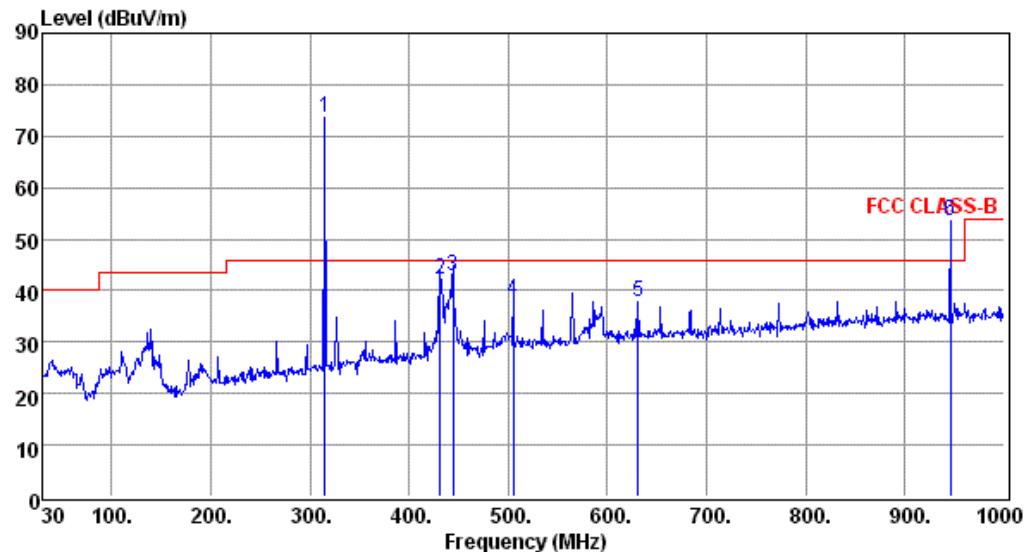

pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	315.00	59.23	1.09	13.26	73.58	46.00	27.58	Peak
2	431.58	25.42	1.28	15.52	42.22	46.00	-3.78	QP
3	444.19	25.88	1.25	15.57	42.70	46.00	-3.30	QP
4	505.30	20.17	1.29	16.68	38.14	46.00	-7.86	QP
5	630.00	17.69	1.60	18.56	37.85	46.00	-8.15	QP
6	945.00	30.21	1.95	21.39	53.55	46.00	7.55	Peak

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the offical limit are not reported

Fundamental and Harmonics Average Result					
Frequency (MHz)	Peak Level (dB μ V/m)	AV Factor(dB μ V/m) (see Section 5.5)	Average Level (dB μ V/m)	Limit(dB μ V/m) (average)	Conclusion
315.00	73.58	-10.06	63.52	75.62	PASS
945.00	53.55	-10.06	43.49	55.62	PASS

5.2.8. Results of Radiated Emissions (Above 1GHz, Worst case on channel 314.6MHz)

Temperature	24.3°C	Humidity	48.3%
Test Engineer	CHAZ LIU	Configurations	Harmonics Emissions/ Spurious Emission

Peak Value:

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over limit (dB)	Polarization
1260.11	45.61	74	-28.39	Horizontal
1575.26	46.68	74	-27.32	Horizontal
1890.33	47.27	74	-26.73	Horizontal
1260.11	47.33	74	-26.67	Vertical
1575.26	47.00	74	-27.00	Vertical
1890.33	47.49	74	-26.51	Vertical

Average Value:

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over limit (dB)	Polarization
1260.11	35.55	54	-18.45	Horizontal
1575.26	36.62	54	-17.38	Horizontal
1890.33	37.21	54	-16.79	Horizontal
1260.11	37.27	54	-16.73	Vertical
1575.26	36.94	54	-17.06	Vertical
1890.33	37.43	54	-16.57	Vertical

1. Measuring frequencies from 9k~10th harmonic (ex. 4GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 4GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.3. AC Power line conducted emissions


5.3.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Decreasing linearly with the logarithm of the frequency

5.3.2 Block Diagram of Test Setup

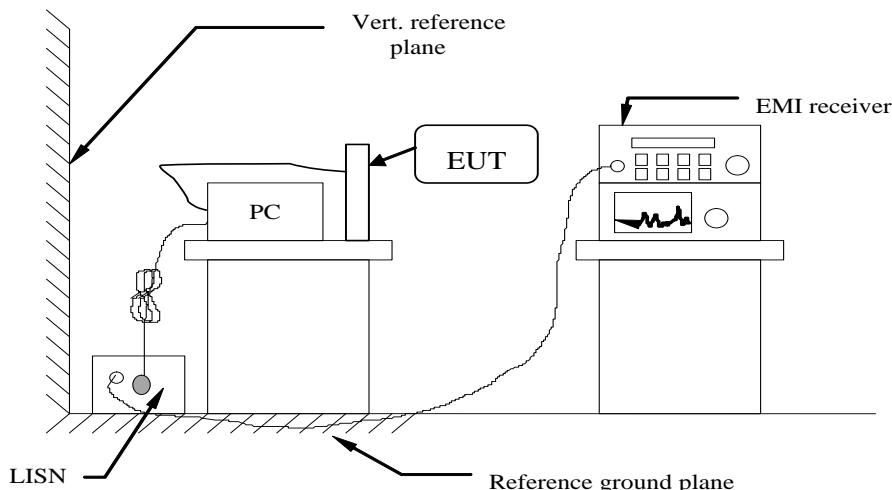


5.3.3 Test Results

PASS.

The test data please refer to following page.


Test Results for AC 120V/60Hz @ GFSK (worst case)

Temperature	23.7°C	Humidity	51.3%
Test Engineer	Chaz Liu	Configurations	BT

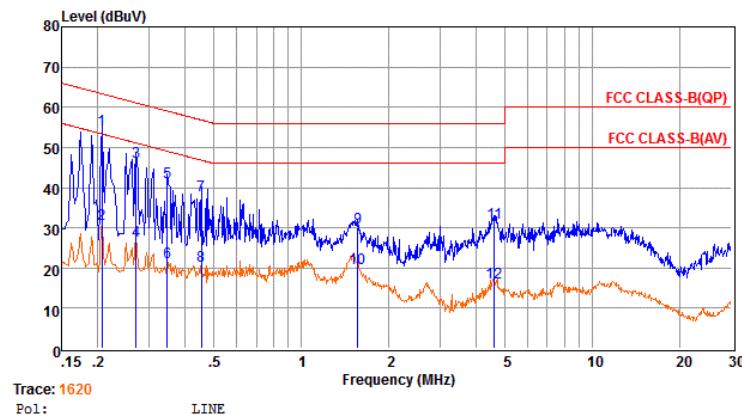

	Freq	Reading	LISN	Fac	Cab	Los	Aux2	Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dBuV	dB		
1	0.21	34.79	9.63	0.03	10.00	54.45	63.36	-8.91	QP			
2	0.21	11.21	9.63	0.03	10.00	30.87	53.36	-22.49	Average			
3	0.27	26.81	9.63	0.03	10.00	46.47	61.12	-14.65	QP			
4	0.27	7.15	9.63	0.03	10.00	26.81	51.11	-24.30	Average			
5	0.35	21.72	9.62	0.03	10.00	41.37	59.05	-17.68	QP			
6	0.35	1.73	9.62	0.03	10.00	21.38	49.04	-27.66	Average			
7	0.45	18.35	9.62	0.04	10.00	38.01	56.80	-18.79	QP			
8	0.45	0.72	9.62	0.04	10.00	20.38	46.80	-26.42	Average			
9	1.56	10.45	9.64	0.05	10.00	30.14	56.00	-25.86	QP			
10	1.56	0.35	9.64	0.05	10.00	20.04	46.00	-25.96	Average			
11	4.60	11.41	9.65	0.06	10.00	31.12	56.00	-24.88	QP			
12	4.60	-3.48	9.65	0.06	10.00	16.23	46.00	-29.77	Average			

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

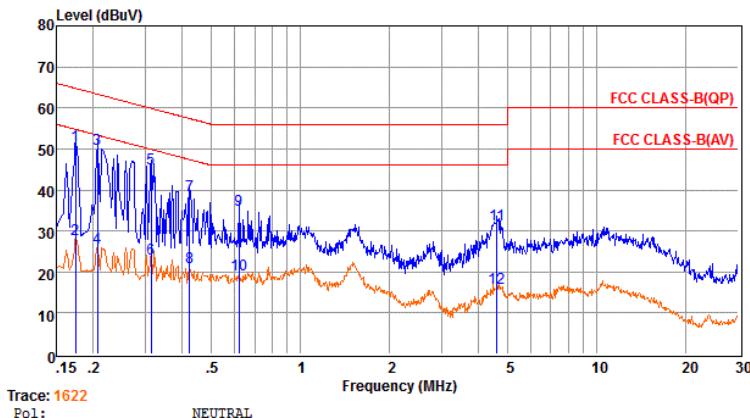


	Freq	Reading	LISN	Fac	Cab	Los	Aux2	Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dBuV	dB		
1	0.17	31.15	9.64	0.02	10.00	50.81	64.77	-13.96	QP			
2	0.17	8.20	9.64	0.02	10.00	27.86	54.76	-26.90	Average			
3	0.21	30.45	9.59	0.03	10.00	50.07	63.36	-13.29	QP			
4	0.21	6.17	9.59	0.03	10.00	25.79	53.36	-27.57	Average			
5	0.31	25.67	9.60	0.03	10.00	45.30	59.88	-14.58	QP			
6	0.31	3.65	9.60	0.03	10.00	23.28	49.88	-26.60	Average			
7	0.42	19.05	9.61	0.04	10.00	38.70	57.42	-18.72	QP			
8	0.42	1.55	9.61	0.04	10.00	21.20	47.42	-26.22	Average			
9	0.62	15.33	9.63	0.04	10.00	35.00	56.00	-21.00	QP			
10	0.62	-0.43	9.63	0.04	10.00	19.24	46.00	-26.76	Average			
11	4.60	11.83	9.66	0.06	10.00	31.55	56.00	-24.45	QP			
12	4.60	-3.65	9.66	0.06	10.00	16.07	46.00	-29.93	Average			

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.


Test Results for AC 240V/50Hz @ GFSK (worst case)

Temperature	23.7 °C	Humidity	51.3%
Test Engineer	Chaz Liu	Configurations	BT

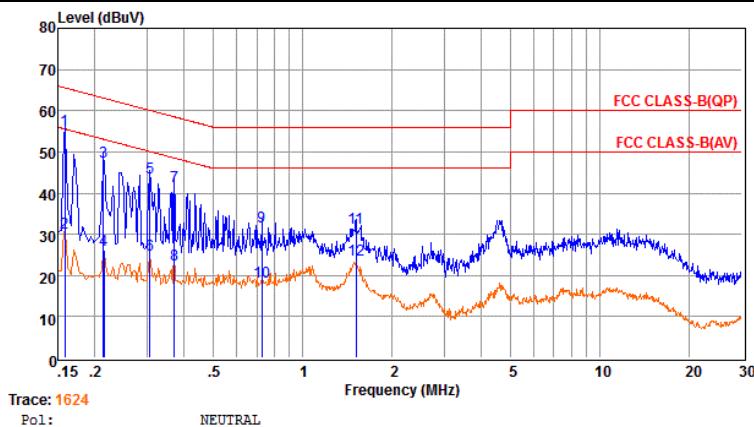

Freq	Reading	LISN	Fac	Cab	Los	Aux2	Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.16	35.56	9.68	0.02	10.00	55.26	65.56	-10.30	QP		
2	0.16	10.75	9.68	0.02	10.00	30.45	55.55	-25.10	Average		
3	0.21	27.96	9.59	0.03	10.00	47.58	63.05	-15.47	QP		
4	0.21	6.42	9.59	0.03	10.00	26.04	53.05	-27.01	Average		
5	0.31	23.98	9.60	0.03	10.00	43.61	60.06	-16.45	QP		
6	0.31	5.35	9.60	0.03	10.00	24.98	50.06	-25.08	Average		
7	0.37	22.10	9.61	0.03	10.00	41.74	58.52	-16.78	QP		
8	0.37	3.11	9.61	0.03	10.00	22.75	48.52	-25.77	Average		
9	0.73	12.04	9.63	0.04	10.00	31.71	56.00	-24.29	QP		
10	0.73	-1.25	9.63	0.04	10.00	18.42	46.00	-27.58	Average		
11	1.51	11.87	9.63	0.05	10.00	31.55	56.00	-24.45	QP		
12	1.51	4.06	9.63	0.05	10.00	23.74	46.00	-22.26	Average		

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

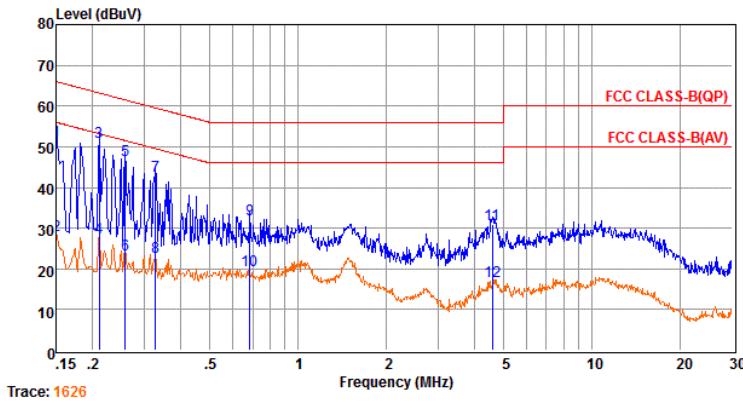

Freq	Reading	LISN	Fac	Cab	Los	Aux2	Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.15	31.85	9.57	0.02	10.00	51.44	66.00	-14.56	QP		
2	0.15	8.59	9.57	0.02	10.00	28.18	55.99	-27.81	Average		
3	0.21	31.49	9.63	0.03	10.00	51.15	63.18	-12.03	QP		
4	0.21	7.87	9.63	0.03	10.00	27.53	53.18	-25.65	Average		
5	0.26	27.03	9.63	0.03	10.00	46.69	61.51	-14.82	QP		
6	0.26	3.86	9.63	0.03	10.00	23.52	51.51	-27.99	Average		
7	0.33	23.19	9.62	0.03	10.00	42.84	59.53	-16.69	QP		
8	0.33	3.21	9.62	0.03	10.00	22.86	49.53	-26.67	Average		
9	0.69	12.42	9.64	0.04	10.00	32.10	56.00	-23.90	QP		
10	0.69	-0.05	9.64	0.04	10.00	19.63	46.00	-26.37	Average		
11	4.57	11.13	9.65	0.06	10.00	30.84	56.00	-25.16	QP		
12	4.57	-2.73	9.65	0.06	10.00	16.98	46.00	-29.02	Average		

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
2. The emission levels that are 20dB below the official limit are not reported.

5.4. 20dB Bandwidth Emissions

FCC 15.231 (c)

5.4.1. Limit


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

5.4.2. Test Procedure


With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

5.4.3. Test Data


Transmit Frequency (MHz)	Limit (kHz)	20dB Bandwidth (kHz)	Result
314.60	786.5	53.44	PASS
315.00	787.5	42.74	PASS
315.60	789	52.21	PASS
Maximum allowed bandwidth:	<input checked="" type="checkbox"/> 0.25% of the centre operating frequency <input type="checkbox"/> 0.5% of the centre operating frequency		
RBW:	<input checked="" type="checkbox"/> 10kHz <input type="checkbox"/> 100kHz <input type="checkbox"/> other kHz		
VBW:	<input checked="" type="checkbox"/> 30kHz <input type="checkbox"/> 300kHz <input type="checkbox"/> other kHz		

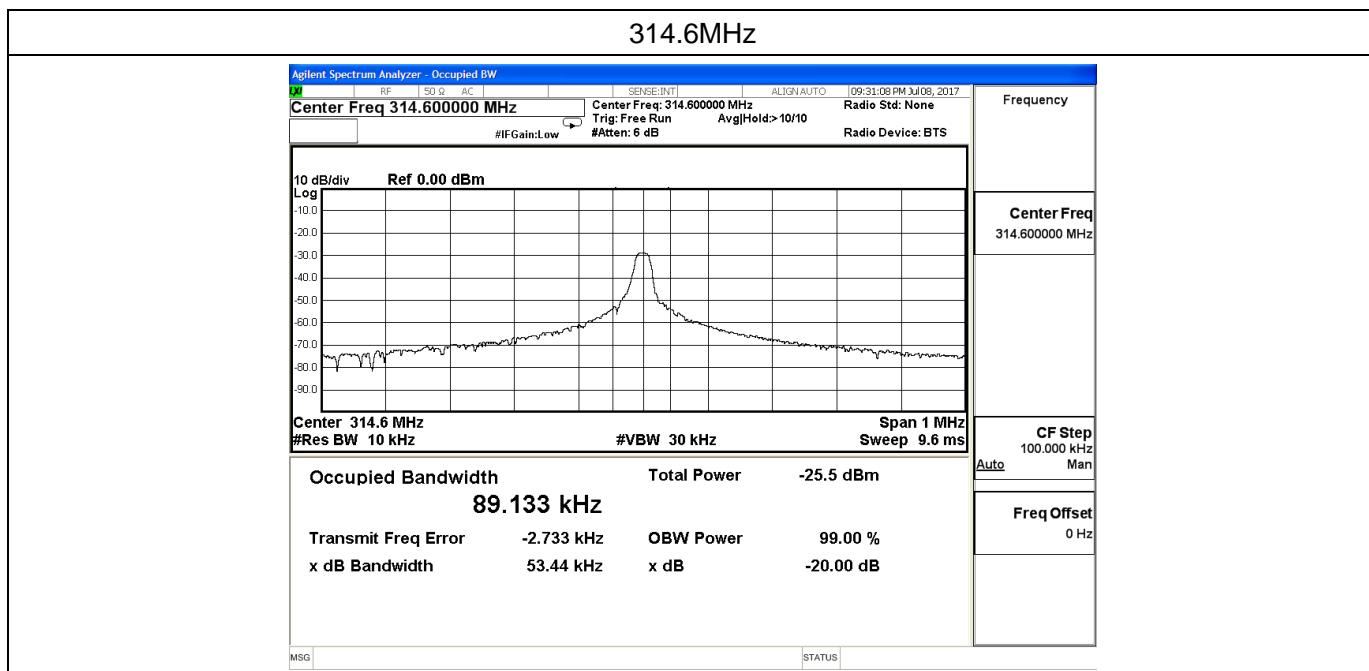

315MHz

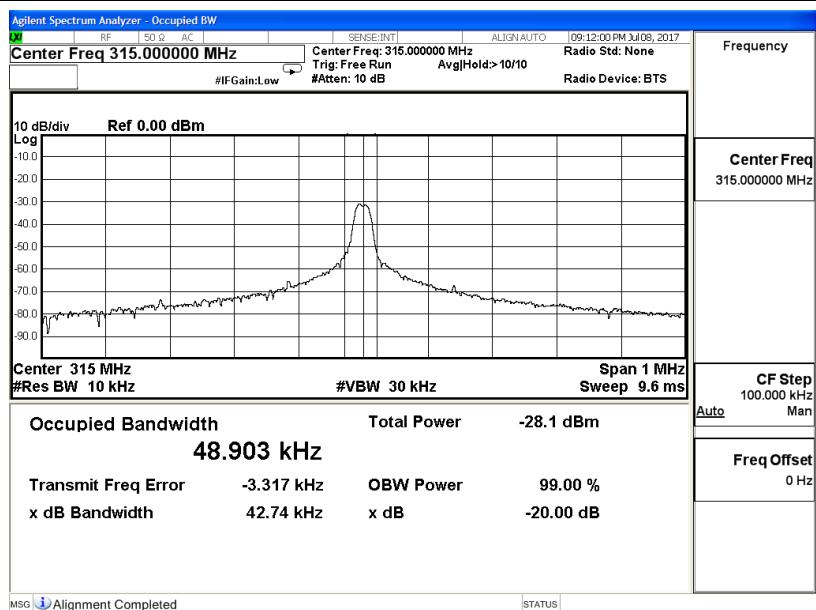

315.6MHz

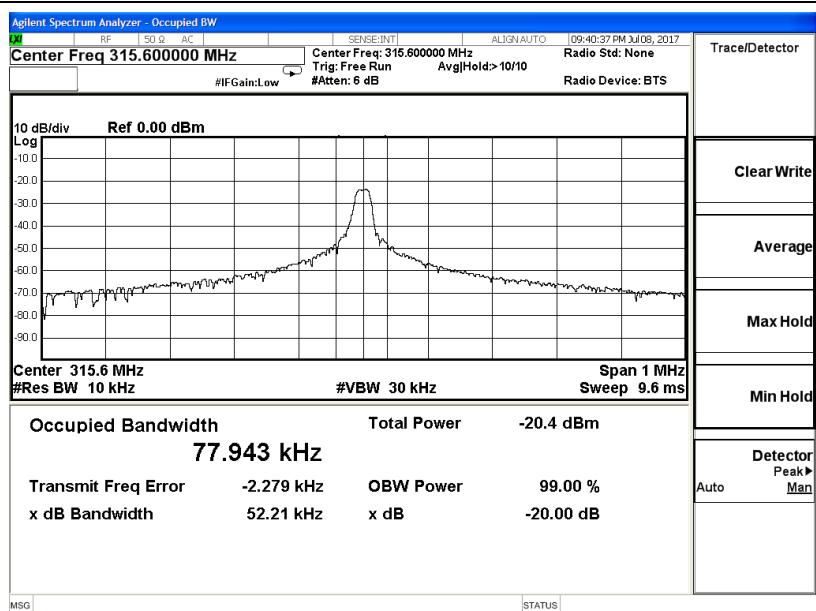

5.5. Duty cycle

5.5.1. Limit

No dedicated limit specified in the Rules.

5.5.2. Test Procedure

5.5.2.1. Place the EUT on the table and set it in transmitting mode.

5.5.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

5.5.2.3. Set centre frequency of spectrum analyzer=operating frequency.

5.5.2.4. Set the spectrum analyzer as RBW=100kHz, VBW=300kHz, Span=0Hz, Adjust Sweep=500ms.

5.5.2.5. Repeat above procedures until all frequency measured was complete.

5.5.3. Test Data

$T_{on} = 31.40\text{ms}$

$T_p = 100(\text{ms})$


The duty cycle = $31.40/100 = 31.40\%$

Average Correction Factory = $20\log(T_{on}/T_p) = 20\log(31.40/100) = -10.06\text{dB}$

Frequency (MHz)	T_{on} (ms)	T_p (ms)	The duty cycle (%)	Average Correction Factory (dB)
314.6	31.3	100	31.3%	-10.0891
315	31.3	100	31.3%	-10.0891
315.6	31.4	100	31.4%	-10.0614

314.6MHz

Ton

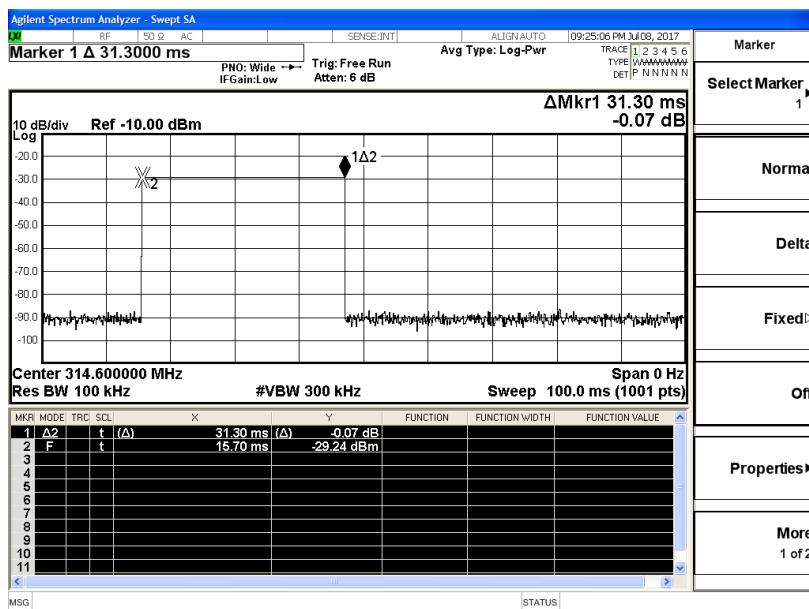

Marker

Select Marker 1

Normal

Delta

Fixed


Off

Properties

More

1 of 2

Tp

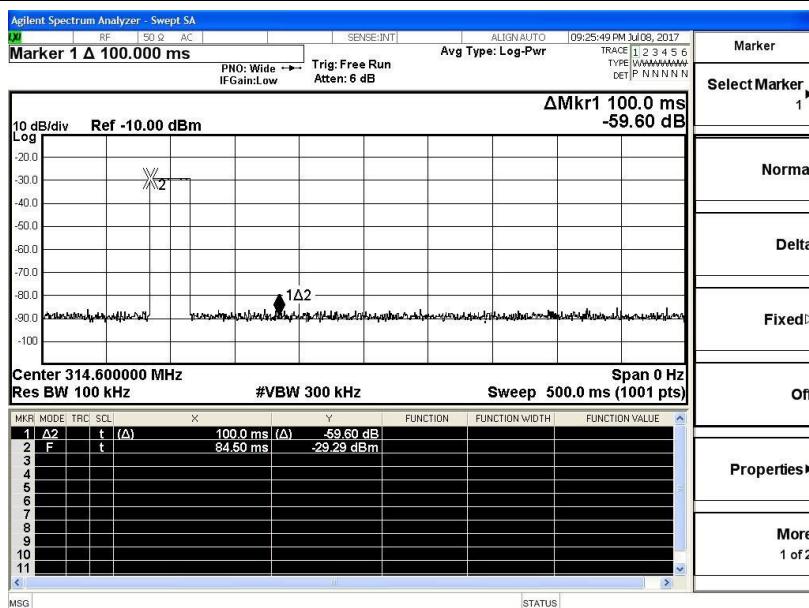

Marker

Select Marker 1

Normal

Delta


Fixed

Off

Properties


More

1 of 2

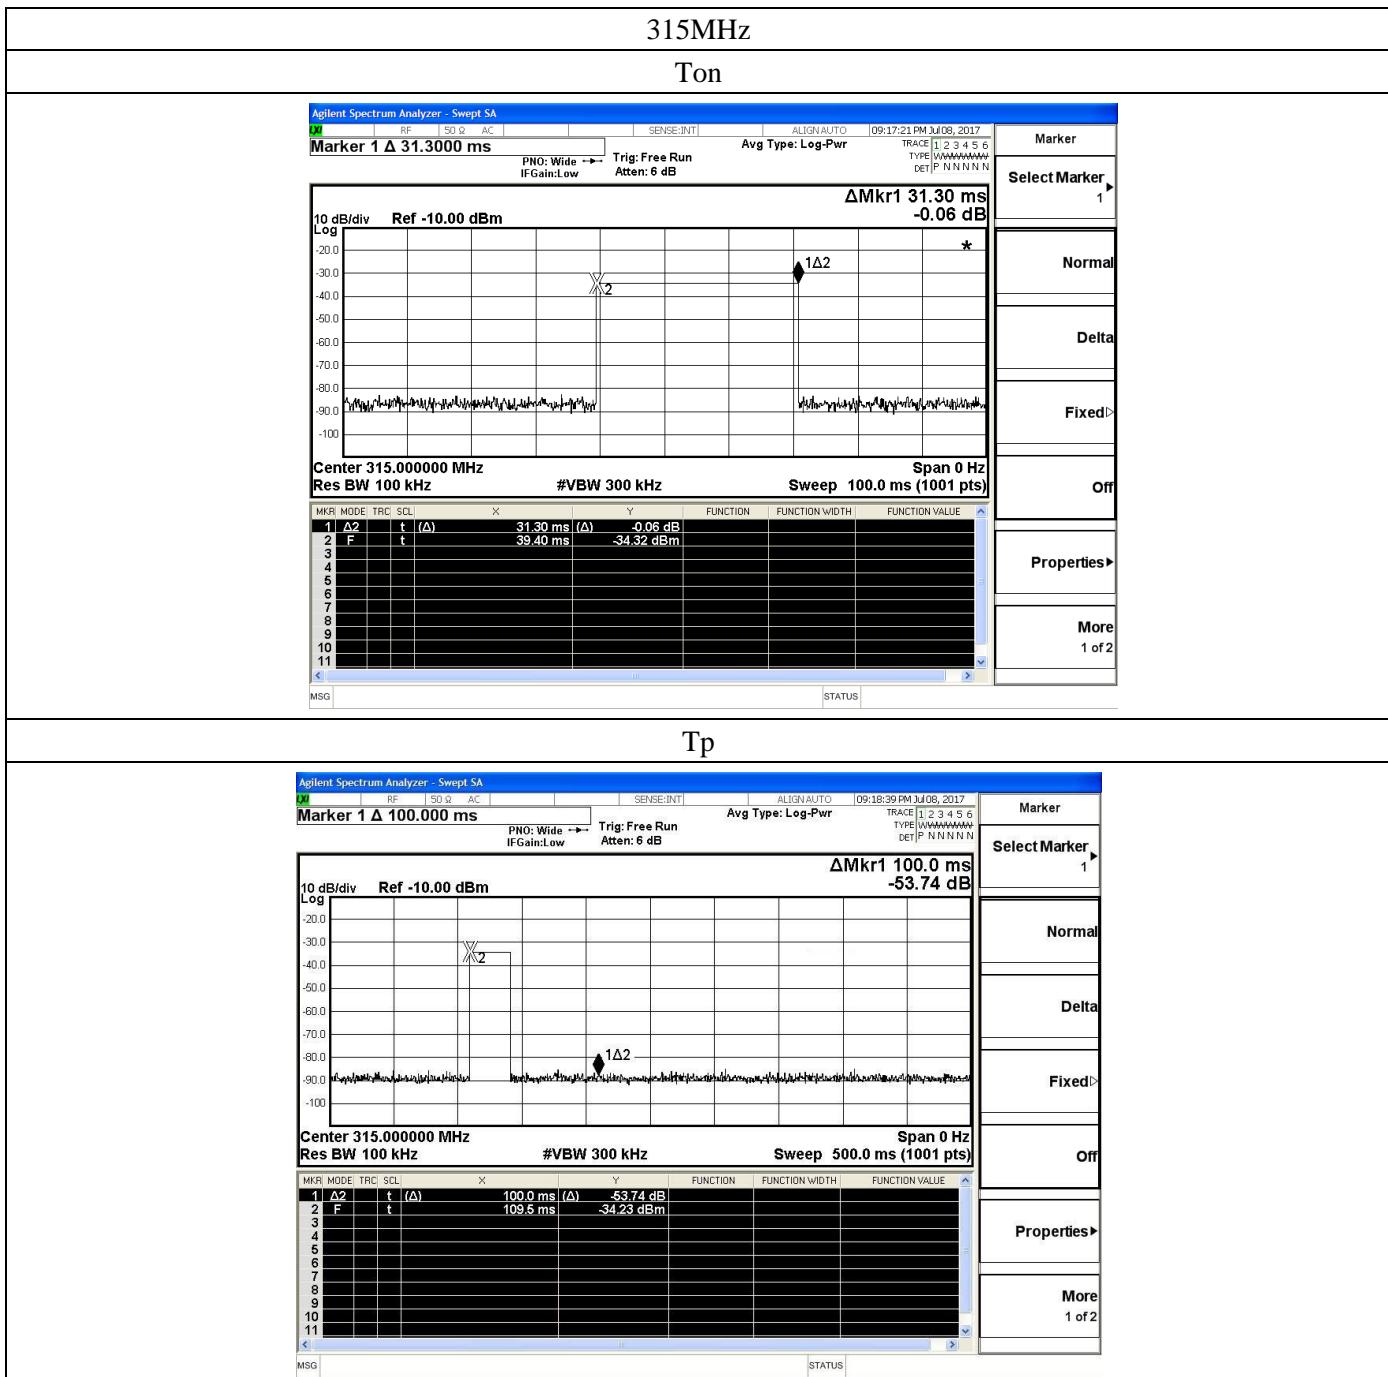


315.6MHz

Ton

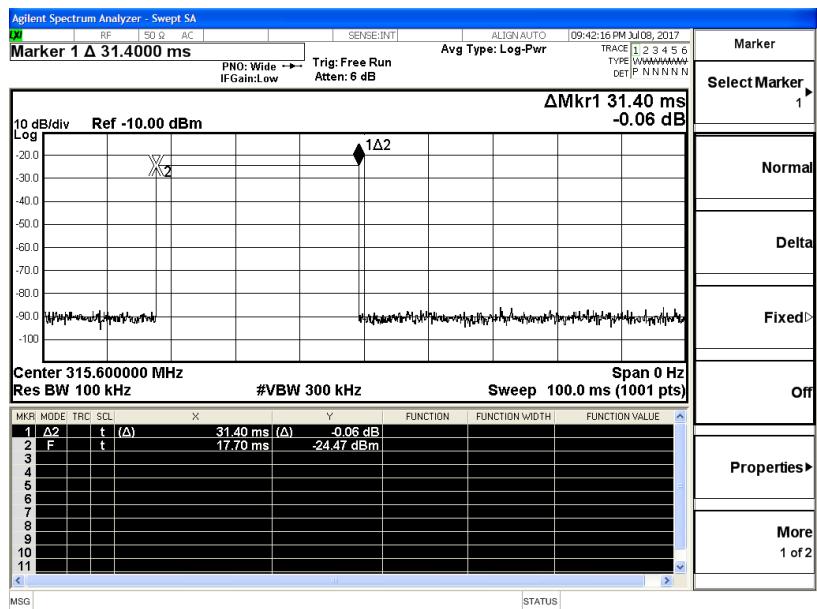

Tp

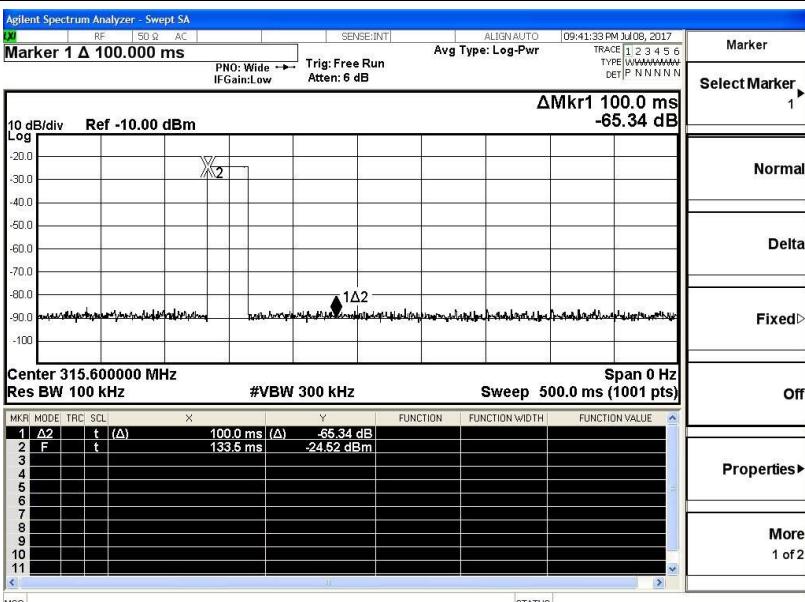

5.6. Antenna Requirement

FCC 15.203

5.6.1. Standard Applicable

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.6.2. Result

Compliant.

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18, 2017	June 17, 2018
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	July 15, 2016	July 14, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 15, 2016	July 14, 2017
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	June 18, 2017	June 17, 2018
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18, 2017	June 17, 2018
By-log Antenna	SCHAFFNER	CBL 6112D	22237	30MHz-1GHz	June 18, 2017	June 17, 2018
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 18, 2017	June 17, 2018
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18, 2017	June 17, 2018
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18, 2017	June 17, 2018
Spectrum Meter	R&S	FSP 30	100023	9kHz-30GHz	July 15, 2016	July 14, 2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	July 15, 2016	July 14, 2017
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0~300V	June 25, 2017	June 24, 2018
DC power Soure	GW	GPC-6030D	C671845	DC 1V-60V	June 25, 2017	June 24, 2018
Temp. and Humidigy Chamber	Giant Force	GTH-225-20-S	MAB0103-00	N/A	June 18, 2017	June 17, 2018
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18, 2017	June 17, 2018
RF CABLE-2m	JYE Bao	RG142	CB)35-2m	20MHz-1GHz	June 18, 2017	June 17, 2018
Vector signal Generator	R&S	SMU200A	102098	100kHz~6GHz	June 18, 2017	June 17, 2018

7. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

-----THE END OF REPORT-----