

FCC

SAR

TEST REPORT

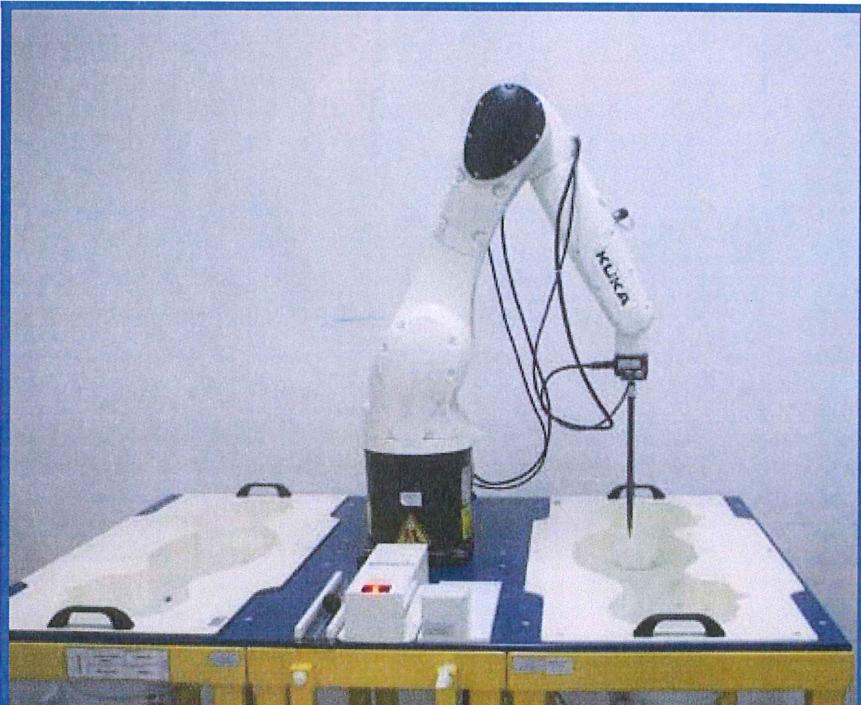
ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
mJoose 3-in-1 Smartphone Case

ISSUED TO
MoJoose Inc

65 Enterprise, Aliso Viejo, CA 92656, USA



Tested by: Zong Liyao
Zong Liyao
(Engineer)

Date: Sep. 30, 2018

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date: Sep. 30, 2018

Report No.: BL-SZ1890221-701
EUT Name: mJoose 3-in-1 Smartphone Case
Model Name: MJ-i8-P1001B with iPhone 8
Brand Name: Mjoose
FCC ID: 2AFV8-CAMJPI6B1001
Test Standard: FCC 47 CFR Part 2.1093
ANSI C95.1: 1999
IEEE 1528: 2013
Maximum SAR: Head (1 g): 1.092 W/kg
Body (1 g): 0.932 W/kg
Test Conclusion: Pass
Test Date: Sep. 12, 2018 ~ Sep. 14, 2018
Date of Issue: Sep. 30, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Sep. 30, 2018</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Test Environment Condition	4
1.4	Announce	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	General Description for Equipment under Test (EUT)	5
2.3	Technical Information	5
3	SUMMARY OF TEST RESULTS	6
3.1	Test Standards	6
3.2	Device Category and SAR Limit	6
3.3	Test Result Summary	8
3.4	Test Uncertainty	9
4	SAR MEASUREMENT SYSTEM	10
4.1	Definition of Specific Absorption Rate (SAR)	10
4.2	SATIMO SAR System	11
5	SYSTEM VERIFICATION	20
5.1	Antenna Port Test Requirement	20
5.2	Purpose of System Check	20
5.3	System Check Setup	20
6	EUT TEST POSITION CONFIGURATIONS	21
6.1	Head Exposure Conditions	21
6.2	Body-worn Position Conditions	22
6.3	Hotspot Mode Exposure Position Conditions	23
7	SAR MEASUREMENT PROCEDURES	24

7.1	SAR Measurement Process Diagram	24
7.2	SAR Scan General Requirements.....	25
7.3	SAR Measurement Procedure	26
7.4	Area & Zoom Scan Procedures.....	26
8	TEST RESULTS	27
8.1	GSM 850	27
8.2	GSM 1900	27
8.3	WCDMA Band 2	28
8.4	WCDMA Band 5.....	28
8.5	CDMA BC0.....	29
8.6	CDMA BC1	29
8.7	LTE Band 13 (10MHz Bandwidth).....	30
8.8	LTE Band 25 (20MHz Bandwidth).....	30
9	SIMULTANEOUS TRANSMISSION	31
10	TEST EQUIPMENTS LIST	32
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	33
ANNEX B	SYSTEM CHECK RESULT	34
ANNEX C	TEST DATA.....	47
ANNEX D	EUT EXTERNAL PHOTOS	79
ANNEX E	SAR TEST SETUP PHOTOS.....	79
ANNEX F	CALIBRATION REPORT	79

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation (A2LA) according to ISO/IEC 17025. The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Test Environment Condition

Ambient Temperature	21°C to 23°C
Ambient Relative Humidity	36% to 48%
Ambient Pressure	100 to 102KPa

1.4 Announce

- (1) The test report reference to the report template version v2.3.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	MoJoose Inc
Address	65 Enterprise, Aliso Viejo, CA 92656, USA

2.2 General Description for Equipment under Test (EUT)

EUT Name	mJoose 3-in-1 Smartphone Case
Model Name Under Test	MJ-i8-P1001B with iPhone 8

2.3 Technical Information

Network and Wireless connectivity	2G Network GPRS 850/1900; 3G Network WCDMA Band 2/5; CDMA BC0/BC1 4G Network LTE FDD Band 13/25;
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	GSM, WCDMA, LTE		
Frequency Range	GSM 850	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	GSM 1900	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	CDMA BC0	TX: 824.025 ~ 848.985 MHz	RX: 869.025 ~ 893.985 MHz
	CDMA BC1	TX: 1850 – 1910 MHz	RX: 1930 – 1990 MHz
	LTE Band 13	TX: 777 ~ 787 MHz	RX: 746 ~ 756 MHz
	LTE Band 25	TX: 1850 ~ 1915 MHz	RX: 1930 ~ 1995 MHz
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	<input checked="" type="checkbox"/> Production unit	<input type="checkbox"/> Identical prototype	
Note ¹ : SAR is verified on iPhone 8 base-phone of each frequency (750/835/1900MHz) firstly according to FCC ID: BCG-E3159A, then attached the mJoose 3-in-1 Smartphone Case on iPhone 8 and verifying SAR again.			
Note ² : All testing was conducted based on the test plan submitted by the client.			

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 941225 D01 v03r01	3G SAR MEAUREMENT PROCEDURES
6	FCC KDB 941225 D05 v02r05	SAR Evaluation Considerations for LTE Devices
7	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
8	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
9	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

Band	Maximum Scaled SAR (W/kg)		Maximum Report SAR (W/kg)		Limit (W/kg)
	Head (0mm)	Body (5mm)	Head (0mm)	Body (5mm)	
GSM 850	0.649	0.891	1.092	0.932	1.6
GSM 1900	0.738	0.600			
WCDMA Band 2	0.885	0.766			
WCDMA Band 5	0.544	0.751			
CDMA BC0	0.505	0.803			
CDMA BC1	0.870	0.754			
LTE Band 13	0.389	0.758			
LTE Band 25	1.092	0.932			
Verdict	Pass				

3.3.2 Highest Simultaneous SAR

The simultaneous transmission SAR is not required in this report.

3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 1.092 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

4 SAR MEASUREMENT SYSTEM

4.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational / controlled exposure limits are higher than the limits for general population /uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

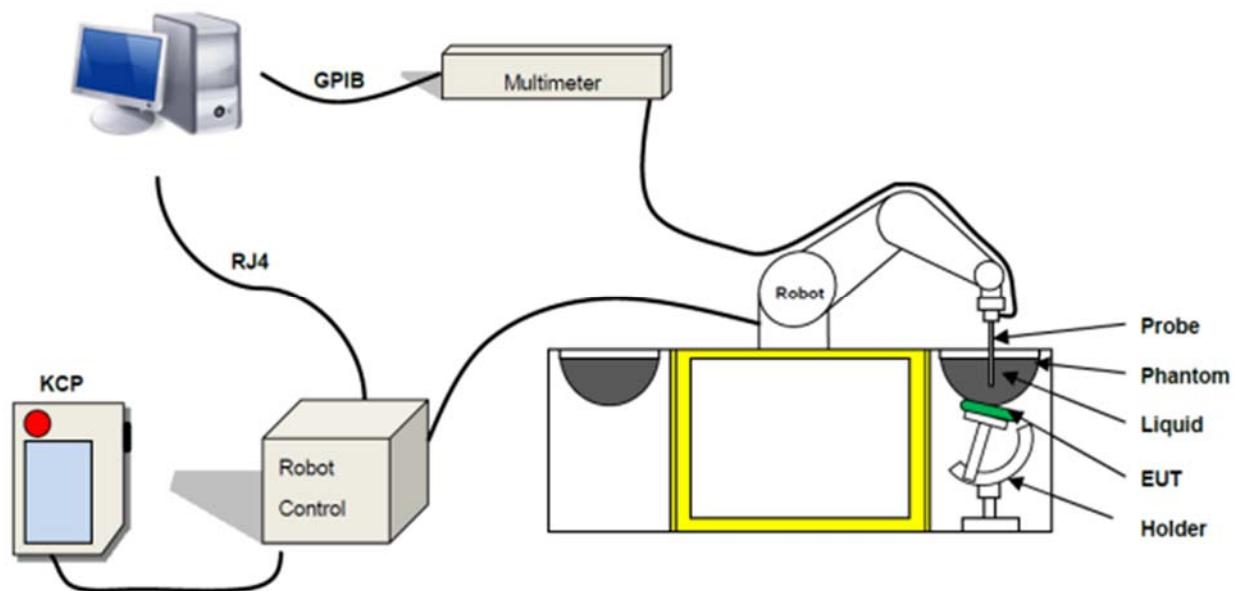
$$\mathbf{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 SATIMO SAR System

4.2.1 SATIMO SAR System Diagram



These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than ± 0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528.

4.2.2 Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

4.2.3 E-Field Probe

For the measurements the Specific Dosimetric E-Field Probe SN 31/17 EPGO 321 with following specifications is used

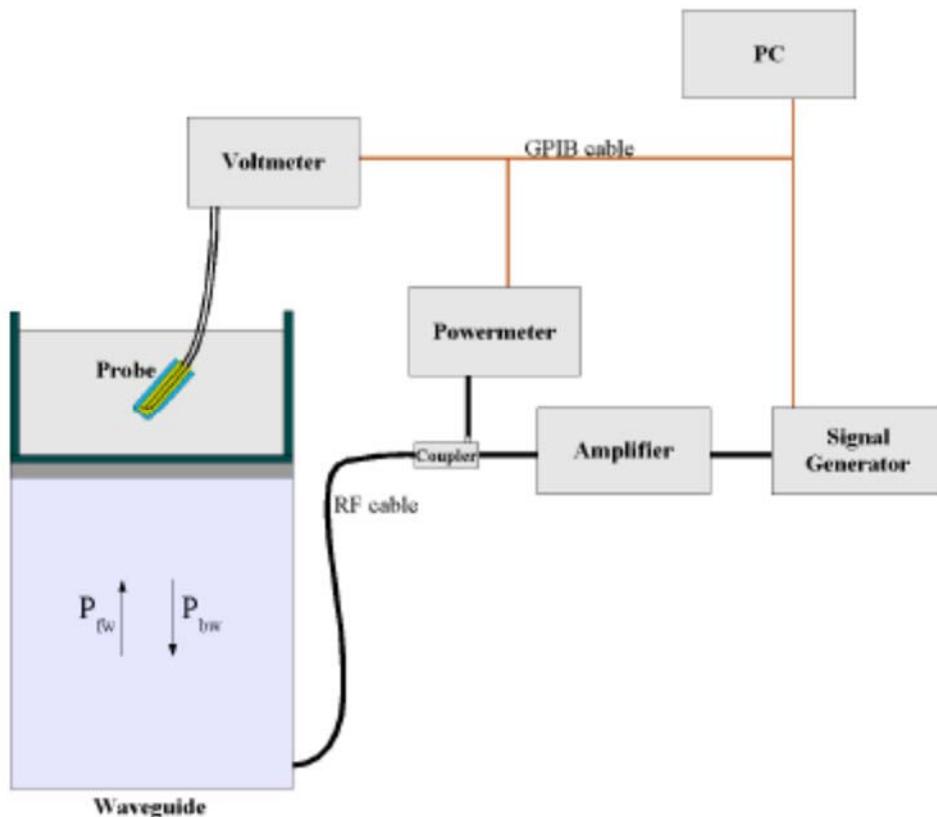
- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 2.5 mm
- Lower detection limit : 10 mW/kg
(repeatability better than +/- 1mm)
- Probe linearity: +/- 0.07 dB
- Calibration range: 300 MHz to 6000 MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°



E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the IEC62209-1/2 annexe technique using reference guide at the five frequencies.



$$\text{SAR} = \frac{4(P_{\text{fw}} - P_{\text{bw}})}{ab\sigma} \cos^2 \left(\pi \frac{y}{a} \right) e^{(2\pi/\sigma)}$$

Where :

Pfw = Forward Power

Pbw = Backward Power

a and b = Waveguide Dimensions
i = Skin Depth

Keithley configuration

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N) / V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N) = V(N) * (1 + V(N) / DCP(N)) \quad (N=1,2,3)$$

Where the DCP is the diode compression point in mV.

4.2.4 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

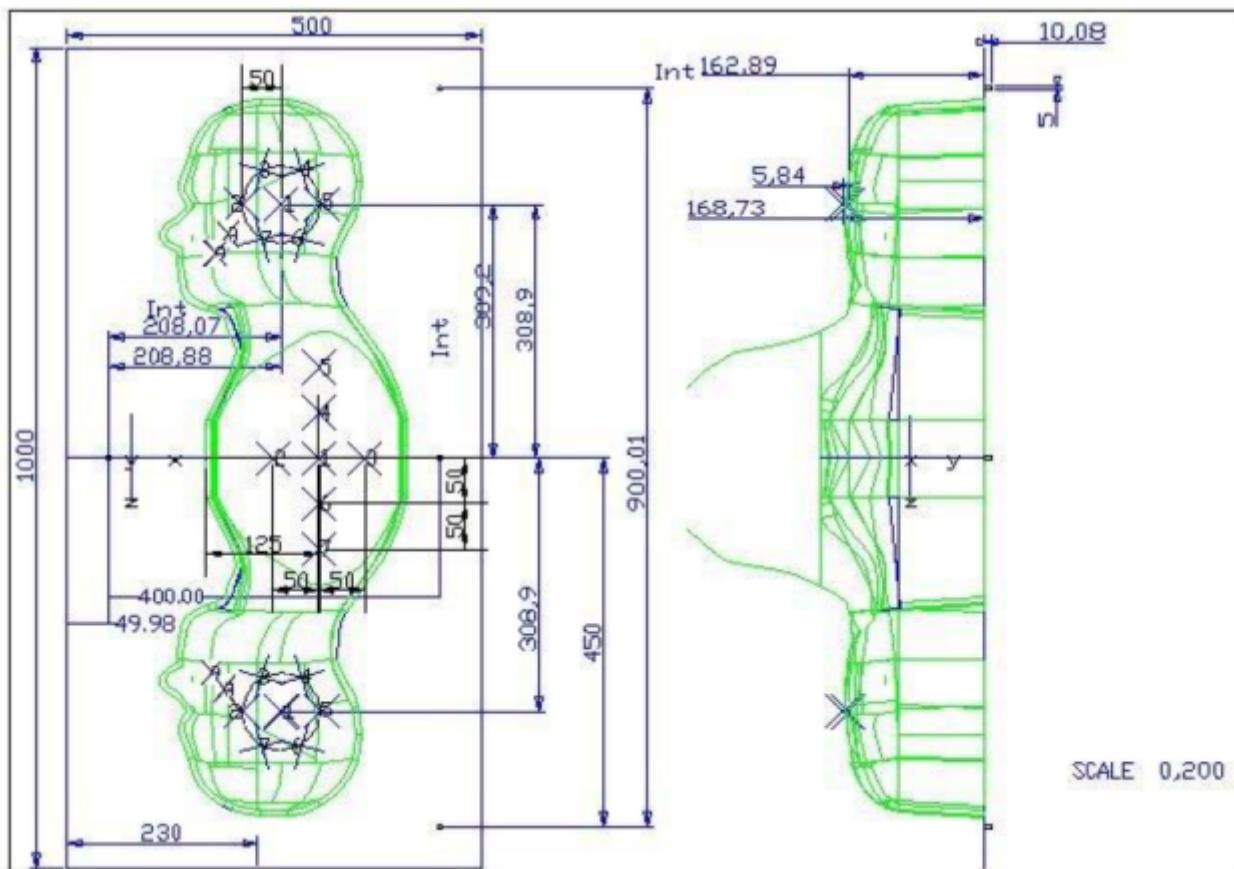
Photo of Phantom SN 30/13 SAM103



Photo of Phantom SN 30/13 SAM104



Serial Number	Positioner Material	Permittivity	Loss Tangent
SN 30/13 SAM103	Gelcoat with fiberglass	3.4	0.02
SN 30/13 SAM104	Gelcoat with fiberglass	3.4	0.02



Serial Number	Left Head		Right Head		Flat Part	
SN 30/13 SAM103	2	2.00	2	2.03	1	2.09
	3	2.02	3	2.05	2	2.10
	4	2.04	4	2.04	3	2.09
	5	2.04	5	2.07	4	2.11
	6	2.02	6	2.07	5	2.11
	7	2.01	7	2.09	6	2.09
	8	2.04	8	2.10	7	2.11
	9	2.02	9	2.09	-	-
	2	2.05	2	2.06	1	2.03
SN 30/13 SAM104	3	2.08	3	2.03	2	2.03
	4	2.05	4	2.03	3	2.01
	5	2.06	5	2.02	4	2.03
	6	2.08	6	2.02	5	2.03
	7	2.06	7	2.04	6	2.00
	8	2.07	8	2.04	7	1.98
	9	2.07	9	2.05	-	-

4.2.5 Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

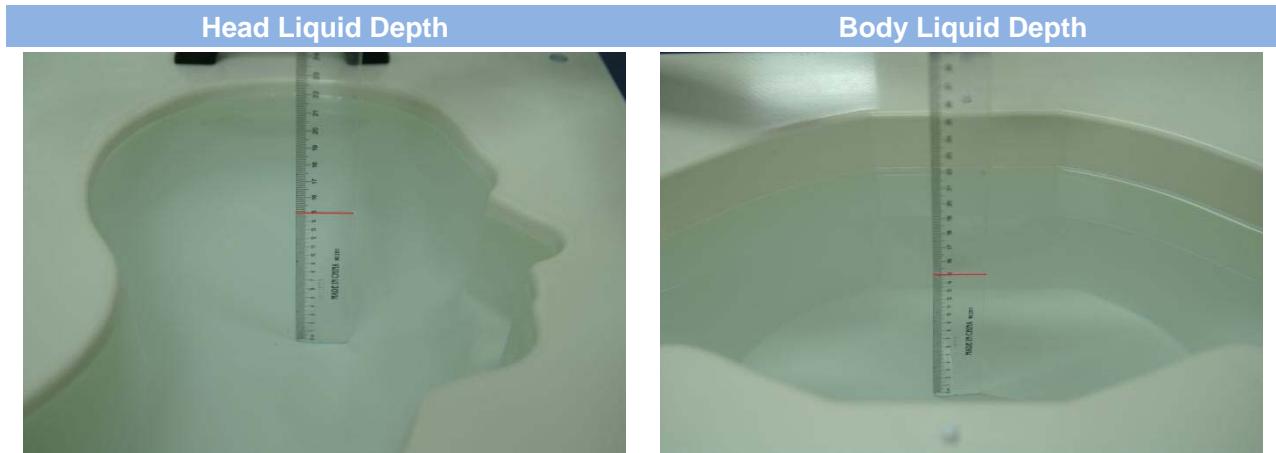


Serial Number	Holder Material	Permittivity	Loss Tangent
SN 25/13 MSH87	Deirin	3.7	0.005
SN 25/13 MSH88	Deirin	3.7	0.005

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency(MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5

Frequency(MHz)	Water	DGBE (%)	Salt (%)	Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40	/	5.54	47.86
5800	78.50	21.40	0.1	6.0	48.20

5 SYSTEM VERIFICATION

5.1 Antenna Port Test Requirement

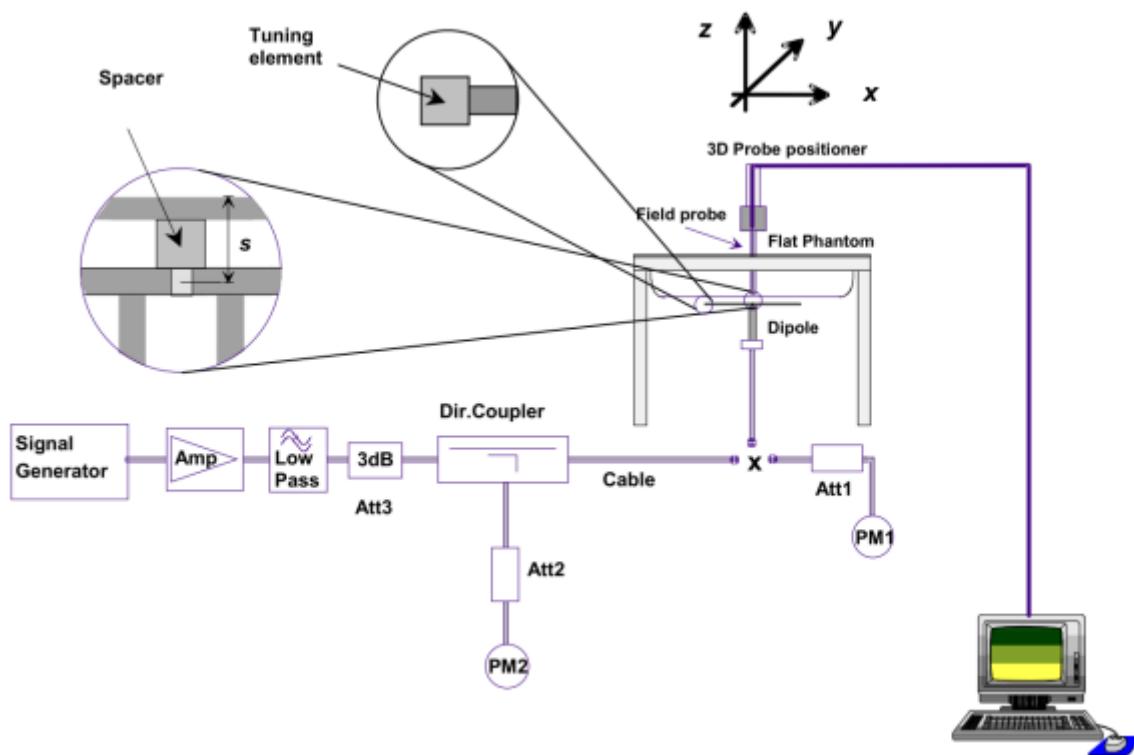
The SATIMO SAR system is equipped with one or more system validation kits. These units together with the predefined measurement procedures within the SATIMO software enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

5.2 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.3 System Check Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:



6 EUT TEST POSITION CONFIGURATIONS

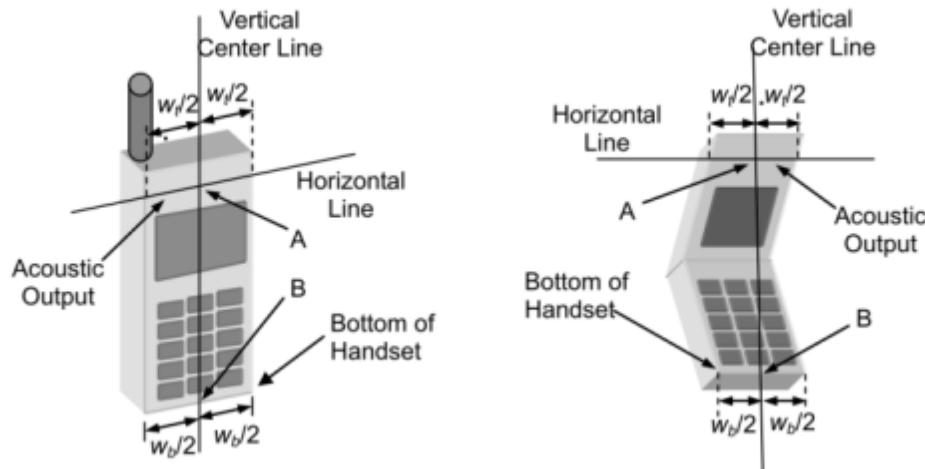
According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.

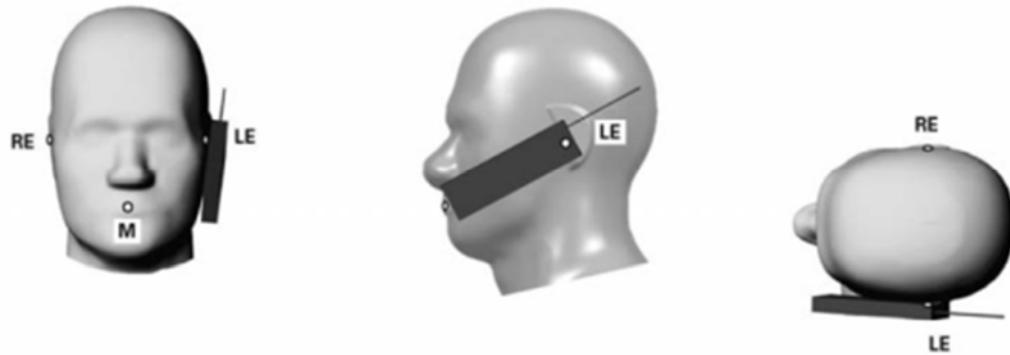
6.1.1 Define two imaginary lines on the handset

- (a) The vertical center line passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



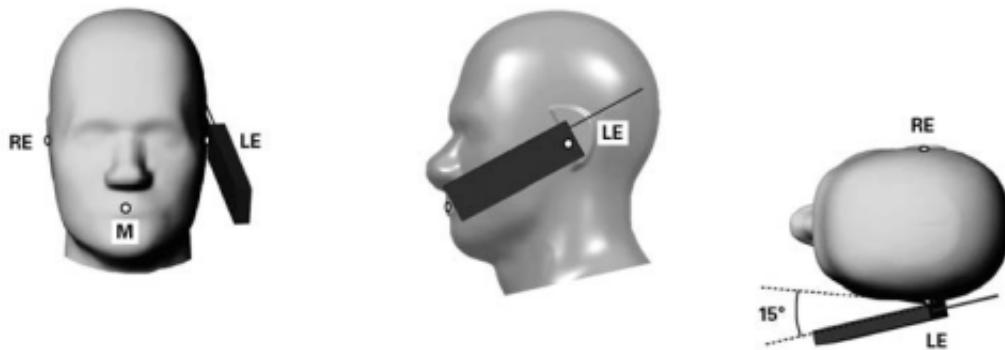
6.1.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.



6.1.3 Tilted Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.



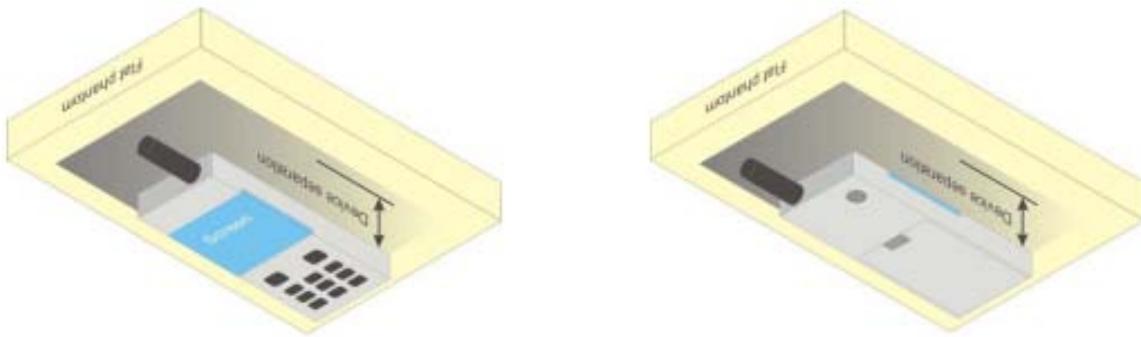
6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

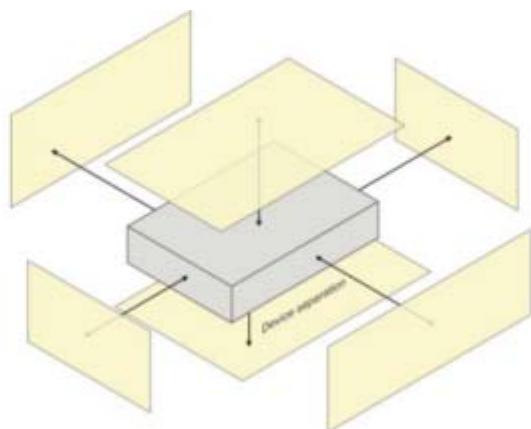
Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be

acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.



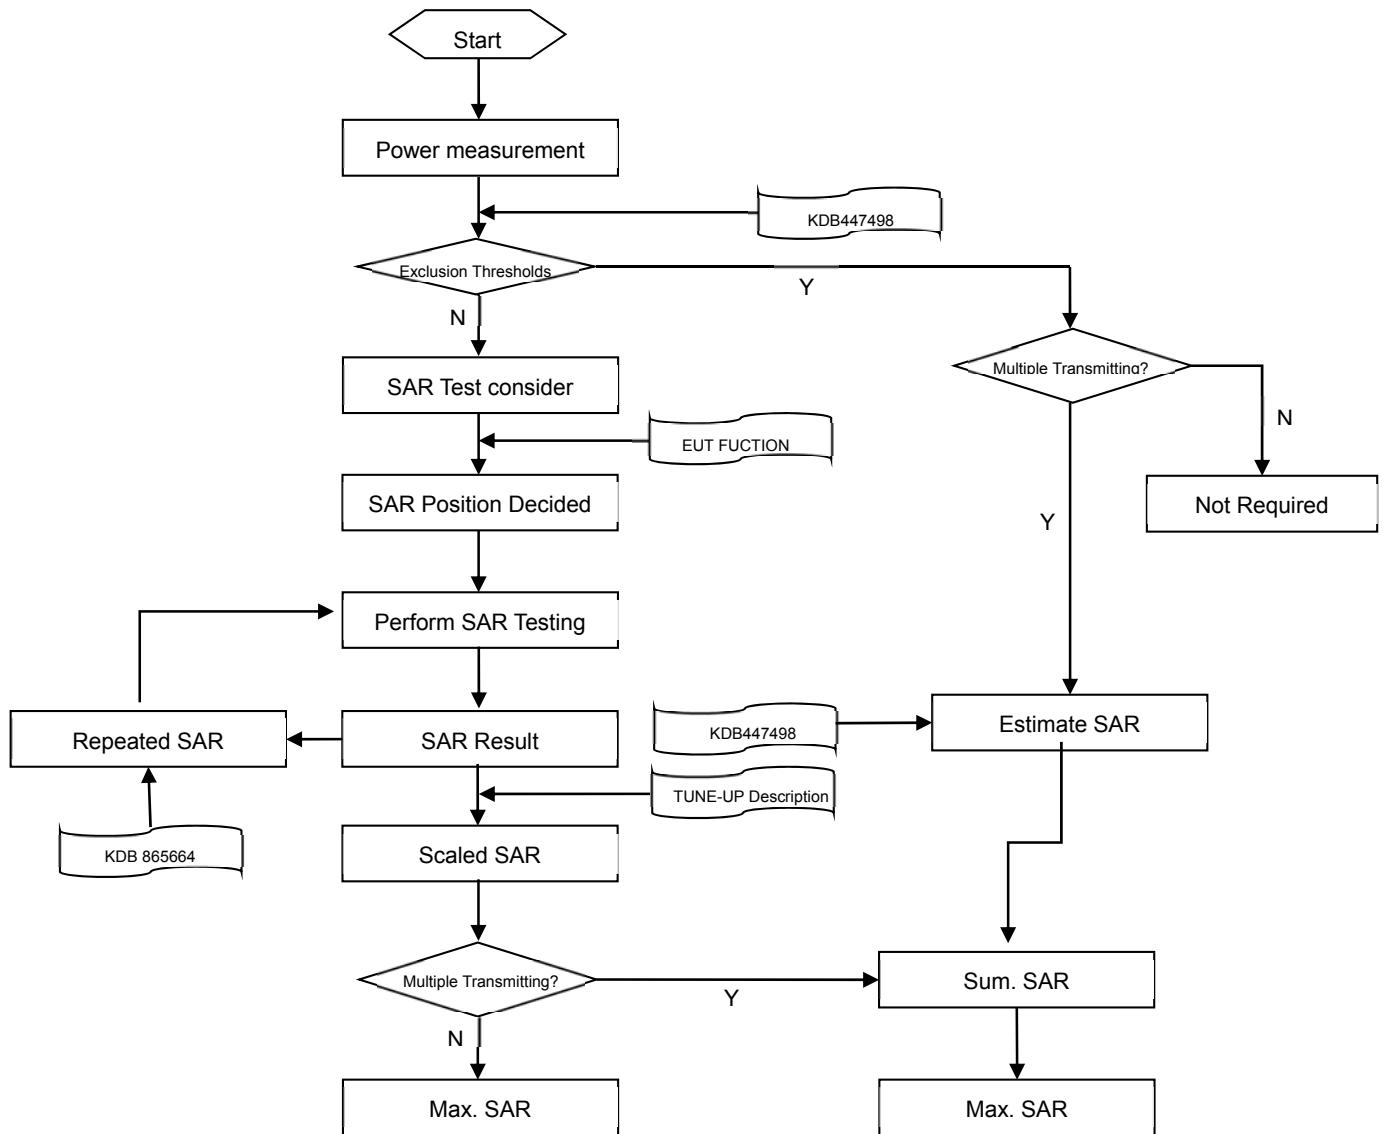
6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).



7 SAR MEASUREMENT PROCEDURES

7.1 SAR Measurement Process Diagram



7.2 SAR Scan General Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

		$\leq 3\text{GHz}$	$> 3\text{GHz}$	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
		$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$	
Maximum area scan spatial resolution: $\Delta x \text{ Area}$, $\Delta y \text{ Area}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x \text{ Zoom}$, $\Delta y \text{ Zoom}$		$\leq 2 \text{ GHz: } \leq 8 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz: } \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \leq 4 \text{ mm}^*$	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z \text{ Zoom (n)}$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 4 \text{ mm}$	
			$4 - 5 \text{ GHz: } \leq 3 \text{ mm}$	
			$5 - 6 \text{ GHz: } \leq 2 \text{ mm}$	
	graded grid	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 3 \text{ mm}$	
			$4 - 5 \text{ GHz: } \leq 2.5 \text{ mm}$	
	$\Delta z \text{ Zoom (n>1): between subsequent points}$		$5 - 6 \text{ GHz: } \leq 2 \text{ mm}$	
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz: } \geq 28 \text{ mm}$	
			$4 - 5 \text{ GHz: } \geq 25 \text{ mm}$	
			$5 - 6 \text{ GHz: } \geq 22 \text{ mm}$	

Note:

1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.
2. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

7.3 SAR Measurement Procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8 TEST RESULTS

8.1 GSM 850

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
GPRS 2 slots	Left Cheek Phone only	0	190	836.60	0.15	0.605	32.00	32.30	1.072	0.649	1#
	Left Cheek With case	0	190	836.60	-1.23	0.190	32.00	32.30	1.072	0.204	2#
Body											
GPRS 2 slots	Front Side Phone only	5	251	848.80	-2.85	0.831	32.00	32.30	1.072	0.891	3#
	Front Side With case	5	251	848.80	-2.48	0.124	32.00	32.30	1.072	0.133	4#
Note: Refer to ANNEX C for the detailed test data for each test configuration.											

8.2 GSM 1900

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
GPRS 2 slots	Right Cheek Phone only	0	661	1880.00	2.08	0.560	29.10	30.30	1.318	0.738	5#
	Right Cheek With case	0	661	1880.00	-1.38	0.218	29.10	30.30	1.318	0.287	6#
Body											
GPRS 2 slots	Front Side Phone only	5	661	1880.00	-0.88	1.543	29.10	25.00	0.389	0.600	7#
	Front Side With case	5	661	1880.00	-4.72	0.509	29.10	25.00	0.389	0.198	8#
Note: Refer to ANNEX C for the detailed test data for each test configuration.											

8.3 WCDMA Band 2

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
RMC	Right Cheek Phone only	0	9538	1907.60	-1.89	0.703	24.00	25.00	1.259	0.885	9#
	Right Cheek With case	0	9538	1907.60	-3.75	0.489	24.00	25.00	1.259	0.616	10#
Body											
RMC	Front Side Phone only	5	9400	1880.00	-0.20	2.016	24.00	19.80	0.380	0.766	11#
	Front Side With case	5	9400	1880.00	-0.23	0.866	24.00	19.80	0.380	0.329	12#
Note: Refer to ANNEX C for the detailed test data for each test configuration.											

8.4 WCDMA Band 5

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
RMC	Left Cheek Phone only	0	4183	836.60	-0.06	0.507	24.50	24.80	1.072	0.544	13#
	Left Cheek With case	0	4183	836.60	-2.99	0.170	24.50	24.80	1.072	0.182	14#
Body											
RMC	Front Side Phone only	5	4233	846.60	-2.43	0.701	24.50	24.80	1.072	0.751	15#
	Front Side With case	5	4233	846.60	-3.67	0.122	24.50	24.80	1.072	0.131	16#
Note: Refer to ANNEX C for the detailed test data for each test configuration.											

8.5 CDMA BC0

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
1xRTT (RC3 S055)	Left Cheek Phone only	0	384	836.50	-1.61	0.471	24.50	24.80	1.072	0.505	17#
	Left Cheek With case	0	384	836.50	-1.71	0.137	24.50	24.80	1.072	0.147	18#
Body											
1xRTT (RC3 S032)	Front Side Phone only	5	384	836.50	-0.85	0.749	24.50	24.80	1.072	0.803	19#
	Front Side With case	5	384	836.50	-2.67	0.175	24.50	24.80	1.072	0.188	20#
Note: Refer to ANNEX C for the detailed test data for each test configuration.											

8.6 CDMA BC1

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
1xRTT (RC3 S055)	Right Cheek Phone only	0	1175	1908.80	1.99	0.691	24.00	25.00	1.259	0.870	21#
	Right Cheek With case	0	1175	1908.80	-2.26	0.443	24.00	25.00	1.259	0.558	22#
Body											
1xRTT (RC3 S032)	Front Side Phone only	5	600	1880.00	-1.84	2.078	24.20	19.80	0.363	0.754	23#
	Front Side With case	5	600	1880.00	3.25	0.720	24.20	19.80	0.363	0.261	24#
Note: Refer to ANNEX C for the detailed test data for each test configuration.											

8.7LTE Band 13 (10MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Left Cheek Phone only	0	23230	782	1	24	-1.45	0.288	23.50	24.80	1.349	0.389	25#
	Left Cheek With case	0	23230	782	1	24	-1.50	0.088	23.50	24.80	1.349	0.119	26#
Body													
QPSK	Front Side Phone only	5	23230	782	1	24	0.13	0.562	23.50	24.80	1.349	0.758	27#
	Front Side With case	5	23230	782	1	24	-3.33	0.147	23.50	24.80	1.349	0.198	28#
Note: Refer to ANNEX C for the detailed test data for each test configuration.													

8.8LTE Band 25 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (%)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Right Cheek Phone only	0	26590	1905	1	49	-1.76	0.560	21.40	24.30	1.950	1.092	29#
	Right Cheek With case	0	26590	1905	1	49	-1.78	0.395	21.40	24.30	1.950	0.770	30#
Body													
QPSK	Front Side Phone only	5	26590	1905	50	24	-1.64	1.379	21.50	19.80	0.676	0.932	31#
	Front Side With case	5	26590	1905	50	24	3.11	0.347	21.50	19.80	0.676	0.235	32#
Note: Refer to ANNEX C for the detailed test data for each test configuration.													

9 SIMULTANEOUS TRANSMISSION

The simultaneous transmission SAR is not required in this report.

10 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
750MHz Dipole	SATIMO	SID 750	S/N 11/17 DIP 0G750-446	2017/03/22	2020/03/21
835MHz Dipole	SATIMO	SID 835	S/N 11/17 DIP 0G750-447	2017/03/22	2020/03/21
1900MHz Dipole	SATIMO	SID 1900	S/N 11/17 DIP 1G900-450	2017/03/22	2020/03/21
E-Field Probe	MVG	SSE2	S/N 31/17 EPGO 321	2018/03/16	2019/03/15
MultiMeter	Keithley	MultiMeter 2000	4024022	2018/06/15	2019/06/14
Signal Generator	R&S	SMBV100A	260592	2018/06/15	2019/06/14
Power Meter	Agilent	E4419B	GB40201833	2017/11/02	2018/11/01
Power Sensor	Agilent	E9300A	MY41498012	2017/11/02	2018/11/01
Power Sensor	Agilent	E9300A	MY41499891	2017/11/02	2018/11/01
Wireless Communication Test Set	Agilent	8960-E5515C	MY50260493	2017/11/02	2018/11/01
Wireless Communication Test Set	R&S	CMW 500	127801	2017/11/02	2018/11/01
Network Analyzer	Agilent	5071C	MY46103472	2018/03/14	2019/03/13
Thermometer	Elitech	RC-4HC	N/A	2017/11/13	2018/11/12
Dielectric Probe Kit	SATIMO	SCLMP	SN 25/13 OCPG56	N/A	N/A
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Antenna	SATIMO	ANTA3	SN 17/13 ZNTA45	N/A	N/A
Phantom1	SATIMO	SAM	SN 30/13 SAM103	N/A	N/A
Phantom2	SATIMO	SAM	SN 30/13 SAM104	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: Per KDB 865664 Dipole SAR Validation Verification, BALUN LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) is within 5 Ohms of calibrated measurement.

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2018.09.12	Head	750	21.1	0.90	43.18	0.89	41.94	1.23	2.94
2018.09.12	Body	750	21.1	0.94	56.54	0.96	55.53	-1.97	1.82
2018.09.12	Head	835	21.1	0.92	42.57	0.90	41.50	2.00	2.59
2018.09.12	Body	835	21.1	0.95	56.85	0.97	55.20	-1.75	3.00
2018.09.14	Head	1900	21.3	1.39	40.31	1.40	40.00	-0.79	0.78
2018.09.14	Body	1900	21.3	1.49	51.58	1.52	53.30	-2.30	-3.23

Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10%(for 1 g).

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)	Targeted SAR(W/kg)	Tolerance (%)
2018.09.12	Head	750	100	0.859	8.59	8.78	-2.16	8.49	1.18
2018.09.12	Body	750	100	0.874	8.74	8.59	1.75	8.49	2.94
2018.09.12	Head	835	100	0.906	9.06	9.58	-5.43	9.56	-5.23
2018.09.12	Body	835	100	0.974	9.74	9.78	-0.41	9.56	1.88
2018.09.14	Head	1900	100	3.735	37.35	39.49	-5.42	39.70	-5.92
2018.09.14	Body	1900	100	4.172	41.72	40.01	4.27	39.70	5.09

Note: The tolerance limit of System validation ±10%.

System Performance Check Data(750 MHz Head)

Type: Phone measurement (Complete)

E-Field Probe: SN 3117 EPGO321

Area scan resolution: dx=8mm,dy=8mm

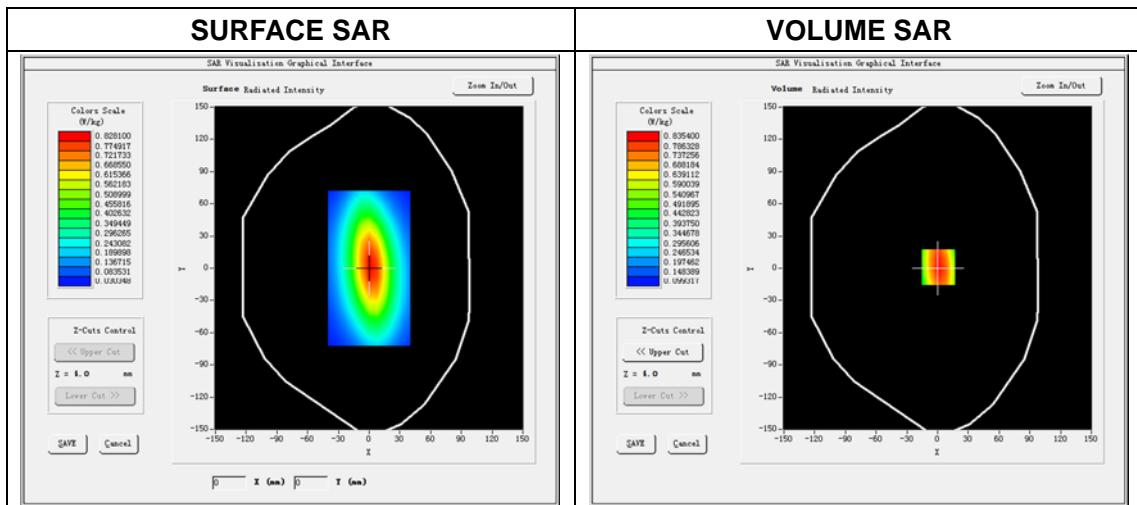
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2018.09.12

Measurement duration: 13 minutes 40 seconds

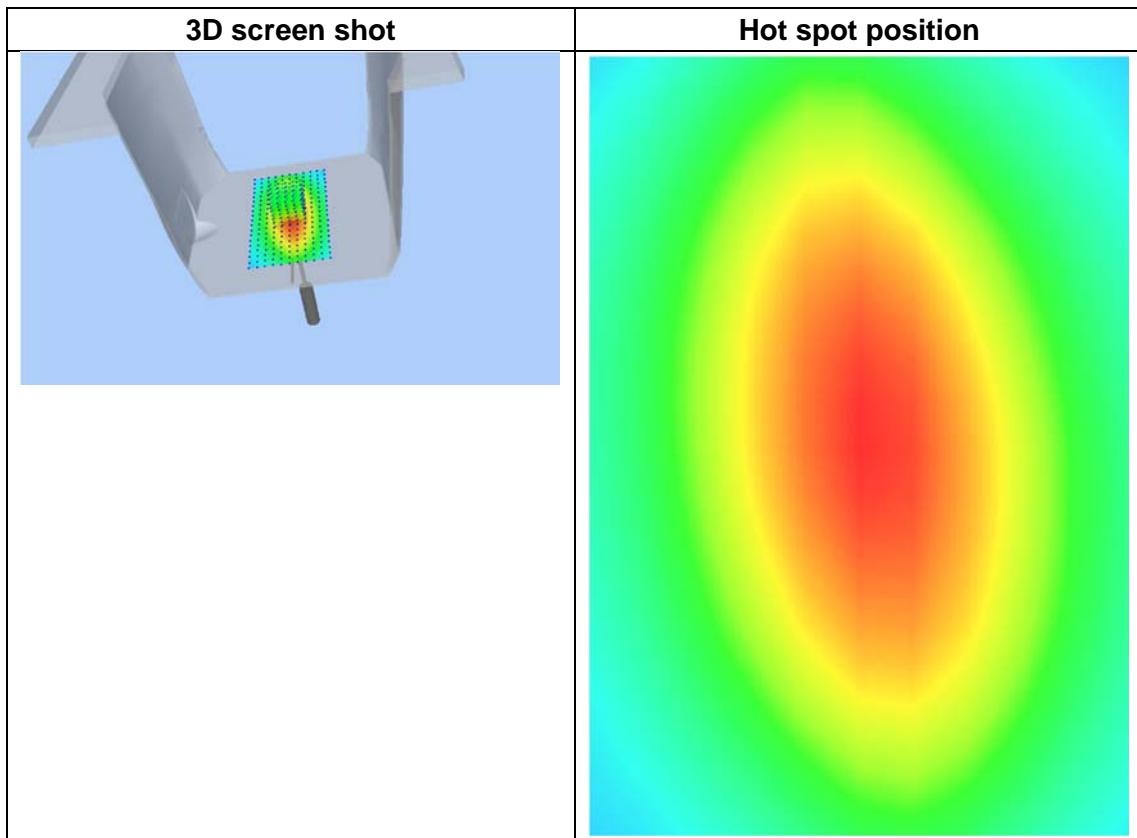
Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	750MHz
Signal	CW
Frequency (MHz)	750.000000
Relative permittivity (real part)	43.175128
Conductivity (S/m)	0.903856
Power drift (%)	0.150000
Ambient Temperature:	22.2°C
Liquid Temperature:	21.1°C
ConvF:	1.60
Crest factor:	1:1



Maximum location: X=1.00, Y=1.00
SAR Peak: 1.08 W/kg

SAR 10 g (W/Kg)	0.525468
SAR 1g (W/Kg)	0.858643



System Performance Check Data(750 MHz Body)

Type: Phone measurement (Complete)

E-Field Probe: SN 3117 EPGO321

Area scan resolution: dx=8mm,dy=8mm

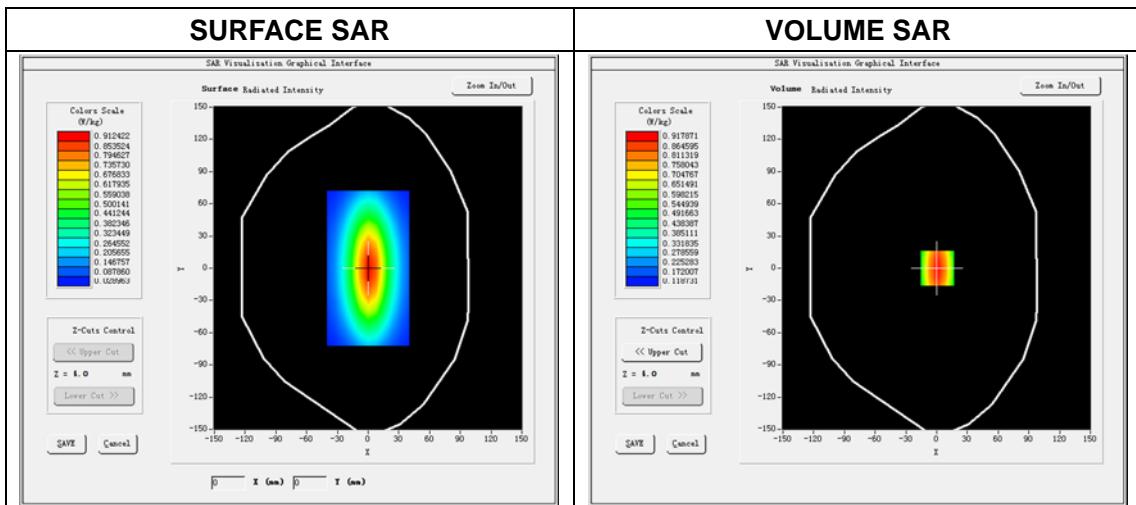
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2018.09.12

Measurement duration: 13 minutes 15 seconds

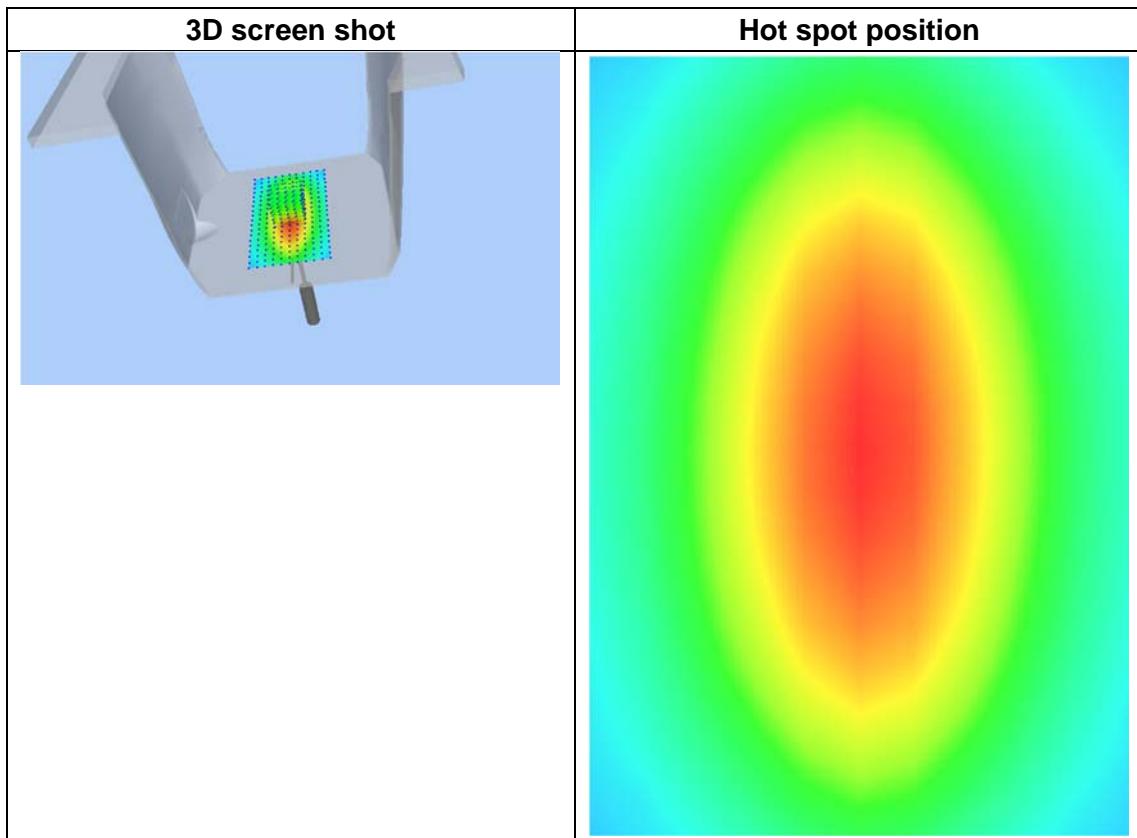
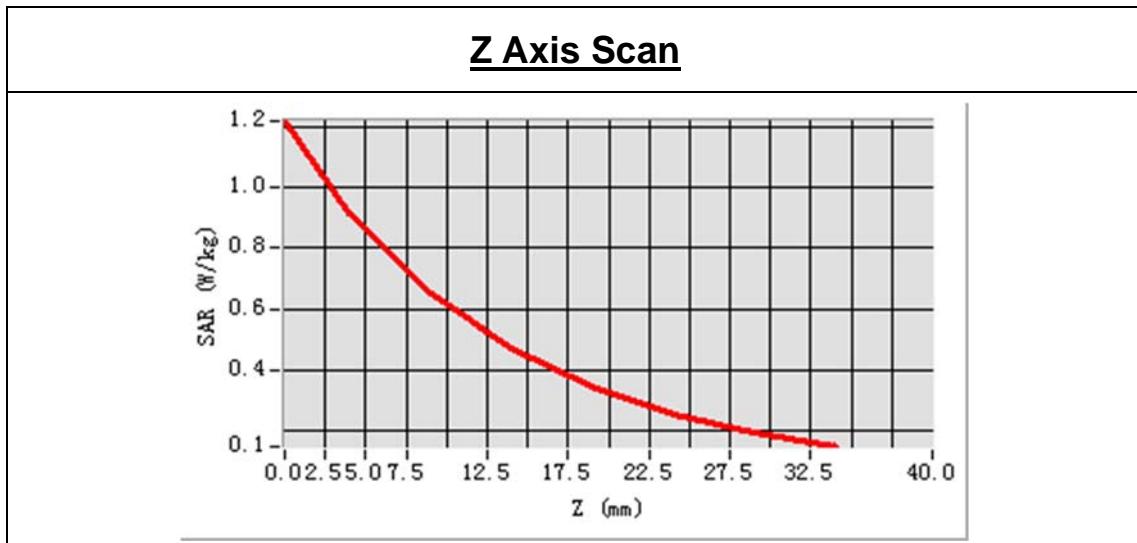
Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	750MHz
Signal	CW
Frequency (MHz)	750.000000
Relative permittivity (real part)	56.542351
Conductivity (S/m)	0.944257
Power drift (%)	-0.290000
Ambient Temperature:	22.2°C
Liquid Temperature:	21.1°C
ConvF:	1.66
Crest factor:	1:1



Maximum location: X=1.00, Y=0.00
SAR Peak: 1.18 W/kg

SAR 10 g (W/Kg)	0.589950
SAR 1g (W/Kg)	0.874385



System Performance Check Data(835 MHz Head)

Type: Phone measurement (Complete)

E-Field Probe: SN 3117 EPGO321

Area scan resolution: dx=8 mm, dy=8 mm

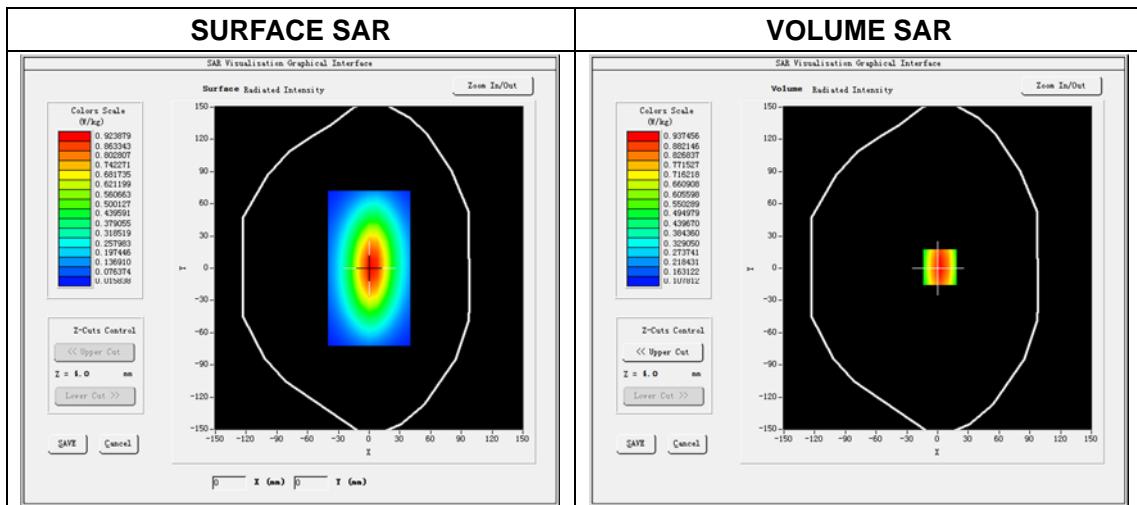
Zoom scan resolution: dx=8 mm, dy=8 mm, dz=5 mm

Date of measurement: 2018.09.12

Measurement duration: 13 minutes 55 seconds

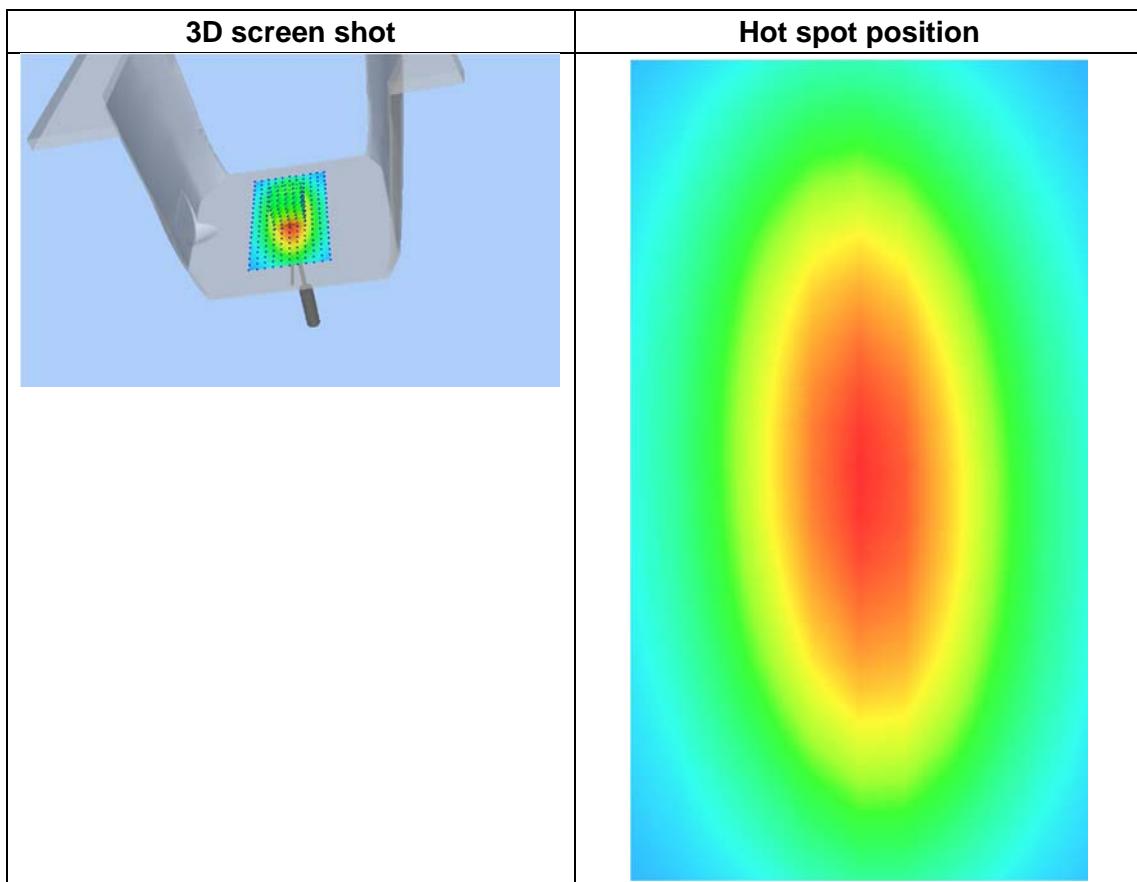
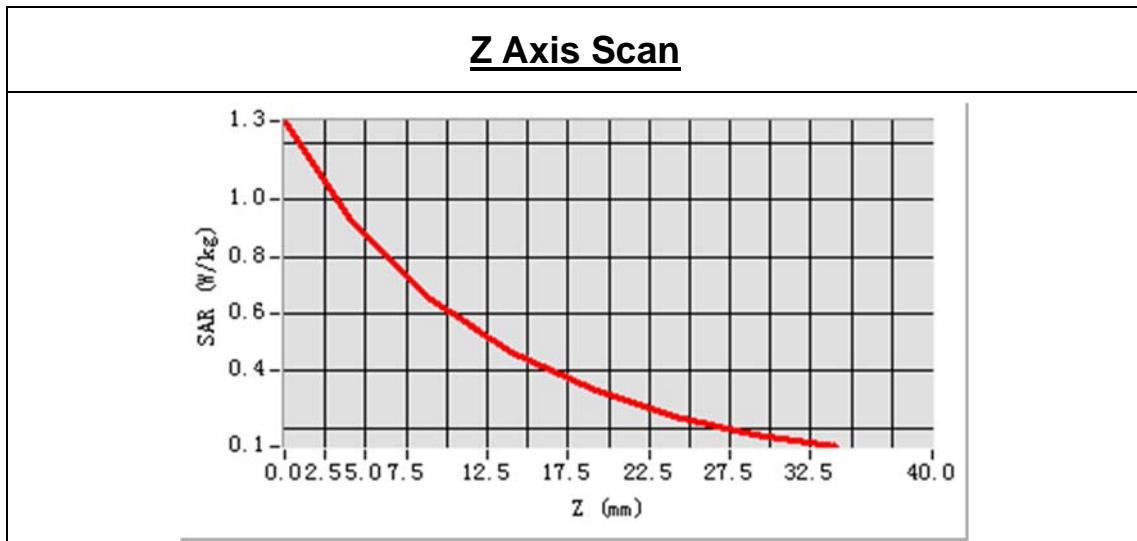
Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	835 MHz
Signal	CW
Frequency (MHz)	835.000000
Relative permittivity (real part)	42.573250
Conductivity (S/m)	0.918013
Power drift (%)	0.730000
Ambient Temperature:	22.2°C
Liquid Temperature:	21.1°C
ConvF:	1.71
Crest factor:	1:1



Maximum location: X=0.00, Y=0.00
SAR Peak: 1.29 W/kg

SAR 10 g (W/Kg)	0.598042
SAR 1 g (W/Kg)	0.906254



System Performance Check Data(835 MHz Body)

Type: Phone measurement (Complete)

E-Field Probe: SN 3117 EPGO321

Area scan resolution: dx=8mm,dy=8mm

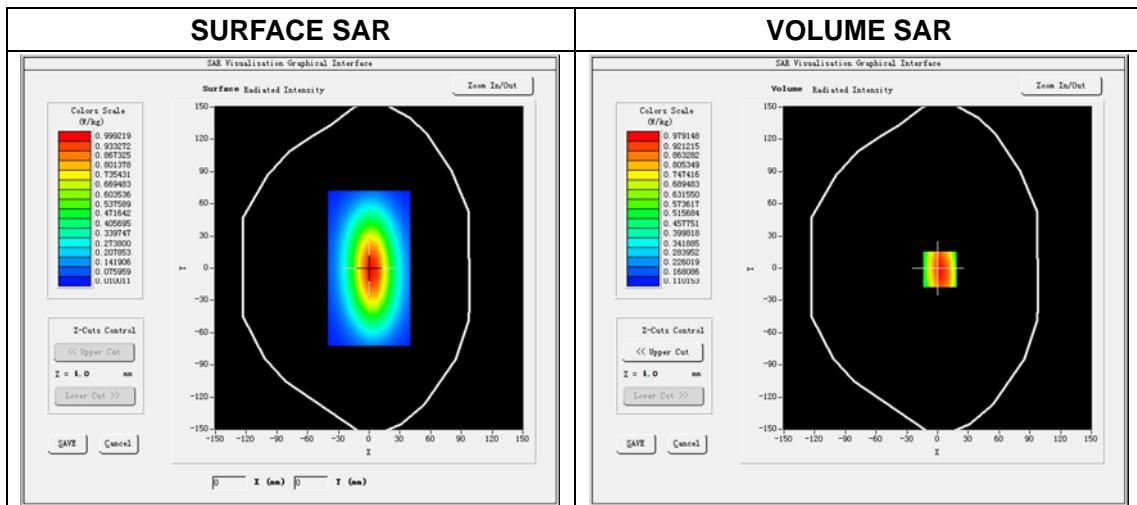
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2018.09.12

Measurement duration: 13 minutes 42 seconds

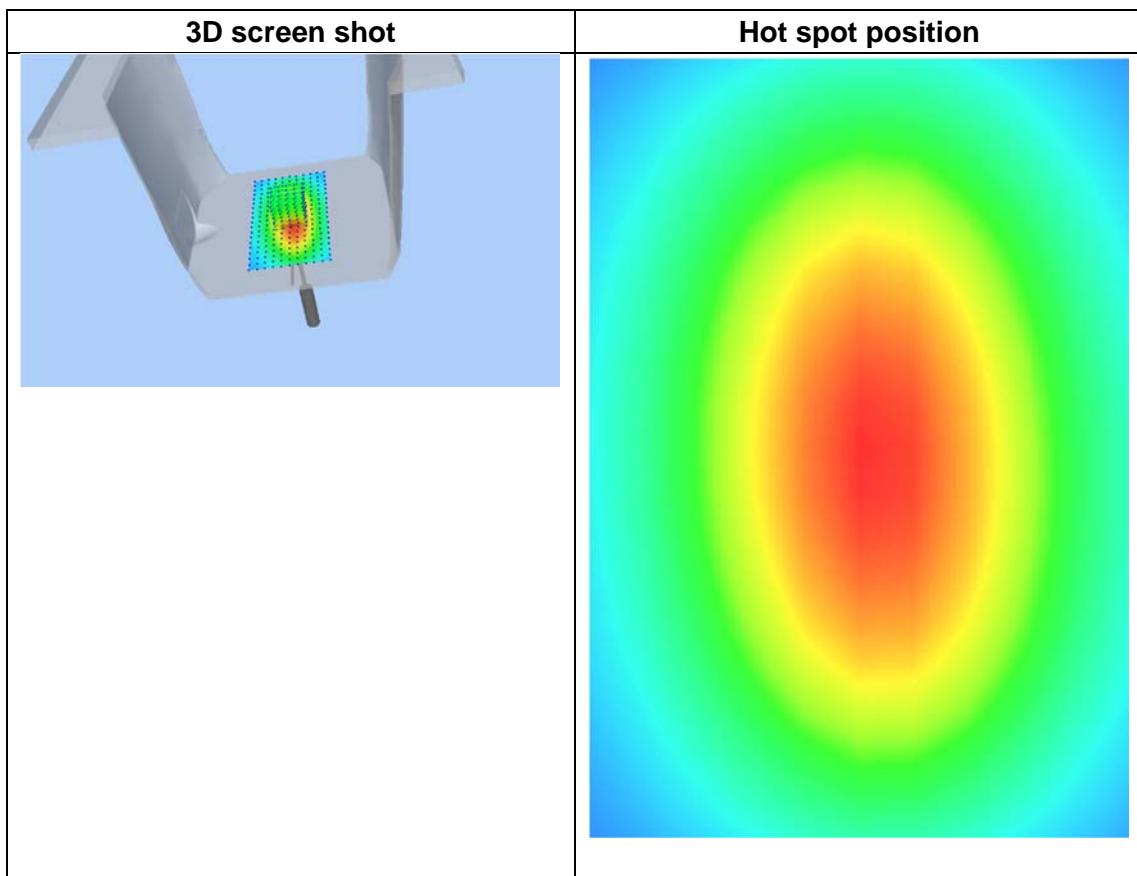
Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	835MHz
Signal	CW
Frequency (MHz)	835.000000
Relative permittivity (real part)	56.854317
Conductivity (S/m)	0.953425
Power drift (%)	-0.420000
Ambient Temperature:	22.2°C
Liquid Temperature:	21.1°C
ConvF:	1.78
Crest factor:	1:1



Maximum location: X=2.00, Y=-1.00
SAR Peak: 1.25 W/kg

SAR 10 g (W/Kg)	0.653148
SAR 1g (W/Kg)	0.974264



System Performance Check Data(1900MHz Head)

Type: Phone measurement (Complete)

E-Field Probe: SN 3117 EPGO321

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2018.09.14

Measurement duration: 14 minutes 03 seconds

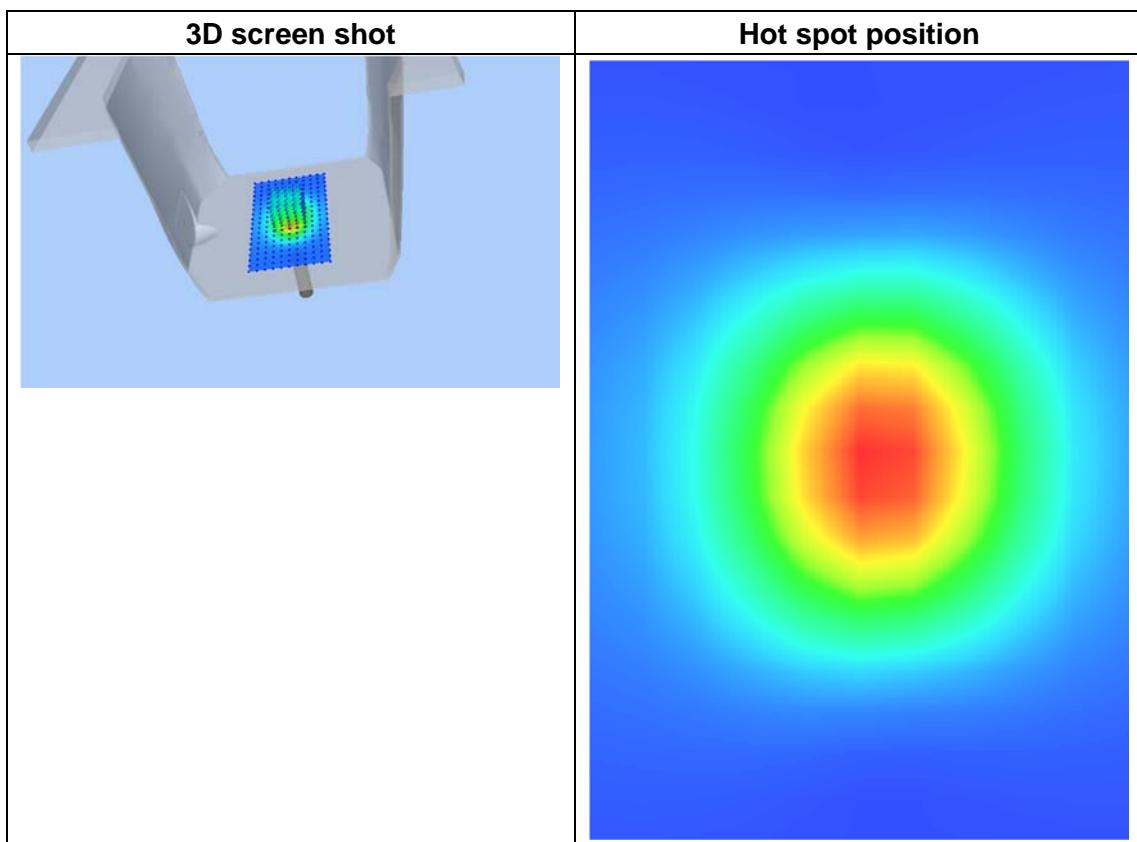
Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	1900MHz
Signal	CW
Frequency (MHz)	1900.000000
Relative permittivity (real part)	40.313256
Conductivity (S/m)	1.389250
Power drift (%)	-0.220000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.3°C
ConvF:	2.17
Crest factor:	1:1



Maximum location: X=1.00, Y=0.00
SAR Peak: 6.13W/kg

SAR 10g (W/Kg)	1.942758
SAR 1g (W/Kg)	3.735120



System Performance Check Data(1900MHz Body)

Type: Phone measurement (Complete)

E-Field Probe: SN 3117 EPGO321

Area scan resolution: dx=8mm,dy=8mm

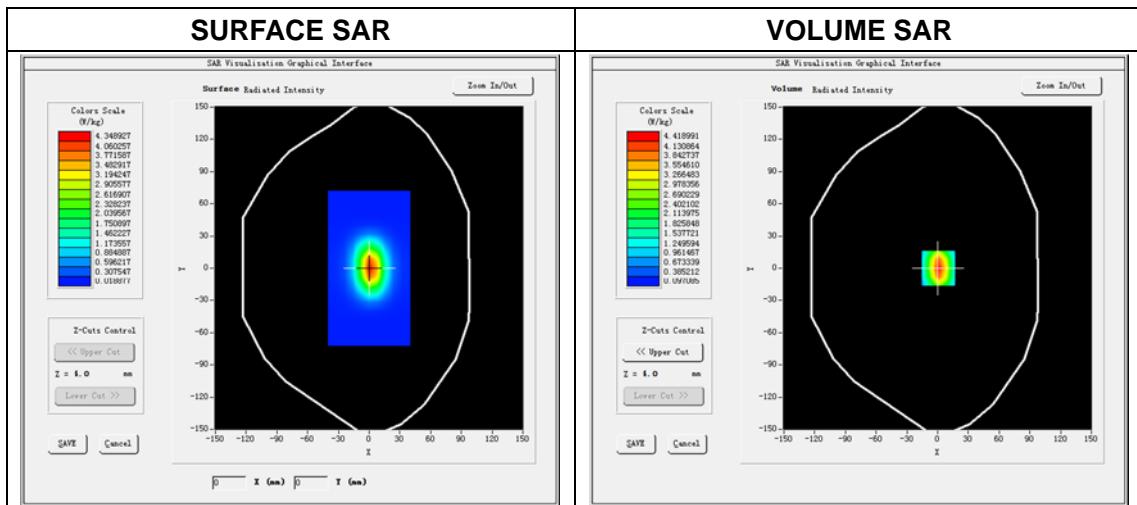
Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2018.09.14

Measurement duration: 13 minutes 48 seconds

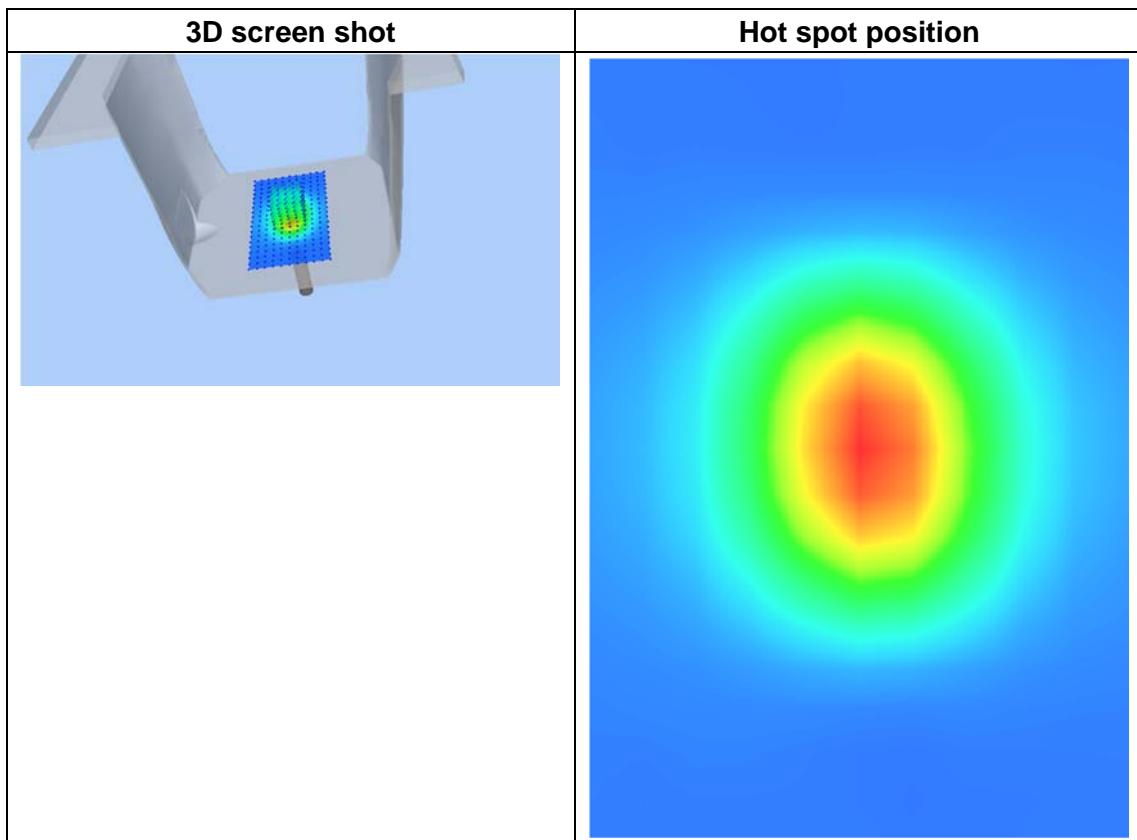
Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Band	1900MHz
Signal	CW
Frequency (MHz)	1900.000000
Relative permittivity (real part)	51.579308
Conductivity (S/m)	1.485324
Power drift (%)	-0.510000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.3°C
ConvF:	2.23
Crest factor:	1:1



Maximum location: X=1.00, Y=0.00
SAR Peak: 6.80W/kg

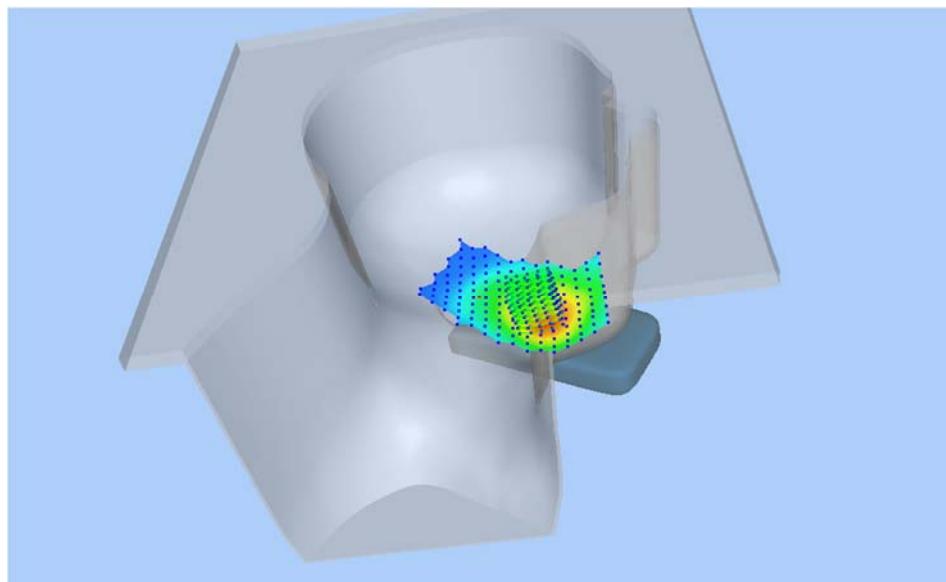
SAR 10g (W/Kg)	2.146048
SAR 1g (W/Kg)	4.172235



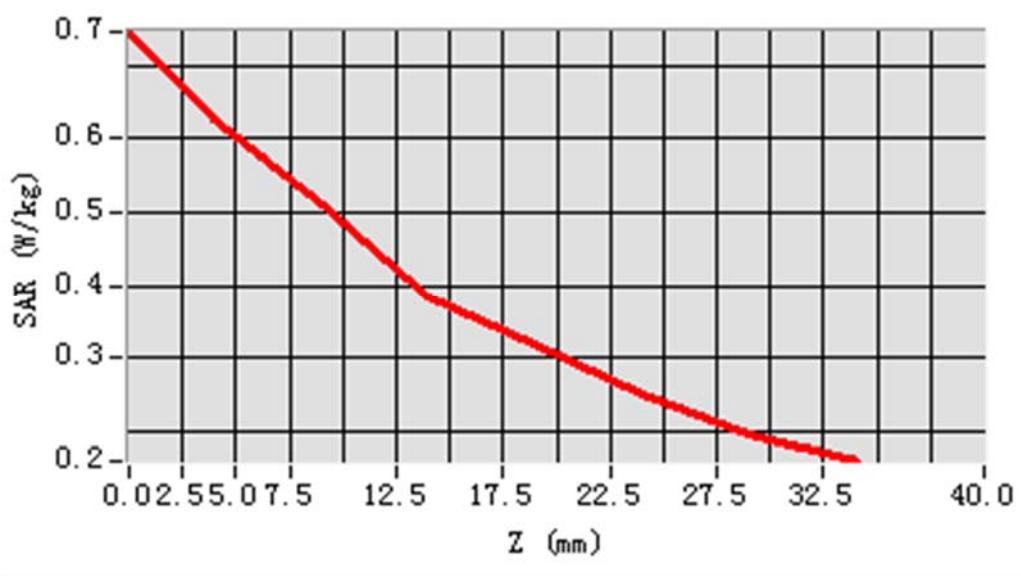
ANNEX C TEST DATA

MEAS. 1 Left Head with Cheek on Middle Channel in GPRS 850(2TX Slots) mode Phone only

Test Date: 12/9/2018
Measurement duration: 11 minutes 23 seconds
Signal: GSM, f=836.6 MHz, Duty Cycle: 1:4.0
LiquidParameters: Permittivity: 42.52; Conductivity: 0.92 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.71
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-46.000000, Y=-36.000000
SAR 10g (W/Kg): 0.441679
SAR 1g(W/Kg): 0.605051
Power drift (%): 0.15
3D screen shot

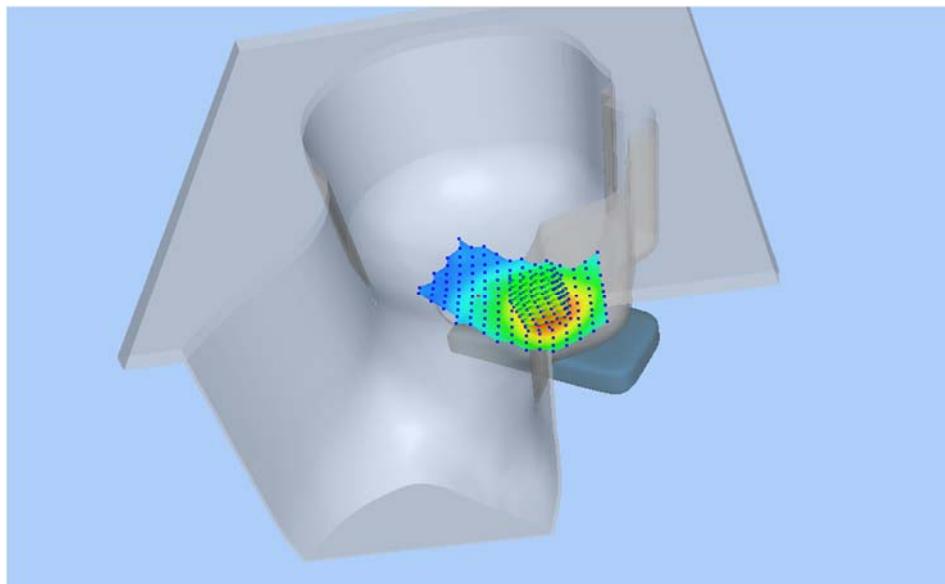
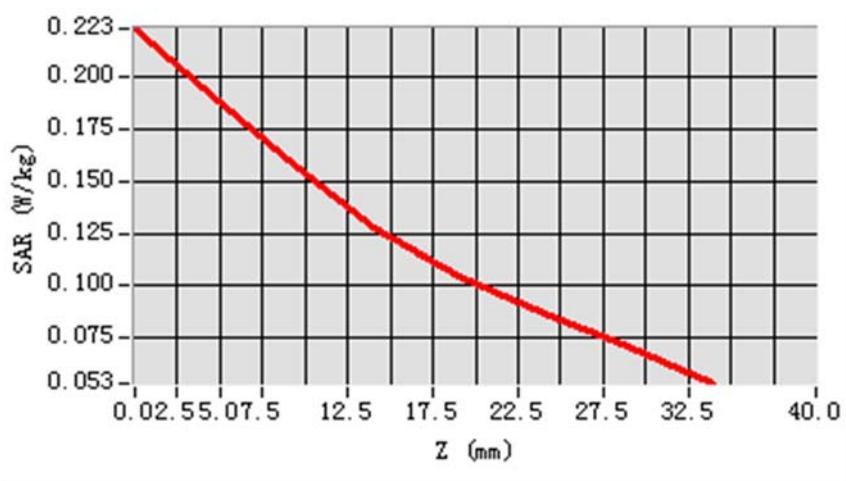


Z Axis Scan



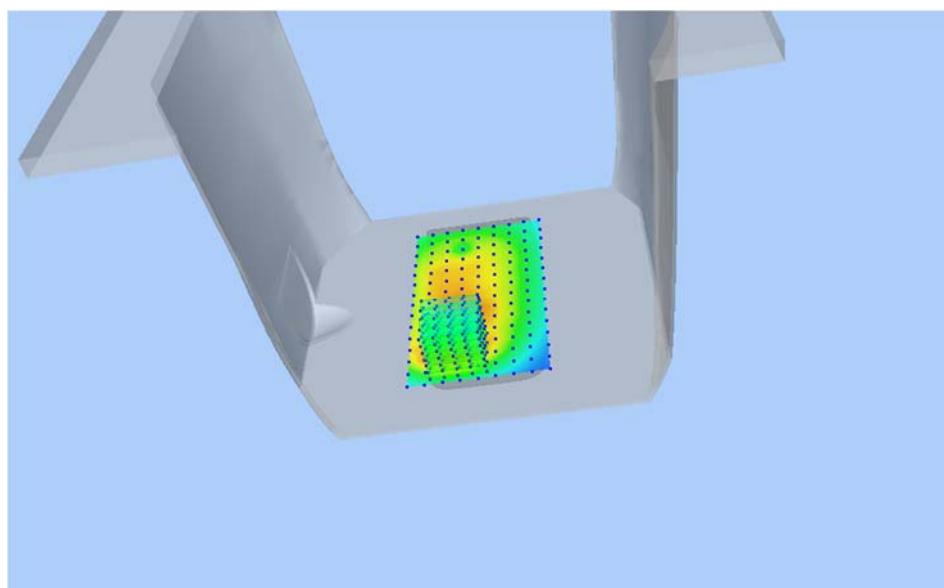
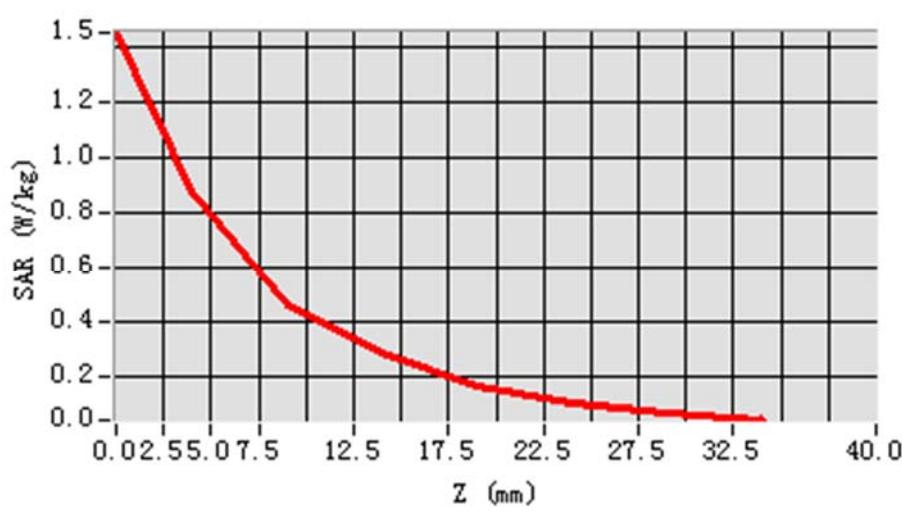
MEAS. 2 Left Head with Cheek on Middle Channel in GPRS 850(2TX Slots) mode With case

Test Date: 12/9/2018
Measurement duration: 12 minutes 7 seconds
Signal: GSM, f=836.6 MHz, Duty Cycle: 1:4.0
LiquidParameters: Permittivity: 42.52; Conductivity: 0.92 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.71
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-56.000000, Y=-36.000000
SAR 10g (W/Kg): 0.143676
SAR 1g(W/Kg): 0.190228
Power drift (%): -1.23
3D screen shot

**Z Axis Scan**

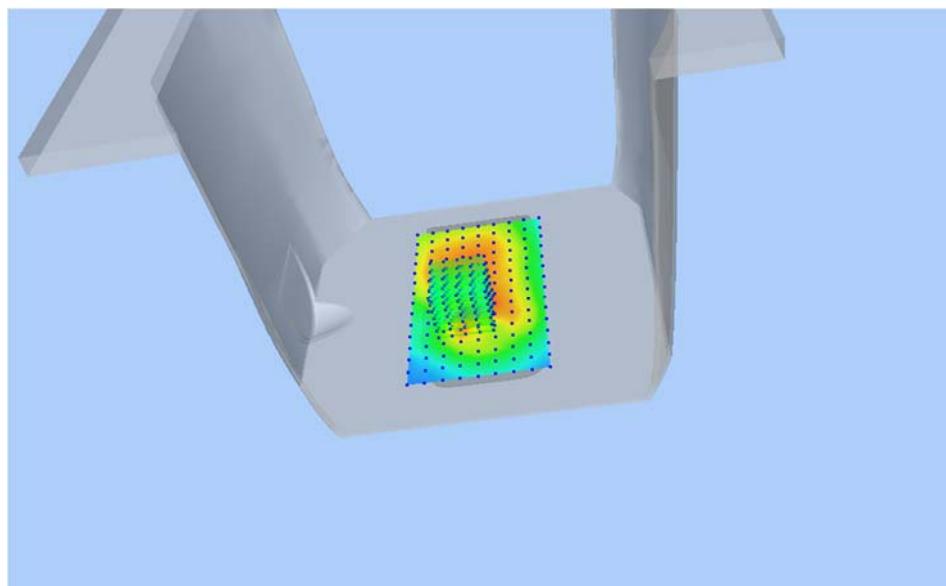
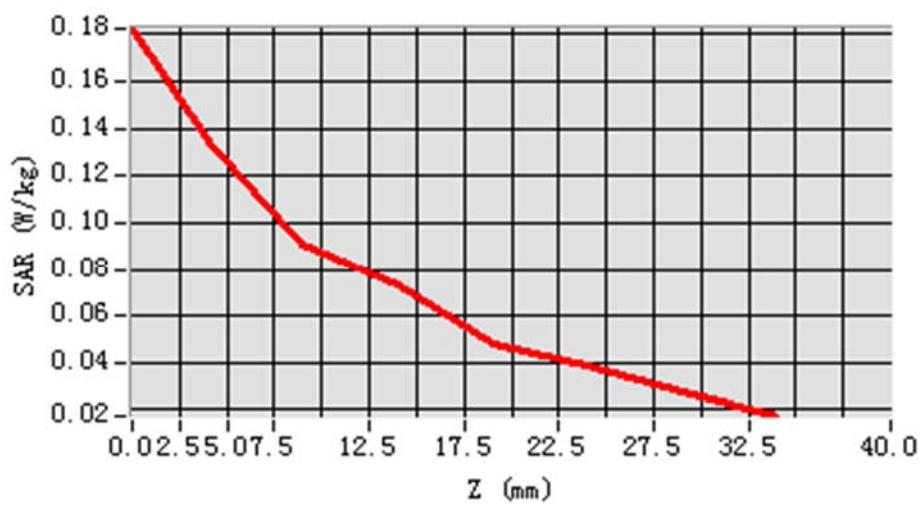
MEAS. 3Body Plane with Front Side 5 mm on High Channel in GPRS 850(2TX Slots) mode Phone only

Test Date: 12/9/2018
Measurement duration: 9 minutes 33 seconds
Signal: GSM, f=848.8 MHz, Duty Cycle: 1:4.0
LiquidParameters: Permittivity: 56.70; Conductivity: 0.97 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.78
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-10.000000, Y=-52.000000
SAR 10g (W/Kg): 0.429268
SAR 1g(W/Kg): 0.830796
Power drift (%): -2.85
3D screen shot

**Z Axis Scan**

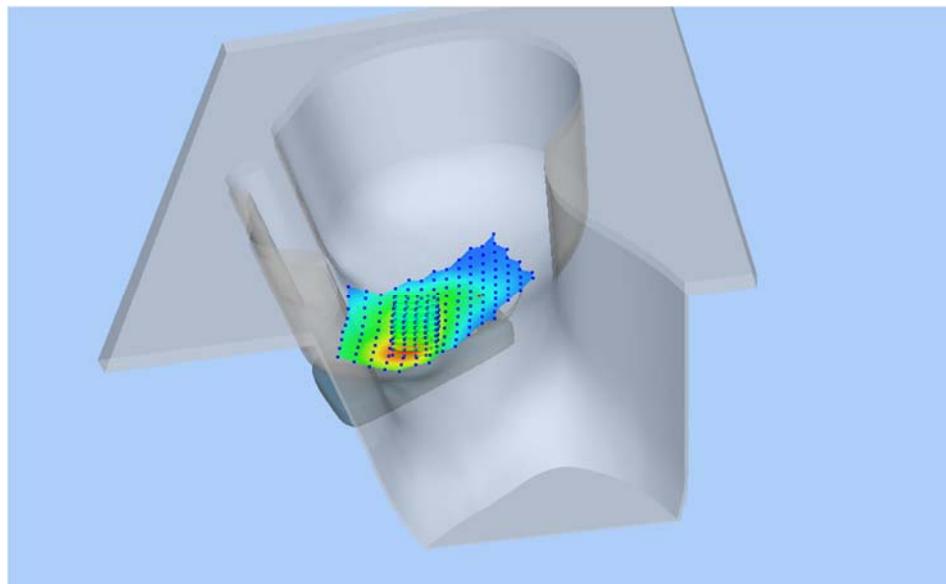
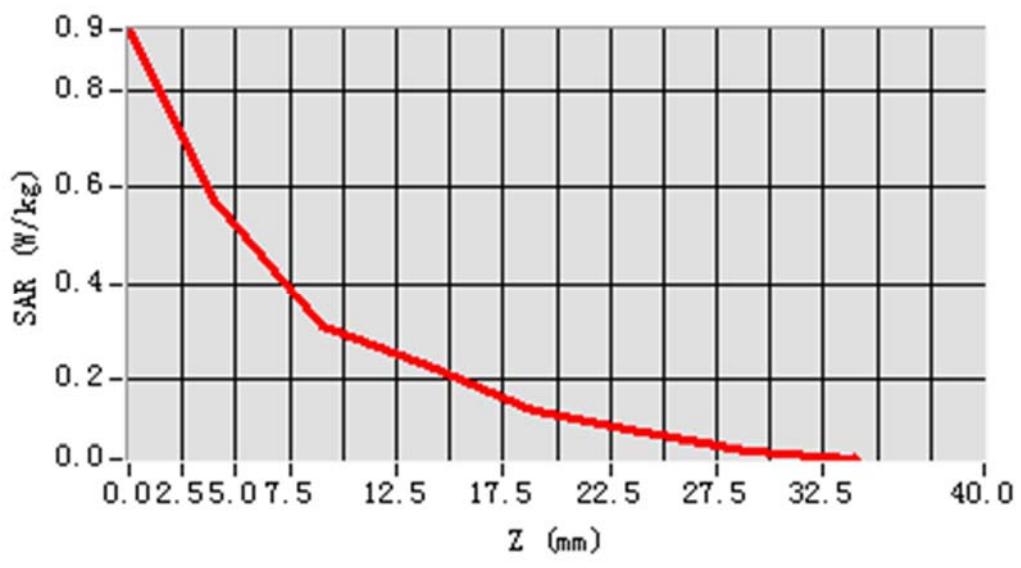
MEAS. 4 Body Plane with Front Side 5 mm on High Channel in GPRS 850(2TX Slots) mode With case

Test Date: 12/9/2018
Measurement duration: 10 minutes 19 seconds
Signal: GSM, f=848.8 MHz, Duty Cycle: 1:4.0
LiquidParameters: Permittivity: 56.70; Conductivity: 0.97 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.78
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-10.000000, Y=-22.000000
SAR 10g (W/Kg): 0.078478
SAR 1g(W/Kg): 0.123878
Power drift (%): -2.48
3D screen shot

**Z Axis Scan**

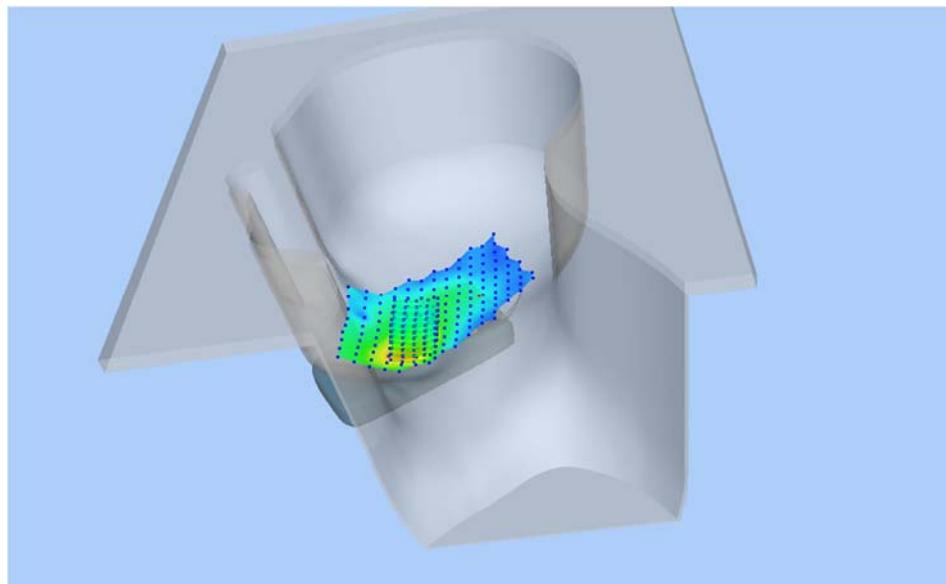
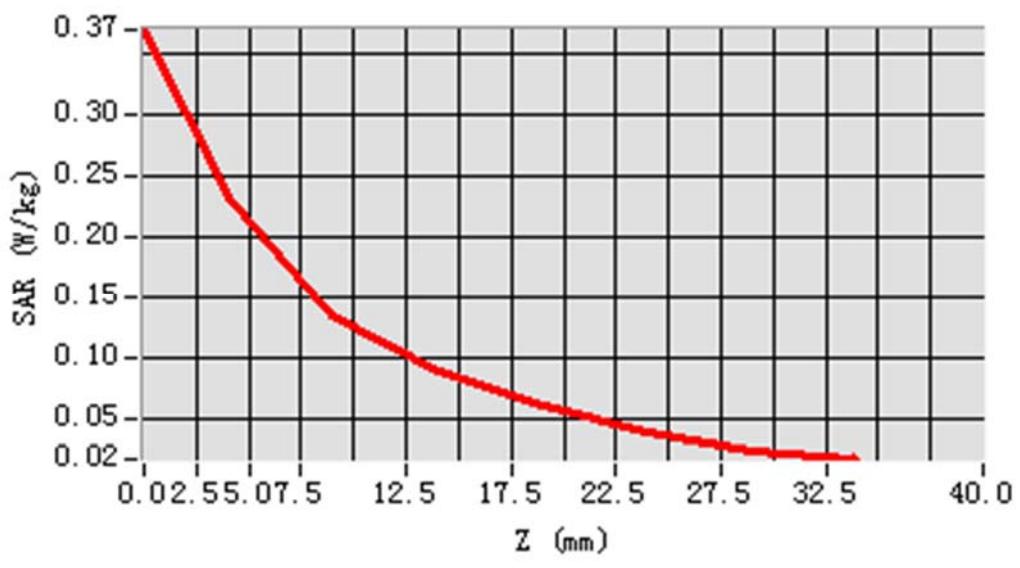
MEAS. 5 Right Head with Cheek on Middle Channel in GPRS 1900(2TX Slots) mode Phone only

Test Date: 14/9/2018
Measurement duration: 11 minutes 22 seconds
Signal: GSM, f=1880.0 MHz, Duty Cycle: 1:4.0
LiquidParameters: Permittivity: 40.52; Conductivity: 1.38 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.17
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-46.000000, Y=-46.000000
SAR 10g (W/Kg): 0.327944
SAR 1g(W/Kg): 0.560352
Power drift (%): 2.08
3D screen shot

**Z Axis Scan**

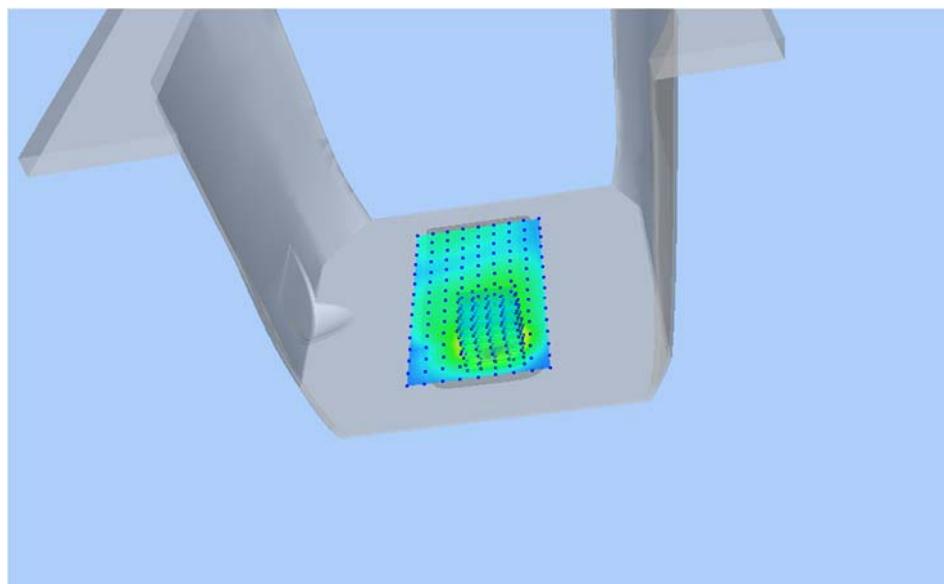
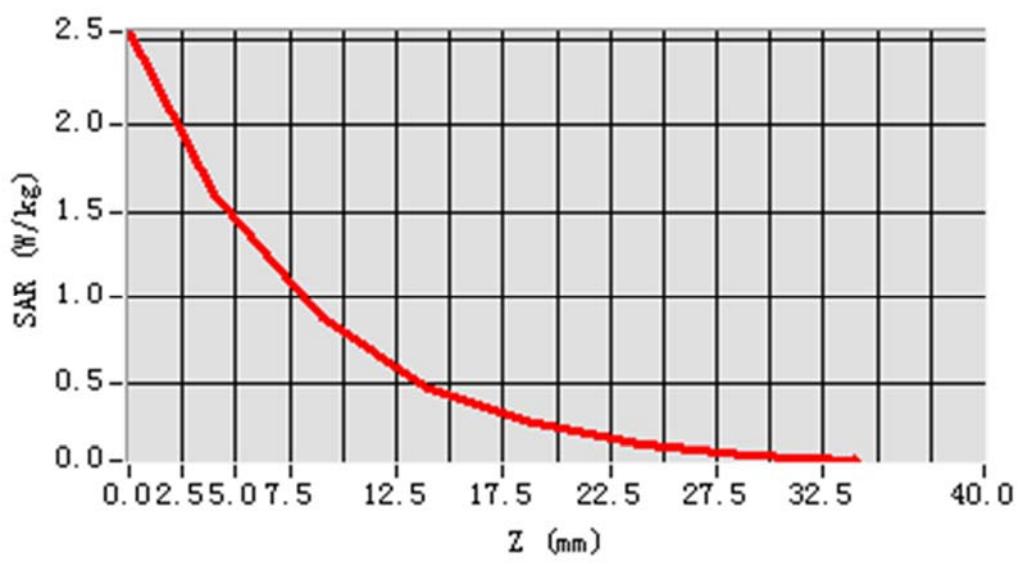
MEAS. 6 Right Head with Cheek on Middle Channel in GPRS 1900(2TX Slots) mode With case

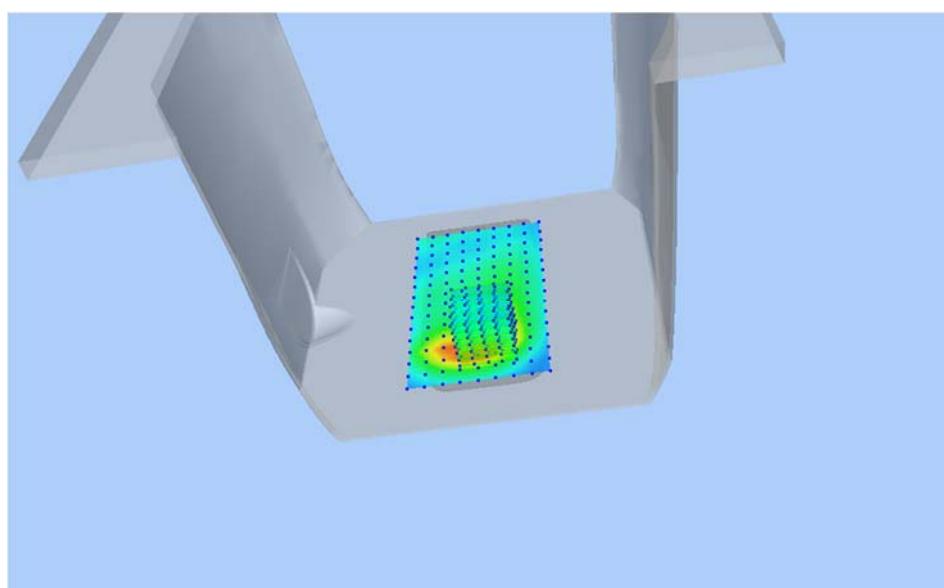
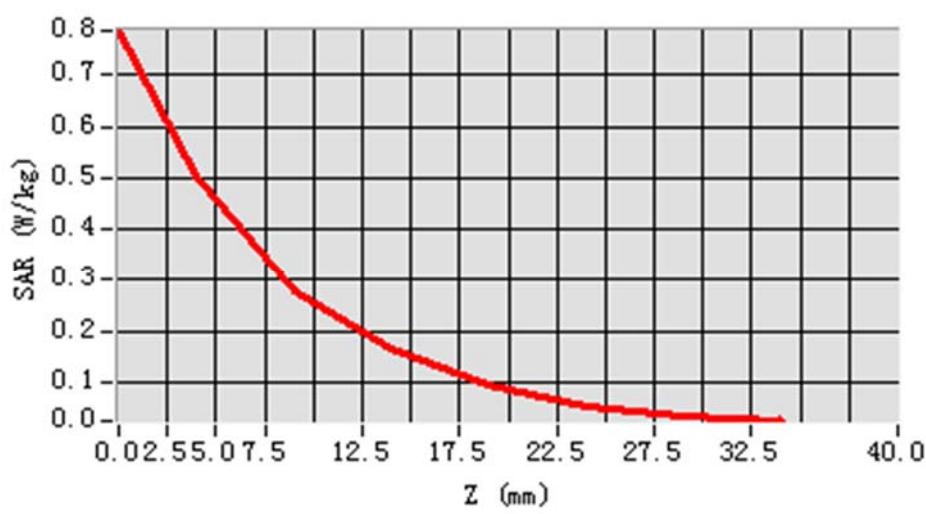
Test Date: 14/9/2018
Measurement duration: 11 minutes 39 seconds
Signal: GSM, f=1880.0 MHz, Duty Cycle: 1:4.0
LiquidParameters: Permittivity: 40.52; Conductivity: 1.38 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.17
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-46.000000, Y=-56.000000
SAR 10g (W/Kg): 0.120230
SAR 1g(W/Kg): 0.217854
Power drift (%): -1.38
3D screen shot

**Z Axis Scan**

MEAS. 7 Body Plane with Front Side 5 mm on Middle Channel in GPRS 1900(2TX Slots) mode Phone only

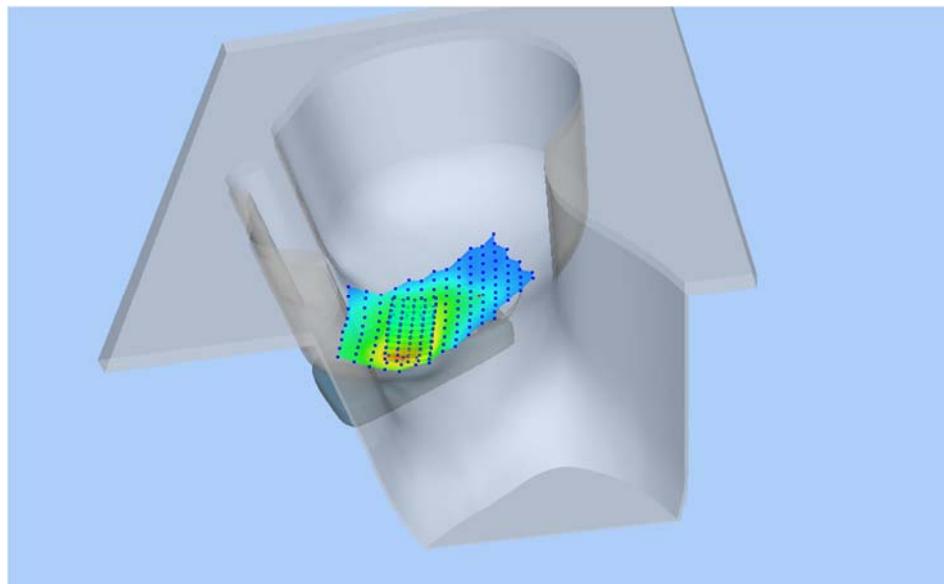
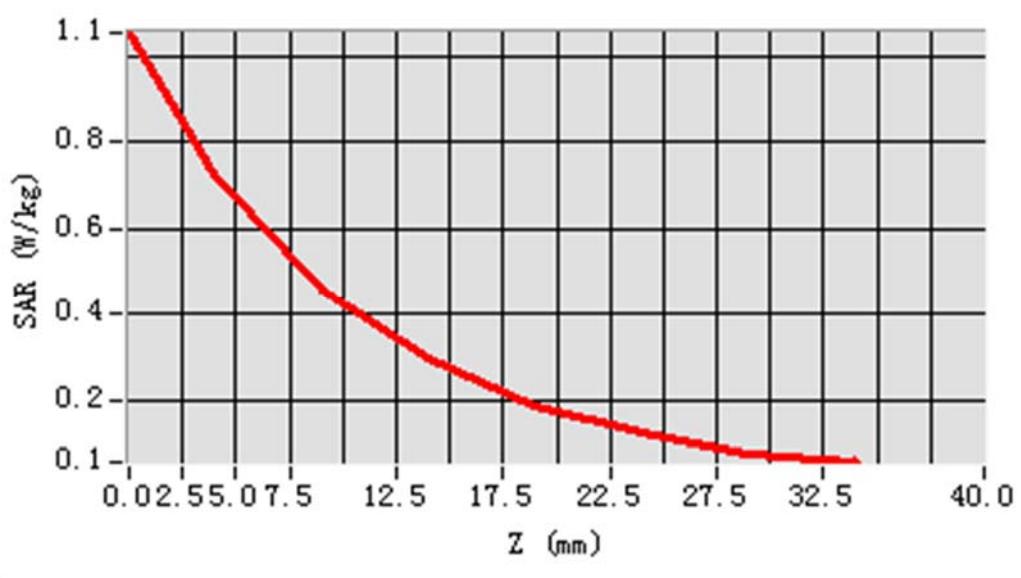
Test Date: 14/9/2018
Measurement duration: 12 minutes 42 seconds
Signal: GSM, f=1880.0 MHz, Duty Cycle: 1:4.0
LiquidParameters: Permittivity: 51.27; Conductivity: 1.46 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.23
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete
Maximum location: X=10.000000, Y=-52.000000
SAR 10g (W/Kg): 0.712603
SAR 1g(W/Kg): 1.542945
Power drift (%): -0.88
3D screen shot

**Z Axis Scan**

MEAS. 8 Body Plane with Front Side 5 mm on Middle Channel in GPRS 1900(2TX Slots) mode With case**Test Date:** 14/9/2018**Measurement duration:** 12 minutes 16 seconds**Signal:** GSM, f=1880.0 MHz, Duty Cycle: 1:4.0**LiquidParameters:** Permittivity: 51.27; Conductivity: 1.46 S/m**Test condition:** Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C**Probe:** SN 3117 EPGO321, ConvF: 2.23**Area Scan:** sam_direct_droit2_surf10mm.txt, h= 5.00 mm**ZoomScan:** 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete**Maximum location:** X=10.000000, Y=-42.000000**SAR 10g (W/Kg):** 0.254842**SAR 1g(W/Kg):** 0.509127**Power drift (%):** -4.72**3D screen shot****Z Axis Scan**

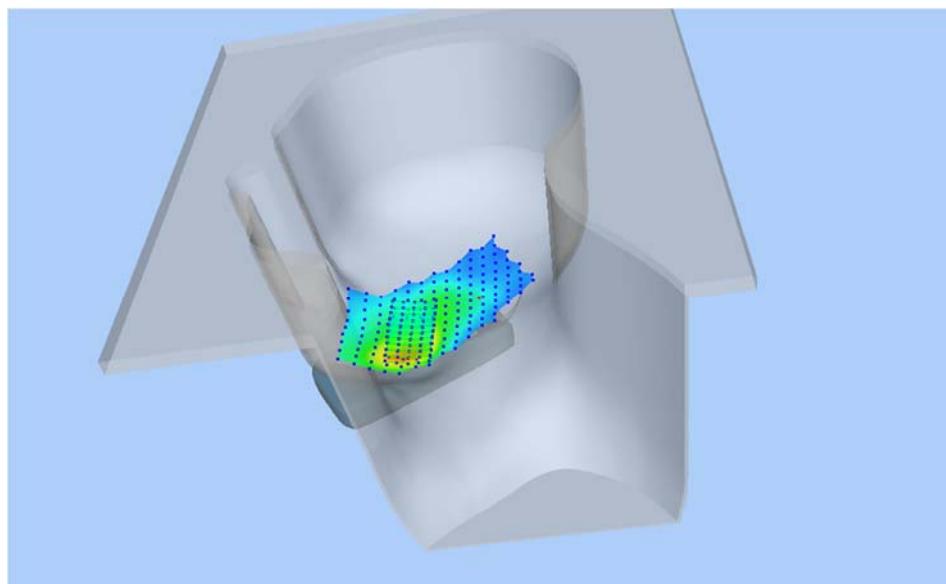
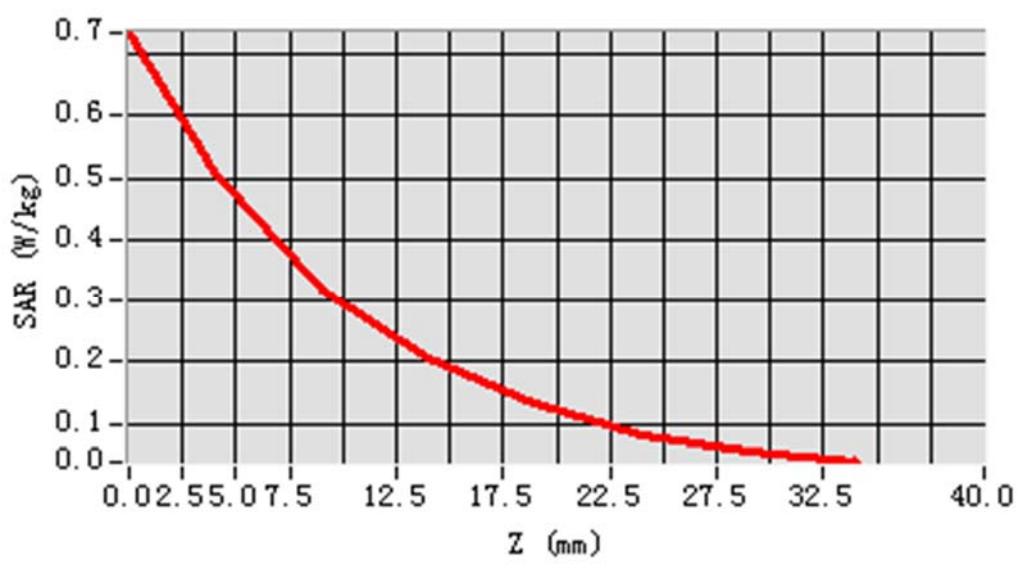
MEAS. 9 Right Head with Cheek on High Channel in WCDMA Band 2 mode Phone only

Test Date: 14/9/2018
Measurement duration: 11 minutes 29 seconds
Signal: WCDMA, f=1907.6 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 40.29; Conductivity: 1.39 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.17
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-56.000000, Y=-56.000000
SAR 10g (W/Kg): 0.408391
SAR 1g(W/Kg): 0.703366
Power drift (%): -1.89
3D screen shot

**Z Axis Scan**

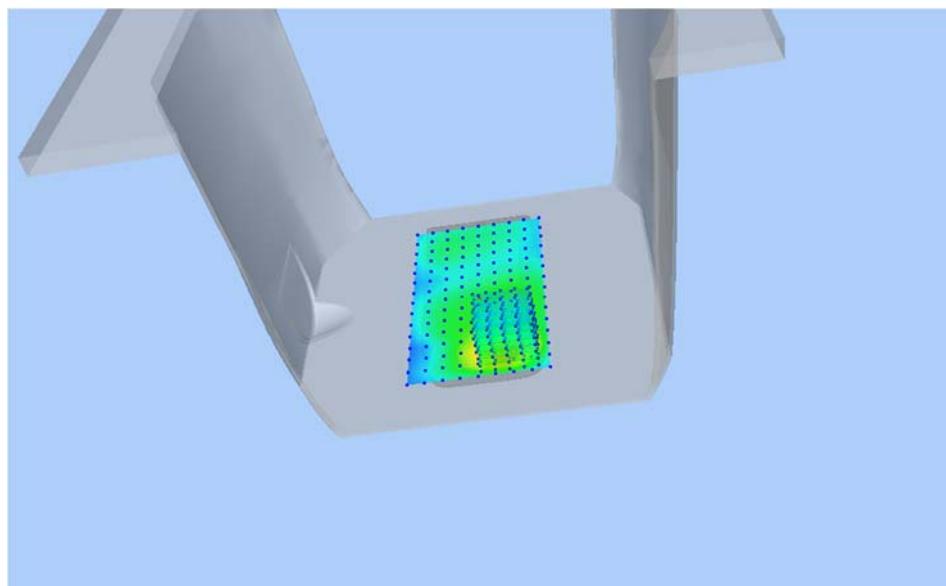
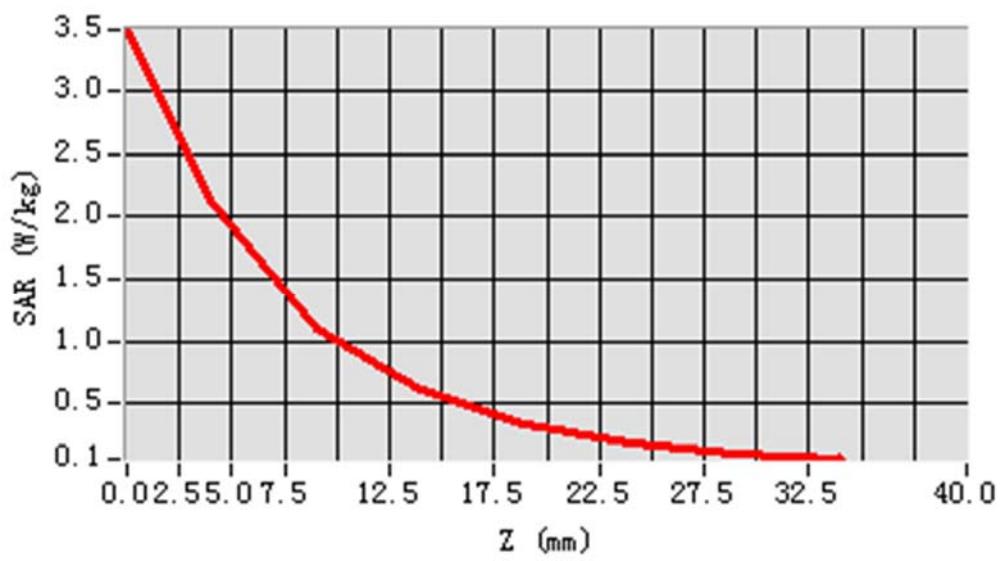
MEAS. 10 Right Head with Cheek on High Channel in WCDMA Band 2 mode With case

Test Date: 14/9/2018
Measurement duration: 11 minutes 31 seconds
Signal: WCDMA, f=1907.6 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 40.29; Conductivity: 1.39 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.17
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-56.000000, Y=-56.000000
SAR 10g (W/Kg): 0.276930
SAR 1g(W/Kg): 0.489420
Power drift (%): -3.75
3D screen shot

**Z Axis Scan**

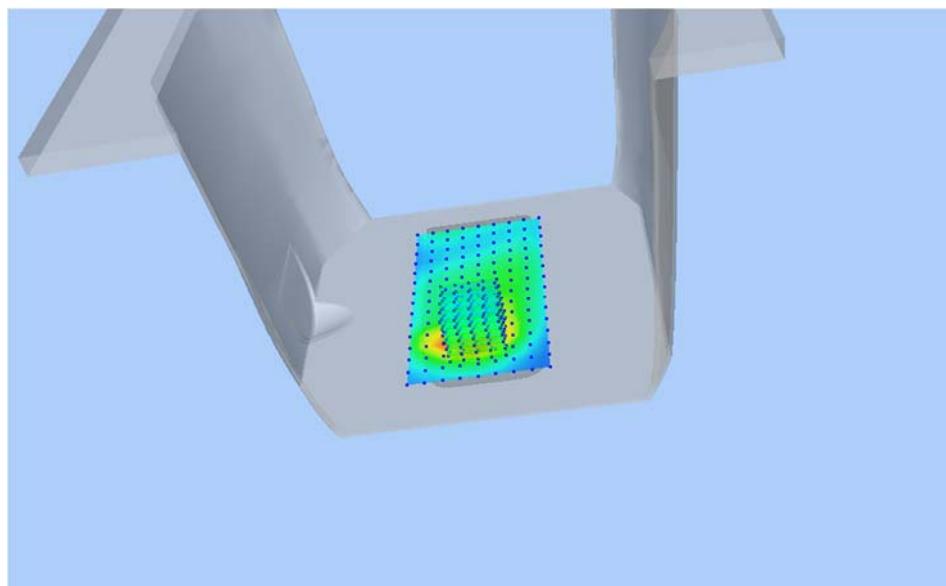
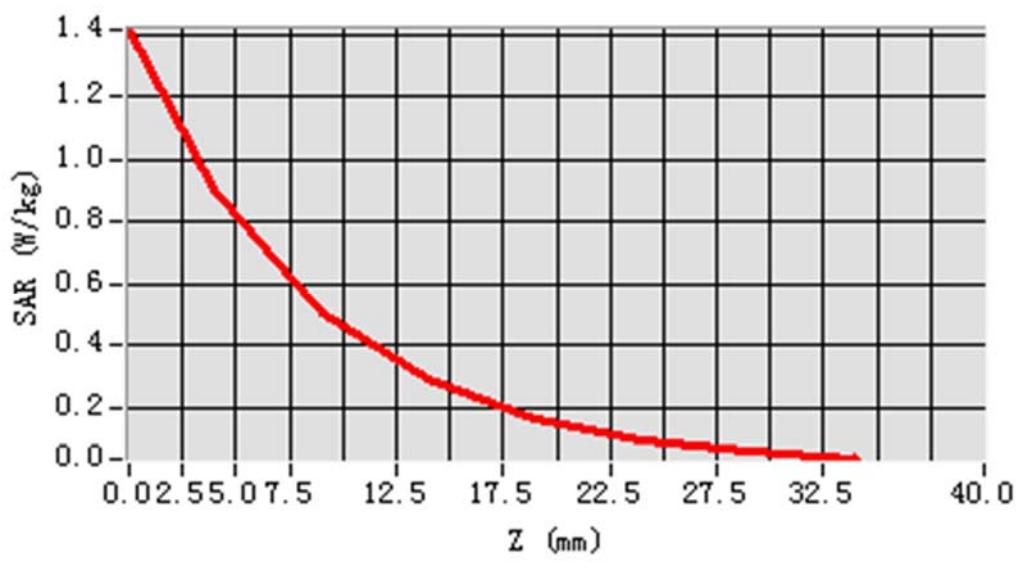
MEAS. 11 Body Plane with Front Side 5 mm on Middle Channel in WCDMA Band 2 mode Phone only

Test Date: 14/9/2018
Measurement duration: 12 minutes 12 seconds
Signal: WCDMA, f=1880.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 51.27; Conductivity: 1.46 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.23
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=18.000000, Y=-52.000000
SAR 10g (W/Kg): 0.974795
SAR 1g(W/Kg): 2.015636
Power drift (%): -0.20
3D screen shot

**Z Axis Scan**

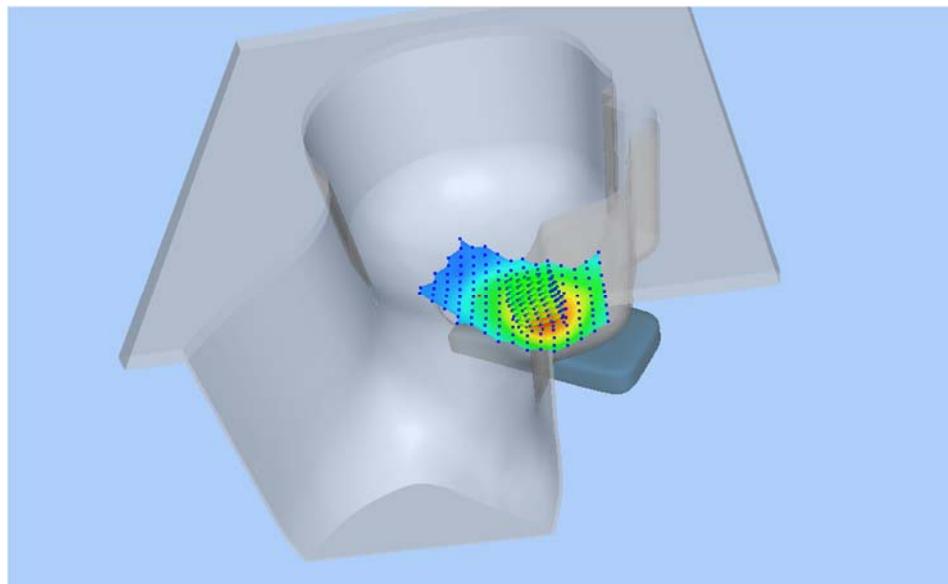
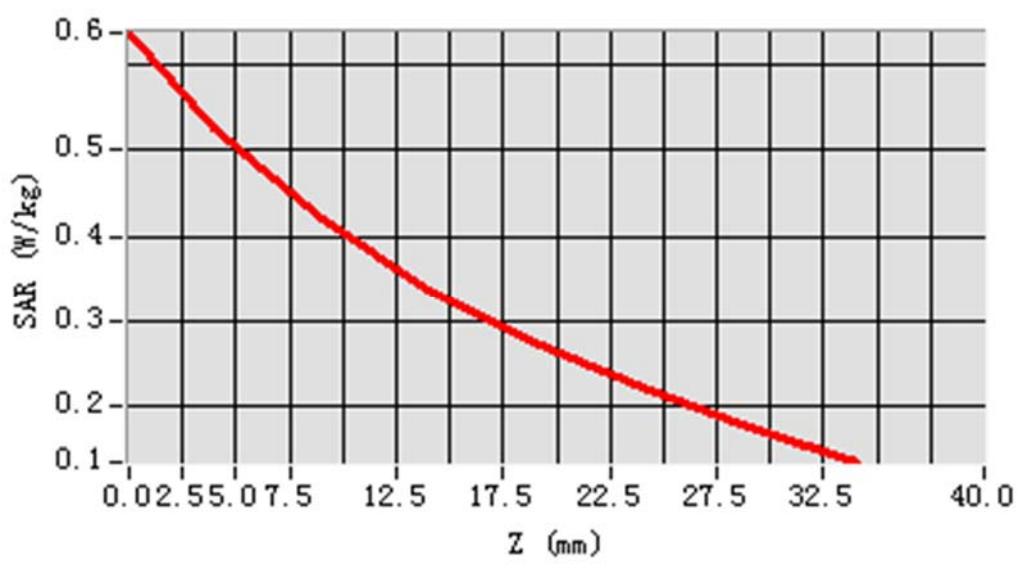
MEAS. 12 Body Plane with Front Side 5 mm on Middle Channel in WCDMA Band 2 mode With case

Test Date: 14/9/2018
Measurement duration: 11 minutes 17 seconds
Signal: WCDMA, f=1880.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 51.27; Conductivity: 1.46 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.23
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=0.000000, Y=-42.000000
SAR 10g (W/Kg): 0.440143
SAR 1g(W/Kg): 0.865776
Power drift (%): -0.23
3D screen shot

**Z Axis Scan**

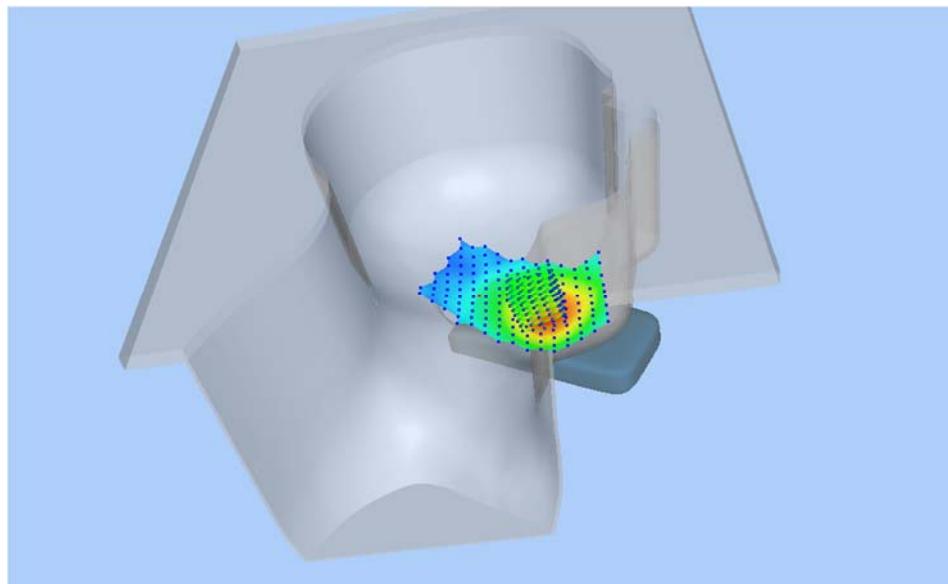
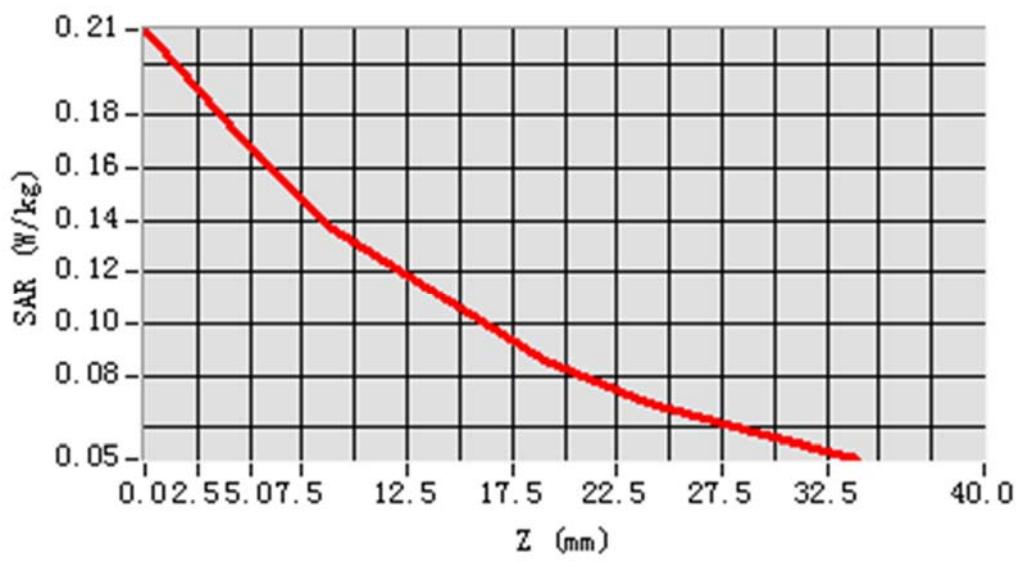
MEAS. 13 Left Head with Cheek on Middle Channel in WCDMA Band 5 mode Phone only

Test Date: 12/9/2018
Measurement duration: 11 minutes 10 seconds
Signal: WCDMA, f=836.6 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 42.52; Conductivity: 0.92 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.71
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-46.000000, Y=-36.000000
SAR 10g (W/Kg): 0.375971
SAR 1g(W/Kg): 0.506941
Power drift (%): -0.06
3D screen shot

**Z Axis Scan**

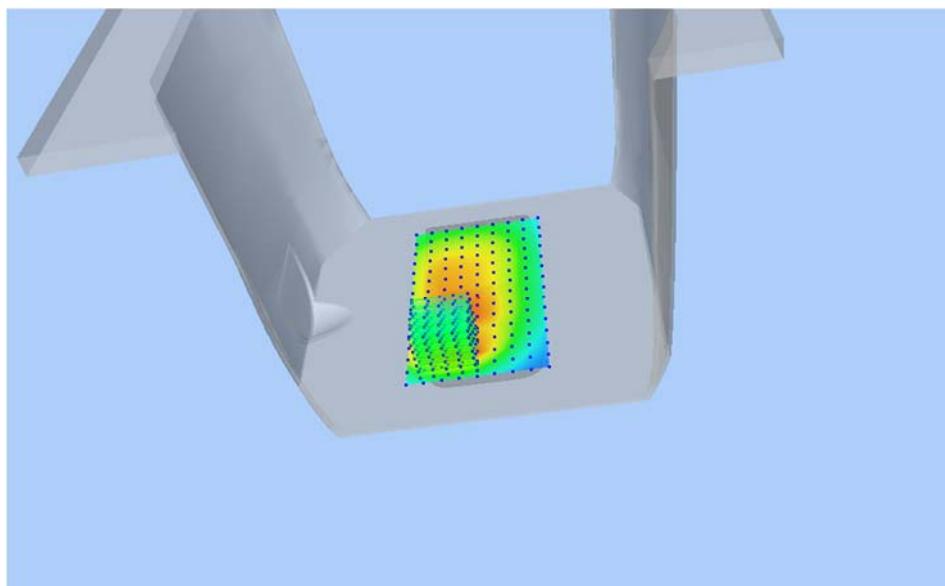
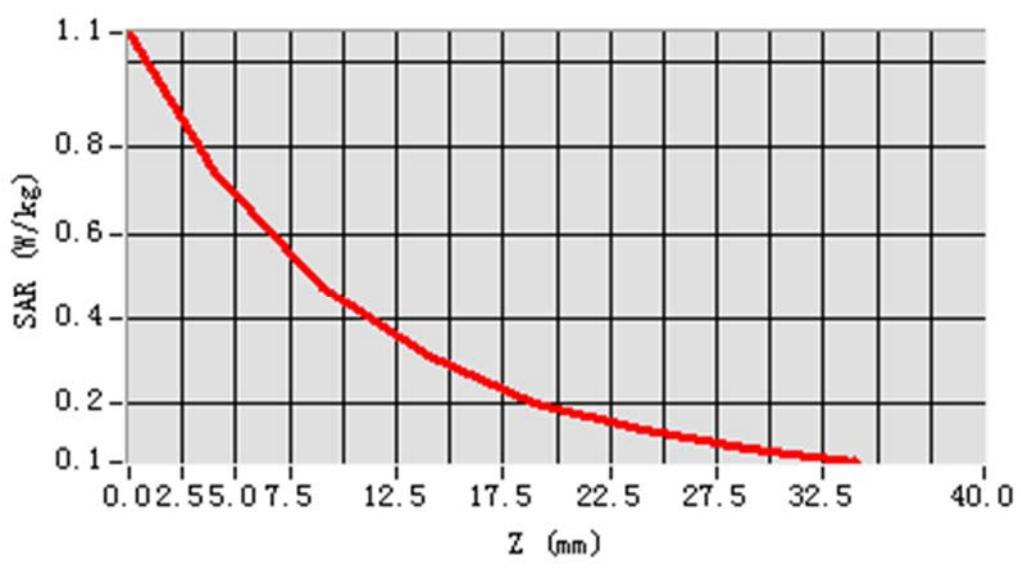
MEAS. 14 Left Head with Cheek on Middle Channel in WCDMA Band 5 mode With case

Test Date: 12/9/2018
Measurement duration: 11 minutes 9 seconds
Signal: WCDMA, f=836.6 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 42.52; Conductivity: 0.92 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.71
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-46.000000, Y=-36.000000
SAR 10g (W/Kg): 0.125283
SAR 1g(W/Kg): 0.169723
Power drift (%): -2.99
3D screen shot

**Z Axis Scan**

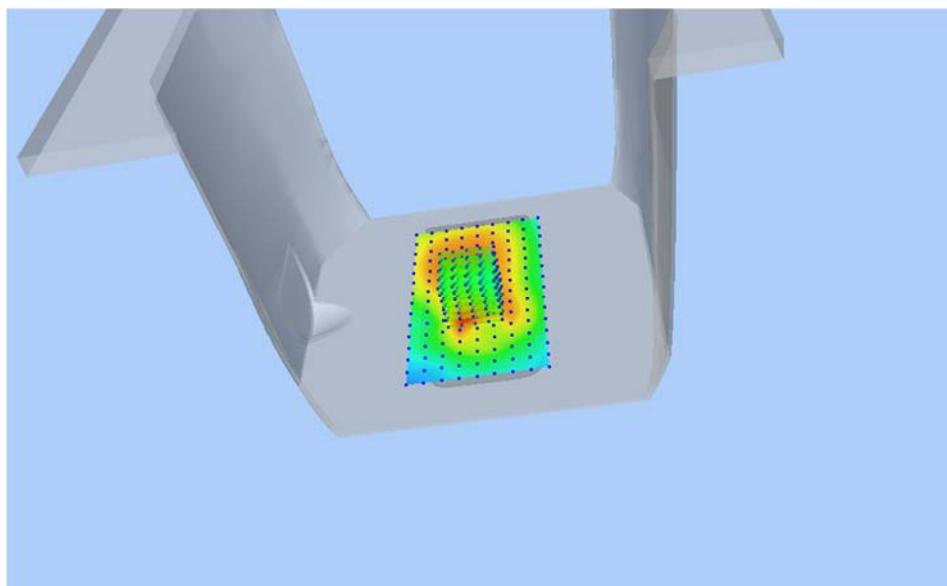
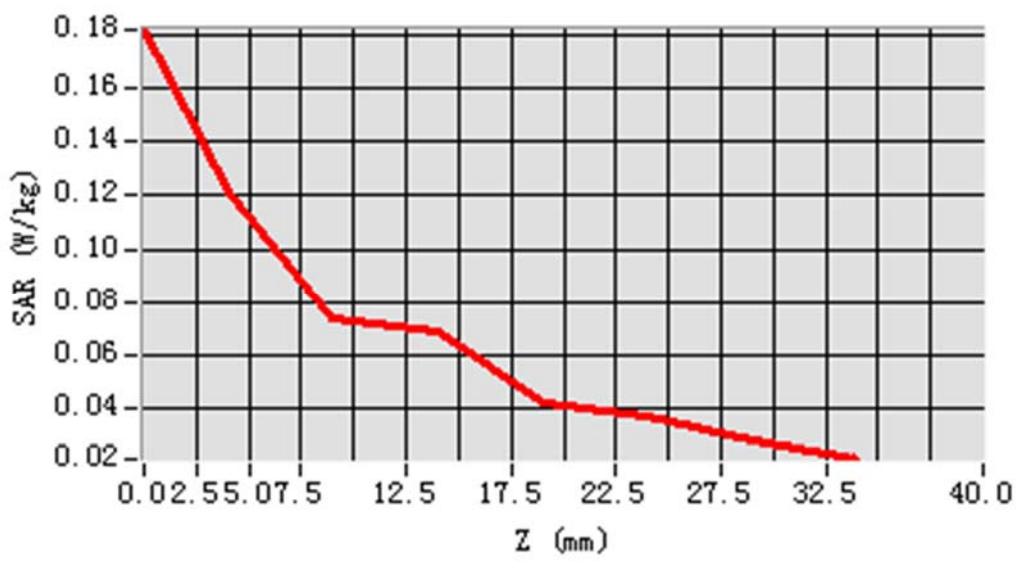
MEAS. 15 Body Plane with Front Side 5 mm on High Channel in WCDMA Band 5 mode Phone only

Test Date: 12/9/2018
Measurement duration: 8 minutes 53 seconds
Signal: WCDMA, f=846.6 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 56.73; Conductivity: 0.97 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.78
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-10.000000, Y=-52.000000
SAR 10g (W/Kg): 0.395390
SAR 1g(W/Kg): 0.700918
Power drift (%): -2.43
3D screen shot

**Z Axis Scan**

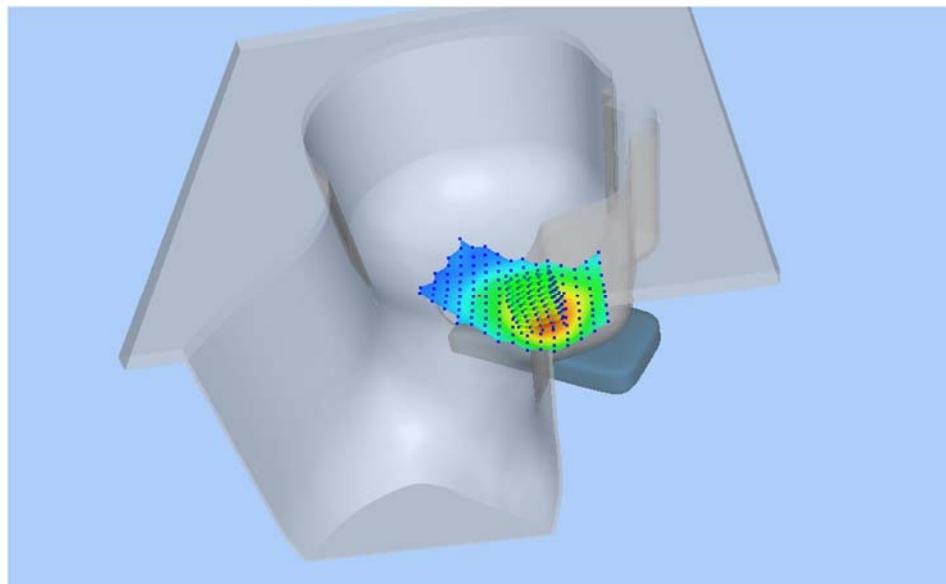
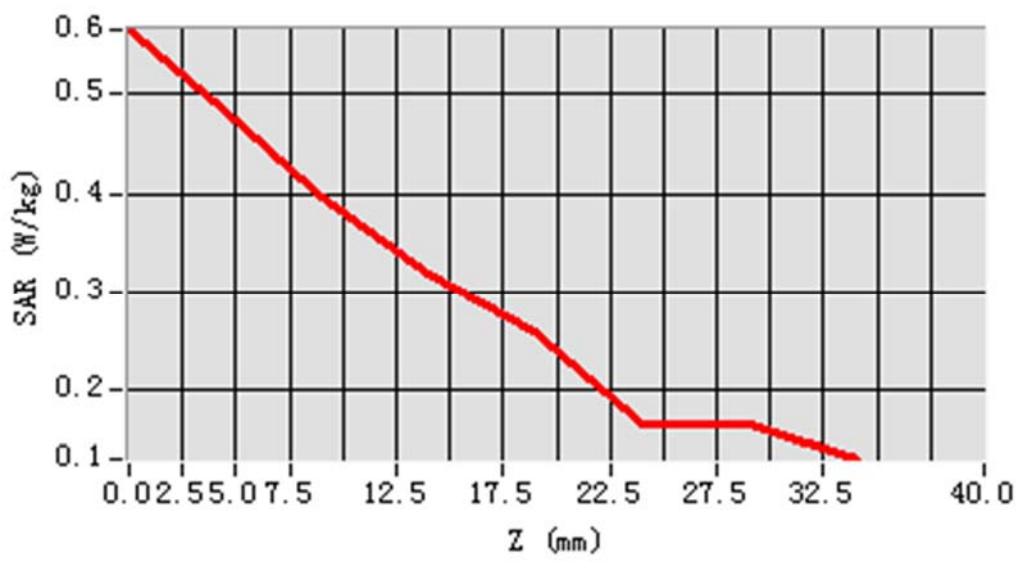
MEAS. 16 Body Plane with Front Side 5 mm on High Channel in WCDMA Band 5 mode With case

Test Date: 12/9/2018
Measurement duration: 11 minutes 28 seconds
Signal: WCDMA, f=846.6 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 56.73; Conductivity: 0.97 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.78
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=0.000000, Y=-12.000000
SAR 10g (W/Kg): 0.081631
SAR 1g(W/Kg): 0.122380
Power drift (%): -3.67
3D screen shot

**Z Axis Scan**

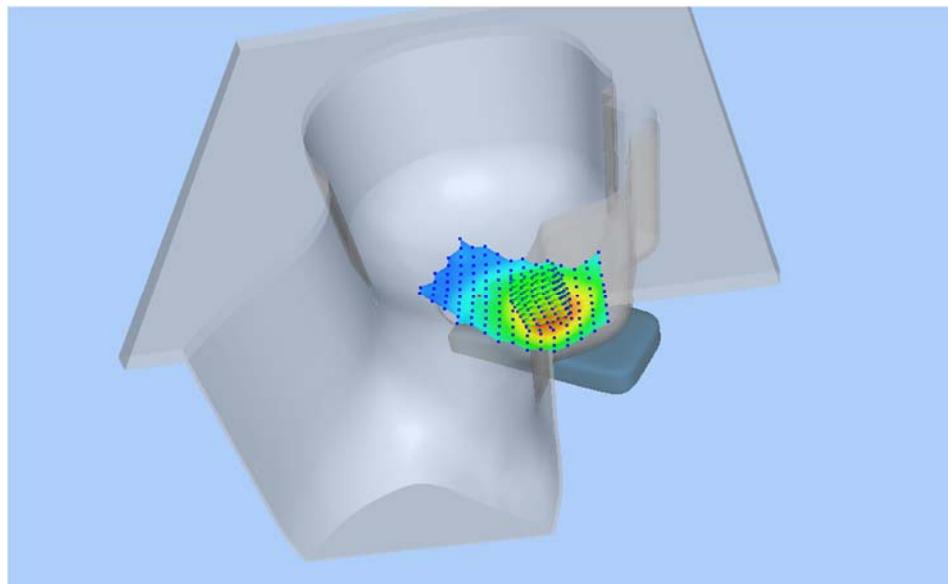
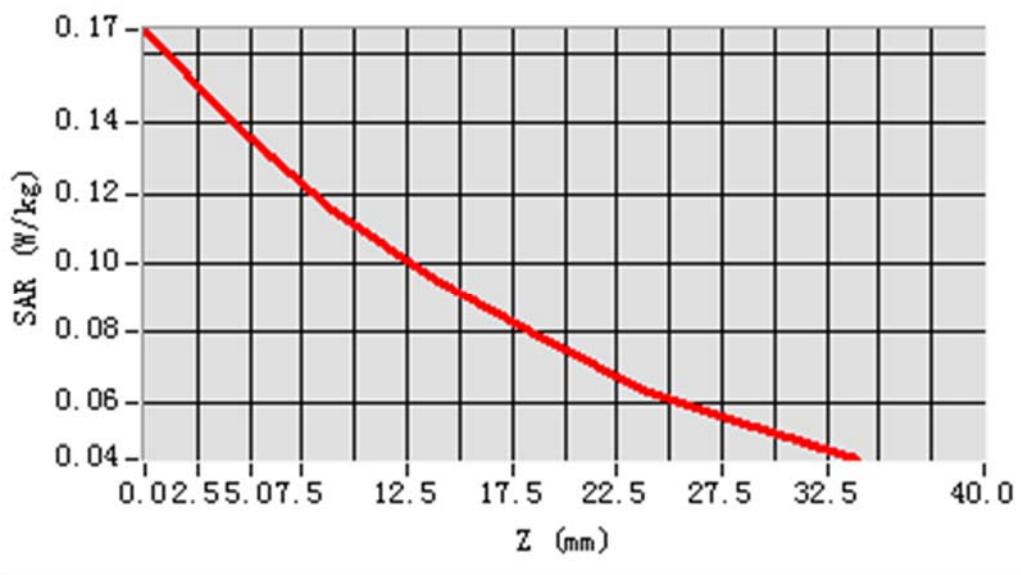
MEAS. 17 Left Head with Cheek on Middle Channel in CDMA BC0 mode Phone only

Test Date: 12/9/2018
Measurement duration: 11 minutes 26 seconds
Signal: CDMA, f=836.5 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 42.52; Conductivity: 0.92 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.71
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-46.000000, Y=-36.000000
SAR 10g (W/Kg): 0.351470
SAR 1g(W/Kg): 0.470967
Power drift (%): -1.61
3D screen shot

**Z Axis Scan**

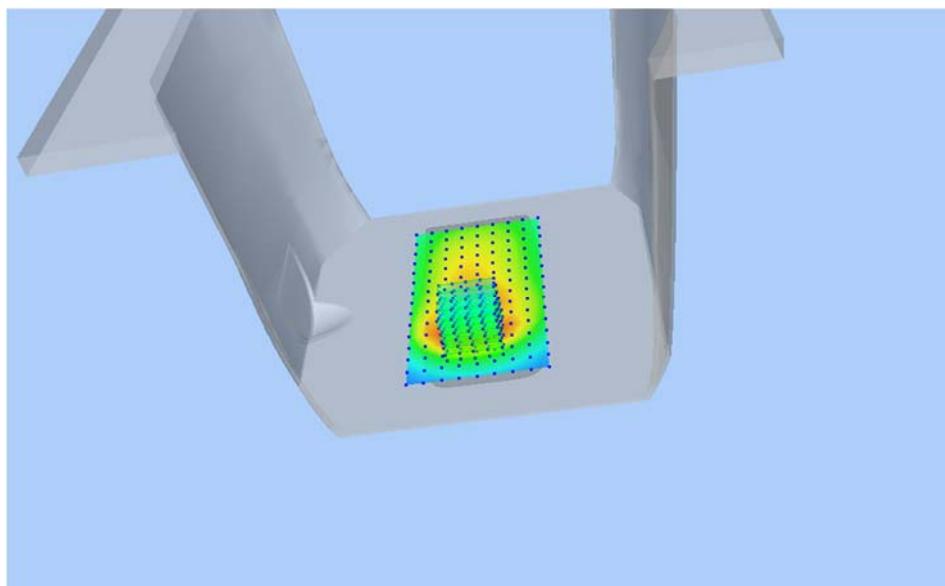
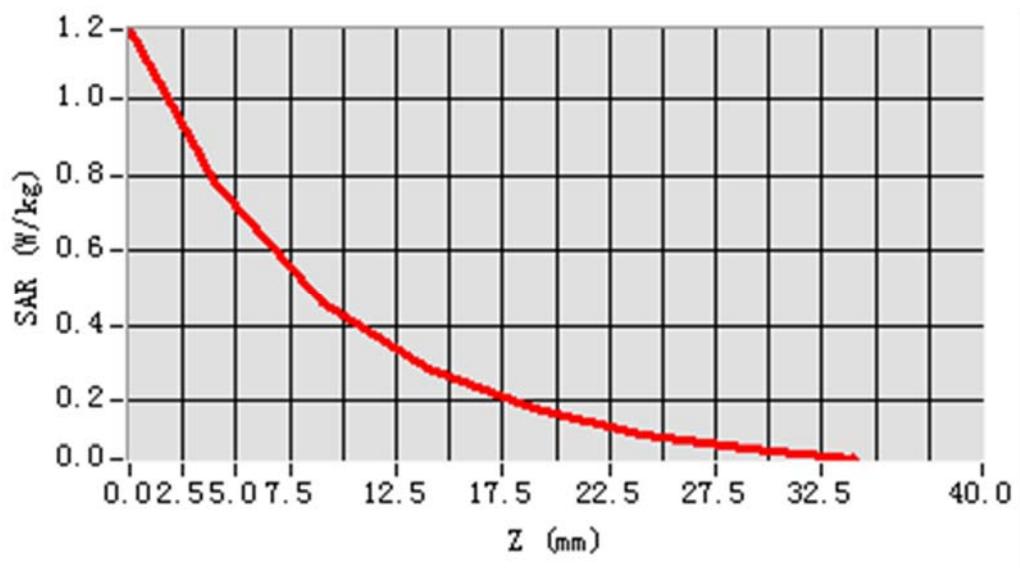
MEAS. 18 Left Head with Cheek on Middle Channel in CDMA BC0 mode With case

Test Date: 12/9/2018
Measurement duration: 11 minutes 9 seconds
Signal: CDMA, f=836.5 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 42.52; Conductivity: 0.92 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.71
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-46.000000, Y=-35.000000
SAR 10g (W/Kg): 0.104636
SAR 1g(W/Kg): 0.136641
Power drift (%): -1.71
3D screen shot

**Z Axis Scan**

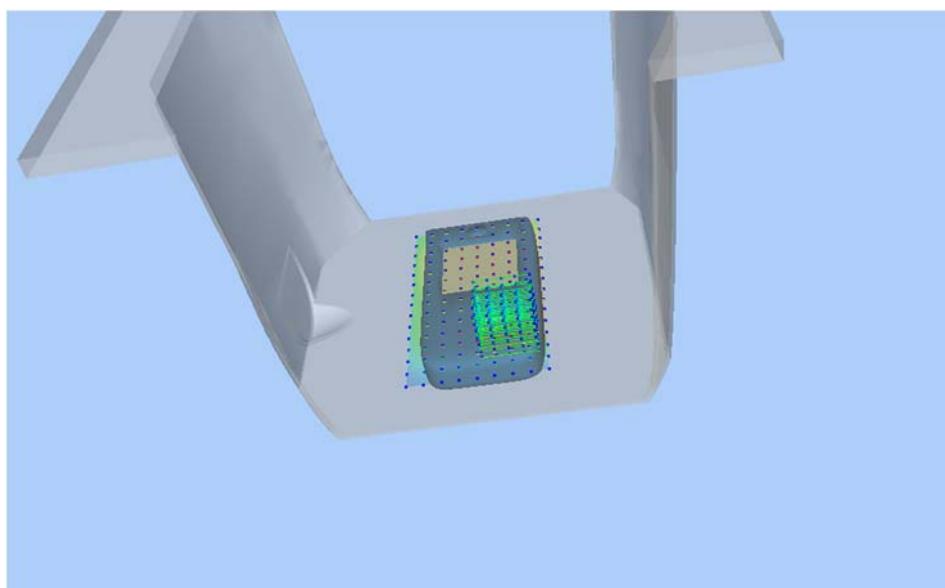
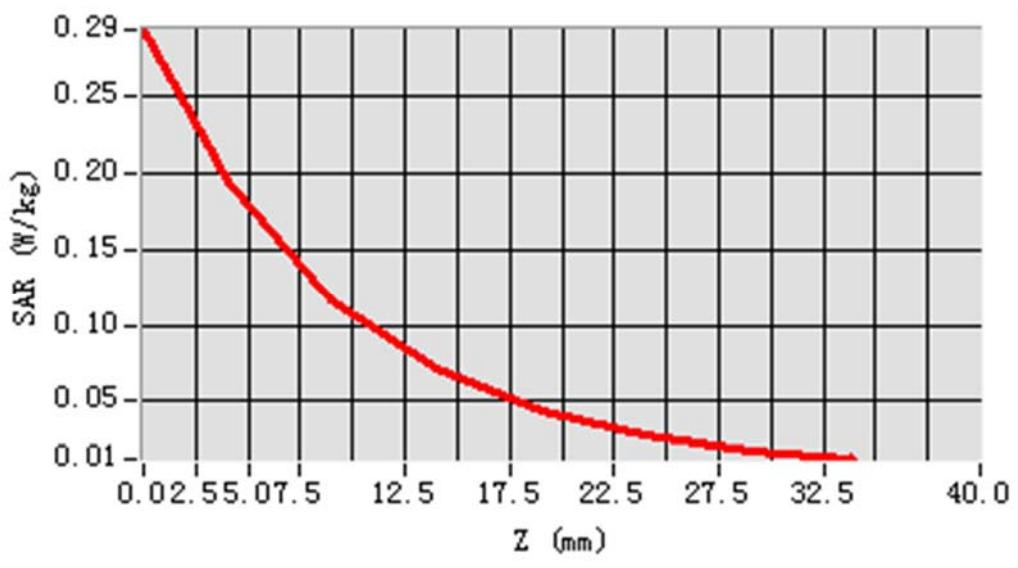
MEAS. 19 Body Plane with Front Side 5 mm on Middle Channel in CDMA BC0 mode Phone only

Test Date: 12/9/2018
Measurement duration: 10 minutes 55 seconds
Signal: CDMA, f=836.5 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 56.82; Conductivity: 0.96 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.78
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=0.000000, Y=-40.000000
SAR 10g (W/Kg): 0.409318
SAR 1g(W/Kg): 0.748816
Power drift (%): -0.85
3D screen shot

**Z Axis Scan**

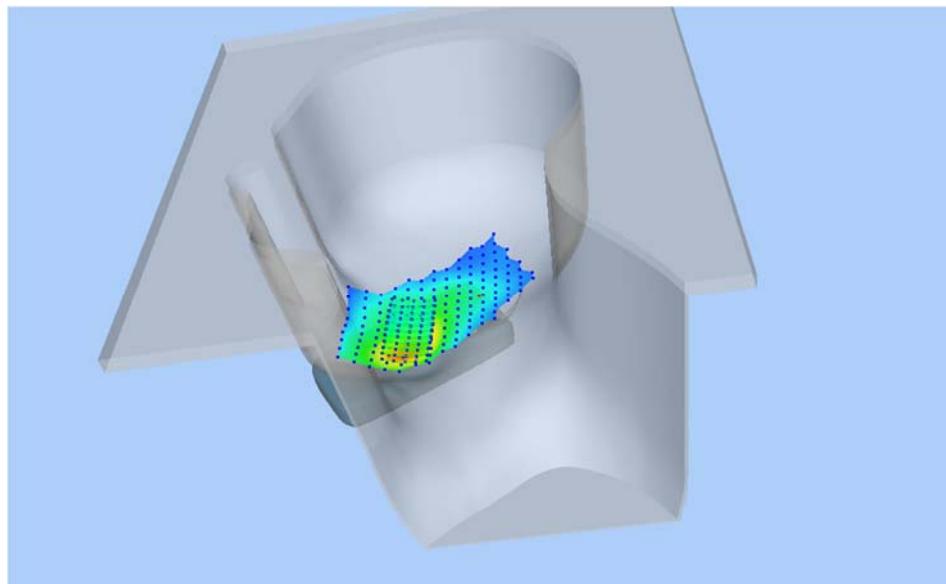
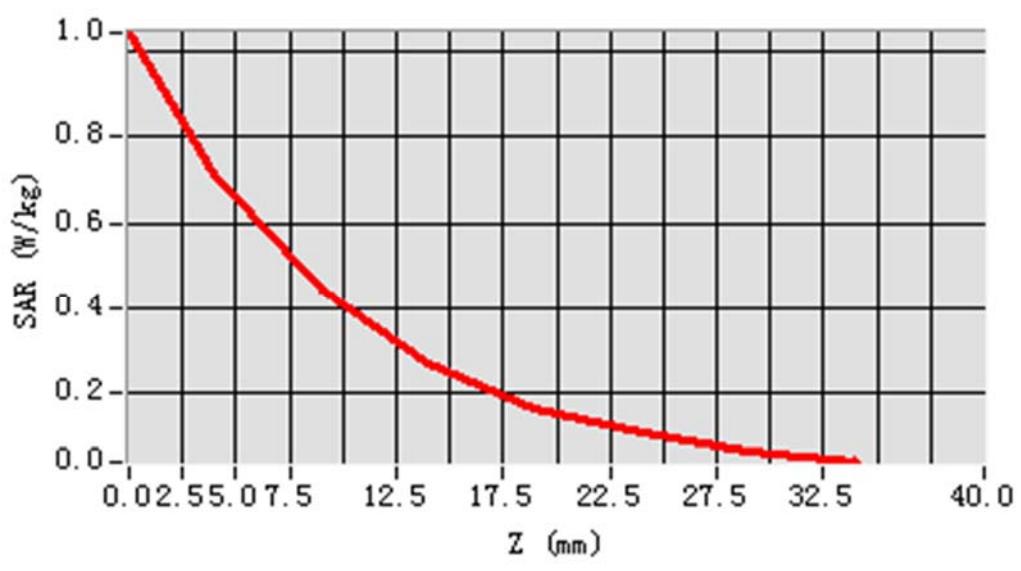
MEAS. 20 Body Plane with Front Side 5 mm on Middle Channel in CDMA BC0 mode With case

Test Date: 12/9/2018
Measurement duration: 13 minutes 14 seconds
Signal: CDMA, f=836.5 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 56.82; Conductivity: 0.96 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.78
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-3.000000, Y=28.000000
SAR 10g (W/Kg): 0.138209
SAR 1g(W/Kg): 0.175407
Power drift (%): -2.67
3D screen shot

**Z Axis Scan**

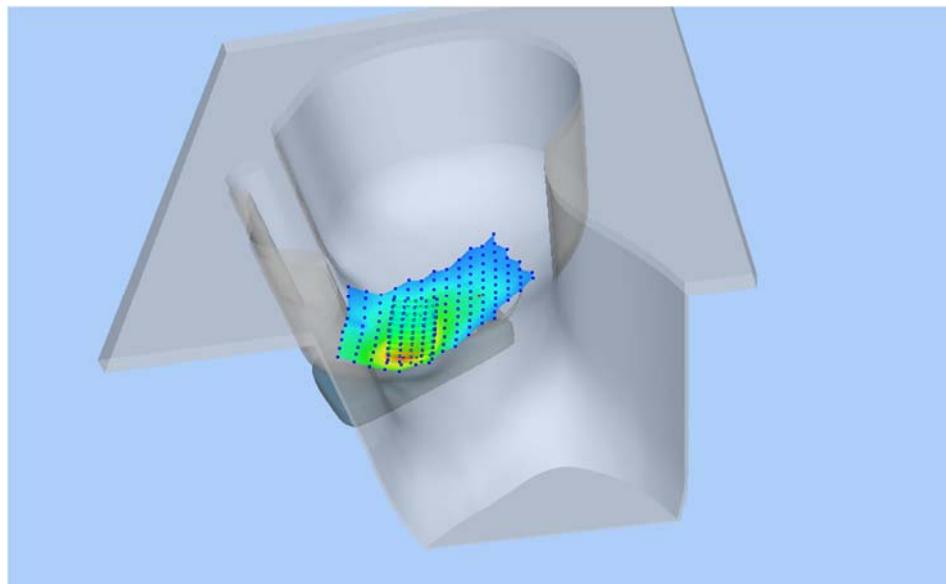
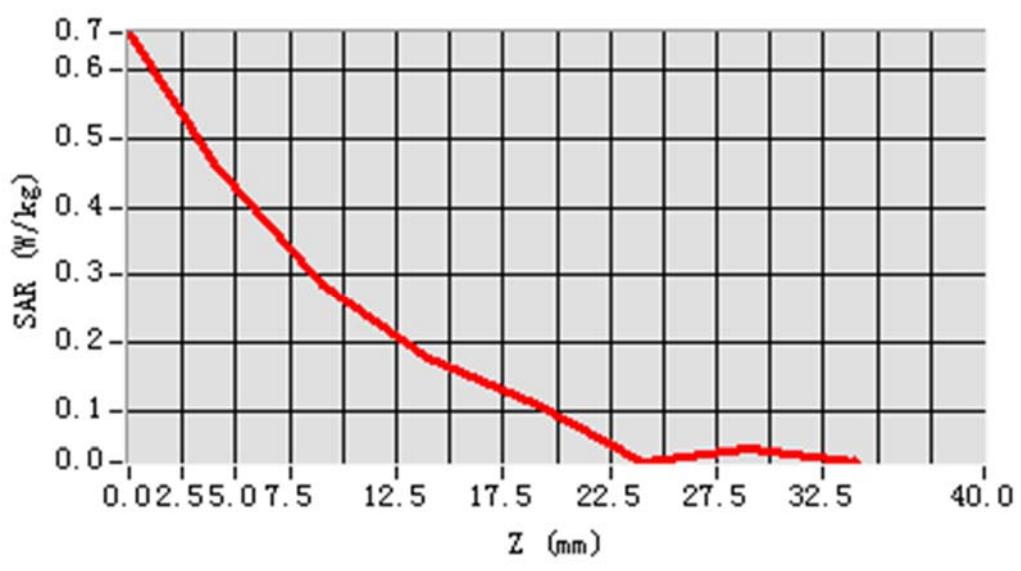
MEAS. 21 Right Head with Cheek on High Channel in CDMA BC1 mode Phone only

Test Date: 14/9/2018
Measurement duration: 12 minutes 10 seconds
Signal: CDMA, f=1908.8 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 40.29; Conductivity: 1.39 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.17
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-56.000000, Y=-56.000000
SAR 10g (W/Kg): 0.391179
SAR 1g(W/Kg): 0.690873
Power drift (%): 1.99
3D screen shot

**Z Axis Scan**

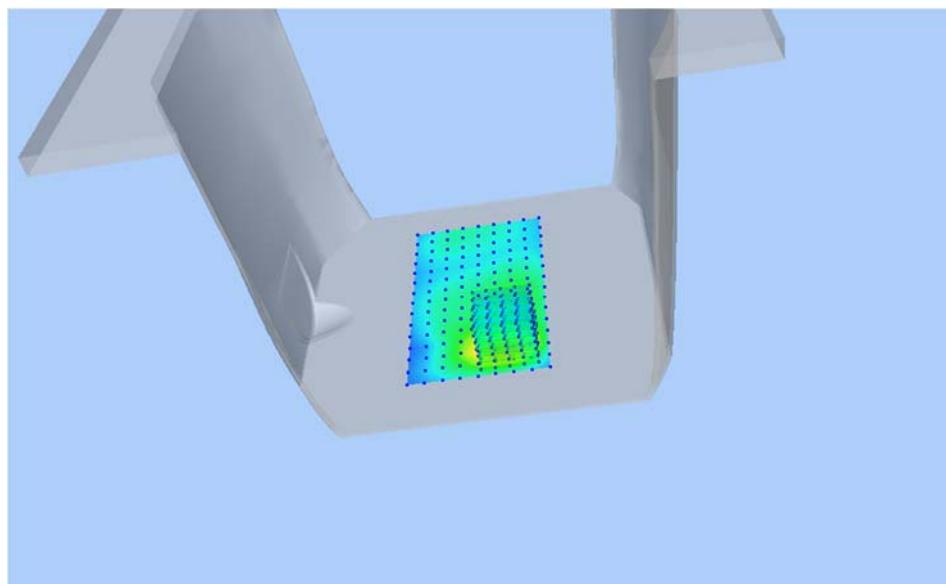
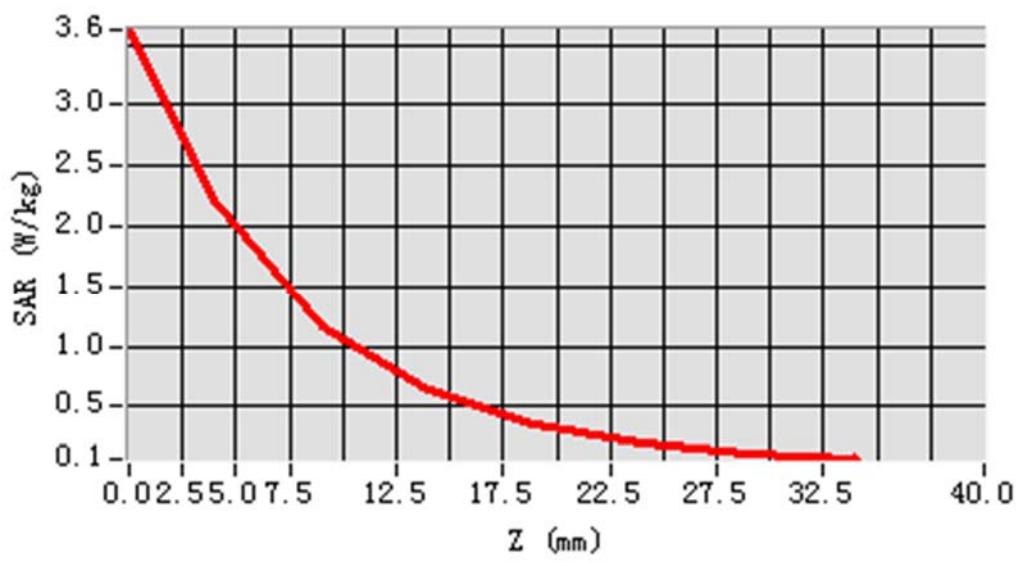
MEAS. 22 Right Head with Cheek on High Channel in CDMA BC1 mode With case

Test Date: 14/9/2018
Measurement duration: 11 minutes 32 seconds
Signal: CDMA, f=1908.8 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 40.29; Conductivity: 1.39 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.17
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-46.000000, Y=-56.000000
SAR 10g (W/Kg): 0.247792
SAR 1g(W/Kg): 0.443296
Power drift (%): -2.26
3D screen shot

**Z Axis Scan**

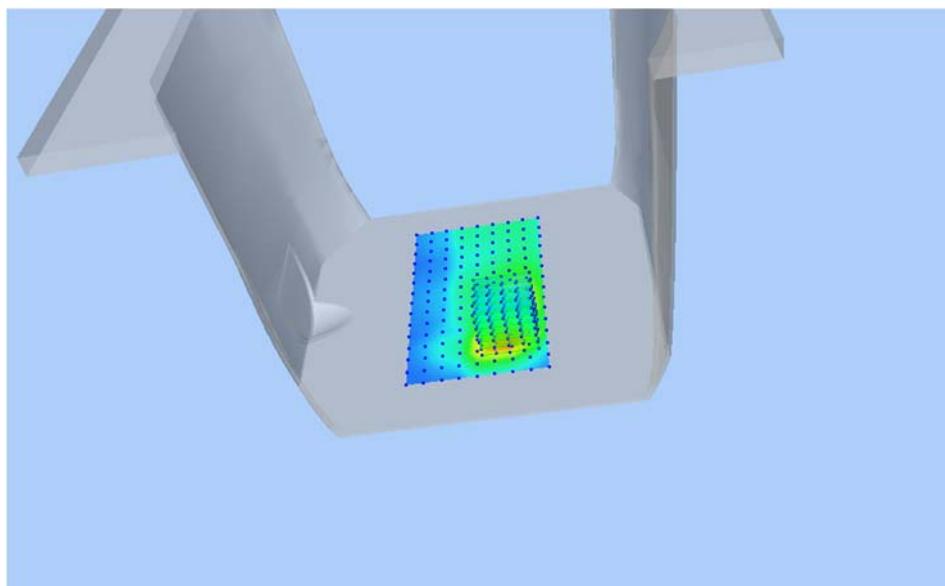
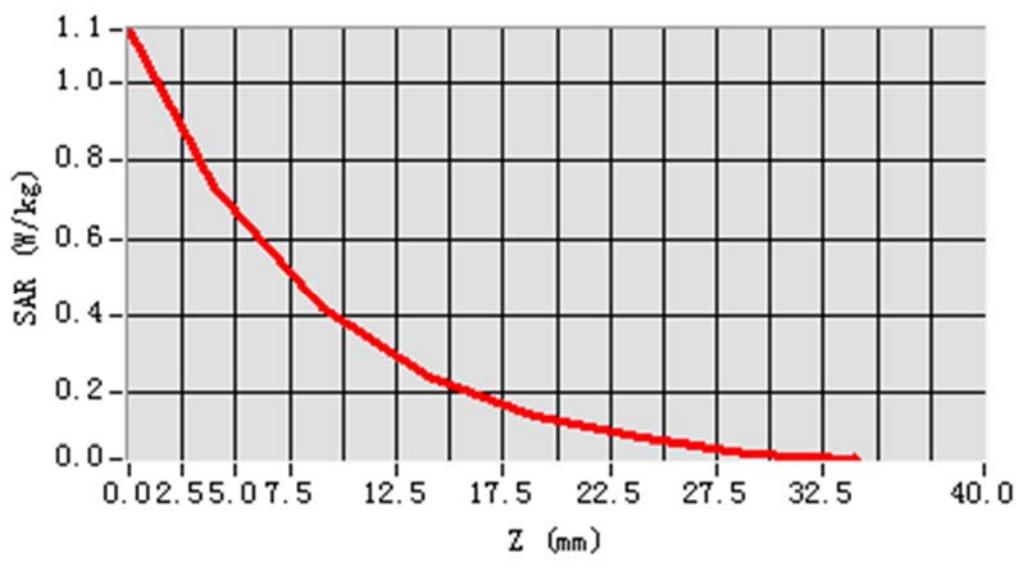
MEAS. 23 Body Plane with Front Side 5 mm on Middle Channel in CDMA BC1 mode Phone only

Test Date: 14/9/2018
Measurement duration: 13 minutes 20 seconds
Signal: CDMA, f=1880.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 51.27; Conductivity: 1.46 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.23
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=20.000000, Y=-52.000000
SAR 10g (W/Kg): 1.006156
SAR 1g(W/Kg): 2.077610
Power drift (%): -1.84
3D screen shot

**Z Axis Scan**

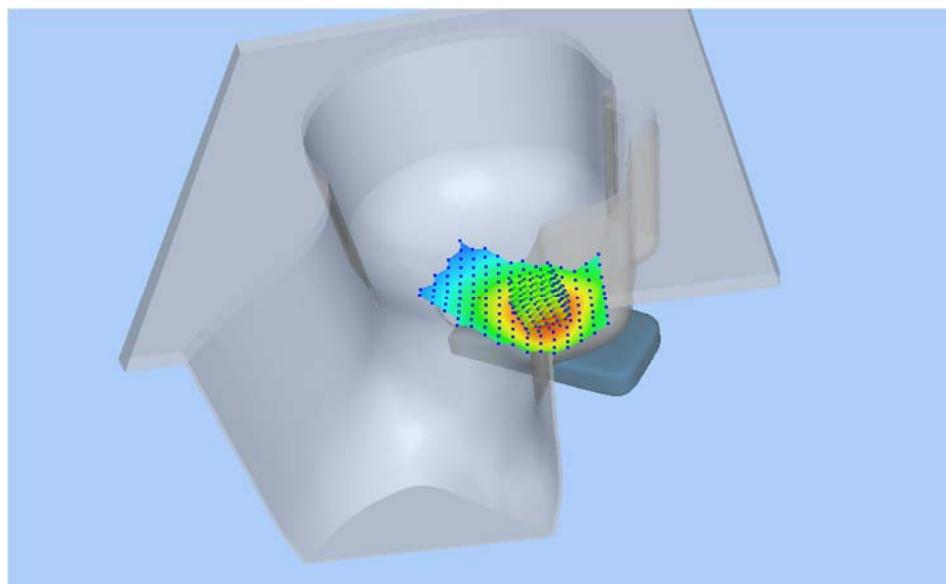
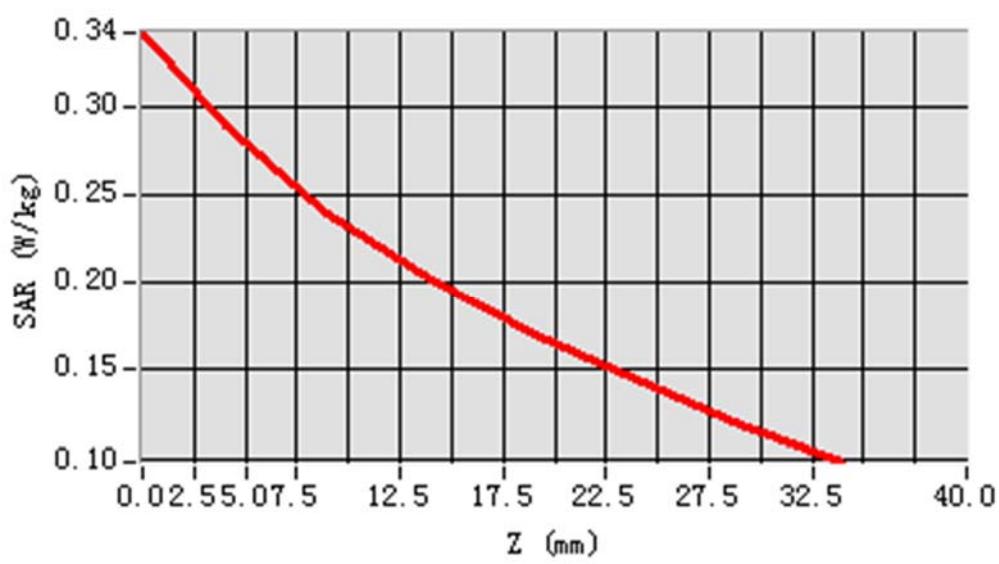
MEAS. 24 Body Plane with Front Side 5 mm on Middle Channel in CDMA BC1 mode With case

Test Date: 14/9/2018
Measurement duration: 13 minutes 16 seconds
Signal: CDMA, f=1880.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 51.27; Conductivity: 1.46 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.23
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=20.000000, Y=-42.000000
SAR 10g (W/Kg): 0.369753
SAR 1g(W/Kg): 0.720012
Power drift (%): 3.25
3D screen shot

**Z Axis Scan**

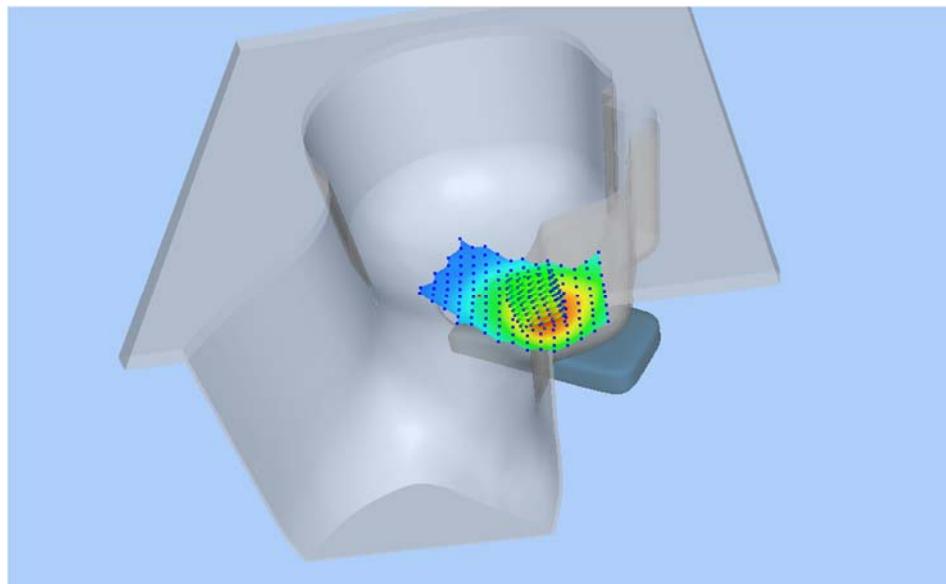
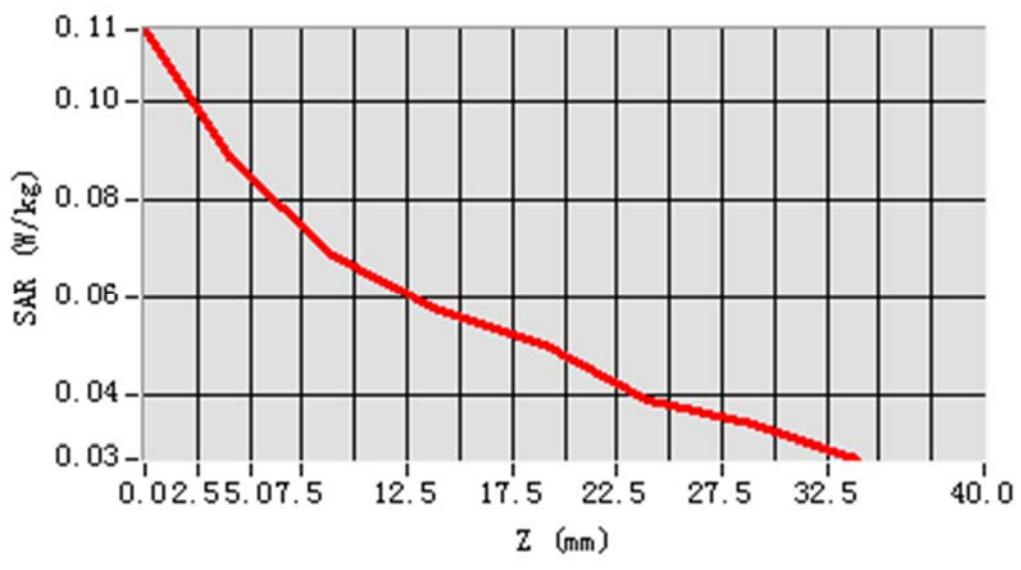
MEAS. 25 Left Head with Cheek on Middle Channel in LTE Band 13 mode Phone only

Test Date: 12/9/2018
Measurement duration: 11 minutes 23 seconds
Signal: LTE, f=782.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 43.01; Conductivity: 0.91 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.60
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-53.000000, Y=-34.000000
SAR 10g (W/Kg): 0.227153
SAR 1g(W/Kg): 0.288142
Power drift (%): -1.45
3D screen shot

**Z Axis Scan**

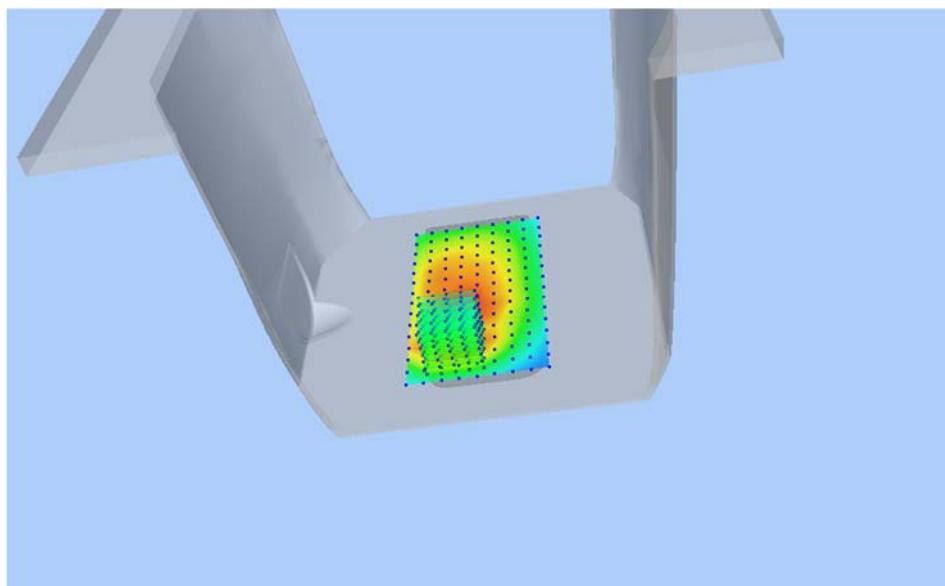
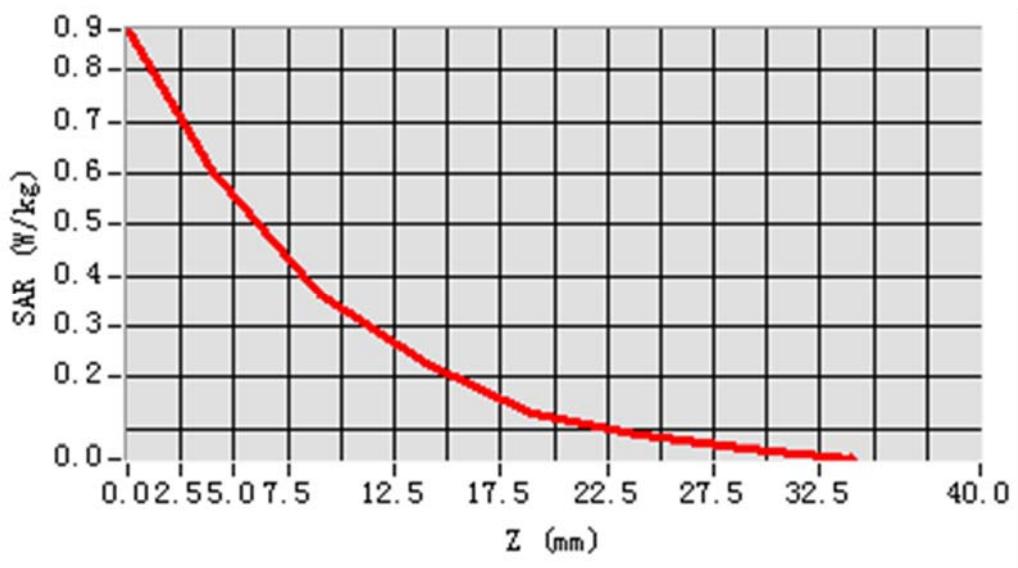
MEAS. 26 Left Head with Cheek on Middle Channel in LTE Band 13 mode With case

Test Date: 12/9/2018
Measurement duration: 11 minutes 10 seconds
Signal: LTE, f=782.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 43.01; Conductivity: 0.91 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.60
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-46.000000, Y=-26.000000
SAR 10g (W/Kg): 0.065398
SAR 1g(W/Kg): 0.087799
Power drift (%): -1.50
3D screen shot

**Z Axis Scan**

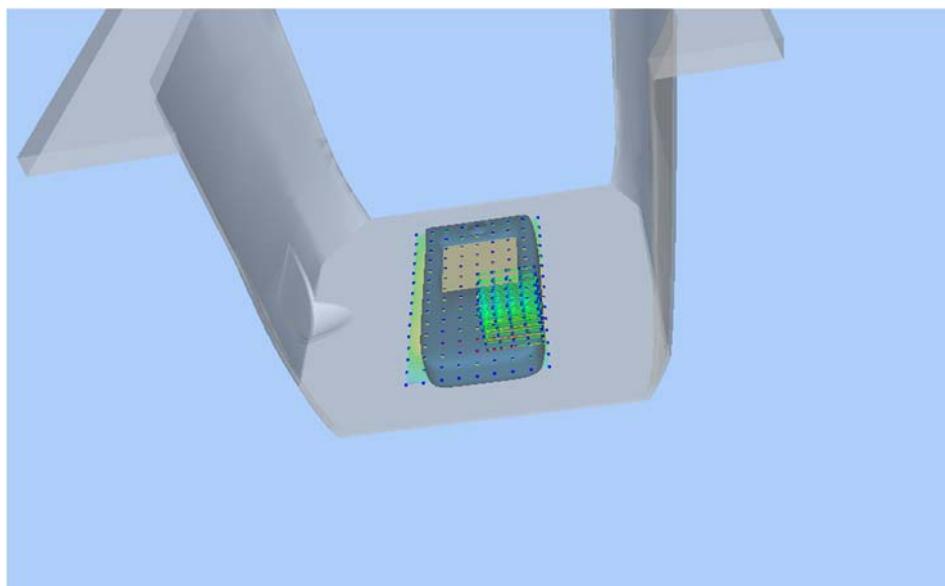
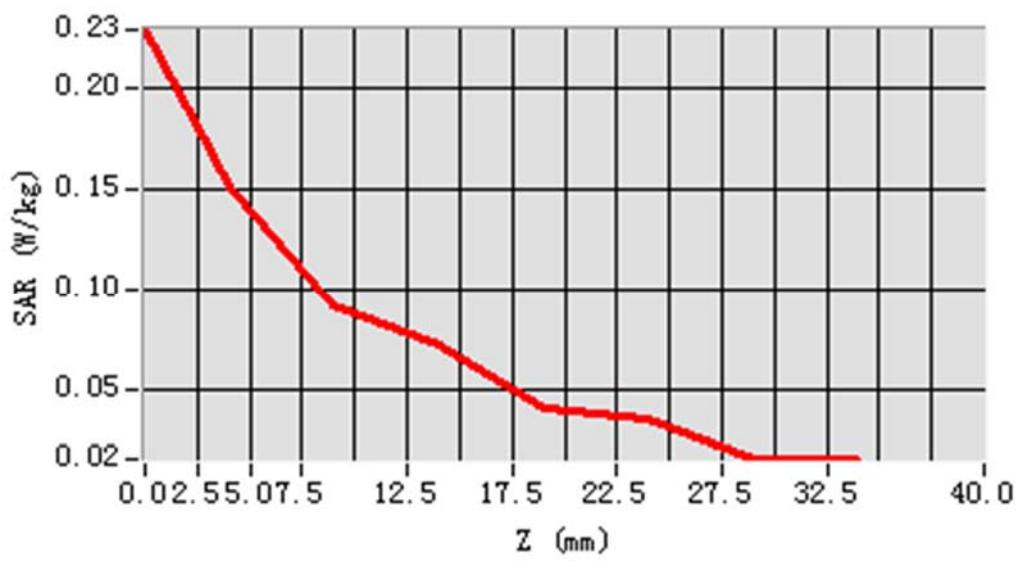
MEAS. 27 Body Plane with Front Side 5 mm on Middle Channel in LTE Band 13 mode Phone only

Test Date: 12/9/2018
Measurement duration: 9 minutes 16 seconds
Signal: LTE, f=782.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 56.31; Conductivity: 0.95 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.66
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-10.000000, Y=-52.000000
SAR 10g (W/Kg): 0.303809
SAR 1g(W/Kg): 0.562341
Power drift (%): 0.13
3D screen shot

**Z Axis Scan**

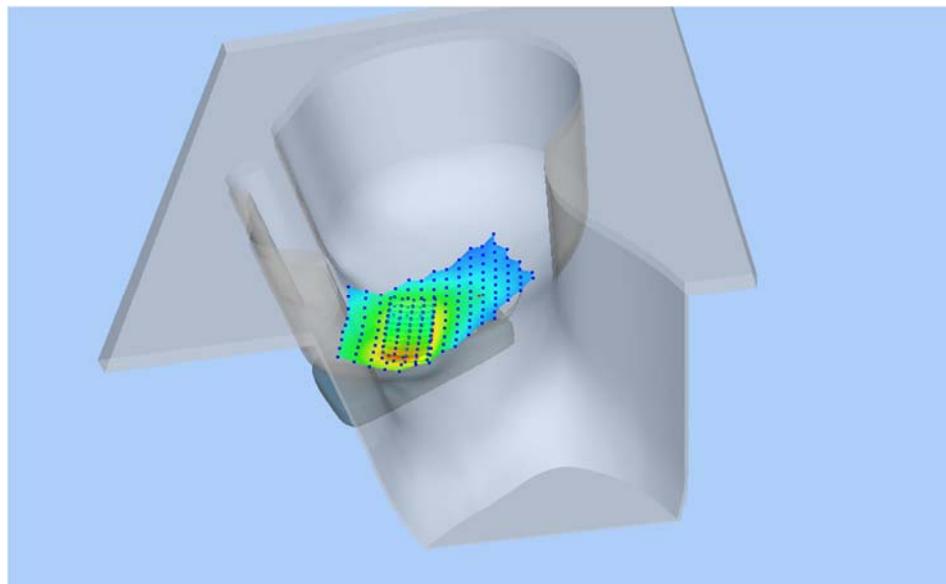
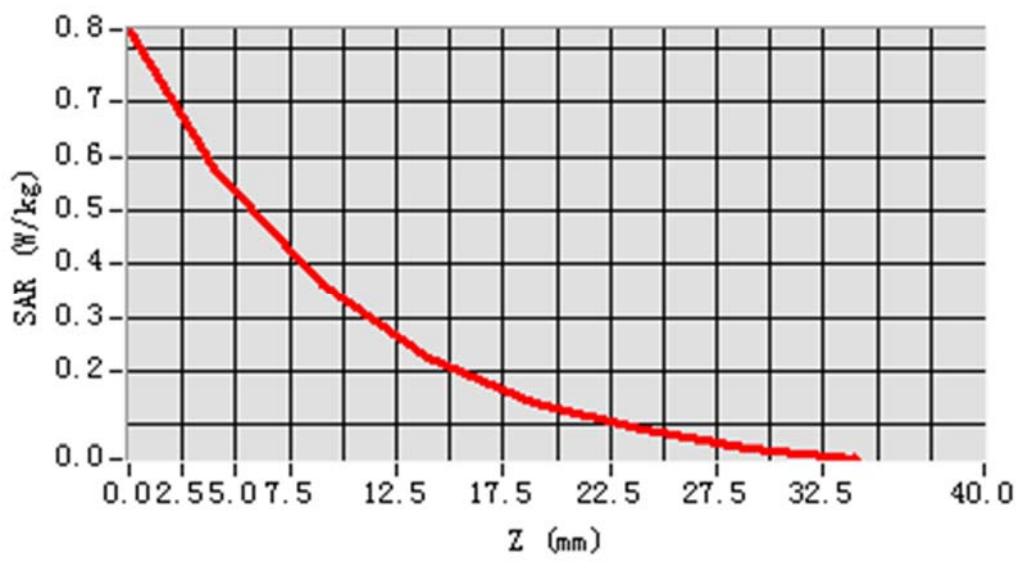
MEAS. 28 Body Plane with Front Side 5 mm on Middle Channel in LTE Band 13 mode With case

Test Date: 12/9/2018
Measurement duration: 12 minutes 54 seconds
Signal: LTE, f=782.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 56.31; Conductivity: 0.95 S/m
Test condition: Ambient Temperature: 22.2°C, Liquid Temperature: 21.1°C
Probe: SN 3117 EPGO321, ConvF: 1.66
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=22.000000, Y=-36.000000
SAR 10g (W/Kg): 0.091667
SAR 1g(W/Kg): 0.147004
Power drift (%): -3.33
3D screen shot

**Z Axis Scan**

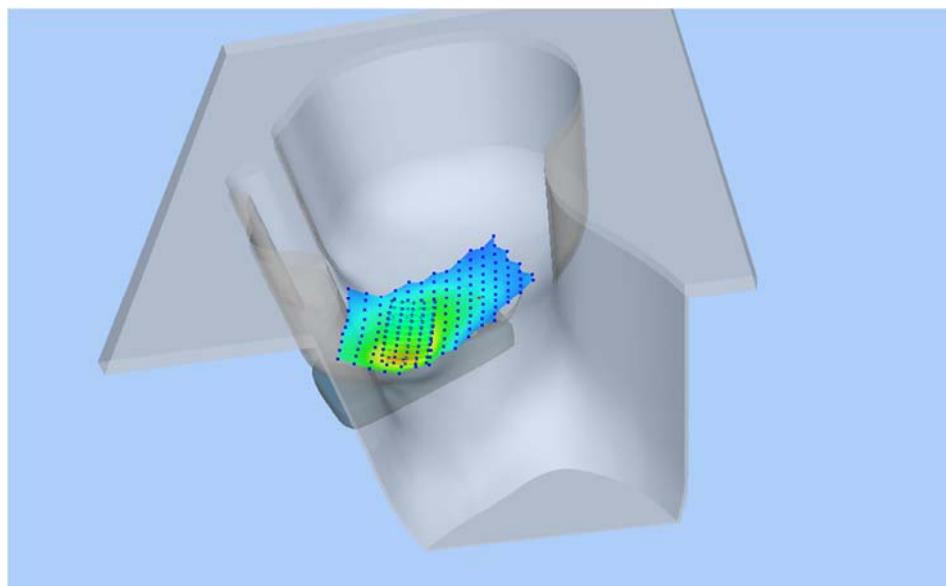
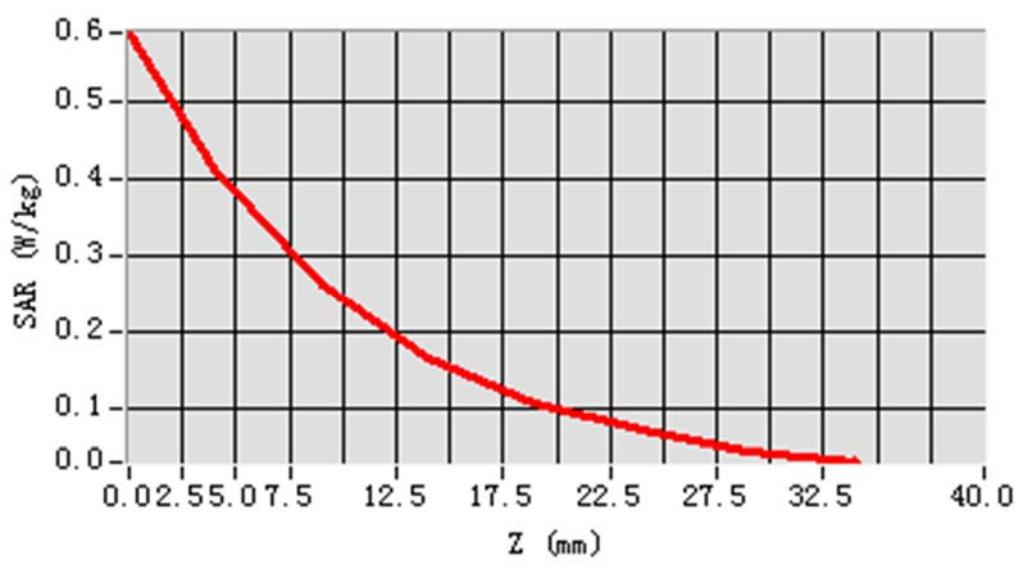
MEAS. 29 Right Head with Cheek on High Channel in LTE Band 25 mode Phone only

Test Date: 14/9/2018
Measurement duration: 12 minutes 6 seconds
Signal: LTE, f=1905.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 40.30; Conductivity: 1.39 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.17
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-56.000000, Y=-56.000000
SAR 10g (W/Kg): 0.324245
SAR 1g(W/Kg): 0.559524
Power drift (%): -1.76
3D screen shot

**Z Axis Scan**

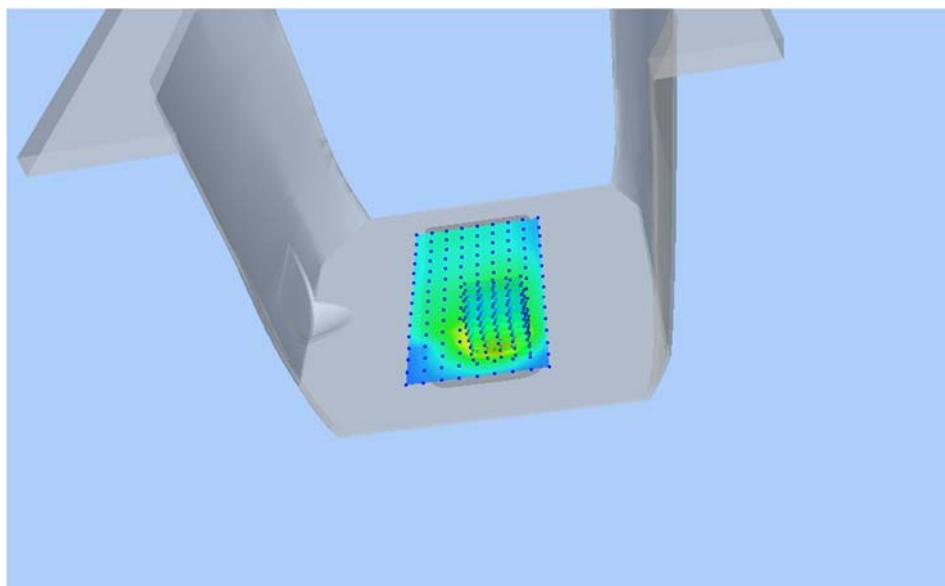
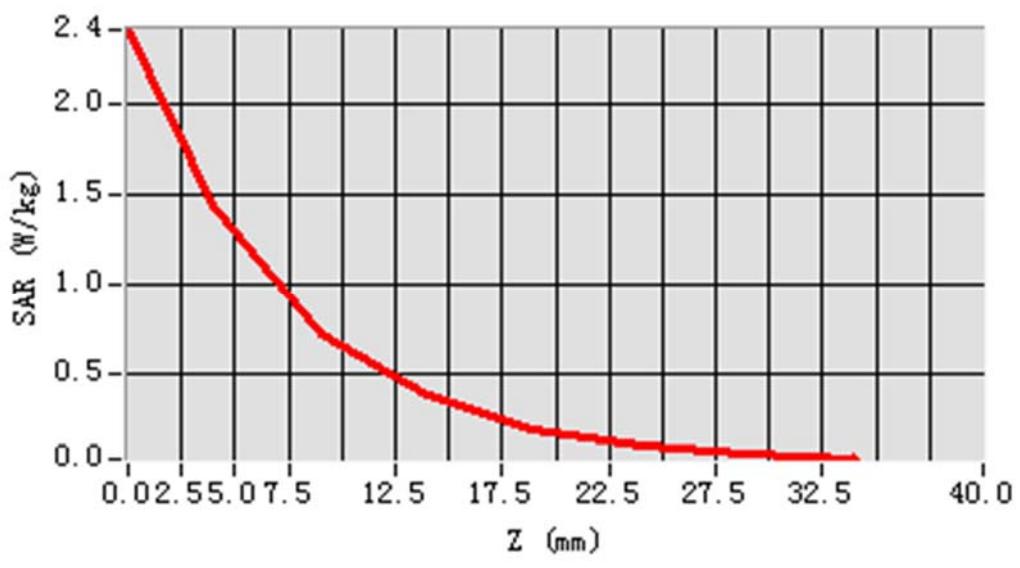
MEAS. 30 Right Head with Cheek on High Channel in LTE Band 25 mode With case

Test Date: 14/9/2018
Measurement duration: 12 minutes 9 seconds
Signal: LTE, f=1905.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 40.30; Conductivity: 1.39 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.17
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=-56.000000, Y=-56.000000
SAR 10g (W/Kg): 0.225521
SAR 1g(W/Kg): 0.394917
Power drift (%): -1.78
3D screen shot

**Z Axis Scan**

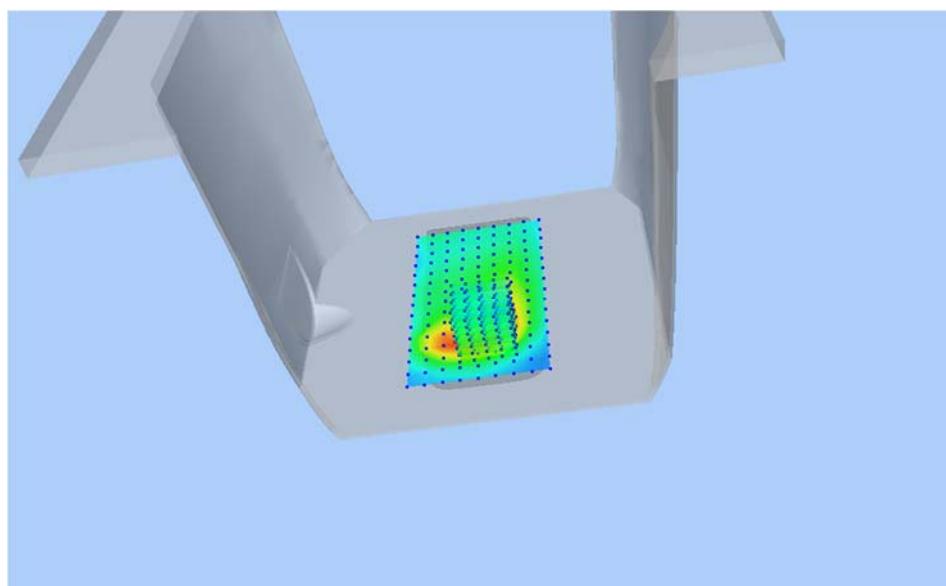
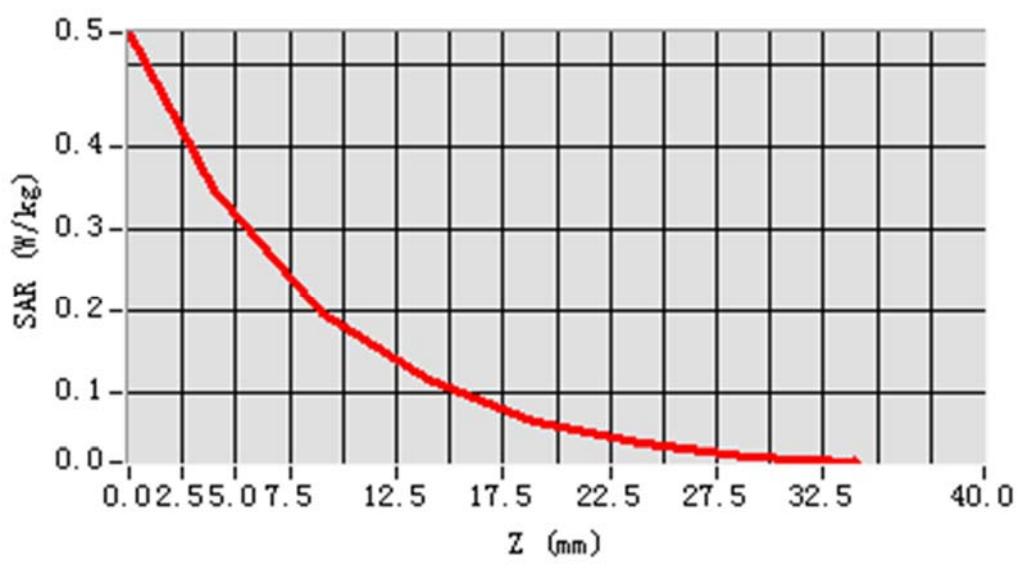
MEAS. 31 Body Plane with Front Side 5 mm on High Channel in LTE Band 25 mode Phone only

Test Date: 14/9/2018
Measurement duration: 13 minutes 15 seconds
Signal: LTE, f=1905.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 51.57; Conductivity: 1.49 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.23
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=10.000000, Y=-42.000000
SAR 10g (W/Kg): 0.637506
SAR 1g(W/Kg): 1.378709
Power drift (%): -1.64
3D screen shot

**Z Axis Scan**

MEAS. 32 Body Plane with Front Side 5 mm on High Channel in LTE Band 25 mode With case

Test Date: 14/9/2018
Measurement duration: 12 minutes 18 seconds
Signal: LTE, f=1905.0 MHz, Duty Cycle: 1:1.0
LiquidParameters: Permittivity: 51.57; Conductivity: 1.49 S/m
Test condition: Ambient Temperature: 22.4°C, Liquid Temperature: 21.3°C
Probe: SN 3117 EPGO321, ConvF: 2.23
Area Scan: sam_direct_droit2_surf10mm.txt, h= 5.00 mm
ZoomScan: 5x5x7,dx=8mm, dy=8mm, dz=5mm,Complete
Maximum location: X=10.000000, Y=-32.000000
SAR 10g (W/Kg): 0.187222
SAR 1g(W/Kg): 0.346714
Power drift (%): 3.11
3D screen shot

**Z Axis Scan**

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ1890221-AW.pdf”.

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document “BL-SZ1890221-AS.pdf”.

ANNEX F CALIBRATION REPORT

Please refer the document “CALIBRATION REPORT.pdf”.

--END OF REPORT--