

# Guangzhou Maipai Electronics Co., Ltd.

## TEST REPORT

**SCOPE OF WORK**

FCC TESTING-VM01W

**REPORT NUMBER**

211105057SZN-001

**ISSUE DATE**

December 9, 2021

**[REVISED DATE]**

[-----]

**PAGES**

22

**DOCUMENT CONTROL NUMBER**

FCC ID 249\_C

© 2017 INTERTEK



**Guangzhou Maipai Electronics Co., Ltd.**

Application  
For  
Certification

**FCC ID: 2AFVEVM01W****2.4G Wireless Mouse****Model: VM01W****Brand Name: N/A****2.4GHz Transceiver****Report No.: 211105057SZN-001**

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-20]

Prepared and Checked by:

---

*Jeff Liang*  
*Engineer*

Approved by:

---

*Sewen Guo*  
*Senior Project Engineer*  
*Date: December 9, 2021*

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Shenzhen Ltd. Longhua Branch**

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

**MEASUREMENT/TECHNICAL REPORT**

This report concerns (check one):      Original Grant       Class II Change

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes       No

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?      Yes       No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-20 Edition] provision.

Report prepared by:

Jeff Liang  
Intertek Testing Services Shenzhen Ltd. Longhua Branch  
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing  
Community, GuanHu Subdistrict, LongHua District, Shenzhen,  
P.R. China  
Tel / Fax: 86-755-8614 0743/86-755-8601 6661

## Table of Contents

<b>1.0</b>	<b>Summary of Test Result .....</b>	<b>4</b>
<b>2.0</b>	<b>General Description .....</b>	<b>5</b>
2.1	Product Description .....	5
2.2	Related Submittal(s) Grants.....	5
2.3	Test Methodology.....	5
2.4	Test Facility .....	5
<b>3.0</b>	<b>System Test Configuration .....</b>	<b>6</b>
3.1	Justification .....	6
3.2	EUT Exercising Software .....	6
3.3	Special Accessories .....	6
3.4	Equipment Modification.....	6
3.5	Measurement Uncertainty .....	6
3.6	Support Equipment List and Description.....	6
<b>4.0</b>	<b>Emission Results .....</b>	<b>7</b>
4.1	Radiated Test Results.....	7
4.1.1	Field Strength Calculation.....	7
4.1.2	Radiated Emission Configuration Photograph .....	8
4.1.3	Radiated Emissions .....	8
4.1.4	Transmitter Spurious Emissions (Radiated).....	11
<b>5.0</b>	<b>Equipment Photographs .....</b>	<b>14</b>
<b>6.0</b>	<b>Product Labelling .....</b>	<b>14</b>
<b>7.0</b>	<b>Technical Specifications .....</b>	<b>14</b>
<b>8.0</b>	<b>Instruction Manual .....</b>	<b>14</b>
<b>9.0</b>	<b>Miscellaneous Information .....</b>	<b>15</b>
9.1	Bandedge Plot.....	15
9.2	20dB bandwidth.....	18
9.3	Discussion of Pulse Desensitization .....	19
9.4	Calculation of Average Factor.....	19
9.5	Emissions Test Procedures .....	21
<b>10.0</b>	<b>Test Equipment List .....</b>	<b>22</b>

## 1.0 Summary of Test Result

Applicant: Guangzhou Maipai Electronics Co., Ltd.

Applicant Address: Room 202, No.94, Shinan Road, Xianchong Village, Qiaonan Street, Panyu District, Guangzhou China

Manufacturer: Guangzhou Maipai Electronics Co., Ltd.

Manufacturer Address: Room 202, No.94, Shinan Road, Xianchong Village, Qiaonan Street, Panyu District, Guangzhou China

MODEL: VM01W

FCC ID: 2AFVEVM01W

Test Specification	Reference	Results
Transmitter Radiated Emission Bandedge	15.249 & 15.209 & 15.205	Pass
20dB Bandwidth	15.215(c)	Pass

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

## 2.0 General Description

### 2.1 Product Description

The equipment under test (EUT) is a 2.4G Wireless Mouse operating at 2.4G Band. The EUT is powered by DC 1.5V (1 x AA Alkaline battery). For more detail information pls. refer to the user manual.

Antenna Type: PCB antenna

Modulation Type: GFSK

Antenna Gain: 3.85dBi Max

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 2.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the 2.4G Wireless Mouse.

### 2.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

### 2.4 Test Facility

The Semi-Anechoic chamber used to collect the radiated data is **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

## 3.0 System Test Configuration

### 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT is powered by DC 1.5V (1 x AA Alkaline battery) during the test, only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The EUT and transmitting antenna was centered on the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

### 3.2 EUT Exercising Software

There was no special software to exercise the device.

### 3.3 Special Accessories

No special accessories used.

### 3.4 Equipment Modification

Any modifications installed previous to testing by Guangzhou Maipai Electronics Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

### 3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 3.6 Support Equipment List and Description

N/A

## 4.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

### 4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

#### 4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where  $FS$  = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

$RA$  = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

$CF$  = Cable Attenuation Factor in dB

$AF$  = Antenna Factor in dB

$AG$  = Amplifier Gain in dB

$PD$  = Pulse Desensitization in dB

$AV$  = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0  $\text{dB}\mu\text{V}$  is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32  $\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  was converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V}/\text{m})/20] = 125.9 \mu\text{V}/\text{m}$$

**4.1.2 Radiated Emission Configuration Photograph**

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

**4.1.3 Radiated Emissions**

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission  
at  
711.974667 MHz

Judgement: Passed by 14.6 dB

***TEST PERSONNEL:***

*Sign on file*

Jeff Liang, Engineer  
Typed/Printed Name

November 12, 2021

Date

Applicant: Guangzhou Maipai Electronics Co., Ltd.


Date of Test: November 12, 2021

Model: VM01W

Worst Case Operating Mode: Transmitting (2402.65MHz)

ANT Polarity: Horizontal

## FCC Part 15

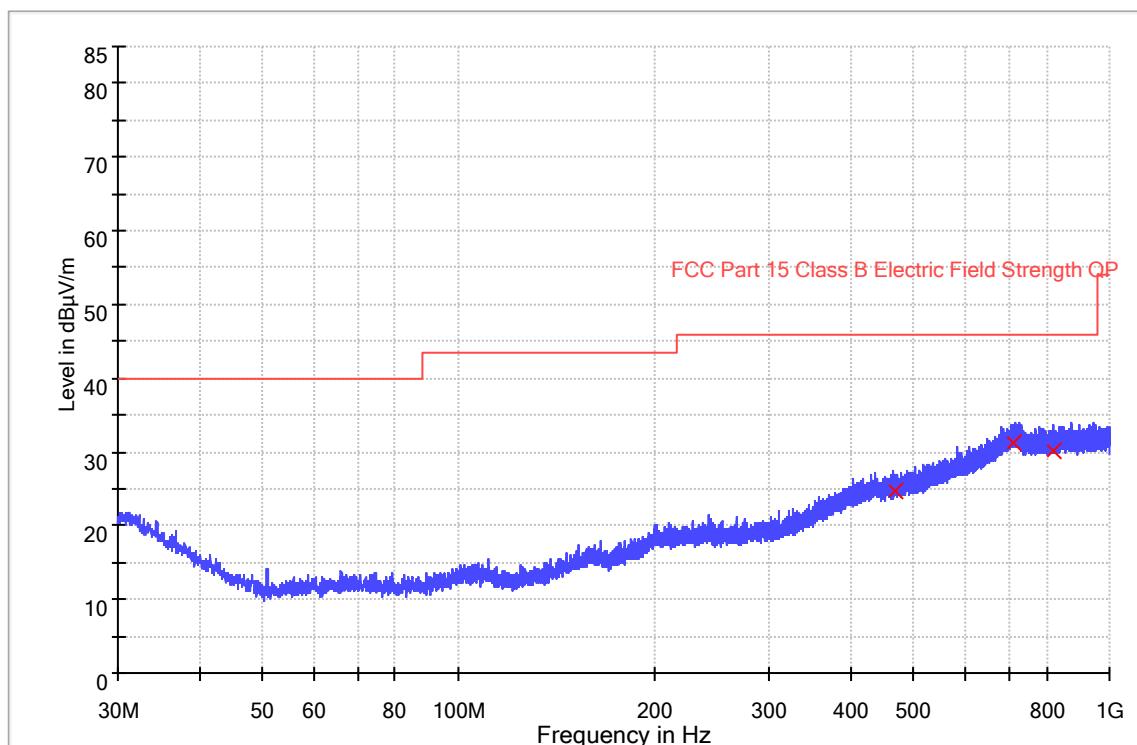

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB $\mu$ V/m)
469.377667	24.6	1000.0	120.000	H	26.1	21.4	46.0
710.228667	31.3	1000.0	120.000	H	32.0	14.7	46.0
819.903333	30.2	1000.0	120.000	H	32.0	15.8	46.0

## Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB $\mu$ V/m) = Corr. (dB/m) + Read Level (dB $\mu$ V)
3. Margin (dB) = Limit Line(dB $\mu$ V/m) – Level (dB $\mu$ V/m)

Applicant: Guangzhou Maipai Electronics Co., Ltd.


Date of Test: November 12, 2021

Model: VM01W

Worst Case Operating Mode: Transmitting (2402.65MHz)

ANT Polarity: Vertical

## FCC Part 15

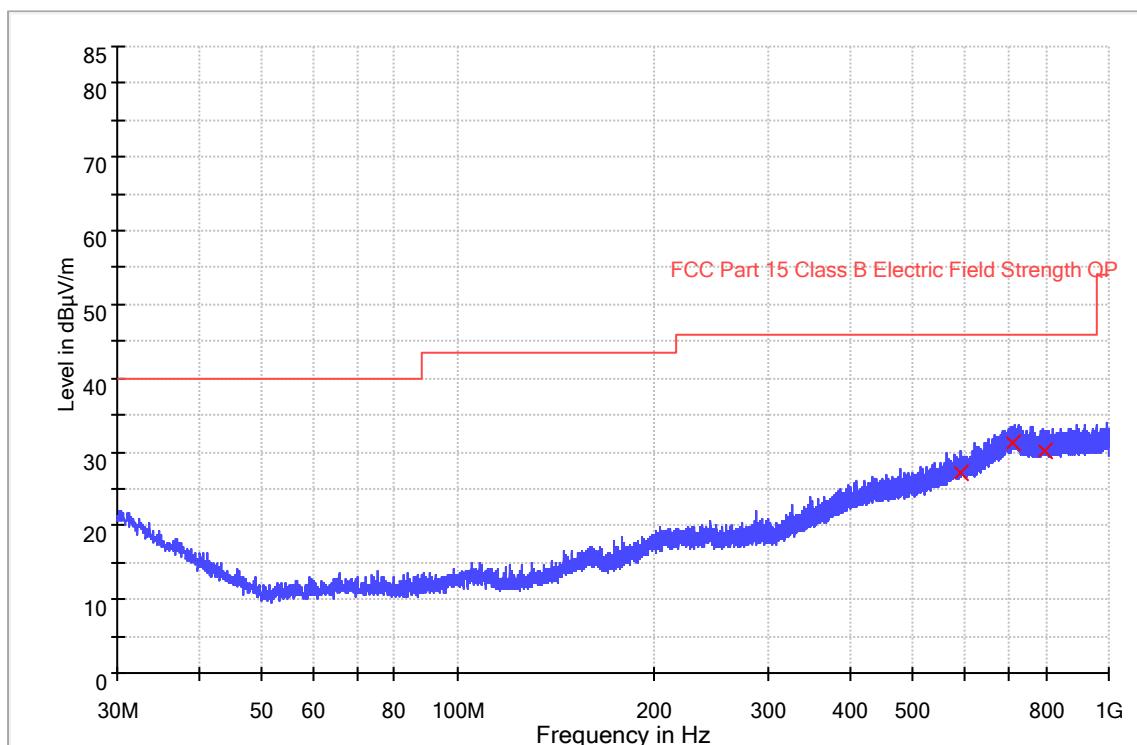

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
590.563000	27.2	1000.0	120.000	V	28.4	18.8	46.0
711.974667	31.4	1000.0	120.000	V	32.0	14.6	46.0
798.466333	30.2	1000.0	120.000	V	32.0	15.8	46.0

## Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dB $\mu$ V/m) = Corr. (dB/m) + Read Level (dB $\mu$ V)
3. Margin (dB) = Limit Line(dB $\mu$ V/m) – Level (dB $\mu$ V/m)

**4.1.4 Transmitter Spurious Emissions (Radiated)**

Worst Case Radiated Emission  
at  
2483.500 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 1.4 dB

***TEST PERSONNEL:***

Sign on file

Jeff Liang, Engineer  
Typed/Printed Name

November 12, 2021

Date

Applicant: Guangzhou Maipai Electronics Co., Ltd.

Date of Test: November 12, 2021

Model: VM01W

Worst Case Operating Mode: Transmitting

Table 1

## Radiated Emissions

(2402.650MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2402.650	100.3	36.7	28.1	91.7	114.0	-22.3
Horizontal	4805.300	50.6	36.7	35.5	49.4	74.0	-24.6
Horizontal	7207.950	46.3	36.8	35.6	45.1	74.0	-28.9
Horizontal	9610.600	49.6	37.3	38.0	50.3	74.0	-23.7

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2402.650	100.3	36.7	28.1	36.9	54.8	94.0	-39.2
Horizontal	4805.300	50.6	36.7	35.5	36.9	12.5	54.0	-41.5
Horizontal	7207.950	46.3	36.8	35.6	36.9	8.2	54.0	-45.8
Horizontal	9610.600	49.6	37.3	38.0	36.9	13.4	54.0	-40.6

Table 2

## Radiated Emissions

(2441.650MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2441.650	101.1	36.7	28.1	92.5	114.0	-21.5
Horizontal	4883.300	50.7	36.7	35.5	49.5	74.0	-24.5
Horizontal	7324.950	46.5	36.8	35.6	45.3	74.0	-28.7
Horizontal	9766.600	49.6	37.3	38.0	50.3	74.0	-23.7

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2441.650	101.1	36.7	28.1	36.9	55.6	94.0	-38.4
Horizontal	4883.300	50.7	36.7	35.5	36.9	12.6	54.0	-41.4
Horizontal	7324.950	46.5	36.8	35.6	36.9	8.4	54.0	-45.6
Horizontal	9766.600	49.6	37.3	38.0	36.9	13.4	54.0	-40.6

Table 3

**Radiated Emissions**

(2480.650MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2480.650	98.6	36.7	28.1	90.0	114.0	-24.0
Horizontal	4961.300	50.5	36.7	35.5	49.3	74.0	-24.7
Horizontal	7441.950	46.0	36.8	35.6	44.8	74.0	-29.2
Horizontal	9922.600	49.4	37.3	38.0	50.1	74.0	-23.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2480.650	98.6	36.7	28.1	36.9	53.1	94.0	-40.9
Horizontal	4961.300	50.5	36.7	35.5	36.9	12.4	54.0	-41.6
Horizontal	7441.950	46.0	36.8	35.6	36.9	7.9	54.0	-46.1
Horizontal	9922.600	49.4	37.3	38.0	36.9	13.2	54.0	-40.8

## Notes:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Jeff Liang

## 5.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

## 6.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

## 7.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

## 8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

## 9.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

### 9.1 Bandedge Plot

The test plots are attached as below. From the below plots, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfills the requirement of 15.249(d).

#### Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

#### (i) Lowest frequency channel (2402.650MHz):

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2400.000	80.2	36.7	28.1	71.6	74.0	-2.4

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2400.000	59.0	36.7	28.1	50.4	54.0	-3.6


#### (ii) Highest frequency channel (2480.650MHz):

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2483.500	80.3	36.8	29.1	72.6	74.0	-1.4


Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB/m)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2483.500	58.1	36.8	29.1	50.4	54.0	-3.6


The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB $\mu$ V/m (Peak Limit) and 54dB $\mu$ V/m (Average Limit).

Hopping function off  
Lowest frequency Channel

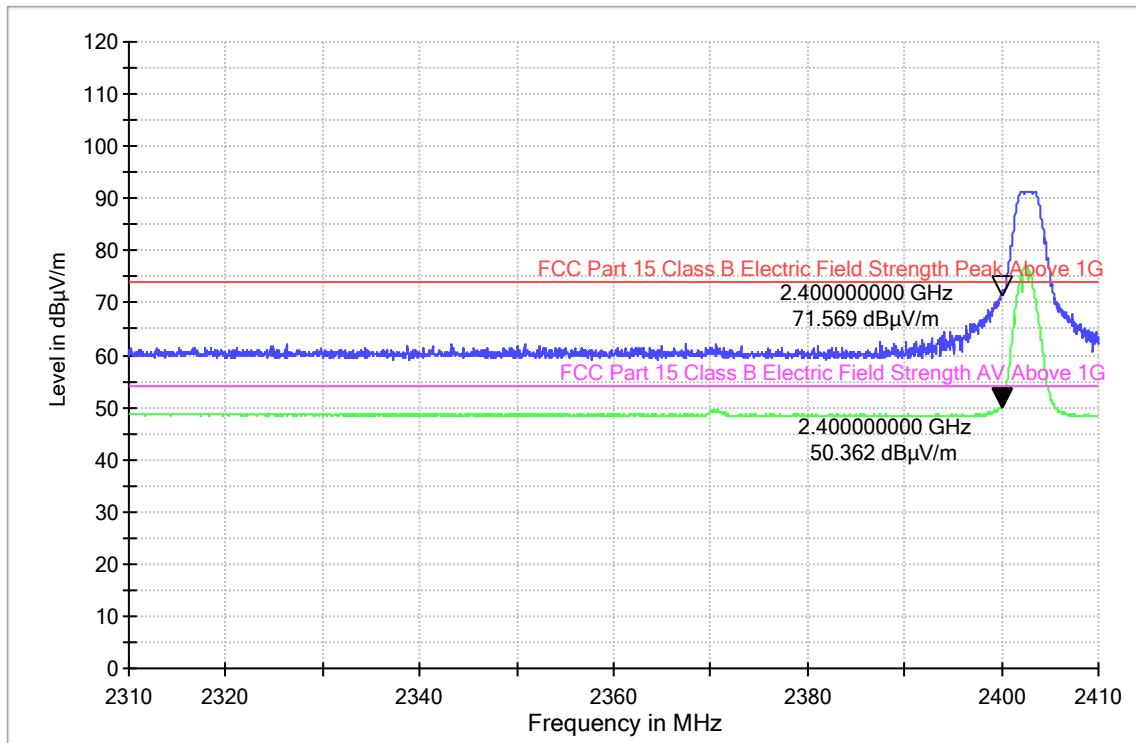


Highest frequency Channel

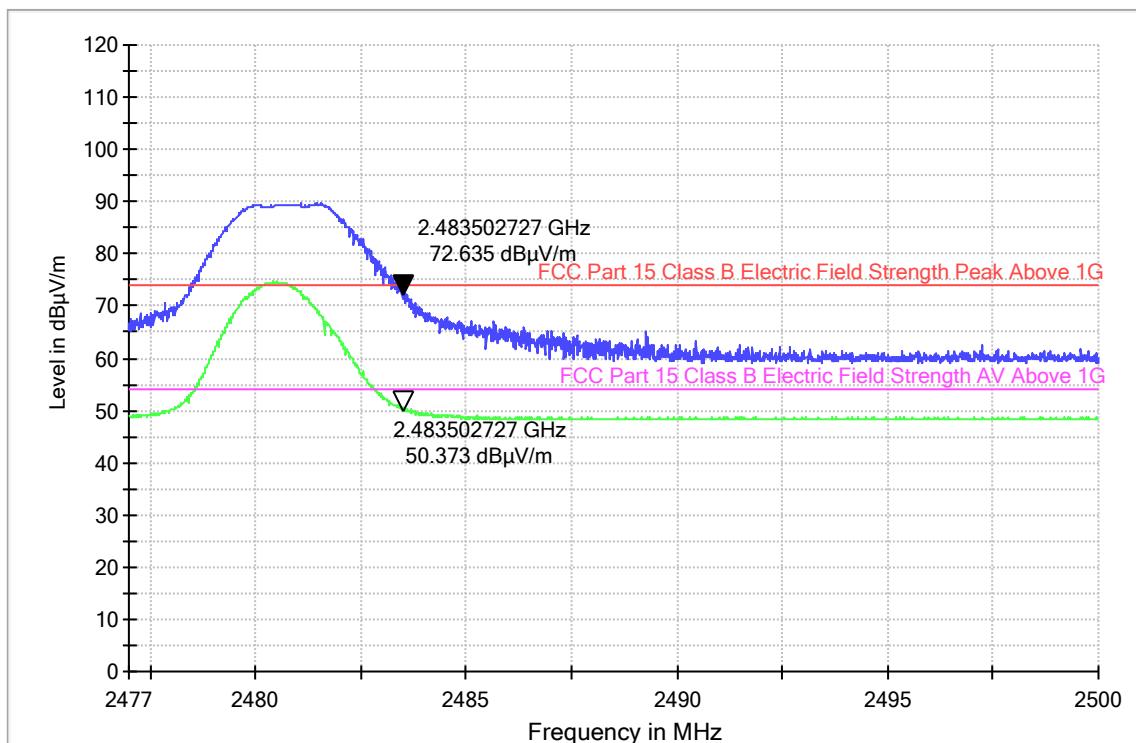


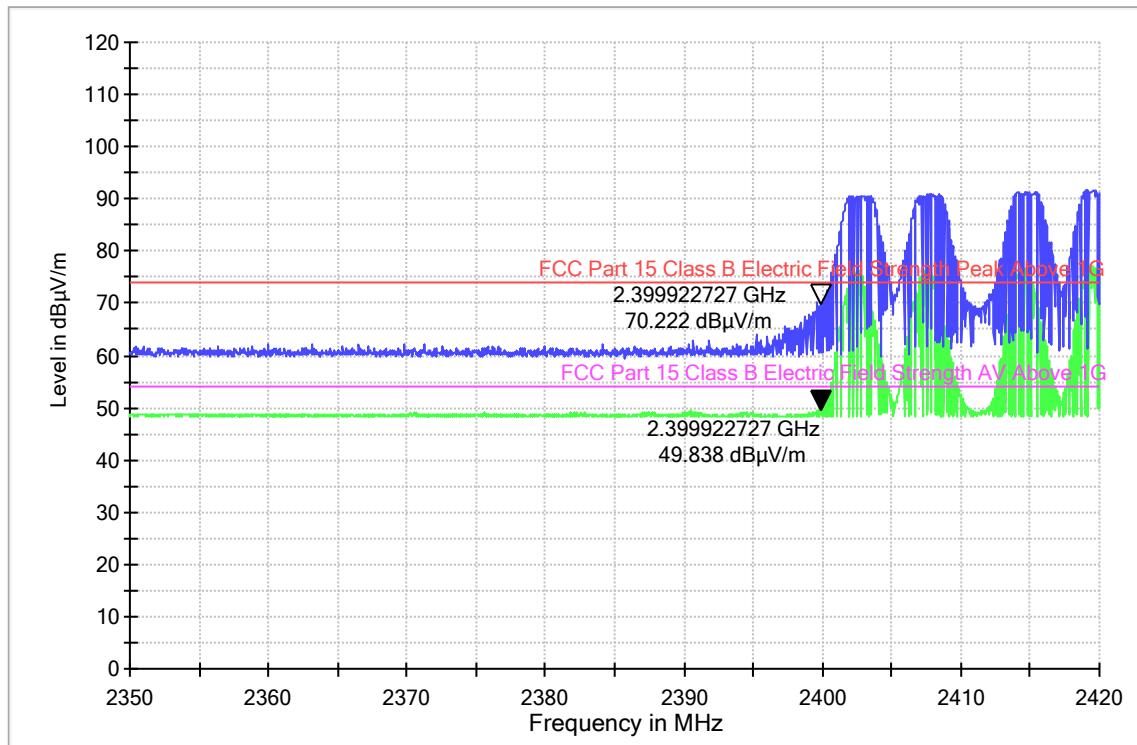
Hopping function on  
Lowest frequency Channel

## Highest frequency Channel

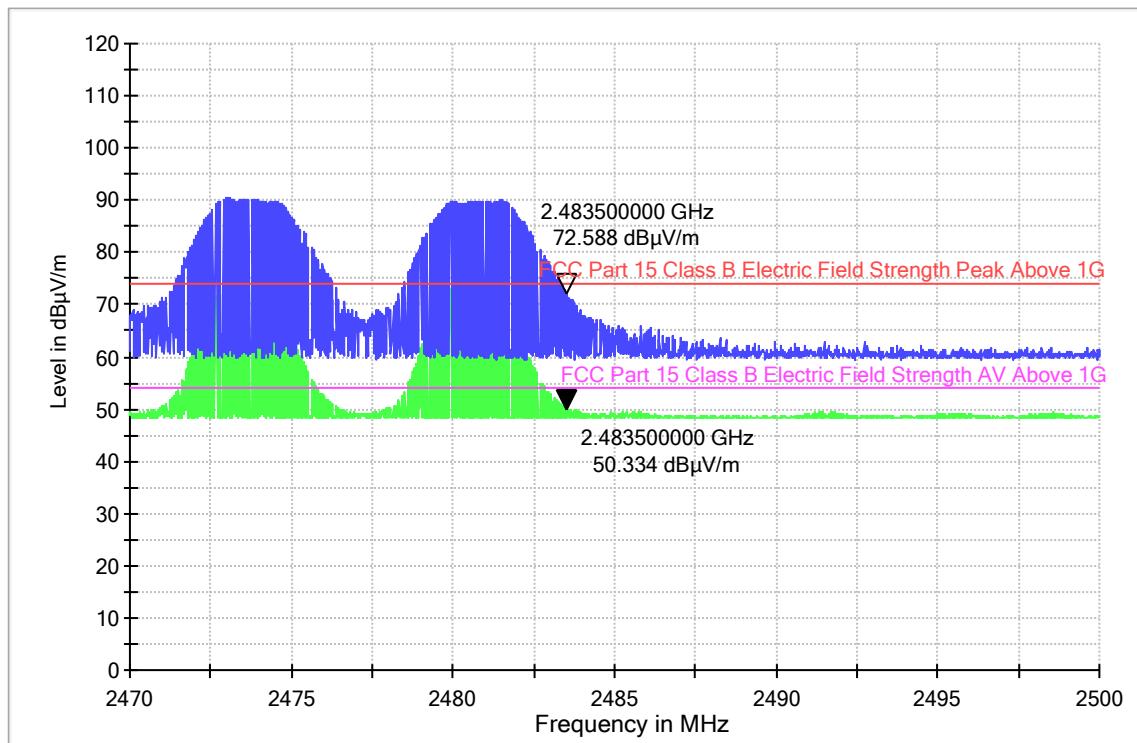

## 9.2 20dB bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered. The test plots are reported as below.

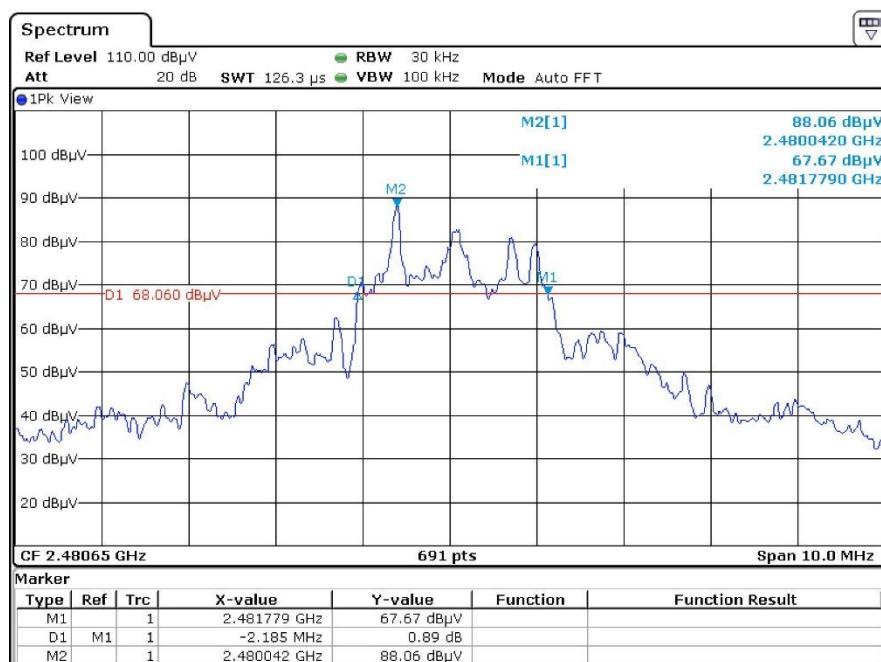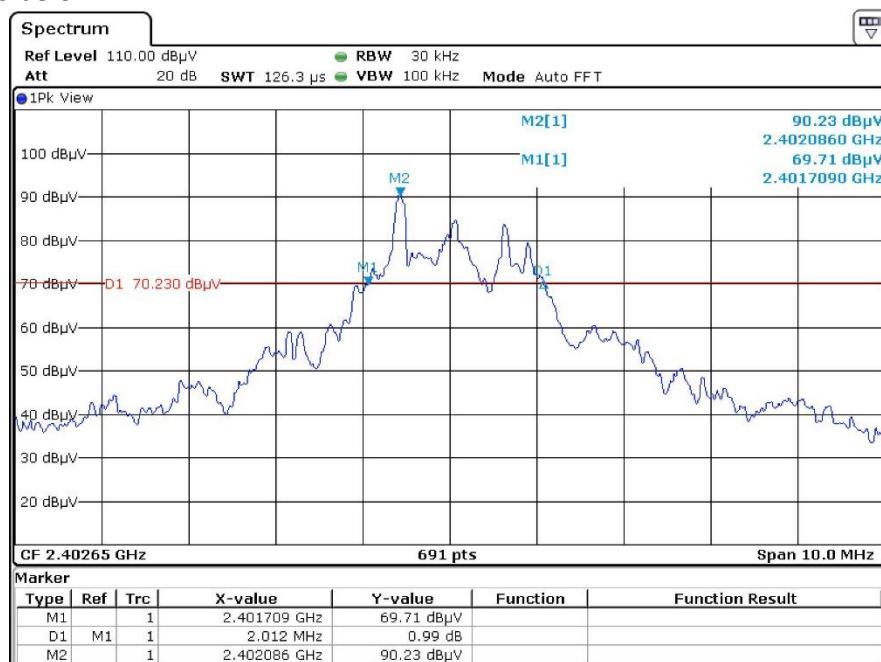

## 9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 0.110ms for a digital "1" bit, as shown in the plots of Section 9.4. With a resolution bandwidth (3 dB) of 100 kHz, the pulse desensitivity factor was 0 dB.

## 9.4 Calculation of Average Factor

Averaging factor in dB =  $20 \log_{10} (\text{duty cycle})$

The specification for output field strengths in accordance with the FCC rules specify measurements with an average detector. During testing, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation. The duty cycle is measured by placing the spectrum analyzer in zero scan (receiver mode) and linear mode at maximum bandwidth (3 MHz at 3 dB down) and viewing the resulting time domain signal output from the analyzer on a Tektronix oscilloscope. The oscilloscope is used because of its superior time base and triggering facilities.

The duty cycle is simply the on-time divided by the period:


The duration of one cycle = 7.739ms



Effective period of the cycle = 0.110ms

DC = 0.110ms / 7.739ms = 0.0142 or 1.42%

Therefore, the averaging factor is found by  $20 \log_{10} (0.0142) = -36.9\text{dB}$

The test plots are attached as below.

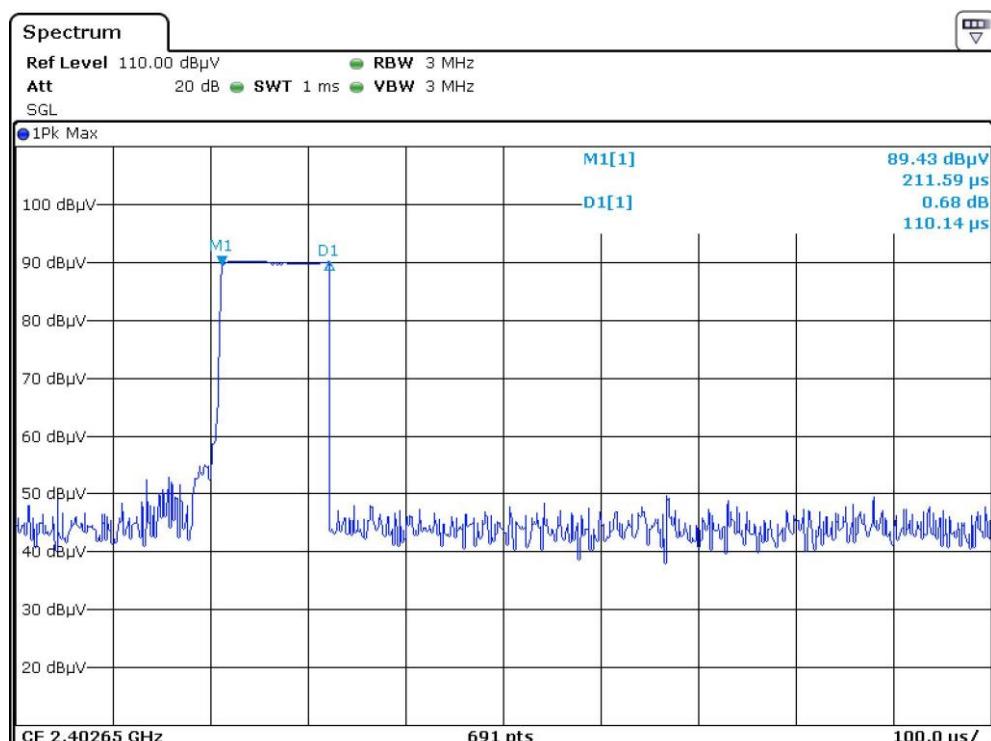

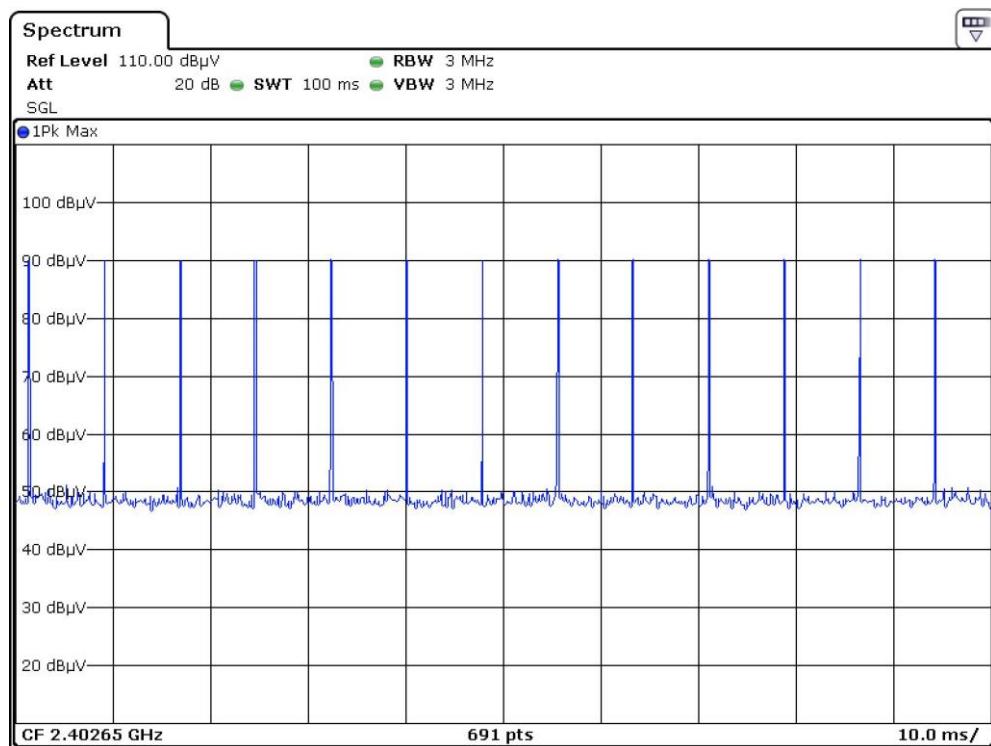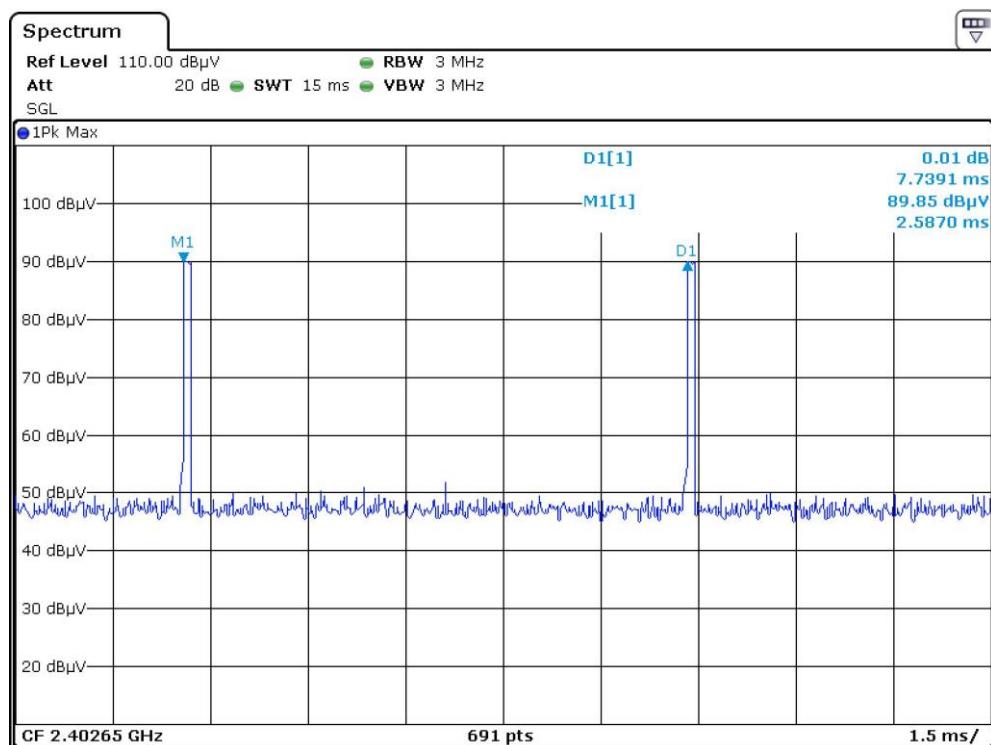

## 9.5 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 9.4.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

## 10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	2020-12-22	2021-12-22
SZ062-10	RF Cable	Bedeau	RG 58	--	2021-06-01	2021-12-01
SZ056-08	Signal Analyzer	R&S	FSV 40	101430	2020-12-22	2021-12-22
SZ185-03	EMI Receiver	R&S	ESR7	101975	2020-12-22	2021-12-22
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	2021-05-18	2023-05-18
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	2021-08-04	2024-08-04
SZ061-09	Double-Ridged Waveguide Horn Antenna	ETS	3115	00092347	2020-10-17	2022-10-17
SZ181-08	Microwave System Amplifier	Agilent	83017A	MY57280108	2021-08-04	2022-08-04
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	CT001880-Q1391	2021-05-25	2024-05-25
SZ062-23	RF Cable	RADIALL	SF104PE	MY4262/4PE	2021-09-26	2022-09-26
SZ062-35	RF Cable	Rebes	A50-3.5M3.5M-8M	19100879	2021-09-26	2022-09-26
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	015	2021-05-11	2022-05-11

\*\*\*\*\* End of Report \*\*\*\*\*