

## 6.9. Conducted Band Edge Measurement

## 6.9.1. Test Specification

FCC Part15 C Section 15.247 (d)
ANSI C63.10:2013
In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Spectrum Analyzer EUT
Transmitting mode with modulation
<ol> <li>The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2013 Measurement Guidelines.</li> <li>Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>Set RBW = 100 kHz (≥1% span=10MHz), VBW = 300 kHz (≥RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.</li> <li>Enable hopping function of the EUT and then repeat step 2 and 3.</li> <li>Measure and record the results in the test report.</li> </ol>
PASS

#### 6.9.2. Test Instruments


Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 27, 2018
RF Cable (9KHz-26.5GHz)	тст	RE-06	N/A	Sep. 27, 2018
Antenna Connector	TCT	RFC-01	N/A	Sep. 27, 2018

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



#### 6.9.3. Test Data

#### **GFSK Modulation**

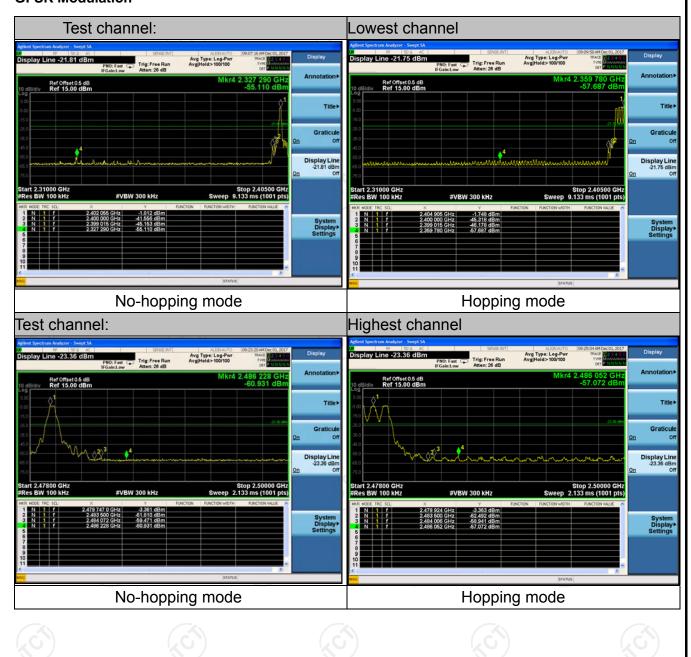




#### Pi/4DQPSK Modulation







#### **8DPSK Modulation**

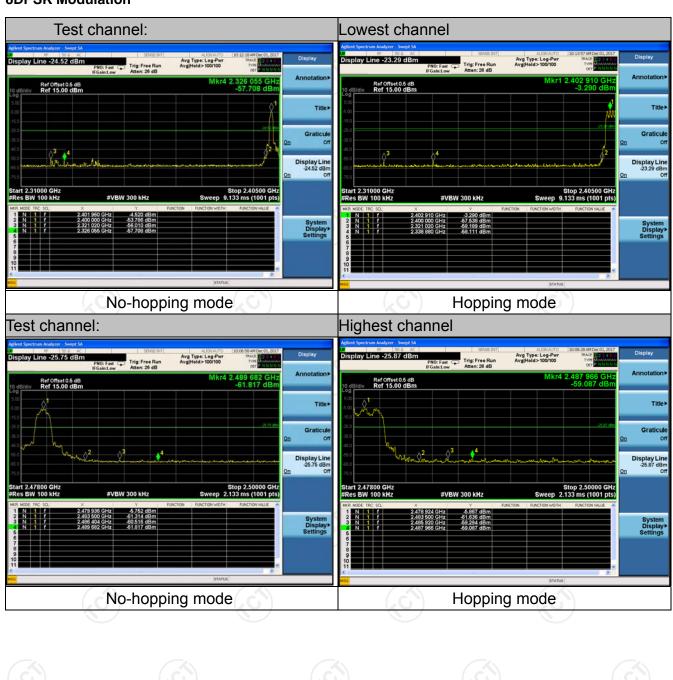



## **6.10. Conducted Spurious Emission Measurement**

## 6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol> <li>The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2013         Measurement Guidelines</li> <li>The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>Set to the maximum power setting and enable the EUT transmit continuously.</li> <li>Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.</li> <li>Measure and record the results in the test report.</li> <li>The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li> </ol>
Test Result:	PASS

#### 6.10.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 27, 2018
Spectrum Analyzer	ROHDE&SCH WARZ	FSQ	200061	Sep. 27, 2018
RF Cable (9KHz-26.5GHz)	тст	RE-06	N/A	Sep. 27, 2018
Antenna Connector	тст	RFC-01	N/A	Sep. 27, 2018


**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




#### 6.10.3. Test Data

GFSK mode


#### **Lowest Channel**

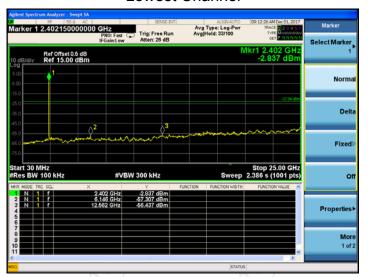

#### Middle Channel

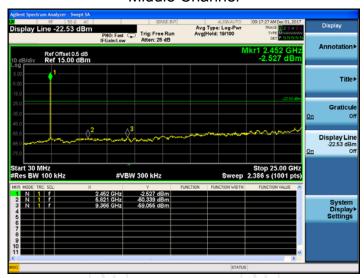


#### **Highest Channel**

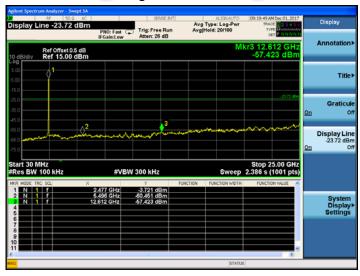




#### Pi/4DQPSK mode


#### **Lowest Channel**

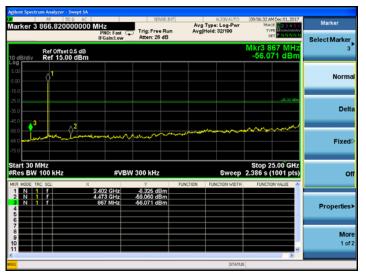

#### Middle Channel

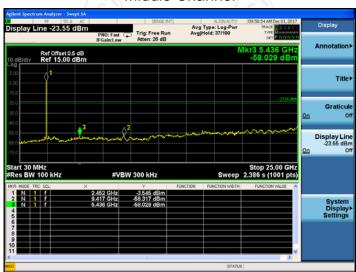


#### **Highest Channel**

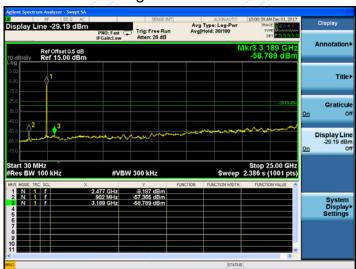




#### 8DPSK mode


#### **Lowest Channel**

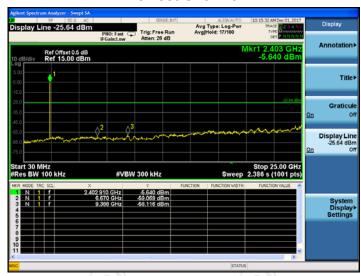

#### Middle Channel

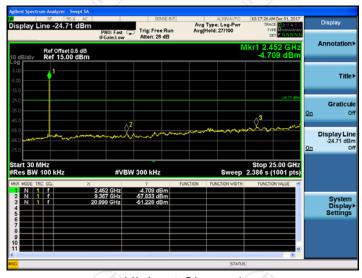

## Highest Channel

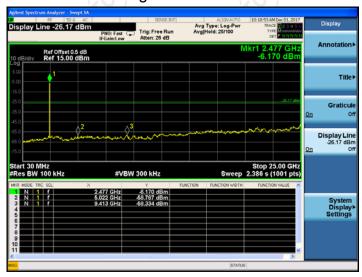





## **6.11. Radiated Spurious Emission Measurement**

## 6.11.1. Test Specification

		スト						
Test Requirement:	FCC Part15	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10	0:2013						
Frequency Range:	9 kHz to 25 (	GHz						
Measurement Distance:	3 m				1/0			
Antenna Polarization:	Horizontal &	Vertical						
	Frequency	Detector	r RBW	VBW		Remark		
Receiver Setup:	9kHz- 150kHz 150kHz- 30MHz	Quasi-pea Quasi-pea		1kHz 30kHz		si-peak Value si-peak Value		
Receiver Setup.	30MHz-1GHz	Quasi-pea		300KHz		si-peak Value		
	Above 1GHz	Peak Peak	1MHz 1MHz	3MHz 10Hz		eak Value erage Value		
	Frequen	ісу	Field Stre (microvolts	-		asurement nce (meters)		
	0.009-0.4	-	2400/F(F		300			
	0.490-1.7		24000/F(	KHz)	30			
	1.705-3 30-88		30 100			30		
	88-216		150		3			
Limit:	216-96		200		3			
	Above 9	60	500			3		
	Frequency		eld Strength rovolts/meter)	Measure Distan (meter	се	Detector		
	Above 1GHz	,	500	3		Average		
	710000 10112		5000	3		Peak		
	For radiated emis	ssions below	w 30MHz		160			
	†	<b></b>  (		Pre -	Compu	The Co		
Test setup:	EUT	Turn table	and Plane		Receiver			
	30MHz to 1GHz	-Z\						
		- 7						

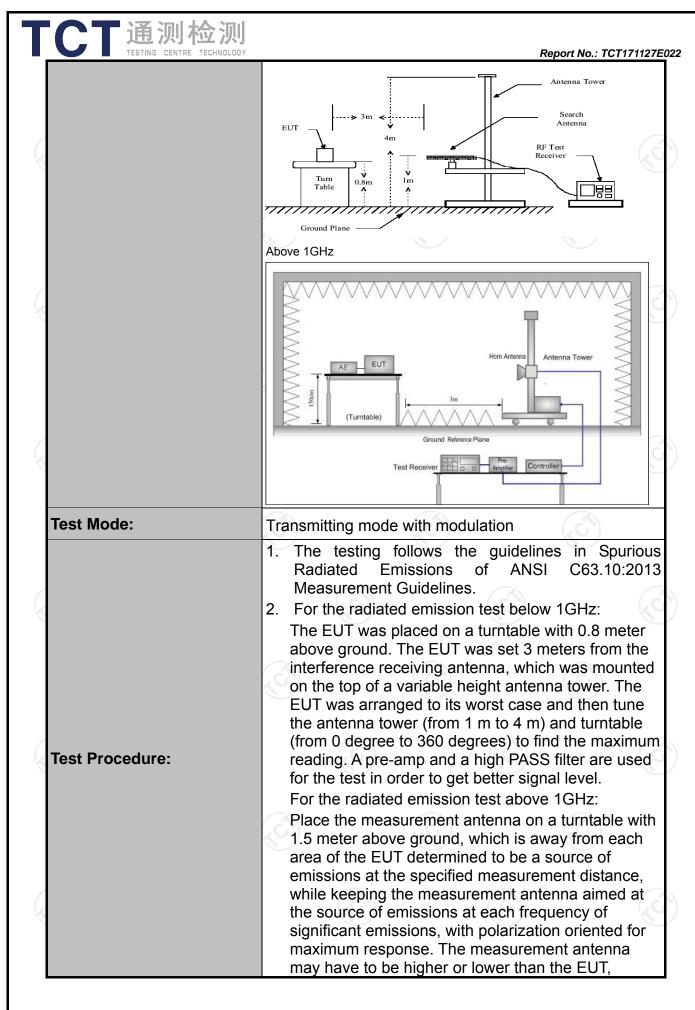

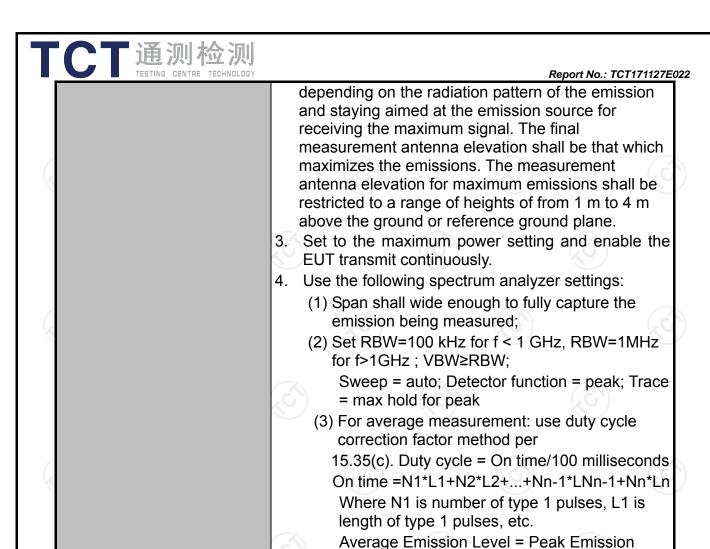

Test results: PASS



Level + 20\*log(Duty cycle)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level





## 6.11.2. Test Instruments

	Radiated Em	ission Test Sit	te (966)		
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep. 27, 2018	
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ	200061	Sep. 27, 2018	
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 27, 2018	
Pre-amplifier	HP	8447D	2727A05017	Sep. 27, 2018	
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 27, 2018	
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 27, 2018	
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 27, 2018	
Horn Antenna	Schwarzbeck	BBH 9170	582	Jun. 07, 2018	
Antenna Mast	Keleto	CC-A-4M	N/A	N/A	
Coax cable (9KHz-1GHz)	тст	RE-low-01	N/A	Sep. 27, 2018	
Coax cable (9KHz-40GHz)	тст	RE-high-02	N/A	Sep. 27, 2018	
Coax cable (9KHz-1GHz)	тст	RE-low-03	N/A	Sep. 27, 2018	
Coax cable (9KHz-40GHz)	тст	RE-high-04	N/A	Sep. 27, 2018	
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A	

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




6.11.3. Test Data

#### Duty cycle correction factor for average measurement

3DH5 on time (One Pulse) Plot on Channel 00



3DH5 on time (Count Pulses) Plot on Channel 00

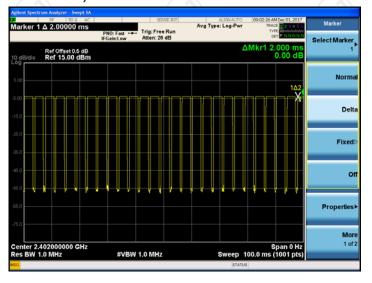

#### Note:

- 1. Worst case Duty cycle = on time/100 milliseconds = (2.952\*26+2.000)/100=0.7875
- 2. Worst case Duty cycle correction factor = 20\*log (Duty cycle) = -2.07dB
- 3. 3DH5 has the highest duty cycle worst case and is reported.
- 4. The average levels were calculated from the peak level corrected with duty cycle correction factor (-2.07dB) derived from 20log (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

Page 49 of 63

Report No.: TCT171127E022


Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com



Please refer to following diagram for individual


### Below 1GHz

#### Horizontal:

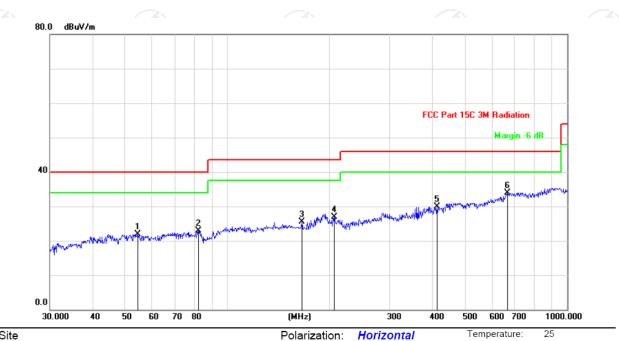


Site Polarization: Horizontal Temperature: 2
Limit: FCC Part 15C 3M Radiation Power: Humidity: 55 %

No. M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1	54.4515	34.90	-12.99	21.91	40.00	-18.09	peak			
2	82.0704	39.44	-16.55	22.89	40.00	-17.11	peak			
3	165.4866	40.33	-14.85	25.48	43.50	-18.02	peak			
4	206.3976	39.35	-12.49	26.86	43.50	-16.64	peak			
5	413.2706	35.29	-5.44	29.85	46.00	-16.15	peak			
6 *	668.1422	34.27	-0.27	34.00	46.00	-12.00	peak			

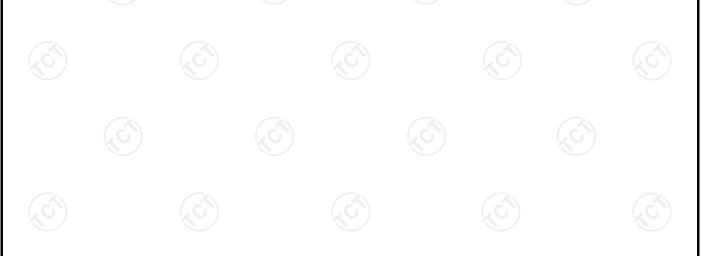



#### Vertical:

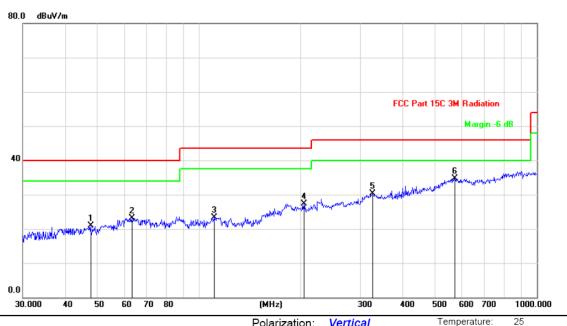

Site Polarization: Vertical Temperature: 25 Minit: FCC Part 15C 3M Radiation Power: Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1		47.6584	33.66	-12.67	20.99	40.00	-19.01	peak			
2		63.0915	37.71	-14.62	23.09	40.00	-16.91	peak			
3	1	110.9569	35.99	-12.65	23.34	43.50	-20.16	peak			
4	2	204.2375	39.87	-12.57	27.30	43.50	-16.20	peak			
5	3	325.5957	38.24	-7.95	30.29	46.00	-15.71	peak			
6	* 5	72.6144	36.17	-1.42	34.75	46.00	-11.25	peak			

**Note:** 1.The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

2. Measurements were conducted in all three channels (high, middle, low) and three modulation (GFSK, Pi/4 DQPSK, 8DPSK) and the worst case Mode (Middle channel and GFSK) was submitted only.





#### **Above 1GHz**

Modulation	Type: GF	SK								
Low channel: 2402 MHz										
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBuV)	Correction Factor (dB/m)	Peak	n Level AV (dBµV/m)	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)	
2390	I	46.21		-8.27	37.94		74	54	-16.06	
4804	Н	47.56		0.66	48.22		74	54	-5.78	
7206	T	37.47		9.50	46.97		74	54	-7.03	
	(GH)		+.C		(	·C <del>`}-</del>		( <del>-C</del> ))		
					× ×					
2390	V	44.86		-8.27	36.59		74	54	-17.41	
4804	V	46.95		0.66	47.61		74	54	-6.39	
7206	V	37.34		9.50	46.84		74	54	-7.16	
0 )	V	(40)		/<	)		(C)			

Middle cha	nnel: 2441	MHz							
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Peak	۸۱/	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
4882	Ŧ	45.82		0.99	46.81		74	54	-7.19
7323	Н	37.34	-	9.87	47.21	-	74	54	-6.79
	Н		-		-	-	I		
									( ć
4882	V	45.92		0.99	46.91	-	74	54	-7.09
7323	V	41.01		9.87	50.88		74	54	-3.12
	V								

High chann	nel: 2480 N	ЛHz	(.G	*)		.61		(.G))	
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dBµV)	AV reading (dBµV)	Correction Factor (dB/m)	Peak	n Level AV (dBµV/m)	Peak limit (dBµV/m)	AV limit (dBµV/m)	Margin (dB)
2483.5	Н	47.34		-7.83	39.51		74	54	-14.49
4960	Н	50.65		1.33	51.98		74	54	-2.02
7440	Н	40.38		10.22	50.60		74	54	-3.40
	Н								
						_			
2483.5	V	49.63		-7.83	41.80	<del></del>	74	54	-12.20
4960	<b>V</b>	48.11	-420	1.33	49.44	(O-7	74	54	-4.56
7440	V	38.52		10.22	48.74	<u></u>	74	54	-5.26
	<b>V</b>	-							

#### Note:

- 1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss Pre-amplifier
- 2.  $Margin (dB) = Emission Level (Peak) (dB\mu V/m)-Average limit (dB\mu V/m)$
- 3. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 5. Data of measurement shown "---"in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- 6. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.




Page 52 of 63

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com



**Appendix A: Photographs of Test Setup**Product: Executive Bone Conduction Headphones Model: AR113A4BKA **Radiated Emission** 




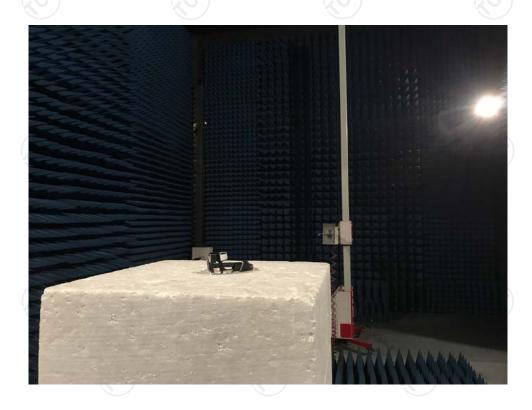



#### Conducted Emission

















# Appendix B: Photographs of EUT Product: Executive Bone Conduction Headphones Model: AR113A4BKA External Photos











TCT通测检测
TESTING CENTRE TECHNOLOGY











## Product: Executive Bone Conduction Headphones Model: AR113A4BKA Internal Photos



