

Shenzhen CTL Testing Technology Co., Ltd. Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 15 SUBPART C TEST REPORT

Report Reference No.: CTL1509112623-WF

Compiled by: Happy Guo (position+printed name+signature) (File administrators)

(position+printed name+signature)

Nice Nong
(Test Engineer)

Approved by: Tracy Qi
(position+printed name+signature) (Manager)

Product Name...... Wireless Pocket Speaker

Model/Type reference...... 989710

Trade Mark..... Brookstone

FCC ID...... 2AFVN-POCSPK

Applicant's name...... Brookstone Purchasing, Inc.

Address of applicant...... One Innovation Way, Merrimack, NH 03054 USA

Test Firm..... Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm..... Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan

District, Shenzhen, China 518055

Test specification....:

2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

TRF Originator...... Shenzhen CTL Testing Technology Co., Ltd.

Master TRF...... Dated 2011-01

Date of Receipt...... Sept. 11, 2015

Date of Test Date...... Sept. 11, 2015 - Sept. 14, 2015

Data of Issue...... Sept. 14, 2015

Result..... Positive

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

V1.0 Page 2 of 27 Report No.: CTL1509112623-WF

TEST REPORT

Test Report No. :	CTL1509112623-WF	Sept. 14, 2015
rest Report No	G1E1309112023-W1	Date of issue

Equipment under Test : Wireless Pocket Speaker

Model /Type : 989710

Applicant : Brookstone Purchasing, Inc.

Address : One Innovation Way, Merrimack, NH 03054 USA

Manufacturer CCA DESIGNING&MANUFACTURING LIMITED

Address BLD 120-121TH, PINGHUAN IND.CITY PINGSHAN

TOWN, SHENZHEN, 518118

Test Result according to the standards on page 4:	Positive O

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Report No.: CTL1509112623-WF

Contents

SUMMARY	<u></u>
Equipment Under Test	
Description of the Equipment under Test (EUT)	
EUT operation mode	
EUT configuration	(
Related Submittal(s) / Grant (s)	(
Modifications	(
TEST ENVIRONMENT	
TEGT ENVIRONMENT	
Address of the test laboratory	
Test Facility	
Environmental conditions	
Configuration of Tested System	
Statement of the measurement uncertainty	
Equipments Used during the Test	
TEST CONDITIONS AND RESULTS	
Conducted Emissions Test	
Transmitter Radiated Unwanted Emissions and Bandedge	
Occupied Bandwidth Measurement	
ANTENNA REQUIREMENT	7
ANTENNA REGOTIENEN	/
TEST SETUP PHOTOS OF THE EUT	

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.249: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

ANSI C63.10-2013 and ANSI C63.4-2014



V1.0 Page 5 of 27 Report No.: CTL1509112623-WF

2. SUMMARY

2.1. Equipment Under Test

Power supply system utilised

Power supply voltage : o 120V / 60 Hz o 115V / 60Hz o 24 V DC

Other (specified in blank below)

DC 3.7V from battery

2.2. Description of the Equipment under Test (EUT)

The EUT (Wireless Pocket Speaker) support Bluetooth function.

Name of EUT	Wireless Pocket Speaker
Model Number	989710
Antenna Type	Internal
BT CE Operation frequency	2402MHz-2480MHz
BT Modulation Type	GFSK,8DPSK,π/4DQPSK(BT V3.0+EDR)
Bluetooth	BT V3.0+EDR

Channel List:

Onamici List.	- 10				_
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

V1.0 Page 6 of 27 Report No.: CTL1509112623-WF

2.3. EUT operation mode

Test Mode(TM)	Description	Remark
TM1	Bottom Channel Transmitting	1
TM2	Middle Channel Transmitting	1
TM3	Top Channel Transmitting	1
TM4	Charging and keeping TX	power by battery

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of X axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

Remark: GFSK,8DPSK,π/4DQPSK all have been tested only worse case(GFSK) is reported

2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- o supplied by the manufacturer
- supplied by the lab

Notebook PC
 FCC DOC APPROVED
 Manufacturer: DELL
 Model: PP18L

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AFVN-POCSPK** filling to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

CT Testing

V1.0 Page 7 of 27 Report No.: CTL1509112623-WF

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd. Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318


Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

3.3. Environmental conditions

During the measurement the e	nvironmental conditions were within the listed ranges:
Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System



3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods — Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Report No.: CTL1509112623-WF

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~26.5GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3.6. Equipments Used during the Test


Test Equipment	pment Manufacturer		Serial No.	Calibration Date	Calibration Due Date
ULTRA-ROADBAND ANTENNA	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	Daze	ZN30900A	N/A	2015/05/19	2016/05/18
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
ISN	FCC	F-071115- 1057-1-09	11229	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Transient Limiter	SCHWARZCECK	VTSD 9561F	9666	2015/06/02	2016/06/01
Radio Communication Tester	R&S	CMU200	115419	2015/05/22	2016/05/21
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
SIGNAL GENERATOR	Agilent	E4421B	US40051744	2015/05/20	2016/05/19
Wideband Peak Power Meter	Anritsu	ML2495A	220.23.35	2015/05/20	2016/05/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10- 2700/X12750 -O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L 703	41H10- 1375/U12750 -O/O	N/A	2015/05/20	2016/05/19
RF Cable	HUBER+SUHNER	RG214	N/A	2015/05/20	2016/05/19

V1.0 Page 10 of 27 Report No.: CTL1509112623-WF

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

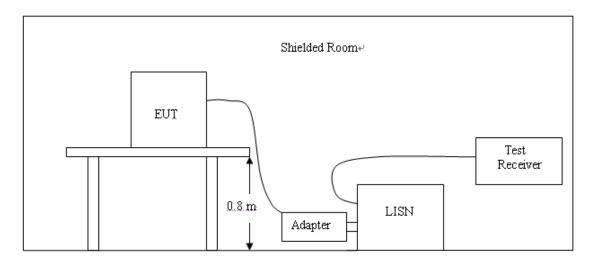

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2 Support equipment, if needed, was placed as per ANSI C63.10.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4 If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

The RBW/VBW for 150KHz to 30MHz: 9KHz

V1.0 Page 11 of 27 Report No.: CTL1509112623-WF

CONDUCTED POWER LINE EMISSION LIMIT

For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following:


Erecuency	Maximum RF Line Voltage (dBμV)				
Frequency (MHz)	CLASS A		CLASS B		
(111112)	Q.P.	Ave.	Q.P.	Ave.	
0.15 - 0.50	79	66	66-56*	56-46*	
0.50 - 5.00	73	60	56	46	
5.00 - 30.0	73	60	60	50	

^{*} Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"

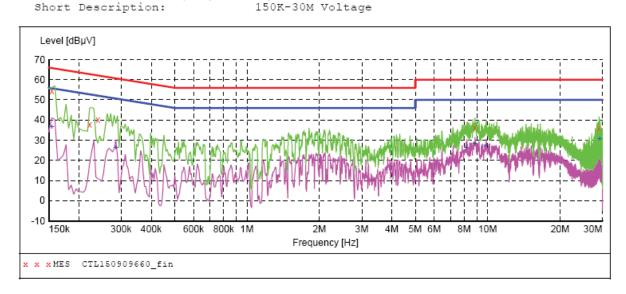

MEASUREMENT RESULT: "CTL150909660_fin"


9/9/2	015 7:49	PM						
Fr	equency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0	.154501	54.30	10.2	66	11.5	QP	N	GND
0	.222001	37.80	10.2	63	24.9	QP	N	GND
0	.240001	40.20	10.2	62	21.9	QP	N	GND
8	.848501	36.10	10.6	60	23.9	QP	N	GND
28	.999501	35.90	11.2	60	24.1	QP	N	GND

MEASUREMENT RESULT: "CTL150909660 fin2"

9/9/2015 7							
Frequenc MH	-	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.15450	1 36.70	10.2	56	19.1	AV	N	GND
0.28500	1 26.10	10.2	51	24.6	AV	N	GND
8.15550	1 26.40	10.5	50	23.6	AV	N	GND
8.87550	1 28.30	10.6	50	21.7	AV	N	GND
9.83850	1 27.50	10.6	50	22.5	AV	N	GND
29.17950	1 30.50	11.2	50	19.5	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

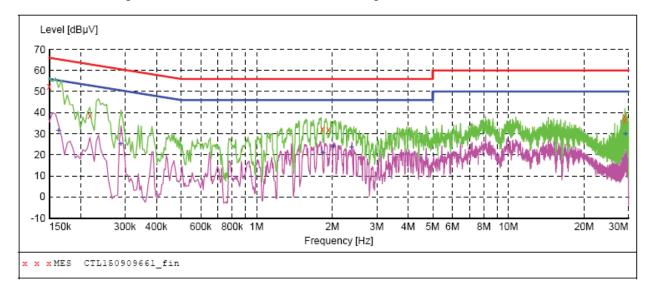

MEASUREMENT RESULT: "CTL150909661_fin"

9	/9/2015 7:53	PM						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.150001	52.40	10.2	66	13.6	QP	L1	GND
	0.217501	38.50	10.2	63	24.4	QP	L1	GND
	1.824001	32.20	10.3	56	23.8	QP	L1	GND
	1.927501	31.80	10.3	56	24.2	QP	L1	GND
	28.941001	38.10	11.2	60	21.9	QP	L1	GND
	28.999501	36.30	11.2	60	23.7	QP	L1	GND

MEASUREMENT RESULT: "CTL150909661_fin2"


9/9/	2015 7:53E	M						
F	requency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.163501	31.50	10.2	55	23.8	AV	L1	GND
	0.289501	25.00	10.2	51	25.5	AV	L1	GND
	1.837501	20.80	10.3	46	25.2	AV	L1	GND
	2.022001	24.10	10.4	46	21.9	AV	L1	GND
	2.386501	23.40	10.4	46	22.6	AV	L1	GND
2	9.179501	29.90	11.2	50	20.1	AV	L1	GND

V1.0 Page 13 of 27 Report No.: CTL1509112623-WF


4.2. Transmitter Radiated Unwanted Emissions and Bandedge

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

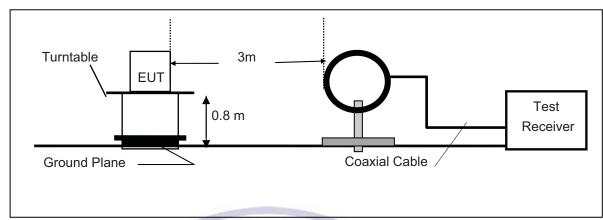

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

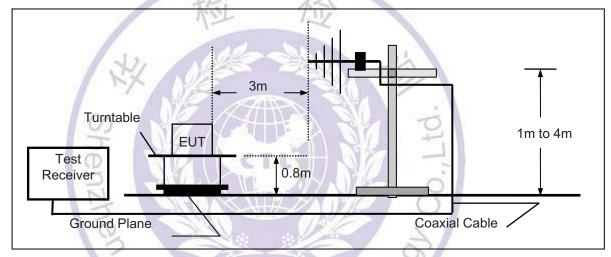

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

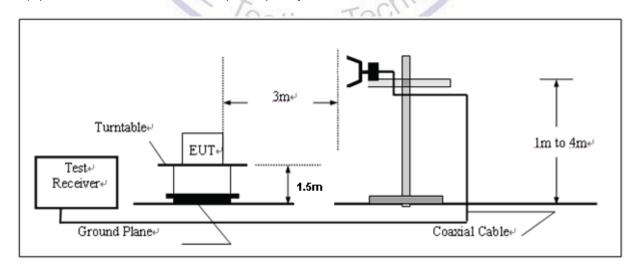

V1.0 Page 14 of 27 Report No.: CTL1509112623-WF

FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For unintentional device, according to § 15.209(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (μV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500
100		I May	

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.
- 7. Based on the Frequency Generator in the device include 26MHz. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

Three axes are chosen for pretest, the X axis is the worst mode for final test. For battery operated equipment, the equipment tests shall be performed using a new battery.

V1.0 Page 15 of 27 Report No.: CTL1509112623-WF


TEST RESULTS

All the test modes (TM1, TM2, TM3 and TM4) completed for test. The worst case of Radiated Emission is TM1; the test data of this mode was reported.

Below 1GHz Test Results:

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

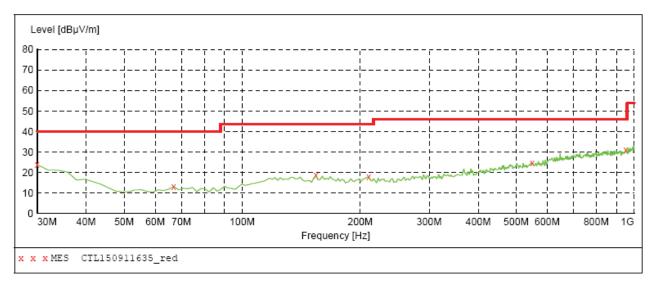

MEASUREMENT RESULT: "CTL150911635 red"

9/11/2015 10:20AM												
Frequen M	-	Level dBµV/m	Transd dB		Margin dB	Det.	Height cm	Azimuth deg	Polarization			
30.0000	00	23.70	20.8	40.0	16.3		0.0	0.00	VERTICAL			
66.8600	00	13.10	8.2	40.0	26.9		0.0	0.00	VERTICAL			
154.1600	00	18.60	13.7	43.5	24.9		0.0	0.00	VERTICAL			
210.4200	00	17.90	14.0	43.5	25.6		0.0	0.00	VERTICAL			
549.9200	0.0	24.70	21.0	46.0	21.3		0.0	0.00	VERTICAL			
951.5000	00	31.10	26.5	46.0	14.9		0.0	0.00	VERTICAL			

Remark:

(1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.

estina le


- * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
Start Stop Detector Meas. IF

Start Stop Detector Meas. IF Transducer Frequency Frequency Time Bandw.

30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

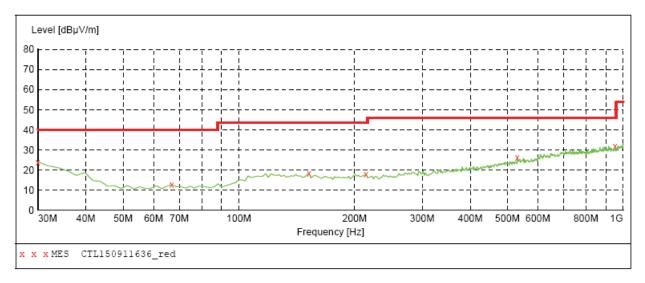

MEASUREMENT RESULT: "CTL150911636_red"

9/11/2015 10:21AM												
Frequen M	cy Leve Hz dBµV		Limit dBµV/m	_	Det.	Height cm	Azimuth deg	Polarization				
30.0000	00 23.	90 20.8	40.0	16.1		0.0	0.00	HORIZONTAL				
66.8600	00 12.	70 8.2	40.0	27.3		0.0	0.00	HORIZONTAL				
152.2200	00 18.3	10 13.7	43.5	25.4		0.0	0.00	HORIZONTAL				
214.3000	00 18.0	00 14.0	43.5	25.5		0.0	0.00	HORIZONTAL				
530.5200	00 26.	20 20.4	46.0	19.8		0.0	0.00	HORIZONTAL				
953.4400	00 32.	00 26.6	46.0	14.0		0.0	0.00	HORIZONTAL				

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results:

Note: Receive antenna polarization Horizontal and Vertical all have been tested ,only worse case GFSK vertical is reported .

Frequency	Emis	sion	Limit	Margin	Raw	Antenna Factor	Cable	Pre- amplifier	Correction
(MHz)	Lev	/el	(dBuV/m)	(dB)	Value	(dB/m)	Factor	(dB)	Factor
	(dBu	V/m)			(dBuV)		(dB)		(dB/m)
2402.00	98.11	PK	114	15.89	100.07	28.78	4.61	35.36	-1.96
2402.00	86.05	AV	94	7.95	88.01	28.78	4.61	35.36	-1.96
2390.00	63.49	PK	74	10.51	65.53	28.72	4.60	35.36	-2.04
2390.00	48.04	AV	54	5.96	50.08	28.72	4.60	35.36	-2.04
2400.00	66.05	PK	74	7.95	68.02	28.78	4.61	35.36	-1.97
2400.00	50.14	AV	54	3.86	52.11	28.78	4.61	35.36	-1.97
4804.00	69.02	PK	74	4.98	64.51	33.49	6.91	35.89	4.51
4804.00	50.36	AV	54	3.64	45.85	33.49	6.91	35.89	4.51
6005.00	63.08	PK	74	10.92	54.95	35.12	7.60	34.59	8.13
6005.00	45.77	AV	54	8.23	37.64	35.12	7.60	34.59	8.13
7206.00	60.42	PK	74	13.58	49.31	36.95	9.18	35.03	11.11
7206.00	46.55	AV	54	7.45	35.44	36.95	9.18	35.03	11.11

Frequency	Emission		Limit	Margin	Raw	Antenna Factor	Cable	Pre- amplifier	Correction
(MHz)	Lev	vel .	(dBuV/m)	(dB)	Value	(dB/m)	Factor	(dB)	Factor
	(dBu	V/m)			(dBuV)		(dB)		(dB/m)
2441.00	97.75	PK	114	16.25	99.61	28.85	4.66	35.37	-1.86
2441.00	82.99	AV	94	11.01	84.85	28.85	4.66	35.37	-1.86
3200.00	64.47	PK	74	9.53	63.11	31.24	5.47	35.35	1.36
3200.00	51.18	AV	54	2.82	49.82	31.24	5.47	35.35	1.36
3657.00	64.98	PK	74	9.02	61.63	32.37	6.01	35.04	3.35
3657.00	49.03	AV	54	4.97	45.68	32.37	6.01	35.04	3.35
4882.00	70.02	PK	74	3.98	63.66	33.60	6.95	34.19	6.36
4882.00	51.26	AV	54	2.74	44.90	33.60	6.95	34.19	6.36
6103.00	62.23	PK	74	11.77	53.93	35.20	7.74	34.64	8.30
6103.00	47.92	AV	54	6.08	39.62	35.20	7.74	34.64	8.30
7323.00	59.33	PK	74	14.67	47.63	37.46	9.23	35.00	11.70
7323.00	45.04	AV	54	8.96	33.34	37.46	9.23	35.00	11.70

Frequency	Emission		Limit	Margin	Raw	Antenna Factor	Cable	Pre- amplifier	Correction
(MHz)	Lev	/el	(dBuV/m)	(dB)	Value	(dB/m)	Factor	(dB)	Factor
	(dBu	V/m)			(dBuV)		(dB)		(dB/m)
2480.00	98.03	PK	114	15.97	99.78	28.92	4.70	35.38	-1.75
2480.00	84.11	AV	94	9.89	85.86	28.92	4.70	35.38	-1.75
2483.50	56.02	PK	74	17.98	57.76	28.93	4.70	35.38	-1.74
2483.50	45.97	AV	54	8.03	47.71	28.93	4.70	35.38	-1.74
3720.00	59.26	PK	74	14.74	56.06	32.77	6.08	35.65	3.20
3720.00	43.82	AV	54	10.18	40.62	32.77	6.08	35.65	3.20
4960.00	68.56	PK	74	5.44	61.86	33.84	7.00	34.14	6.70
4960.00	50.77	AV	54	3.23	44.07	33.84	7.00	34.14	6.70
6200.00	61.14	PK	74	12.86	52.74	35.19	7.90	34.69	8.40
6200.00	46.59	AV	54	7.41	38.19	35.19	7.90	34.69	8.40
7440.00	58.07	PK	74	15.93	46.12	37.64	9.28	34.97	11.95
7440.00	46.28	AV	54	7.72	34.33	37.64	9.28	34.97	11.95

V1.0

Note: above 10GHz up to 25GHz was verified, and no any emission was found except system noise floor.



V1.0 Page 19 of 27 Report No.: CTL1509112623-WF


4.3. Occupied Bandwidth Measurement

Measurement Procedure

- 1. Set EUT as normal operation.
- 2. RBW ≥ 1% of the 20 dB bandwidth, VBW≥RBW.
- 3. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.


Measurement Results

2402MHz

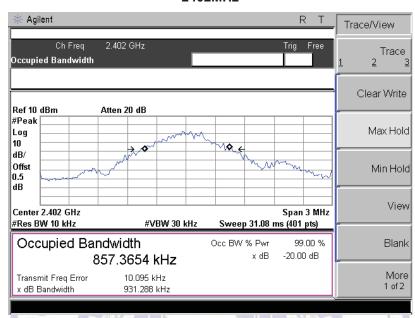


20dB Bandwidth: 931.288 KHz

2441MHz

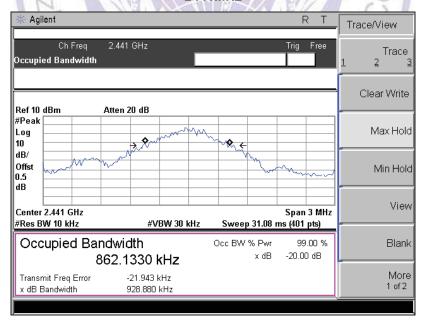

20dB Bandwidth: 928.880 KHz

2480MHz

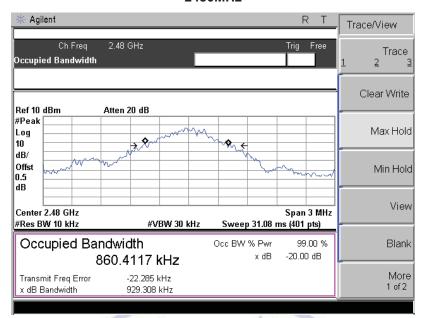



V1.0 Page 21 of 27 Report No.: CTL1509112623-WF

5. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.


Antenna Connected Construction

The antenna used in this product is an internal Antenna, The directional gains of antenna used for transmitting is 0 dBi.



V1.0 Page 22 of 27 Report No.: CTL1509112623-WF

6. Test Setup Photos of the EUT

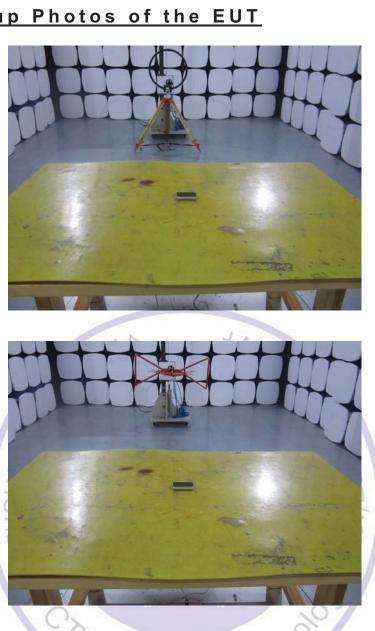








7. External and Internal Photos of the EUT

External Photos of EUT

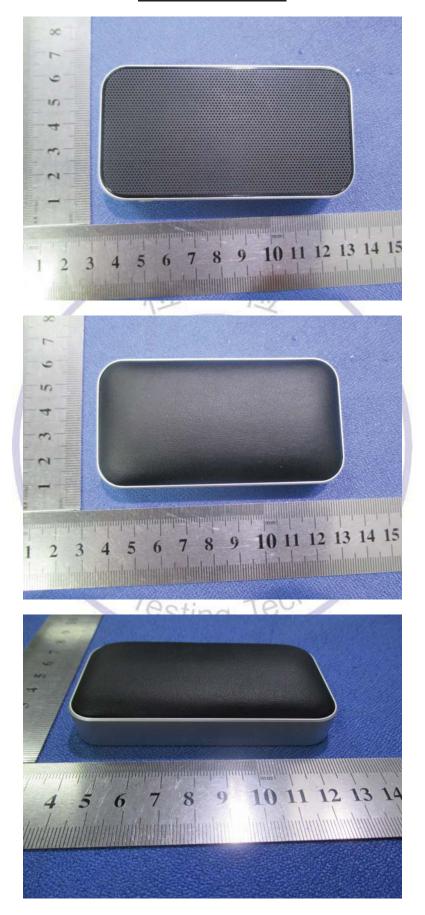









Internal Photos of EUT



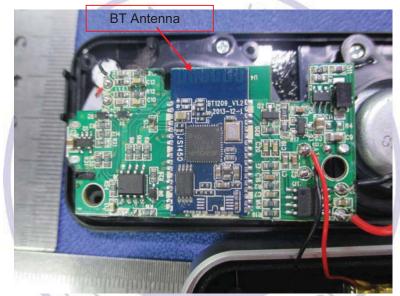

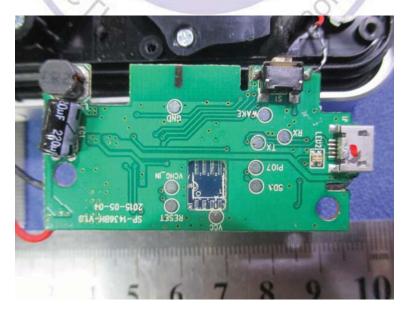





End of Report.