

FCC TEST REPORT
For
Shenzhen Kexin Communication Technologies Co.,Ltd
Smart Test Device
Model No.: KX100
Additional model No.: KX-100W, KX-100E

Prepared for : Shenzhen Kexin Communication Technologies Co.,Ltd
Address : Huiye Road South , Guangming Hi-Tech Industrial Park,
Guangming, Shenzhen, P.R.China

Date of receipt of test sample : August 02, 2015
Number of tested samples : 1
Serial number : Prototype
Date of Test : August 02, 2015 – September 10, 2015
Date of Report : September 10, 2015

FCC TEST REPORT

FCC CFR 47 PART 22 SUBPART H AND PART 24 SUBPART E

Report Reference No. : **LCS1508271564E**

Date of Issue : September 10, 2015

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Full application of Harmonised standards Testing Location/ Procedure : Partial application of Harmonised standards Other standard testing method **Applicant's Name** : **Shenzhen Kexin Communication Technologies Co.,Ltd**

Address : Huiye Road South , Guangming Hi-Tech Industrial Park, Guangming, Shenzhen, P.R.China

Test SpecificationStandard : FCC CFR 47 PART 2, FCC CFR 47 PART 22 SUBPART H
AND PART 24 SUBPART E**Test Report Form No.** : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : **Smart Test Device**

Trade Mark : KEXIN

Model/ Type reference : KX100

Ratings : DC 3.7V, 6500 mAh
Input: AC 100~240V, 50/60Hz, 0.50A; Output: DC 5V, 2.0AResult : **Positive****Compiled by:**

Jacky Li/ File administrators

Supervised by:

Glin Lu/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1508271564E	<u>September 10, 2015</u> Date of issue
---	--

Type / Model..... : KX100

EUT..... : Smart Test Device

Applicant..... : Shenzhen Kexin Communication Technologies Co.,Ltd

Address..... : Huiye Road South , Guangming Hi-Tech Industrial Park,
Guangming, Shenzhen, P.R.China

Telephone..... : /

Fax..... : /

Manufacturer..... : Shenzhen Kexin Communication Technologies Co.,Ltd

Address..... : Huiye Road South , Guangming Hi-Tech Industrial Park,
Guangming, Shenzhen, P.R.China

Telephone..... : /

Fax..... : /

Factory..... : Shenzhen Kexin Communication Technologies Co.,Ltd

Address..... : Huiye Road South , Guangming Hi-Tech Industrial Park,
Guangming, Shenzhen, P.R.China

Telephone..... : /

Fax..... : /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1. DESCRIPTION OF DEVICE (EUT)	5
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS	5
1.3. EXTERNAL I/O CABLE.....	5
1.4. DESCRIPTION OF TEST FACILITY	6
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
1.6. MEASUREMENT UNCERTAINTY	6
1.7. TEST ENVIRONMENT.....	6
2. TEST METHODOLOGY	7
2.1. EUT CONFIGURATION.....	7
2.2. OBJECTIVE	7
2.3. GENERAL TEST PROCEDURES.....	7
2.4. TEST MODE.....	8
3. SYSTEM TEST CONFIGURATION.....	9
3.1. JUSTIFICATION	9
3.2. EUT EXERCISE SOFTWARE	9
3.3. SPECIAL ACCESSORIES	9
3.4. BLOCK DIAGRAM/SCHEMATICS	9
3.5. EQUIPMENT MODIFICATIONS	9
3.6. TEST SETUP.....	9
4. SUMMARY OF TEST RESULTS	10
5. TEST RESULT	11
5.1. RF OUTPUT POWER.....	11
5.3. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL.....	21
5.4. RADIATED SPURIOUS EMISSIONS MEASUREMENT.....	33
5.5. POWER LINE CONDUCTED EMISSIONS	39
5.6. MODULATION CHARACTERISTIC.....	42
5.7. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS	42
5.8. PEAK-TO-AVERAGE RATIO.....	45
6. LIST OF MEASURING EQUIPMENTS	47

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Smart Test Device
 Test Model : KX100
 Power Supply : DC 3.7V, 6500 mAh
 : Input: AC 100~240V, 50/60Hz, 0.50A; Output: DC 5V, 2.0A
 GSM 850 (U.S.-Band) PCS 1900 (U.S.-Band)
 Support Band : UMTS FDD Band II (U.S.-Band)
 UMTS FDD Band V (U.S.-Band)
 Uplink : GSM 850: 824.2MHz ~ 848.8MHz
 : PCS 1900: 1850.2MHz ~ 1909.8MHz
 Downlink : GSM 850: 869.2MHz ~ 893.8MHz
 : PCS 1900: 1930.2MHz ~ 1989.8MHz
 Type Of Modulation : GSM/GPRS:GMSK; EGPRS: 8-PSK
 Antenna Description : Internal Antenna, -1.5dBi
 Software Version : YL-P5+-1-V1.0
 Hardware Version : MT6572-W-2.3.1

Additional models No.

KX-100W	KX-100E
---------	---------

Remark: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	Adapter	JY-05200	--	VOC

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
USB	2	1.0m, Shielded
DC	1	1.0m, Unshielded
RJ11	1	N/A
RJ45	2	N/A
Optical fiber	2	N/A

1.4. Description of Test Facility

Site Description

EMC Lab.

: CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	±3.10dB	(1)
		30MHz~200MHz	±2.96dB	(1)
		200MHz~1000MHz	±3.10dB	(1)
		1GHz~26.5GHz	±3.80dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	±1.63dB	(1)
Power disturbance	:	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86kPa	106kPa
Temperature	15 °C	30 °C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

2. TEST METHODOLOGY

All tests and measurements indicated in this document were performed in accordance with FCC CFR 47 part 2, FCC CFR 47 part 22 subpart H and part 24 subpart E.

Applicable Standards: TIA/EIA603-D, ANSI C63.4-2003. The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. Objective

This type approval report is prepared on behalf of **Shenzhen Kexin Communication Technologies Co.,Ltd** in accordance with FCC CFR 47 part 2, FCC CFR 47 part 22 subpart H and part 24 subpart E.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristics, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, frequency stability, band edge, and conducted and radiated margin.

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of TIA/EIA603-D, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of TIA/EIA603-D.

2.4. Test Mode

GSM / GPRS/EGRS 850: Channel Low (CH128), Channel Mid (CH190) and Channel High (CH251) were chosen for full testing. The test PCL(Power Control Level)/Class is level 5/class 3(For GPRS/EGRS).

PCS / GPRS/ EGRS 1900: Channel Low (CH512), Channel Mid (CH661) and Channel High (CH810) were chosen for full testing. The test PCL(Power Control Level)/Class is level 0/class 3(For GPRS/EGRS).

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

For the field strength of spurious emission, the worst emission was found in lie-down position (X axis) for GSM /GPRS/EGPRS 850, lie-down position (X axis) for PCS /GPRS/ EGPRS 1900 and the worst case was recorded.

Note: Two SIM Card slot have been tested and we only record the worst results.

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The EUT had been tested under operating condition. EUT staying in continuous transmitting mode.

3.2. EUT Exercise Software

N/A.

3.3. Special Accessories

N/A.

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: 47 CFR FCC Part 22 Subpart H, Part 24 Subpart E			
FCC Rules	Description of Test		Result
§2.1046, §22.913 / §24.232	RF Output Power	Conducted Output Power	Compliant
		Radiated Output Power	
§2.1049, §22.905 §2.917, §24.238	Occupied Bandwidth		Compliant
§2.1053 §2.917, §24.238	Spurious Radiated Emissions		Compliant
§2.1051 §2.917, §24.238	Spurious Emissions at Antenna Terminals		Compliant
§2.917, §24.238	Band Edge		Compliant
§2.1055 §22.355, §24.235	Frequency Stability		Compliant
§15.107 / §15.207	AC power line conducted emissions		Compliant
§2.1047	Modulation Characteristics		Compliant
§1.1310, §2.1091	RF Exposure Information		Compliant
§24.232(d)	Peak-to-Average Ratio		Compliant

5. TEST RESULT

5.1. RF OUTPUT POWER

5.1.1. Standard Applicable

According to FCC §2.1046 and §22.913, the maximum effective radiated power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.


According to FCC §2.1046 and §22.232, mobile and portable stations are limited to 2 Watts and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

5.1.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.1.3. Test Procedures

Conducted method:

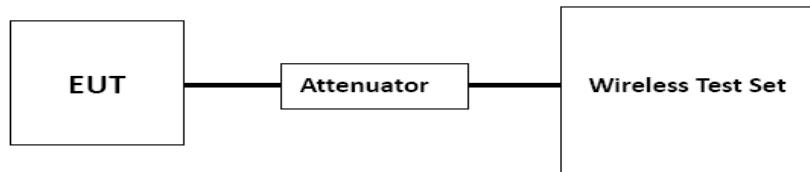

Radiated method:

TIA 603-D section 2.2.17

5.1.4. Test Results

Temperature	25°C	Humidity	60%
ATM Pressure:	101.4kPa	Test Engineer	Jacky

Conducted Power:

Mode	Channel	Frequency (MHz)	Output Power (Average, dBm)	Limit (dBm)
GSM 850	128	824.2	32.60	38.45
	190	836.6	32.71	38.45
	251	848.8	32.52	38.45
GPRS 850 (Slot 1)	128	824.2	32.32	38.45
	190	836.6	32.45	38.45
	251	848.8	32.41	38.45
GPRS 850 (Slot 2)	128	824.2	31.24	38.45
	190	836.6	31.15	38.45
	251	848.8	31.23	38.45
GPRS 850 (Slot 3)	128	824.2	29.11	38.45
	190	836.6	29.15	38.45
	251	848.8	29.16	38.45
GPRS 850 (Slot 4)	128	824.2	27.21	38.45
	190	836.6	27.13	38.45
	251	848.8	27.24	38.45
EGPRS 850 (Slot 1)	128	824.2	26.28	38.45
	190	836.6	26.16	38.45
	251	848.8	26.15	38.45
EGPRS 850 (Slot 2)	128	824.2	25.74	38.45
	190	836.6	25.64	38.45
	251	848.8	25.55	38.45
EGPRS 850 (Slot 3)	128	824.2	24.69	38.45
	190	836.6	24.66	38.45
	251	848.8	24.53	38.45
EGPRS 850 (Slot 4)	128	824.2	24.12	38.45
	190	836.6	24.10	38.45
	251	848.8	24.02	38.45

Mode	Channel	Frequency (MHz)	Output Power (Average, dBm)	Limit (dBm)
PCS 1900	512	1850.2	29.60	33
	661	1880.0	29.40	33
	810	1909.8	29.60	33
GPRS 1900 (Slot 1)	512	1850.2	29.57	33
	661	1880.0	29.47	33
	810	1909.8	29.68	33
GPRS 1900 (Slot 2)	512	1850.2	28.76	33
	661	1880.0	28.78	33
	810	1909.8	28.86	33
GPRS 1900 (Slot 3)	512	1850.2	26.65	33
	661	1880.0	26.56	33
	810	1909.8	26.64	33
GPRS 1900 (Slot 4)	512	1850.2	24.46	33
	661	1880.0	24.25	33
	810	1909.8	24.51	33
EGPRS 1900 (Slot 1)	512	1850.2	24.55	33
	661	1880.0	24.29	33
	810	1909.8	24.47	33
EGPRS 1900 (Slot 2)	512	1850.2	24.01	33
	661	1880.0	23.84	33
	810	1909.8	23.99	33
EGPRS 1900 (Slot 3)	512	1850.2	22.49	33
	661	1880.0	22.61	33
	810	1909.8	22.56	33
EGPRS 1900 (Slot 4)	512	1850.2	22.01	33
	661	1880.0	22.15	33
	810	1909.8	22.24	33

Radiated Power:

The worst test data as follow:

Mode	Channel	Frequency (MHz)	Test Result		Limit (dBm)
			Max. Peak ERP (dBm)	Polarization	
GSM 850	128	824.2	30.24	H	38.45
	190	836.6	30.41	H	38.45
	251	848.8	30.37	H	38.45

Mode	Channel	Frequency (MHz)	Test Result		Limit (dBm)
			Max. Peak ERP (dBm)	Polarization	
EGPRS 850	128	824.2	24.43	H	38.45
	190	836.6	24.55	H	38.45
	251	848.8	24.39	H	38.45

Mode	Channel	Frequency (MHz)	Test Result		Limit (dBm)
			Max. Peak EIRP (dBm)	Polarization	
PCS 1900	512	1850.2	27.38	H	33
	661	1880.0	27.46	H	33
	810	1909.8	27.32	H	33

Mode	Channel	Frequency (MHz)	Test Result		Limit (dBm)
			Max. Peak EIRP (dBm)	Polarization	
EGPRS 1900	512	1850.2	22.53	H	33
	661	1880.0	22.45	H	33
	810	1909.8	22.47	H	33

NOTE:All conditions have been tested and we only record the worst results in each bands.

5.2. OCCUPIED BANDWIDTH

5.2.1. Standard Applicable


FCC §2.1049, §22.917, §22.905 and §24.238.

5.2.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.2.3. Test Procedures

The RF output of the transmitter was connected to the wireless communication tester and spectrum analyzer through attenuation.

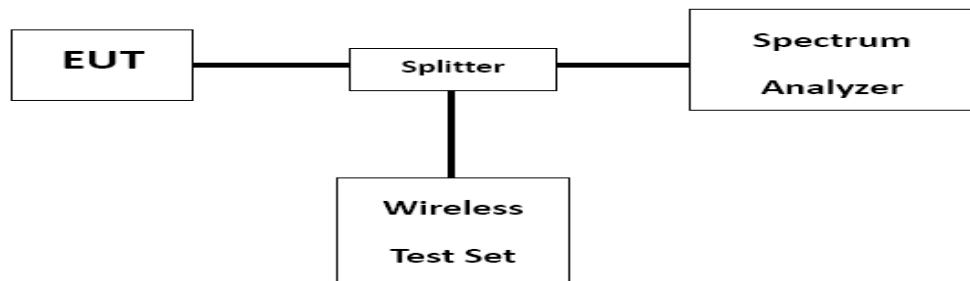

The -26dB & 99% bandwidth was recorded.

5.2.4. Test Results

Temperature	25°C	Humidity	60%
ATM Pressure:	101.4kPa	Test Engineer	Jacky

The worst test data as follow:

Mode	Channel	Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	Occupied Bandwidth (99%) (kHz)
GSM 850	128	824.2	318.40	241.85
	190	836.6	315.60	249.69
	251	848.8	317.60	243.66

Mode	Channel	Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	Occupied Bandwidth (99%) (kHz)
EGPRS 850	128	824.2	310.90	238.38
	190	836.6	321.30	248.58
	251	848.8	311.30	240.16

Mode	Channel	Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	Occupied Bandwidth (99%) (kHz)
PCS 1900	512	1850.2	321.20	241.57
	661	1880.0	315.40	241.57
	810	1909.8	315.50	243.15

Mode	Channel	Frequency (MHz)	Emission Bandwidth (-26dBc) (kHz)	Occupied Bandwidth (99%) (kHz)
EGPRS 1900	512	1850.2	305.50	239.33
	661	1880.0	309.40	246.22
	810	1909.8	305.30	241.35

NOTE:All conditions have been tested and we only record the worst results in each bands.

Test Plots For GSM 850



Test Plots For EGPRS 850



Test Plots For PCS 1900



Test Plots For EGPRS 1900



5.3. SPURIOUS AND HARMONIC EMISSION AT ANTENNA TERMINAL

5.3.1. Standard Applicable


FCC §2.1051, §22.917 and §24.238.

5.3.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.3.3. Test Procedures



The RF output of the transmitter was connected to the wireless communication tester and spectrum analyzer through attenuation.

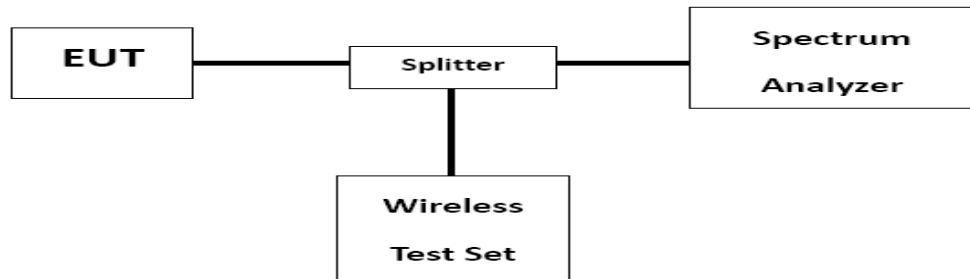


5.3.4. Test Results


Please refer to the following plots.

Transmitting Mode, CH 128, GSM 850

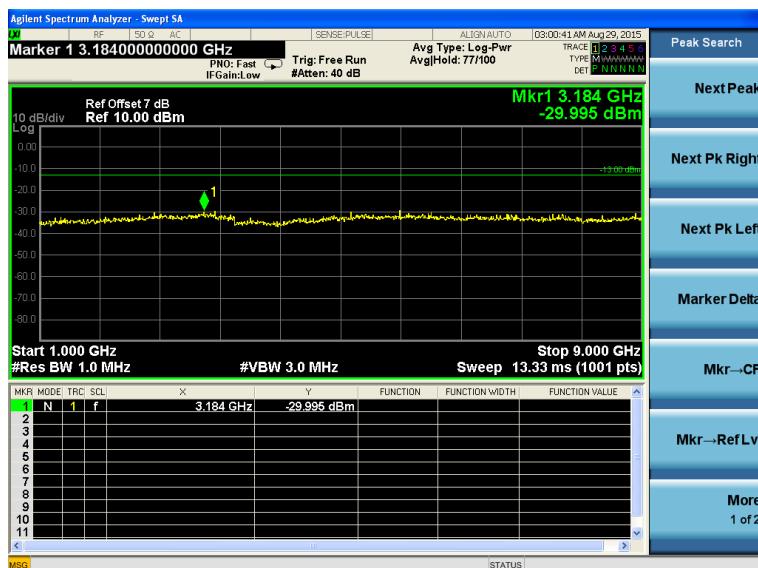
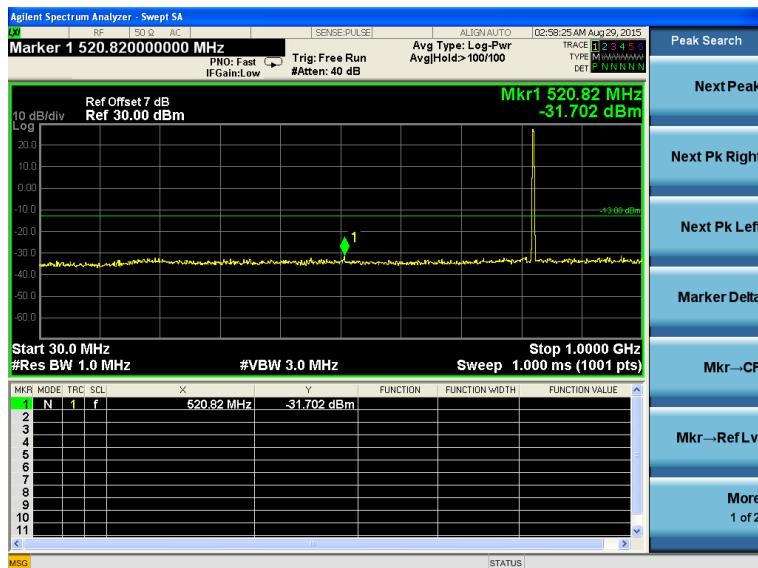


Transmitting Mode, CH 190, GSM 850


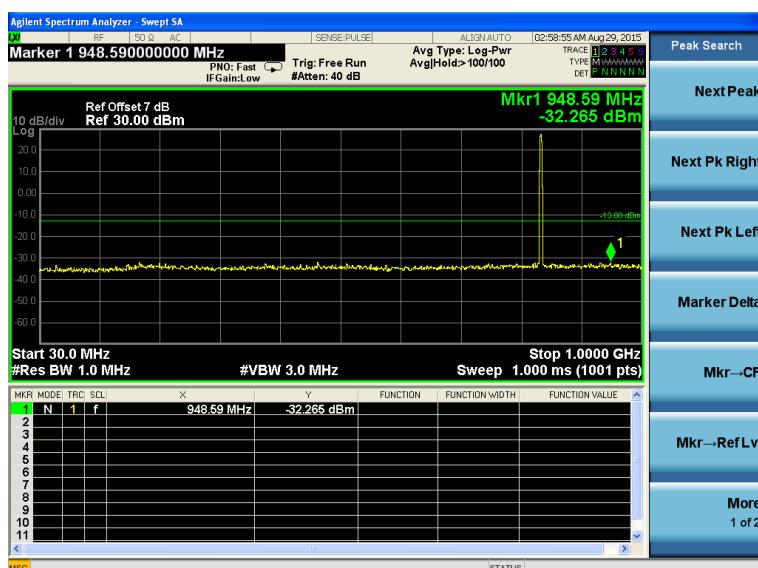


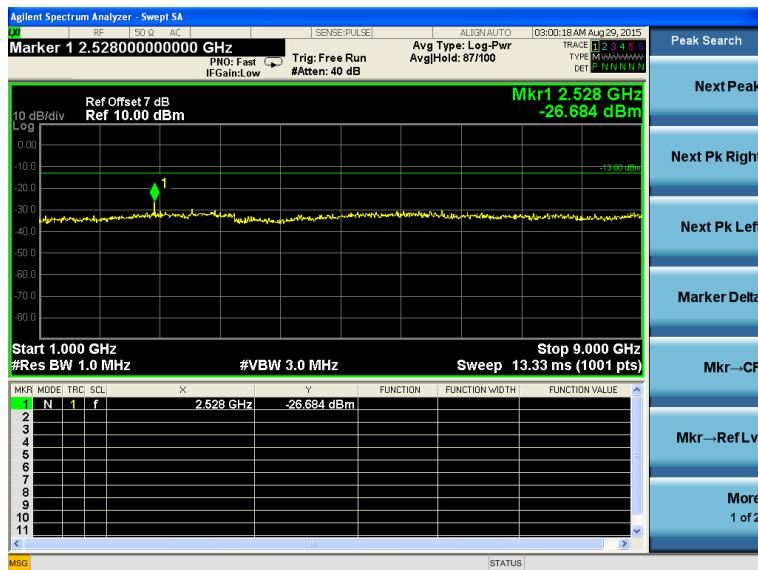


Transmitting Mode, CH 251, GSM 850

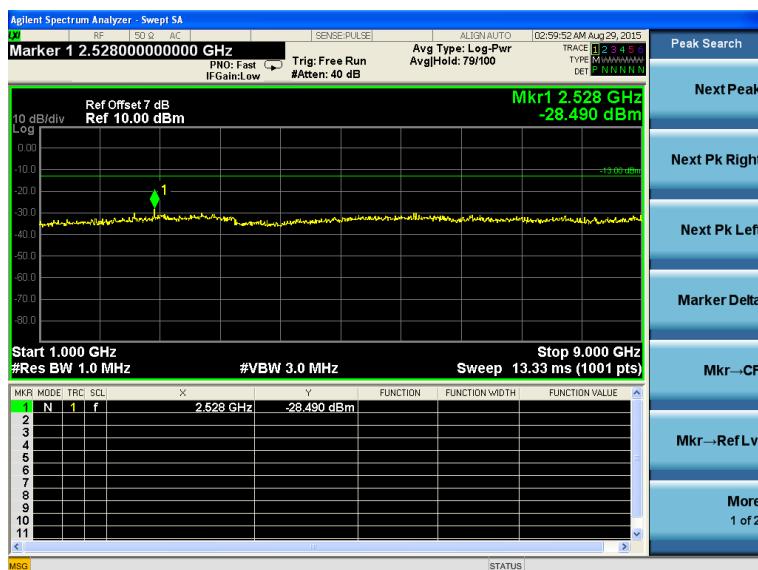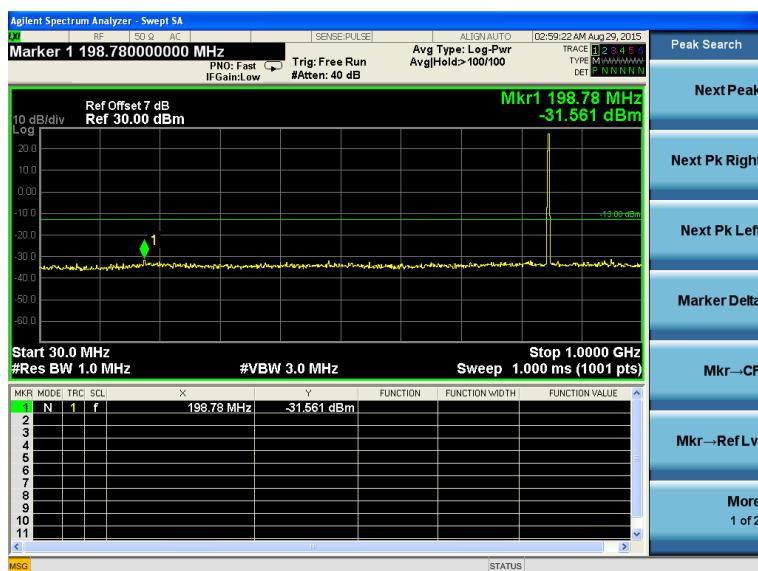


Transmitting Mode, CH 128, EGPRS 850

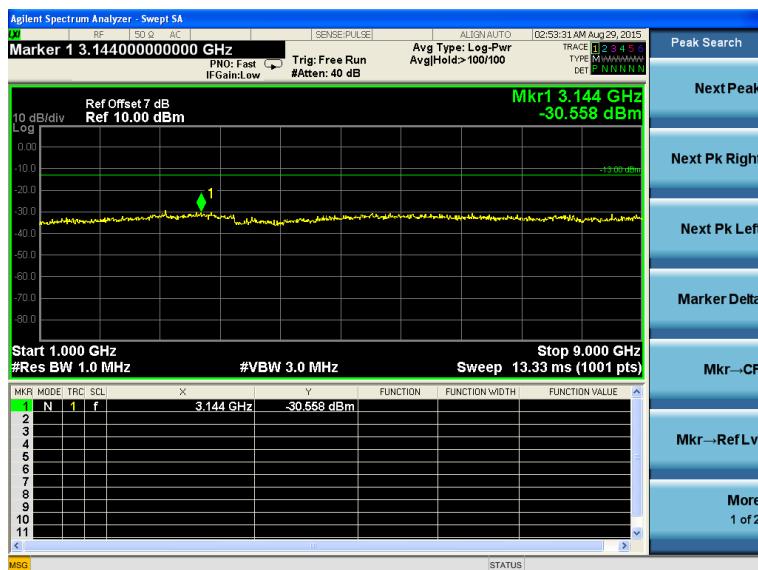
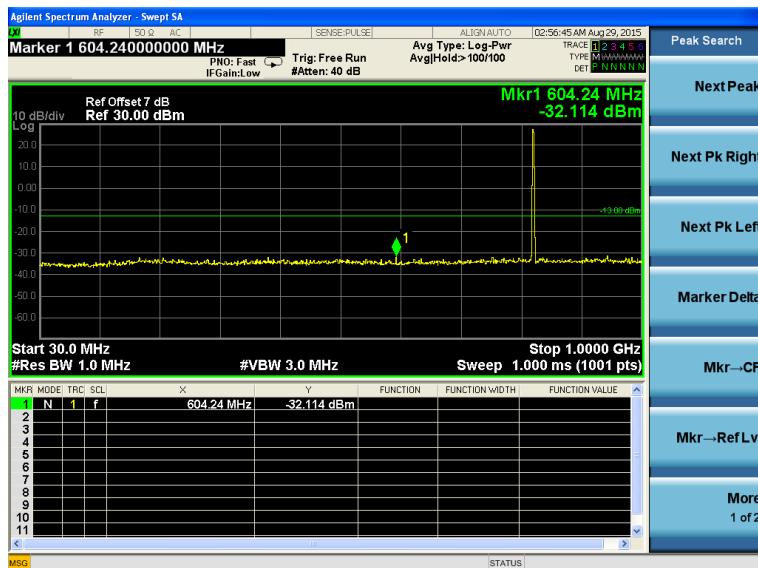


Transmitting Mode, CH 190, EGPRS 850


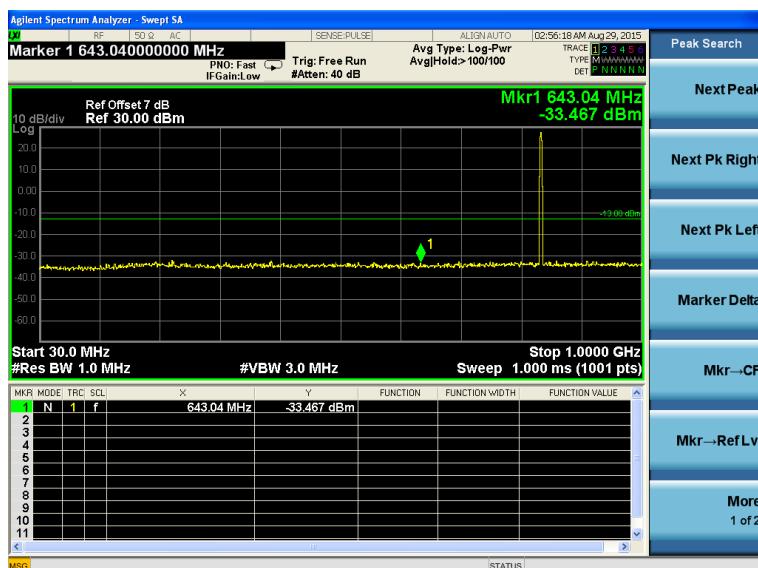


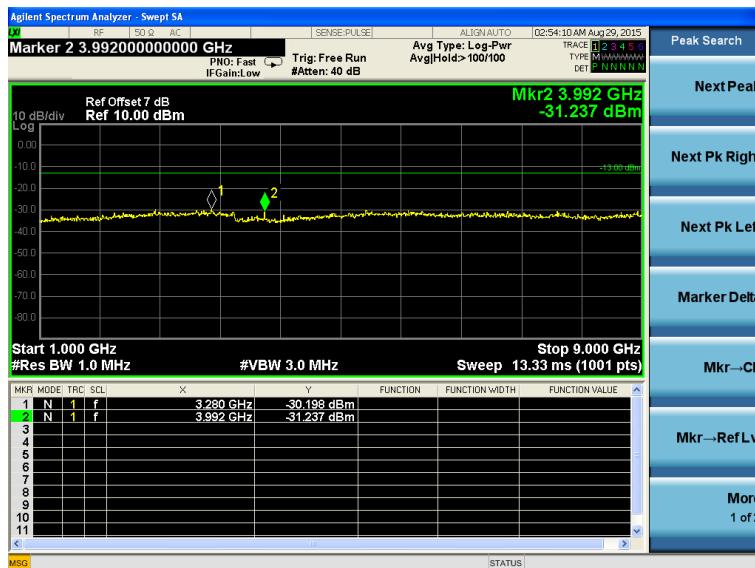


Transmitting Mode, CH 251, EGPRS 850

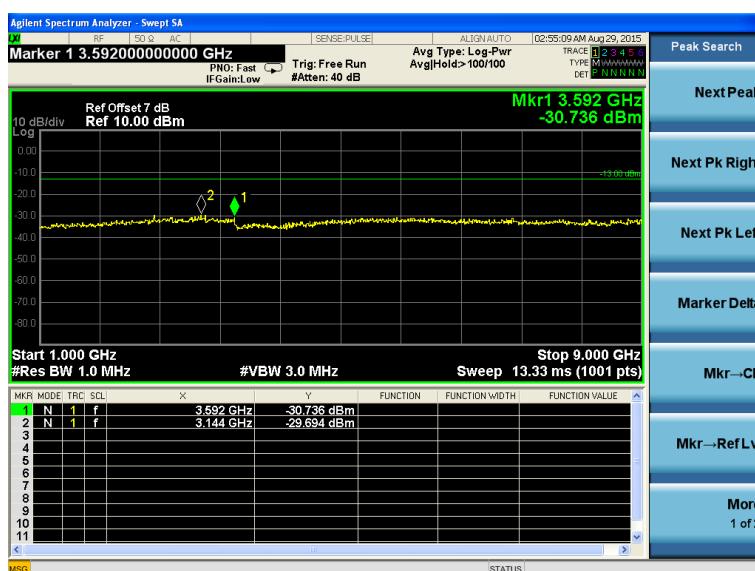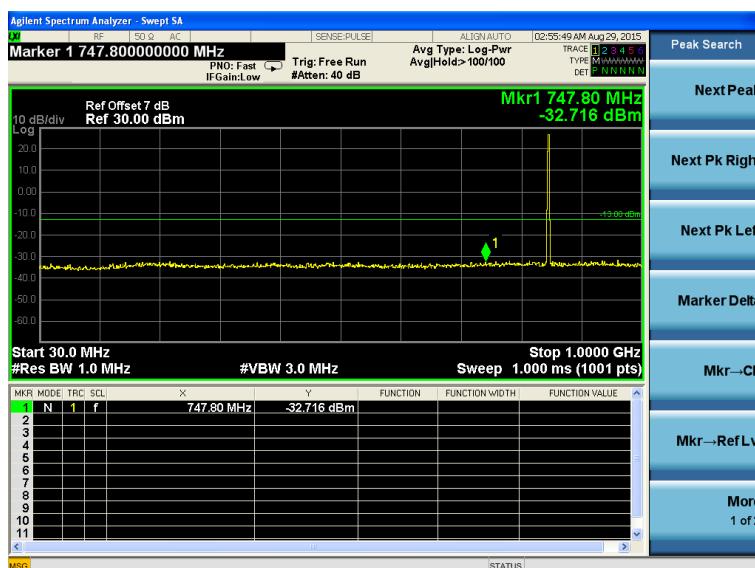


Transmitting Mode, CH 512, PCS 1900

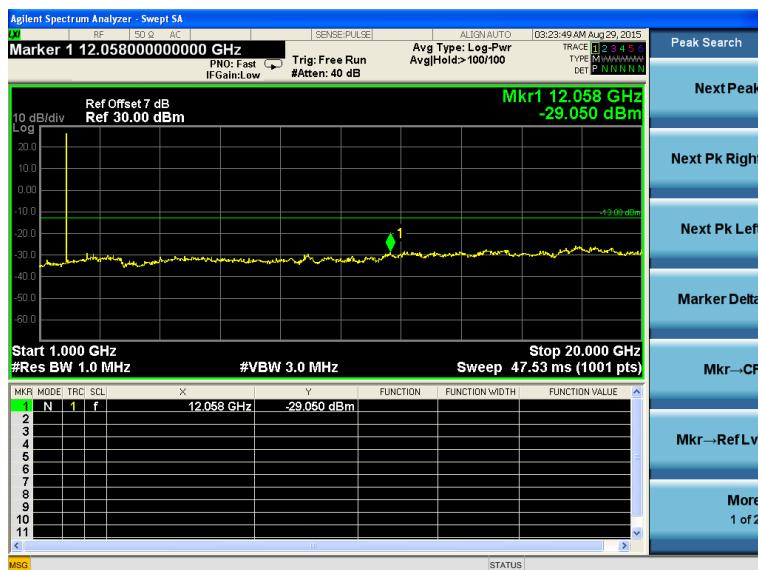
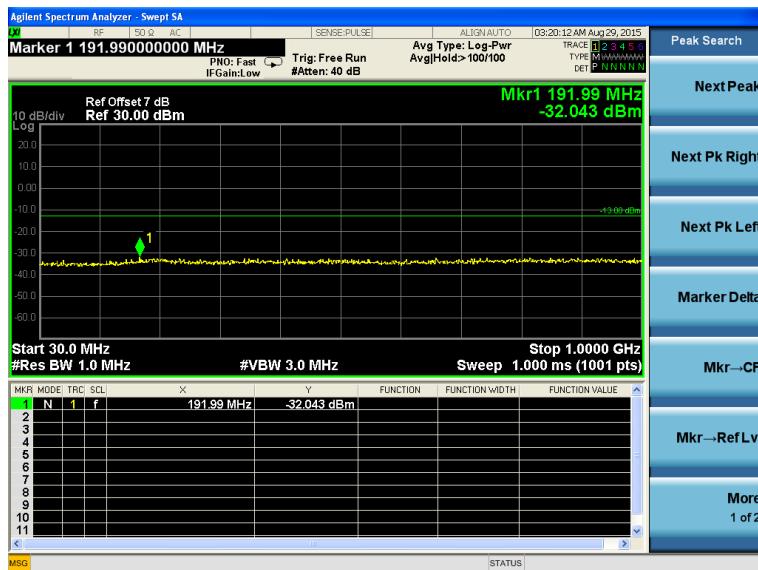


Transmitting Mode, CH 661, PCS 1900


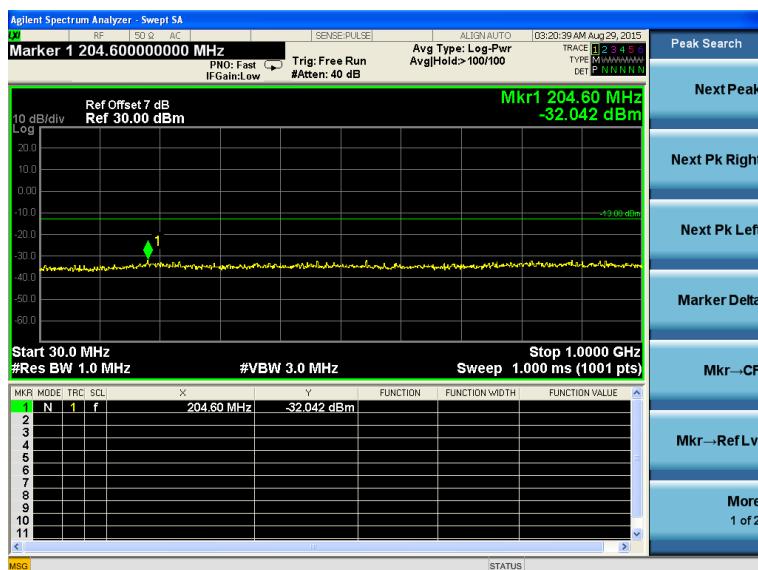


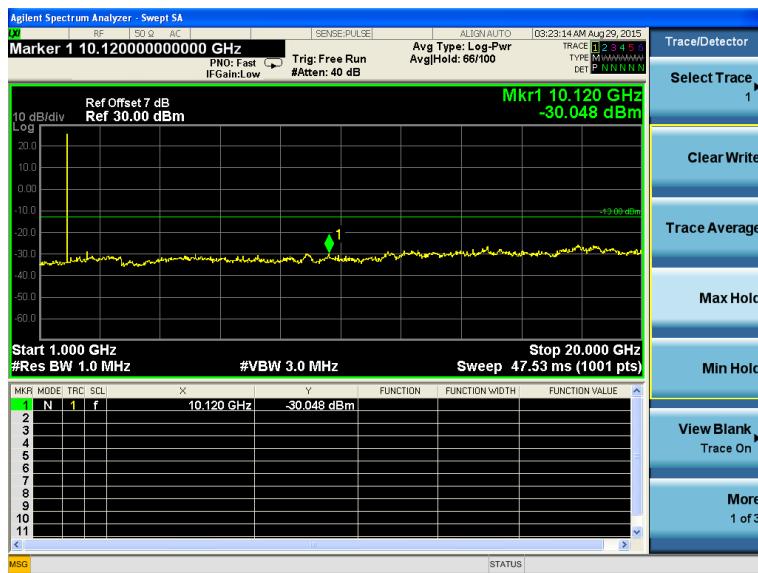


Transmitting Mode, CH 810, PCS 1900

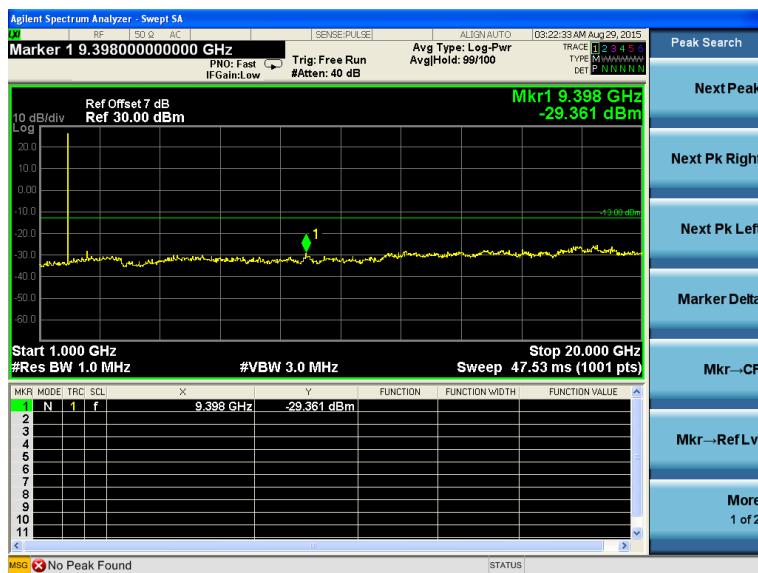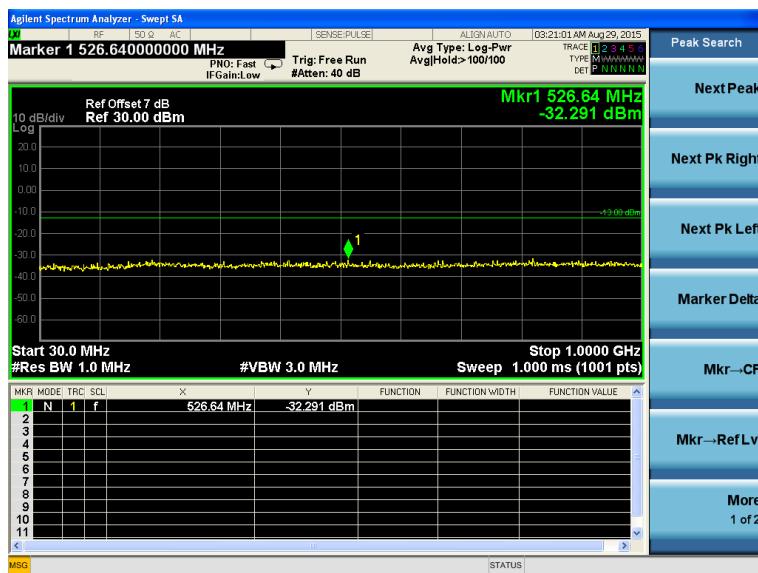


Transmitting Mode, CH 512, EGPRS 1900

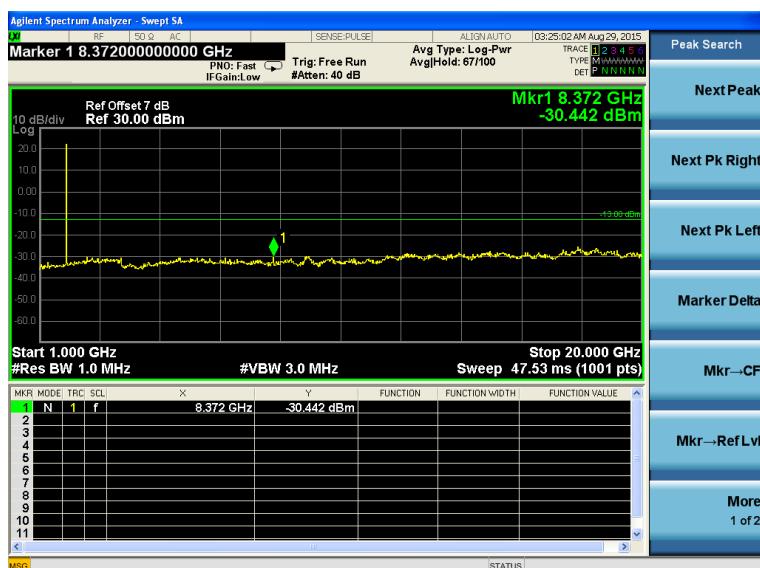
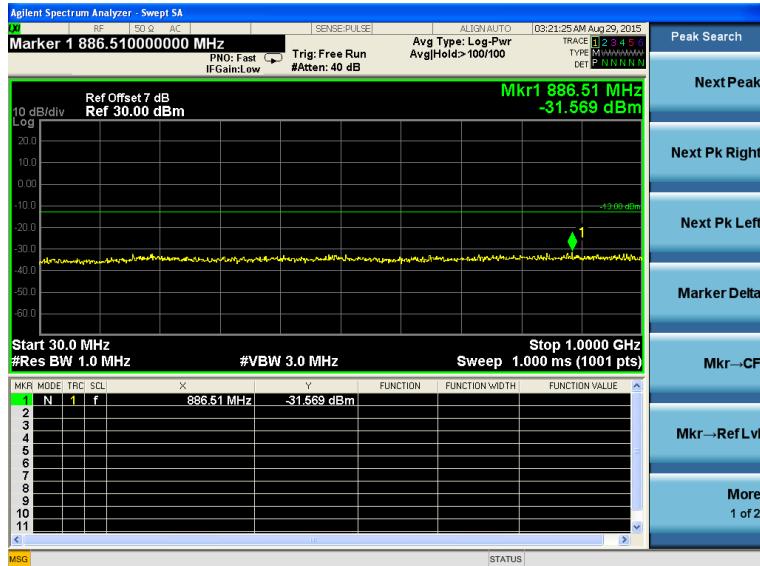


Transmitting Mode, CH 661, EGPRS 1900

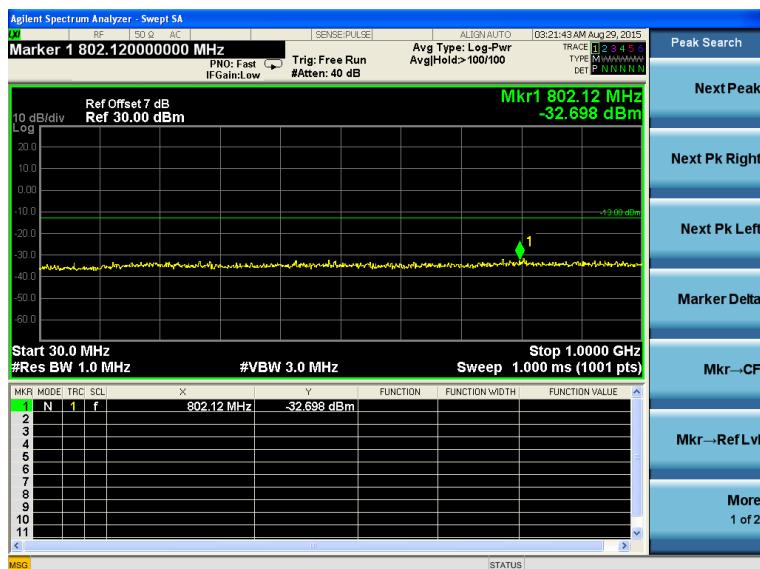

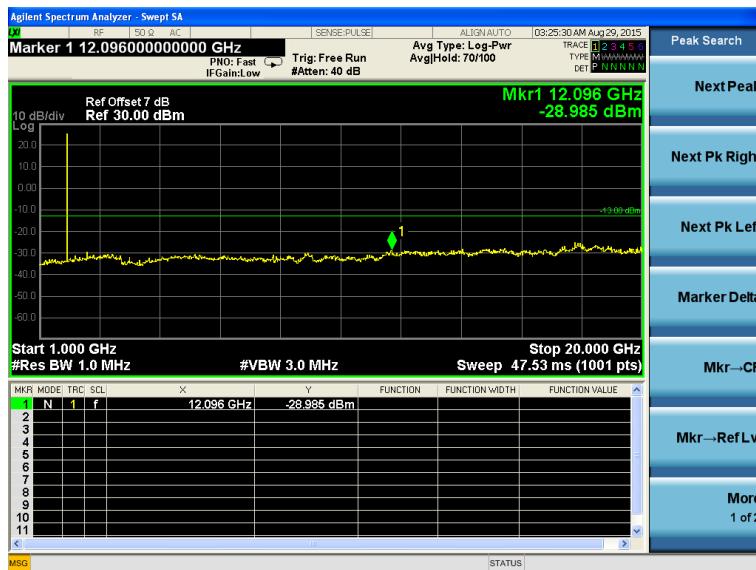


Transmitting Mode, CH 810, EGPRS 1900

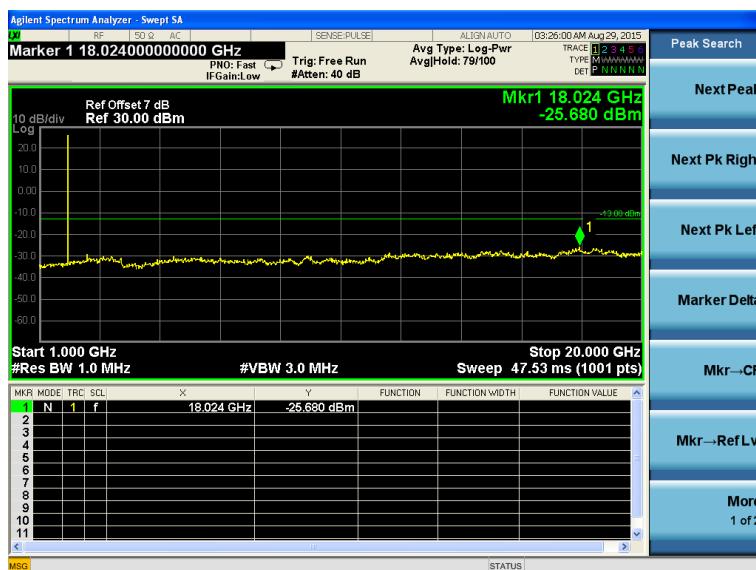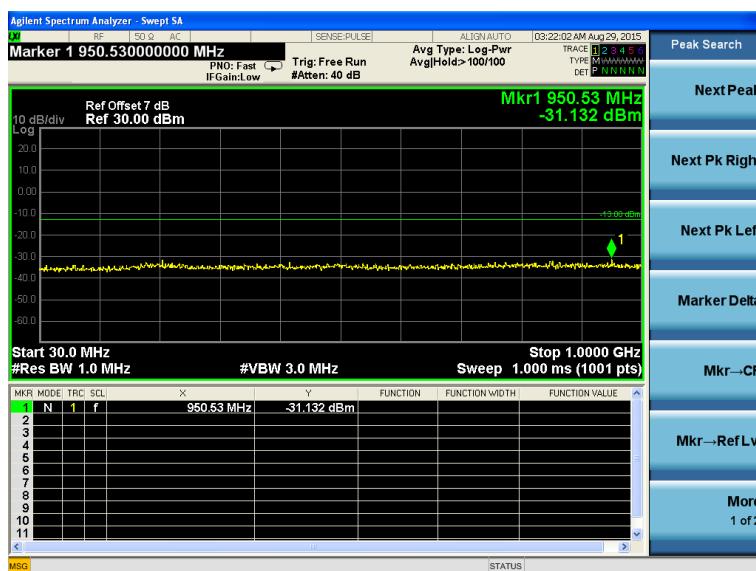


Test Result of Band Edge Emissions, GSM 850



Test Result of Band Edge Emissions, EGPRS 850

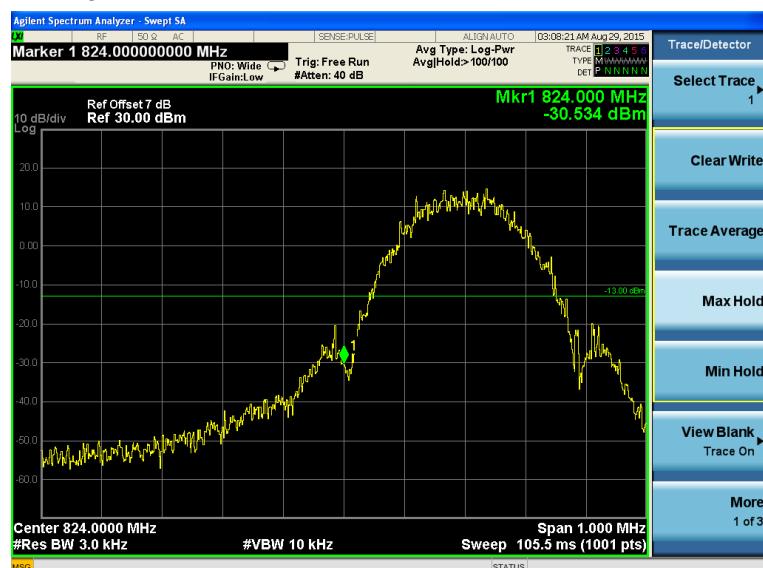

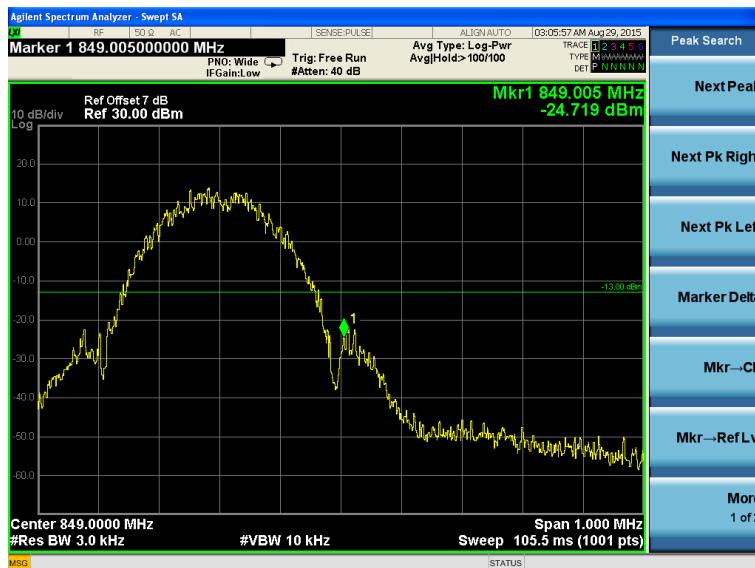

Test Result of Band Edge Emissions, PCS 1900



Test Result of Band Edge Emissions, EGPRS 1900



NOTE: All conditions have been tested and we only record the worst results in each bands.

5.4. RADIATED SPURIOUS EMISSIONS MEASUREMENT

5.4.1. Standard Applicable

FCC §2.1053, §22.917 and §24.238.

5.4.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.4.3. Test Procedures

The EUT was placed on a non-conductive, the measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.


The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.


ERP = S.G. output (dBm) + Antenna Gain (dBd) – Cable (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable (dB)


For radiated spurious emissions below 1GHz

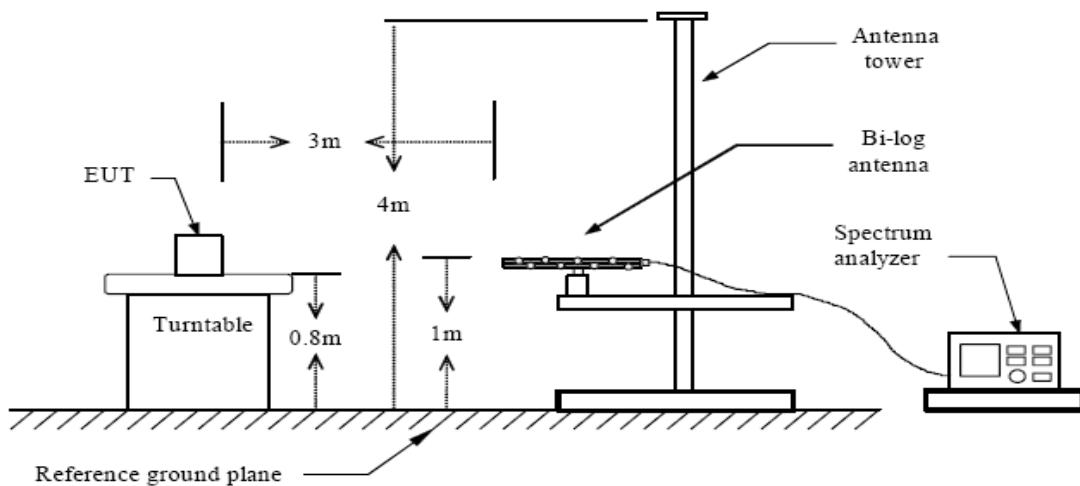

For radiated spurious emissions above 1GHz

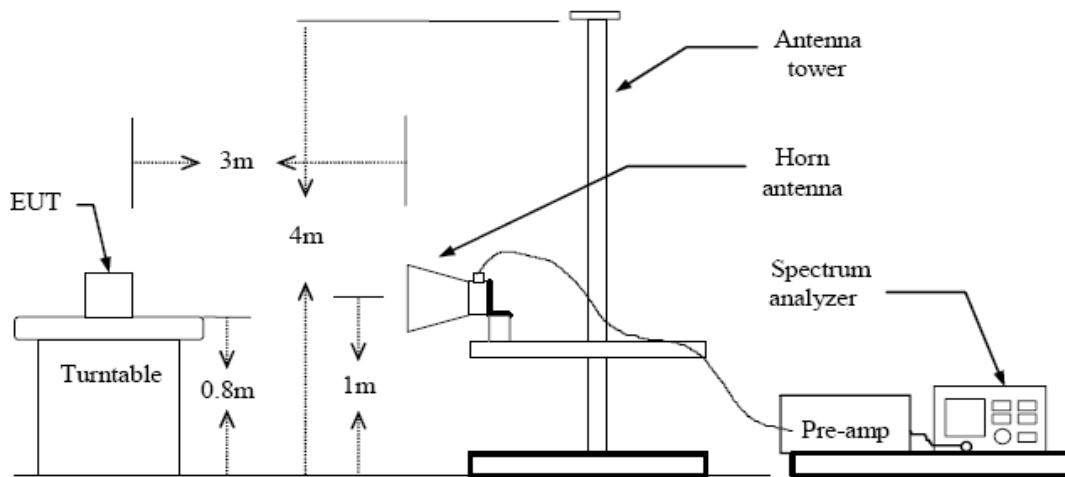

Substituted Method

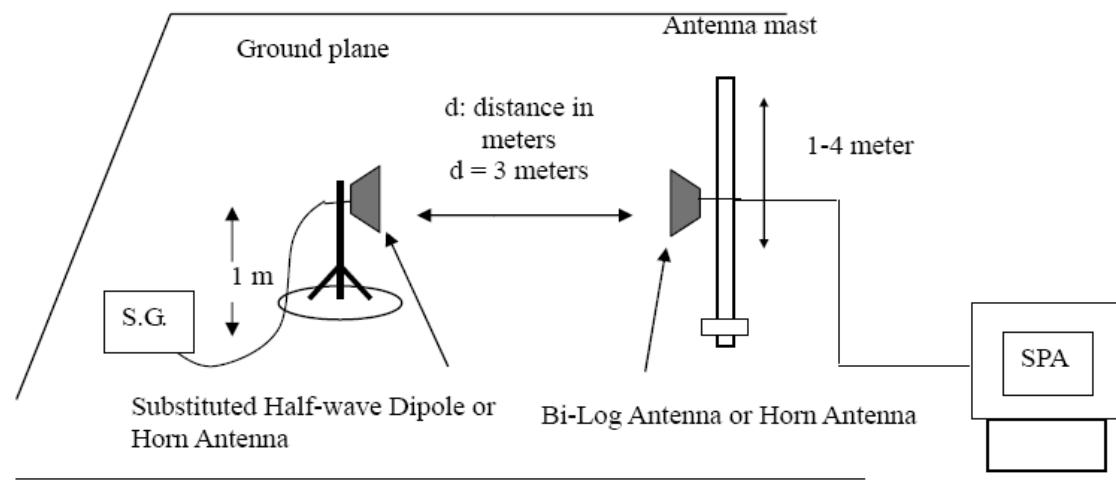

5.4.4. Test Results

The worst test data as follow:

30MHz~10GHz

The Worst Test Result For GSM 850, CH 128				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.85	-13	Pass	H
361.74	-64.26			
460.68	-68.26			
1648.25	-20.14			
2472.38	-24.75			
252.13	-64.05	-13	Pass	V
351.07	-62.41			
493.66	-67.36			
1648.25	-21.85			
2472.38	-24.24			

The Worst Test Result For GSM 850, CH 190				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.02	-13	Pass	H
361.74	-64.11	-13		
460.68	-68.25	-13		
1672.44	-20.23	-13		
2508.75	-24.44	-13		
252.13	-64.15	-13	Pass	V
351.07	-62.78	-13		
493.66	-67.02	-13		
1672.44	-21.14	-13		
2508.75	-24.36	-13		

The Worst Test Result For GSM 850, CH 251				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.56	-13	Pass	H
361.74	-64.16	-13		
460.68	-68.20	-13		
1697.12	-20.26	-13		
2546.85	-24.74	-13		
252.13	-64.54	-13	Pass	V
351.07	-62.30	-13		
493.66	-67.16	-13		
1697.68	-21.74	-13		
2546.36	-24.25	-13		

30MHz~10GHz

The Worst Test Result For EGPRS 850, CH 128				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.75	-13	Pass	H
361.74	-64.15			
460.68	-68.44			
1697.25	-25.69			
2546.38	-27.46			
252.13	-64.58	-13	Pass	V
351.07	-62.26			
493.66	-67.03			
1697.25	-27.12			
2546.38	-28.78			

The Worst Test Result For EGPRS 850, CH 190				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.32	-13	Pass	H
361.74	-64.74	-13		
460.68	-68.23	-13		
1672.44	-25.15	-13		
2508.75	-27.55	-13		
252.13	-64.89	-13	Pass	V
351.07	-62.36	-13		
493.66	-67.11	-13		
1672.44	-27.75	-13		
2508.75	-28.25	-13		

The Worst Test Result For EGPRS 850, CH 251				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.41	-13	Pass	H
361.74	-64.87	-13		
460.68	-68.69	-13		
1697.12	-25.05	-13		
2546.85	-27.46	-13		
252.13	-64.78	-13	Pass	V
351.07	-62.38	-13		
493.66	-67.25	-13		
1697.12	-27.15	-13		
2546.85	-28.47	-13		

30MHz~20GHz

The Worst Test Result For PCS 1900, CH 512				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.32	-13	Pass	H
361.74	-64.15	-13		
460.68	-68.44	-13		
3700.35	-22.85	-13		
5550.47	-24.69	-13		
252.13	-64.58	-13	Pass	V
351.07	-62.12	-13		
493.66	-67.54	-13		
3700.35	-23.63	-13		
5550.47	-26.20	-13		

The Worst Test Result For PCS 1900, CH 661				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.63	-13	Pass	H
361.74	-64.41	-13		
460.68	-68.78	-13		
3760.55	-22.25	-13		
5640.36	-24.16	-13		
252.13	-64.15	-13	Pass	V
351.07	-62.74	-13		
493.66	-67.28	-13		
3760.55	-23.36	-13		
5640.36	-26.41	-13		

The Worst Test Result For PCS 1900, CH 810				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.12	-13	Pass	H
361.74	-64.45	-13		
460.68	-68.55	-13		
3819.17	-22.26	-13		
5729.23	-24.14	-13		
252.13	-64.74	-13	Pass	V
351.07	-62.88	-13		
493.66	-67.36	-13		
3819.17	-23.45	-13		
5729.23	-26.51	-13		

30MHz~20GHz

The Worst Test Result For EGPRS 1900, CH 512				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.33	-13	Pass	H
361.74	-64.44	-13		
460.68	-68.82	-13		
3700.35	-25.47	-13		
5550.47	-28.23	-13		
252.13	-64.63	-13	Pass	V
351.07	-62.16	-13		
493.66	-67.41	-13		
3700.35	-27.78	-13		
5550.47	-29.33	-13		

The Worst Test Result For EGPRS 1900, CH 661				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.45	-13	Pass	H
361.74	-64.55	-13		
460.68	-68.74	-13		
3760.55	-25.03	-13		
5640.36	-28.23	-13		
252.13	-64.62	-13	Pass	V
351.07	-62.74	-13		
493.66	-67.89	-13		
3760.55	-27.41	-13		
5640.36	-29.25	-13		

The Worst Test Result For EGPRS 1900, CH 810				
Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Result	Polarity
252.13	-65.47	-13	Pass	H
361.74	-64.24	-13		
460.68	-68.63	-13		
3819.17	-25.25	-13		
5729.23	-28.47	-13		
252.13	-64.69	-13	Pass	V
351.07	-62.15	-13		
493.66	-67.78	-13		
3819.17	-27.46	-13		
5729.23	-29.33	-13		

NOTE : The result below 30MHz is too low, there is only base environmental noise. We Only record the worst results above 30MHz.


5.5. POWER LINE CONDUCTED EMISSIONS

5.5.1 Standard Applicable

According to §15.107 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

5.5.2 Block Diagram of Test Setup

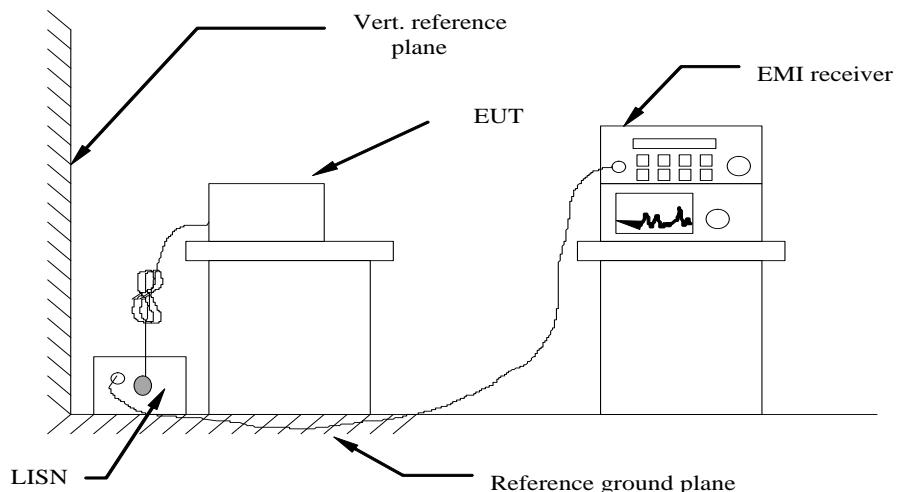


5.5.3 Test Results

PASS.

The test data please refer to following page.


Test result(GSM850, AC 120V)

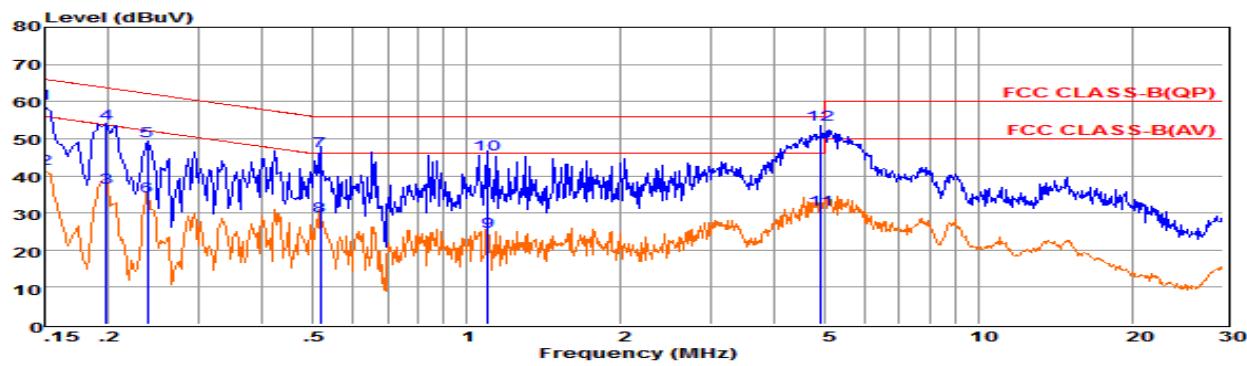

Env. Ins: 24*/56%
 EUT: Smart Test Device
 M/N: KX-100
 Power Rating: AC 120V/60Hz
 Test Mode: GSM850
 Operator: Jacky
 Memo:
 Pol: NEUTRAL

Freq	Reading		LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.15	39.86	9.70	0.02	59.58	66.00	-6.42	QP
2	0.15	22.13	9.70	0.02	41.85	56.00	-14.15	Average
3	0.20	17.38	9.59	0.02	36.99	53.71	-16.72	Average
4	0.20	34.57	9.59	0.02	54.18	63.71	-9.53	QP
5	0.24	29.62	9.60	0.03	49.25	62.17	-12.92	QP
6	0.24	14.85	9.60	0.03	34.48	52.17	-17.69	Average
7	0.52	27.10	9.62	0.04	46.76	56.00	-9.24	QP
8	0.52	9.40	9.62	0.04	29.06	46.00	-16.94	Average
9	1.10	5.36	9.63	0.05	25.04	46.00	-20.96	Average
10	1.10	26.09	9.63	0.05	45.77	56.00	-10.23	QP
11	4.93	11.18	9.66	0.06	30.90	46.00	-15.10	Average
12	4.93	33.97	9.66	0.06	53.69	56.00	-2.31	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

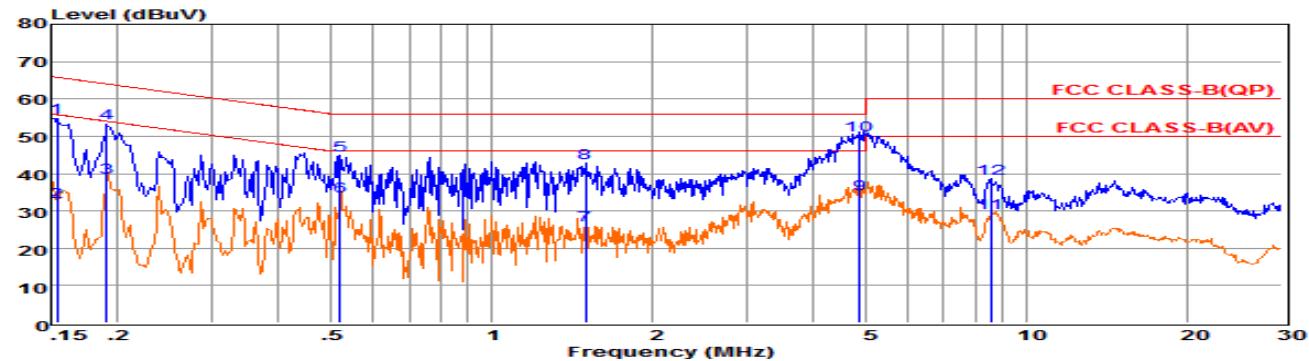


Env. Ins: 24*/56%
 EUT: Smart Test Device
 M/N: KX-100
 Power Rating: AC 120V/60Hz
 Test Mode: GSM850
 Operator: Jacky
 Memo:
 Pol: LINE

Freq	Reading		LisnFac	CabLos	Measured	Limit	Over	Remark
	MHz	dBpW	dB	dB	dBpW	dBpW	dB	
1	0.15	35.35	9.58	0.02	54.95	65.78	-10.83	QP
2	0.15	12.86	9.58	0.02	32.46	55.78	-23.32	Average
3	0.19	19.21	9.62	0.02	38.85	54.02	-15.17	Average
4	0.19	34.02	9.62	0.02	53.66	64.02	-10.36	QP
5	0.52	25.39	9.62	0.04	45.05	56.00	-10.95	QP
6	0.52	14.35	9.62	0.04	34.01	46.00	-11.99	Average
7	1.50	6.61	9.64	0.05	26.30	46.00	-19.70	Average
8	1.50	23.22	9.64	0.05	42.91	56.00	-13.09	QP
9	4.87	14.76	9.65	0.06	34.47	46.00	-11.53	Average
10	4.87	30.58	9.65	0.06	50.29	56.00	-5.71	QP
11	8.55	9.57	9.69	0.08	29.34	50.00	-20.66	Average
12	8.55	18.99	9.69	0.08	38.76	60.00	-21.24	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.


Test result(GSM850, AC 240V)

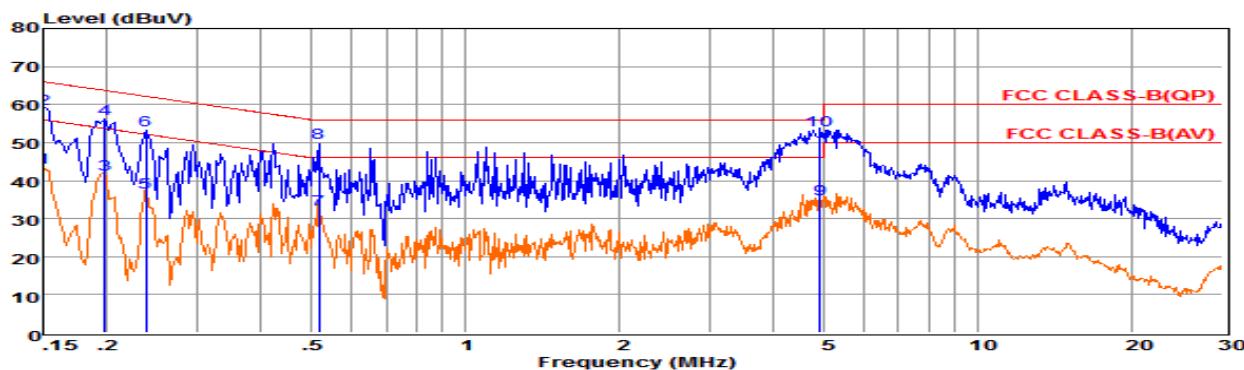

Env. Ins: 24*/56%
 EUT: Smart Test Device
 M/N: KX-100
 Power Rating: AC 240V/60Hz
 Test Mode: GSM850
 Operator: Jacky
 Memo:
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15000	23.66	9.70	0.02	10.00	43.38	56.00	-12.62	Average
2 0.15000	39.13	9.70	0.02	10.00	58.85	66.00	-7.15	QP
3 0.19758	21.93	9.59	0.02	10.00	41.54	53.71	-12.17	Average
4 0.19758	36.49	9.59	0.02	10.00	56.10	63.71	-7.61	QP
5 0.23784	17.36	9.60	0.03	10.00	36.99	52.17	-15.18	Average
6 0.23784	33.73	9.60	0.03	10.00	53.36	62.17	-8.81	QP
7 0.51824	12.67	9.62	0.04	10.00	32.33	46.00	-13.67	Average
8 0.51824	30.29	9.62	0.04	10.00	49.95	56.00	-6.05	QP
9 4.92572	15.48	9.66	0.06	10.00	35.20	46.00	-10.80	Average
10 4.92572	33.63	9.66	0.06	10.00	53.35	56.00	-2.65	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

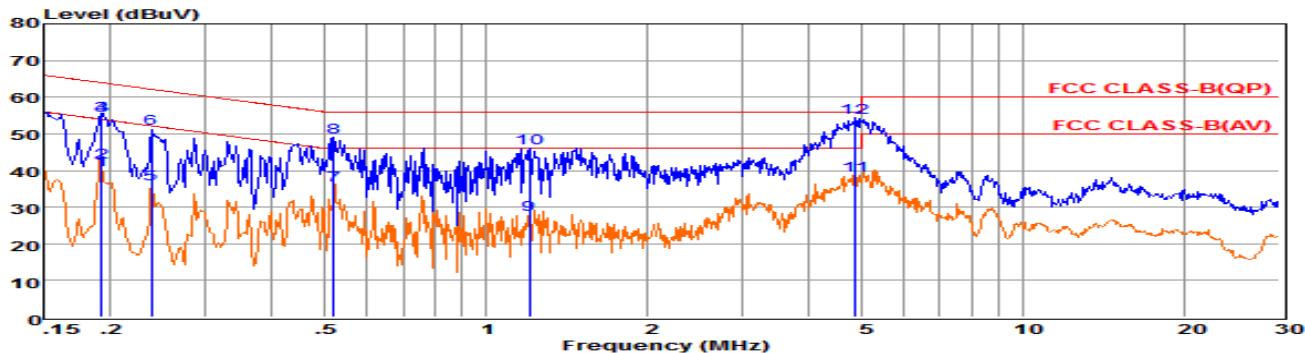

Env. Ins: 24*/56%
 EUT: Smart Test Device
 M/N: KX-100
 Power Rating: AC 240V/60Hz
 Test Mode: GSM850
 Operator: Jacky
 Memo:
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.19242	20.46	9.62	0.02	10.00	40.10	53.93	-13.83	Average
2 0.19242	22.59	9.62	0.02	10.00	42.23	53.93	-11.70	Average
3 0.19242	35.42	9.62	0.02	10.00	55.06	63.93	-8.87	QP
4 0.19242	35.37	9.62	0.02	10.00	55.01	63.93	-8.92	QP
5 0.23784	16.68	9.63	0.03	10.00	36.34	52.17	-15.83	Average
6 0.23784	31.75	9.63	0.03	10.00	51.41	62.17	-10.76	QP
7 0.52099	16.37	9.62	0.04	10.00	36.03	46.00	-9.97	Average
8 0.52099	29.26	9.62	0.04	10.00	48.92	56.00	-7.08	QP
9 1.20336	8.34	9.63	0.05	10.00	28.02	46.00	-17.98	Average
10 1.20336	26.55	9.63	0.05	10.00	46.23	56.00	-9.77	QP
11 4.87380	18.82	9.65	0.06	10.00	38.53	46.00	-7.47	Average
12 4.87380	34.67	9.65	0.06	10.00	54.38	56.00	-1.62	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all mode and recorded the worst case results in this report (GSM 850, Normal Link)

5.6.MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

5.7. FREQUENCY STABILITY OVER TEMPERATURE AND VOLTAGE VARIATIONS


5.7.1. Standard Applicable

FCC §2.1055, §22.355 and §24.235, Frequency Tolerance: 2.5ppm

5.7.2. Test Procedures

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency.

Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

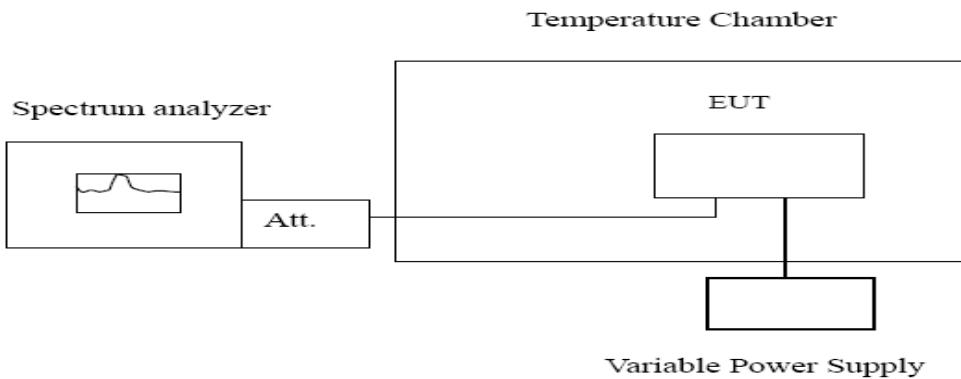

5.7.3. Test Results

Pass

The worst test data as follow:

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	7	0.0083	2.5	Pass
	-20	3	0.0036		
	-10	2	0.0024		
	0	4	0.0048		
	10	5	0.0059		
	20	6	0.0071		
	30	4	0.0048		
	40	5	0.0059		
	50	3	0.0036		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Result	
		Hz	ppm		
3.70	-30	6	0.0032	2.5	Pass
	-20	4	0.0021		
	-10	2	0.0010		
	0	5	0.0026		
	10	3	0.0016		
	20	6	0.0032		
	30	2	0.0010		
	40	7	0.0037		
	50	4	0.0021		

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	5	0.0059	2.5	Pass
	3.70	3	0.0036		
	3.40	7	0.0083		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	6	0.0032	2.5	Pass
	3.70	4	0.0021		
	3.40	5	0.0026		

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	3	0.0036	2.5	Pass
	-20	7	0.0083		
	-10	2	0.0024		
	0	4	0.0048		
	10	6	0.0072		
	20	7	0.0083		
	30	5	0.0059		
	40	3	0.0036		
	50	5	0.0059		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.70	-30	5	0.0026	2.5	Pass
	-20	7	0.0037		
	-10	5	0.0026		
	0	3	0.0016		
	10	2	0.0010		
	20	6	0.0032		
	30	4	0.0021		
	40	7	0.0037		
	50	5	0.0026		

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	7	0.0083	2.5	Pass
	3.70	2	0.0023		
	3.40	6	0.0071		

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	6	0.0032	2.5	Pass
	3.70	8	0.0042		
	3.40	4	0.0021		

NOTE: All conditions have been tested and we only record the worst results in each bands.

5.8. PEAK-TO-AVERAGE RATIO

5.8.1. Standard Applicable

According to FCC §2.1046 and §24.232(d), the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.8.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.8.3. Test Procedures

The following steps outline the procedure used to measure the Peak-to-Average Ratio from the EUT.

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

5.8.4. Test Results

Modes	PCS 1900		
Channel	512	661	810
	Low	Mid	High
Frequency(MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)	0.56	0.69	0.37

Modes	EGPRS 1900		
Channel	512	661	810
	Low	Mid	High
Frequency(MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)	0.48	0.31	0.59

6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18, 2015	June 17, 2016
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 18, 2015	July 17, 2016
Signal analyzer	Agilent	N9020A	MY50510140	9kHz~26.5GHz	October 27, 2014	October 26, 2015
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 25, 2015	June 24, 2016
LISN	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 25, 2015	June 24, 2016
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 25, 2015	June 24, 2016
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 25, 2015	June 24, 2016
3m Semi Anechoic	SIDT	SAC-3M	03CH03-HY	30M-1GHz	June 18, 2015	June 17, 2016
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 16, 2015	June 15, 2016
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16, 2015	July 15, 2016
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16, 2015	July 15, 2016
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 16, 2015	June 15, 2016
Loop Antenna	R&S	HFH2-Z2	860024/003	9k-30MHz	June 16, 2015	June 15, 2016
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 16, 2015	June 15, 2016
By-log Antenna	SCHWARZBECK	VULB9163	9163-475	30MHz-1GHz	June 16, 2015	June 15, 2016
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 16, 2015	June 15, 2016
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 16, 2015	June 15, 2016
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 25, 2015	June 24, 2016
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 25, 2015	June 24, 2016
Spectrum Meter	R&S	FSP 30	100023	9kHz-30GHz	July 16, 2015	July 15, 2016
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18, 2015	June 17, 2016
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18, 2015	June 17, 2016
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18, 2015	June 17, 2016
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0~300V	June 18, 2015	June 17, 2016
DC power Soure	GW	GPC-6030D	C671845	DC 1V-60V	June 18, 2015	June 17, 2016
Temp. and	Giant Force	GTH-225-20-S	MAB0103-00	N/A	June 18, 2015	June 17, 2016
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 25, 2015	June 24, 2016
RF CABLE-2m	JYE Bao	RG142	CB)35-2m	20MHz-1GHz	June 25, 2015	June 24, 2016
Vector signal	R&S	SMU200A	102098	100kHz~6GHz	June 18, 2015	June 17, 2016
Signal Generator	R&S	SMR40	10016	10MHz~40GHz	July 16, 2015	July 15, 2016

Universal Radio	R&S	CMU200	112012	N/A	July 18, 2015	July 17, 2016
<i>Note: All equipment through GRGT EST calibration</i>						

-----THE END OF REPORT-----