

# TEST REPORT



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (1) / (26) Pages

## 1. Applicant

- Name : SOLUM CO.,LTD.
- Address : 7F, 2354, Yonggu-daero, Giheung-gu, Yongin-si, Gyeonggi-do,  
Republic of Korea
- Date of Receipt : 2025-03-05

## 2. Manufacturer

- Name : SOLUM CO.,LTD.
- Address : 7F, 2354, Yonggu-daero, Giheung-gu, Yongin-si, Gyeonggi-do,  
Republic of Korea

## 3. Factory

- Name : SOLUM VINA CO., LTD
- Address : Plot B3, Ba Thien II Industrial Park, Thien Ke Ward, Binh Xuyen District, Vinh  
Phuc Province, VIETNAM

**4. Use of Report :** For FCC Certification

**5. Test Sample / Model :** Auto Tag / CD01HFS01X

**6. Date of Test :** 2025-03-17 to 2025-03-27

**7. Test Standard(method) used :** FCC 47 CFR part 15 subpart F 15.517

**8. Testing Environment:** refer to 7 page

**9. Test Results :** Compliance

**10. Location of Test :**  Permanent Testing Lab  On Site Testing  
(Address : 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by Seoung-uk Park: (Signature) 	Technical Manager Bong-seok Kim: (Signature) 
----------	--	---

2025-03-31

**CTK Co., Ltd.**



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (2) / (26) Pages

## REPORT REVISION HISTORY

Date	Revision	Page No
2025-03-31	Issued (CTK-2025-00863)	all

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. Personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. Will constitute fraud and shall nullify the document.***



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (3) / (26) Pages

## **CONTENTS**

1. General Description.....	4
1.1 Applicant Information .....	4
1.2 Product Information.....	4
1.3 Antenna Information.....	4
2. Accreditations .....	5
2.1 Laboratory Accreditations and Listings .....	5
2.2 Calibration Details of Equipment Used for Measurement .....	5
3. Test Specifications .....	6
3.1 Standards.....	6
3.2 Mode of operation during the test.....	6
3.3 Peripheral Devices .....	7
3.4 Measurement Uncertainty.....	7
3.5 Test Software.....	7
3.6 Testing Environment .....	7
4. Technical Characteristic Test.....	8
4.1 Emission Bandwidth.....	8
4.2 Radiated emission .....	10
APPENDIX A – Test Equipment Used For Tests .....	26

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (4) / (26) Pages

## 1. General Description

### 1.1 Applicant Information

<b>Company</b>	SOLUM CO.,LTD.
<b>Contact Point</b>	7F, 2354, Yonggu-daero, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea
<b>Contact Person</b>	Name : Ki Dong Lee E-mail : kdlee007@solu-m.com Tel : +82-31-8006-7677

### 1.2 Product Information

<b>FCC ID</b>	2AFWN-CD01HFS01X
<b>Product Description</b>	Auto Tag
<b>Model name</b>	CD01HFS01X
<b>Variant Model name</b>	-
<b>Charging Frequency</b>	6 489.6 MHz
<b>Antenna Type</b>	PCB Pattern
<b>Power Source</b>	DC 3.6 V(Battery)

### 1.3 Antenna Information

<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided. Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (5) / (26) Pages

## 2. Accreditations

### 2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	CN : 8737A CAB ID : KR0025
KOREA	NRRA	KR0025

### 2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (6) / (26) Pages

### 3. Test Specifications

#### 3.1 Standards

FCC Part Section(s)	Test item	Status (Note 1)	Report Clause
15.203	Antenna Requirement	C	1.3
15.503(d) / 15.517(b)	Emission Bandwidth	C	4.1
15.517(c) / 15.209	Radiated Emissions	C	4.2
15.517(d)	Radiated emissions within the 1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz frequency ranges.	C	4.2
15.517(e)	Peak power of fundamental frequency within a 50 MHz bandwidth	C	4.2
15.207	AC Power Line Conducted Emissions	NA(Note 3)	-

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.


Note 3: The equipment is operated on battery power only.

Note 4: The sample was tested according to the following specification: ANSI C63.10-2013.

#### 3.2 Mode of operation during the test

The sample transmits UWB signals continuously.

##### Measurement Configuration

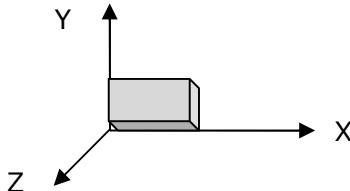Tests Item	Radiated Emissions
Condition	Radiated measurement
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.
EUT faces identified relative to view from receiving antenna	

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (7) / (26) Pages

### 3.3 Peripheral Devices

No.	Device	Manufacturer	Model No.	Serial No.
-	-	-	-	-

### 3.4 Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.  
Coverage factor  $k = 2$ , Confidence levels of 95 %

Test Item	Uncertainty
Occupied Bandwidth	0.1 MHz (C.L.: Approx. 95 %, $k = 2$ )
Radiated Emissions ( $f \leq 1$ GHz)	3.88 dB (C.L.: Approx. 95 %, $k = 2$ )
Radiated Emissions ( $f > 1$ GHz)	4.50 dB (C.L.: Approx. 95 %, $k = 2$ )

### 3.5 Test Software

Radiated Test	EP5RE Ver. 6.0.10, ES10 Ver. 2022.04.000
---------------	--

### 3.6 Testing Environment

Test Item	Test Date	Temperature (°C)	Relative Humidity (%)
Emission Bandwidth	2025-03-27	22 ± 1	25 ± 3
Radiated Emissions (below 1GHz)	2025-03-17	21 ± 1	26 ± 3
Radiated Emissions (above 1GHz)	2025-03-18 ~ 2025-03-19	(20 ~ 22) ± 1	(30 ~ 34) ± 3
Radiated emissions within the 1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz frequency ranges.	2025-03-18	20 ± 1	30 ± 3
Peak power of fundamental frequency within a 50 MHz bandwidth	2025-03-25	20 ± 1	30 ± 3



## 4. Technical Characteristic Test

### 4.1 Emission Bandwidth

#### Requirement

§15.517(b) The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

§15.503(d) An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

#### Test Procedures

ANSI C63.10-2013, clause 10.1

The frequency at which the maximum power level is measured with the peak detector is designated  $f_M$ . The peak power measurements shall be made using a spectrum analyzer or EMI receiver with a 1 MHz resolution bandwidth and a video bandwidth of 1 MHz or greater. The instrument shall be set to peak detection using the maximum-hold trace mode. The outermost 1 MHz segments above and below  $f_M$ , where the peak power falls by 10 dB relative to the level at  $f_M$ , are designated as  $f_H$  and  $f_L$ , respectively:


- a) For the lowest frequency bound  $f_L$ , the emission is searched from a frequency lower than  $f_M$  that has, by inspection, a peak power much lower than 10 dB less than the power at  $f_M$  and increased toward  $f_M$  until the peak power indicates 10 dB less than the power at  $f_M$ . The frequency of that segment is recorded.
- b) This process is repeated for the highest frequency bound  $f_H$ , beginning at a frequency higher than  $f_M$  that has, by inspection, a peak power much lower than 10 dB below the power at  $f_M$ . The frequency of that segment is recorded.
- c) The two recorded frequencies represent the highest  $f_H$  and lowest  $f_L$  bounds of the UWB transmission, and the  $-10$  dB bandwidth is defined as  $(f_H - f_L)$ . The center frequency ( $f_c$ ) is mathematically determined from  $(f_H - f_L) / 2$ .
- d) The fractional bandwidth is defined as  $2(f_H - f_L) / (f_H + f_L)$ .
- e) Determine whether the  $-10$  dB bandwidth  $(f_H - f_L)$  is  $\geq 500$  MHz, or whether the fractional bandwidth  $2(f_H - f_L) / (f_H + f_L)$  is  $\geq 0.2$ .

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (9) / (26) Pages

## Test Setup




## Test results

The requirements are:

- Complies

$f_H$	$f_L$	<b>-10 dB bandwidth (<math>f_H - f_L</math>)</b>	Limit
6 786 MHz	6 256 MHz	530 MHz	Great than 500 MHz

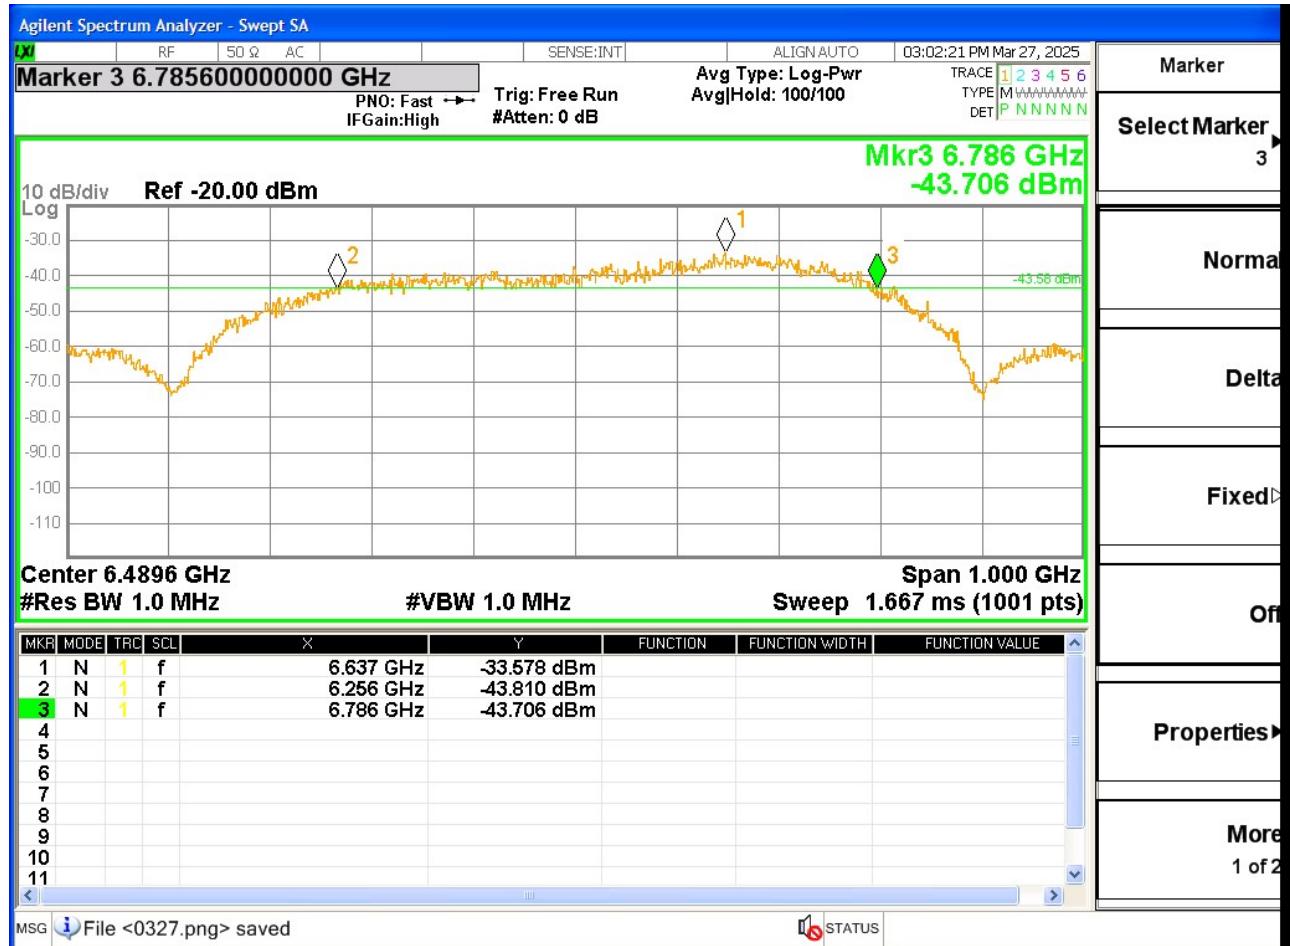

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (10) / (26) Pages

## 4.2 Radiated emission

### Requirement

§15.517(c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209.

Frequency [MHz]	Field Strength [uV/m]	Field Strength [dBuV/m]	Measurement Distance [meters]
0.009-0.490	2400/F(kHz)	48.5 – 13.8	300
0.490-1.705	24000/F(kHz)	33.8 – 23	30
1.705-30	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm	Field Strength at 3 m [dBuV/m]
960 - 1 610	-75.3	20
1 610 - 1 990	-53.3	42
1 990 – 3 100	-51.3	44
3 100 - 10 600	-41.3	54
Above 10 600	-51.3	44

§15.517(d) In addition to the radiated emission limits specified in the table above, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm	Field Strength at 3 m [dBuV/m]
1 164 – 1 240	-85.3	10
1 559 – 1 610	-85.3	10

§15.517(e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs,  $f_M$ . That limit is 0 dBm EIRP.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (11) / (26) Pages

## Test Procedures

### 1) Radiated measurement procedure below 960 MHz

<b>Test Method</b>	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.4(Radiated emissions from unlicensed wireless devices below 30 MHz).
<input checked="" type="checkbox"/>	Radiated emission tests shall be performed in the frequency range of 9 kHz to 30 MHz, using a calibrated loop antenna.
<input checked="" type="checkbox"/>	When perpendicular to the ground plane, the lowest height of the magnetic antenna shall be 1 m above the ground and shall be positioned at the specified distance from the EUT. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> The results shall be by using the square of an inverse linear distance extrapolation factor(40 dB/decade).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.5(Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz).
<input checked="" type="checkbox"/>	In the frequency rage above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) is used. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.
<input checked="" type="checkbox"/>	Emissions more than 20 dB below the limit do not need to be reported.

<b>Measuring instrument Settings</b>	
Frequency Range	9 kHz – 1 000 MHz
RBW	200 Hz (9 kHz – 150 kHz) 9 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1 000 MHz)
VBW	$\geq$ RBW
Sweep time	auto couple
Detector function	CISPR quasi-peak(below 1 000 MHz)



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (12) / (26) Pages

## 2) Radiated measurement procedure above 960 MHz

ANSI C63.10-2013, clause 10.3

### [Determination of EIRP]

When an isotropic transmitting antenna is assumed, the following relationships in equation may be employed to relate EIRP to field strength( $E$ ) at a specified measurement distance of 3 m:

$$\text{EIRP (dBm)} = E(\text{dBuV/m}) - 95.3$$

### [Peak power within 50 MHz bandwidth]

The peak detector of the instrument is selected and the maximum hold feature activated.

It is acceptable to employ an RBW of less than 50 MHz (but no less than 1 MHz) when performing the required peak power measurements. When this approach is employed, the peak emissions EIRP limit (0 dBm / 50 MHz) is converted to a limit commensurate with the RBW by employing a  $[20 \log (\text{RBW}/50 \text{ MHz})]$  relationship. For example, the peak power limit could be expressed in a 10 MHz bandwidth as follows in Equation:

$$\text{EIRP}_{50\text{MHz}} = \text{EIRP}_{10\text{MHz}} + 20 * \log(50 \text{ MHz} / 10 \text{ MHz})$$

### [Average power spectral density]

- a) Set the RBW to 1 MHz.
- b) Set the VBW to be at least 1 MHz (a VBW of 3 MHz is desirable).
- c) Set the frequency span to examine the spectrum across a convenient frequency segment (e.g., 600 MHz).
- d) Select the power averaging (rms) detector.
- e) Set the sweep time so that there is no more than a 1 ms integration period over each measurement bin.

### [Spectral line measurement]

Another test required for these types of devices involves the measurement of the maximum of the average power contained in any spectral lines present within the 1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz frequency ranges. The measurement setup is similar to that described in [Average power spectral density]. The rms detector is selected, and the sweep time and number of measurement bins are set to provide the requisite 1 ms integration time. In this test, the RBW may be reduced to a minimum of 1 kHz (30 kHz is recommended) to enhance the resolution of the individual spectral lines. A ratio of VBW / RBW  $> 3$  shall be maintained when possible.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2025-00863  
Page (13) / (26) Pages

## Test Location


10 m SAC (test distance :  10 m,  3 m)

## Test Setup

1) For field strength of emissions from 9 kHz to 30 MHz

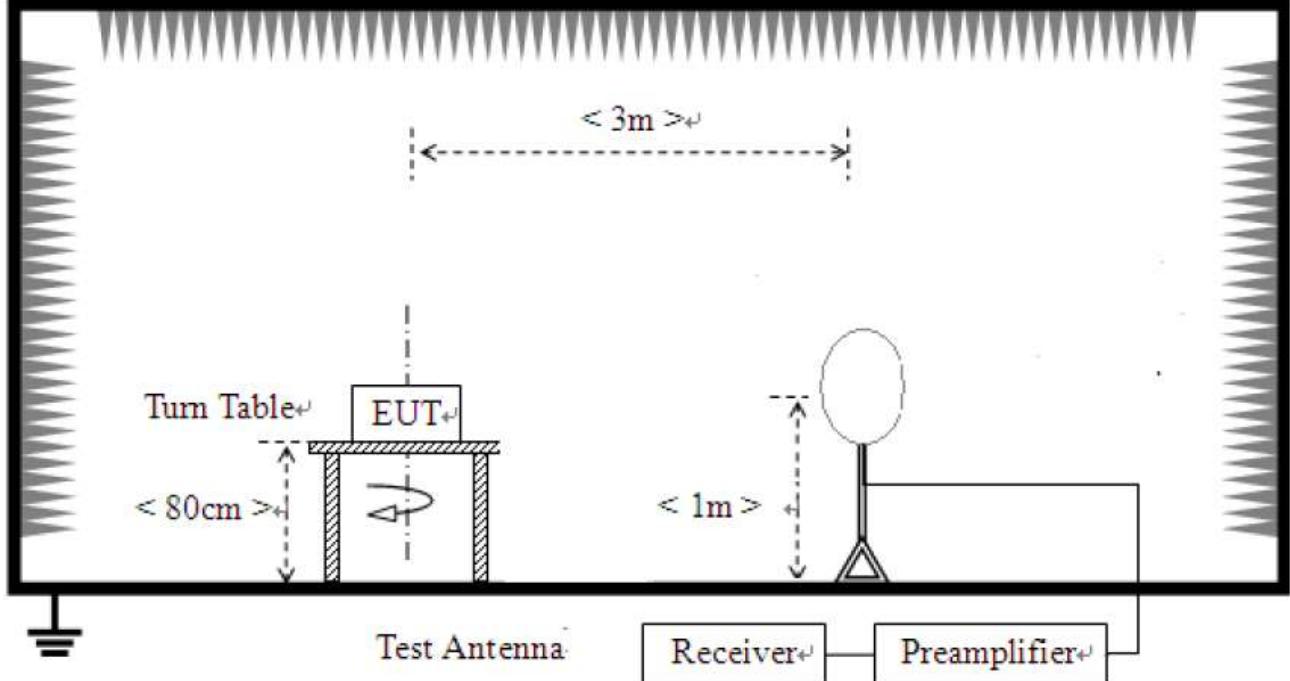

2) For field strength of emissions from 30 MHz to 1 GHz

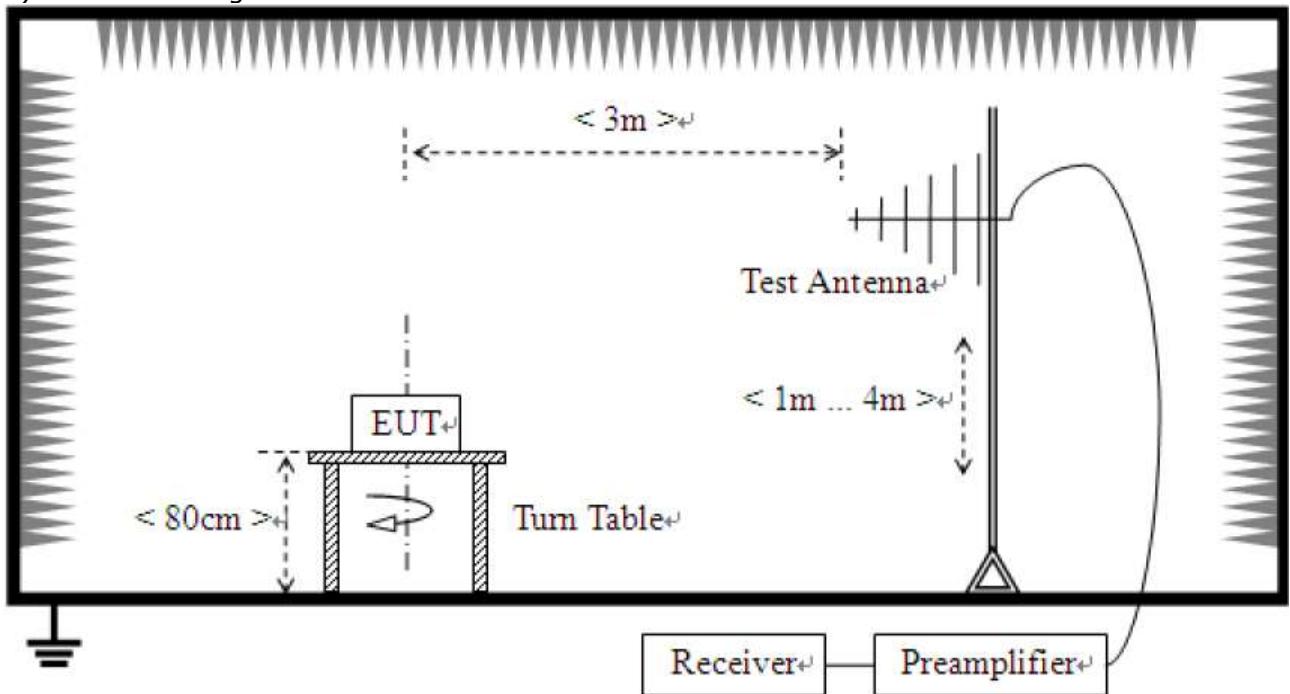




**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (14) / (26) Pages

3) For field strength of emissions above 1 GHz

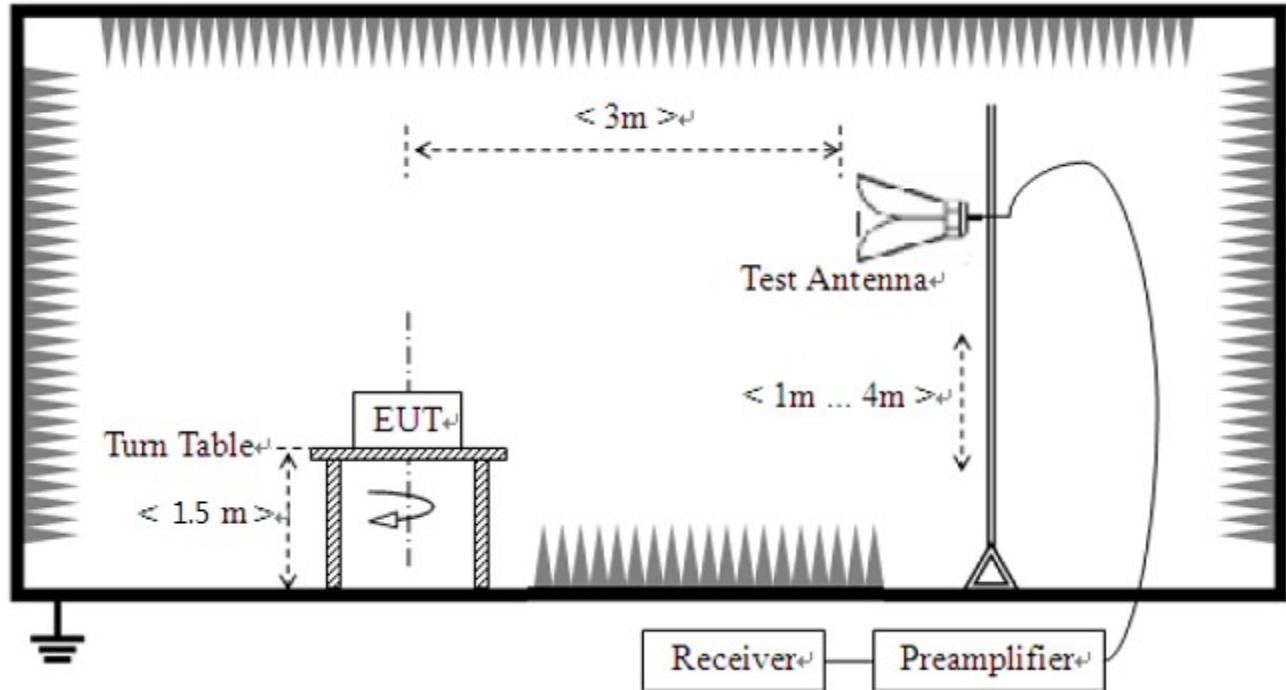



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (15) / (26) Pages


## Test results

The requirements are:



## 1) Radiated emissions in the frequency range of 9 kHz to 30 MHz

## Test Mode : UWB

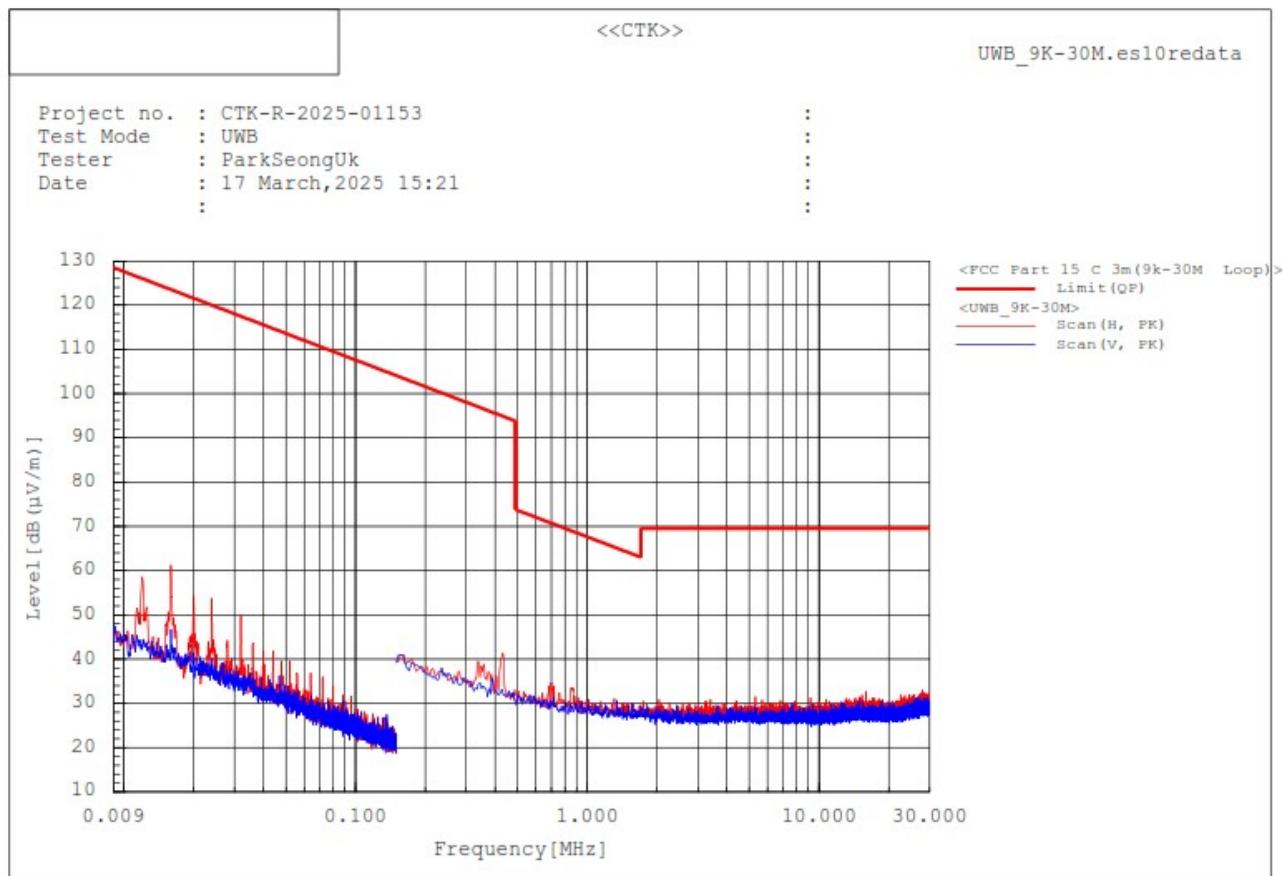

### Remark :

**Remark :**

1. Result = Reading + c.f(correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
3. This graph is the result measured by peak detection.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (16) / (26) Pages

## Test Mode : UWB+ Wi-Fi HaLow

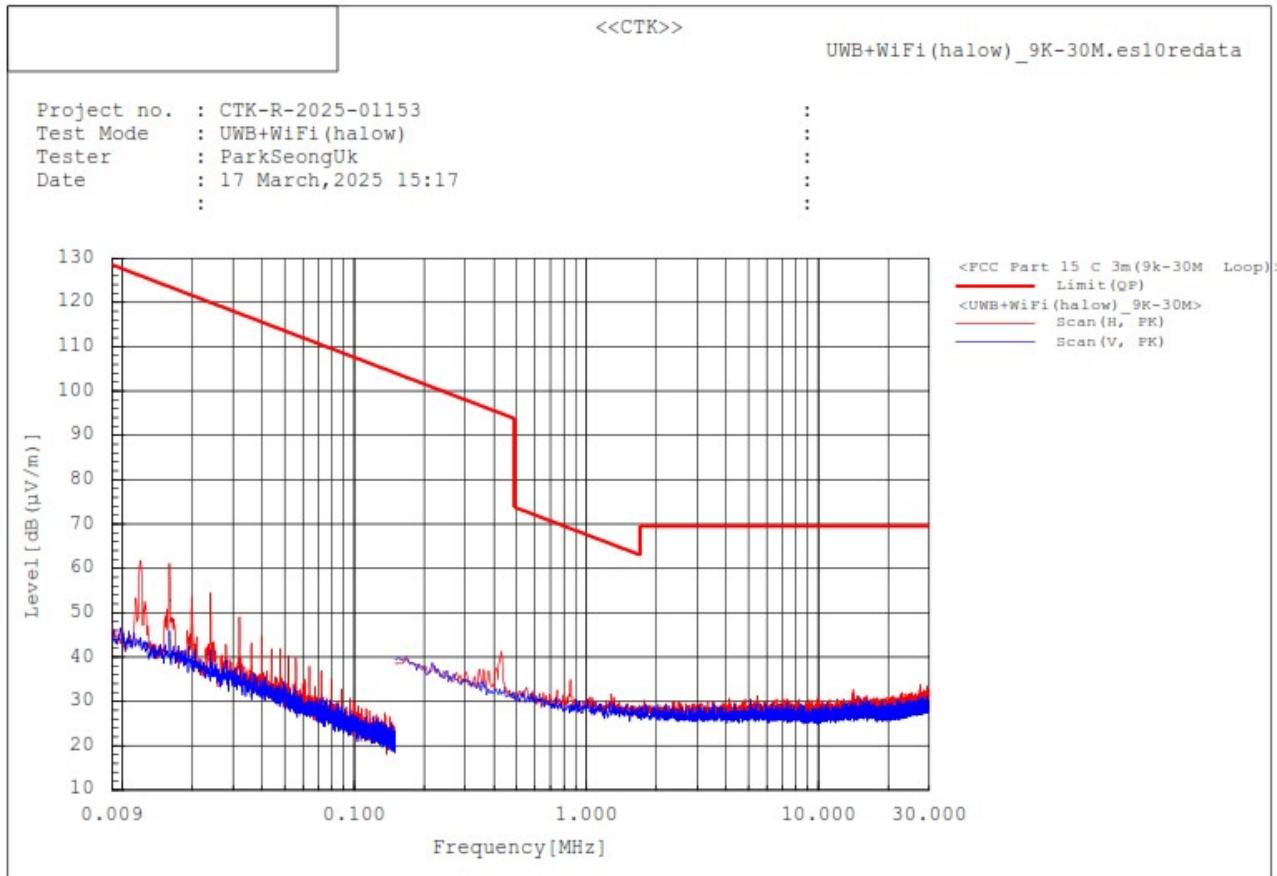

### Remark :

**Remark :**

1. Result = Reading + c.f (correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
3. This graph is the result measured by peak detection.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (17) / (26) Pages

**2) Radiated emissions in the frequency range of 30 MHz to 960 MHz**  
**Test Mode : UWB**

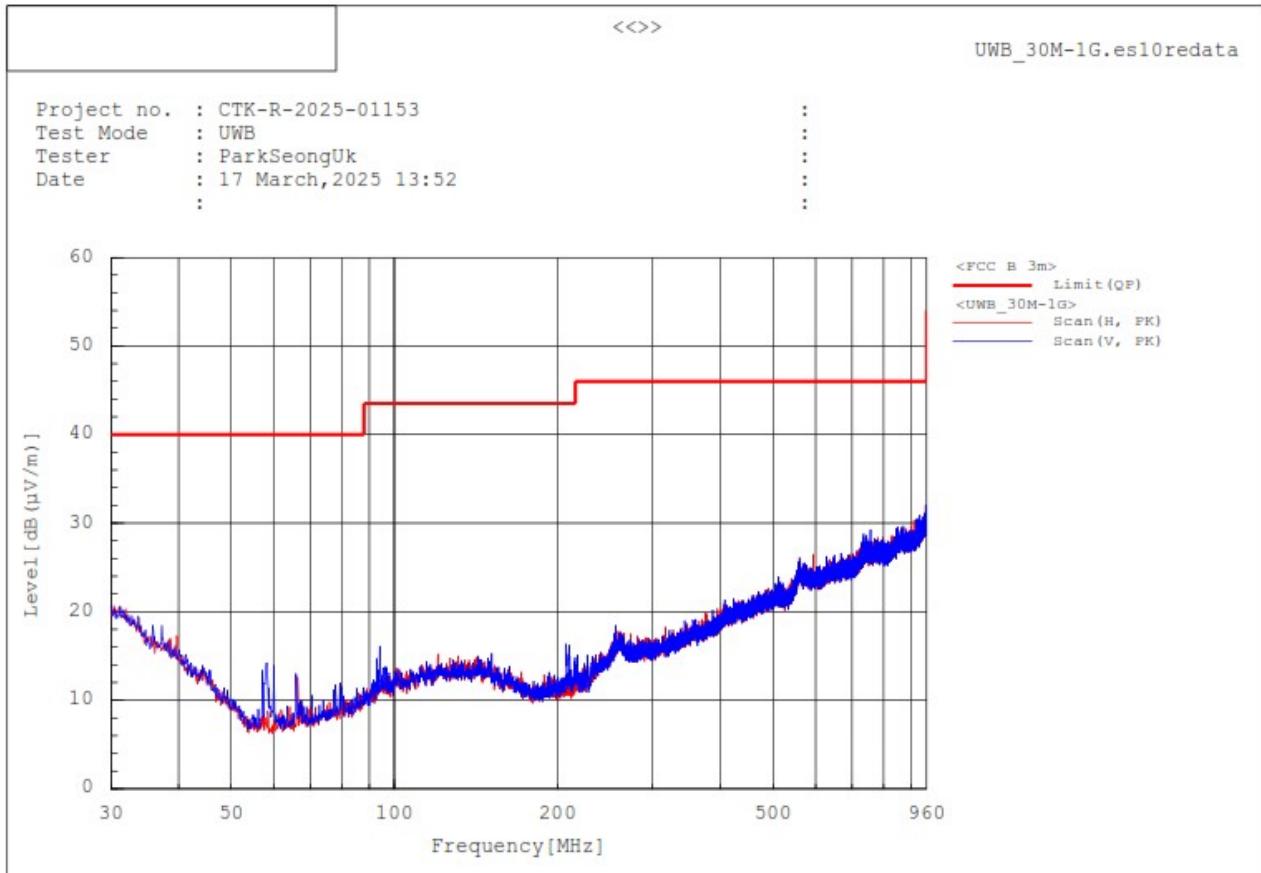

### Remark :


**Remark :**

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
3. This graph is the result measured by peak detection.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (18) / (26) Pages

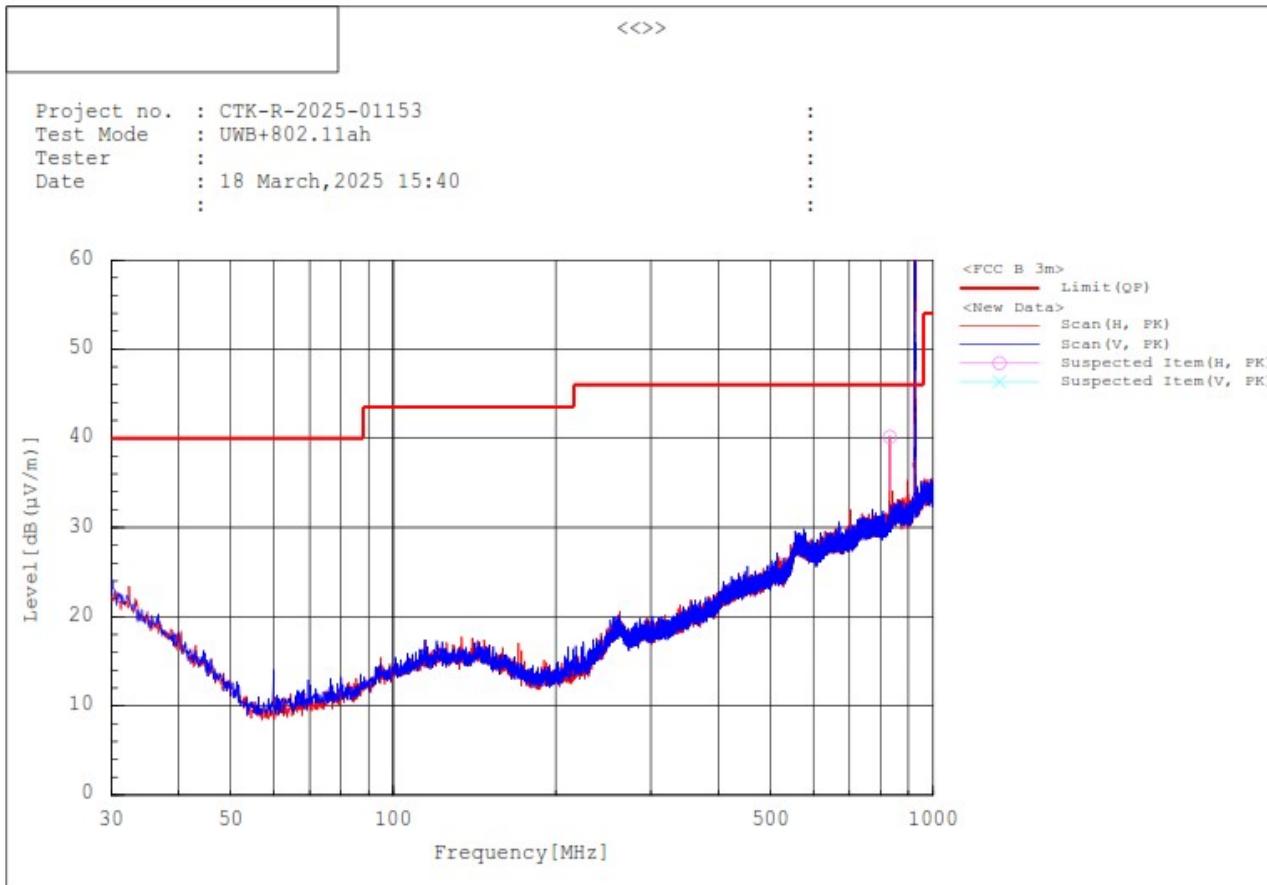**Test Mode : UWB+ Wi-Fi HaLow**

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin[dB]	Remark
1.	832.093	H	38.0	2.2	40.2	46.0	5.8	
2.	924.922	H	94.6	4.4	99.0	46.0	-	Fundamental (Wi-Fi HaLow)
3.	925.795	V	87.7	4.4	92.1	46.0	-	Fundamental (Wi-Fi HaLow)

**Remark :**


1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
3. This graph is the result measured by peak detection.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (19) / (26) Pages

### 3) Radiated emissions in the frequency range of 960 MHz to 1 000 MHz

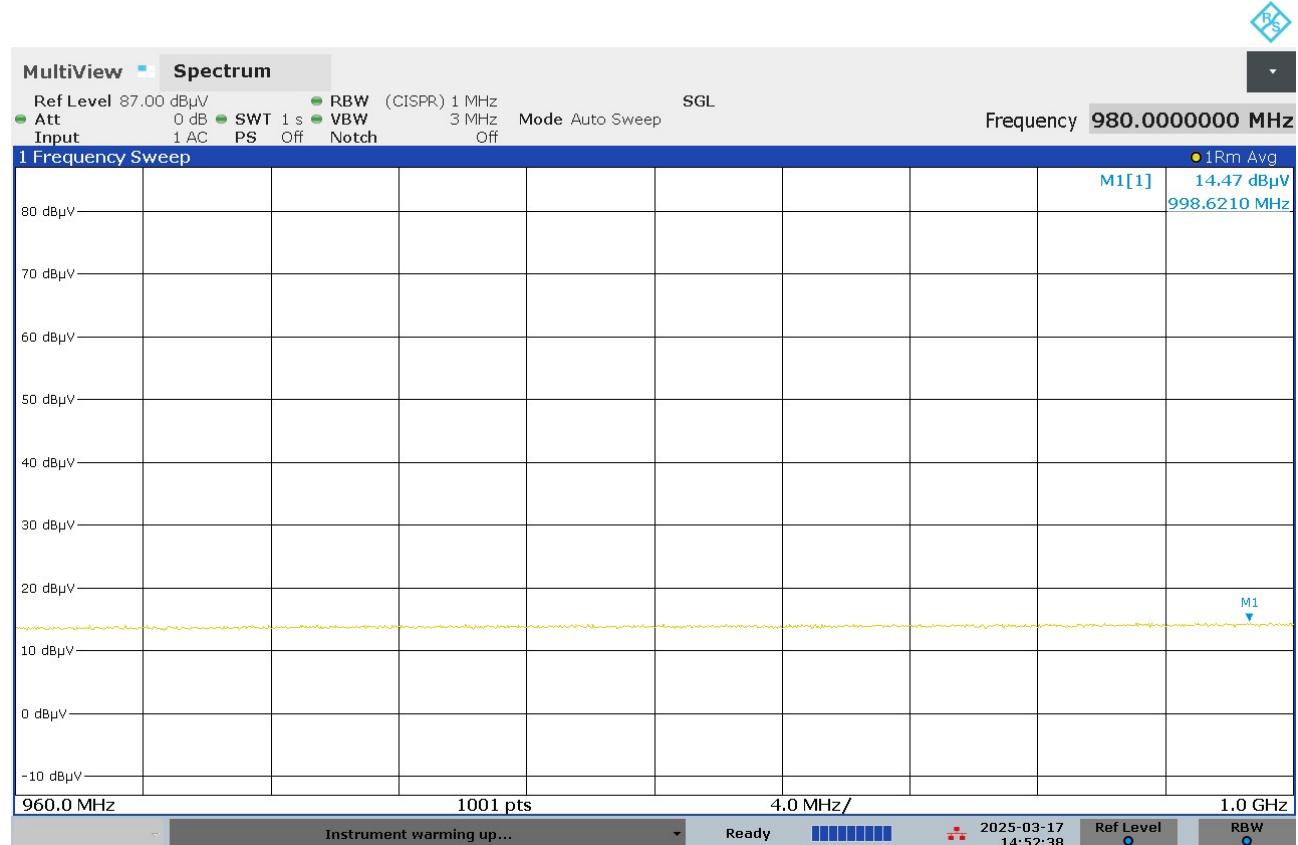**Test Mode : UWB**

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									

**Remark :**

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain
3. Limit : -75.3 dBm => 20 dBuV/m at 3m



**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (20) / (26) Pages

#### 4) Radiated emissions in the frequency range of 1 GHz to 40 GHz

Test Mode : UWB

[1 GHz ~ 6 GHz]

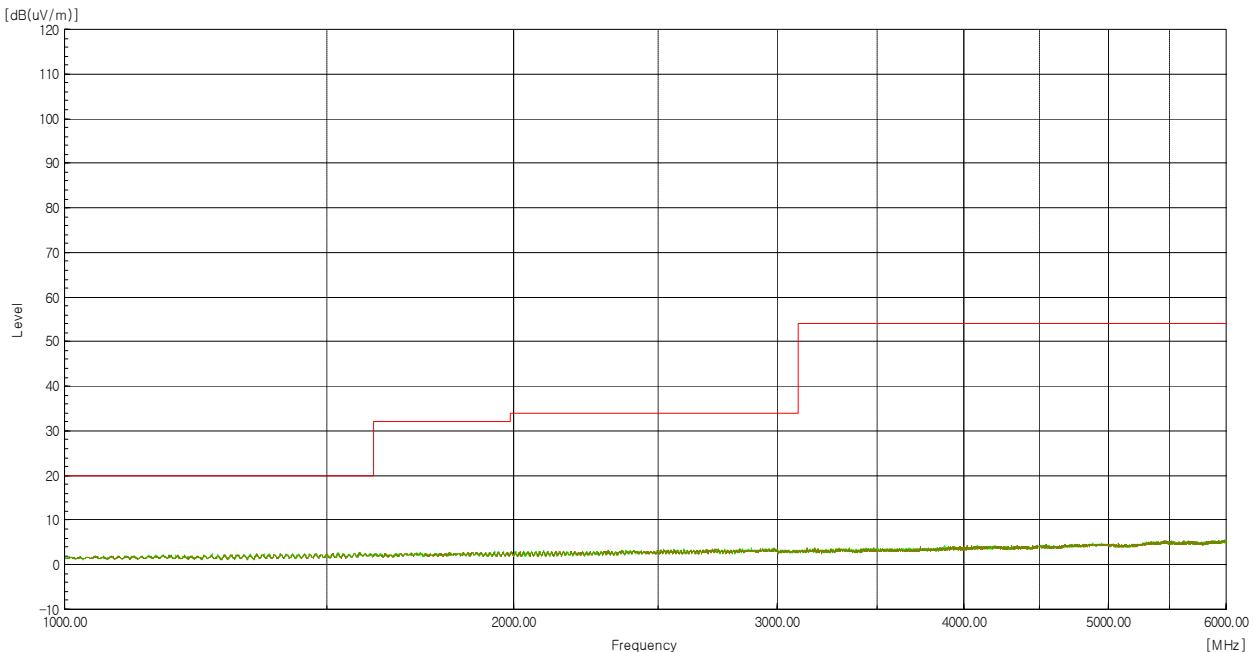


No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]]	Limit [dBm]	Margin[dB]	Remark
Not detected									

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (21) / (26) Pages

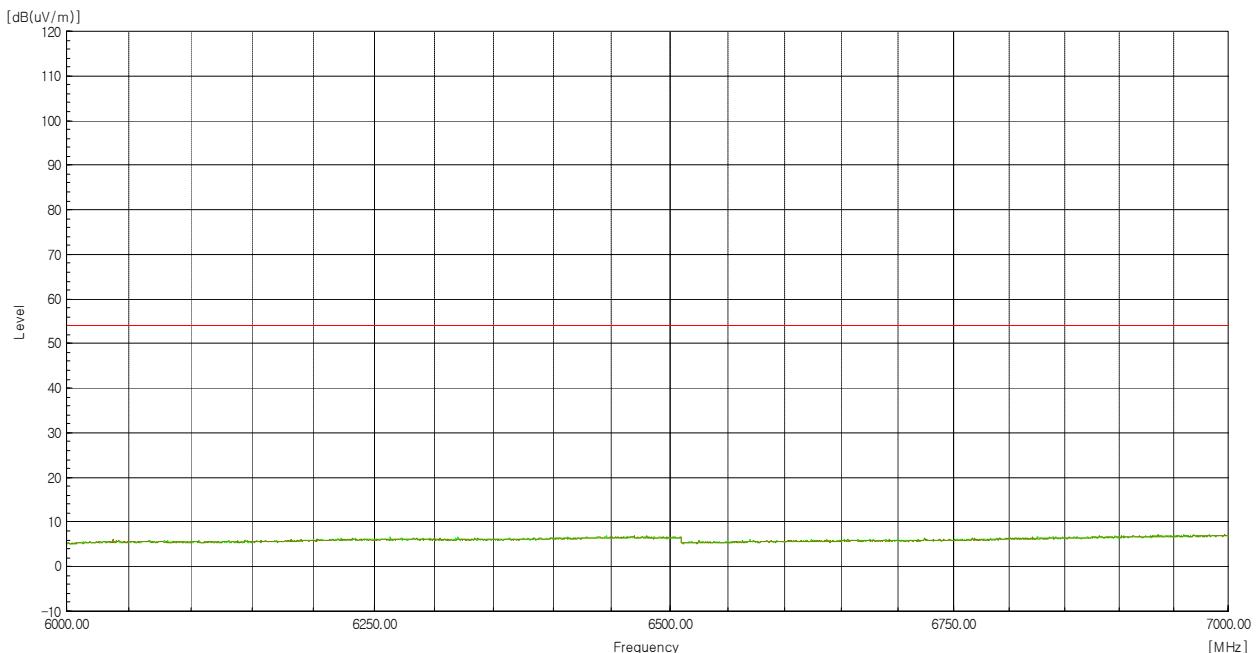**[6 GHz ~ 7 GHz]**

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									


**Remark :**

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain
3. Result [dBm] = Result [dBuV/m] - 95.3


**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
 Gyeonggi-do, 17142, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2025-00863  
 Page (22) / (26) Pages

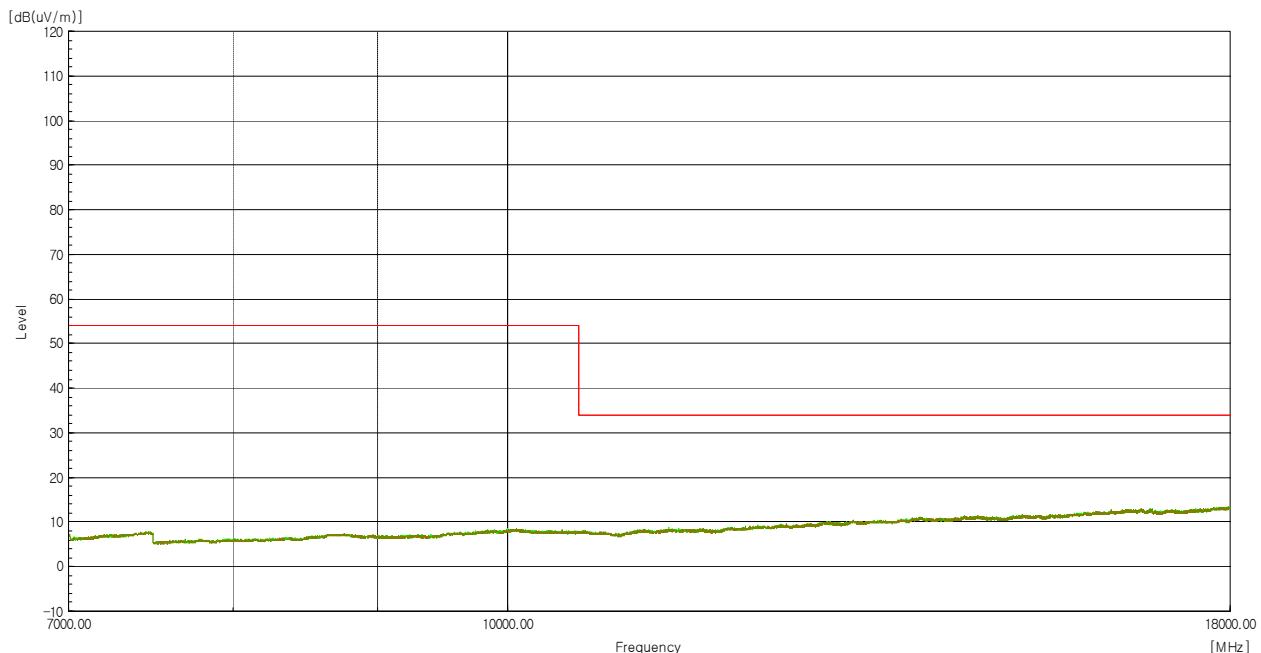**[7 GHz ~ 18 GHz]**

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									

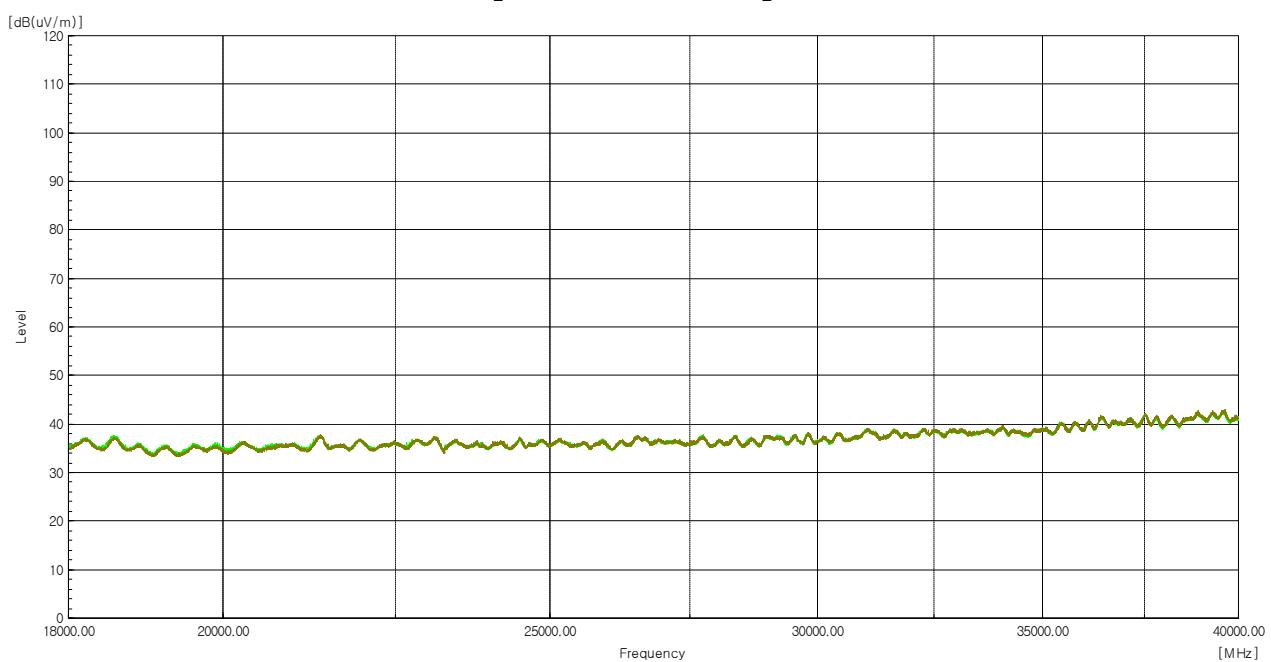**[18 GHz ~ 40 GHz]**

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									


**Remark :**

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain


**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
 Gyeonggi-do, 17142, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
**CTK-2025-00863**  
 Page (23) / (26) Pages

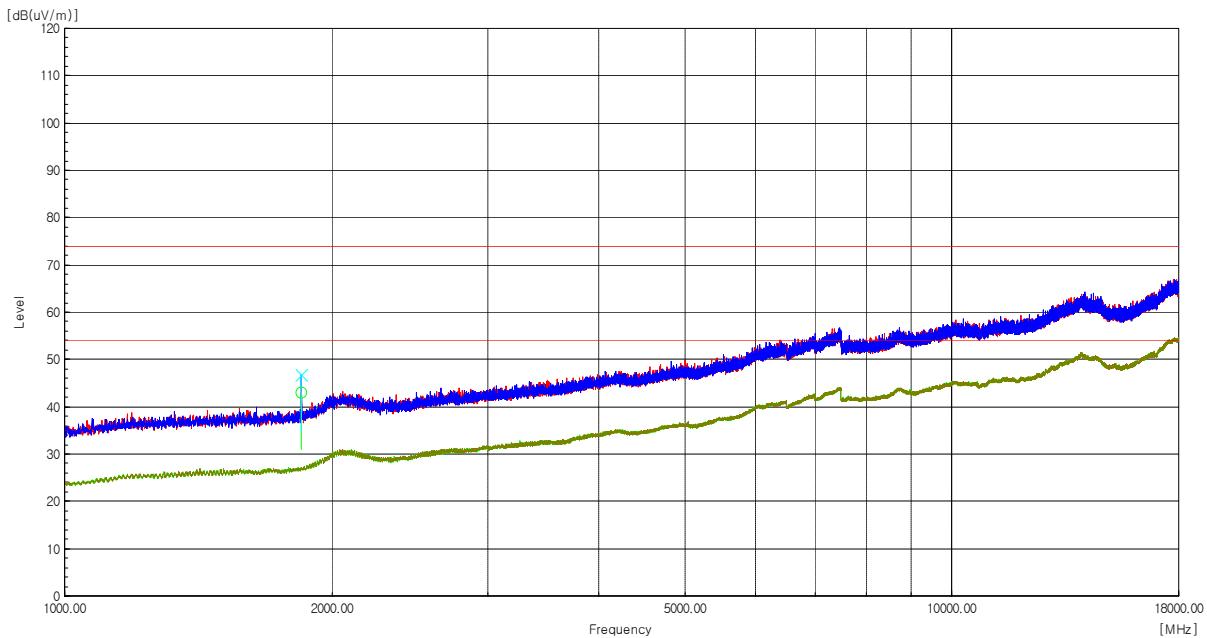**Test Mode : UWB+ Wi-Fi HaLow****[1 GHz ~ 18 GHz]**

No.	Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin PK [dB]
1.	1 848.7	H	50.4	-7.4	43.0	74.0	31.0
2.	1 848.7	V	54.1	-7.4	46.7	74.0	27.3

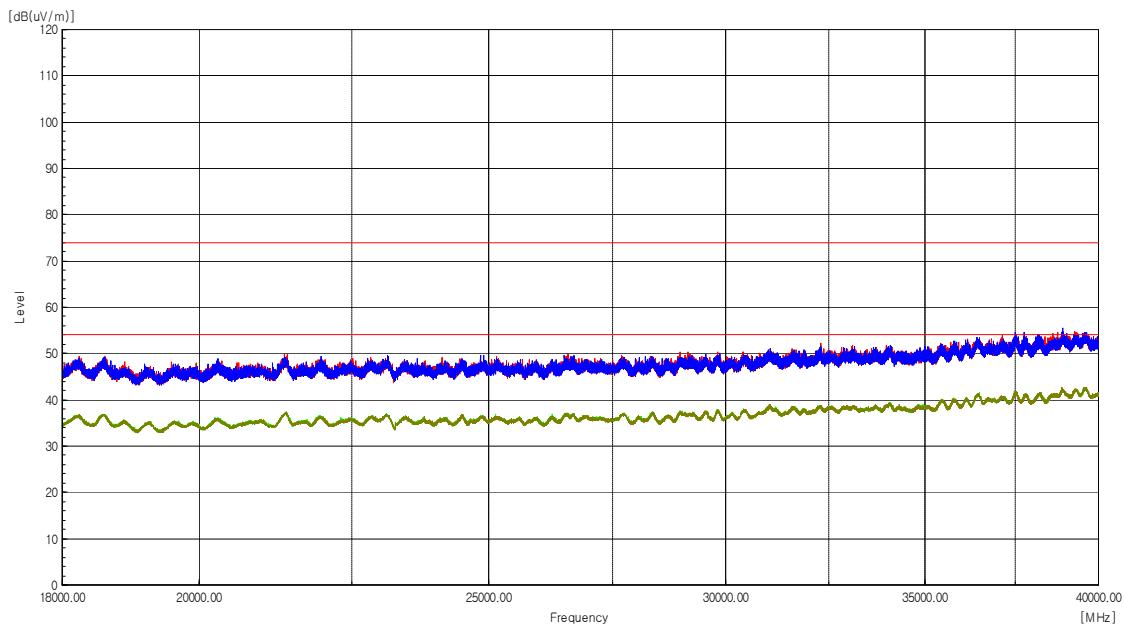**[18 GHz ~ 40 GHz]**

No.	Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Limit PK [dB(uV/m)]	Margin PK [dB]
Not detected							

**Remark :**

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain

**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (24) / (26) Pages

## 5) Radiated emissions within the 1 164 MHz to 1 240 MHz and 1 559 MHz to 1 610 MHz frequency ranges.


**Test Mode : UWB**

### [1 164 MHz ~ 1 240 MHz]

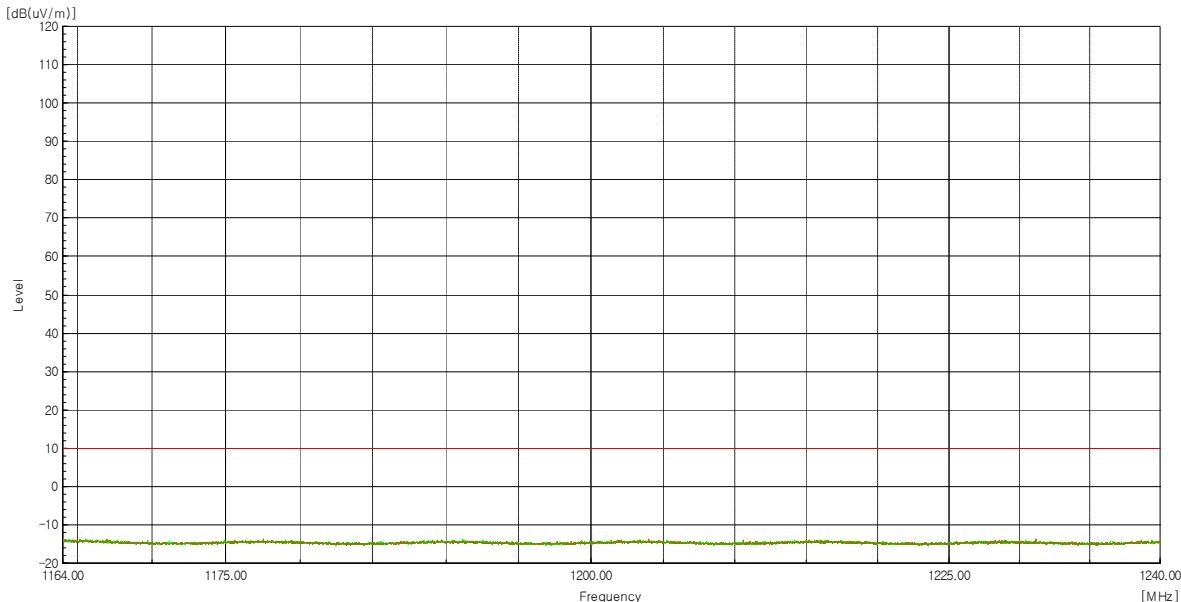

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									

### [1 559 MHz ~ 1 610 MHz]

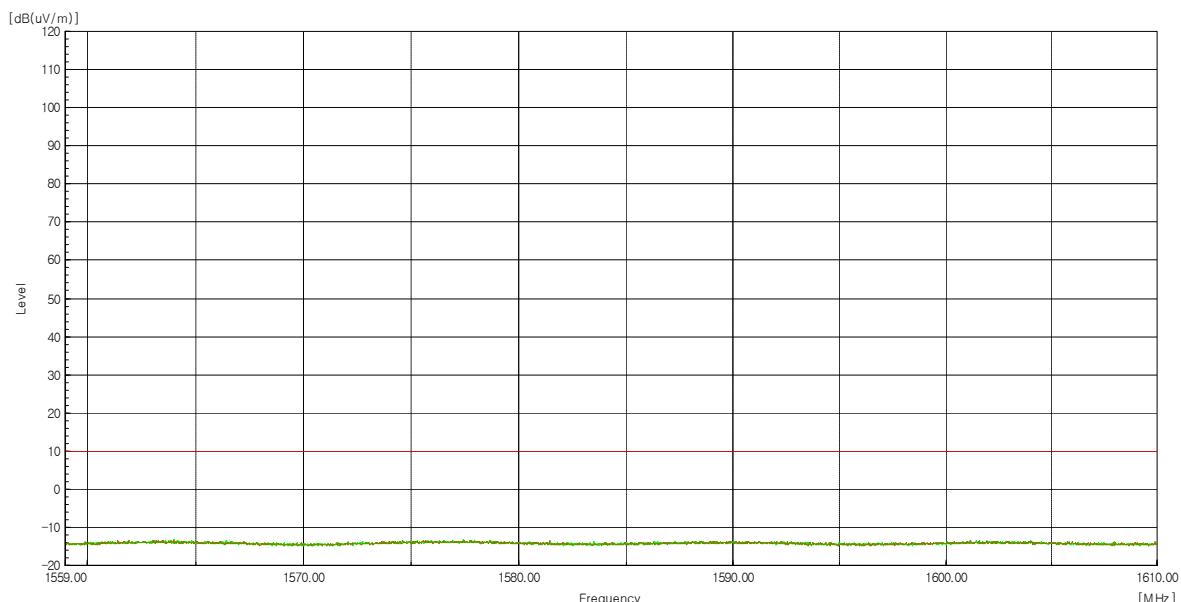

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result [dBuV/m]	Result [dBm]	Limit [dBm]	Margin[dB]	Remark
Not detected									


**Remark :**

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (25) / (26) Pages

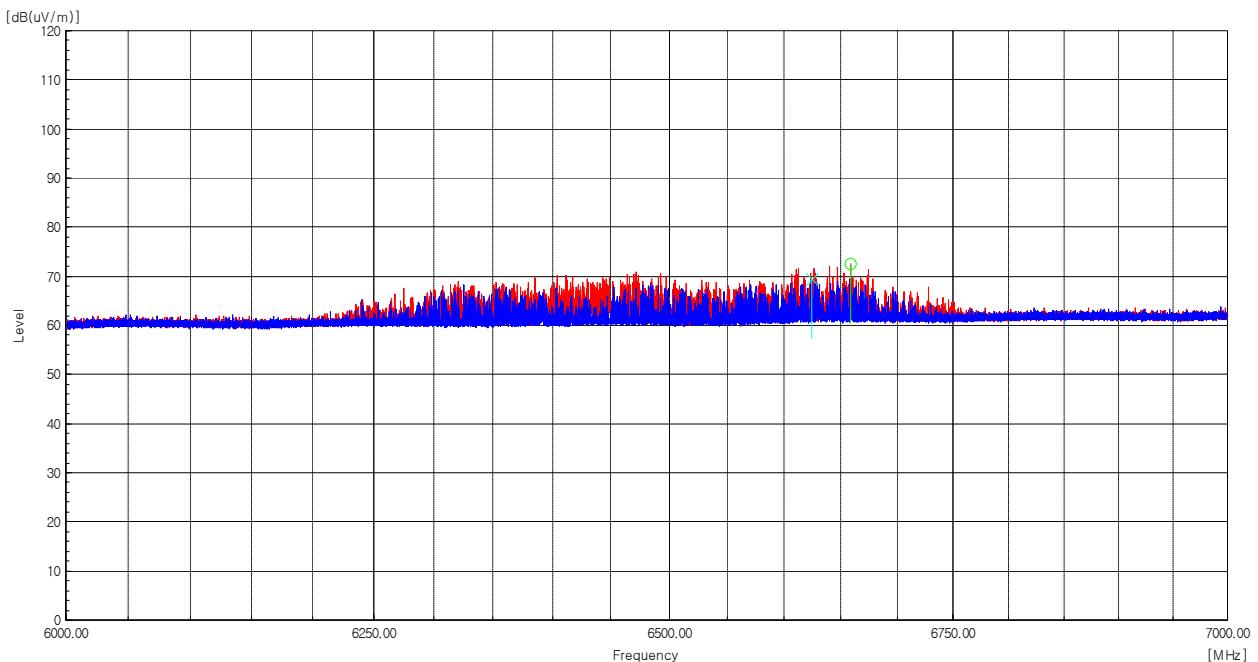**6) Peak power of fundamental frequency within a 50 MHz bandwidth****Test Mode : UWB**

No.	Frequency [MHz]	Pol.	Reading [dBuV]	c.f [dB/m]	Result (10MHz RBW) [dBuV/m]	Result (10MHz RBW) [dBm]	Result (50MHz RBW) [dBm]	Limit [dBm]	Remark
1	6 623.9	V	61.8	7.7	69.5	-25.8	-11.8	0	
2	6 658.5	H	64.5	7.9	72.4	-22.9	-8.9	0	

**Remark :**

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss - Amp Gain
3. This graph is measured at 10MHz bandwidth.
4. Result(10MHz RBW) [dBm] = Result(10MHz RBW) [dBuV/m] - 95.3
5. Result(50MHz RBW) [dBm] = Result(10MHz RBW) [dBm] + 20\*log(50 MHz / 10 MHz)  
= Result(10MHz RBW) [dBm] + 14

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-00863  
Page (26) / (26) Pages

## APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY50200512	2025-03-13	2026-03-13
2	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2024-04-29	2025-04-29
3	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2024-04-15	2026-04-15
4	Bilog Antenna	TESEQ	CBL6111D	60654	2023-08-21	2025-08-21
5	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2024-07-31	2025-07-31
6	ATTENUATOR	PASTERNACK	PE7AP006-06	L20210504000023	2024-07-31	2025-07-31
7	ATTENUATOR	NONE	6dB	190557	2024-09-19	2025-09-19
8	Preamplifier	Agilent	8449B	3008A00620	2024-04-11	2025-04-11
9	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2024-04-16	2025-04-16
10	Horn Antenna	SCHWARZBECK	BBHA9170	01153	2024-10-18	2025-10-18
11	Low Noise Amplifier	TESTEK	TK-PA1840H	210124-L	2024-10-18	2025-10-18
12	Spectrum Analyzer	Rohde & Schwarz	FSV40	101574	2025-01-10	2026-01-10
13	System DC Power Supply	HP	6612C	US37462767	2024-11-25	2025-11-25
14	High Pass Filter	K&L MICROWAVE	13SH10-1000/U1000-N/N	00003	2024-07-10	2025-07-10
15	Band Reject Filter	Wainwright Instruments GmbH	WRCG902/930-894/938-50/12SS	SN1	2025-03-11	2026-03-11

No.	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable(conducted)	Junkosha Inc.	MWX221	2008S240	2025-03-17
2	RF Cable (9kHz-1GHz Radiated)	Canare Corporation	L-5D2W	N/A	2025-03-05
3	RF Cable (9kHz-1GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2025-03-05
4	RF Cable (1GHz-18GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2025-02-21
5	RF Cable (1GHz-18GHz Radiated)	Rosenberger	NONE	1520.9927.00	2025-02-21
6	RF Cable (1GHz-18GHz Radiated)	Sensorview Co., LTD	9S18	TPC2204060007	2025-02-21
8	RF Cable (18 GHz – 40 GHz Radiated)	Sensorview Co., LTD	9A40	TPC220406009	2025-02-21
9	RF Cable (18 GHz – 40 GHz Radiated)	Sensorview Co., LTD	9A40	TP210713-001	2025-02-21

-END-