

# TEST REPORT



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (1) / (28) Pages

## 1. Applicant

- Name : SOLUM CO.,LTD.
- Address : 7F, 2354, Yonggu-daero, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea
- Date of Receipt : 2025-06-11

## 2. Manufacturer

- Name : SOLUM CO.,LTD.
- Address : 7F, 2354, Yonggu-daero, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea

**3. Use of Report :** For FCC Certification & ISED Certification

**4. Test Sample / Model :** ESL Label / EL021L7W4C

**5. Date of Test :** 2025-06-22 to 2025-07-03

**6. Test Standard(method) used :** FCC 47 CFR part 15 subpart C 15.247,  
ANSI C63.10-2013, RSS-247, RSS-Gen

**7. Testing Environment :** refer to 7 page

**8. Test Results :** Compliance

**9. Location of Test :**  Permanent Testing Lab  On Site Testing  
(Address : 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, 17141 Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by Seoung-uk Park: (Signature)	Technical Manager Bong-seok Kim: (Signature)
----------	--	---

2025-08-07

**CTK Co., Ltd.**

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (2) / (28) Pages

## REPORT REVISION HISTORY

Date	Revision	Page No
2025-08-07	Issued (CTK-2025-02090)	all

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (3) / (28) Pages

## **CONTENTS**

1. General Product Description .....	4
1.1 Applicant Information .....	4
1.2 Manufacturer Information .....	4
1.3 Product Information .....	4
1.3 Peripheral Devices .....	4
2. Accreditations .....	5
2.1 Laboratory Accreditations and Listings .....	5
2.2 Calibration Details of Equipment Used for Measurement .....	5
3. Test Specifications .....	6
3.1 Standards .....	6
3.2 Mode of operation during the test .....	7
3.3 Measurement Uncertainty .....	7
3.4 Test Software .....	7
3.5 Testing Environment .....	7
4. Technical Characteristic Test .....	8
4.1 6dB Bandwidth & 99% Bandwidth .....	8
4.2 Maximum peak Conducted Output Power .....	10
4.3 Power Spectral Density .....	12
4.4 Band Edge & Conducted Spurious emission .....	14
4.5 Radiated Emission .....	17
APPENDIX A – Test Equipment Used For Tests .....	28

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (4) / (28) Pages

## 1. General Product Description

### 1.1 Applicant Information

<b>Company</b>	SOLUM CO.,LTD.
<b>Contact Point</b>	7F, 2354, Yonggu-daero, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea
<b>Contact Person</b>	Name : Ki Dong Lee E-mail : kdlee007@solu-m.com Tel : +82-31-8006-7677

### 1.2 Manufacturer Information

<b>Manufacturer</b>	SOLUM CO.,LTD.
<b>Address</b>	7F, 2354, Yonggu-daero, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea
<b>Factory #1</b>	SOLUM VINA CO., LTD
<b>Factory #1 Address</b>	Plot B3, Ba Thien II Industrial Park, Thien Ke Ward, Binh Xuyen District, Vinh Phuc Province, VIETNAM

### 1.3 Product Information

<b>FCC ID</b>	2AFWN-EL021L7W4C
<b>IC</b>	22800-EL021L7W4C
<b>Product Description</b>	ESL Label
<b>Model name</b>	EL021L7W4C
<b>Variant Model name</b>	EL021L7B4C, EL021L7C4C (Variant model has no technical differences with each model except for the model name for marketing purposes.)
<b>Operating Frequency</b>	2 401 MHz - 2 480 MHz
<b>RF Output Power</b>	3.521 dBm(2.250 mW)
<b>Antenna Specification</b>	Antenna type : pattern Antenna Peak Gain : -3.88 dBi
<b>Number of channels</b>	80
<b>Channel Spacing</b>	1 MHz
<b>Type of Modulation</b>	GFSK
<b>Power Source</b>	DC 3.0 V(Battery)
<b>FVIN</b>	V44
<b>Test Software(Version)</b>	SmartRF studio 8 v1.2.0.60
<b>RF Power setting in Test SW</b>	Power setting input "4.0"

### 1.3 Peripheral Devices

-For Conducted Measurement and Radiated Measurement

<b>Device</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>
Notebook	HP Inc.	HP Probook 455 G7	5CD0234DWM
AC Adapter	HP Inc.	PPP012D-S	677777-003



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (5) / (28) Pages

## 2. Accreditations

### 2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	CN : 8737A CAB ID : KR0025
KOREA	NRRA	KR0025

### 2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (6) / (28) Pages

### 3. Test Specifications

#### 3.1 Standards

Section in FCC	Section in RSS	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	RSS-247 5.2(a)	6 dB Bandwidth	C	Conducted
15.247(e)	RSS-247 5.2(b)	Transmitter power spectral density	C	
15.247(b)	RSS-247 5.4(d)	Maximum peak conducted output power	C	
15.247(d)	RSS-247 5.5	Unwanted emission	C	
15.209	RSS-Gen 6.13	Transmitter emission	C	Radiated
15.207(a)	RSS-Gen 8.8	AC Conducted Emission	NA(Note 3)	Line Conducted
<u>Note 1:</u> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable				
<u>Note 2:</u> The data in this test report are traceable to the national or international standards.				
<u>Note 3:</u> The equipment is operated on battery power only.				
<u>Note 4:</u> The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013, RSS-247 Issue 4, RSS-Gen Issue 5.				
<u>Note 5:</u> The tests were performed according to the method of measurements prescribed in KDB No.558074.				
<u>Note 6:</u> This equipment has been tested in a 100% duty cycle transmission situation using applicant supplied software.				

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (7) / (28) Pages

### 3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.  
During at testing, system components were manipulated within the confines of typical usage to  
maximize each emission. All modulation modes were tests.  
The results are only attached worst cases.

#### Test Frequency

Lowest channel	Middle channel	Highest channel
2 401 MHz	2 440 MHz	2 480 MHz

### 3.3 Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.  
Coverage factor  $k = 2$ , Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L. : Approx. 95%, $k=2$ )
Occupied Bandwidth	0.1 MHz (C.L. : Approx. 95%, $k=2$ )
Unwanted Emission(conducted)	3.0 dB (C.L. : Approx. 95%, $k=2$ )
Radiated Emissions ( $f \leq 1$ GHz)	3.8 dB (C.L. : Approx. 95%, $k=2$ )
Radiated Emissions ( $f > 1$ GHz)	4.5 dB (C.L. : Approx. 95%, $k=2$ )

### 3.4 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	EP5RE Ver. 6.0.10, ES10 Ver. 2022.04.000

### 3.5 Testing Environment

Test Item	Test Date	Temperature (°C)	Relative Humidity (%)
6 dB Bandwidth	2025-07-03	24 ± 1	36 ± 3
Transmitter power spectral density	2025-07-03	24 ± 1	36 ± 3
Maximum peak conducted output power	2025-07-03	24 ± 1	36 ± 3
Unwanted emission	2025-07-03	24 ± 1	36 ± 3
Transmitter emission	2025-06-22, 2025-07-01	20 ± 1, 24 ± 1	30 ± 3, 34 ± 3

## 4. Technical Characteristic Test

## 4.1 6dB Bandwidth & 99% Bandwidth

## Test Procedures(ANSI C63.10-2013 6.9.2)

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## Test Procedures(ANSI C63.10-2013 6.9.3)

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

### Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz(6dB Bandwidth),  
30 kHz(99% Bandwidth)
- b) VBW  $\geq 3 \times$  RBW
- c) Detector = peak
- d) Trace mode = Max hold
- e) Sweep = auto couple
- f) Allow trace to fully stabilize
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## Limit :

6 dB Bandwidth > 500 kHz

## Test Data :

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]	Result
Low	2 401	0.696	1.060	Complies
Middle	2 440	0.687	1.078	Complies
High	2 480	0.702	1.072	Complies

See next pages for actual measured spectrum plots.


**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (9) / (28) Pages


## 6 dB Bandwidth[MHz]

Low channel

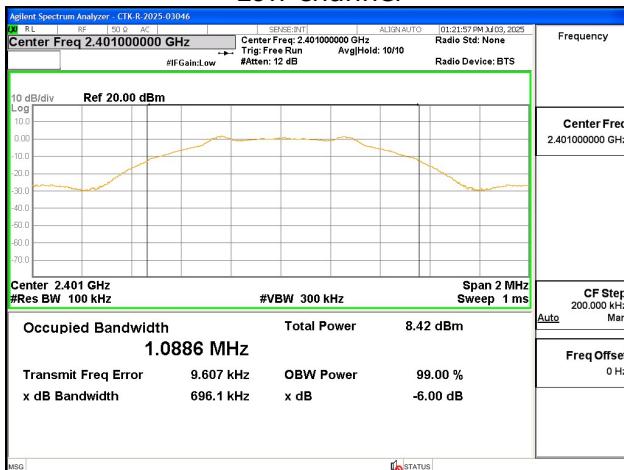


## 99% Bandwidth[MHz]


Low channel

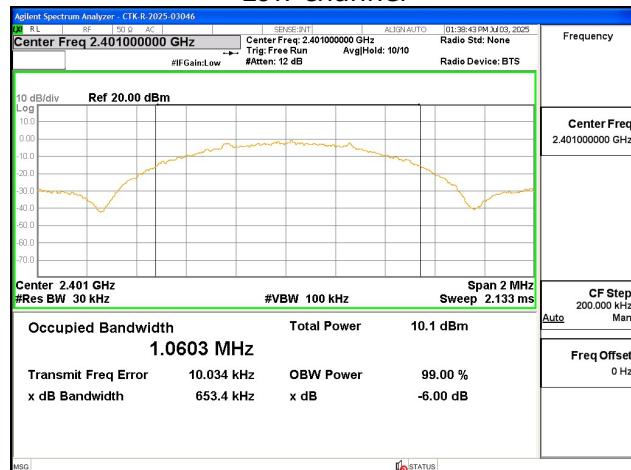


## Middle channel

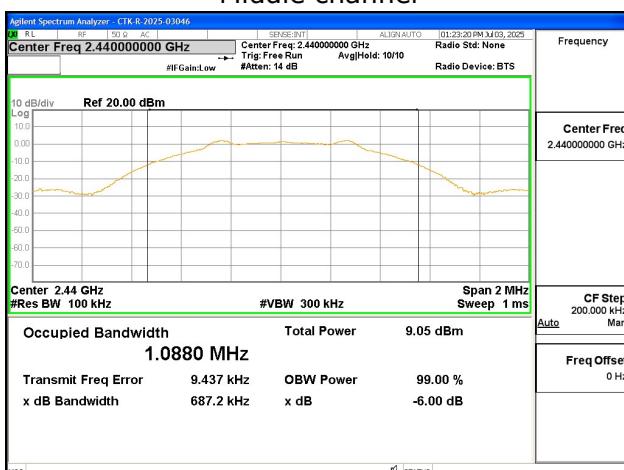


## Middle channel

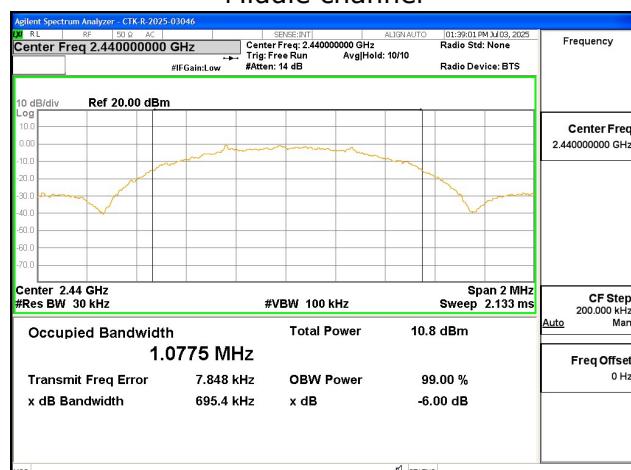

## High channel

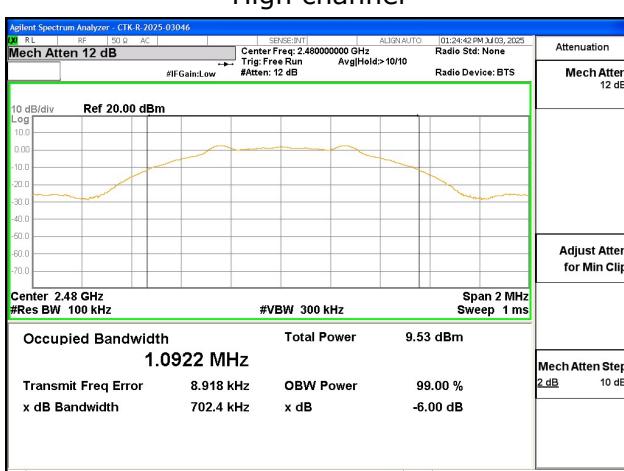

## High channel

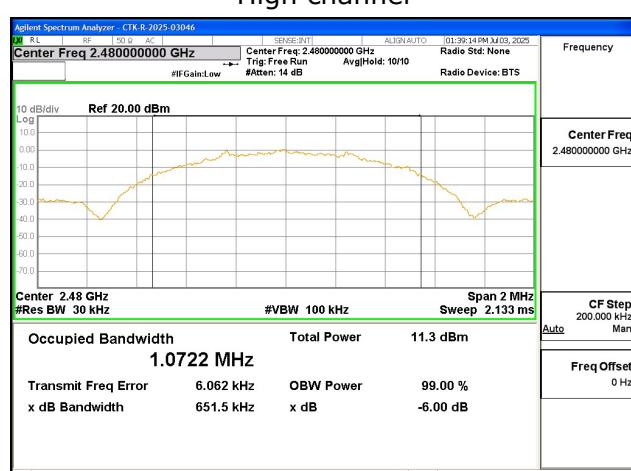

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (10) / (28) Pages

## 4.2 Maximum peak Conducted Output Power

### Test Procedures(ANSI C63.10-2013 11.9.1)

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth:

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

a) RBW $\geq$ DTS Bandwidth	b) VBW $\geq 3 \times$ RBW
c) span $\geq 3 \times$ RBW	d) Sweep time = auto couple
e) Detector = peak	f) Trace mode= max hold
g) Allow trace to fully stabilize	
h) Use peak marker function to determine the peak amplitude level.	

#### **Limit :**

---

Maximum Output Power < 1 W (30 dBm)

---

#### **Test Data :**

Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Low	2 401	2.462	30	Complies
Middle	2 440	3.074	30	Complies
High	2 480	3.521	30	Complies

See next pages for actual measured spectrum plots.




**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
**CTK-2025-02090**  
Page (11) / (28) Pages

## Output Power


### Low channel

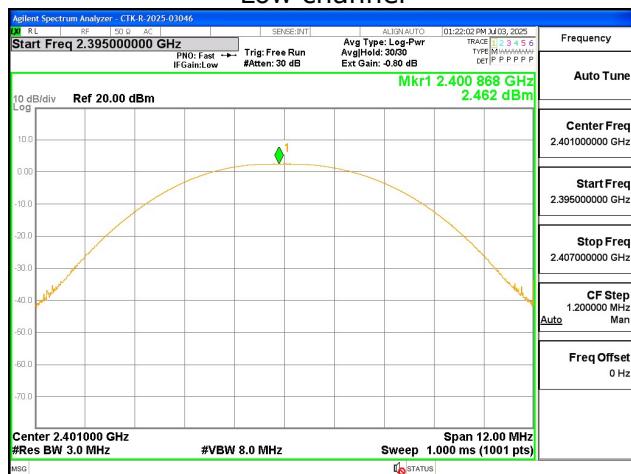

### Middle channel



### High channel

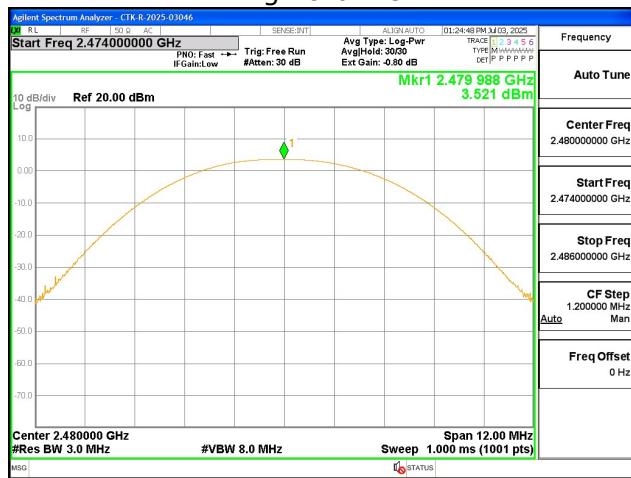

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (12) / (28) Pages

## 4.3 Power Spectral Density

### Test Procedures(ANSI C63.10-2013 11.10.2)

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW :  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- b) VBW  $\geq 3 \times \text{RBW}$
- c) span  $\geq 1.5 \times \text{DTS bandwidth}$
- d) Sweep time = auto couple
- e) Detector = peak
- f) Trace mode= max hold
- g) Allow trace to fully stabilize
- h) Use the peak marker function to determine the maximum amplitude level within the RBW.

#### Limit :

Power Spectral Density < 8 dBm @ 3 kHz BW

#### Test Data :

Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
Low	2 401	-6.260	8	Complies
Middle	2 440	-7.126	8	Complies
High	2 480	-8.477	8	Complies

See next pages for actual measured spectrum plots.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (13) / (28) Pages

## Power Spectral Density

### Low channel



### Middle channel



### High channel





**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (14) / (28) Pages

## 4.4 Band Edge & Conducted Spurious emission

### Test Procedures(ANSI C63.10-2013 11.11.3)

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW  $\geq 3 \times$  RBW
- c) Detector = peak
- d) Sweep time = auto couple
- e) Trace mode= max hold
- f) Allow trace to fully stabilize
- g) Use the peak marker function to determine the maximum amplitude level.

#### Limit :

Emission level < 20 dBc

#### **Test results: Complies**

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest in-band spectral density. Therefore the applying equipment meets the requirement.


See next pages for actual measured spectrum plots.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (15) / (28) Pages

### Conducted Band-Edge

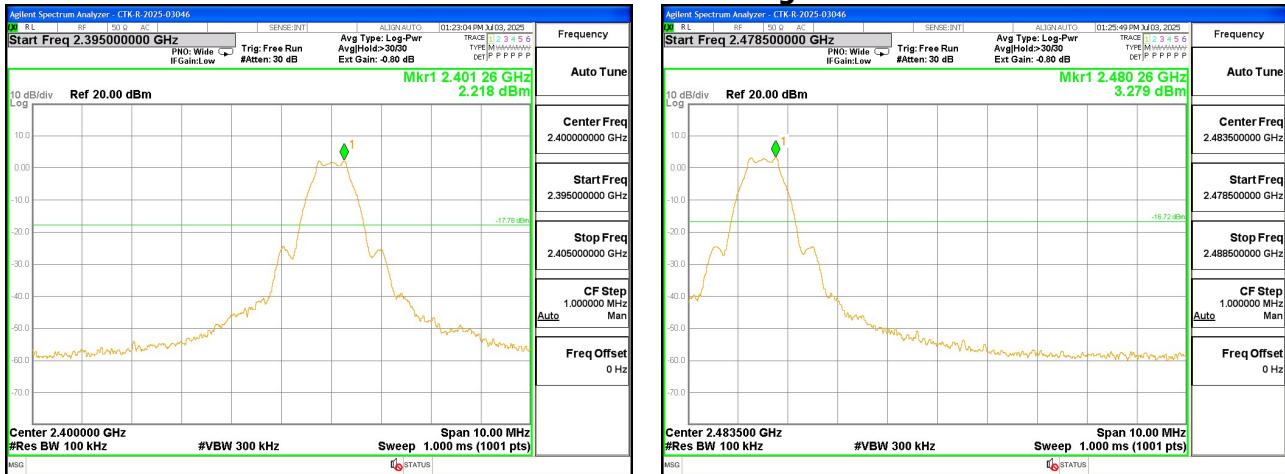

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (16) / (28) Pages

## Conducted Spurious Emission

### Low channel



### Middle channel



### High channel





**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (17) / (28) Pages

## 4.5 Radiated Emission

### Test Location

- 10 m SAC (test distance :  10 m,  3 m)
- 3 m SAC (test distance : 3 m)

### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

### Instrument Settings

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz
- b) VBW  $\geq$  RBW
- c) Sweep time = auto couple

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (18) / (28) Pages

**Limit :**

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

**Table 1. Restricted Frequency Bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
<sup>1</sup> 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475- 156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	<b>2310-2390</b>	9000-9200	<sup>2</sup> Above 38.6
8.362-8.366	37.5-38.25	322-335.4	<b>2483.5-2500</b>	9300-9500	

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (19) / (28) Pages

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 2. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**Table 2. General Field Strength Limits for Licence-Exempt Transmitters**

Frequency(MHz)	Field Strength ( $\mu$ A/m)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Measurement Distance (meters)
0.009-0.490	6.37/F (F in kHz)	2400/F(kHz)	48.5 - 13.8	300
0.490-1.705	63.7/F (F in kHz)	24000/F(kHz)	33.8 - 23	30
1.705-30	0.08	30	29.5	30
30-88	-	100**	40	3
88-216	-	150**	43.5	3
216-960	-	200**	46	3
Above 960	-	500	54	3


\*\* Except as provided in 15.209(g). fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dB $\mu$ V/m@3m (AV) and 74 dB $\mu$ V/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz and detector is peak for peak measurement and detector RMS and Trace Averaging type for average measurement.

**Test Setup:**

- 1) For field strength of emissions from 9 kHz to 30 MHz

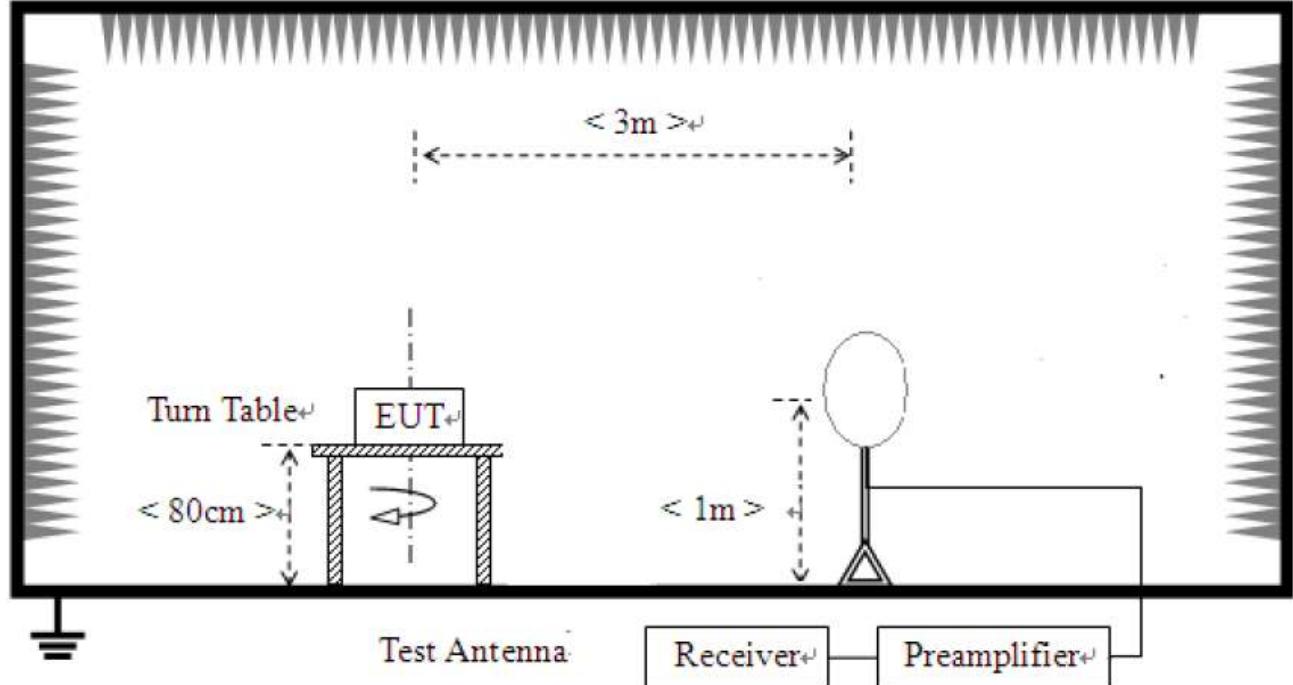

- 2) For field strength of emissions from 30 MHz to 1 GHz

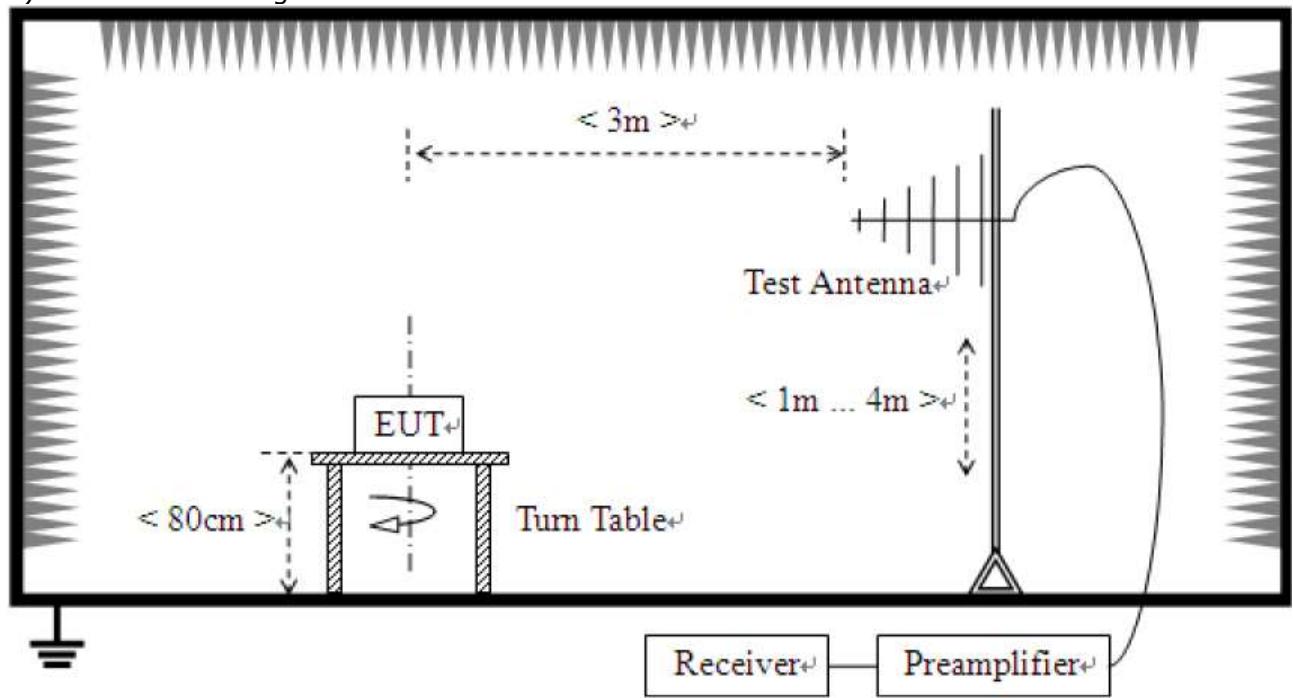




**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (21) / (28) Pages

3) For field strength of emissions above 1 GHz

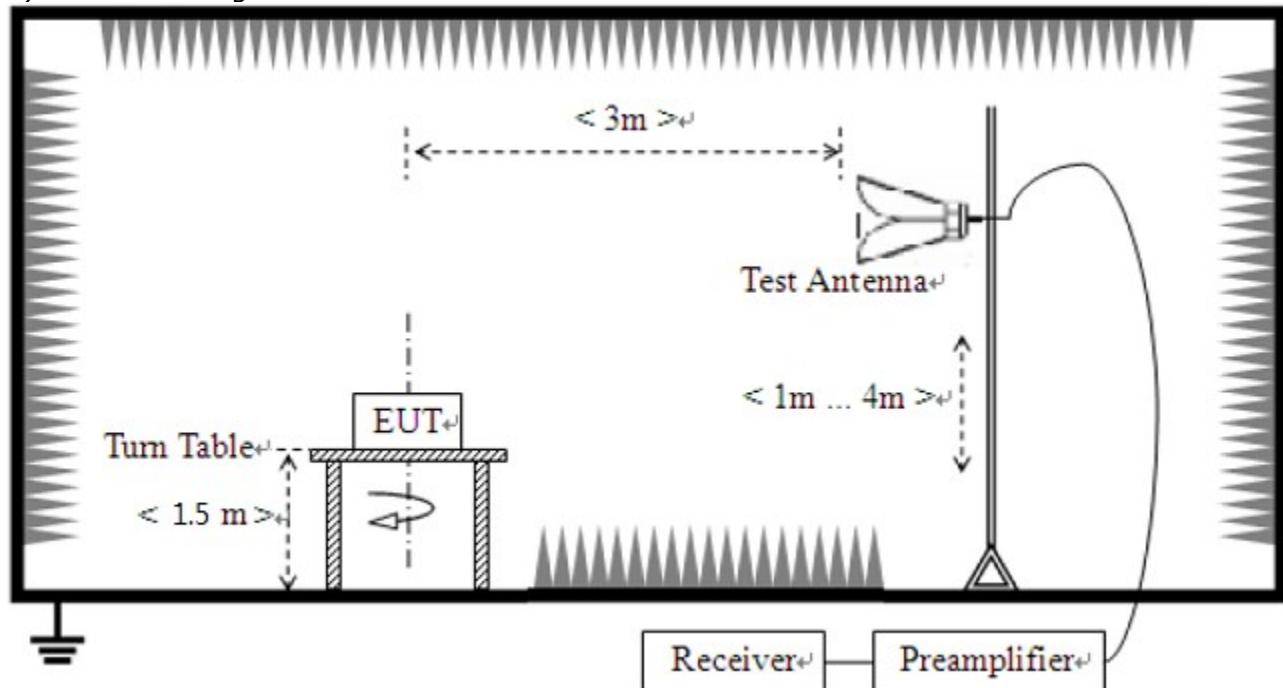

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (22) / (28) Pages


## Test results

### 1. 9 kHz to 30 MHz

#### Test mode : Transmit, Low Channel(Worst case)

The requirements are:

Complies

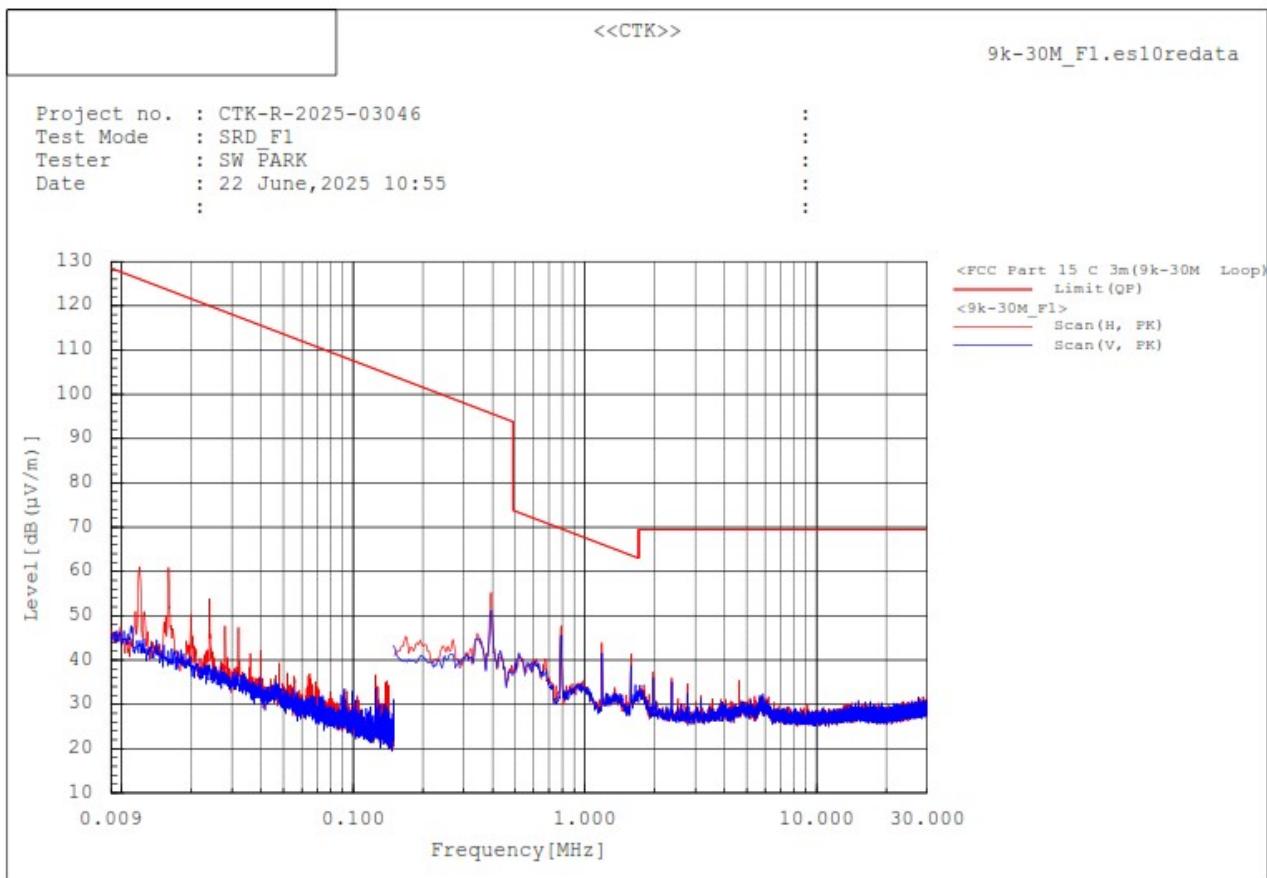

#### Note :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. The emissions were 20 dB lower than the limit.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (23) / (28) Pages


## 2. 30 MHz to 1 GHz

The requirements are:

Complies

**Test mode : Transmit, High Channel(Worst case)**

### Test Data

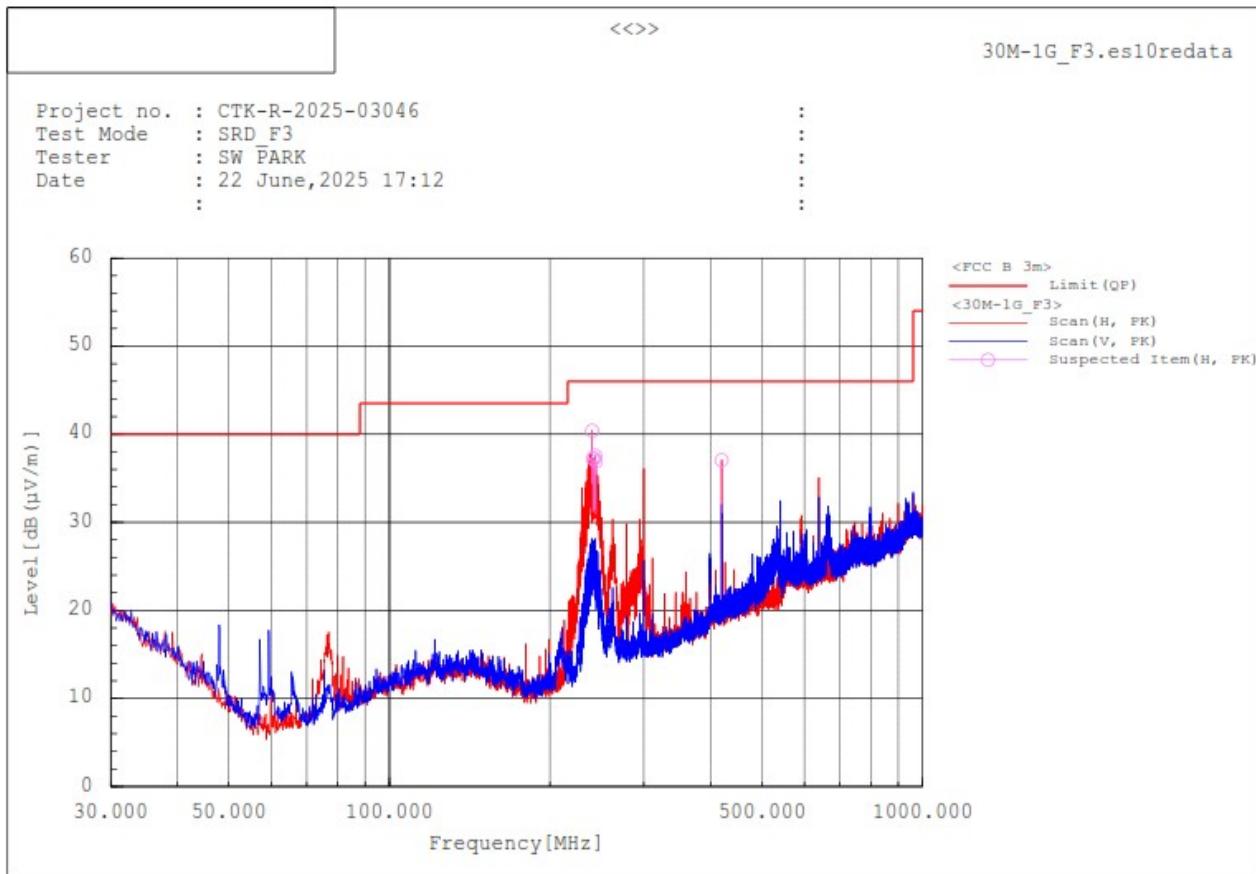

Spectrum Selection									
No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[deg]
1	240.005	H	52.3	-11.9	40.4	46.0	5.6	100.0	359.9
2	240.878	H	49.0	-11.8	37.2	46.0	8.8	100.0	154.5
3	242.236	H	49.0	-11.7	37.3	46.0	8.7	100.0	318.7
4	243.109	H	49.2	-11.6	37.6	46.0	8.4	100.0	305.0
5	243.885	H	48.4	-11.5	36.9	46.0	9.1	100.0	314.9
6	420.037	H	43.1	-6.0	37.1	46.0	8.9	100.0	301.2

### Remark :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2025-02090  
Page (24) / (28) Pages

### 3. 2 310 MHz to 2 390 MHz

The requirements are:

Complies

**Test mode : Transmit, Low Channel(Worst case)**

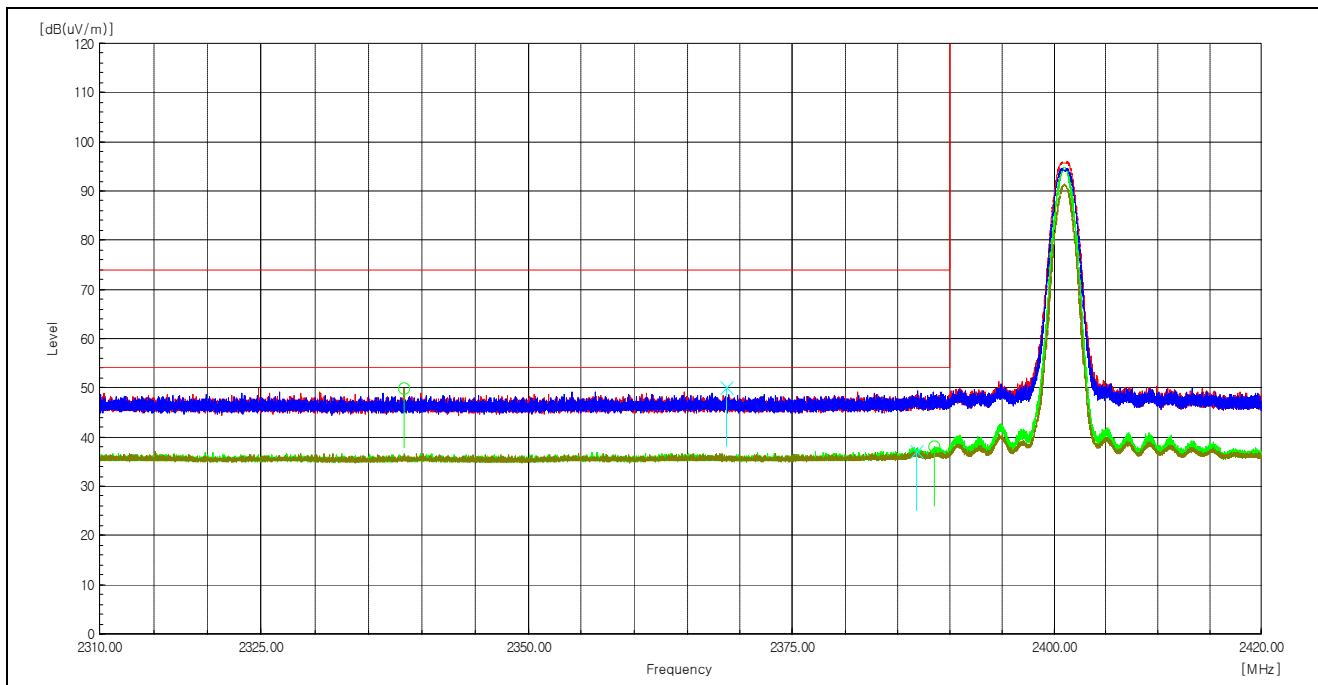

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 338.3	H	54.7	-4.8	49.9	-----	74.0	-----	24.1	-----	Peak
2 368.7	V	54.7	-4.7	50.0	-----	74.0	-----	24.0	-----	Peak
2 386.8	V	41.8	-4.6	-----	37.2	-----	54.0	-----	16.8	Average
2 388.6	H	42.7	-4.6	-----	38.1	-----	54.0	-----	15.9	Average

#### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2025-02090  
Page (25) / (28) Pages

## 4. 2 483.5 MHz – 2 500 MHz

The requirements are:

Complies

**Test mode : Transmit, High Channel(Worst case)**

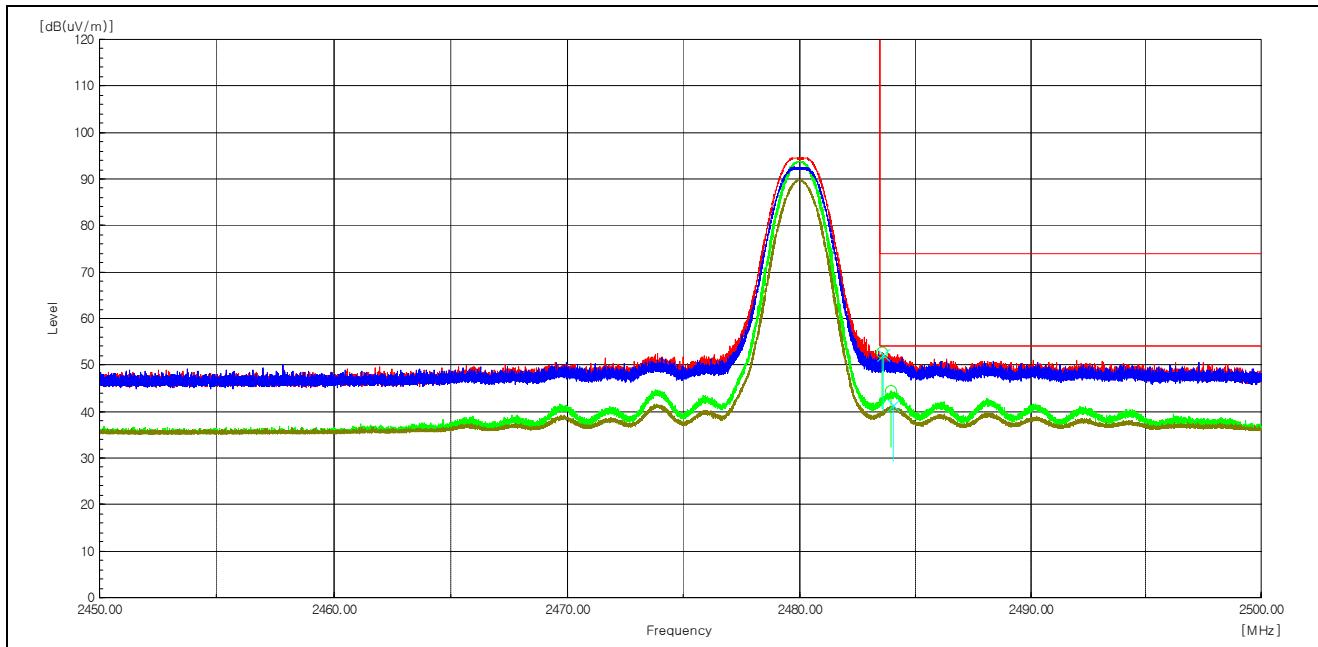

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 483.6	H	57.0	-4.2	52.8	-----	74.0	-----	21.2	-----	Peak
2 483.6	V	56.5	-4.2	52.3	-----	74.0	-----	21.7	-----	Peak
2 483.9	H	48.7	-4.2	-----	44.5	-----	54.0	-----	9.5	Average
2 484.0	V	45.6	-4.2	-----	41.4	-----	54.0	-----	12.6	Average

### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2025-02090  
Page (26) / (28) Pages

## 5. 1 GHz to 18 GHz

The requirements are:

Complies

**Test mode : Transmit, High Channel(Worst case)**

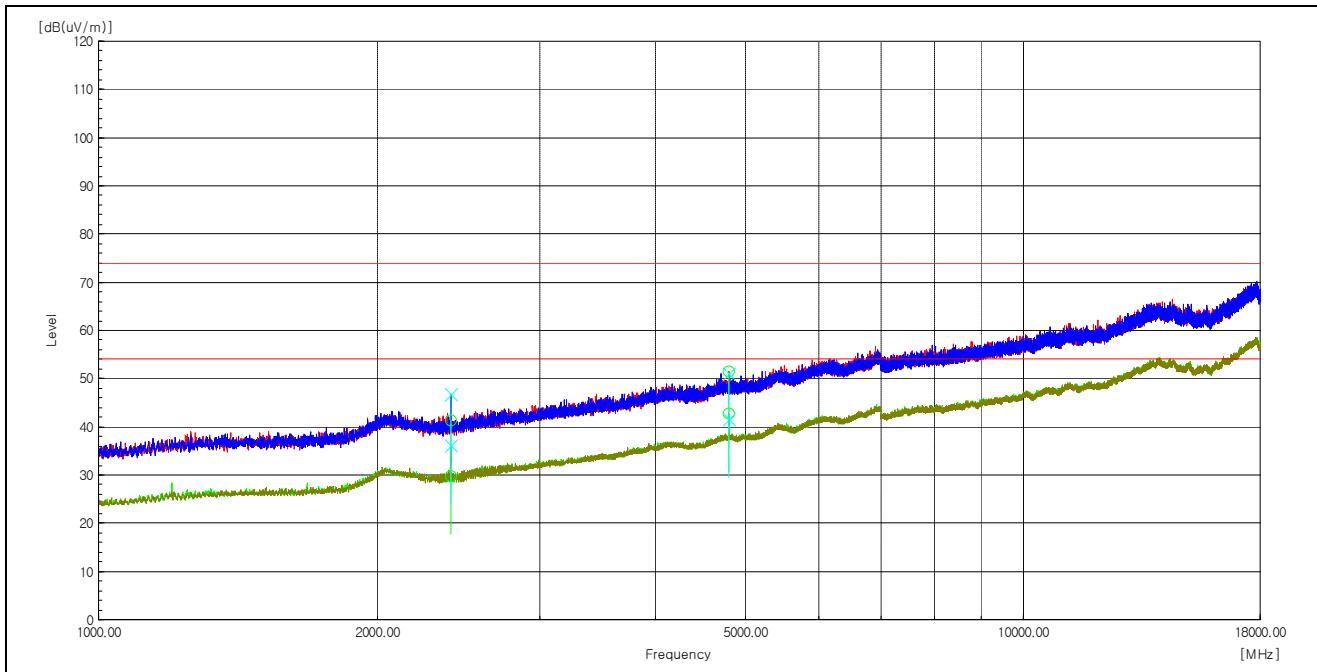

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 479.7	H	40.3	-4.3	-----	36.0	-----	54.0	-----	18.0	Fundamental
2 479.7	V	54.8	-4.3	50.5	-----	74.0	-----	23.5	-----	
2 479.7	V	44.8	-4.3	-----	40.5	-----	54.0	-----	13.5	
2 480.4	H	48.5	-4.3	44.2	-----	74.0	-----	29.8	-----	
4 959.8	H	48.5	3.8	52.3	-----	74.0	-----	21.7	-----	Peak
4 959.8	H	36.7	3.8	-----	40.5	-----	54.0	-----	13.5	Average
4 959.8	V	49.4	3.8	53.2	-----	74.0	-----	20.8	-----	Peak
4 959.8	V	39.6	3.8	-----	43.4	-----	54.0	-----	10.6	Average

### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.
5. Radiated Emission measured at 100 % duty cycle.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2025-02090  
Page (27) / (28) Pages

## 6. 18.0 GHz to 26.5 GHz

### Test mode : Transmit, High Channel(Worst case)

The requirements are:

Complies

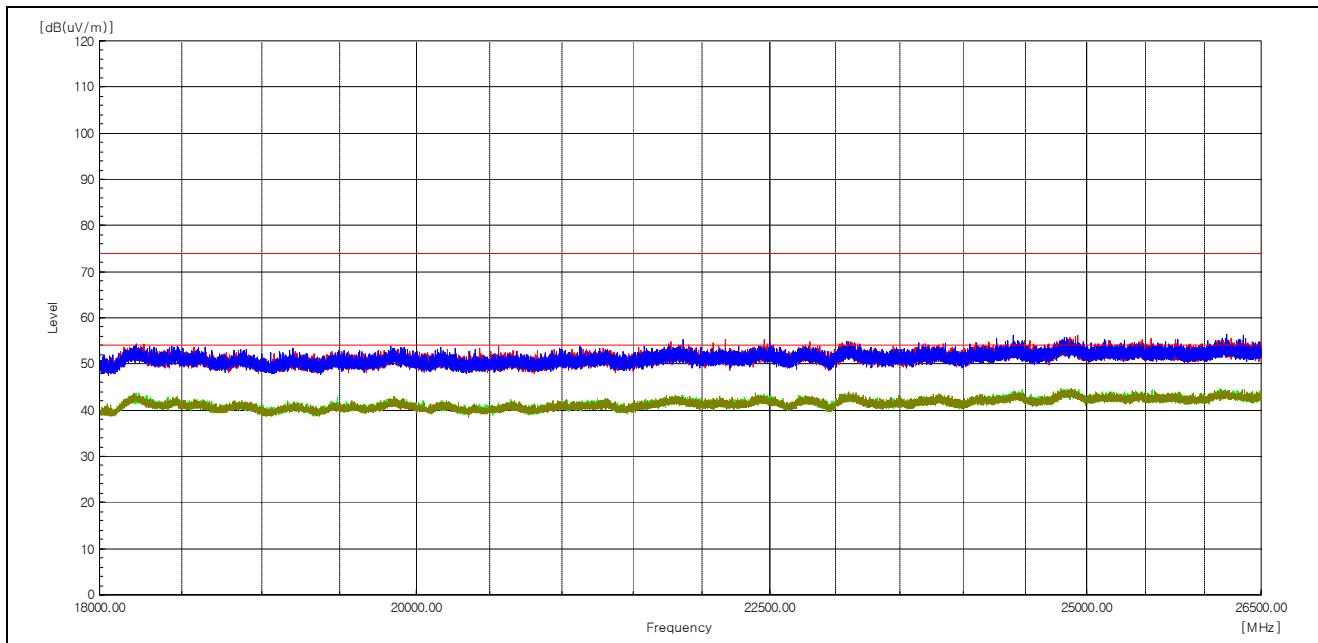

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

No Peak Data

#### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-02090  
Page (28) / (28) Pages

## APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY50510324	2024-11-26	2025-11-26
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2025-03-21	2026-03-21
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2025-04-28	2026-04-28
4	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2024-04-15	2026-04-15
5	Bilog Antenna	TESEQ	CBL6111D	60654	2023-08-21	2025-08-21
6	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2024-07-31	2025-07-31
7	ATTENUATOR	PASTERNACK	PE7AP006-06	L20210504000023	2024-07-31	2025-07-31
8	ATTENUATOR	NONE	6dB	190557	2024-09-19	2025-09-19
9	Preamplifier	Agilent	8449B	3008A00620	2025-03-11	2026-03-11
10	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2025-03-13	2026-03-13
11	Horn Antenna	SCHWARZBECK	BBHA9170	01153	2024-10-18	2025-10-18
12	Low Noise Amplifier	TESTEK	TK-PA1840H	210124-L	2024-10-18	2025-10-18
13	Band Reject Filter	Micro Tronics	BRM50702	G233	2024-11-25	2025-11-25
14	Spectrum Analyzer	Rohde & Schwarz	FSV40	101574	2025-01-10	2026-01-10
15	DC Power Supply	Agilent	E3642A	US37462767	2024-11-25	2025-11-25

No.	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable(conducted)	Junkosha Inc.	MWX221	2008S240	2025-06-22
2	RF Cable (9kHz-1GHz Radiated)	Canare Corporation	L-5D2W	N/A	2025-03-05
3	RF Cable (9kHz-1GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2025-03-05
4	RF Cable (1GHz-18GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2025-02-21
5	RF Cable (1GHz-18GHz Radiated)	Rosenberger	NONE	1520.9927.00	2025-02-21
6	RF Cable (1GHz-18GHz Radiated)	Sensorview Co., LTD	9S18	TPC2204060007	2025-02-21
7	RF Cable (18GHz-26.5GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2372/2	2025-02-21
8	RF Cable (18GHz-26.5GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY073/2	2025-02-21
9	RF Cable (18GHz-26.5GHz Radiated)	Sensorview Co., LTD	9S40	TP210713-001	2025-02-21

**-END-**