

TEST REPORT

FCC ID: 2AFX2VB603-R

Product: Digital Video Baby Monitor

Model No.: VB603

Additional Model No.: N/A

Trade Mark: FEELSTORM

Report No.: TCT170515E011

Issued Date: May 23, 2017

Issued for:

Shenzhen Feelstorm Technology Co., Ltd

**5F, Block C, HUAWAN Industrial PARK, BaoAn DaDao No. 119,
BaoAn District, Shenzhen, China**

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification.....	3
2. Test Result Summary.....	4
3. EUT Description.....	5
4. Genera Information.....	6
4.1. Test environment and mode.....	6
4.2. Description of Support Units.....	6
5. Facilities and Accreditations.....	7
5.1. Facilities.....	7
5.2. Location.....	7
5.3. Measurement Uncertainty.....	7
6. Test Results and Measurement Data.....	8
6.1. Antenna requirement.....	8
6.2. Conducted Emission.....	9
6.3. Conducted Output Power.....	13
6.4. 20dB Occupy Bandwidth.....	16
6.5. Carrier Frequencies Separation.....	19
6.6. Hopping Channel Number.....	22
6.7. Dwell Time.....	25
6.8. Pseudorandom Frequency Hopping Sequence.....	27
6.9. Conducted Band Edge Measurement.....	28
6.10. Conducted Spurious Emission Measurement.....	30
6.11. Radiated Spurious Emission Measurement.....	32

Appendix A: Photographs of Test Setup**Appendix B: Photographs of EUT**

1. Test Certification

Product:	Digital Video Baby Monitor
Model No.:	VB603
Additional Model No.:	N/A
Trade Mark:	FEELSTORM
Applicant:	Shenzhen Feelstorm Technology Co., Ltd
Address:	5F, Block C, HUAWAN Industrial PARK, BaoAn DaDao No. 119, BaoAn District, Shenzhen, China
Manufacturer:	Shenzhen Feelstorm Technology Co., Ltd
Address:	5F, Block C, HUAWAN Industrial PARK, BaoAn DaDao No. 119, BaoAn District, Shenzhen, China
Date of Test:	May 16, 2017 – May 22, 2017
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Brews Xu

Date: May 22, 2017

Brews Xu

Reviewed By:

Joe Zhou

Date: May 23, 2017

Joe Zhou

Approved By:

Tomsin

Date: May 23, 2017

Tomsin

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(1) §2.1046	PASS
20dB Occupied Bandwidth	§15.247 (a)(1) §2.1049	PASS
Carrier Frequencies Separation	§15.247 (a)(1)	PASS
Hopping Channel Number	§15.247 (a)(1)	PASS
Dwell Time	§15.247 (a)(1)	PASS
Radiated Emission	§15.205/§15.209 §2.1053, §2.1057	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product:	Digital Video Baby Monitor
Model No.:	VB603
Additional Model No.:	N/A
Trade Mark:	FEELSTORM
Operation Frequency:	2415MHz~2460MHz
Number of Channel:	16
Modulation Type:	GFSK
Modulation Technology:	FHSS
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi
Power Supply:	Rechargeable Li-ion battery DC 3.7V
AC adapter:	Adapter Information: Model: ZD5C050100USW Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 5.0V, 1000mA

Operation Frequency each of channel for GFSK

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2415MHz	5	2427MHz	9	2439MHz	13	2451MHz
2	2418MHz	6	2430MHz	10	2442MHz	14	2454MHz
3	2421MHz	7	2433MHz	11	2445MHz	15	2457MHz
4	2424MHz	8	2436MHz	12	2448MHz	16	2460MHz

Remark: Channel 0, 8 & 16 have been tested for GFSK modulation mode.

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery
<p>The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
------------------------------	-------------------------------------

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:	
-----------------------	--

The Bluetooth antenna is a PCB antenna which permanently attached, and the best case gain of the antenna is 2dBi.

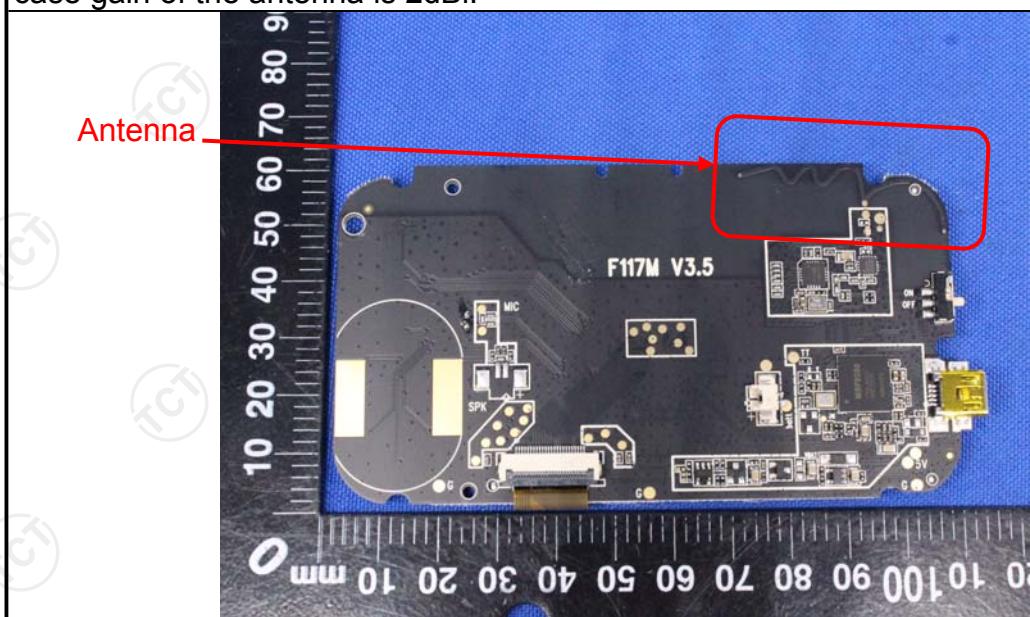

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p>Reference Plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Refer to item 4.1														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 														
Test Result:	PASS														


6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Aug. 11, 2017
LISN	Schwarzbeck	NSLK 8126	8126453	Aug. 16, 2017
Coax cable (9KHz-40GHz)	TCT	CE-05	N/A	Aug. 11, 2017
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test data

**Please refer to following diagram for individual
Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)**

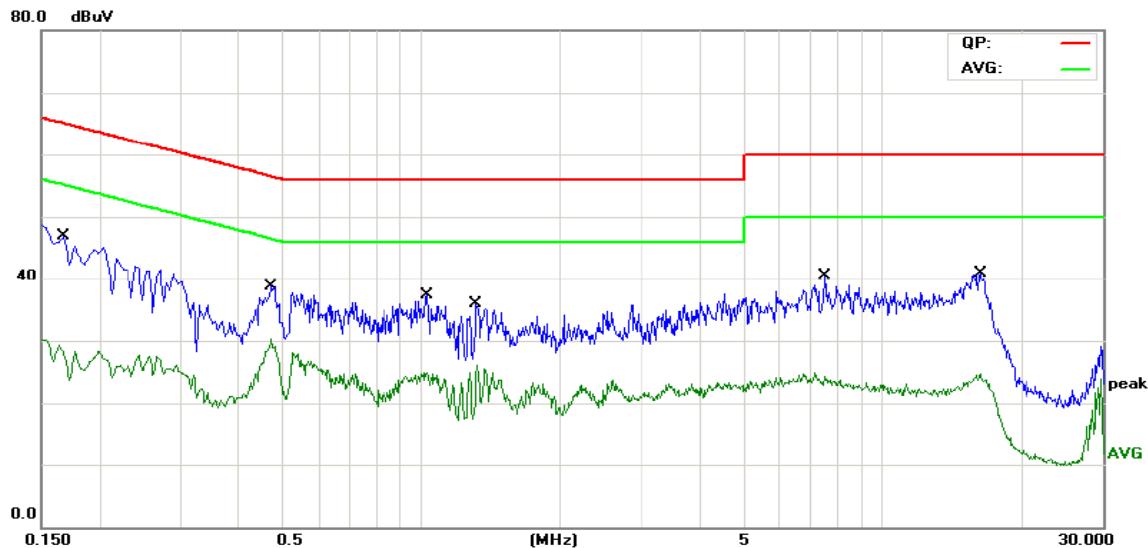

Site: Chamber #2 Phase: **L1** Temperature: 26 (C)
Limit: FCC Part 15B Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1680	35.37	11.49	46.86	65.05	-18.19	QP	
2		0.1680	17.81	11.49	29.30	55.05	-25.75	AVG	
3		0.4739	27.43	11.32	38.75	56.45	-17.70	QP	
4 *		0.4739	18.92	11.32	30.24	46.45	-16.21	AVG	
5		1.0274	26.03	11.22	37.25	56.00	-18.75	QP	
6		1.0274	13.71	11.22	24.93	46.00	-21.07	AVG	
7		1.3200	24.50	11.37	35.87	56.00	-20.13	QP	
8		1.3200	14.77	11.37	26.14	46.00	-19.86	AVG	
9		7.5255	29.43	11.02	40.45	60.00	-19.55	QP	
10		7.5255	13.95	11.02	24.97	50.00	-25.03	AVG	
11		16.2779	29.40	11.42	40.82	60.00	-19.18	QP	
12		16.2779	13.24	11.42	24.66	50.00	-25.34	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Q.P. = Quasi-Peak

AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

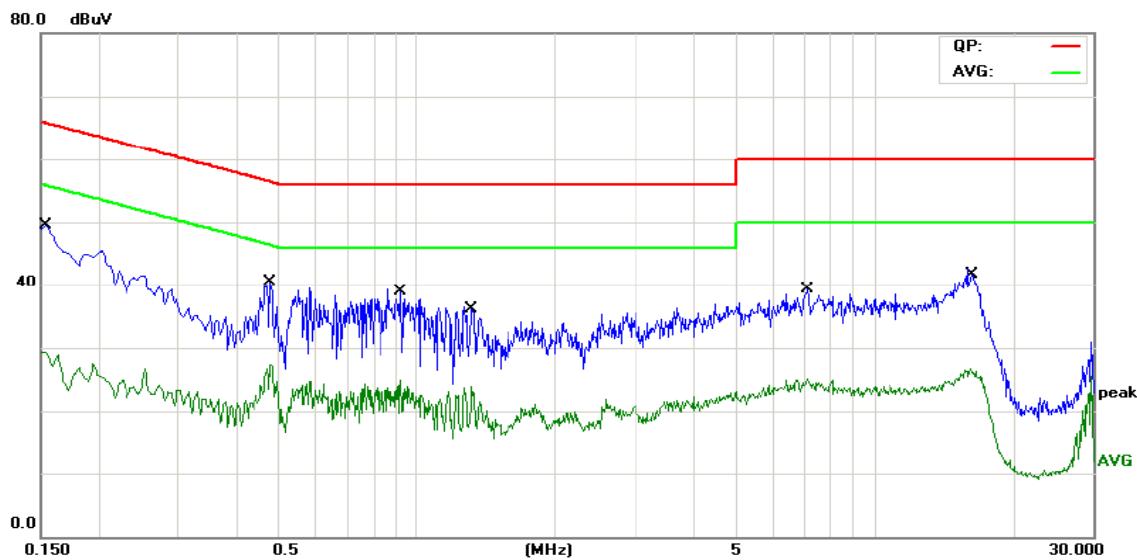

Site Chamber #2 Phase: **N** Temperature: 26 (C)
Limit: FCC Part 15B Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
			dBuV	dB	dBuV	dB	Detector	
1		0.1544	38.07	11.49	49.56	65.75	-16.19	QP
2		0.1544	17.78	11.49	29.27	55.75	-26.48	AVG
3 *		0.4785	29.22	11.32	40.54	56.36	-15.82	QP
4		0.4785	15.93	11.32	27.25	46.36	-19.11	AVG
5		0.9194	27.68	11.22	38.90	56.00	-17.10	QP
6		0.9194	13.69	11.22	24.91	46.00	-21.09	AVG
7		1.3154	24.69	11.37	36.06	56.00	-19.94	QP
8		1.3154	12.59	11.37	23.96	46.00	-22.04	AVG
9		7.1565	28.36	10.96	39.32	60.00	-20.68	QP
10		7.1565	14.22	10.96	25.18	50.00	-24.82	AVG
11		16.2105	31.29	11.44	42.73	60.00	-17.27	QP
12		16.2105	15.20	11.44	26.64	50.00	-23.36	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) - Limits (dB μ V)

Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.3. Conducted Output Power

6.3.1. Test Specification

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017
RF Cable (9KHz-40GHz)	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	7.27	21.00	PASS
Middle	8.14	21.00	PASS
Highest	8.78	21.00	PASS

Test plots as follows:


Lowest channel

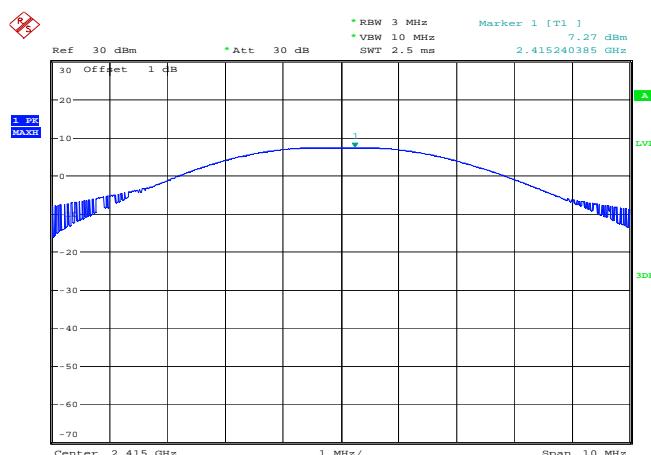

Middle channel

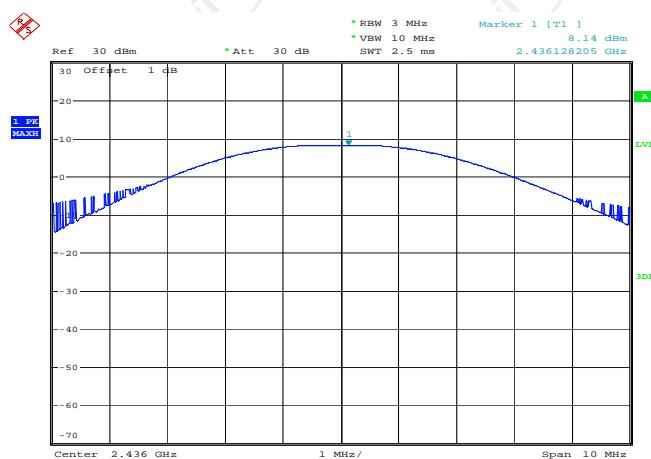

Highest channel

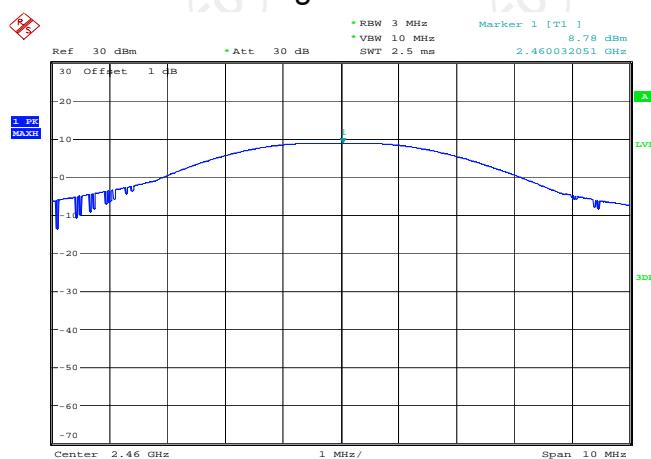

6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows ANSI C63.10:2013 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 5. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017
RF Cable (9KHz-40GHz)	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.4.3. Test data

Test channel	20dB Occupy Bandwidth (kHz)	
	GFSK	Conclusion
Lowest	2075.32	PASS
Middle	2075.32	PASS
Highest	2067.31	PASS


Test plots as follows:

Lowest channel

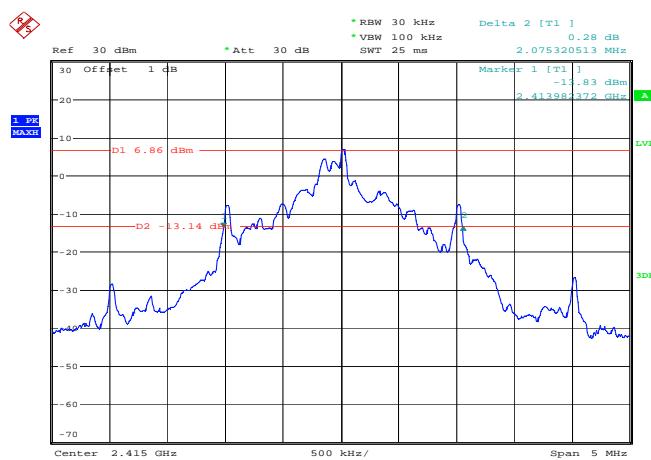


Date: 19.MAY.2017 17:28:00

Middle channel

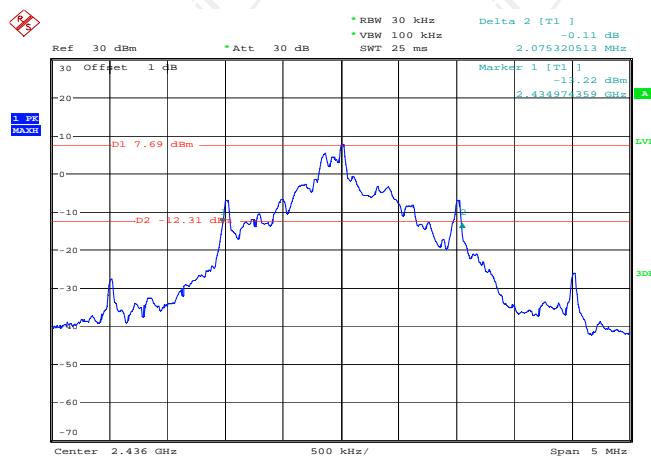

Date: 19.MAY.2017 17:29:18


Highest channel

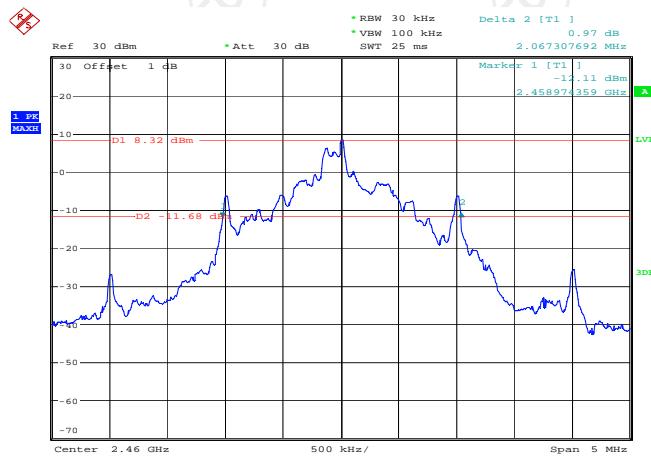

Date: 19.MAY.2017 17:30:40

6.5. Carrier Frequencies Separation

6.5.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Hopping mode
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows ANSI C63.10:2013 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Test Result:	PASS

6.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017
RF Cable (9KHz-40GHz)	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.5.3. Test data


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	3012.82	1383.55	PASS
Middle	3012.82	1383.55	PASS
Highest	3012.82	1383.55	PASS

Note: According to section 6.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	2075.32	1383.55

Test plots as follows:

Lowest channel

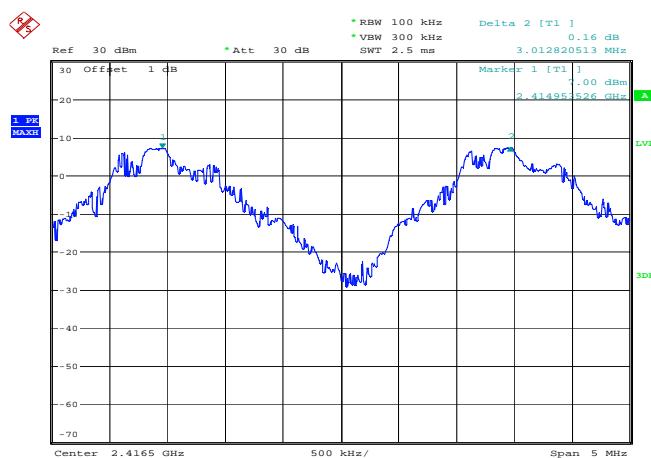

Date: 19.MAY.2017 18:06:09

Middle channel



Date: 19.MAY.2017 18:09:55


Highest channel



Date: 19.MAY.2017 18:14:43

6.6. Hopping Channel Number

6.6.1. Test Specification

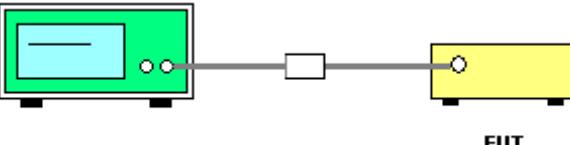Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Hopping mode
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows ANSI C63.10:2013 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 6. The number of hopping frequency used is defined as the number of total channel. 7. Record the measurement data in report.
Test Result:	PASS

6.6.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017
RF Cable (9KHz-40GHz)	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.6.3. Test data

Mode	Hopping channel numbers	Limit	Result
GFSK	16	15	PASS

Test plots as follows:


GFSK

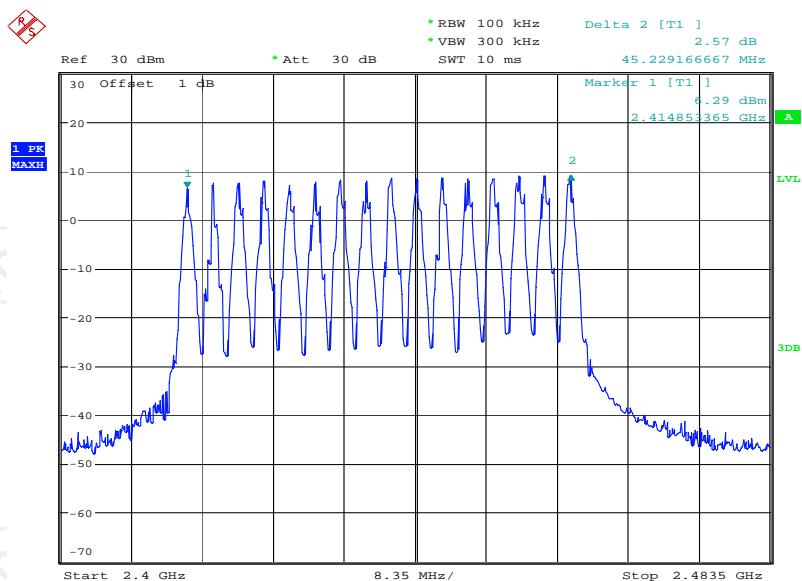

Date: 19.MAY.2017 17:54:42

6.7. Dwell Time

6.7.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Hopping mode
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows ANSI C63.10:2013 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel; VBW\geqRBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. 6. Measure and record the results in the test report.
Test Result:	PASS

6.7.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017
RF Cable (9KHz-40GHz)	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017



Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.7.3. Test Data

Mode	Package Transfer Time (ms)	Dwell time (second)	Limit (second)	Result
GFSK	0.529	0.007	0.4	PASS

Note: 1. Dwell Time(s) = $=(\text{Total Transfer Time (ms)}/100(\text{ms})) \times \text{hopping number} \times 0.4$

Test plots as follows:

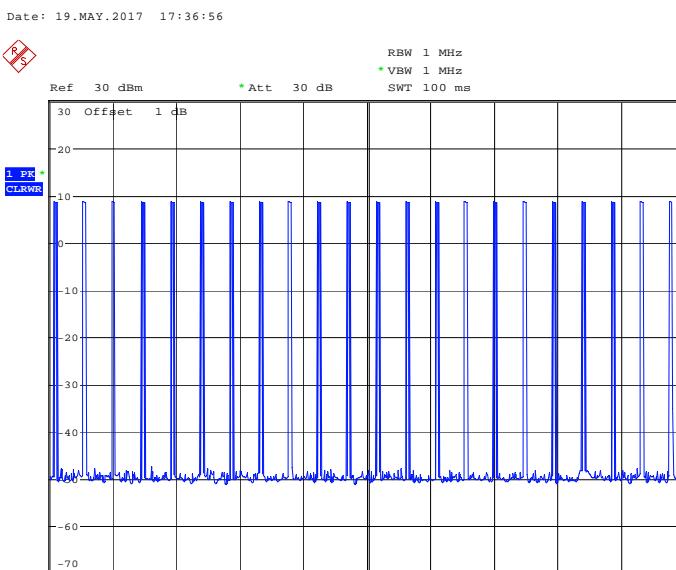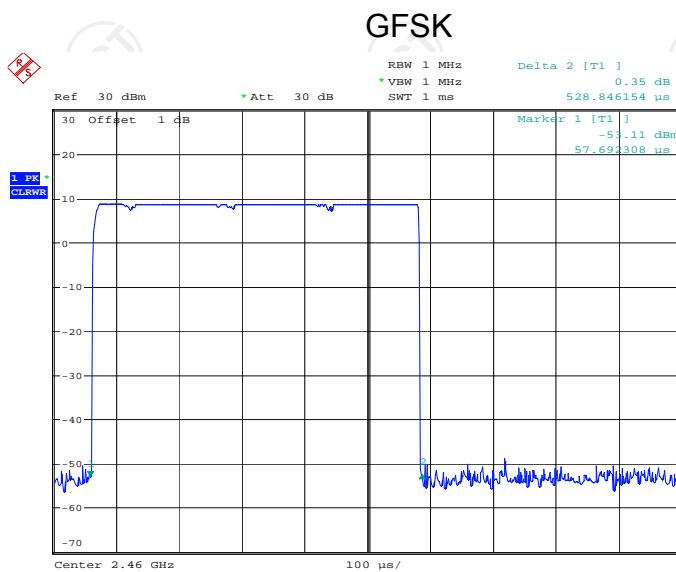

Date: 19.MAY.2017 17:37:27

6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
--------------------------	--


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence
--


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

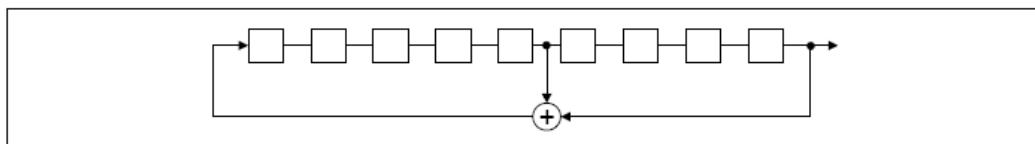

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

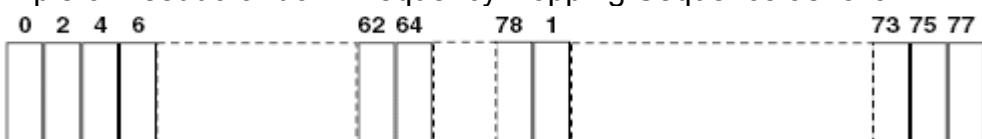


Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

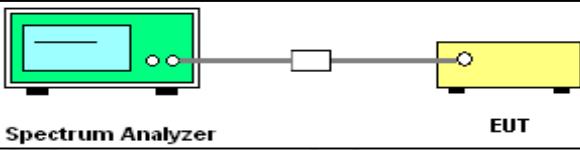Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 <p>Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2013 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz (\geqRBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS





6.9.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017
RF Cable (9KHz-40GHz)	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


6.9.3. Test Data

GFSK Modulation

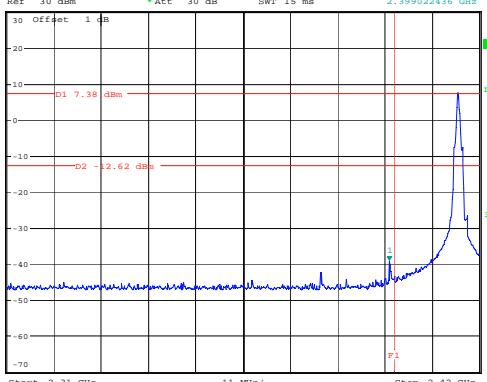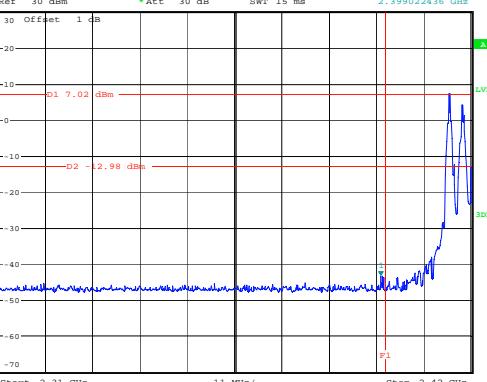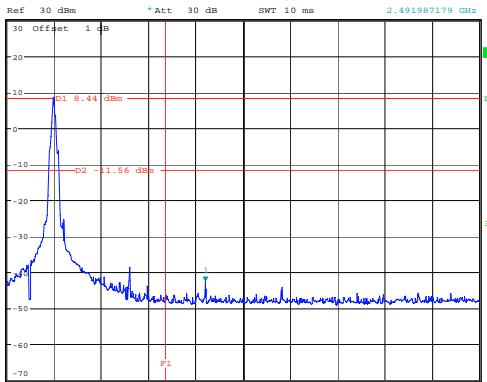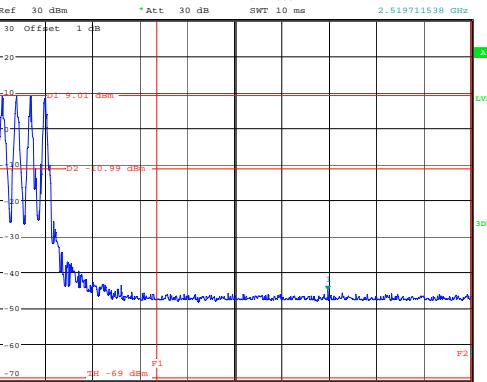Test channel:	Lowest channel
 <p>Ref 30 dBm * Att 30 dB SWT 15 ms 2.399022436 GHz</p> <p>Marker 1 [T1] -39.13 dBm</p> <p>RBW 100 kHz VBM 300 kHz</p> <p>1. PP MAXI</p> <p>30 Offset 1 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>D1 7.38 dBm D2 -12.62 dBm</p> <p>Start 2.31 GHz 11 MHz/ Stop 2.42 GHz</p> <p>Date: 19.MAY.2017 19:00:39</p>	 <p>Ref 30 dBm * Att 30 dB SWT 15 ms 2.399022436 GHz</p> <p>Marker 1 [T1] -43.34 dBm</p> <p>RBW 100 kHz VBM 300 kHz</p> <p>1. PP MAXI</p> <p>30 Offset 1 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>D1 7.02 dBm D2 -12.98 dBm</p> <p>Start 2.31 GHz 11 MHz/ Stop 2.42 GHz</p> <p>Date: 19.MAY.2017 18:22:17</p>
No-hopping mode	Hopping mode
Test channel:	Highest channel
 <p>Ref 30 dBm * Att 30 dB SMT 10 ms 2.491987179 GHz</p> <p>Marker 1 [T1] -42.68 dBm</p> <p>RBW 100 kHz VBM 300 kHz</p> <p>1. PP MAXI</p> <p>30 Offset 1 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>D1 8.44 dBm D2 -11.56 dBm</p> <p>Start 2.45 GHz 10 MHz/ Stop 2.55 GHz</p> <p>Date: 19.MAY.2017 19:06:15</p>	 <p>Ref 30 dBm * Att 30 dB SMT 10 ms 2.519711538 GHz</p> <p>Marker 1 [T1] -45.04 dBm</p> <p>RBW 100 kHz VBM 300 kHz</p> <p>1. PP MAXI</p> <p>30 Offset 1 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>D1 9.01 dBm D2 -10.99 dBm</p> <p>Start 2.45 GHz 10 MHz/ Stop 2.55 GHz</p> <p>Date: 19.MAY.2017 18:31:47</p>
No-hopping mode	Hopping mode

6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2013 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

6.10.2. Test Instruments


RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017
RF Cable (9KHz-40GHz)	TCT	RE-06	N/A	Aug. 12, 2017
Antenna Connector	TCT	RFC-01	N/A	Aug. 12, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.10.3. Test Data


GFSK mode

Lowest Channel

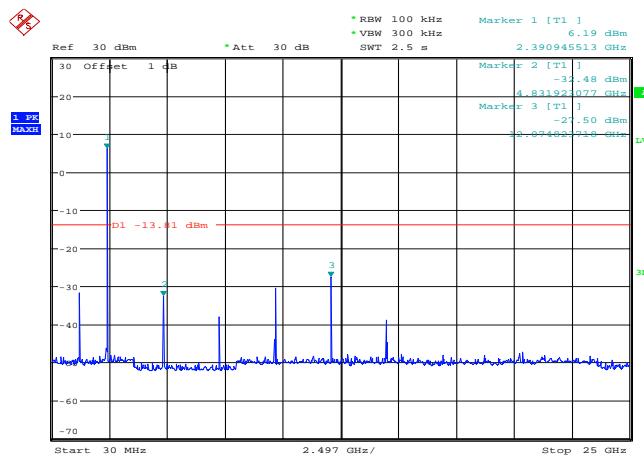


Date: 22.MAY.2017 10:05:34

Middle Channel

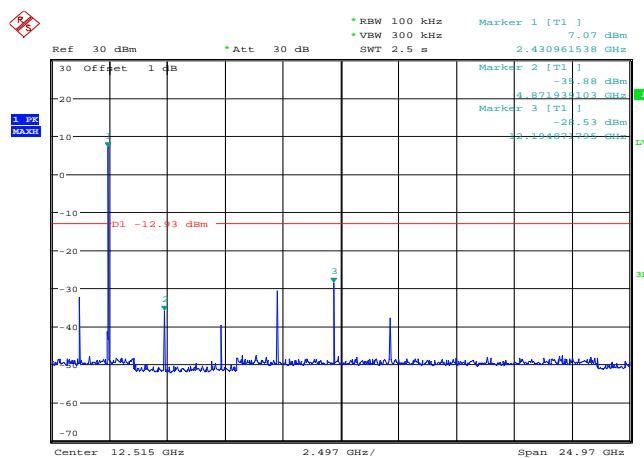

Date: 22.MAY.2017 10:09:47


Highest Channel


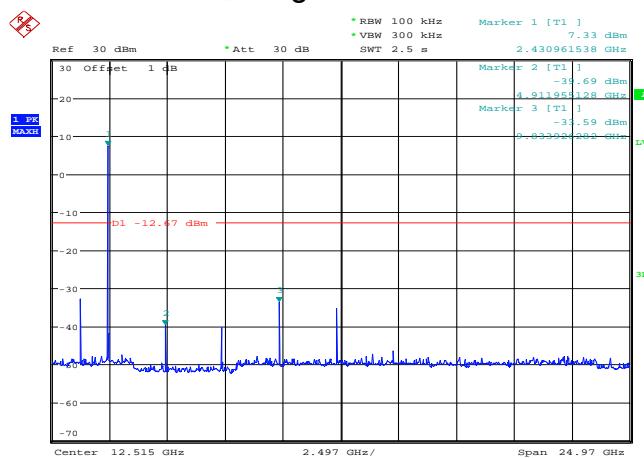


Date: 22.MAY.2017 10:11:01

6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

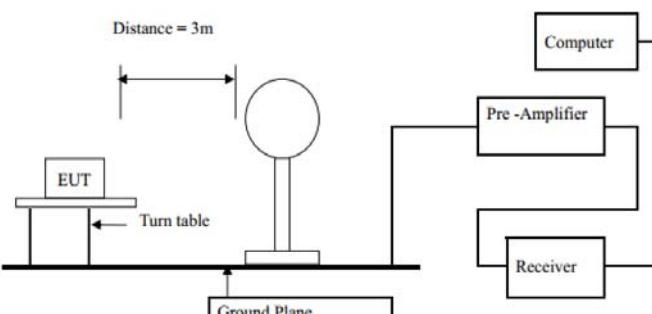Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Field Strength (microvolts/meter)		Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)		300	
	0.490-1.705	24000/F(KHz)		30	
	1.705-30	30		30	
	30-88	100		3	
	88-216	150		3	
	216-960	200		3	
	Above 960	500		3	
Test setup:	For radiated emissions below 30MHz  30MHz to 1GHz				

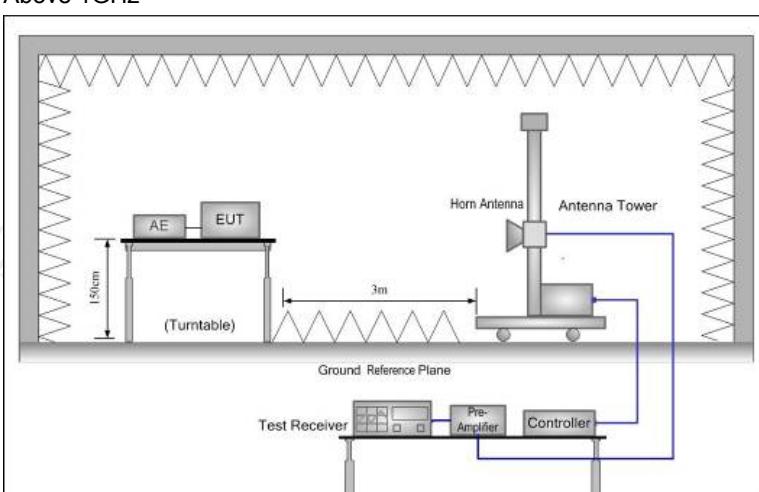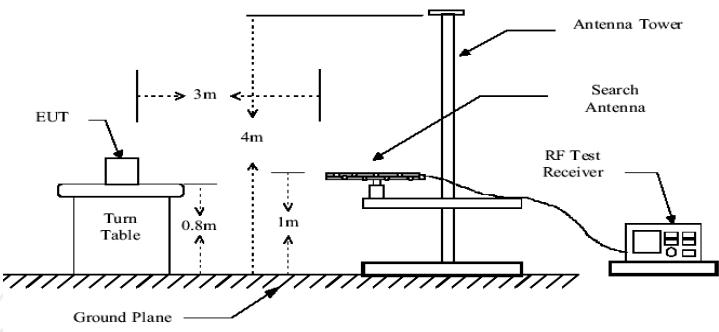

Test Mode:	Transmitting mode with modulation
Test Procedure:	<p>1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2013 Measurement Guidelines.</p> <p>2. For the radiated emission test below 1GHz: The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.</p> <p>For the radiated emission test above 1GHz: Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT,</p>

	<p>depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Set to the maximum power setting and enable the EUT transmit continuously.</p> <p>4. Use the following spectrum analyzer settings:</p> <ol style="list-style-type: none"> (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold for peak (3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N1 \cdot L1 + N2 \cdot L2 + \dots + Nn-1 \cdot L_{Nn-1} + Nn \cdot L_n$ Where $N1$ is number of type 1 pulses, $L1$ is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
Test results:	PASS

6.11.2. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Aug. 11, 2017
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Aug. 11, 2017
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 12, 2017
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Aug. 11, 2017
Pre-amplifier	HP	8447D	2727A05017	Aug. 11, 2017
Loop antenna	ZHINAN	ZN30900A	12024	Aug. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	340	Aug. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Aug. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9170	373	Aug. 13, 2017
Antenna Mast	CCS	CC-A-4M	N/A	N/A
Coax cable (9KHz-40GHz)	TCT	RE-low-01	N/A	Aug. 11, 2017
Coax cable (9KHz-40GHz)	TCT	RE-high-02	N/A	Aug. 11, 2017
Coax cable (9KHz-40GHz)	TCT	RE-low-03	N/A	Aug. 11, 2017
Coax cable (9KHz-40GHz)	TCT	RE-high-04	N/A	Aug. 11, 2017
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.11.3. Test Data


Duty cycle correction factor for average measurement

On time (One Pulse) Plot on Channel 15

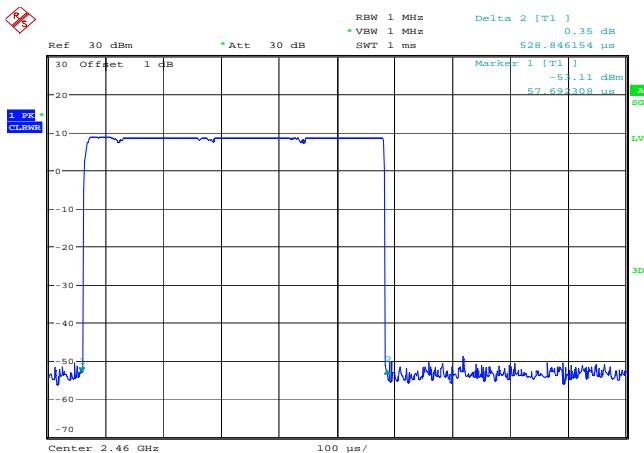

Date: 19.MAY.2017 17:36:56

On time (Count Pulses) Plot on Channel 15

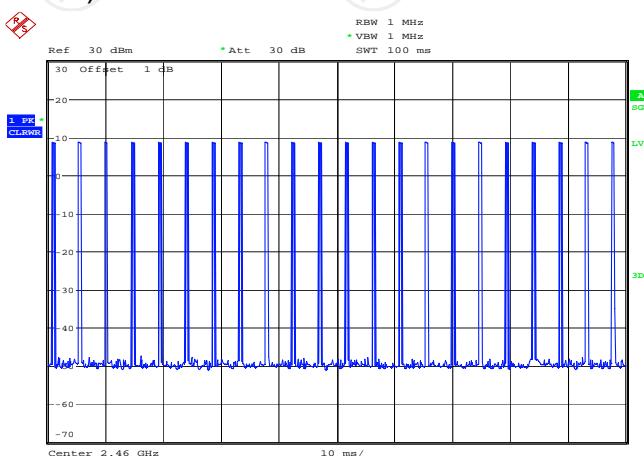

Date: 19.MAY.2017 17:37:27


Note:

1. Worst case Duty cycle = on time/100 milliseconds = $0.529*22/100 = 0.1164$
2. Worst case Duty cycle correction factor = $20*\log(\text{Duty cycle}) = -18.68\text{dB}$
3. The average levels were calculated from the peak level corrected with duty cycle correction factor (-18.68dB) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

Please refer to following diagram for individual

Below 1GHz


Horizontal:

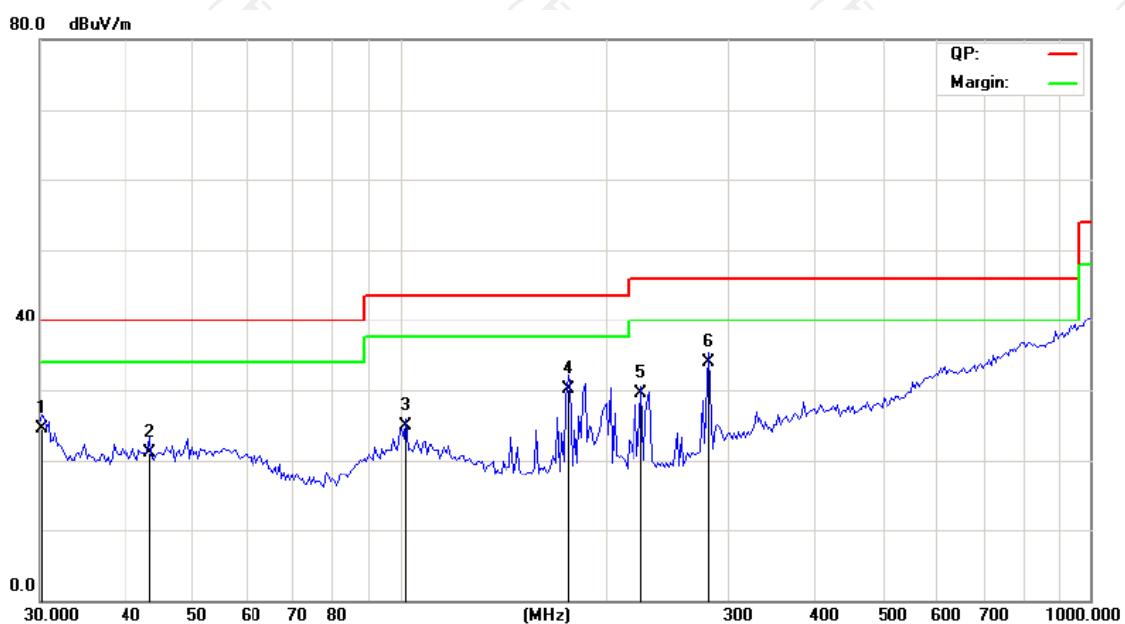

Site: Chamber #2 Polarization: **Horizontal** Temperature: 25 (C)
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 55 %

No.	Mk.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		Freq.	Level	Factor				
		MHz	dBuV	dB	dBuV/m	dB		
1	30.2116	32.53	-8.00	24.53	40.00	-15.47	QP	
2	43.2332	28.13	-6.95	21.18	40.00	-18.82	QP	
3	101.8932	31.37	-6.53	24.84	43.50	-18.66	QP	
4	175.0404	39.87	-9.71	30.16	43.50	-13.34	QP	
5	223.8482	38.49	-9.06	29.43	46.00	-16.57	QP	
6	* 280.2936	40.60	-6.74	33.86	46.00	-12.14	QP	

Vertical:

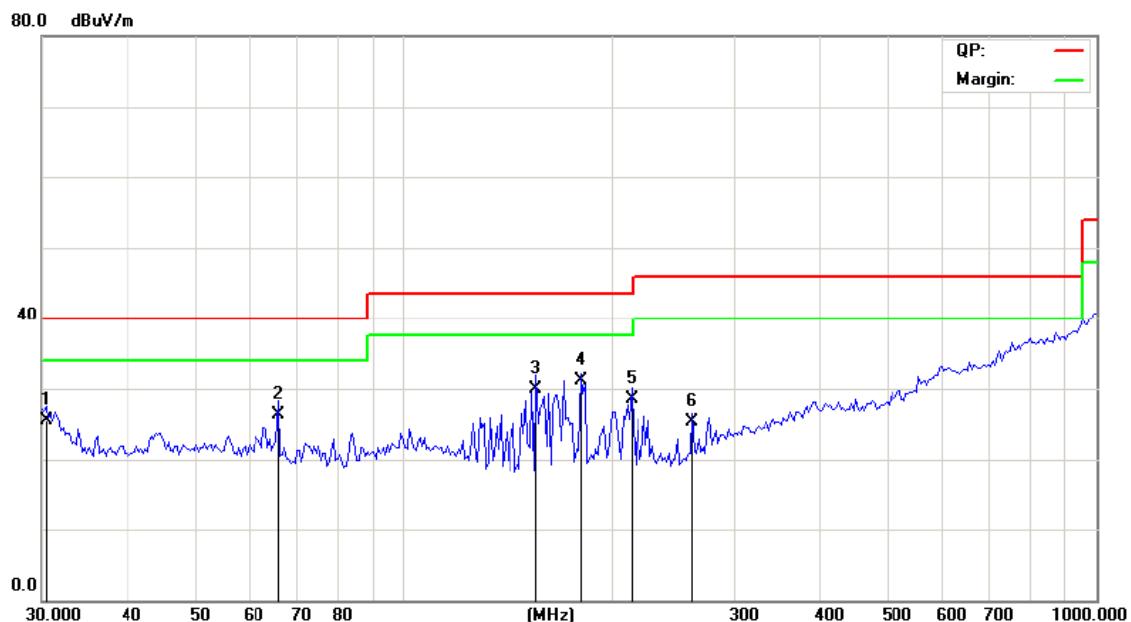

Site Chamber #2

 Polarization: **Vertical**

Temperature: 25 (C)

Limit: FCC Class B 3M Radiation

Power: AC 120V/60Hz

Humidity: 55 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		30.4246	33.41	-7.98	25.43	40.00	-14.57	QP	
2		65.9067	35.87	-9.60	26.27	40.00	-13.73	QP	
3		155.3305	40.18	-10.21	29.97	43.50	-13.53	QP	
4	*	180.0304	40.68	-9.58	31.10	43.50	-12.40	QP	
5		213.1035	37.64	-9.07	28.57	43.50	-14.93	QP	
6		261.2730	33.44	-8.19	25.25	46.00	-20.75	QP	

Note: The low frequency, which started from 9KHz~30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported

Above 1GHz

Modulation Type: GFSK									
Low channel: 2415 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
2390	H	45.49	---	-8.23	37.26	---	74	54	-16.74
4830	H	39.68	---	6.59	46.27	---	74	54	-7.73
7245	H	37.29	---	12.87	50.16	---	74	54	-3.84
---	H	---	---	---	---	---	---	---	---
2390	V	46.19	---	-8.23	37.96	---	74	54	-16.04
4830	V	40.25	---	6.59	46.84	---	74	54	-7.16
7245	V	36.91	---	12.87	49.78	---	74	54	-4.22
---	V	---	---	---	---	---	---	---	---

Middle channel: 2436 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
4872	H	40.12	---	7.01	47.13	---	74	54	-6.87
7308	H	36.25	---	13.21	49.46	---	74	54	-4.54
---	H	---	---	---	---	---	---	---	---
4872	V	39.38	---	7.01	46.39	---	74	54	-7.61
7308	V	38.02	---	13.21	51.23	---	74	54	-2.77
---	V	---	---	---	---	---	---	---	---

High channel: 2460 MHz									
Frequency (MHz)	Ant. Pol. H/V	Peak reading (dB μ V)	AV reading (dB μ V)	Correction Factor (dB/m)	Emission Level		Peak limit (dB μ V/m)	AV limit (dB μ V/m)	Margin (dB)
					Peak (dB μ V/m)	AV (dB μ V/m)			
2483.5	H	43.17	---	-7.52	35.65	---	74	54	-18.35
4920	H	40.38	---	7.44	47.82	---	74	54	-6.18
7380	H	36.23	---	13.54	49.77	---	74	54	-4.23
---	H	---	---	---	---	---	---	---	---
2483.5	V	42.51	---	-7.52	34.99	---	74	54	-19.01
4920	V	39.24	---	7.44	46.68	---	74	54	-7.32
7380	V	38.12	---	13.54	51.66	---	74	54	-2.34
---	V	---	---	---	---	---	---	---	---

Note:



1. Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
2. Margin (dB) = Emission Level (Peak) (dB μ V/m)-Average limit (dB μ V/m)
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
5. Data of measurement shown “---” in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

Appendix A: Photographs of Test Setup

Product: Digital Video Baby Monitor

Model: VB603

Radiated Emission

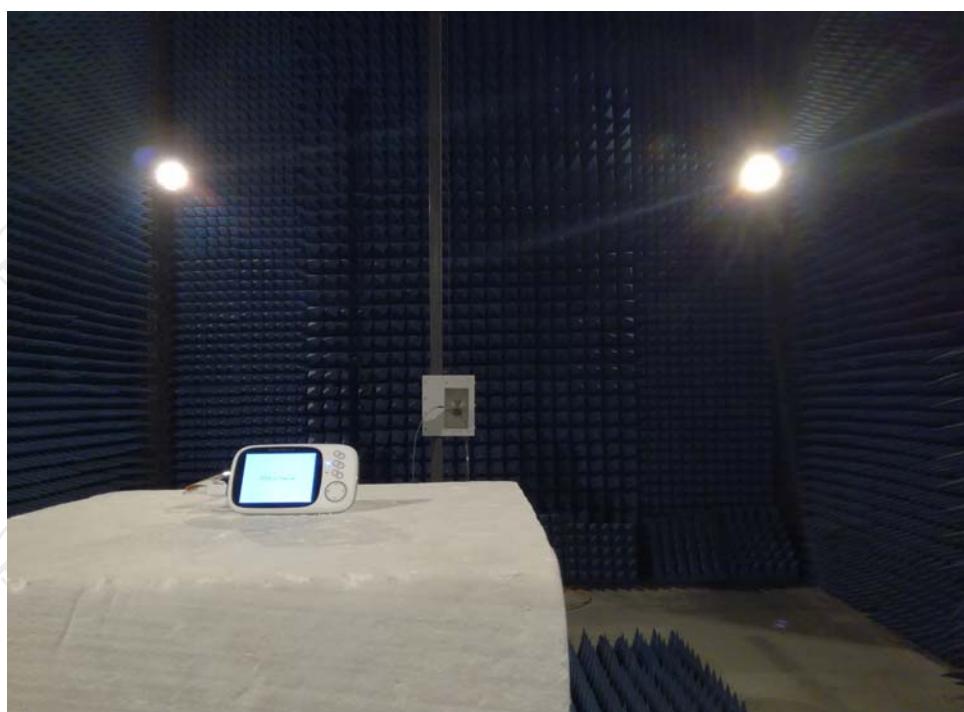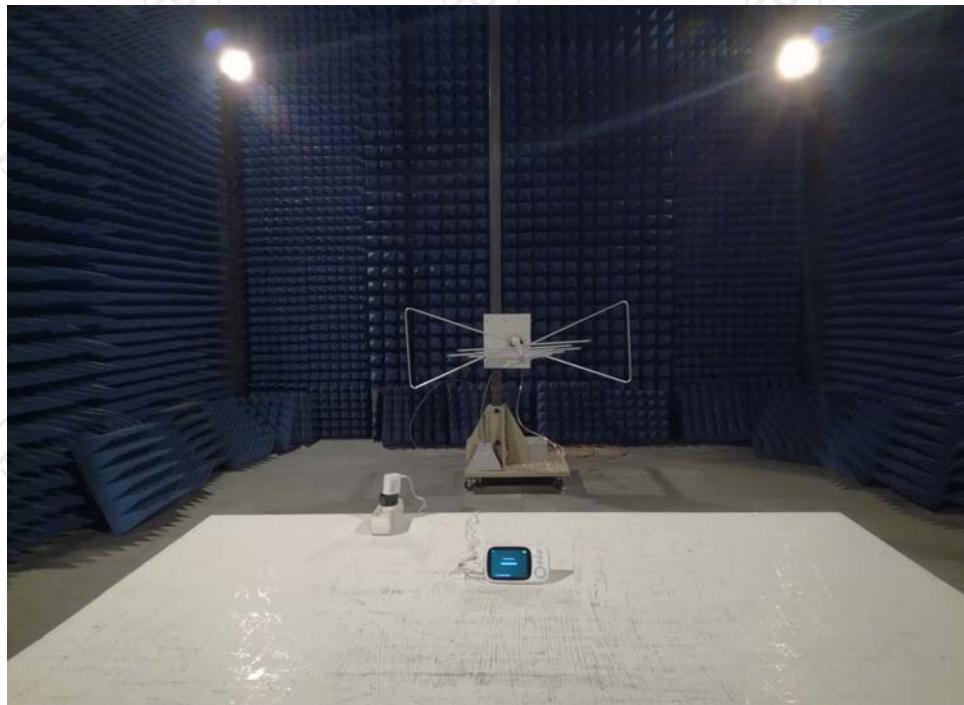


Conducted Emission



**Appendix B: Photographs of EUT
Product: Digital Video Baby Monitor
Model: VB603
External Photos**






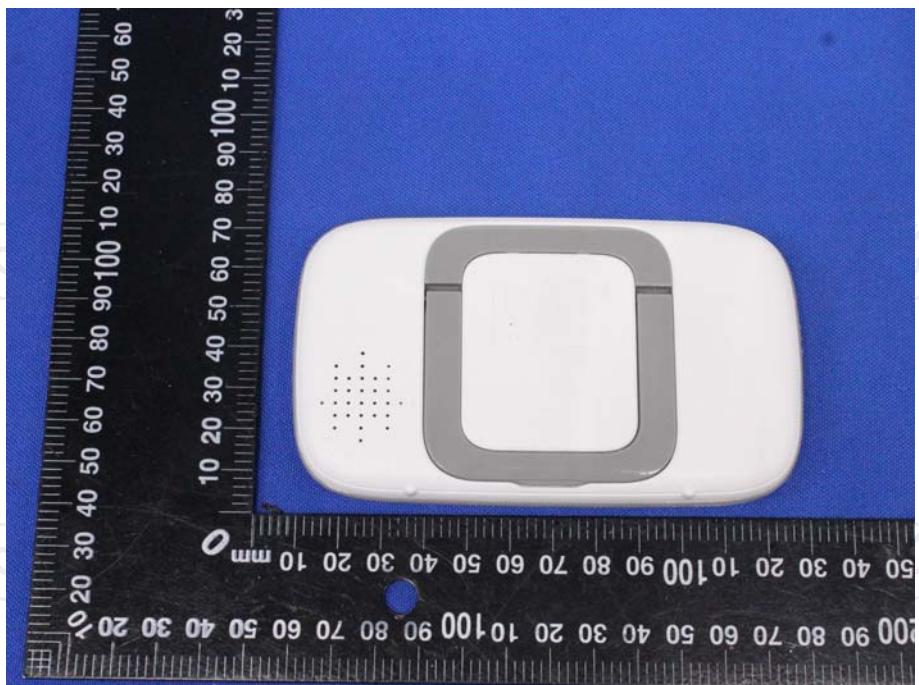









**Product: Digital Video Baby Monitor
Model: VB603
Internal Photos**

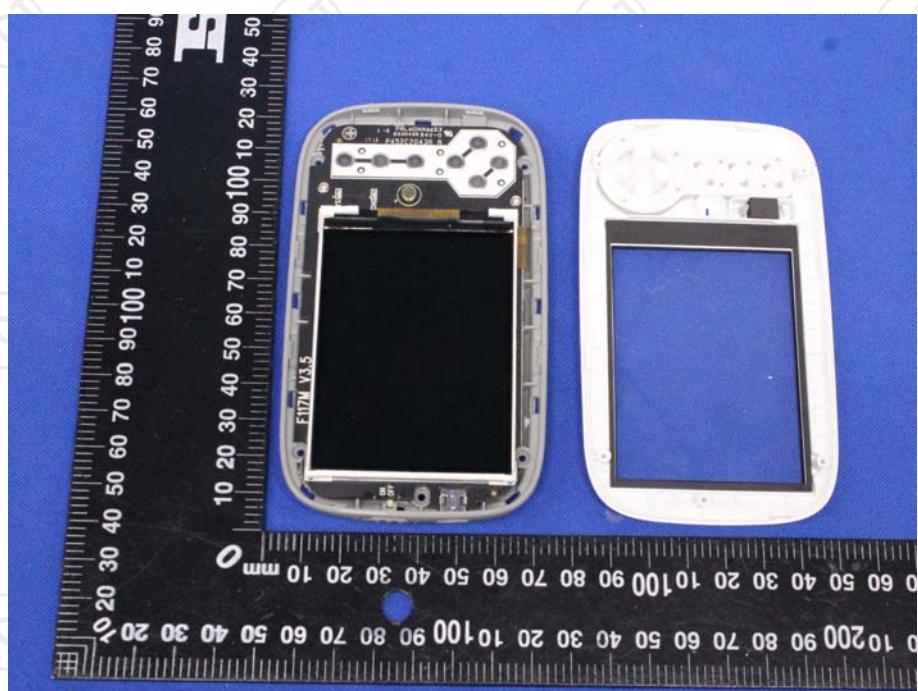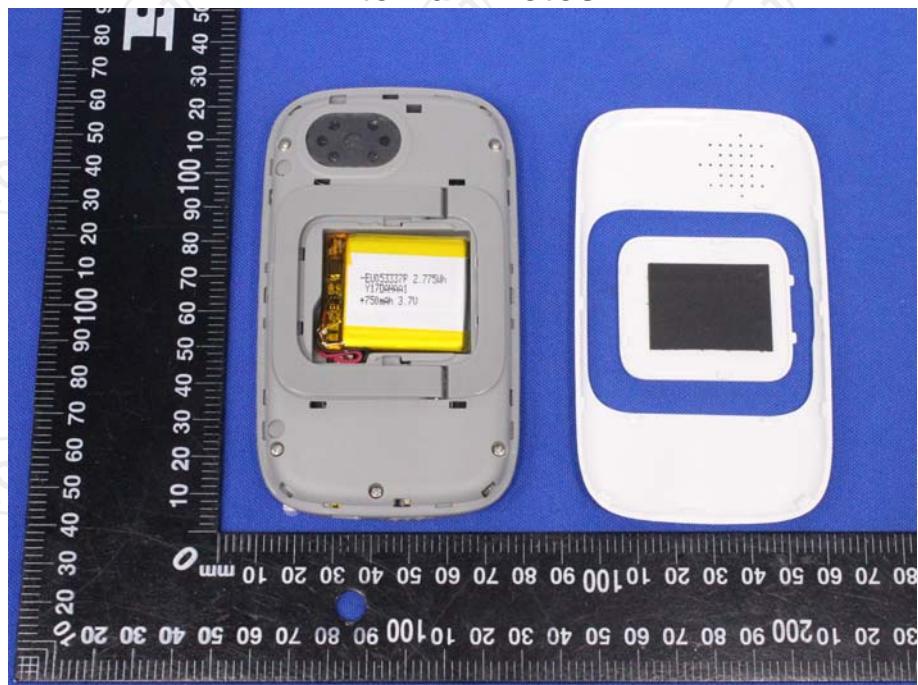

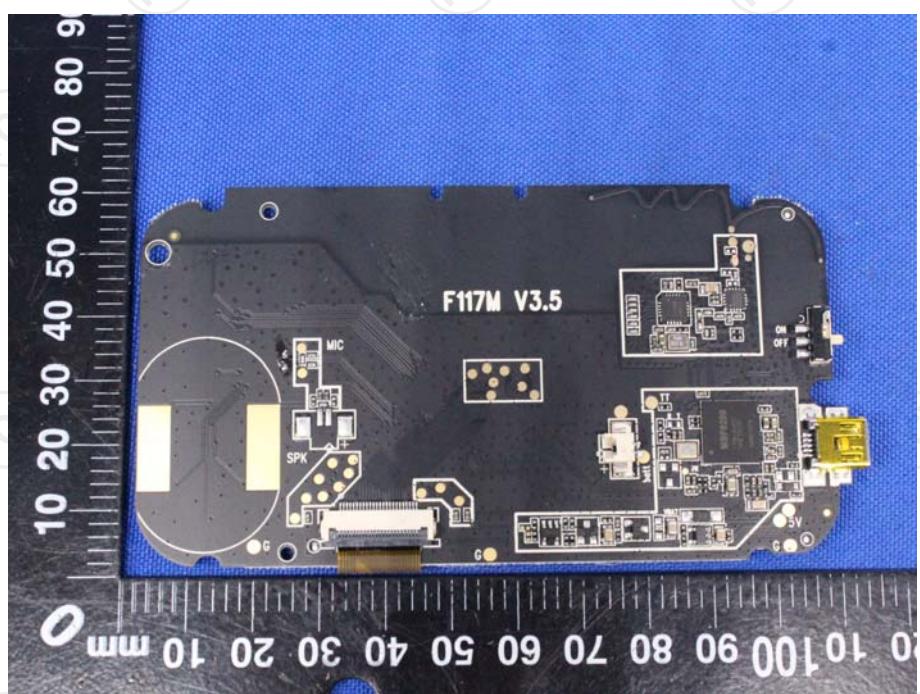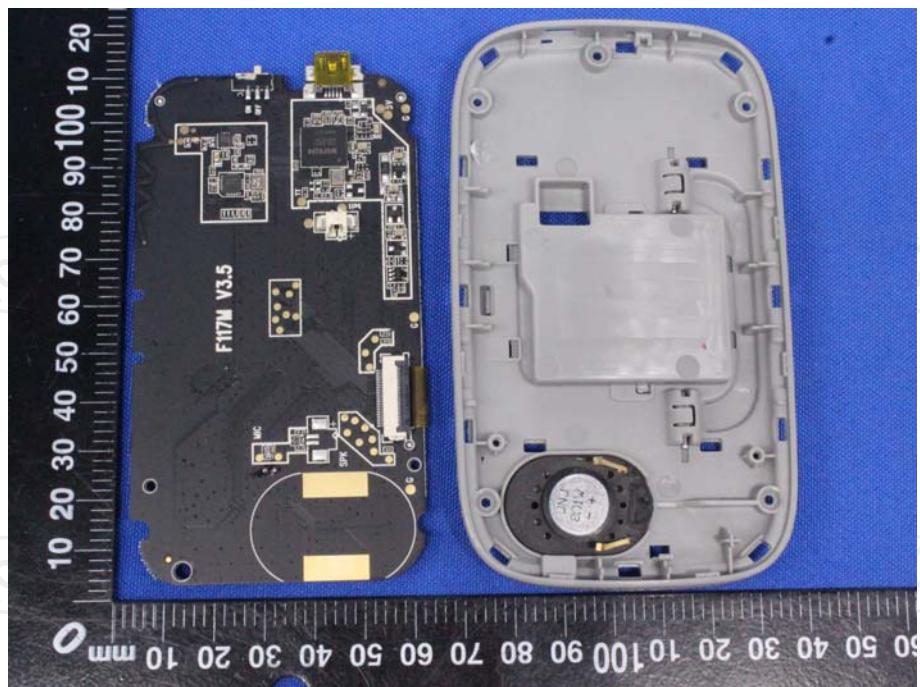

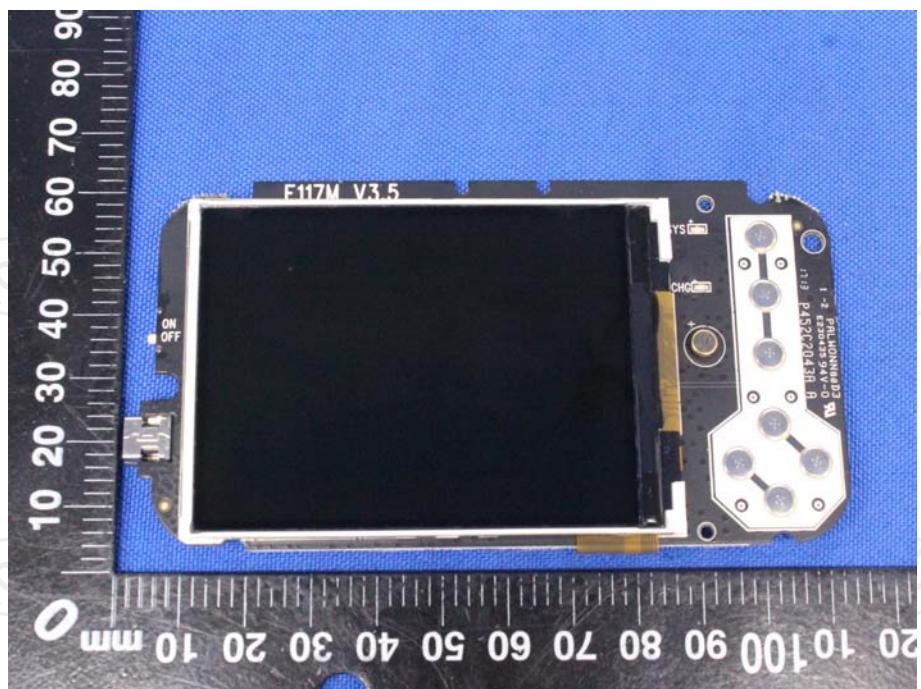

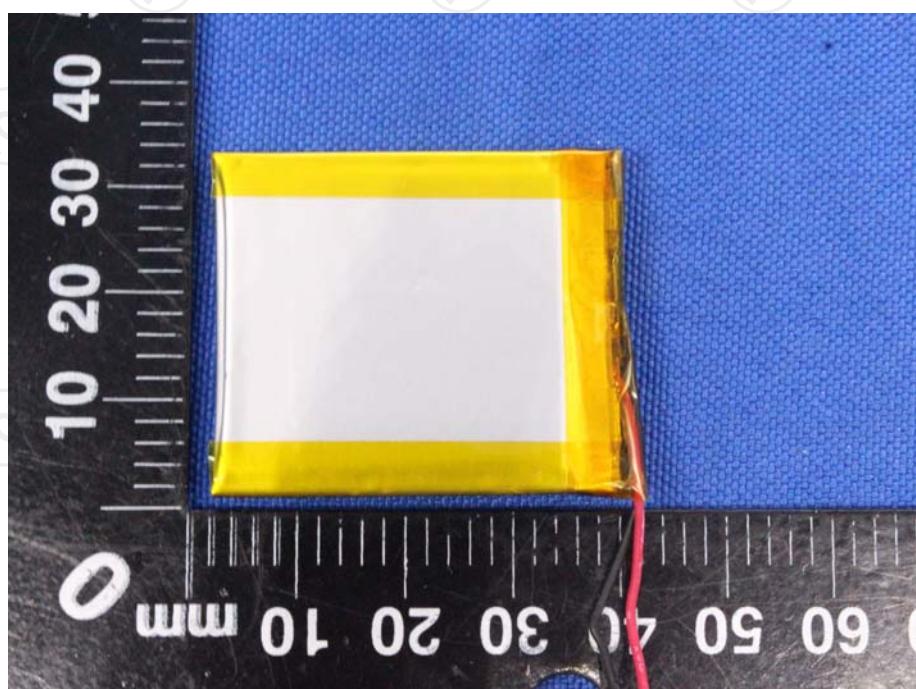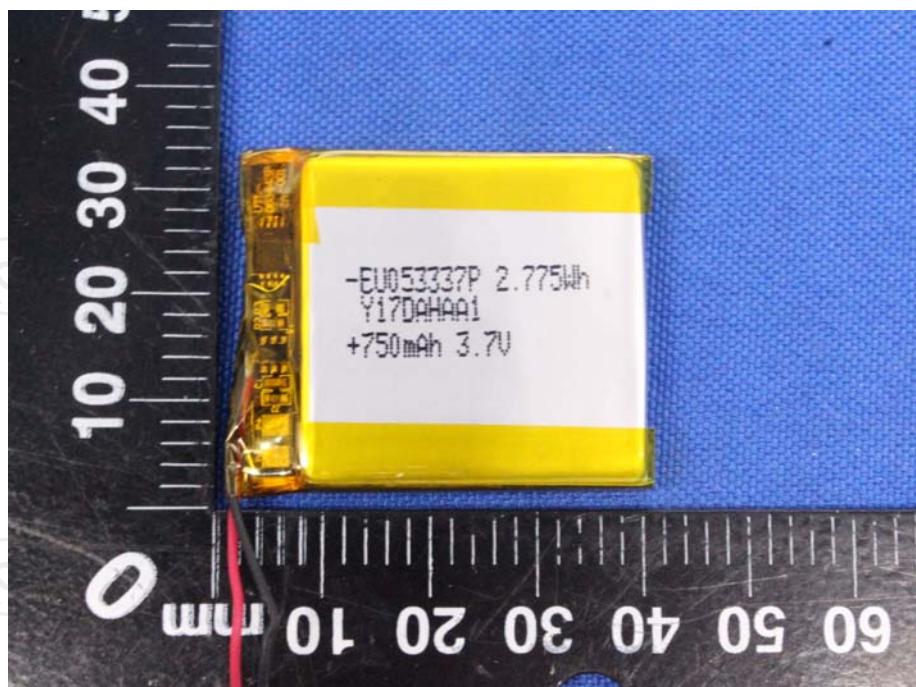

*******END OF REPORT*******