

FCC TEST REPORT

**Test report
On Behalf of
KSN SYSTEMS LIMITED**

For

KidsSafetyNet Guardian Wifi Router

**Model No.: KSN-100, KSN-110, KSN-120, KSN-130, KSN-140,
KSN-150, KSN-160, KSN-170, KSN-180, KSN-190**

FCC ID: 2AFY9-KSN100

Prepared for : KSN SYSTEMS LIMITED

2504 Universal Trade Centre, 3 ArbuthnotRoad, Central, Hong Kong

**Prepared By : Shenzhen WST Testing Technology Co., Ltd.
1F, No.9 Building,TGK Science & Technology Park, Yangtian Rd., NO.72
Bao'an Dist., Shenzhen, Guangdong, China. 518101**

Date of Test: Sep. 02, 2015 ~ Sep. 10, 2015

Date of Report: Sep. 10, 2015

Report Number: WST15009103-E

TEST RESULT CERTIFICATION

Applicant's name : KSN SYSTEMS LIMITED
Address : 2504 Universal Trade Centre, 3 ArbuthnotRoad, Central, Hong Kong
Manufacturer's Name : KSN SYSTEMS LIMITED
Address : 2504 Universal Trade Centre, 3 ArbuthnotRoad, Central, Hong Kong

Product description

Trade Mark: N/A
Product name : KidsSafetyNet Guardian Wifi Router
Model and/or type reference : KSN-100, KSN-110, KSN-120, KSN-130, KSN-140, KSN-150, KSN-160, KSN-170, KSN-180, KSN-190
Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2014


This publication may be reproduced in whole or in part for non-commercial purposes as long as the WST Certification & Testing (HK) Limited is acknowledged as copyright owner and source of the material. WST Certification & Testing (HK) Limited takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test

Date (s) of performance of tests : **Sep. 02, 2015 ~ Sep. 10, 2015**

Date of Issue : **Sep. 10, 2015**

Test Result : **Pass**

Testing Engineer : 

(Eric Xie)

Technical Manager : 

(Dora Qin)

Authorized Signatory : 

(Michael Ling)

Table of Contents	Page
1. . Test Summary	5
1.1. Test Facility	6
1.2. Measurement Uncertainty	6
2. . General Information	7
2.1. General Description of EUT	7
2.2. Carrier Frequency of Channels	8
Operation of EUT during testing	8
2.3. Description of Test Setup	9
2.4. Measurement Instruments List	10
3. . 6DB Bandwidth Measurement	12
3.1. Block Diagram of Test Setup	12
4 Maximum Peak Output Power	20
4.2 Limits	20
2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.	20
4.3 Test Procedure	20
4.4 Test Result	21
6 Power Spectral Density Measurement	26
6.2 Limits	26
6.3 Test Procedure	26
6.4 Test Result	26
7 Band Edge Compliance Test	34
7.2 Limits	34
7.3 Test Procedure	34
7.4 Test Result	35
8 Radiated Spurious Emission Test	48
8.2 Limits	49
8.3 Restricted bands of operation	49
8.3 Test Procedure	50
8.4 Test Result	51
9 Conducted Spurious Emission Compliance Test	54
9.2 Limits	54
9.3 Test Procedure	54
9.4 Test Result	54

Table of Contents

	Page
10 AC Power Line Conducted Emission For Part 15 Section 15.207(A)	67
10.2 Limits	67
10.3 Test Procedure	67
10.4 Test Result	67
11 Antenna Requirement	69
12 Photograph of Test	70

1.. Test Summary

FCC Rules	Description of Test	Result
Section 15.247(a)2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Tes	Compliant
Section 15.247(d) Section 15.209)	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

1.1. Test Facility

Test Firm : Shenzhen WST Testing Technology Co., Ltd.
Certificated by FCC, Registration No.: 939433
Address : 1F, No.9 Building, TGK Science & Technology Park, Yangtian Rd., NO.72
Bao'an Dist., Shenzhen, Guangdong, China. 518101
Tel : (86)755-33916437
Fax : (86)755-27822175

1.2. Measurement Uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

2.. General Information

2.1. General Description of EUT

Equipment	KidsSafetyNet Guardian Wifi Router
Model Name	KSN-100, KSN-110, KSN-120, KSN-130, KSN-140, KSN-150, KSN-160, KSN-170, KSN-180, KSN-190
Serial No	/
FCC ID	2AFY9-KSN100
Model Difference	All the model are the same circuit and RF module, except the appearance colour, this report only test mode name: KSN-100.
Modulation Type	WIFI:DBPSK,DQPSK,CCK,BPSK,QPSK,16QAM, 64QAM
Antenna Type	Internal
Antenna Gain	2 dBi
WLAN Operation frequency	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	802.11b/g/n(20MHz):11 802.11n(40MHz): 7
Data Rate	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 150Mbps
Modulation Type	CCK, OFDM
Power Source	DC Voltage
Power Rating	Input 100-240V, 50/60Hz, 0.5A Output:DC5V, 2A
Adapter Model	SW-050200

2.2. Carrier Frequency of Channels

802.11b, 802.11g, 802.11n (20MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n (40MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
03	2422	09	2452
04	2427	---	---
05	2432	---	---
06	2437	---	---

Operation of EUT during testing

Operating Mode

The mode is used: **802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11g Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11n(20MHz) Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11n(40MHz) Transmitting mode


Low Channel: 2422MHz

Middle Channel: 2437MHz

High Channel: 2452MHz

2.3. Description of Test Setup

Operation of EUT during testing

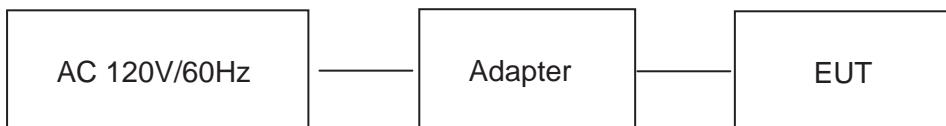


2.4. Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2015	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2015	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
5.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
6.	Trilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 17, 2015	1 Year
7.	Pre-amplifier	Compliance Direction	PAP-0203	22008	May 19, 2015	1 Year
8.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
9.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
10.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2015	1 Year
11.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2015	1 Year
12.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
13.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
14.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2015	1 Year
15.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2015	1 Year
16.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2015	1 Year
17.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
18.	Programmable AC Power source	SOPH POWER	PAG-1050	630250	May 26, 2015	1 Year
19.	Harmonic and Flicker Analyzer	LAPLACE	AC2000A	272629	May 26, 2015	1 Year
20.	Harmonic and Flicker Test Software AC 2000A	LAPLACE	N/A	N/A	N/A	N/A
21.	ESD Simulators	KIKUSUI	KES4021	LJ003477	May 25, 2015	1 Year
22.	EFT Generator	EMPEK	EFT-4040B	0430928N	May 19, 2015	1 Year
23.	Shielding Room	ChangZhou ZhongYu	JB88	SEL0166	May 19, 2015	1 Year
24.	Signal Generator 9KHz~2.2GHz	R&S	SML02	SEL0143	May 19, 2015	1 Year
25.	Signal Generator 9KHz~1.1GHz	R&S	SML01	SEL0135	May 19, 2015	1 Year
26.	Power Meter	R&S	NRVS	SEL0144	May 19, 2015	1 Year
27.	RF Level Meter		URV35	SEL0137	May 19, 2015	1 Year
28.	Audio Analyzer	R&S	UPL	SEL0136	May 19, 2015	1 Year

29.	RF-Amplifier 150KHz~150MHz	BONN Elektronik	BSA1515-25	SEL0157	May 19, 2015	1 Year
30.	Stripline Test Cell	Erika Fiedler	VDE0872	SEL0167	N/A	N/A
31.	TV Test Transmitter	R&S	SFM	SEL0159	May 17, 2015	1 Year
32.	TV Generator PAL	R&S	SGPF	SEL0138	May 19, 2015	1 Year
33.	TV Generator Ntsc	R&S	SGMF	SEL0140	May 19, 2015	1 Year
34.	TV Generator Secam	R&S	SGSF	SEL0139	May 19, 2015	1 Year
35.	TV Test Transmitter 0.3MHz~3300MHz	R&S	SFQ	SEL0142	May 19, 2015	1 Year
36.	MPEG2 Measurement Generator	R&S	DVG	SEL0141	May 19, 2015	1 Year
37.	Spectrum Analyzer	R&S	FSP	SEL0177	May 19, 2015	1 Year
38.	Matching	R&S	RAM	SEL0146	N/A	N/A
39.	Matching	R&S	RAM	SEL0148	N/A	N/A
40.	Absorbing Clamp	R&S	MDS21	SEL0158	May 17, 2015	1 Year
41.	Coupling Set	Erika Fiedler	Rco, Rci, MC, AC, LC	SEL0149	N/A	N/A
42.	Filters	Erika Fiedler	Sr, LBS	SEL0150	N/A	N/A
43.	Matching Network	Erika Fiedler	MN, T1	SEL0151	N/A	N/A
44.	Fully Anechoic Room	ChangZhou ZhongYu	854	SEL0169	Jun. 10, 2015	1 Year
45.	Signal Generator	R&S	SML03	SEL0068	May 17, 2015	1 Year
46.	RF-Amplifier 30M~1GHz	Amplifier Reasearch	250W1000A	SEL0066	Oct. 24, 2014	1 Year
47.	RF-Amplifier 0.8~3.0GHz	Amplifier Reasearch	60S1G3	SEL0065	Oct. 24, 2014	1 Year
48.	Power Meter	R&S	NRVD	SEL0069	May 17, 2015	1 Year
49.	Power Sensor	R&S	URV5-Z2	SEL0071	May 17, 2015	1 Year
50.	Power Sensor	R&S	URV5-Z2	SEL0072	May 17, 2015	1 Year
51.	Software EMC32	R&S	EMC32-S	SEL0082	N/A	N/A
52.	Log-periodic Antenna	Amplifier Reasearch	AT1080	SEL0073	N/A	N/A
53.	Antenna Tripod	Amplifier Reasearch	TP1000A	SEL0074	N/A	N/A
54.	High Gain Horn Antenna(0.8-5G Hz)	Amplifier Reasearch	AT4002A	SEL0075	N/A	N/A

3.. 6DB Bandwidth Measurement

3.1. Block Diagram of Test Setup



3.2. Limits

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

3.3. Test Procedure

- 3.3.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- 3.3.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz
- 3.3.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

3.4. Test Result

802.11b			
Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2412	10.12	>0.5MHz
Middle	2437	10.12	>0.5MHz
High	2462	10.12	>0.5MHz

802.11g			
Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2412	16.60	>0.5MHz
Middle	2437	16.60	>0.5MHz
High	2462	16.60	>0.5MHz

802.11n (Bandwidth: 20MHz)


Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2412	17.88	>0.5MHz
Middle	2437	17.88	>0.5MHz
High	2462	17.88	>0.5MHz

802.11n (Bandwidth: 40MHz)


Channel	Frequency (MHz)	6DB Bandwidth(MHz)	Limit(MHz)
Low	2422	36.56	>0.5MHz
Middle	2437	36.56	>0.5MHz
High	2452	36.56	>0.5MHz

The spectrum analyzer plots are attached as below.


802.11b Channel Low 2412MHz

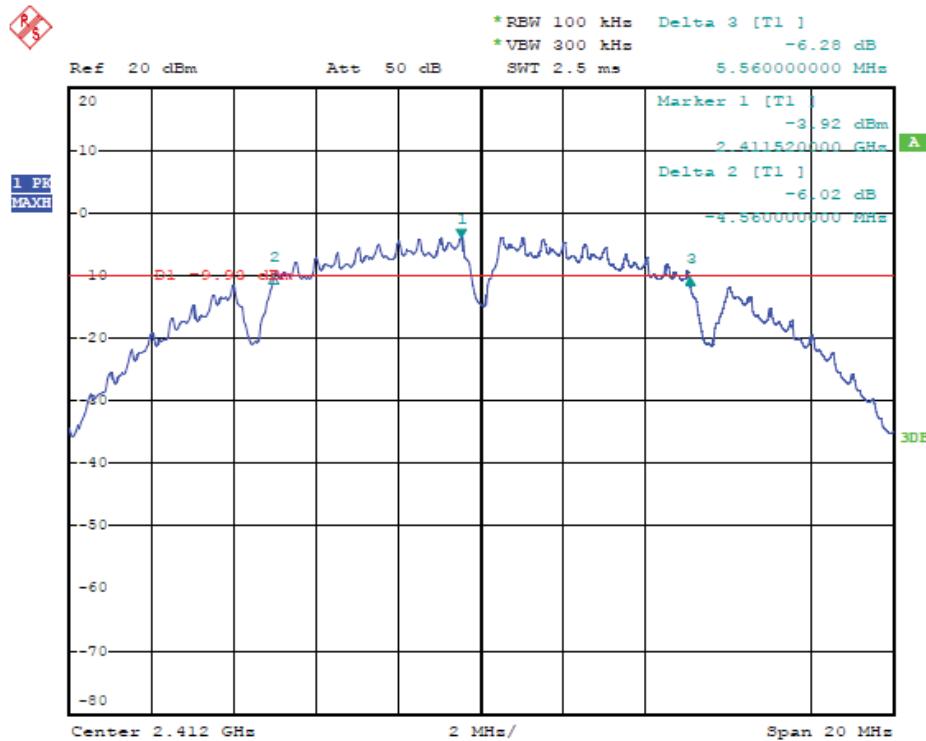


802.11b Channel Middle 2437MHz

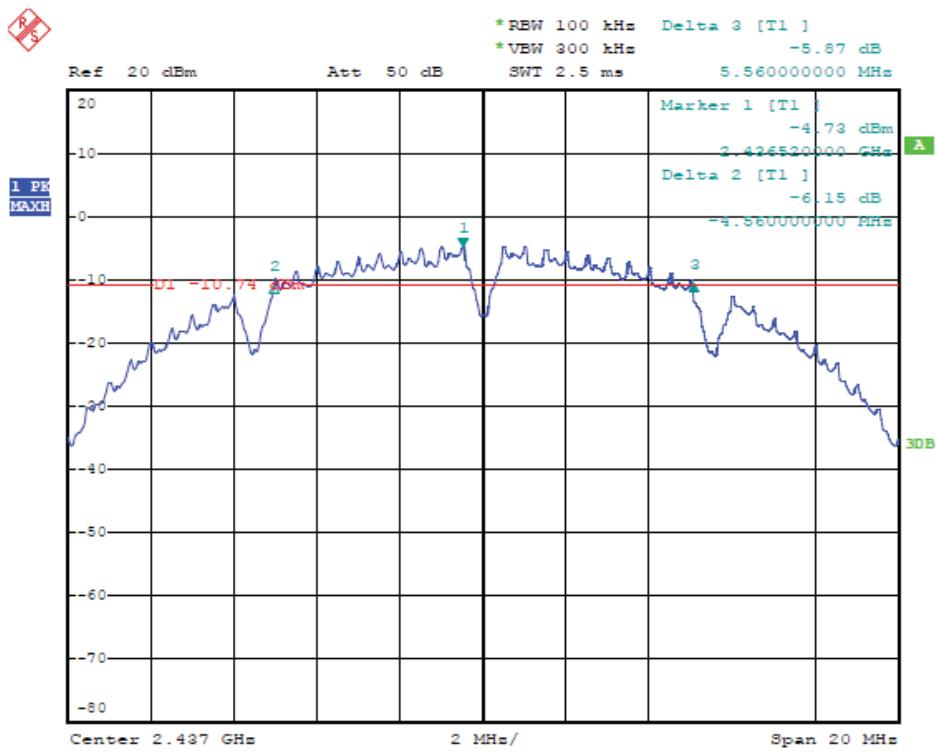


802.11b Channel High 2462MHz

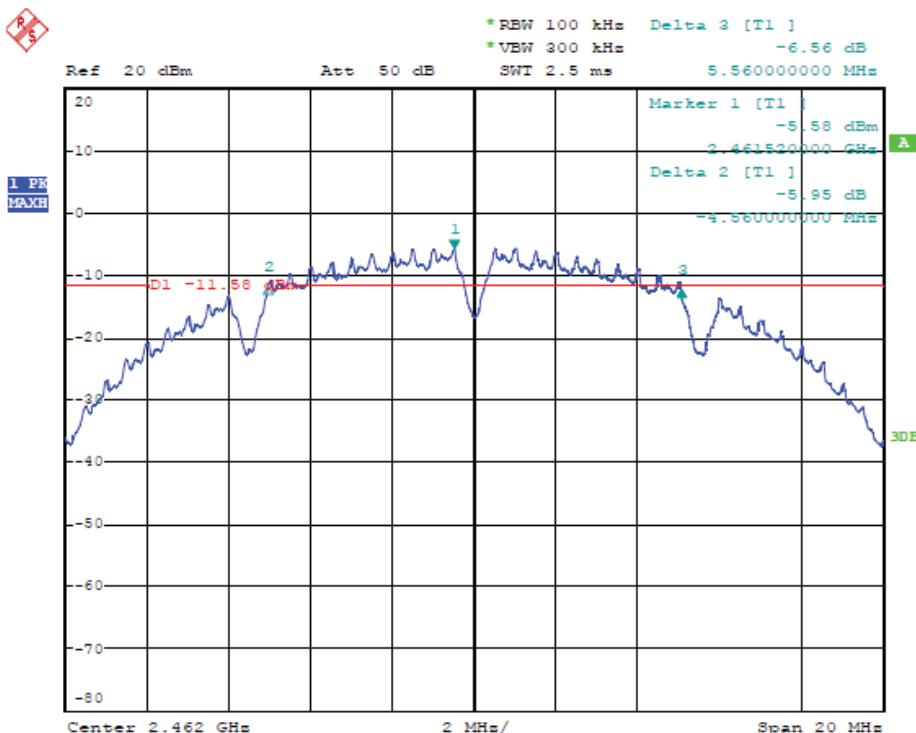


802.11g Channel Low 2412MHz

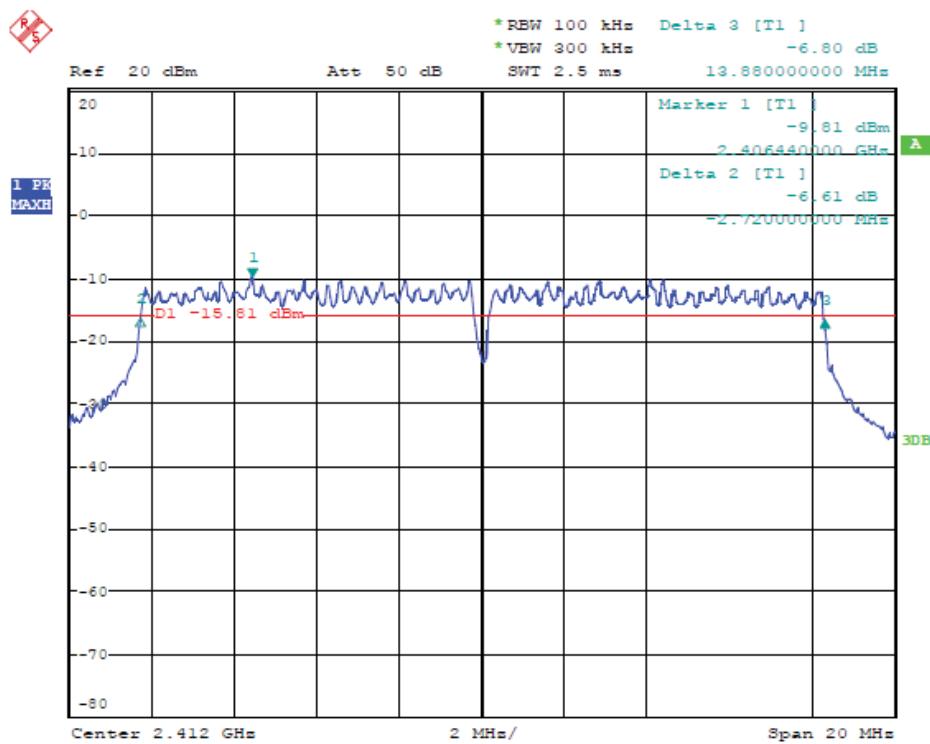


802.11g Channel Middle 2437MHz

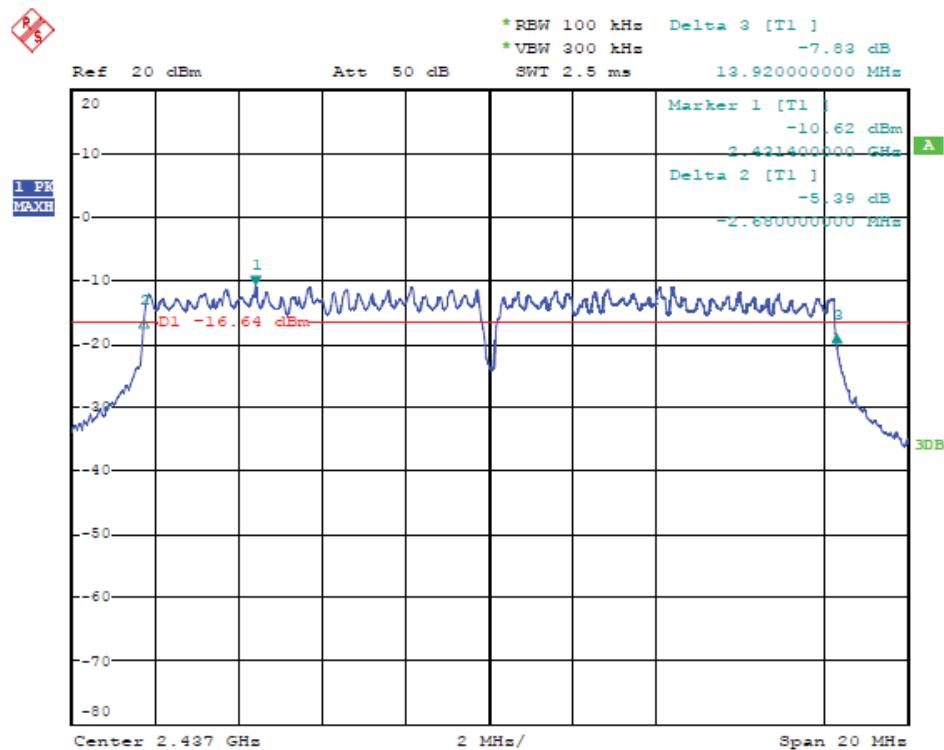


802.11g Channel High 2462MHz

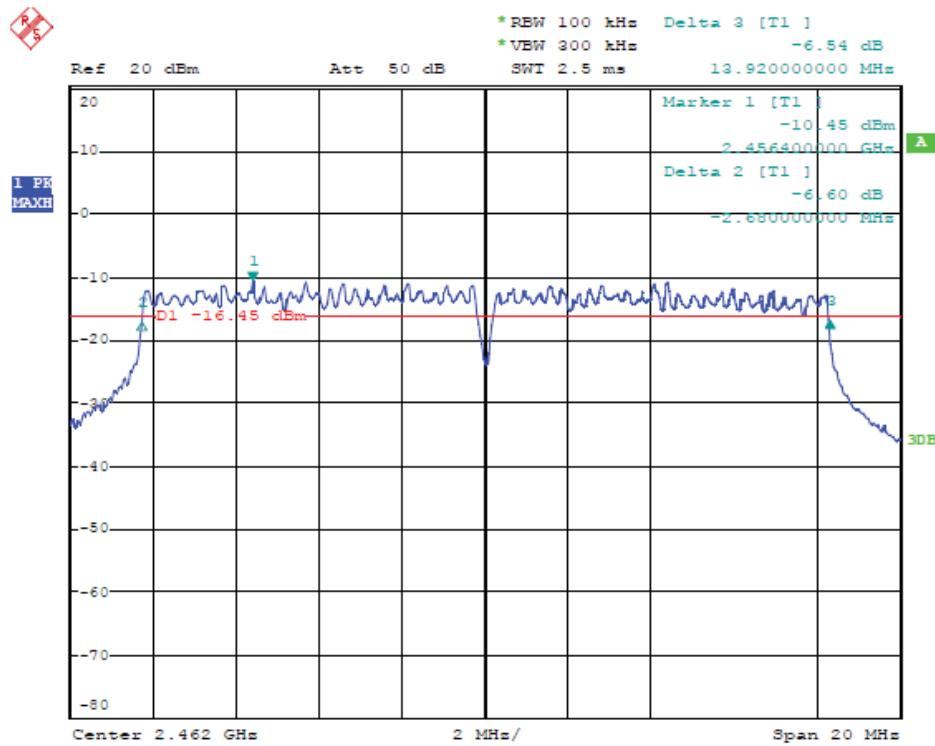


802.11n Channel Low 2412MHz (20MHz)

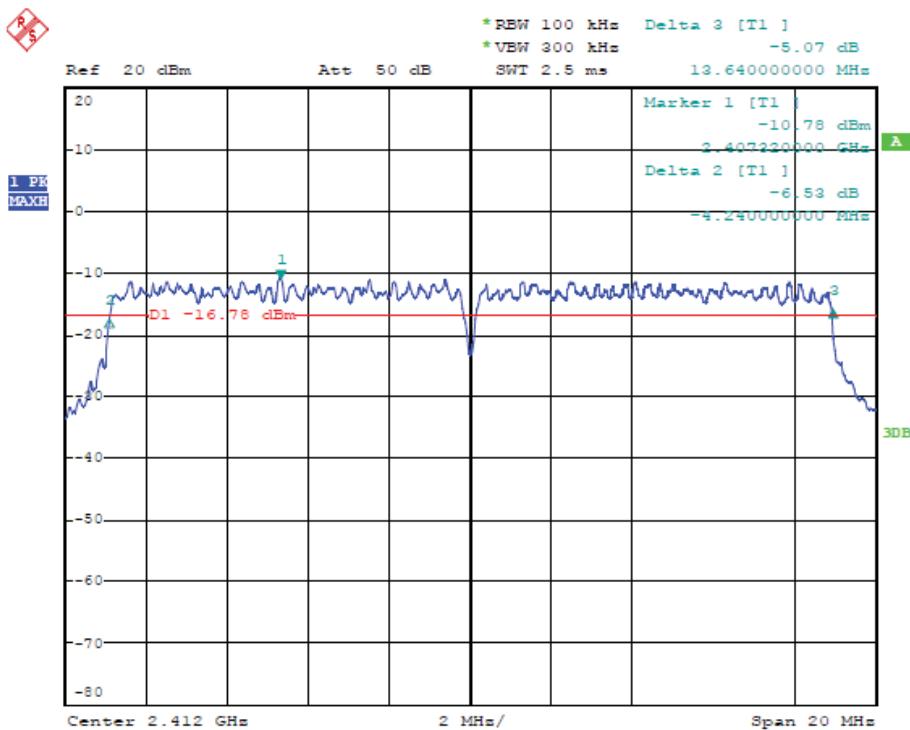


802.11n Channel Middle 2437MHz(20MHz)

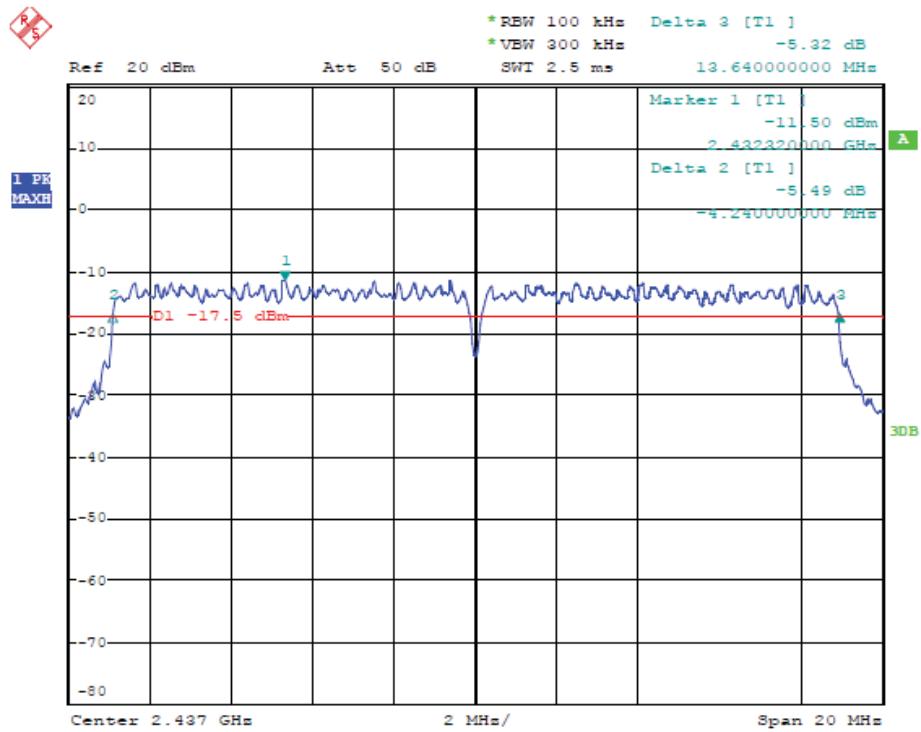


802.11n Channel High 2462MHz(20MHz)

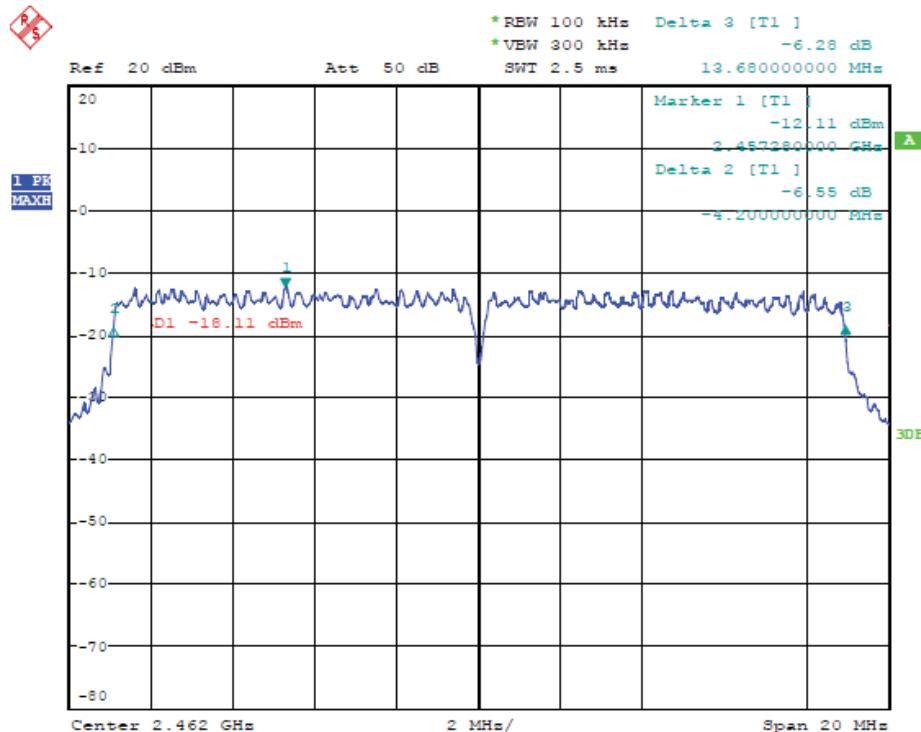


802.11n Channel Low 2422MHz (40MHz)

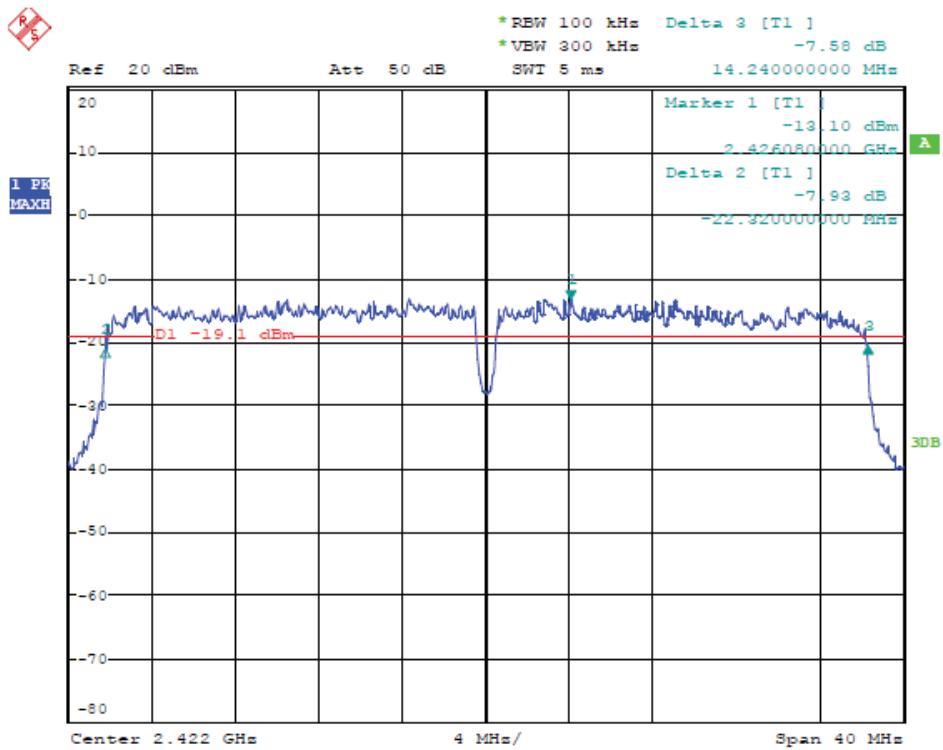

802.11n Channel Middle 2437MHz (40MHz)

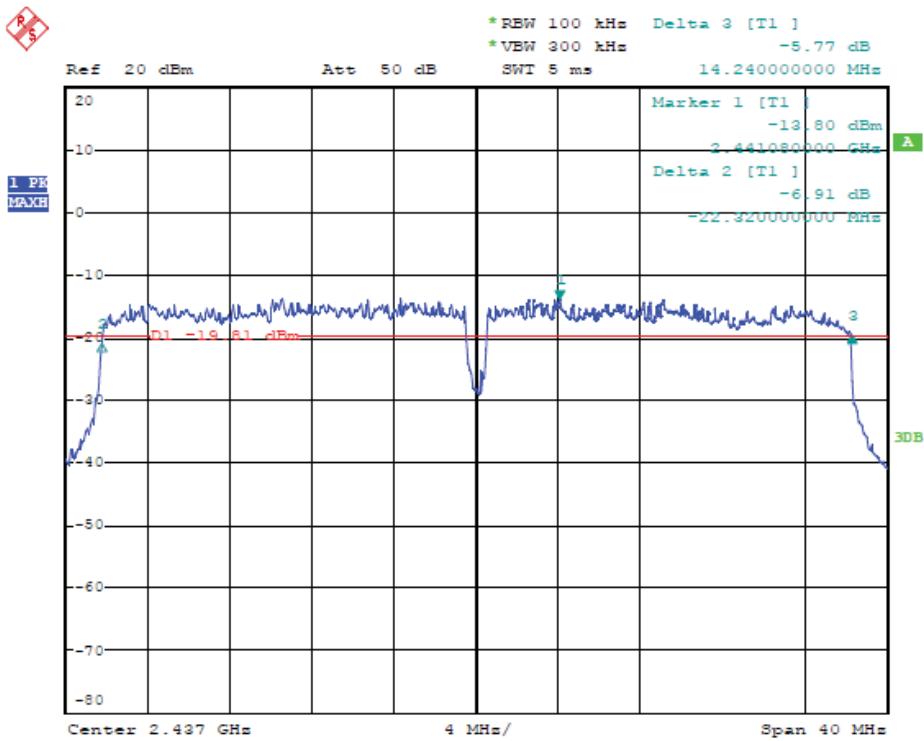


802.11n Channel High 2452MHz (40MHz)

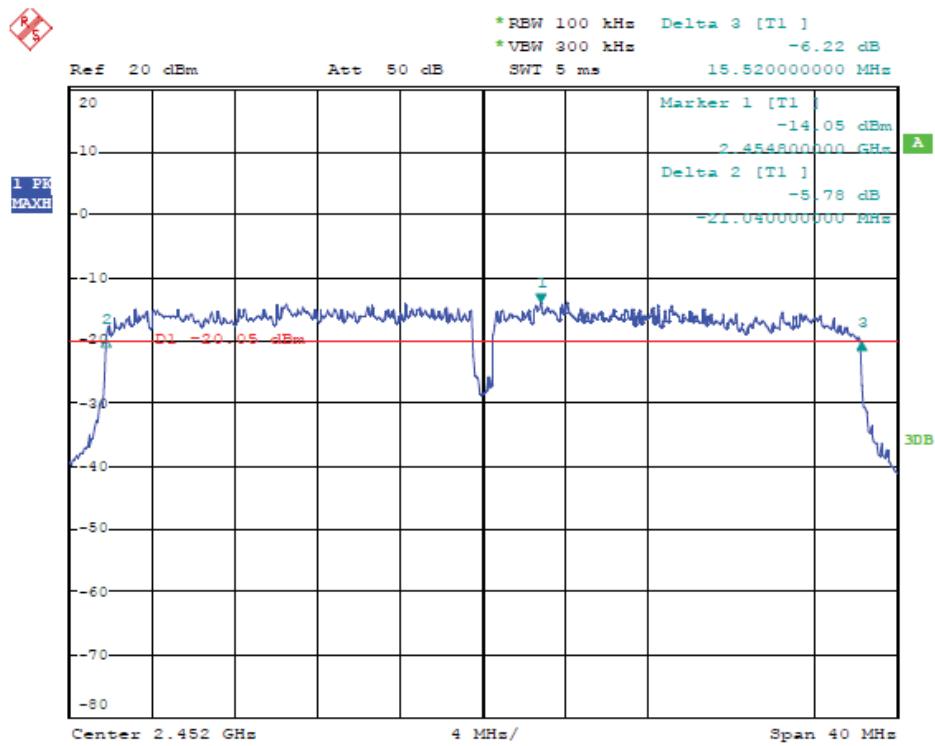

4 Maximum Peak Output Power

4.1 Block Diagram of Test Setup



4.2 Limits

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

4.3 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer through a low
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz
- c. Measurement the maximum peak output power.

4.4 Test Result

PASS

802.11b

Channel	Frequency (MHz)	Peak output power (dBm)	Limit (dBm)
Low	2412	9.11	30
Middle	2437	8.76	30
High	2462	8.08	30

802.11g

Channel	Frequency (MHz)	Peak output power (dBm)	Limit (dBm)
Low	2412	7.94	30
Middle	2437	7.81	30
High	2462	7.47	30

802.11n (20MHz)




Channel	Frequency (MHz)	Peak output power (dBm)	Limit (dBm)
Low	2412	7.73	30
Middle	2437	7.19	30
High	2462	6.71	30

802.11n 40MHz)




Channel	Frequency (MHz)	Peak output power (dBm)	Limit (dBm)
Low	2422	7.48	30
Middle	2437	7.08	30
High	2452	6.11	30

Pls. refer to the following test plots:




802.11b

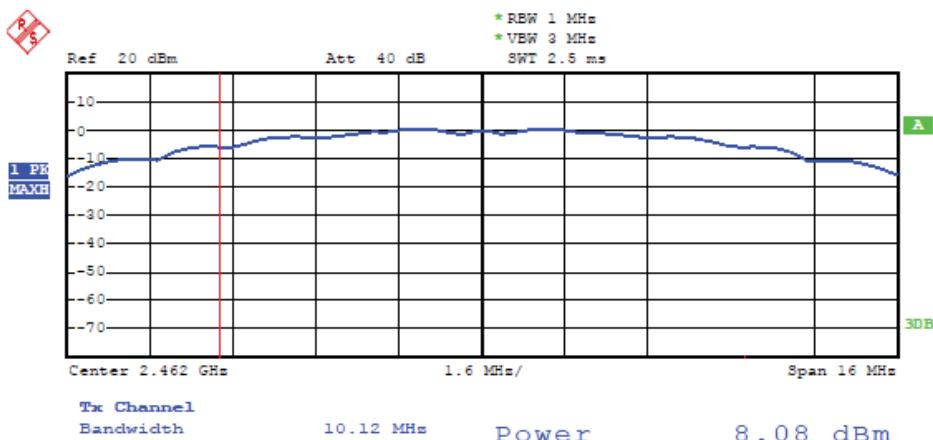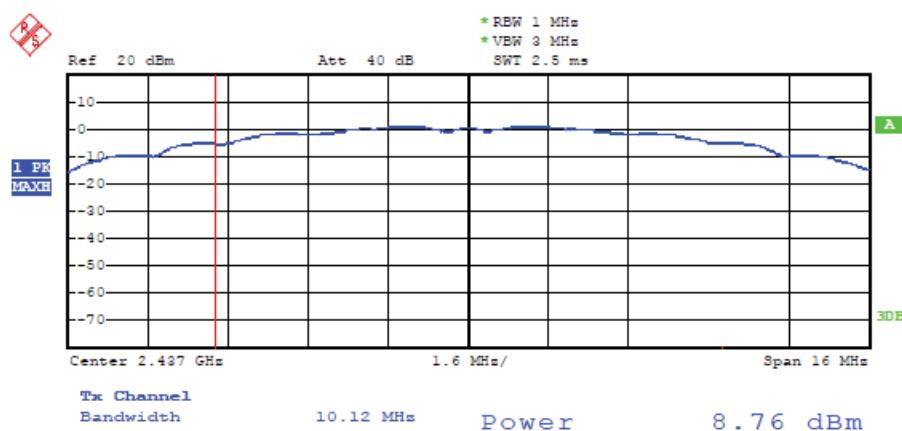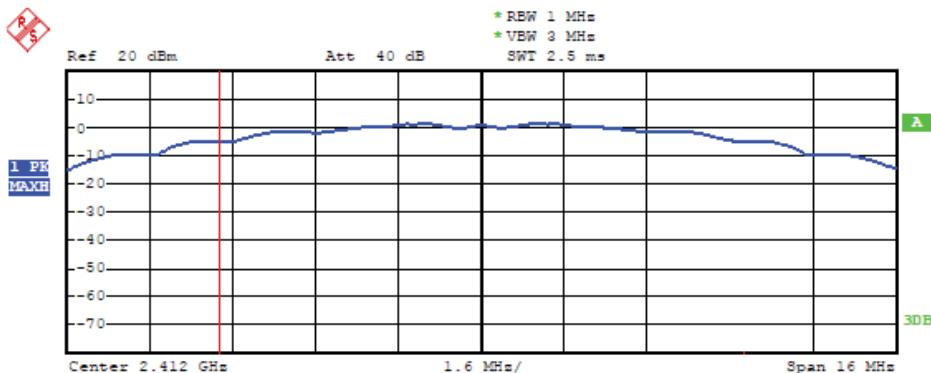




802.11g

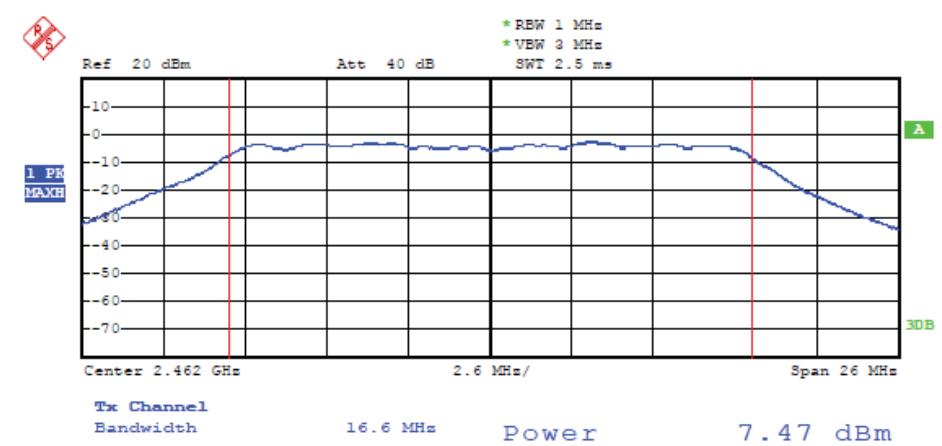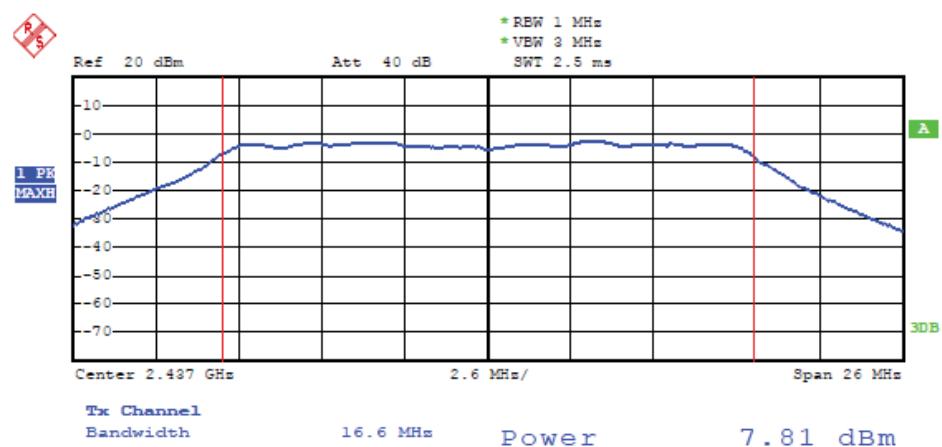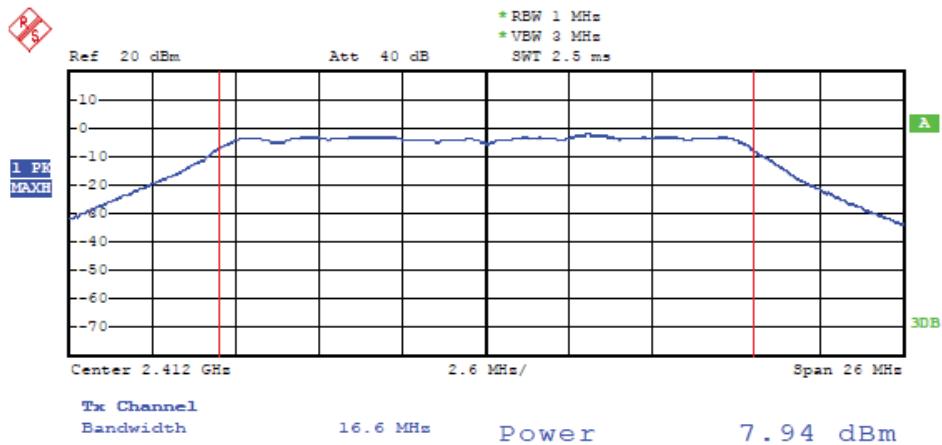

802.11n(20MHz)

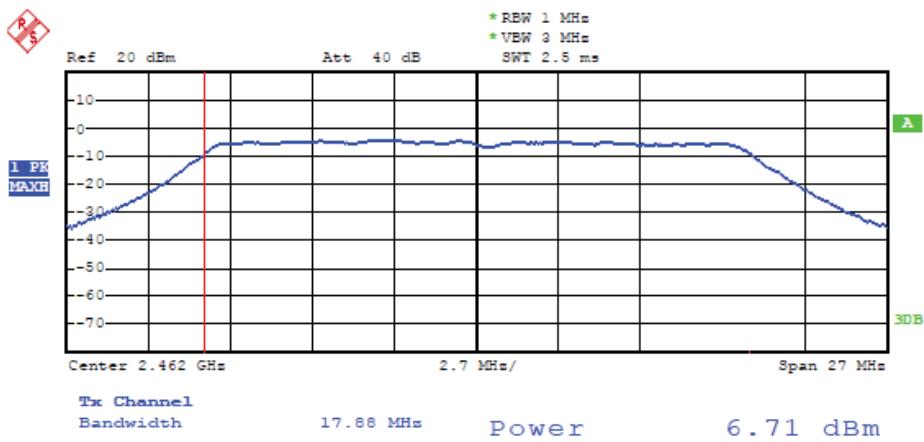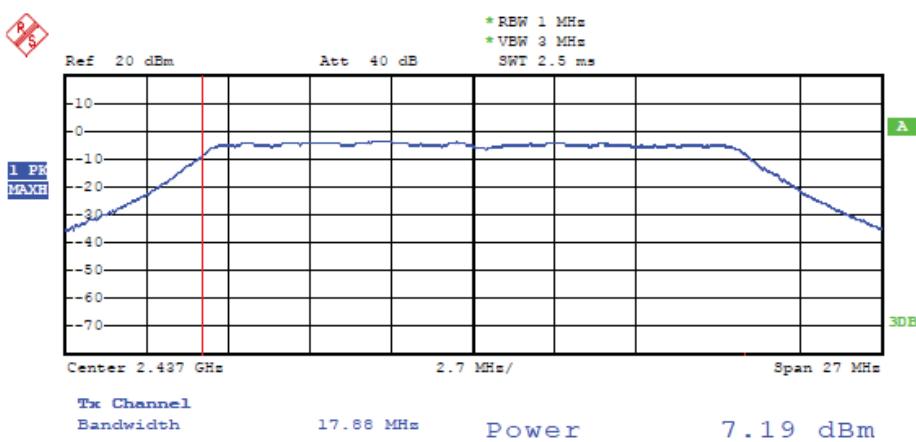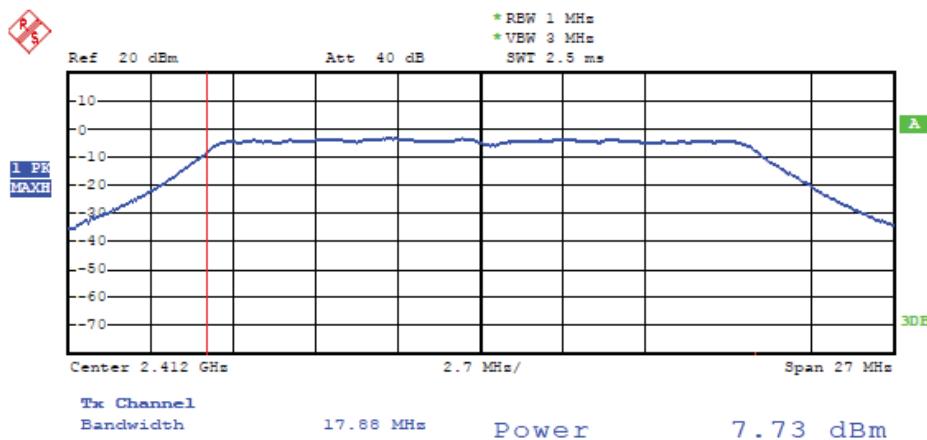


802.11n(40MHz)

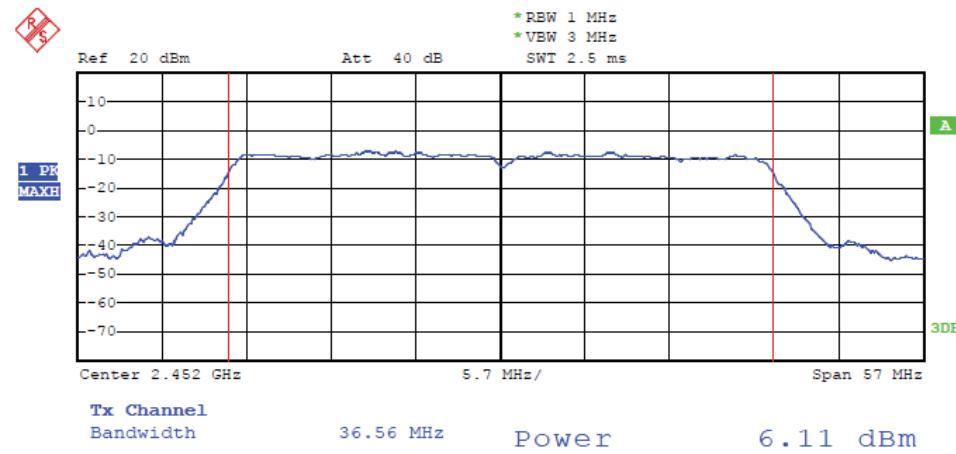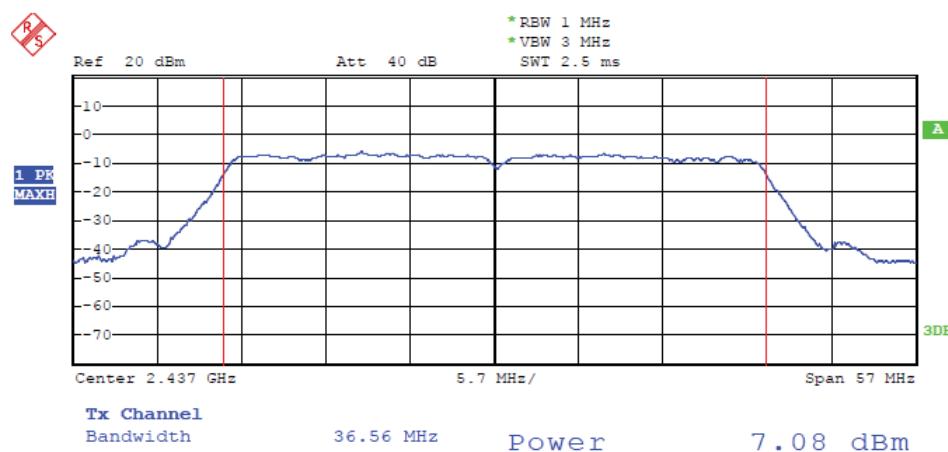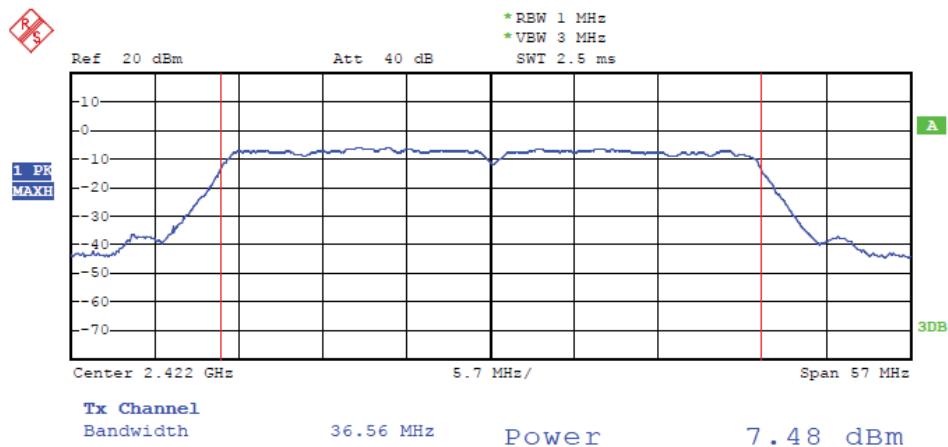

6 Power Spectral Density Measurement

6.1 Block Diagram of Test Setup



6.2 Limits

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- b. Set RBW of spectrum analyzer to 3kHz and VBW to 10kHz, sweep time =Span/30kHz
- c. Measurement the maximum power spectral density.

6.4 Test Result

PASS

802.11b			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)
Low	2412	-23.99	8
Middle	2437	-24.69	8
High	2462	-27.49	8


802.11g			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)
Low	2412	-26.26	8
Middle	2437	-26.62	8
High	2462	-27.19	8

802.11n(20MHz)			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)
Low	2412	-26.17	8
Middle	2437	-27.60	8
High	2462	-27.19	8


802.11n(40MHz)			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm)
Low	2422	-28.45	8
Middle	2437	-29.09	8
High	2452	-29.40	8

The spectrum analyzer plots are attached as below.


802.11b Channel Low 2412MHz

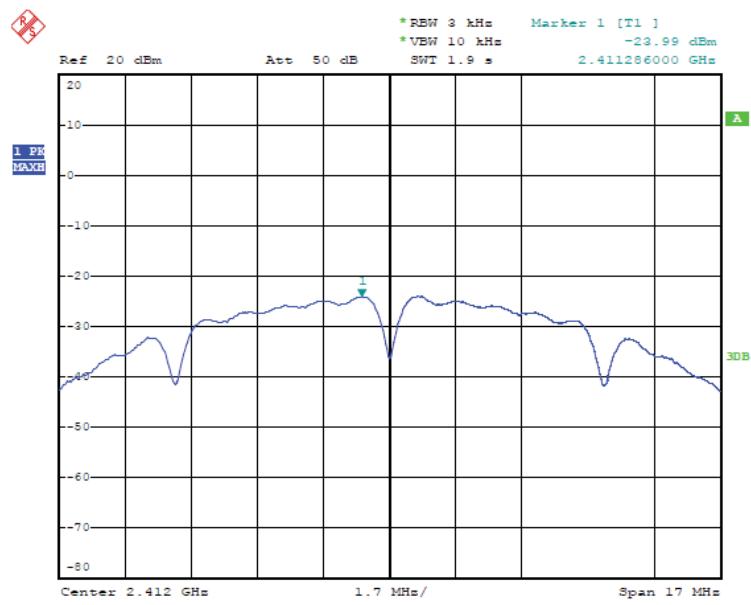


802.11b Channel Middle 2437MHz

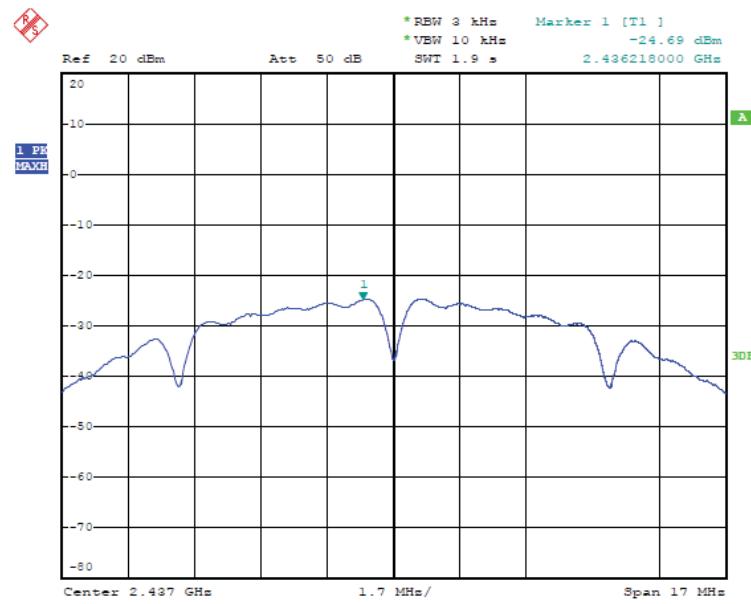


802.11b Channel High 2462MHz

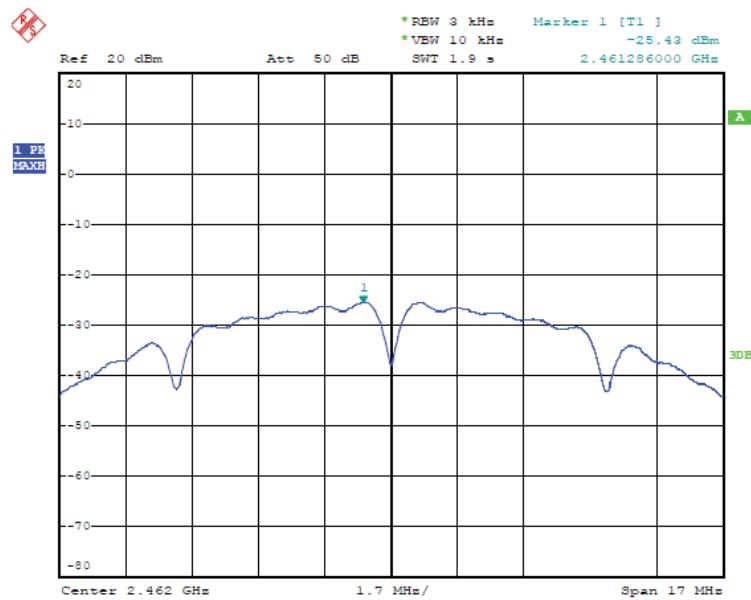


802.11g Channel Low 2412MHz

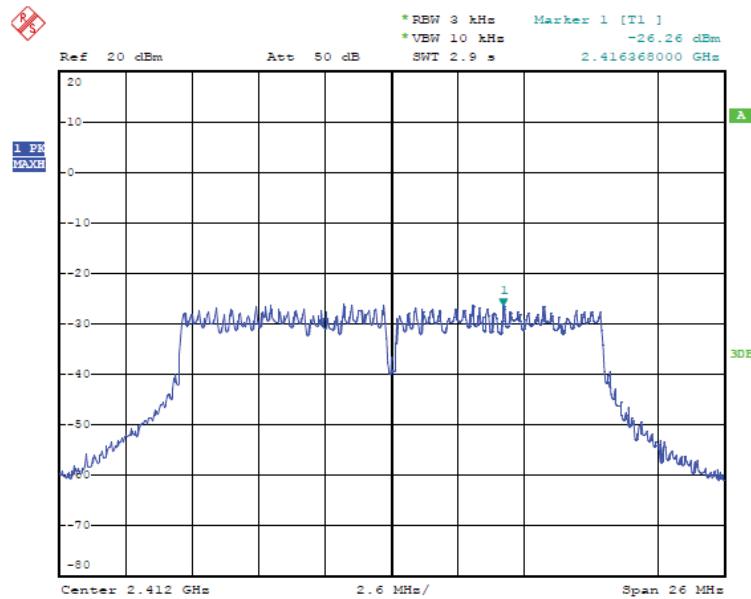


802.11g Channel Middle 2437MHz

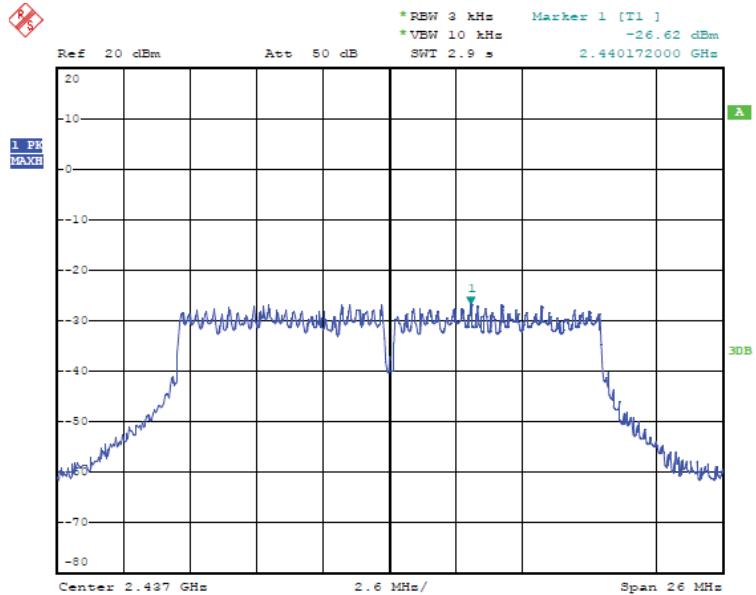


802.11g Channel High 2462MHz

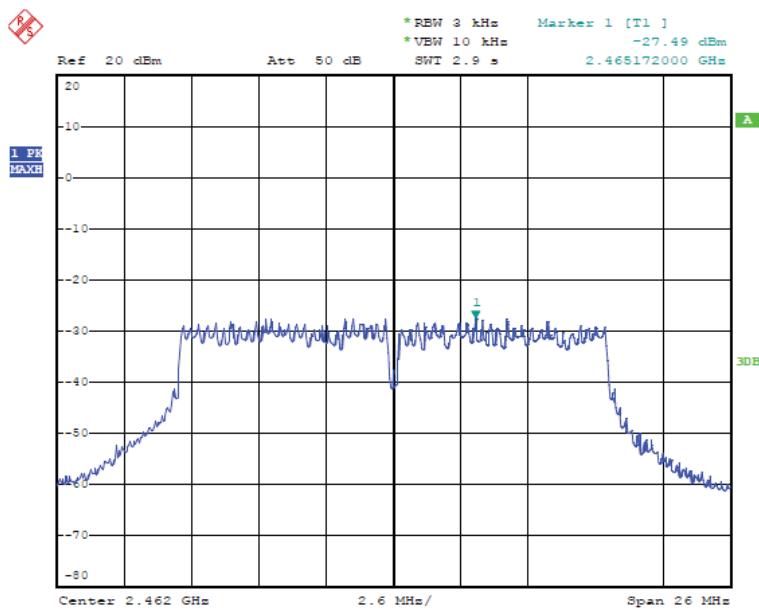


802.11n Channel High 2412MHz (20MHz)

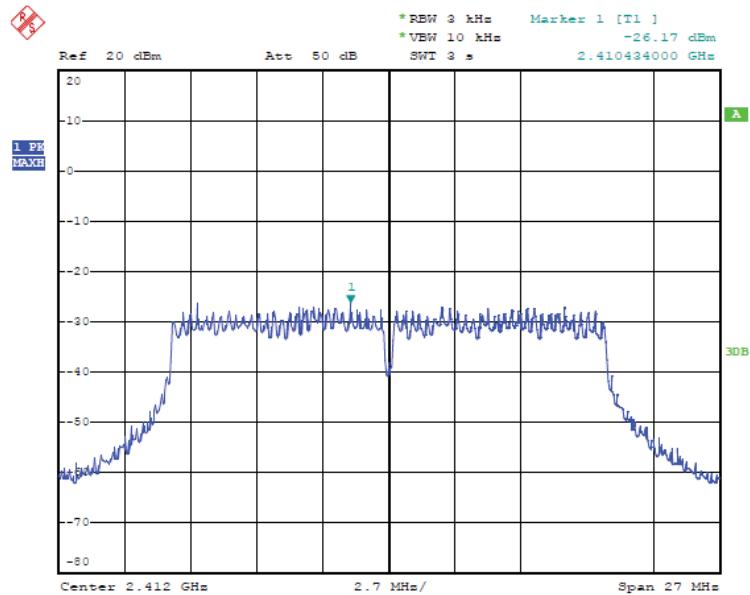


802.11n Channel High 2437MHz (20MHz)

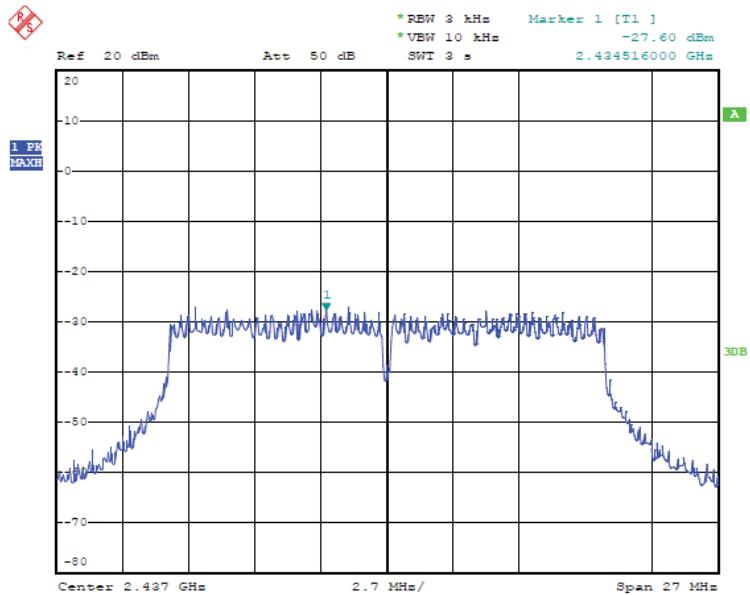


802.11n Channel High 2462MHz (20MHz)

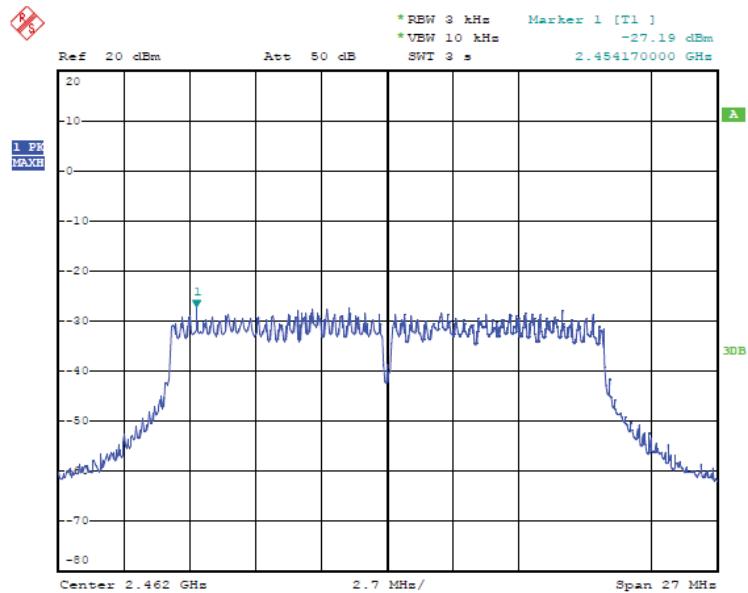


802.11n Channel Low 2422MHz (40MHz)

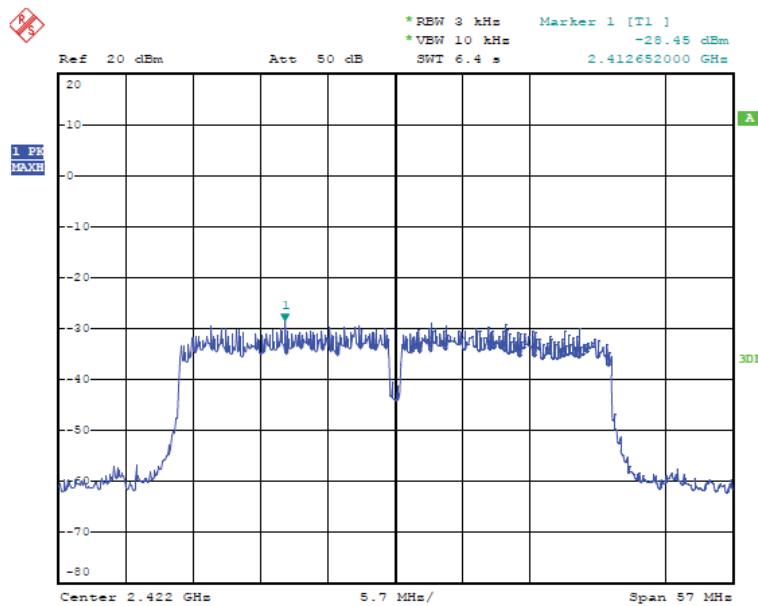

802.11nChannel Middle 2437MHz (40MHz)

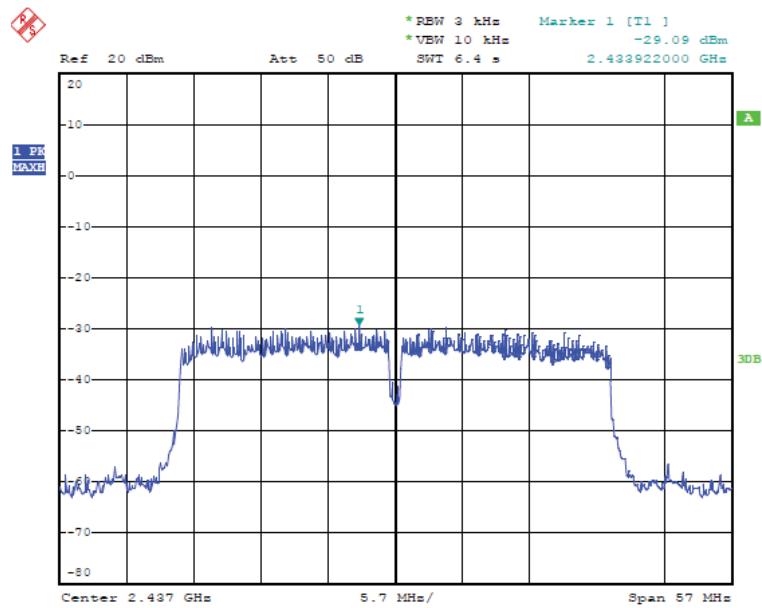


802.11nChannel High 2452MHz (40MHz)

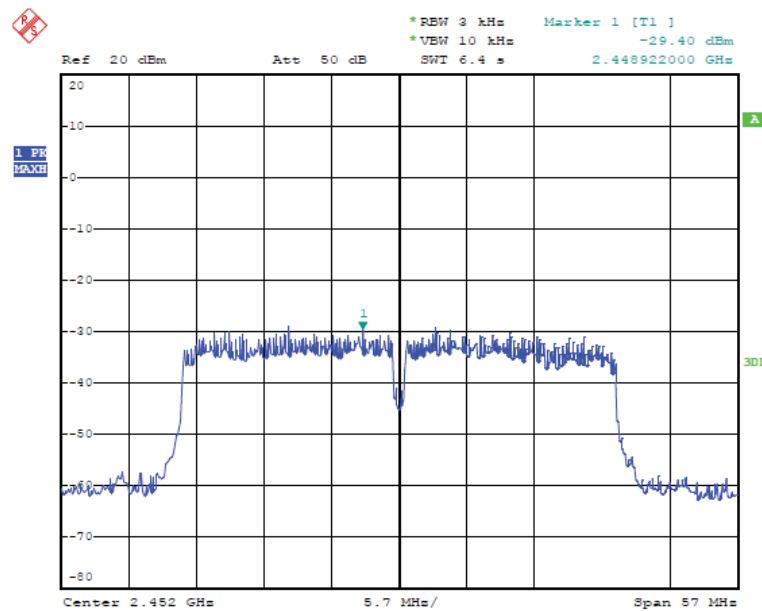

7 Band Edge Compliance Test

7.1 Block Diagram of Test Setup



7.2 Limits

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

7.3 Test Procedure

Conducted Band Edge:

- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

Radiate Band Edge:

- The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
- The turntable was rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: RBW=1MHz, VBW=1MHz
- The band edges was measured and recorded.

7.4 Test Result

PASS


802.11b			
Channel	Frequency (MHz)	Result of Band Edge (dBc)	Limit (dBc)
Low	2412	44.68	>20dBc
High	2462	52.87	> 20dBc

802.11g			
Channel	Frequency (MHz)	Result of Band Edge (dBc)	Limit (dBc)
Low	2412	34.95	>20dBc
High	2462	40.66	> 20dBc


802.11n (20MHz)			
Channel	Frequency (MHz)	Result of Band Edge (dBc)	Limit (dBc)
Low	2412	36.25	>20dBc
High	2462	41.87	> 20dBc

802.11n (40MHz)			
Channel	Frequency (MHz)	Result of Band Edge (dBc)	Limit (dBc)
Low	2422	31.15	>20dBc
High	2452	37.70	> 20dBc


802.11b Channel Low 2412MHz

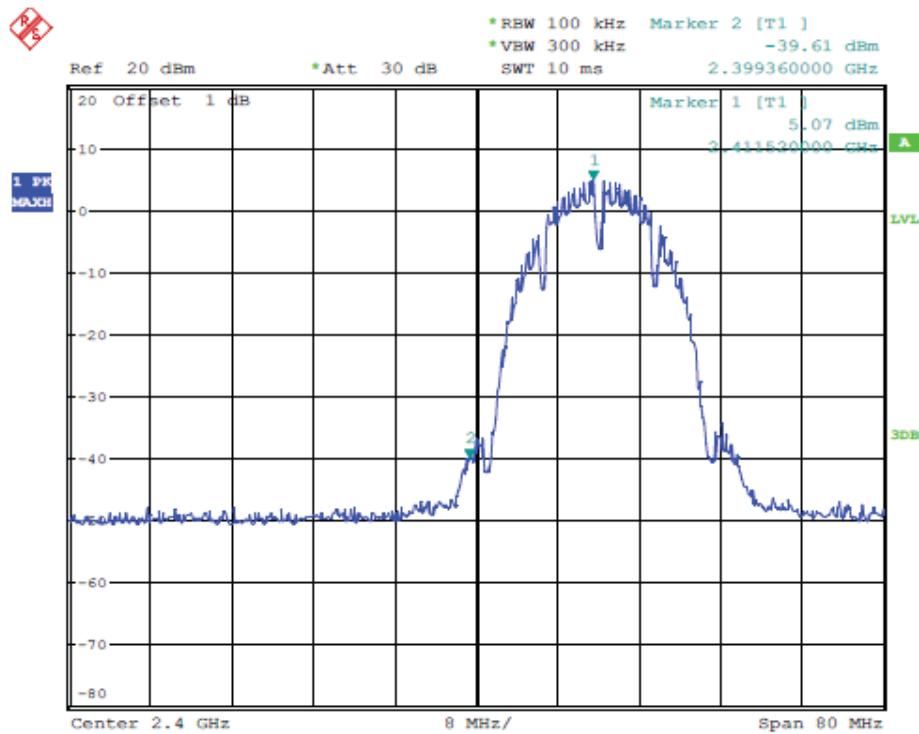


802.11b Channel High 2462MHz

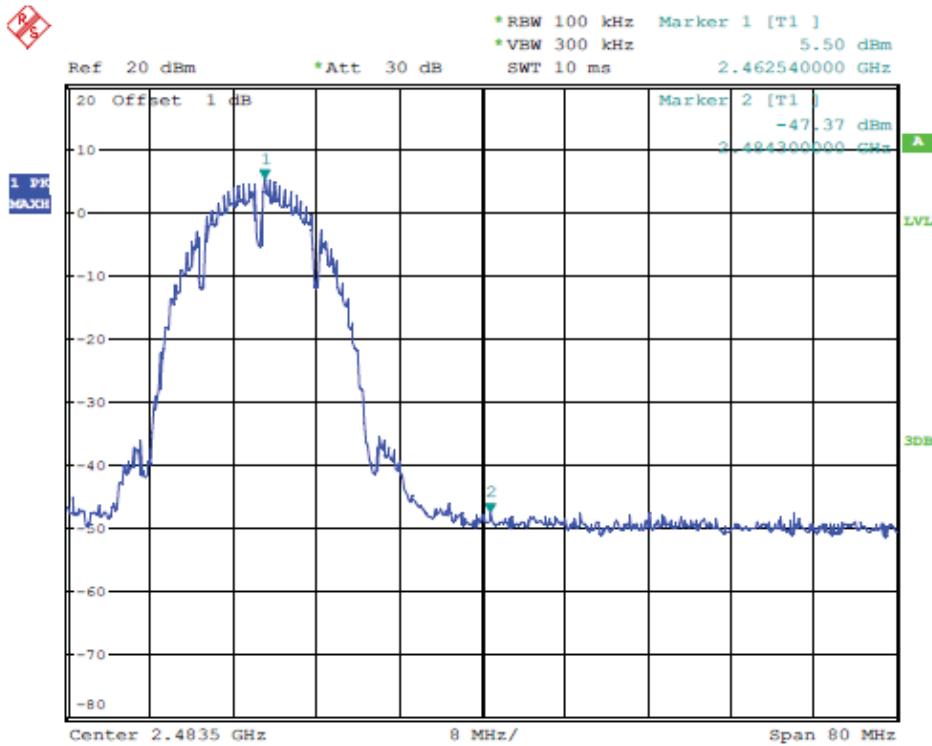


802.11g Channel Low 2412MHz

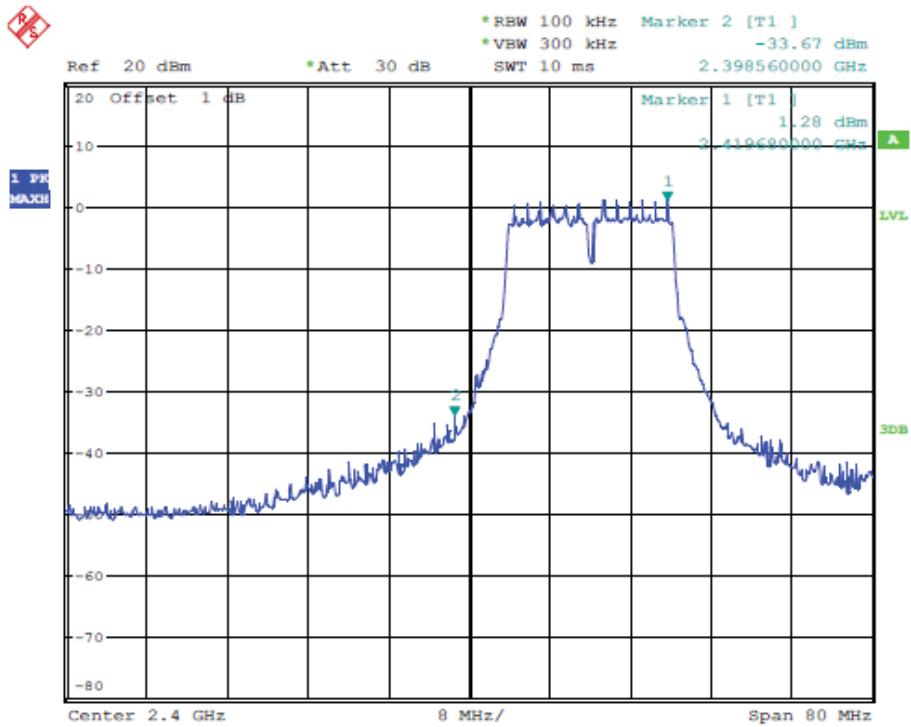


802.11g Channel High 2462MHz

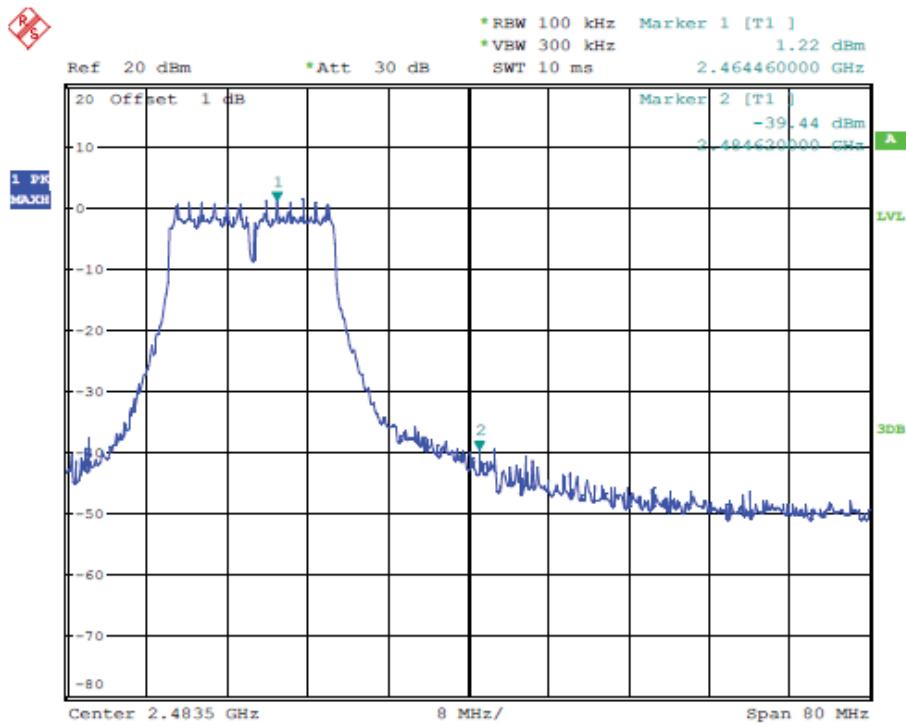


802.11n Channel High 2412MHz(20MHz)

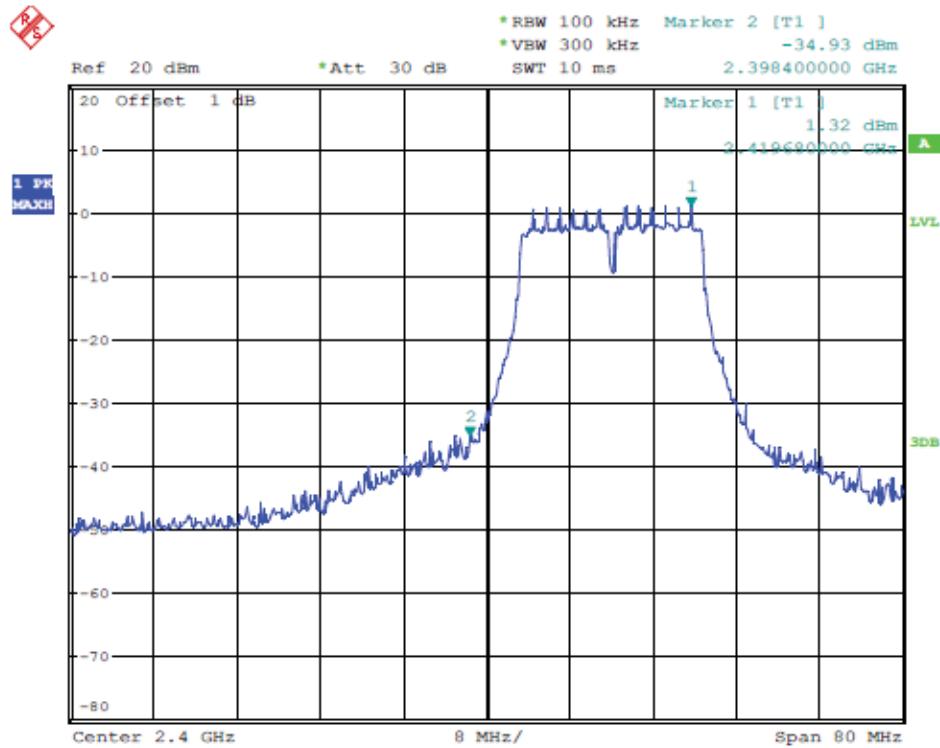


802.11n Channel High 2462MHz(20MHz)

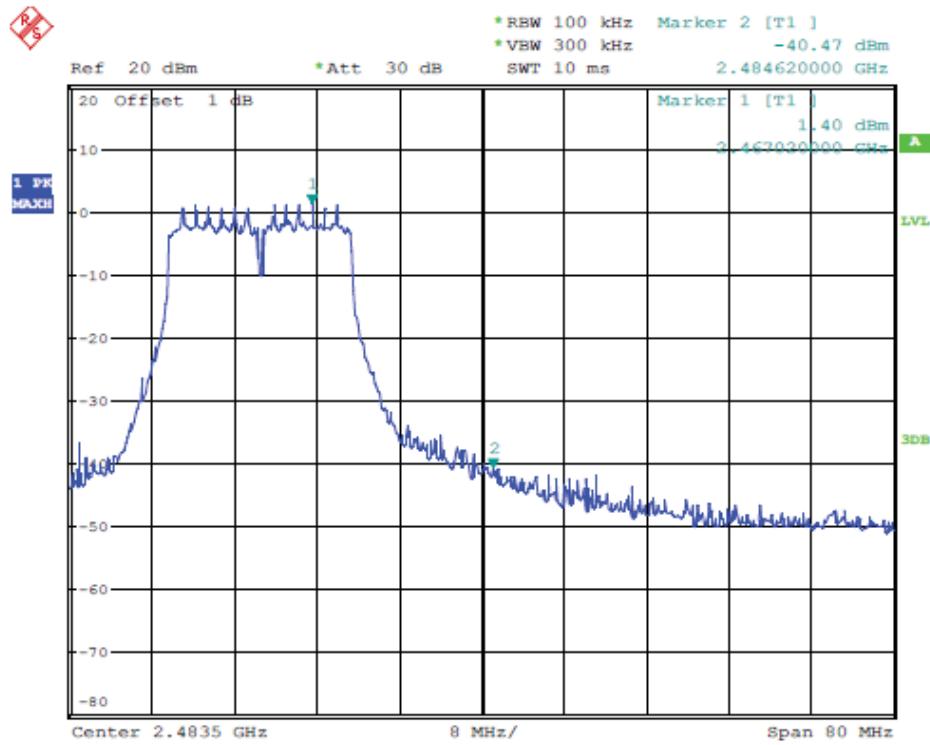


802.11n Channel High 2422MHz(40MHz)

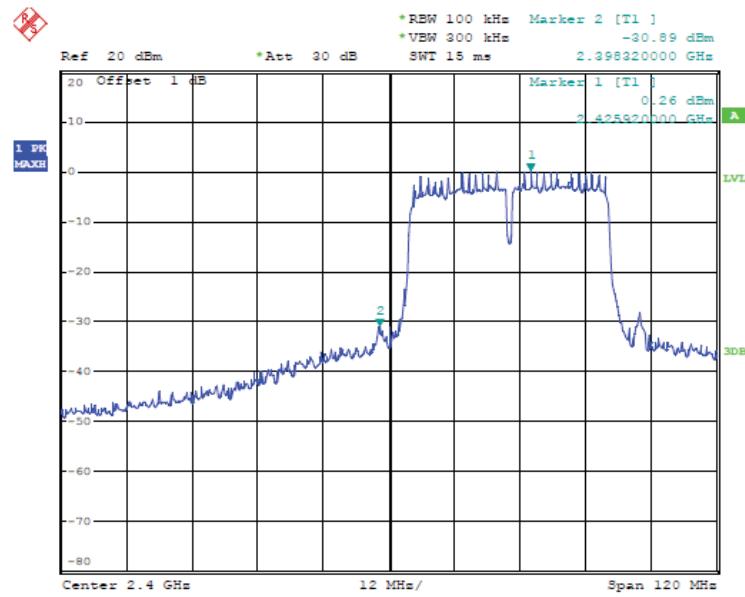


802.11n Channel High 2452MHz(40MHz)

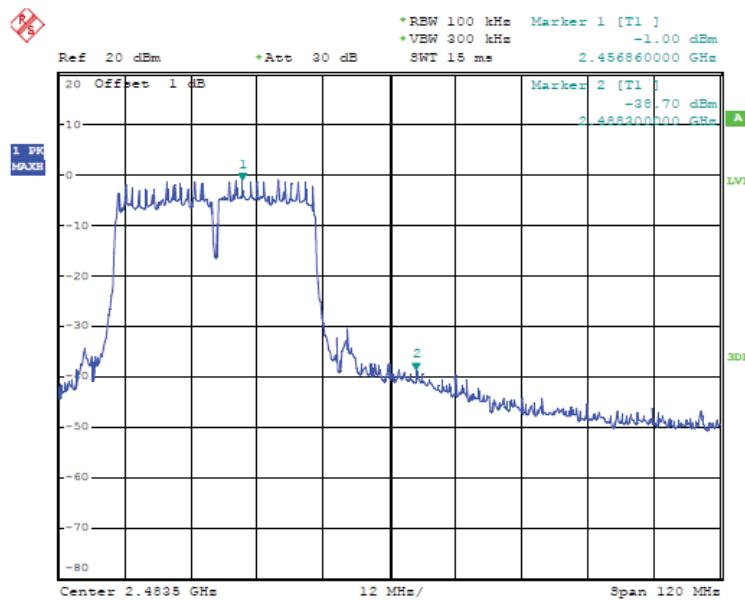

Radiated Band Edge Result

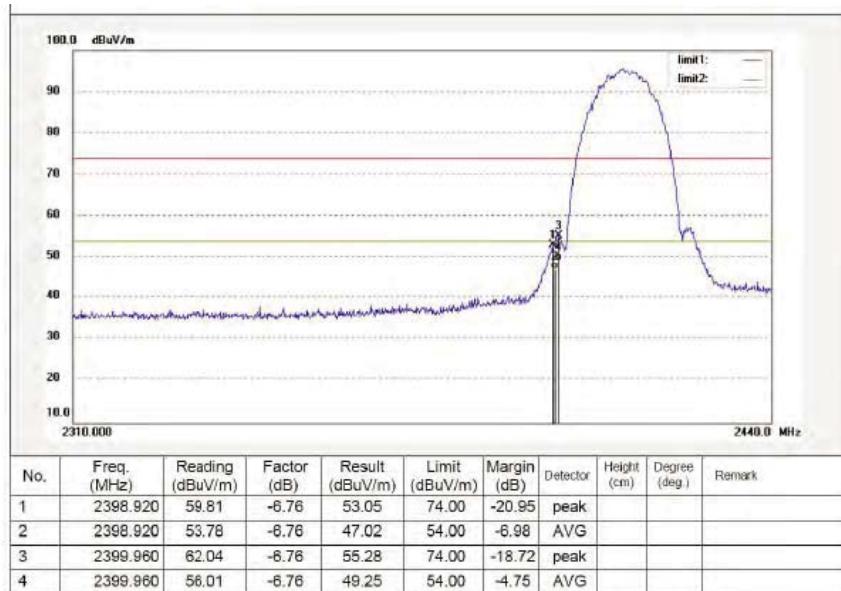802.11b Channel Low 2412MHz
Horizontal


Vertical

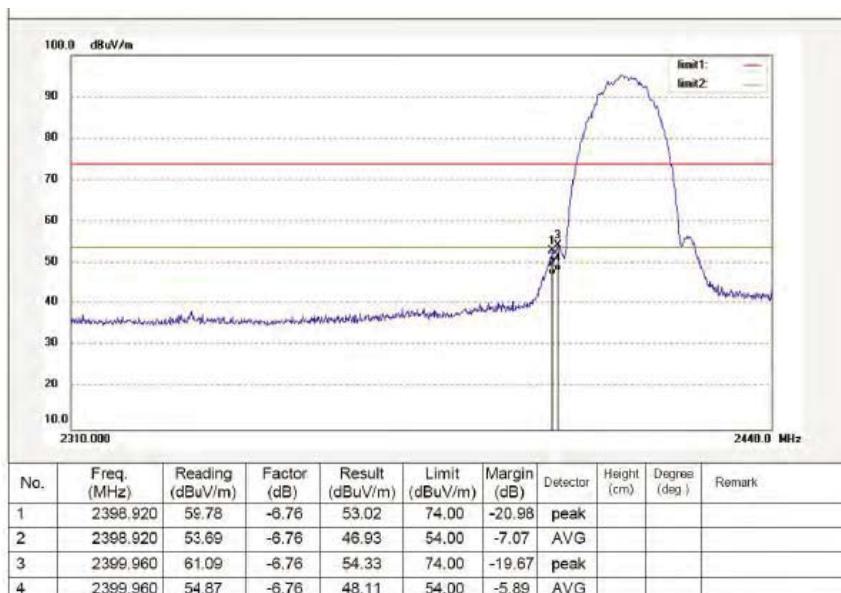


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
- Result = Reading + Corrected Factor
3. Display the measurement of peak values.

802.11b Channel High 2462MHz
Horizontal

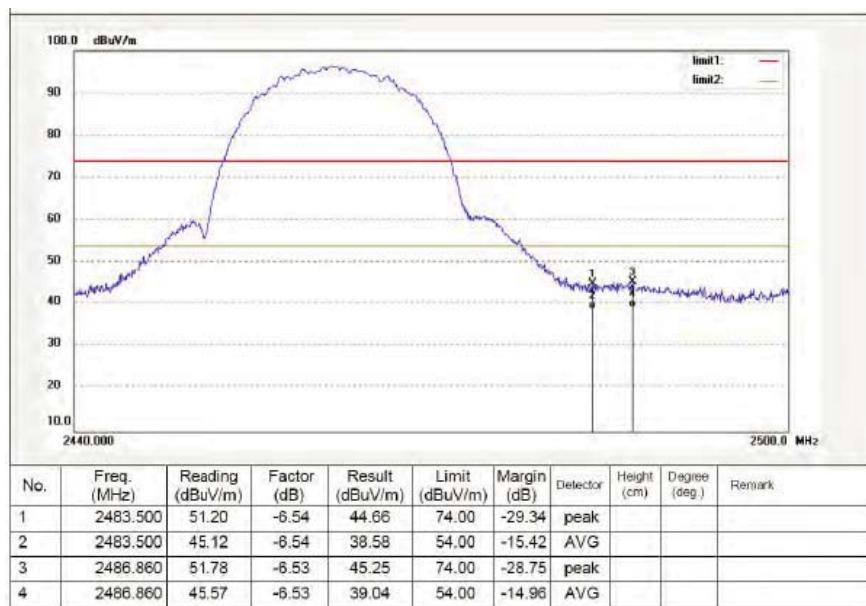

Vertical

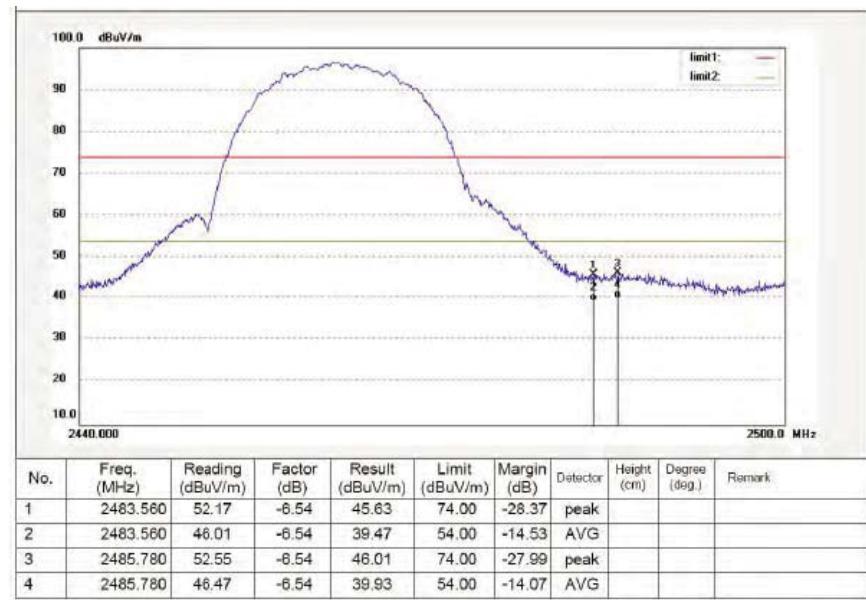


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:


Result = Reading + Corrected Factor

3. Display the measurement of peak values.

802.11g Channel Low 2412MHz
Horizontal

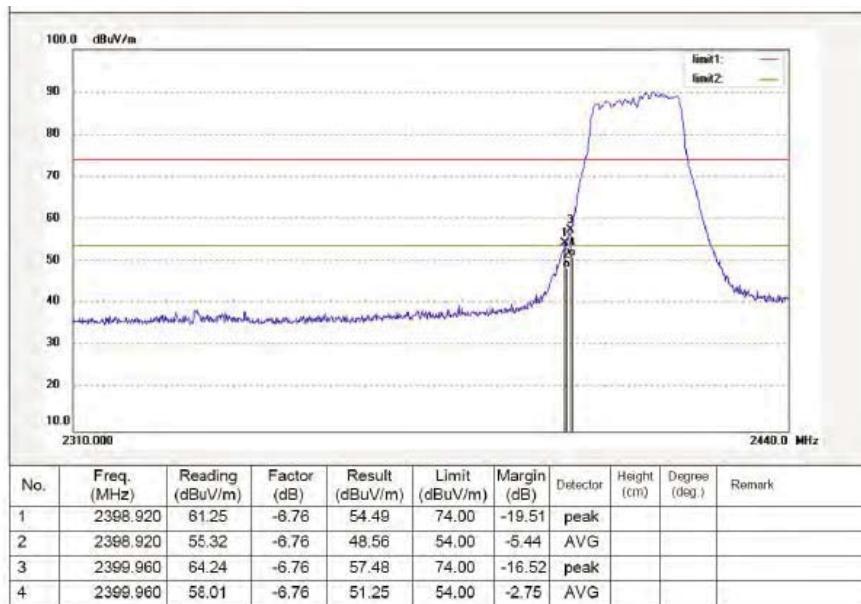


Vertical

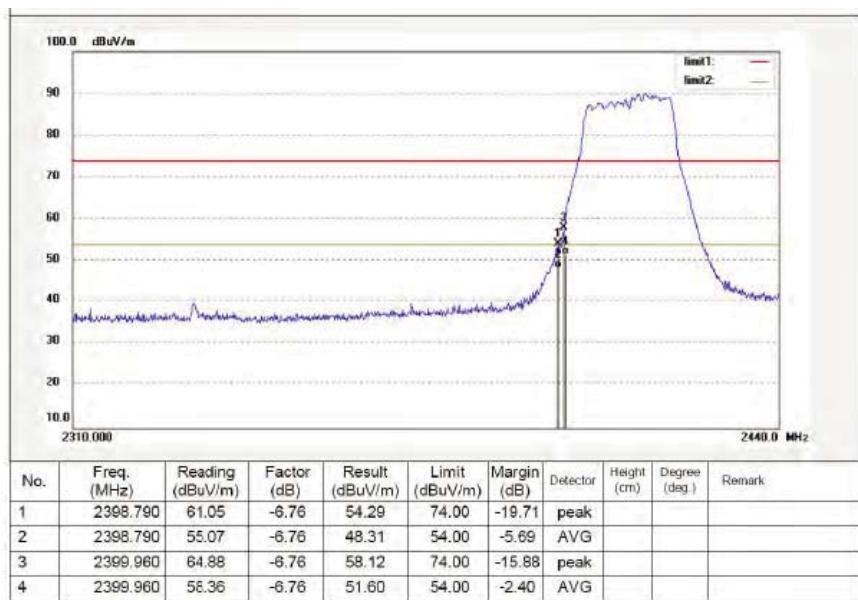


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
3. Result = Reading + Corrected Factor

802.11g Channel High 2462MHz
Horizontal

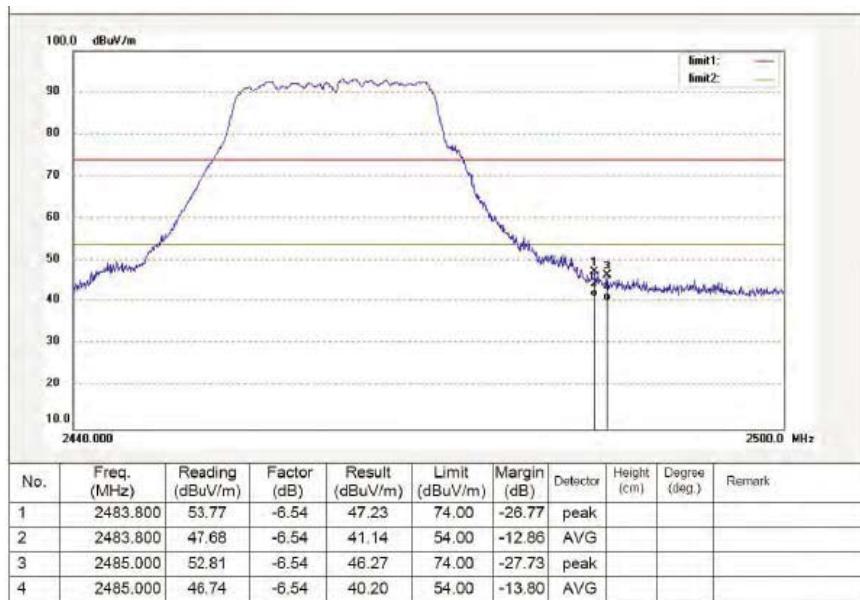

Vertical

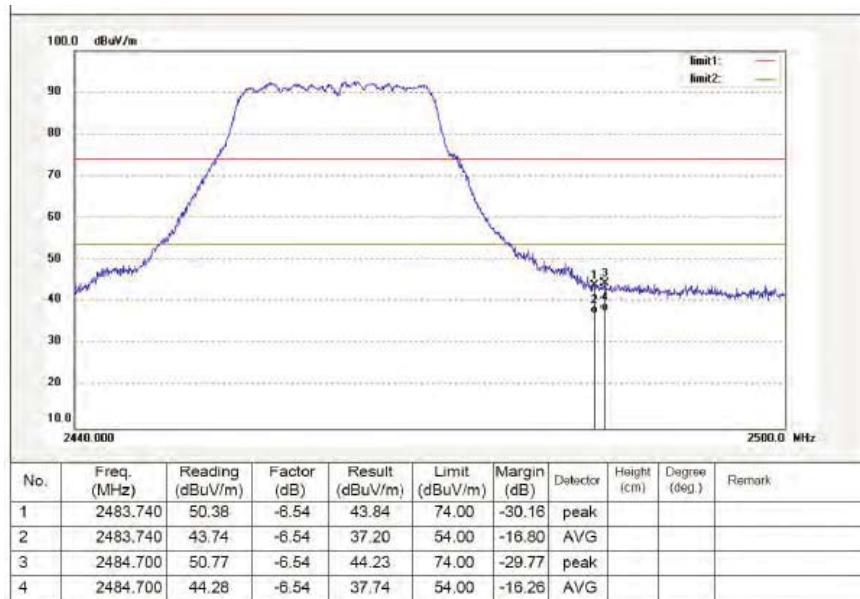


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:


Result = Reading + Corrected Factor

3. Display the measurement of peak values.

802.11n Channel Low 2412MHz (20MHz)
Horizontal

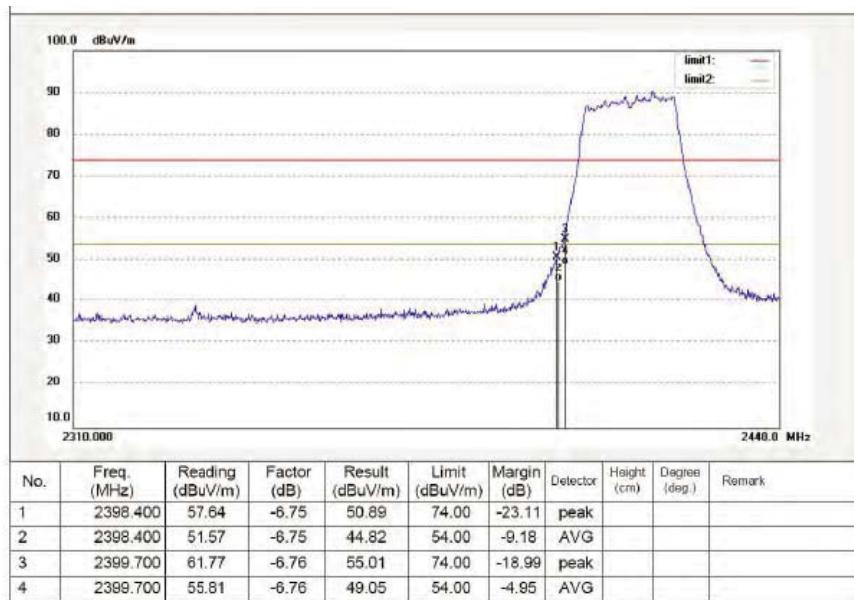


Vertical

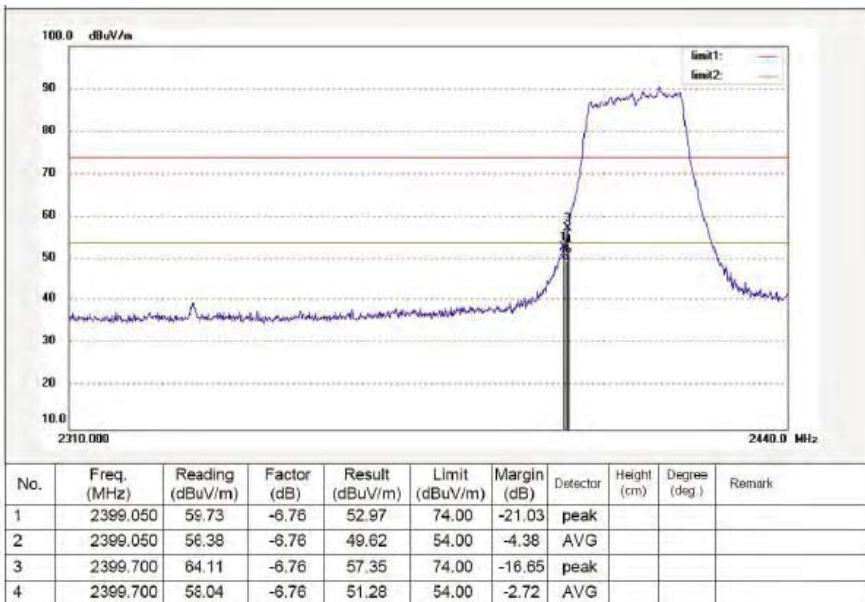


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
- Result = Reading + Corrected Factor
3. Display the measurement of peak values.

802.11n Channel High 2462MHz (20MHz)
Horizontal

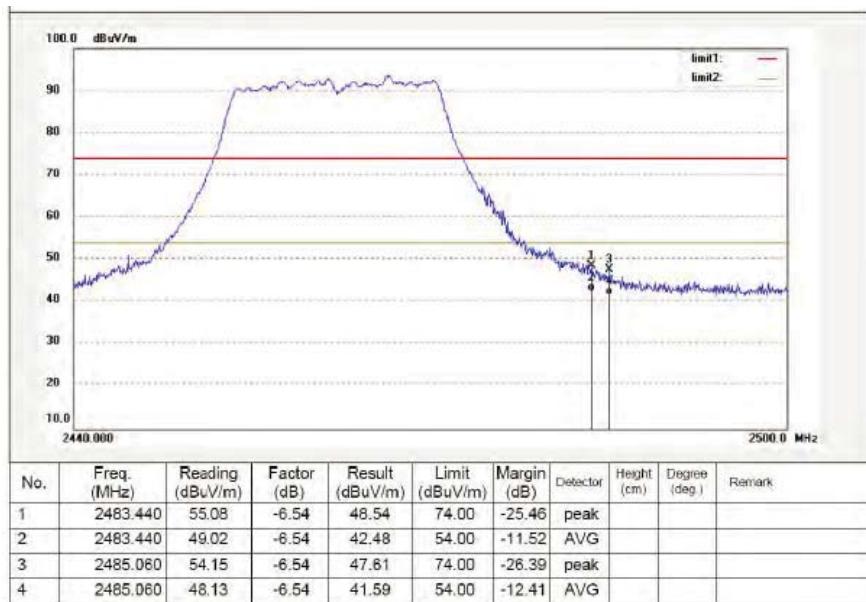

Vertical

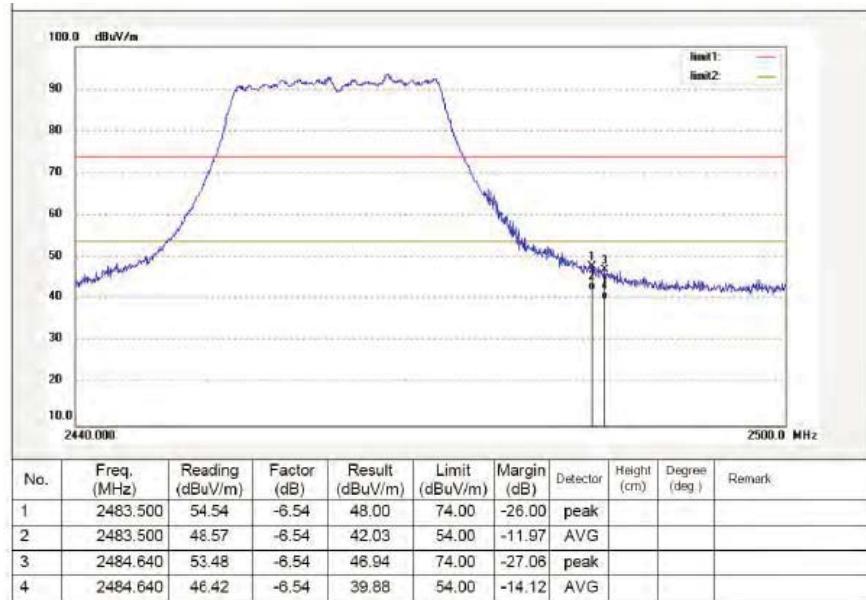


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:


Result = Reading + Corrected Factor

3. Display the measurement of peak values.

802.11n Channel Low 2422MHz (40MHz)
Horizontal

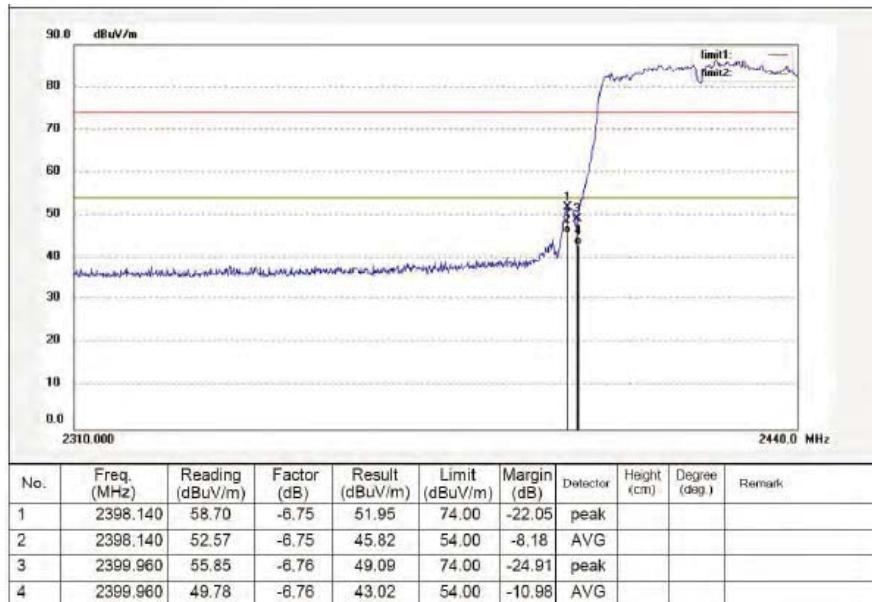


Vertical

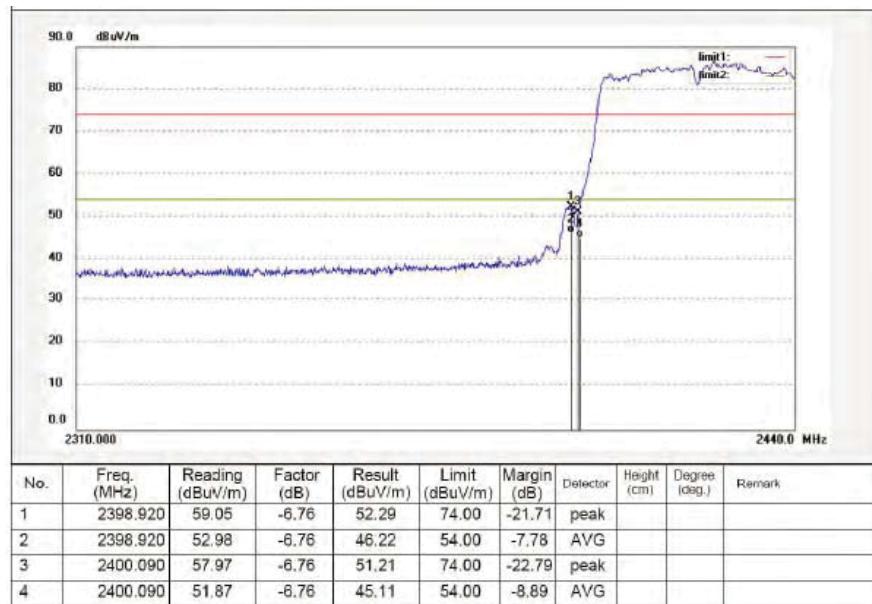


Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
- Result = Reading + Corrected Factor
3. Display the measurement of peak values.

802.11n Channel High 2452MHz (40MHz)
Horizontal

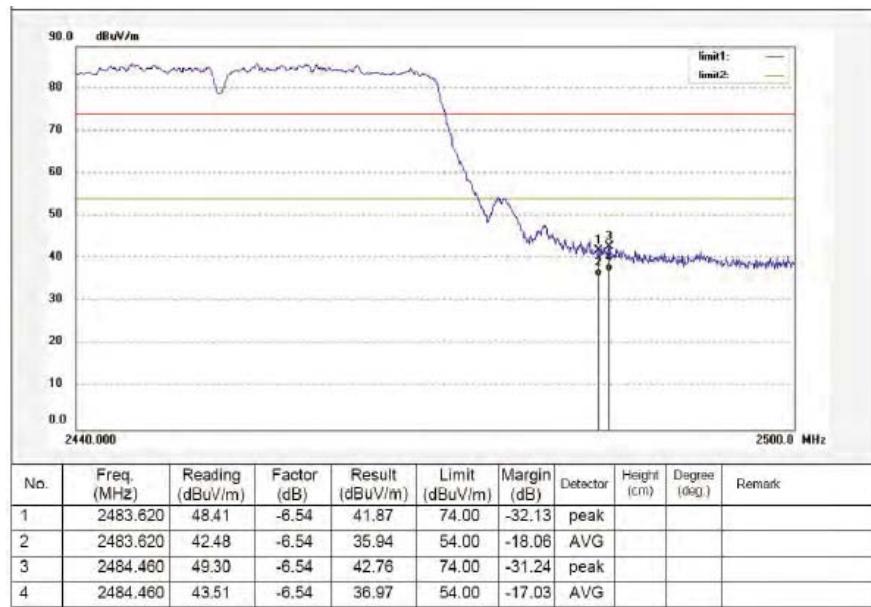

Vertical

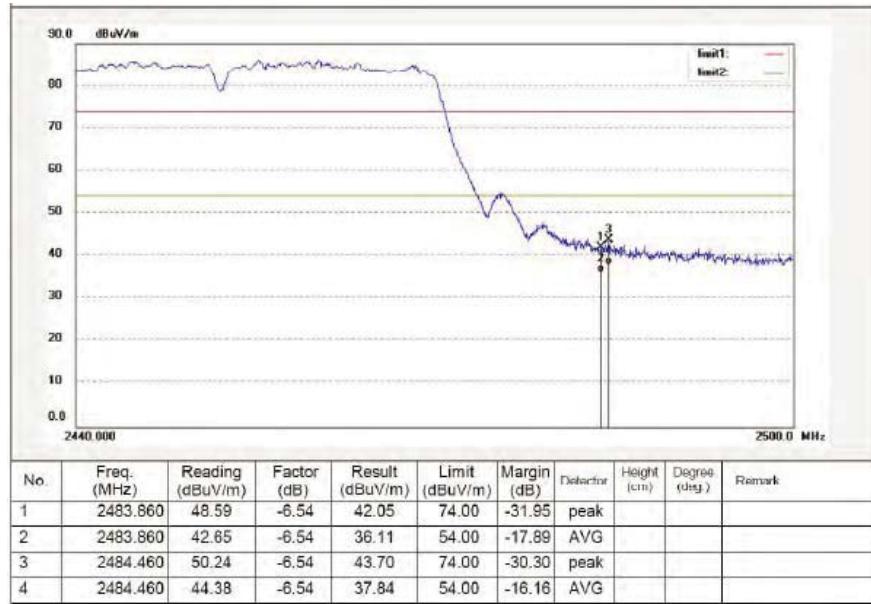

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:


Result = Reading + Corrected Factor

3. Display the measurement of peak values.


8 Radiated Spurious Emission Test

8.1 Block Diagram of Test Setup


(1) Radiated Emission Test-Up Frequency Below 30MHz

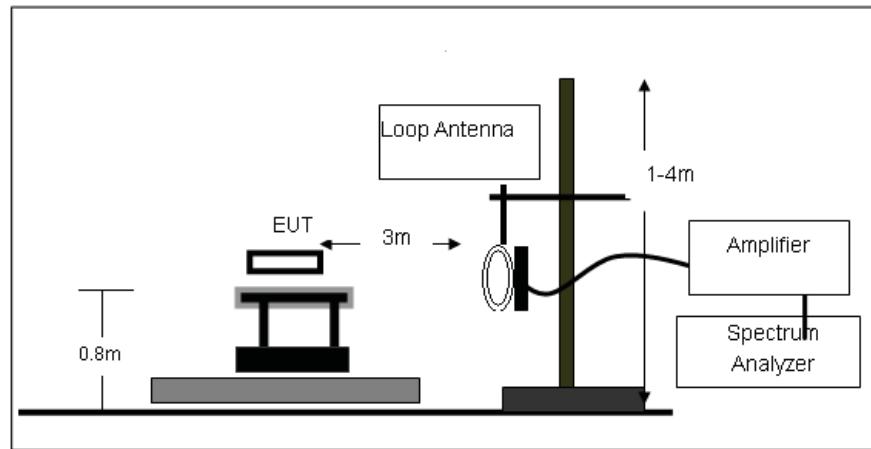

(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

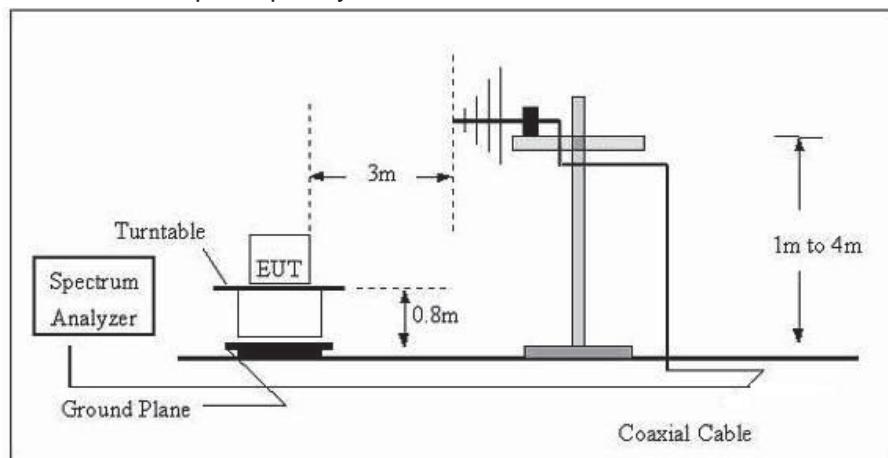

(3) Radiated Emission Test-Up Frequency Above 1GHz

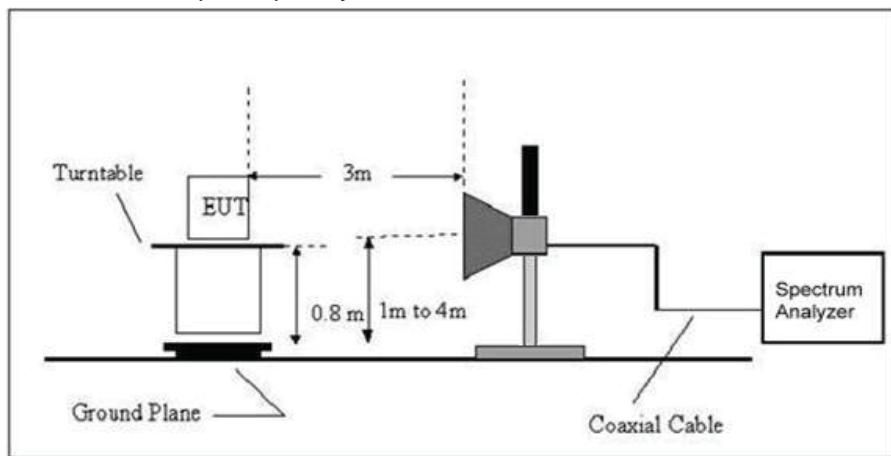

8.2 Limits

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3 Restricted bands of operation

9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

8.3 Test Procedure

a. The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground.

The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The worst-case data rate for this channel to be 1Mbps for 802.11b mode and 6Mbps for 802.11g mode and 300Mbps for 802.11n mode, based on previous with 802.11 WLAN product design architectures.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

8.4 Test Result

PASS

802.11b Channel Low 2412MHz
For Below 30MHz

Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m) (QP)	Limit (dBuV/m)	Margin(dB)
/	/	/	/	/	/

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m) (QP)	Limit (dBuV/m) (QP)	Margin(dB) (QP)	Polarization
90.7016	27.03	13.94	40.97	43.50	-2.35	Vertical
126.3056	26.31	14.89	41.20	43.50	-2.30	
166.0918	26.47	14.62	41.90	43.50	-2.41	
190.8703	25.19	16.14	41.33	43.50	-2.17	
120.6198	24.66	14.72	39.38	43.50	-4.12	Horizontal
163.0180	26.40	14.62	41.02	43.50	-2.31	
256.4463	25.22	18.52	43.74	46.00	-2.26	
328.0667	24.25	19.69	43.94	46.00	-2.06	

For 1GHz-25GHz

Polarization: Vertical

Freq	Preamp Factor	Read Level	Cable Loss	Antenna Factor	Limit Level	Over Line	Over	Remark
							dB	
MHz								
1	4824.00	27.50	30.82	12.01	32.99	48.32	74.00	-25.68 Peak
2	7236.00	27.95	21.19	16.61	37.30	47.15	74.00	-26.85 Peak
3	10333.00	28.83	15.49	17.03	38.93	42.62	74.00	-31.38 Peak
4	13121.00	29.22	13.75	18.36	41.26	44.15	74.00	-29.85 Peak
5	13648.00	29.33	12.36	18.96	43.15	45.14	74.00	-28.86 Peak
6	16980.00	30.09	12.55	21.30	44.56	48.32	74.00	-25.68 Peak

Polarization: Horizontal

Freq	Preamp Factor	Read Level	Cable Loss	Antenna Factor	Limit Level	Over Line	Over	Remark
							dB	
MHz								
1	4824.00	27.50	32.39	12.01	32.99	49.89	74.00	-24.11 Peak
2	7236.00	27.95	23.01	16.61	37.30	48.97	74.00	-25.03 Peak
3	10282.00	28.83	18.49	17.02	38.85	45.53	74.00	-28.47 Peak
4	11353.00	28.94	17.45	17.24	39.78	45.53	74.00	-28.47 Peak
5	12951.00	29.19	16.43	18.17	40.58	45.99	74.00	-28.01 Peak
6	13818.00	29.36	12.35	19.14	43.32	45.45	74.00	-28.55 Peak

802.11b Channel Middle 2437MHz
For Below 30MHz

Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
/	/	/	/	/	/

For 30MHz-1000MHz
Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m) (QP)	Limit (dBuV/m) (QP)	Margin(dB) (QP)	Polarization
91.7016	27.38	13.94	41.32	43.50	-2.18	Vertical
130.3056	26.34	14.89	41.23	43.50	-2.37	
161.0918	26.48	14.62	41.10	43.50	-2.40	
195.8703	25.40	16.14	41.18	43.50	-2.32	
98.6198	27.24	14.01	41.25	43.50	-4.40	Horizontal
130.0180	26.07	14.89	41.96	43.50	-2.54	
162.4463	26.55	14.62	41.17	43.50	-2.33	
195.0668	25.25	16.02	41.27	43.50	-2.23	

For 1GHz-25GHz
Polarization: Vertical

Freq	Preamp Factor	Read Level	Cable			Antenna Factor	Level	Limit Line	Over Limit	Remark
			dB	dBuV	dB					
MHz										
1	4874.00	27.53	30.56	12.14	33.11	48.28	74.00	-25.72	Peak	
2	7311.00	27.96	21.20	16.62	37.32	47.18	74.00	-26.82	Peak	
3	10333.00	28.83	14.49	17.03	38.93	41.62	74.00	-32.38	Peak	
4	13121.00	29.22	11.75	18.36	41.26	42.15	74.00	-31.85	Peak	
5	13648.00	29.33	10.36	18.96	43.15	43.14	74.00	-30.86	Peak	
6	15535.00	29.63	14.37	20.34	38.53	43.61	74.00	-30.39	Peak	

Polarization: Horizontal

Freq	Preamp Factor	Read Level	Cable			Antenna Factor	Level	Limit Line	Over Limit	Remark
			dB	dBuV	dB					
MHz										
1	4874.00	27.53	30.95	12.14	33.11	48.67	74.00	-25.33	Peak	
2	7311.00	27.96	22.34	16.62	37.32	48.32	74.00	-25.68	Peak	
3	8786.00	28.33	18.50	16.83	37.14	44.14	74.00	-29.86	Peak	
4	10282.00	28.83	18.49	17.02	38.85	45.53	74.00	-28.47	Peak	
5	12951.00	29.19	17.43	18.17	40.58	46.99	74.00	-27.01	Peak	
6	13818.00	29.36	13.35	19.14	43.32	46.45	74.00	-27.55	Peak	

802.11b Channel Middle 2462MHz

For Below 30MHz

Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m)	Limit (dBuV/m)	Margin(dB)
/	/	/	/	/	/

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Freq.(MHz)	Reading (dBuV/m) (QP)	Factor(dB) Corr.	Result (dBuV/m) (QP)	Limit (dBuV/m) (QP)	Margin(dB) (QP)	Polarization
99.7016	27.22	13.94	41.16	43.50	-2.34	Vertical
130.3045	25.80	14.89	40.69	43.50	-2.81	
161.0604	26.52	14.62	41.14	43.50	-2.36	
190.8703	25.30	16.14	41.44	43.50	-2.06	
99.6198	25.24	14.01	39.25	43.50	-4.25	Horizontal
130.2180	22.64	14.89	37.53	43.50	-5.97	
162.3463	26.97	14.62	41.41	43.50	-2.09	
195.0664	23.61	16.02	39.63	43.50	-3.87	

For 1GHz-25GHz

Polarization: Vertical

Freq	Preamp Factor	Read Level	Cable		Antenna Factor	Level	Limit Line	Over Limit	Remark
			MHz	dB					
1	4924.00	27.56	30.64	12.28	33.23	48.59	74.00	-25.41	Peak
2	7386.00	27.98	22.33	16.62	37.36	48.33	74.00	-25.67	Peak
3	10452.00	28.85	15.78	17.06	39.12	43.11	74.00	-30.89	Peak
4	11115.00	28.91	14.32	17.19	39.59	42.19	74.00	-31.81	Peak
5	13648.00	29.33	11.36	18.96	43.15	44.14	74.00	-29.86	Peak
6	15739.00	29.66	14.53	20.47	39.32	44.66	74.00	-29.34	Peak


Polarization: Horizontal

Freq	Preamp Factor	Read Level	Cable		Antenna Factor	Level	Limit Line	Over Limit	Remark
			MHz	dB					
1	4924.00	27.56	30.16	12.28	33.23	48.11	74.00	-25.89	Peak
2	7386.00	27.98	21.61	16.62	37.36	47.61	74.00	-26.39	Peak
3	10282.00	28.83	19.49	17.02	38.85	46.53	74.00	-27.47	Peak
4	11353.00	28.94	17.45	17.24	39.78	45.53	74.00	-28.47	Peak
5	12951.00	29.19	18.43	18.17	40.58	47.99	74.00	-26.01	Peak
6	13818.00	29.36	12.35	19.14	43.32	45.45	74.00	-28.55	Peak

Note: "802.11b" mode is worst mode

9 Conducted Spurious Emission Compliance Test

9.1 Block Diagram of Test Setup



9.2 Limits

Se Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3 Test Procedure



- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.
- The Conducted Spurious Emission was measured and recorded.

9.4 Test Result



PASS

The spectrum analyzer plots are attached as below.



TX 802.11b Channel Low 2412MHz

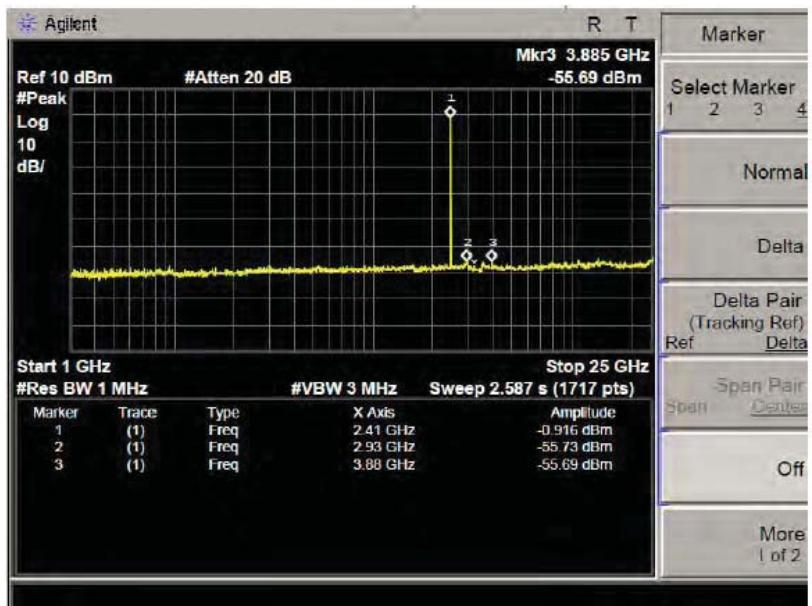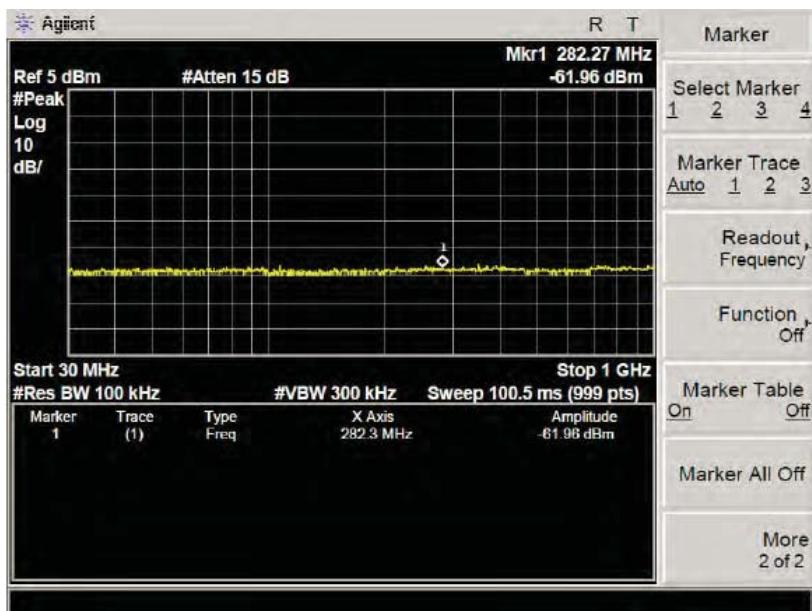



TX 802.11b Channel Middle 2437MHz

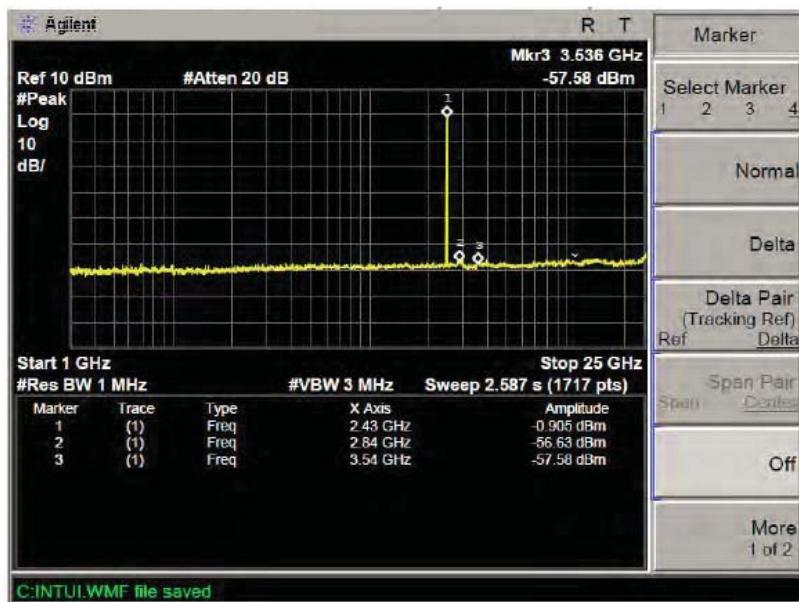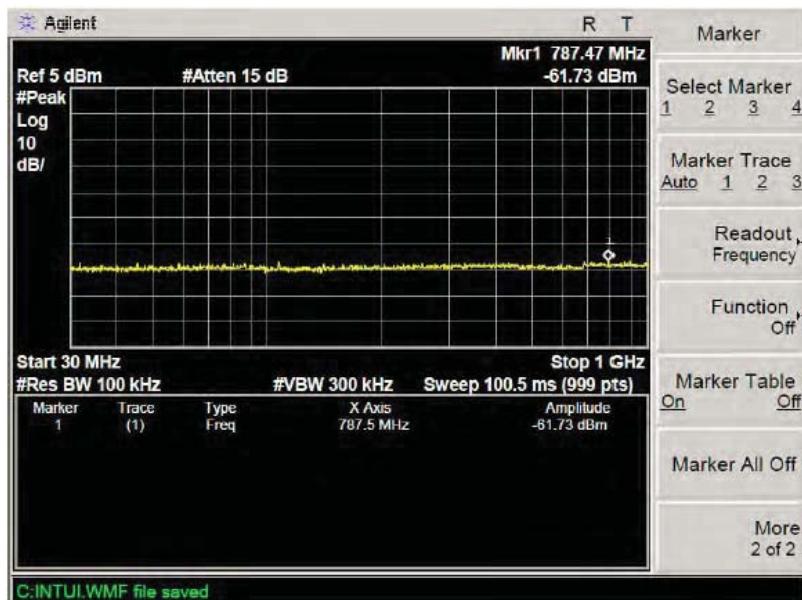



TX 802.11b Channel High 2462MHz

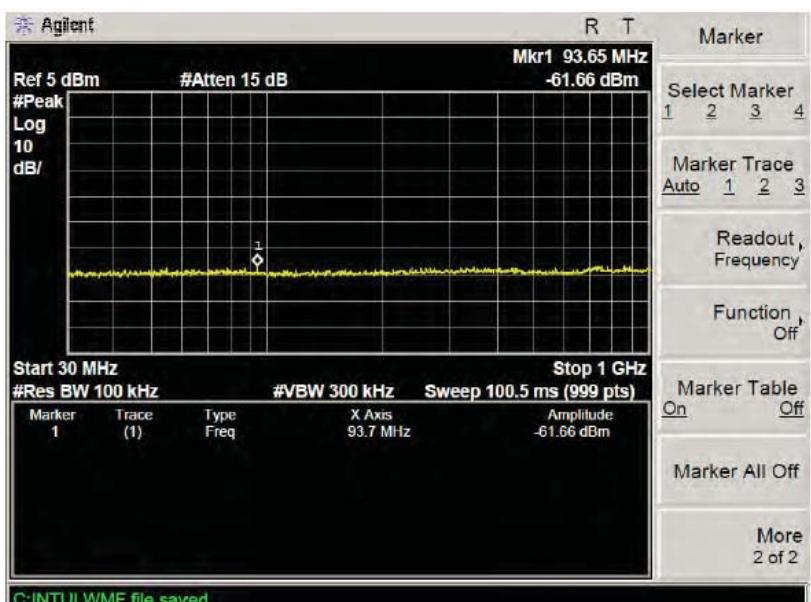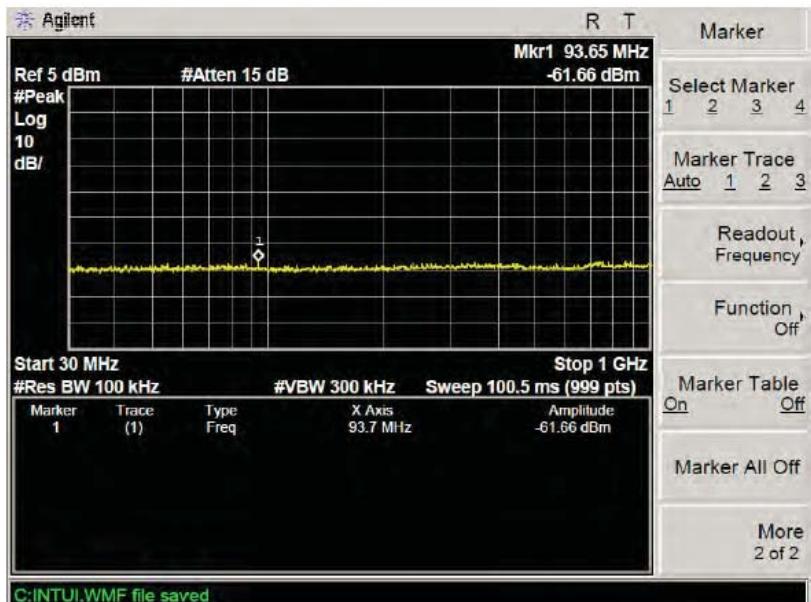


TX 802.11g Channel Low 2412MHz

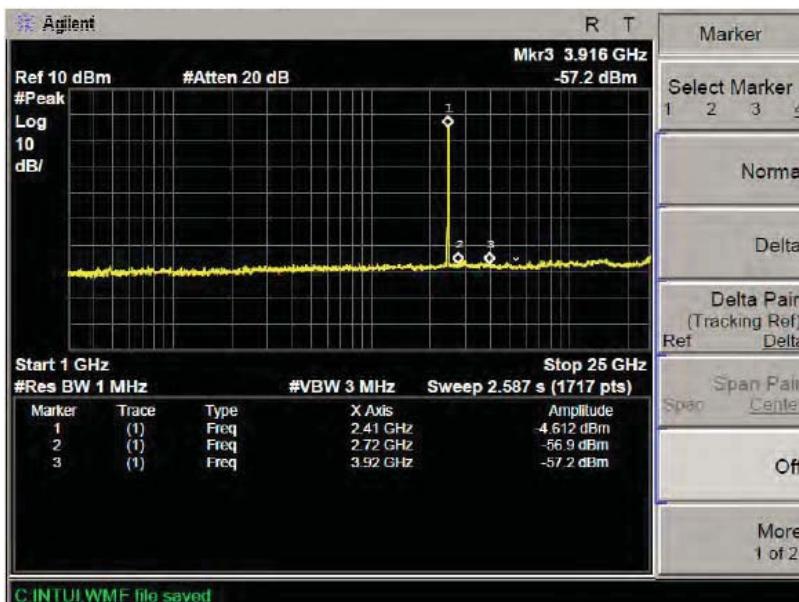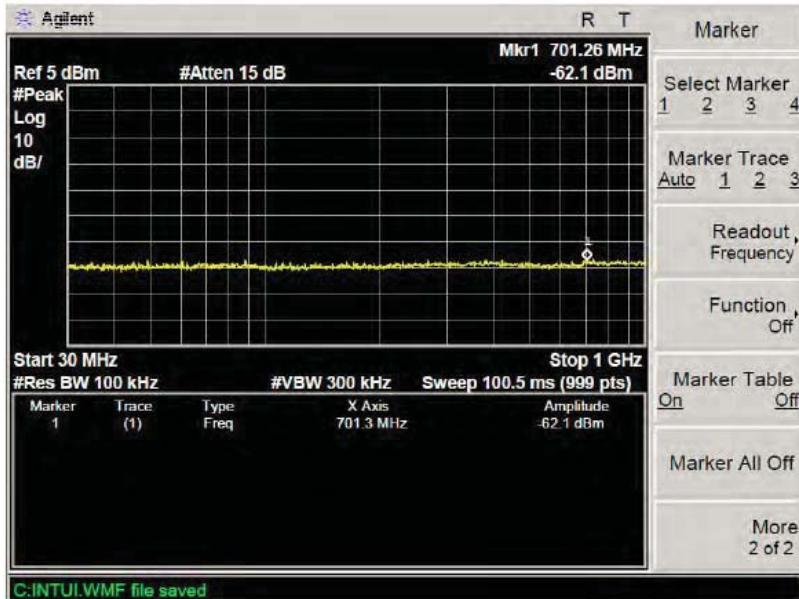


TX 802.11b Channel Middle 2437MHz

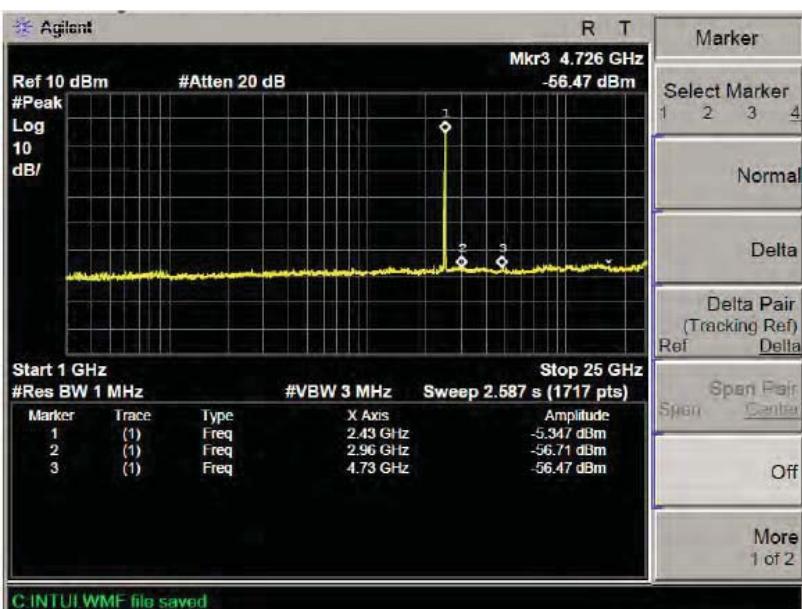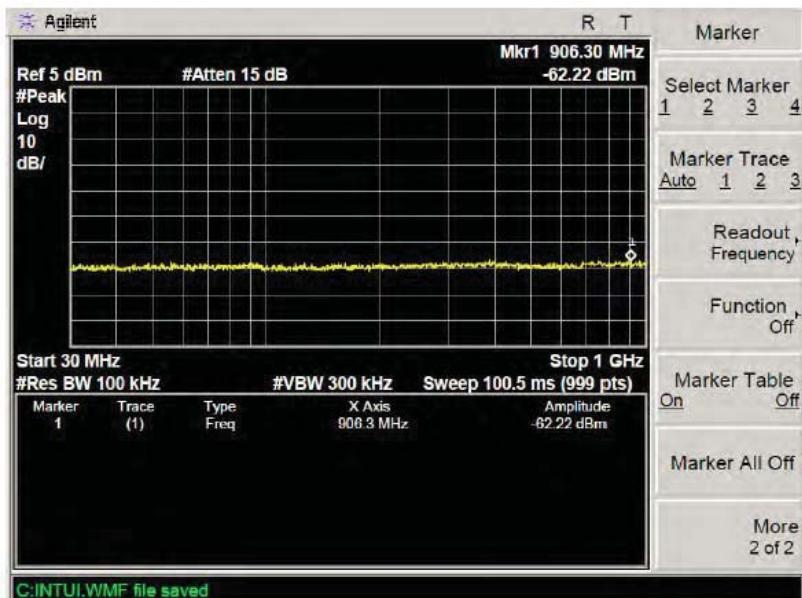

TX 802.11b Channel High 2462MHz


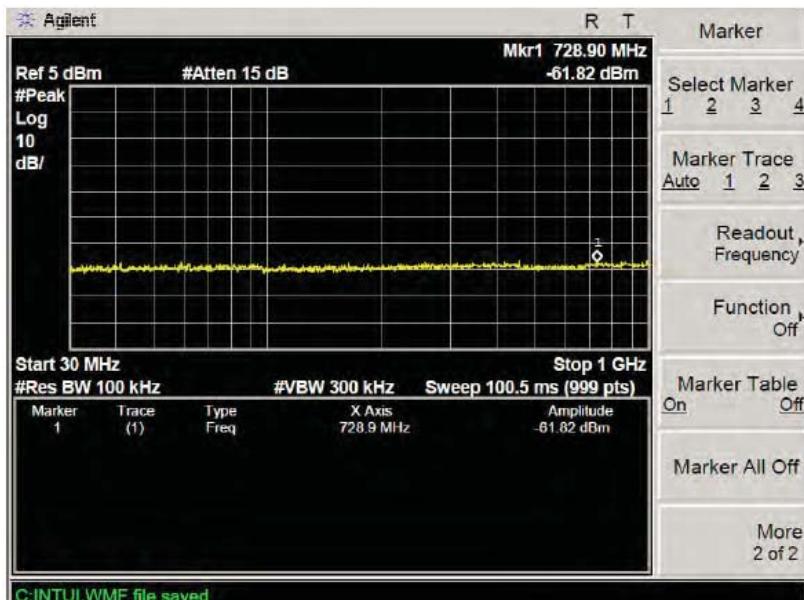


C:\INTUI.WMF file saved


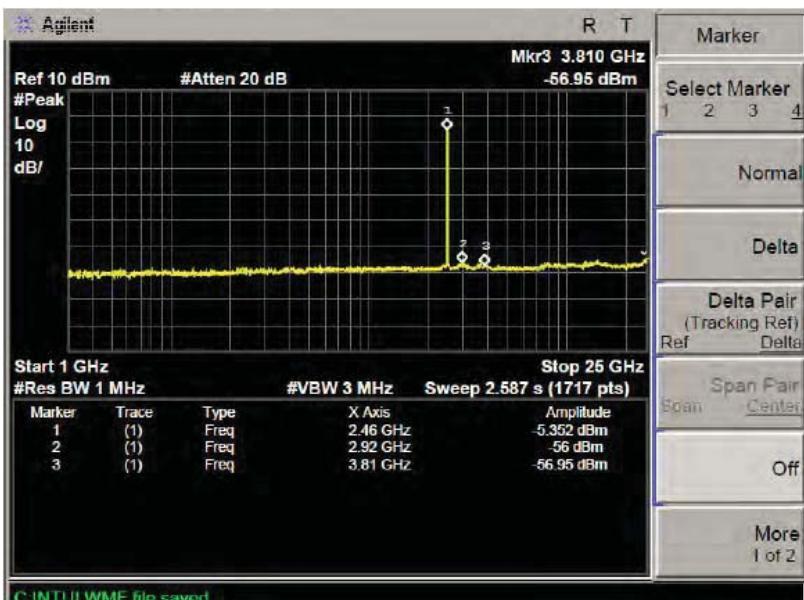


C:\INTUL.WMF file saved



TX 802.11n Channel Low 2412MHz (20MHz)

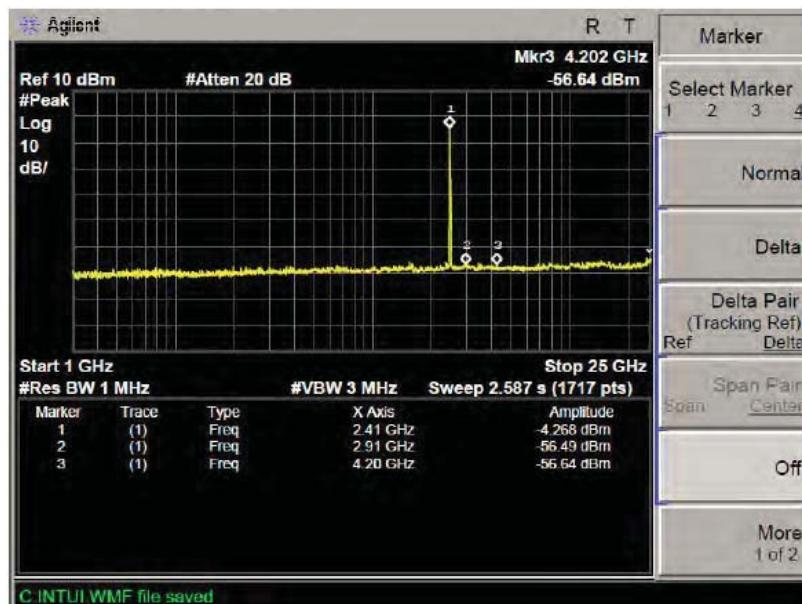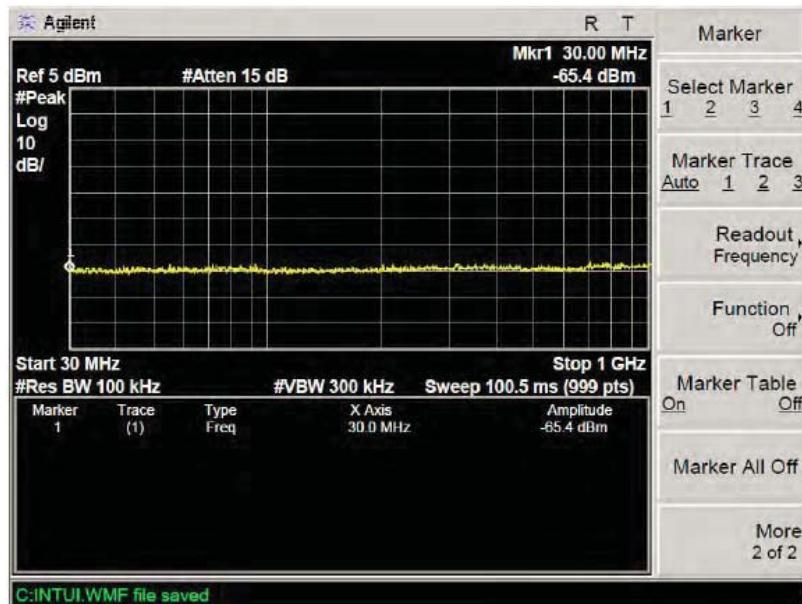



TX 802.11n Channel Middle 2437MHz (20MHz)

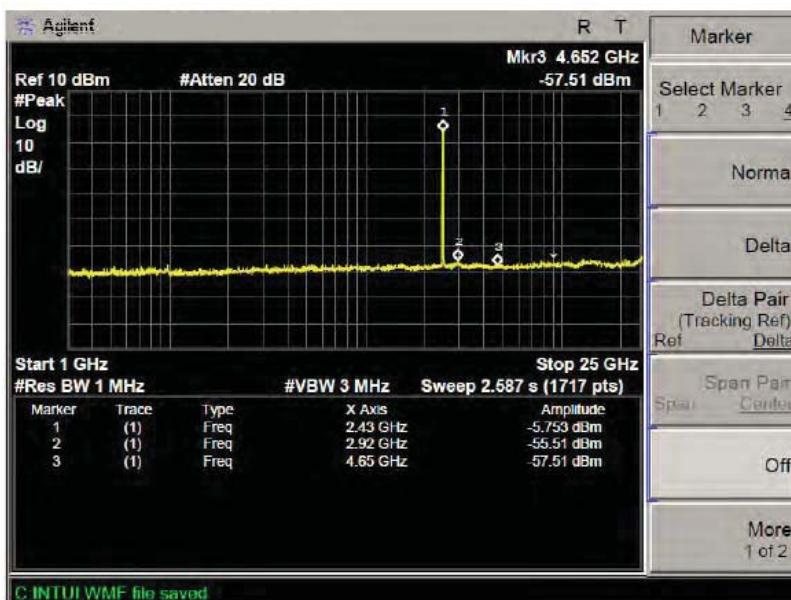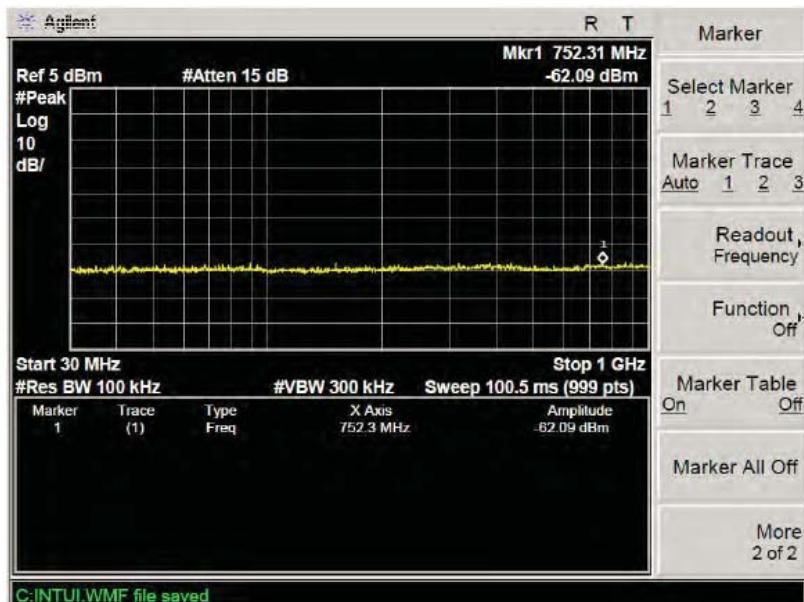



TX 802.11n Channel High 2462MHz (20MHz)

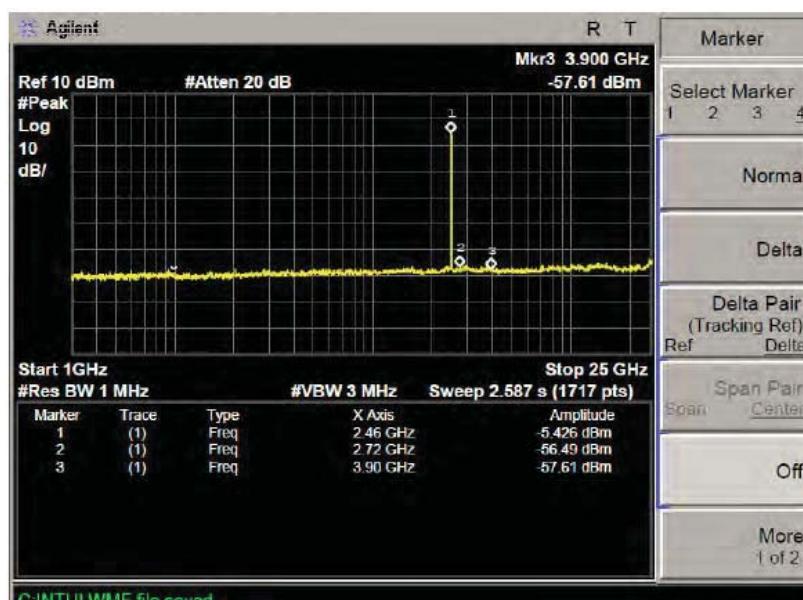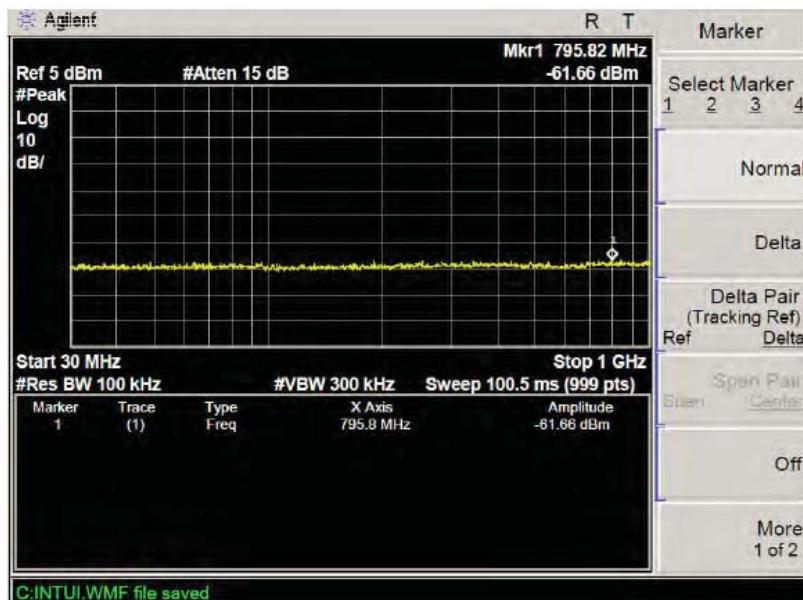



TX 802.11n Channel Low 2422MHz (40MHz)

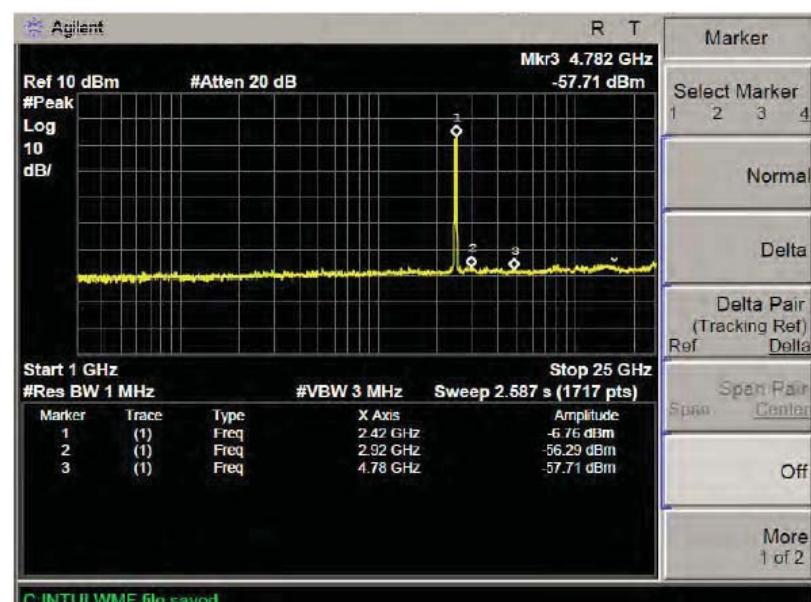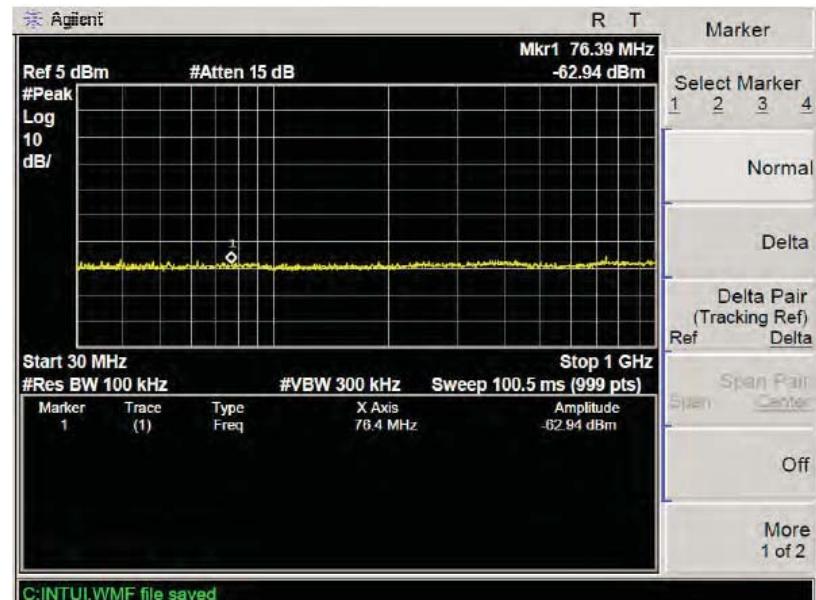

TX 802.11n Channel Middle 2437MHz (40MHz)

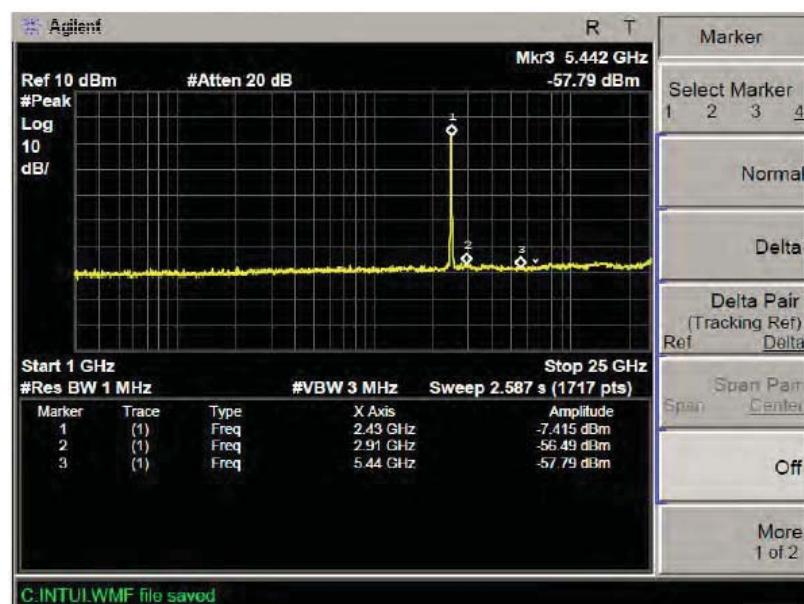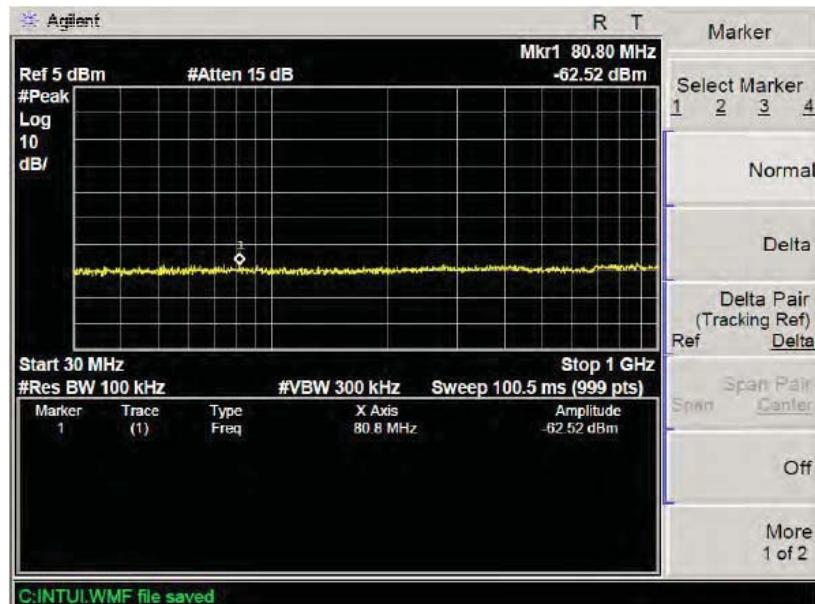


TX 802.11n Channel High 2452MHz (40MHz)

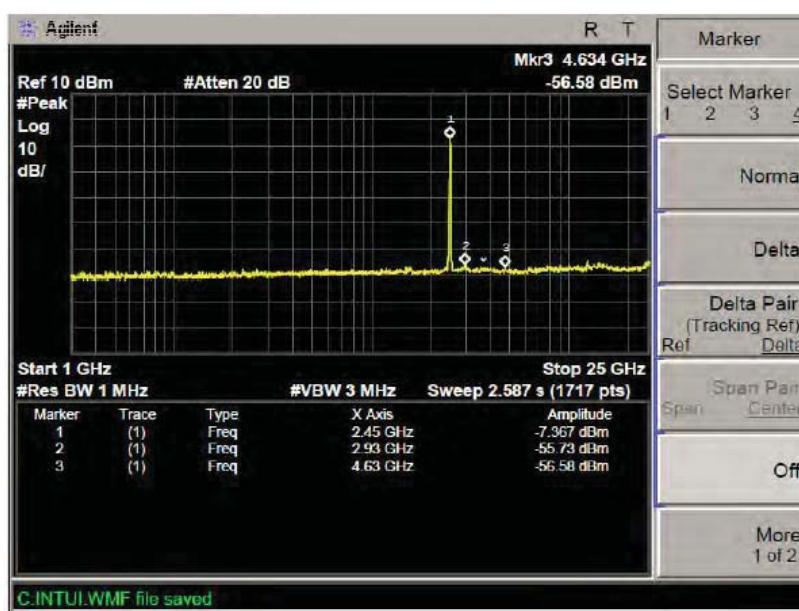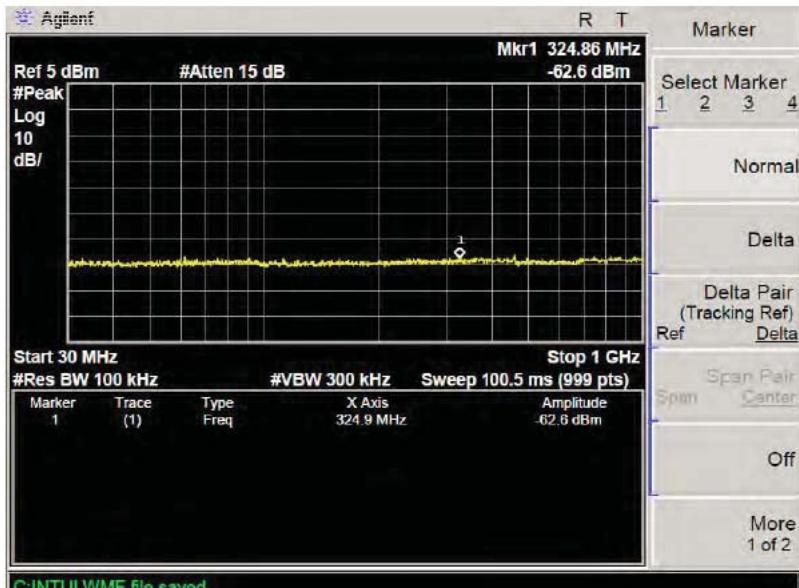

10 AC Power Line Conducted Emission For Part 15 Section 15.207(A)

10.1 Block Diagram of Test Setup

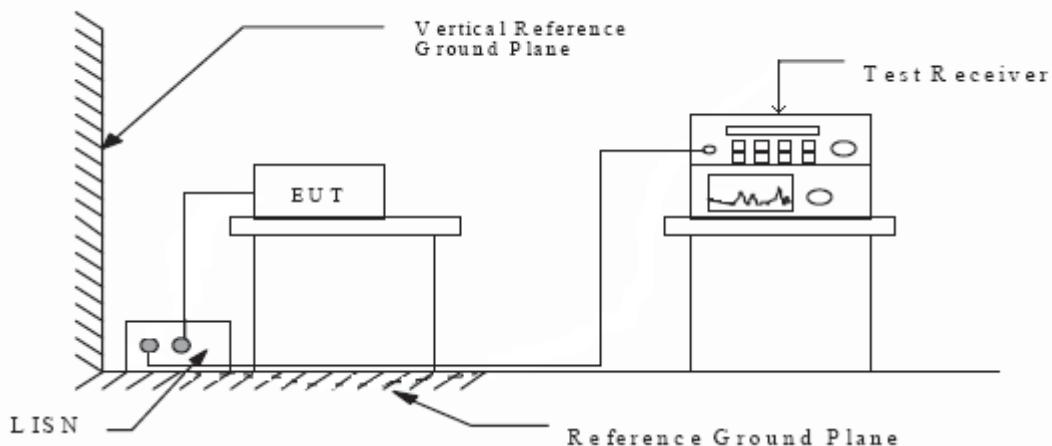

10.2 Limits

Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency MHz	Limits (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

* Decreases with the logarithm of the frequency.

10.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.


The bandwidth of test receiver (R & S ESPI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

10.4 Test Result

PASS


N

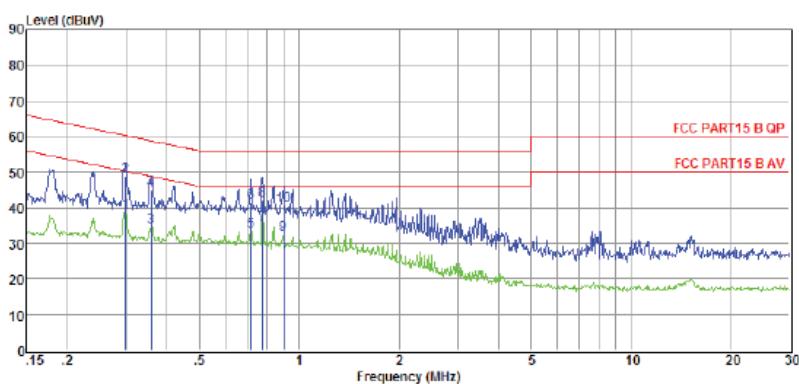

Item (Mark)	Freq (MHz)	Read Level (dB μ V)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dB μ V)	Limit Line (dB μ V)	Over Limit (dB)	Detector	Phase
1	0.30	19.12	9.60	0.02	9.85	38.59	50.28	-11.69	Average	NEUTRAL
2	0.30	29.48	9.60	0.02	9.85	48.95	60.28	-11.33	QP	NEUTRAL
3	0.36	15.09	9.60	0.02	9.86	34.57	48.78	-14.21	Average	NEUTRAL
4	0.36	25.30	9.60	0.02	9.86	44.78	58.78	-14.00	QP	NEUTRAL
5	0.72	13.89	9.62	0.07	9.85	33.43	46.00	-12.57	Average	NEUTRAL
6	0.72	21.86	9.62	0.07	9.85	41.40	56.00	-14.60	QP	NEUTRAL
7	0.78	15.86	9.61	0.08	9.86	35.41	46.00	-10.59	Average	NEUTRAL
8	0.78	22.66	9.61	0.08	9.86	42.21	56.00	-13.79	QP	NEUTRAL
9	0.89	13.07	9.61	0.06	9.86	32.60	46.00	-13.40	Average	NEUTRAL
10	0.89	20.86	9.61	0.06	9.86	40.39	56.00	-15.61	QP	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz), Step size: 4 kHz, Scan time: auto.

L

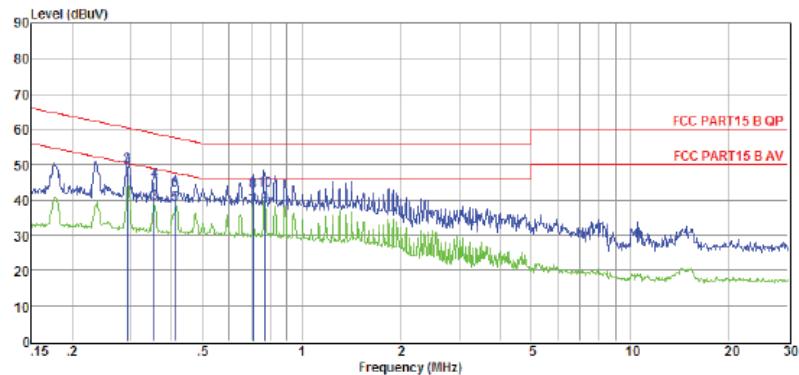


Item (Mark)	Freq (MHz)	Read Level (dB μ V)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dB μ V)	Limit Line (dB μ V)	Over Limit (dB)	Detector	Phase
1	0.30	24.27	9.62	0.02	9.85	43.76	50.37	-6.61	Average	LINE
2	0.30	30.06	9.62	0.02	9.85	49.55	60.37	-10.82	QP	LINE
3	0.36	19.38	9.63	0.02	9.86	38.89	48.83	-9.94	Average	LINE
4	0.36	25.68	9.63	0.02	9.86	45.19	58.83	-13.64	QP	LINE
5	0.41	19.29	9.63	0.03	9.86	38.81	47.59	-8.78	Average	LINE
6	0.41	23.04	9.63	0.03	9.86	42.56	57.59	-15.03	QP	LINE
7	0.71	18.31	9.62	0.07	9.85	37.85	46.00	-8.15	Average	LINE
8	0.71	22.77	9.62	0.07	9.85	42.31	56.00	-13.69	QP	LINE
9	0.77	18.64	9.62	0.08	9.86	38.20	46.00	-7.80	Average	LINE
10	0.77	23.24	9.62	0.08	9.86	42.80	56.00	-13.20	QP	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz), Step size: 4 kHz, Scan time: auto.




11 Antenna Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. Antenna is fixed by enclosure, can not be changed except take apart the product.

Antenna

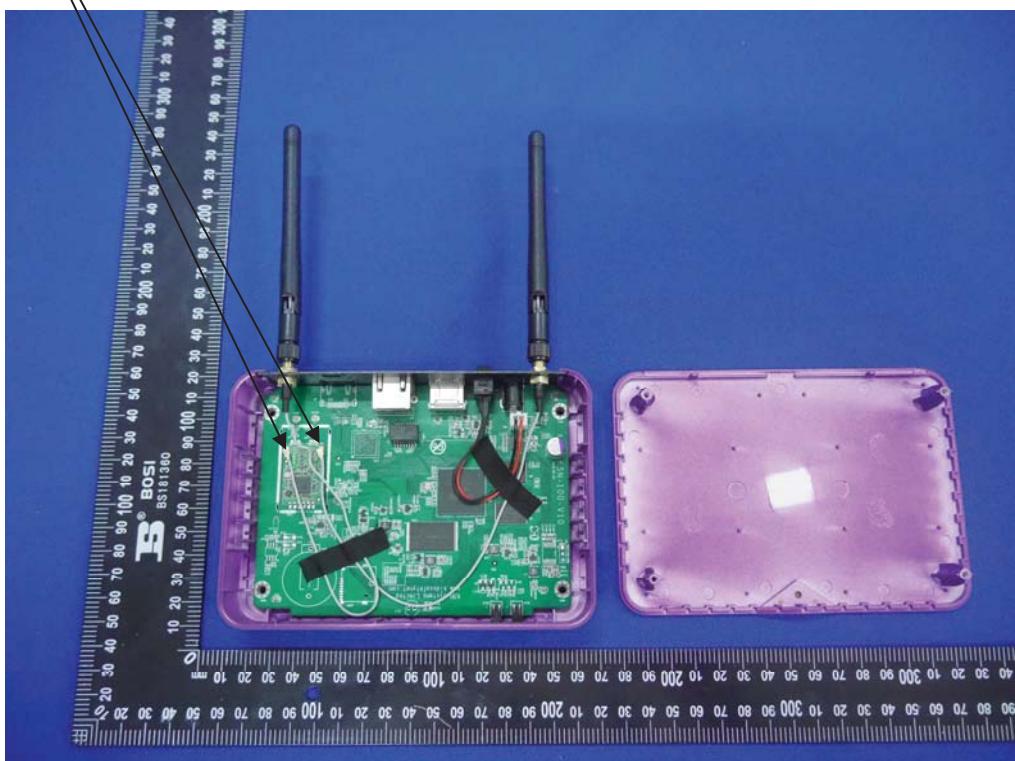

Note: The antennas to transmitter at the same time.

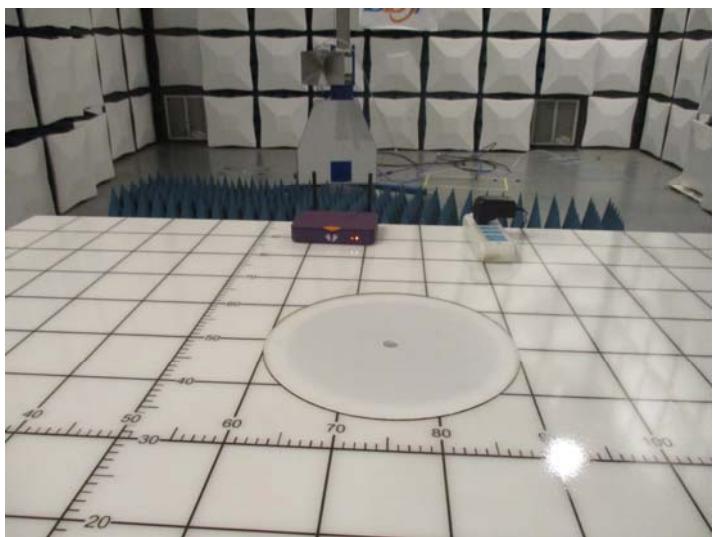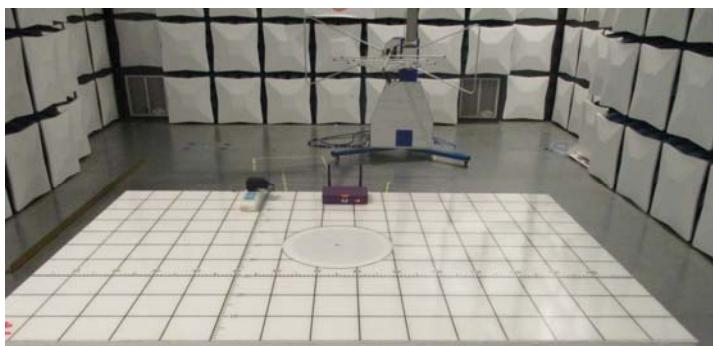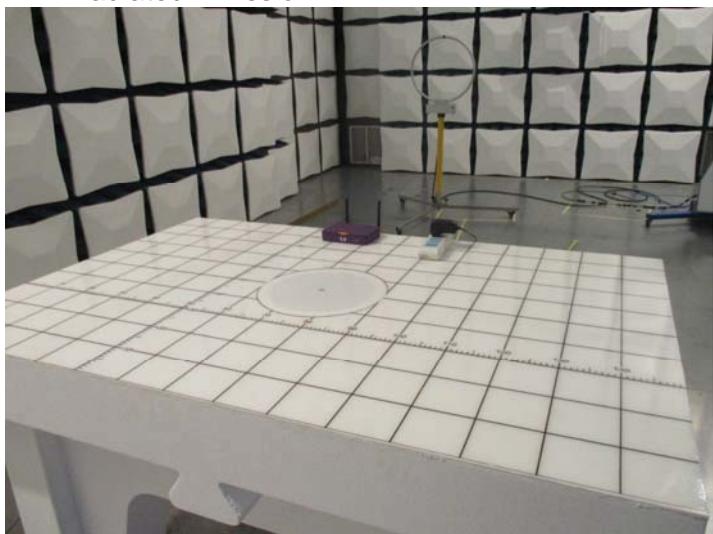12 Photograph of Test**12.1 Radiated Emission**

12.2 AC Power Line Conducted Emission